

# TEST REPORT

Reference No..... : WTX22X03057847W009  
FCC ID ..... : YHLBLUN2  
Applicant ..... : BLU Products, Inc.  
Address ..... : 10814 NW 33rd St # 100 Doral, FL 33172,USA  
Manufacturer ..... : The same as Applicant  
Address ..... : The same as Applicant  
Product Name ..... : Smart Phone  
Model No..... : N2  
Standards ..... : FCC Part 15.247  
Date of Receipt sample .... : 2022-03-30  
Date of Test..... : 2022-03-30 to 2022-05-28  
Date of Issue ..... : 2022-05-28  
Test Report Form No. .... : WTX\_Part 15\_247W  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Jason Su

Approved by:



Silin Chen

## **TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b> .....	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	7
1.7 TEST EQUIPMENT LIST AND DETAILS.....	8
<b>2. SUMMARY OF TEST RESULTS</b> .....	<b>10</b>
<b>3. ANTENNA REQUIREMENT</b> .....	<b>11</b>
3.1 STANDARD APPLICABLE.....	11
3.2 EVALUATION INFORMATION.....	11
<b>4. POWER SPECTRAL DENSITY</b> .....	<b>12</b>
4.1 STANDARD APPLICABLE.....	12
4.2 TEST SETUP BLOCK DIAGRAM.....	12
4.3 TEST PROCEDURE.....	12
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	12
<b>5. DTS BANDWIDTH</b> .....	<b>13</b>
5.1 STANDARD APPLICABLE.....	13
5.2 TEST SETUP BLOCK DIAGRAM.....	13
5.3 TEST PROCEDURE.....	13
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	13
<b>6. RF OUTPUT POWER</b> .....	<b>14</b>
6.1 STANDARD APPLICABLE.....	14
6.2 TEST SETUP BLOCK DIAGRAM.....	14
6.3 TEST PROCEDURE.....	14
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	14
<b>7. FIELD STRENGTH OF SPURIOUS EMISSIONS</b> .....	<b>15</b>
7.1 STANDARD APPLICABLE.....	15
7.2 TEST PROCEDURE.....	15
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	17
<b>8. OUT OF BAND EMISSIONS</b> .....	<b>32</b>
8.1 STANDARD APPLICABLE.....	32
8.2 TEST PROCEDURE.....	32
8.3 SUMMARY OF TEST RESULTS/PLOTS.....	33
<b>9. CONDUCTED EMISSIONS</b> .....	<b>38</b>
9.1 TEST PROCEDURE.....	38
9.2 BASIC TEST SETUP BLOCK DIAGRAM.....	38
9.3 TEST RECEIVER SETUP.....	38
9.4 SUMMARY OF TEST RESULTS/PLOTS.....	38
<b>APPENDIX SUMMARY</b> .....	<b>41</b>
<b>APPENDIX A</b> .....	<b>42</b>
<b>APPENDIX B</b> .....	<b>45</b>
<b>APPENDIX C</b> .....	<b>48</b>
<b>APPENDIX D</b> .....	<b>51</b>
<b>APPENDIX PHOTOGRAPHS</b> .....	<b>55</b>

**Report version**

Version No.	Date of issue	Description
Rev.00	2022-05-28	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Smart Phone
Trade Name	BLU
Model No.:	N2
Adding Model(s):	/
Rated Voltage:	DC3.87V
Battery Capacity:	4100mAh ( C806352410P )
Adapter Model:	US-BM-3000 INPUT:AC100-240V, 50/60Hz, 0.8A Output:DC5V3.0A/DC9V3A/DC10V3A
Software Version:	BOLD_N0050UU_V11.0.04.01_GENERIC
Hardware Version:	Kx3U _01
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Bluetooth Version:	V5.2 (BLE mode)
Frequency Range:	2402-2480MHz
RF Output Power:	1Mbps : -2.10dBm (Conducted) 2Mbps: -2.00dBm (Conducted)
Data Rate:	1Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	0.8dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247**: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

**558074 D01 15.247 Meas Guidance v05r02**: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

**ANSI C63.10-2013**: American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### **Address of the test laboratory**

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### **FCC – Registration No.: 125990**

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

<b>Test Mode List</b>		
Test Mode	Description	Remark
TM1	Low	2402MHz
TM2	Middle	2440MHz
TM3	High	2480MHz

<b>Test Conditions</b>	
Temperature:	22~25 °C
Relative Humidity:	45~55 %
ATM Pressure:	1019 mbar

<b>EUT Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	Without Ferrite
Headset Cable	1.2	Unshielded	Without Ferrite

<b>Special Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

<b>Auxiliary Equipment List and Details</b>			
Description	Manufacturer	Model	Serial Number
Notebook	ASUS	FA5061C	M8NRCX057996349

**1.6 Measurement Uncertainty**

<b>Measurement uncertainty</b>		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

**1.7 Test Equipment List and Details**

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
<input checked="" type="checkbox"/> Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
<input checked="" type="checkbox"/> Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24



SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
<input type="checkbox"/> Chamber B: Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
<input type="checkbox"/> Chamber C: Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
<input checked="" type="checkbox"/> Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-21	2023-03-20
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
<input type="checkbox"/> Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2022-03-22	2023-03-21
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing.

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

### **3. Antenna Requirement**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Evaluation Information**

This product has an Integral Antenna, fulfill the requirement of this section.


## 4. Power Spectral Density

---

### 4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 4.2 Test Setup Block Diagram

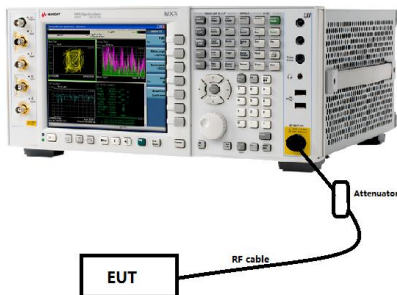

### 4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.

### 4.4 Summary of Test Results/Plots

Please refer to Appendix A


## 5. DTS Bandwidth

---

### 5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

### 5.2 Test Setup Block Diagram

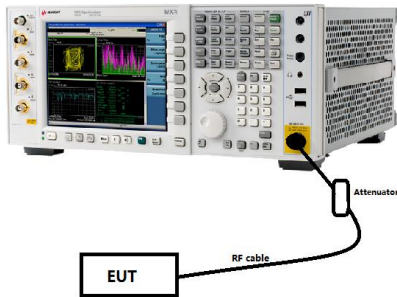

### 5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

### 5.4 Summary of Test Results/Plots

Please refer to Appendix B


## 6. RF Output Power

---

### 6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

### 6.2 Test Setup Block Diagram

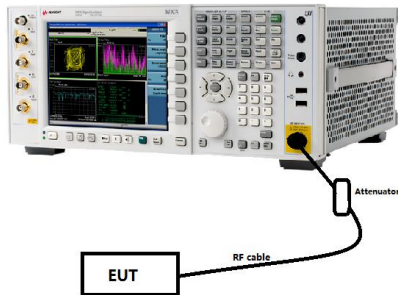

### 6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

### 6.4 Summary of Test Results/Plots

Please refer to Appendix C

## 7. Field Strength of Spurious Emissions

### 7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


### 7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

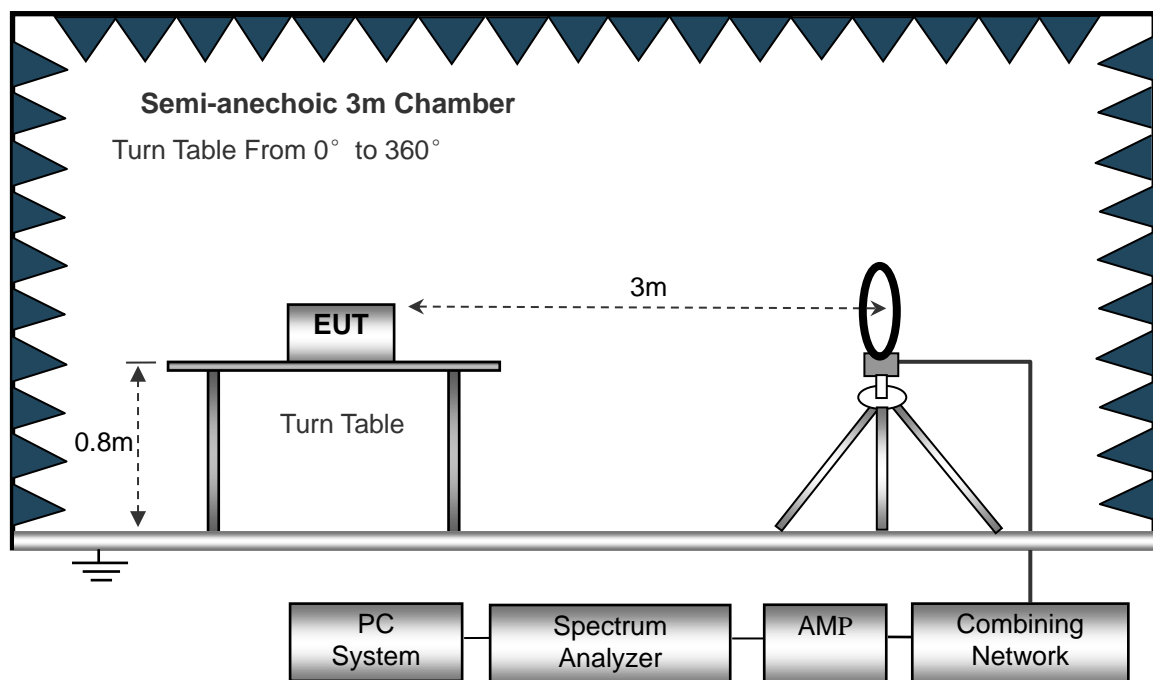

The test setup for emission measurement from 30MHz to 1GHz.

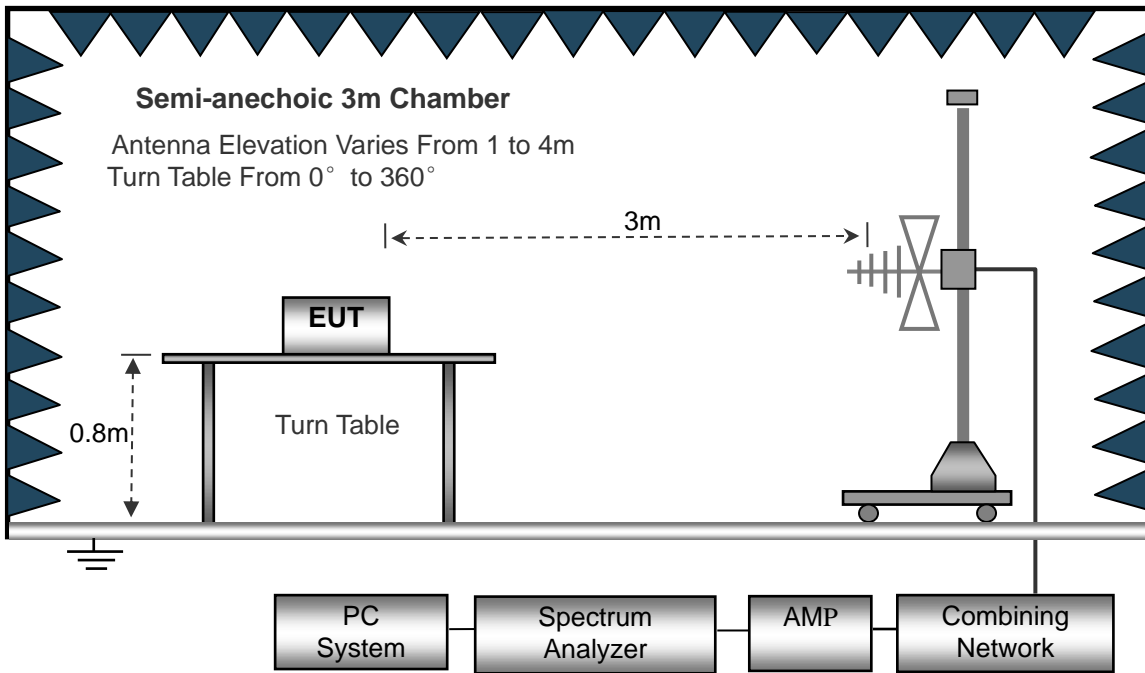

The test setup for emission measurement above 1GHz.

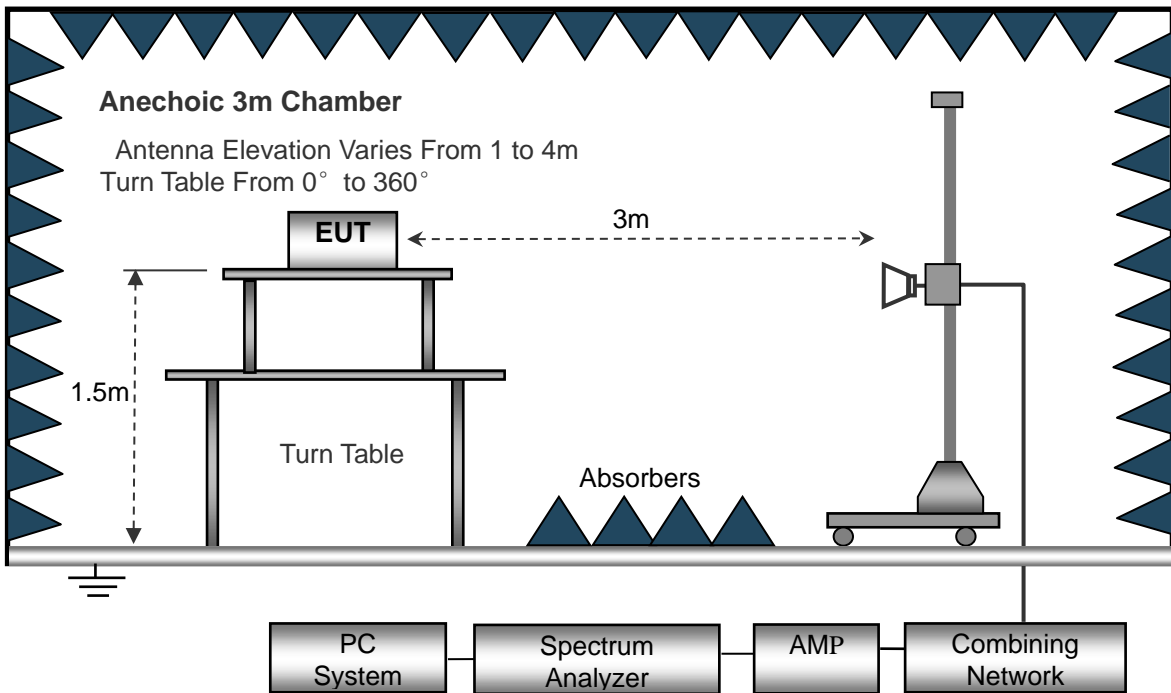

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV



### 7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 7.4 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


- Spurious Emissions Below 1GHz
- BLE-1Mbps

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

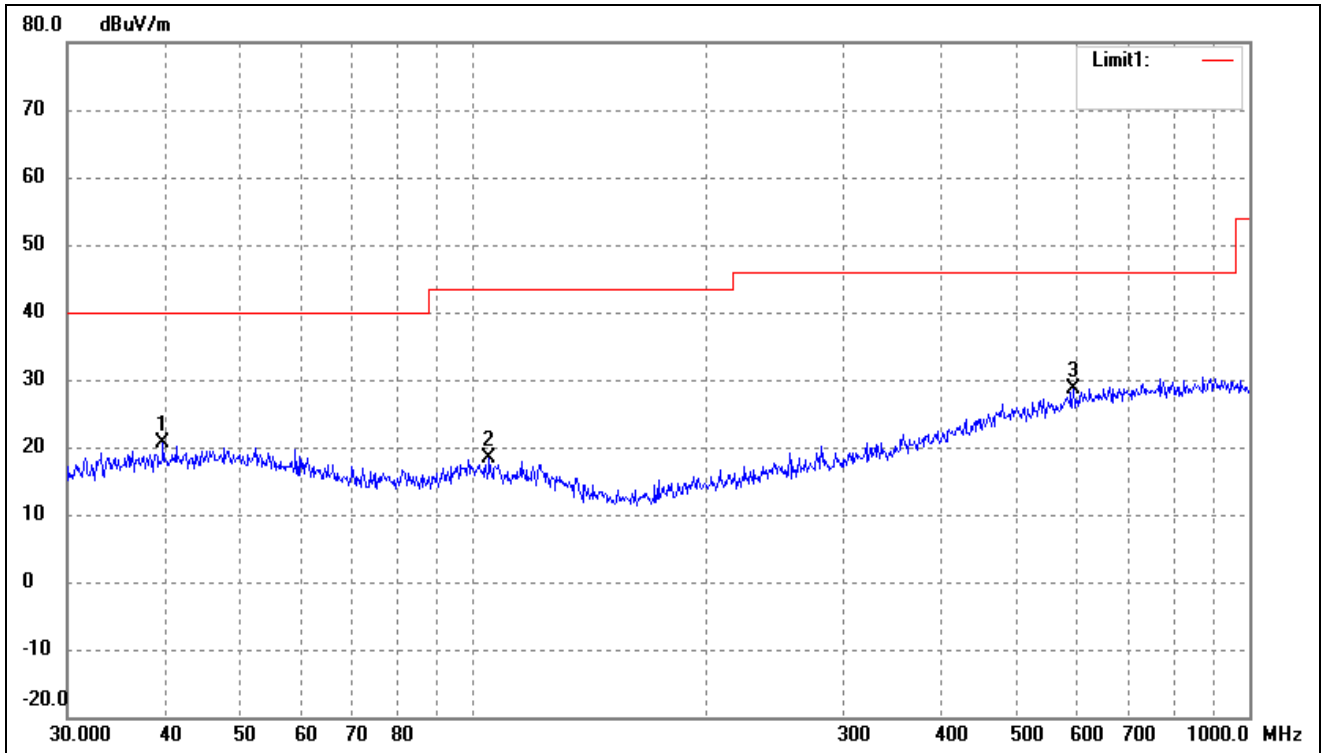


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	39.8542	27.60	-7.03	20.57	40.00	-19.43	-	-	peak
2	104.9033	27.28	-8.80	18.48	43.50	-25.02	-	-	peak
3	593.0497	28.37	0.25	28.62	46.00	-17.38	-	-	peak

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

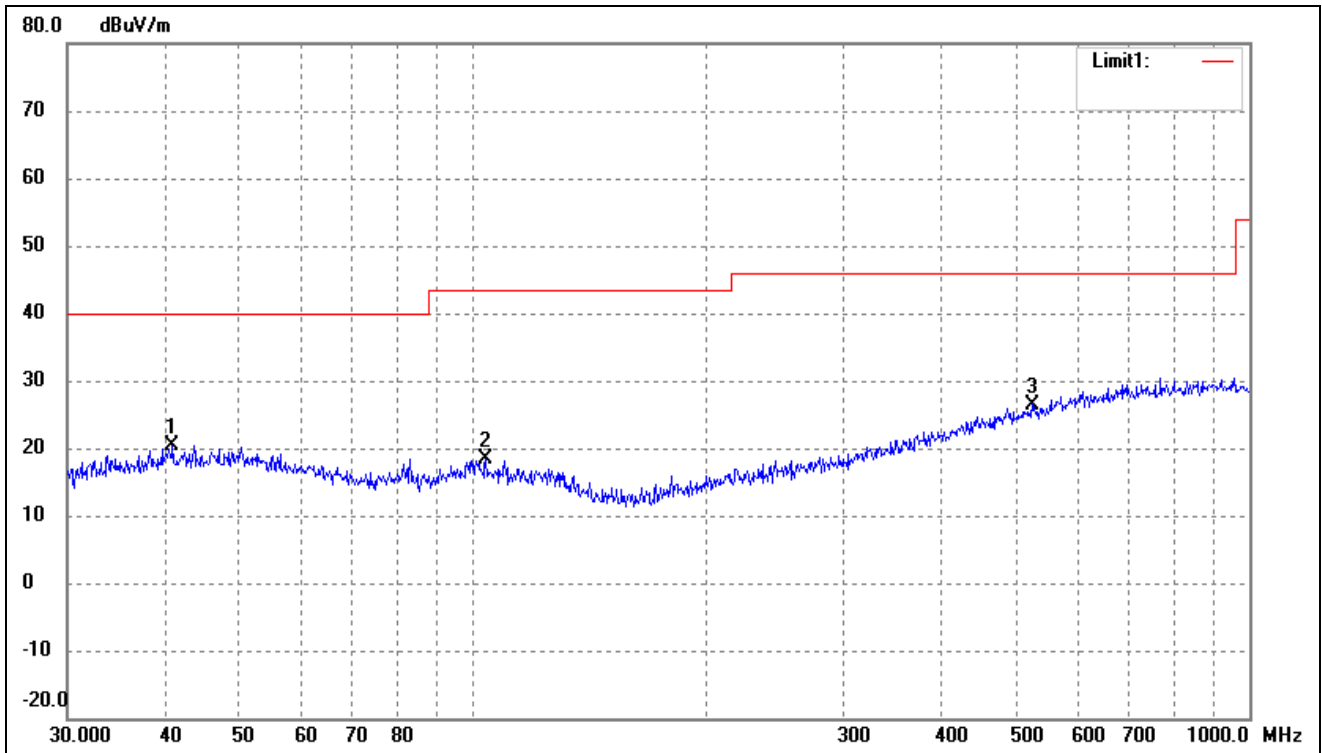


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	40.9881	27.34	-7.00	20.34	40.00	-19.66	-	-	peak
2	103.8055	27.17	-8.79	18.38	43.50	-25.12	-	-	peak
3	524.5541	27.39	-0.89	26.50	46.00	-19.50	-	-	peak

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

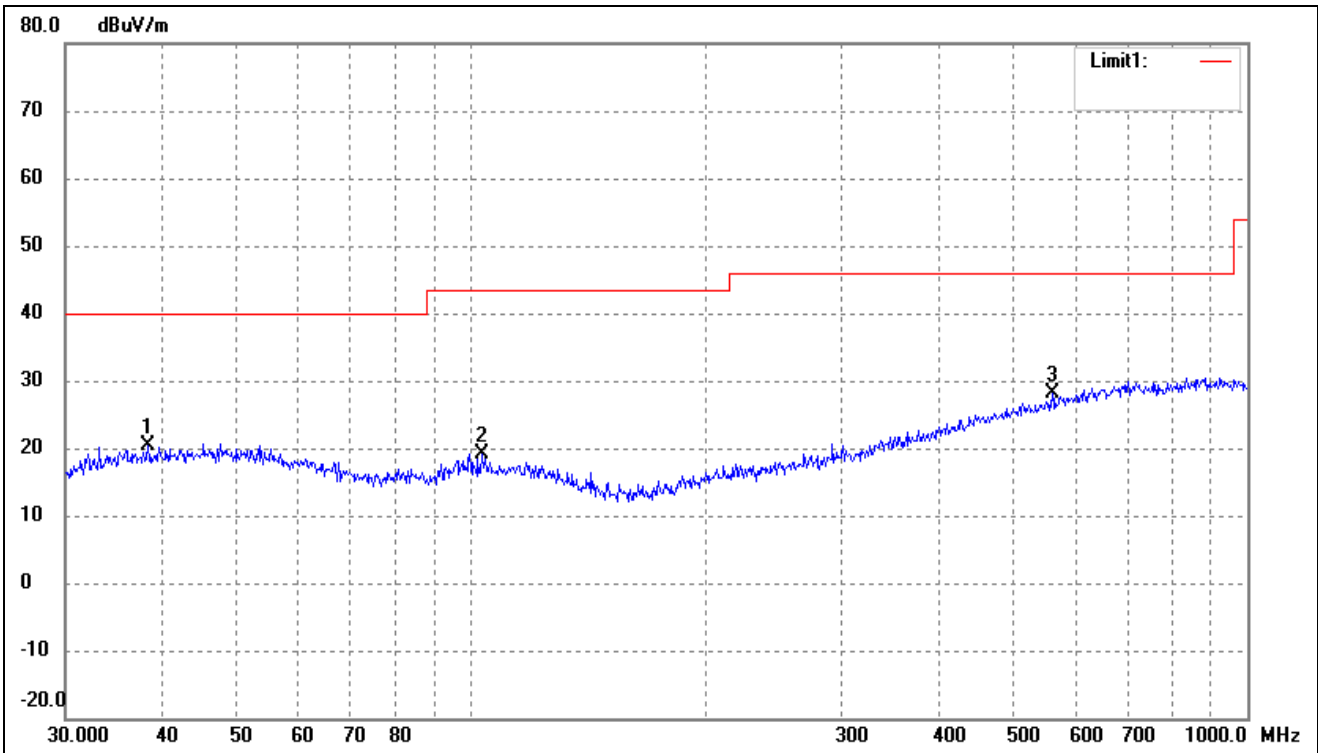


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	38.3462	27.82	-7.40	20.42	40.00	-19.58	-	-	peak
2	103.0800	27.84	-8.77	19.07	43.50	-24.43	-	-	peak
3	560.6928	28.45	-0.29	28.16	46.00	-17.84	-	-	peak

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

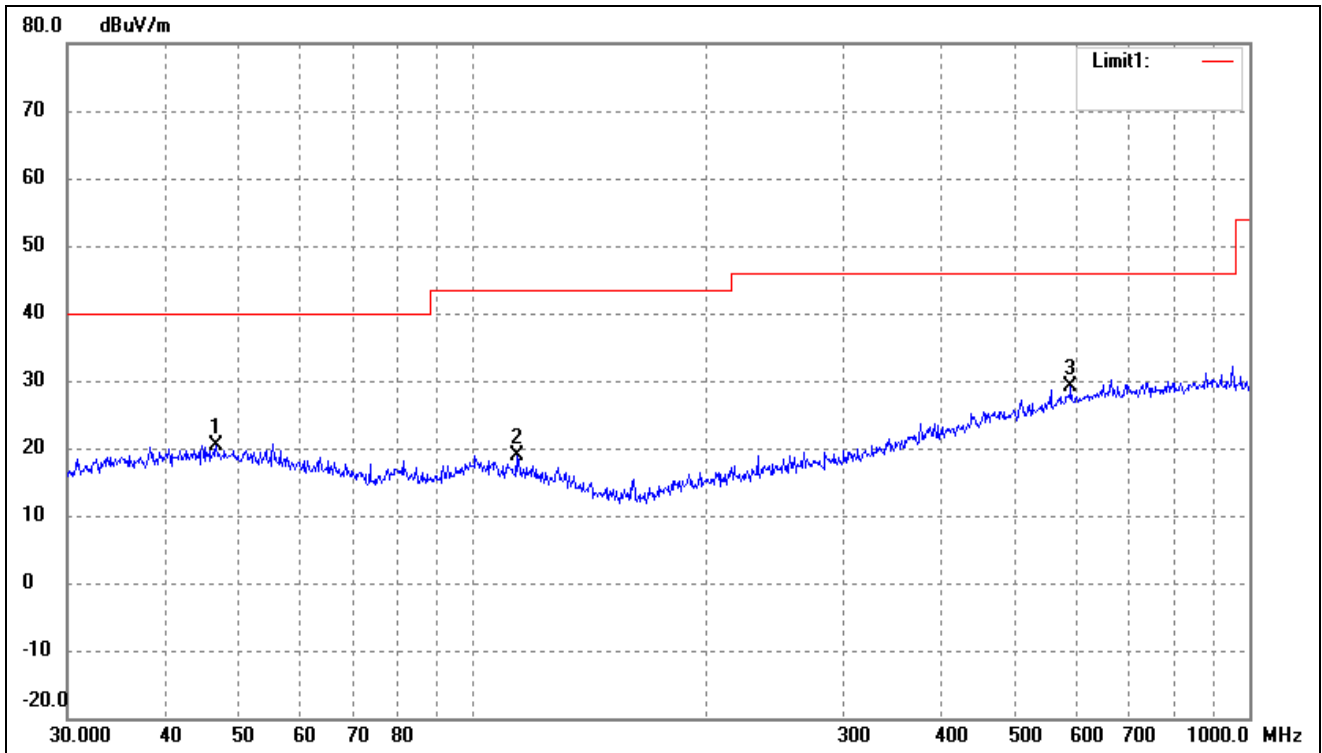


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.6664	27.46	-6.98	20.48	40.00	-19.52	-	-	peak
2	113.7143	28.07	-9.14	18.93	43.50	-24.57	-	-	peak
3	588.9051	28.89	0.18	29.07	46.00	-16.93	-	-	peak

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

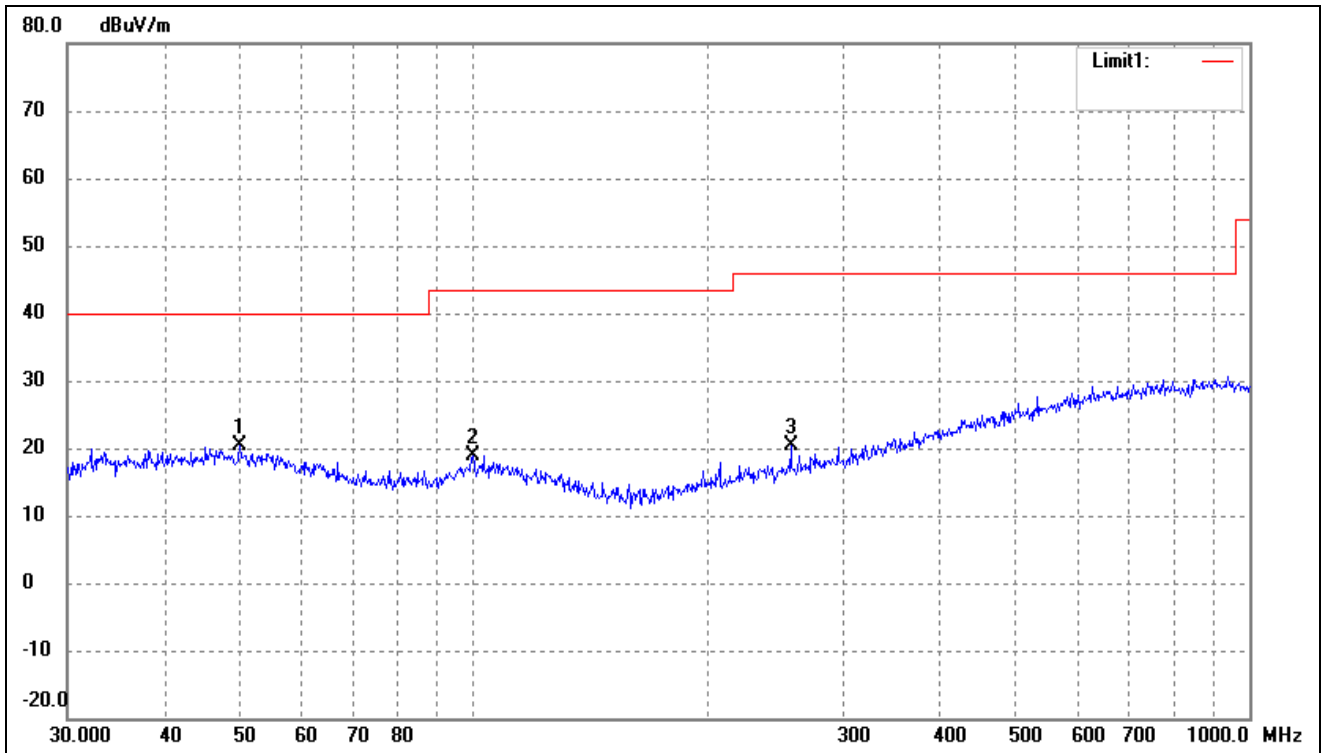

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	50.0566	27.29	-6.97	20.32	40.00	-19.68	-	-	peak
2	99.8777	27.61	-8.75	18.86	43.50	-24.64	-	-	peak
3	256.5211	28.57	-8.13	20.44	46.00	-25.56	-	-	peak


Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

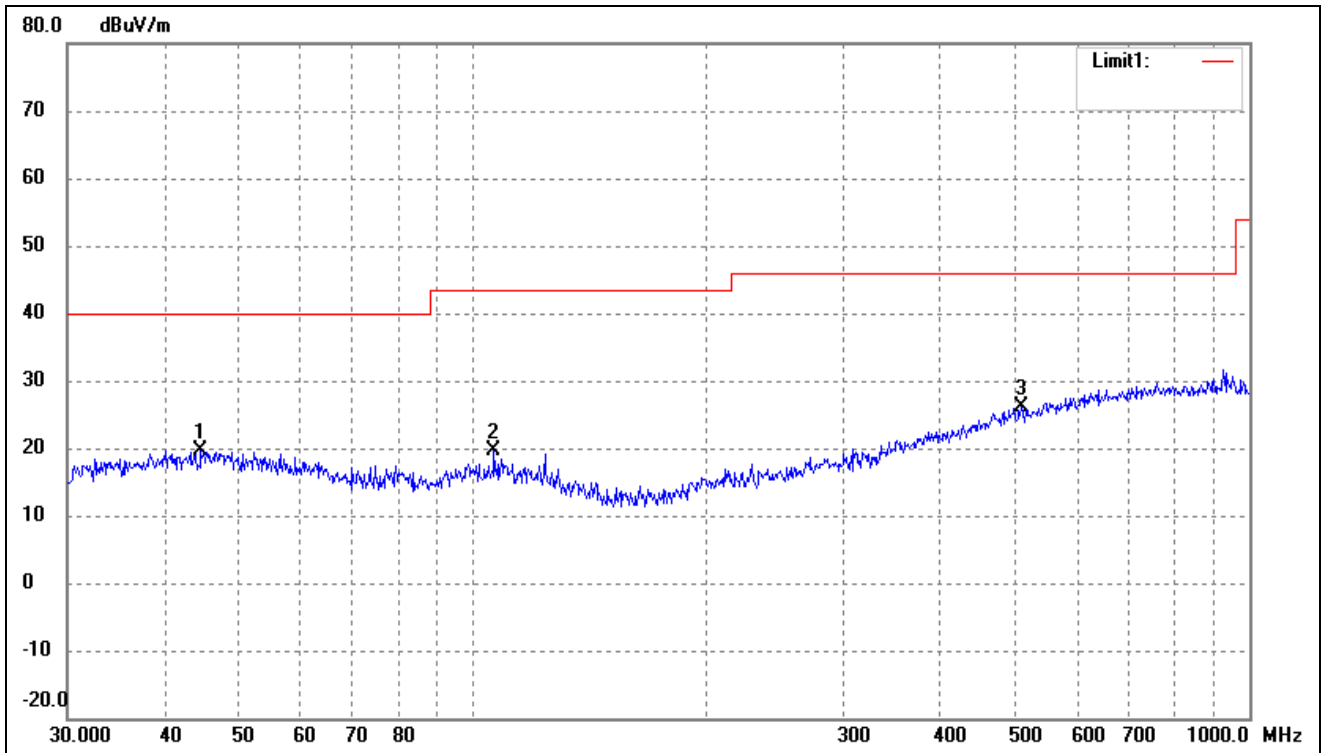

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	44.5868	26.68	-6.99	19.69	40.00	-20.31	-	-	peak
2	106.3850	28.34	-8.82	19.52	43.50	-23.98	-	-	peak
3	508.2582	27.19	-1.16	26.03	46.00	-19.97	-	-	peak

➤ BLE-2Mbps


Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

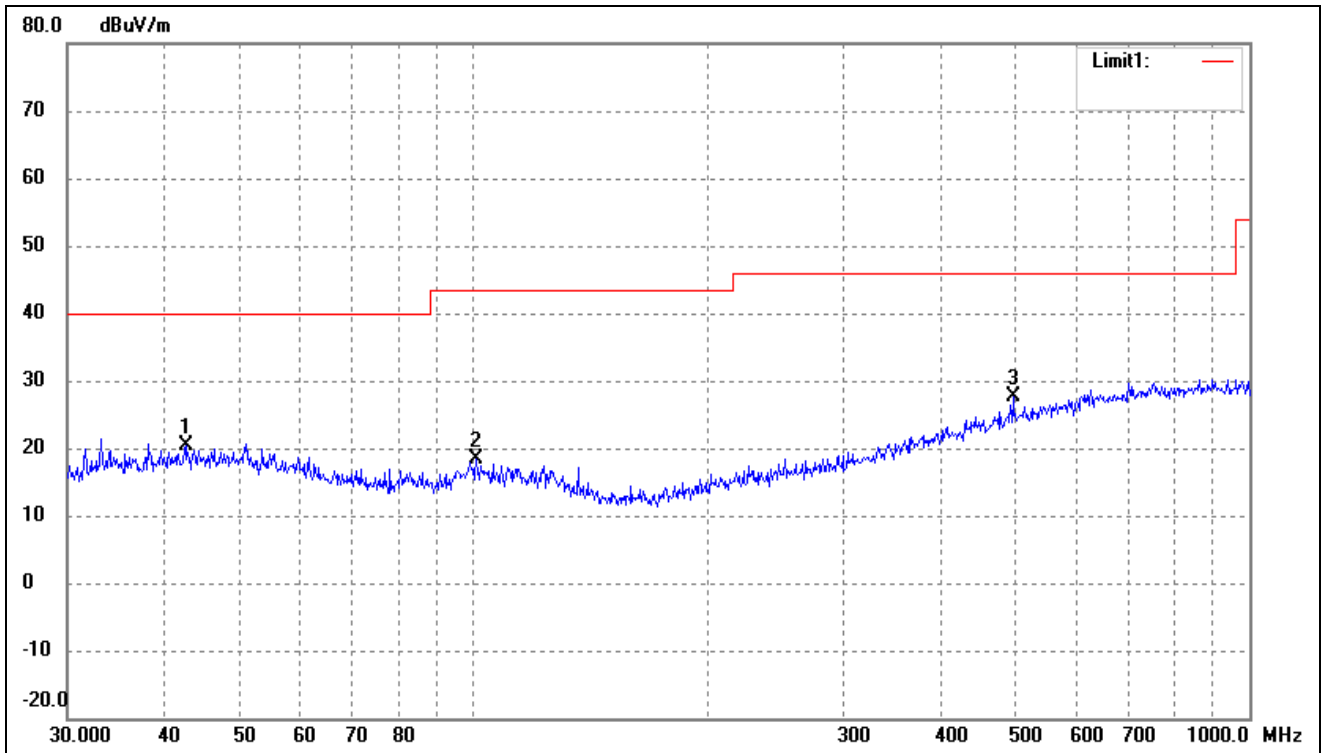

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	42.7496	27.31	-6.99	20.32	40.00	-19.68	-	-	peak
2	100.9340	27.15	-8.74	18.41	43.50	-25.09	-	-	peak
3	495.9344	28.93	-1.40	27.53	46.00	-18.47	-	-	peak




Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

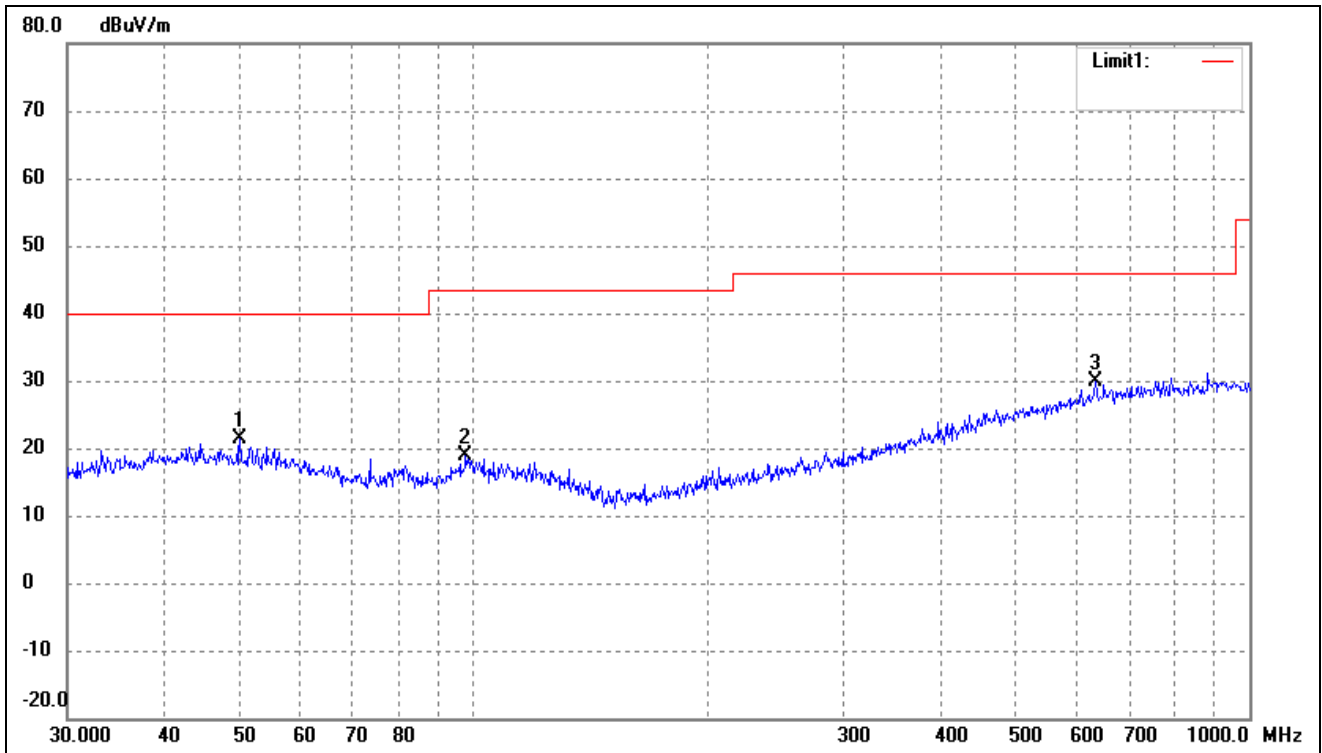


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	50.0566	28.26	-6.97	21.29	40.00	-18.71	-	-	peak
2	97.7983	27.95	-9.13	18.82	43.50	-24.68	-	-	peak
3	633.9073	29.07	0.74	29.81	46.00	-16.19	-	-	peak

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

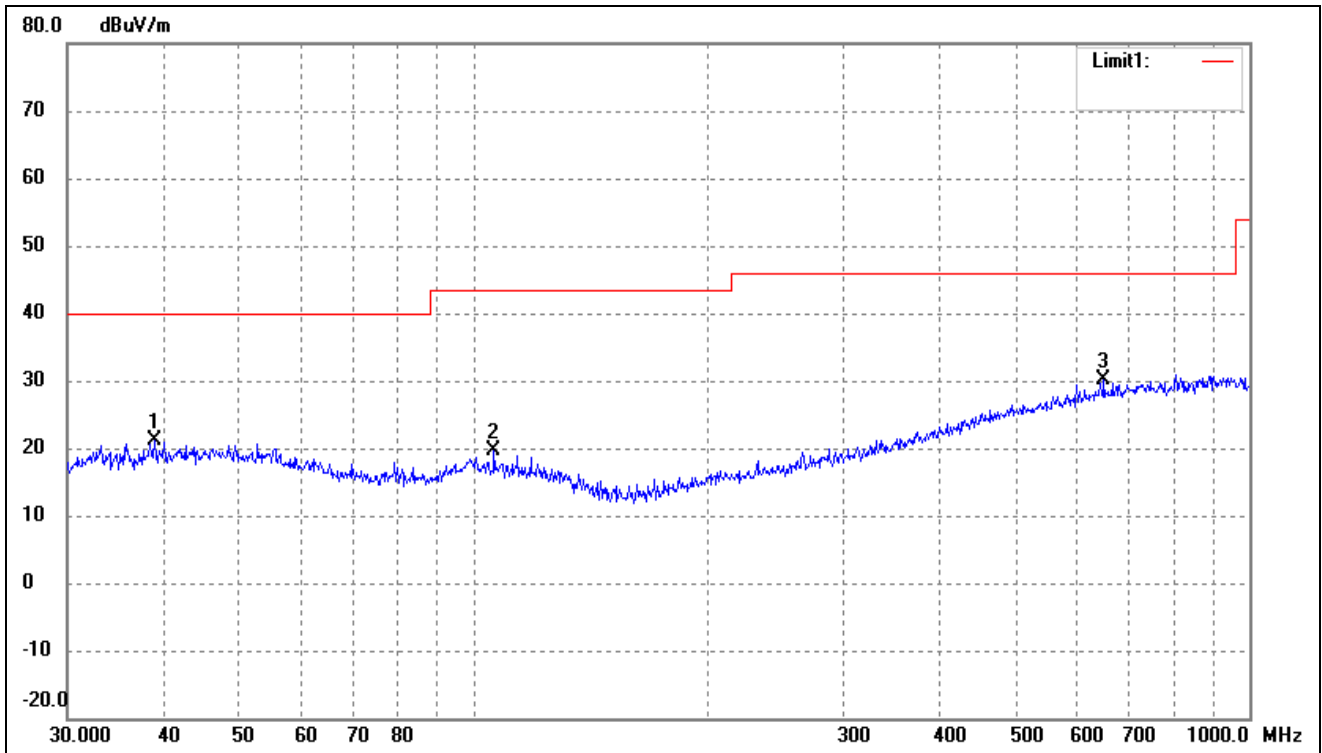


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	38.8879	28.45	-7.27	21.18	40.00	-18.82	-	-	peak
2	106.3850	28.56	-8.82	19.74	43.50	-23.76	-	-	peak
3	649.6597	29.09	0.92	30.01	46.00	-15.99	-	-	peak

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

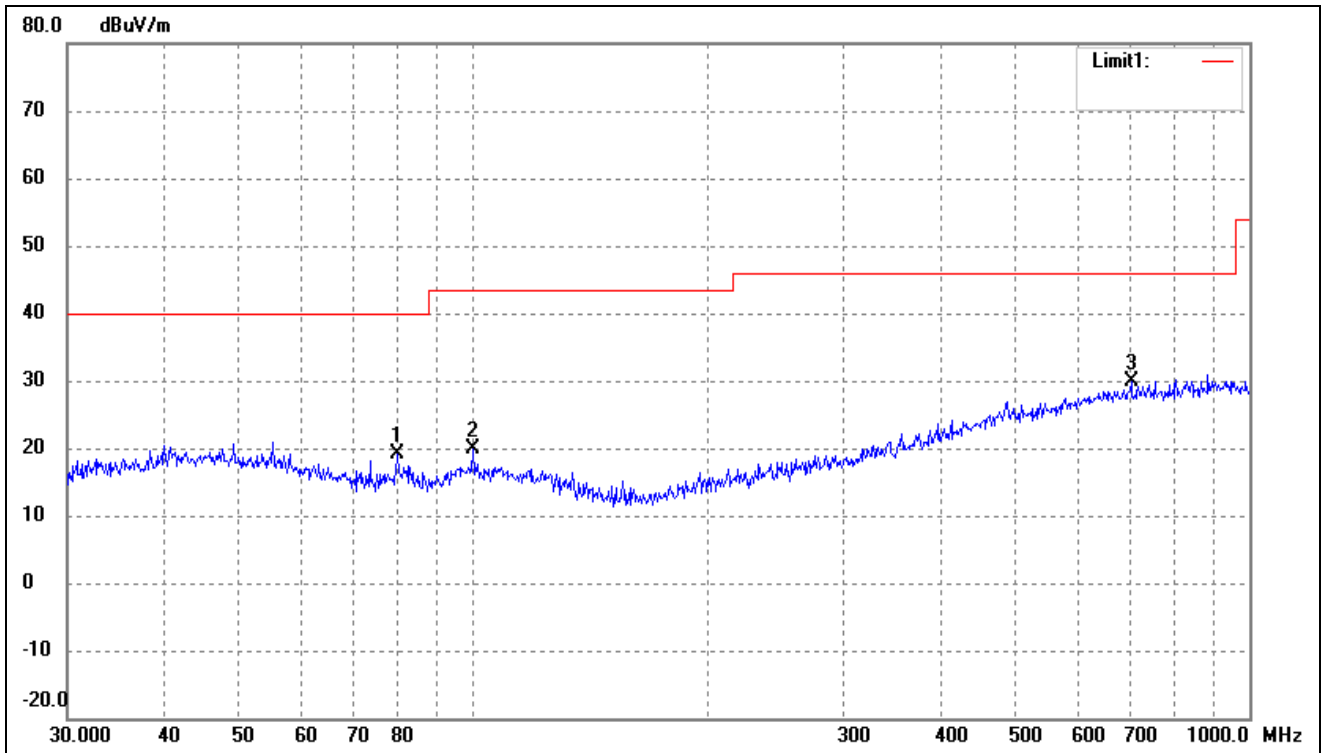


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	79.8003	29.77	-10.71	19.06	40.00	-20.94	-	-	peak
2	99.8777	28.56	-8.75	19.81	43.50	-23.69	-	-	peak
3	704.2261	28.42	1.46	29.88	46.00	-16.12	-	-	peak

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

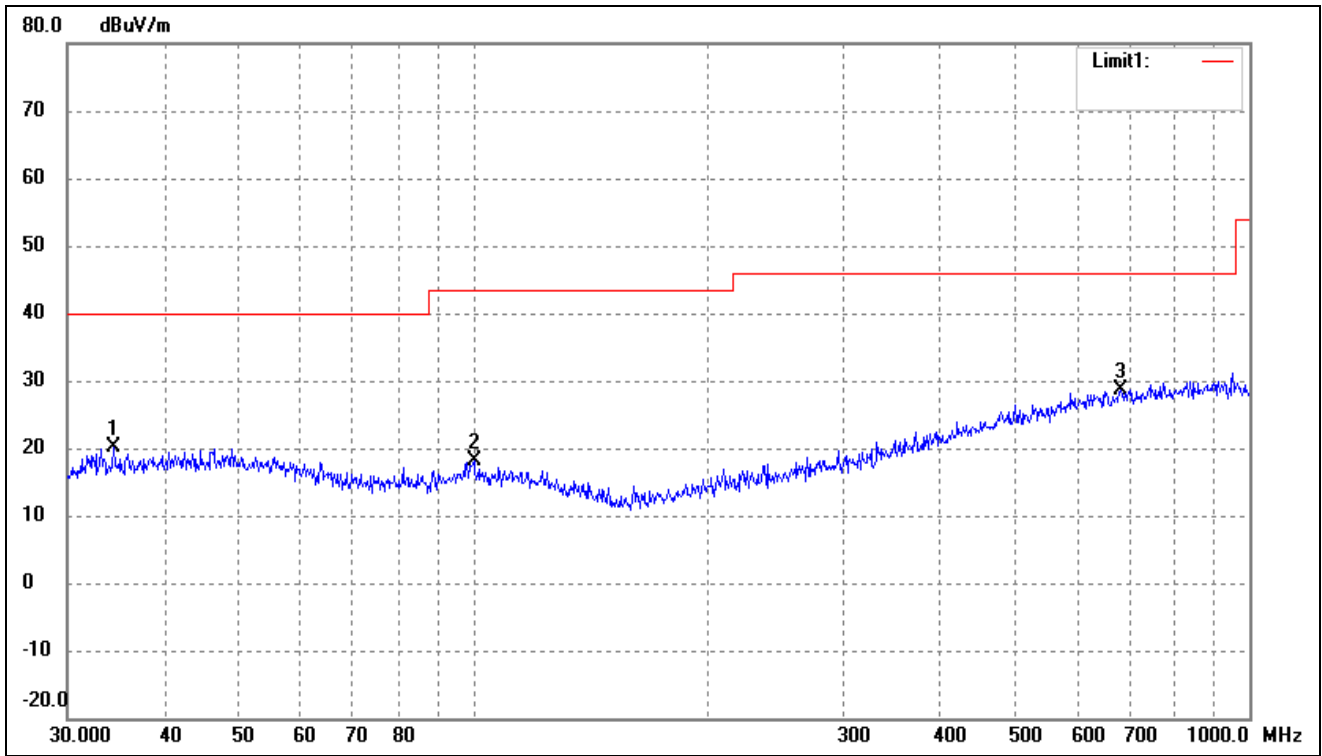

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	34.3964	28.50	-8.37	20.13	40.00	-19.87	-	-	peak
2	100.2286	26.74	-8.73	18.01	43.50	-25.49	-	-	peak
3	682.3485	27.37	1.25	28.62	46.00	-17.38	-	-	peak

Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

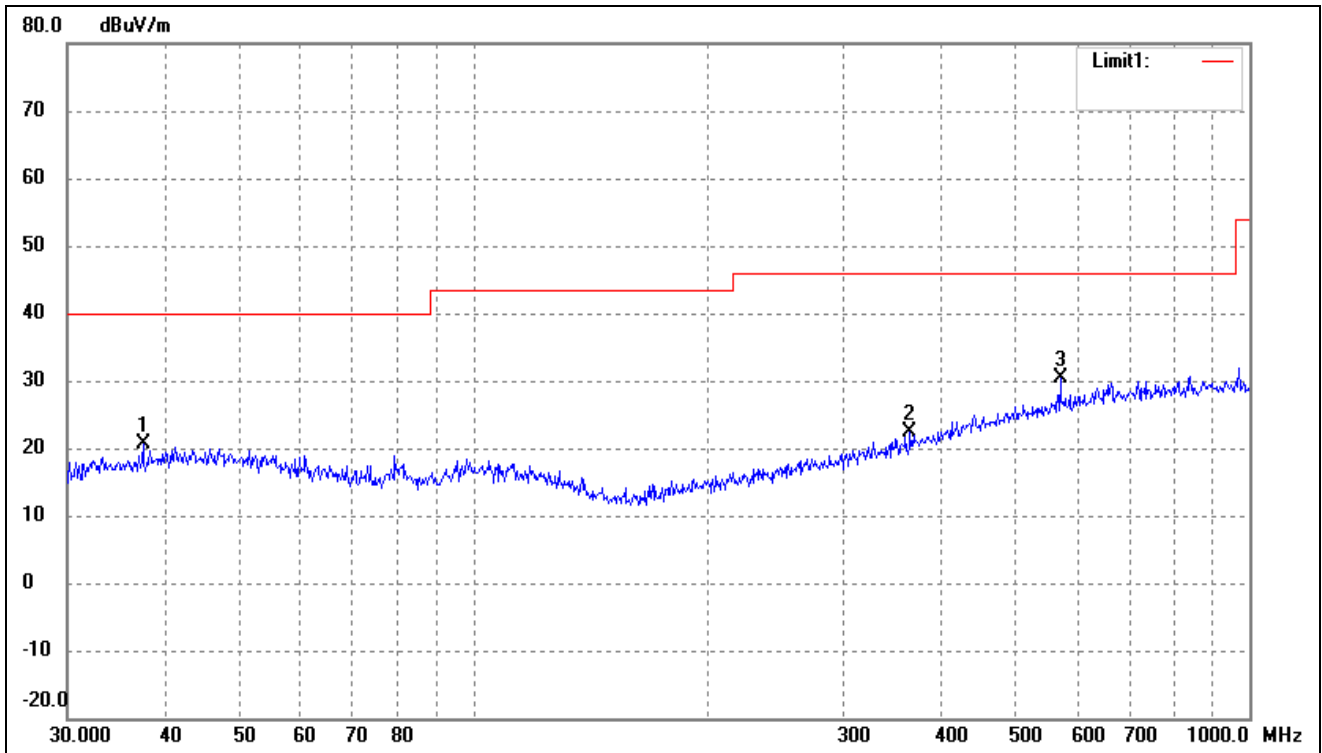

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	37.5479	28.27	-7.60	20.67	40.00	-19.33	-	-	peak
2	365.5391	27.36	-4.93	22.43	46.00	-23.57	-	-	peak
3	570.6100	30.49	-0.12	30.37	46.00	-15.63	-	-	peak

Remark: '-' Means 'the test Degree and Height are not recorded by the test software and only show the worst case in the test report.'

- Spurious Emissions Above 1GHz
- BLE-1Mbps

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804	60.48	-6.13	54.35	74	-19.65	H	PK
4804	40.4	-6.13	34.27	54	-19.73	H	AV
7206	55.36	-1.64	53.72	74	-20.28	H	PK
7206	40.75	-1.64	39.11	54	-14.89	H	AV
4804	58.47	-6.13	52.34	74	-21.66	V	PK
4804	40.42	-6.13	34.29	54	-19.71	V	AV
7206	55.26	-1.64	53.62	74	-20.38	V	PK
7206	41.1	-1.64	39.46	54	-14.54	V	AV
Middle Channel-2440MHz							
4880	61.56	-5.93	55.63	74	-18.37	H	PK
4880	40.4	-5.93	34.47	54	-19.53	H	AV
7320	60.89	-1.58	59.31	74	-14.69	H	PK
7320	38.84	-1.58	37.26	54	-16.74	H	AV
4880	59.91	-5.93	53.98	74	-20.02	V	PK
4880	39.46	-5.93	33.53	54	-20.47	V	AV
7320	61.88	-1.58	60.3	74	-13.7	V	PK
7320	41.55	-1.58	39.97	54	-14.03	V	AV
High Channel-2480MHz							
4960	59.63	-5.71	53.92	74	-20.08	H	PK
4960	40.79	-5.71	35.08	54	-18.92	H	AV
7440	58.13	-1.52	56.61	74	-17.39	H	PK
7440	39.14	-1.52	37.62	54	-16.38	H	AV
4960	61.76	-5.71	56.05	74	-17.95	V	PK
4960	41.92	-5.71	36.21	54	-17.79	V	AV
7440	61.4	-1.52	59.88	74	-14.12	V	PK
7440	38.83	-1.52	37.31	54	-16.69	V	AV

## ➤ BLE-2Mbps

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804	61.71	-6.13	55.58	74	-18.42	H	PK
4804	41.19	-6.13	35.06	54	-18.94	H	AV
7206	56.7	-1.64	55.06	74	-18.94	H	PK
7206	41.66	-1.64	40.02	54	-13.98	H	AV
4804	58.07	-6.13	51.94	74	-22.06	V	PK
4804	41.77	-6.13	35.64	54	-18.36	V	AV
7206	56.69	-1.64	55.05	74	-18.95	V	PK
7206	41.47	-1.64	39.83	54	-14.17	V	AV
Middle Channel-2440MHz							
4880	58.76	-5.93	52.83	74	-21.17	H	PK
4880	39.29	-5.93	33.36	54	-20.64	H	AV
7320	61.84	-1.58	60.26	74	-13.74	H	PK
7320	41.19	-1.58	39.61	54	-14.39	H	AV
4880	61.05	-5.93	55.12	74	-18.88	V	PK
4880	38.05	-5.93	32.12	54	-21.88	V	AV
7320	59.71	-1.58	58.13	74	-15.87	V	PK
7320	38.07	-1.58	36.49	54	-17.51	V	AV
High Channel-2480MHz							
4960	60.63	-5.71	54.92	74	-19.08	H	PK
4960	39.08	-5.71	33.37	54	-20.63	H	AV
7440	60.27	-1.52	58.75	74	-15.25	H	PK
7440	38.64	-1.52	37.12	54	-16.88	H	AV
4960	60.24	-5.71	54.53	74	-19.47	V	PK
4960	40.47	-5.71	34.76	54	-19.24	V	AV
7440	58.63	-1.52	57.11	74	-16.89	V	PK
7440	40.52	-1.52	39.00	54	-15.00	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 8. Out of Band Emissions

---

### 8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 8.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

#### A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement



KDB publication number: 913591 may be used for the radiated bandedge measurements.

**B. Antenna-port conducted measurements**

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

RBW as a function of frequency

Frequency	RBW
9kHz to 150kHz	200Hz to 300Hz
0.15MHz to 30MHz	9kHz to 10kHz
30MHz to 1000MHz	100kHz to 120kHz
>1000MHz	1MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

**8.3 Summary of Test Results/Plots**

➤ Radiated test


BLE-1Mbps

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

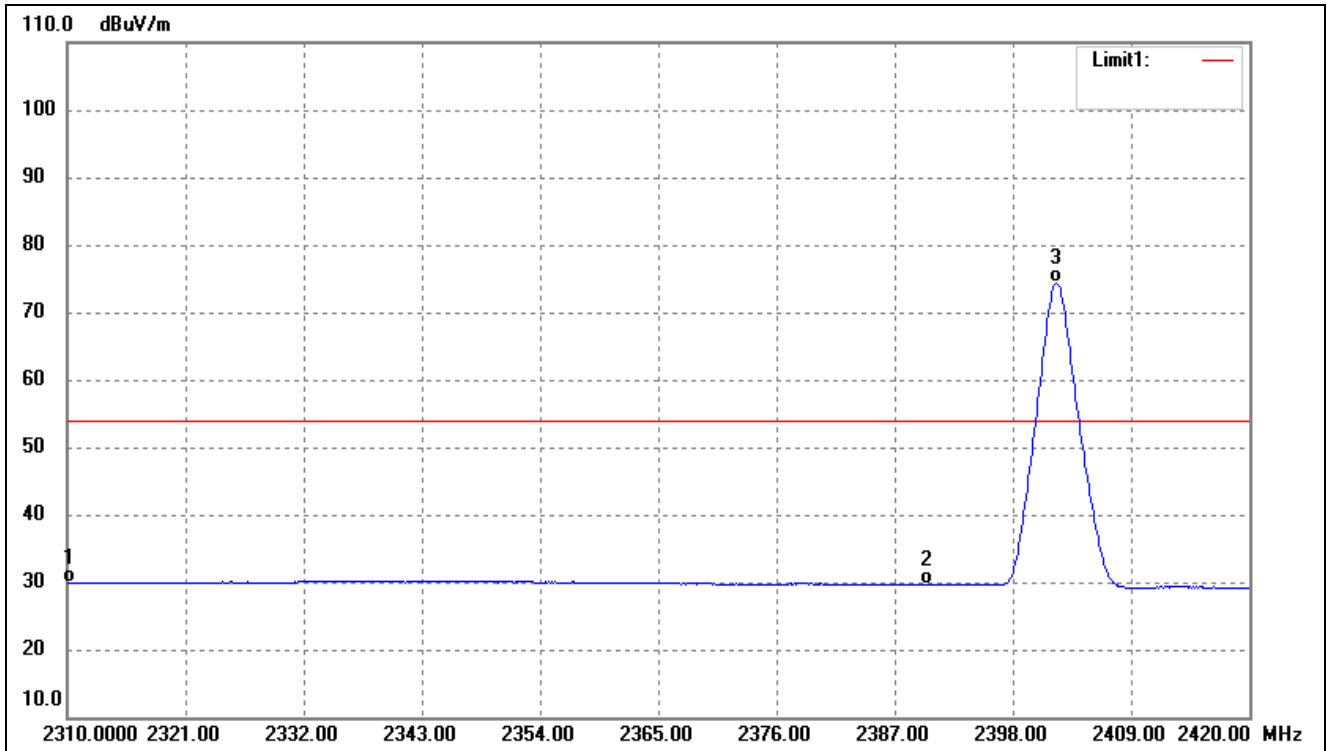

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.65	-10.82	29.83	54.00	-24.17	Average Detector
	2310.000	53.39	-10.82	42.57	74.00	-31.43	Peak Detector
2	2390.000	40.39	-10.70	29.69	54.00	-24.31	Average Detector
	2390.000	52.53	-10.70	41.83	74.00	-32.17	Peak Detector
3	2402.070	84.96	-10.69	74.27	/	/	Average Detector
	2402.180	95.49	-10.69	84.80	/	/	Peak Detector


Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

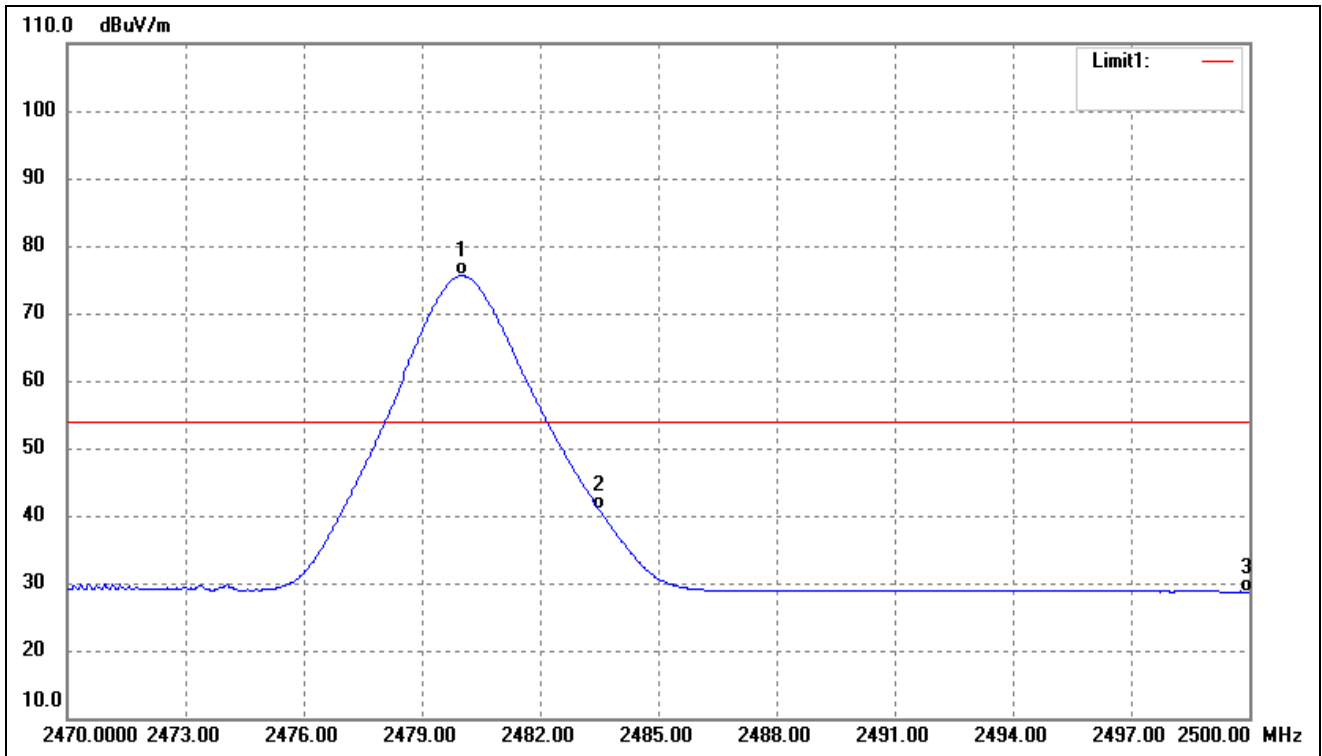

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.020	86.15	-10.58	75.57	/	/	Average Detector
	2480.140	94.29	-10.58	83.71	/	/	Peak Detector
2	2483.500	51.51	-10.58	40.93	54.00	-13.07	Average Detector
	2483.500	57.65	-10.58	47.07	74.00	-26.93	Peak Detector
3	2500.000	39.25	-10.55	28.70	54.00	-25.30	Average Detector
	2500.000	51.94	-10.55	41.39	74.00	-32.61	Peak Detector


BLE-2Mbps

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

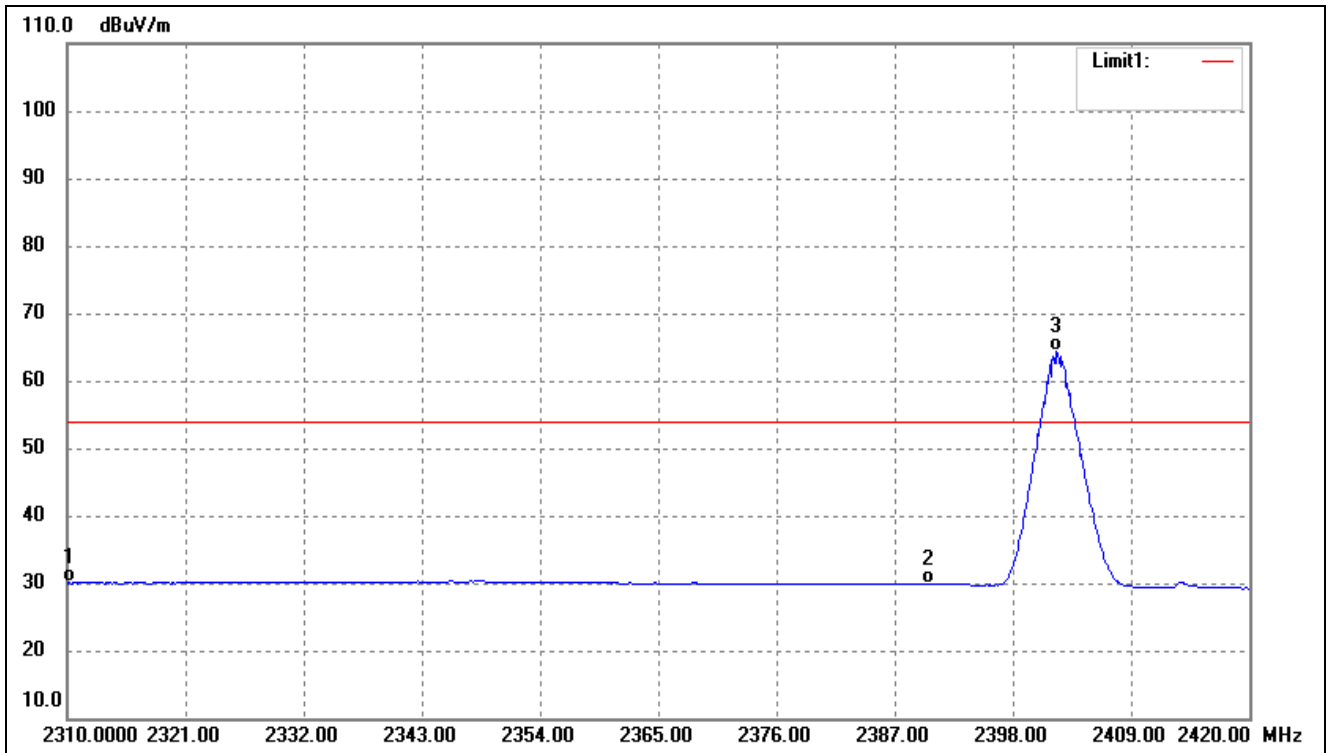

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.84	-10.82	30.02	54.00	-23.98	Average Detector
	2310.000	53.62	-10.82	42.80	74.00	-31.20	Peak Detector
2	2390.000	40.57	-10.70	29.87	54.00	-24.13	Average Detector
	2390.000	52.43	-10.70	41.73	74.00	-32.27	Peak Detector
3	2401.960	75.14	-10.69	64.45	/	/	Average Detector
	2402.400	95.65	-10.69	84.96	/	/	Peak Detector

Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

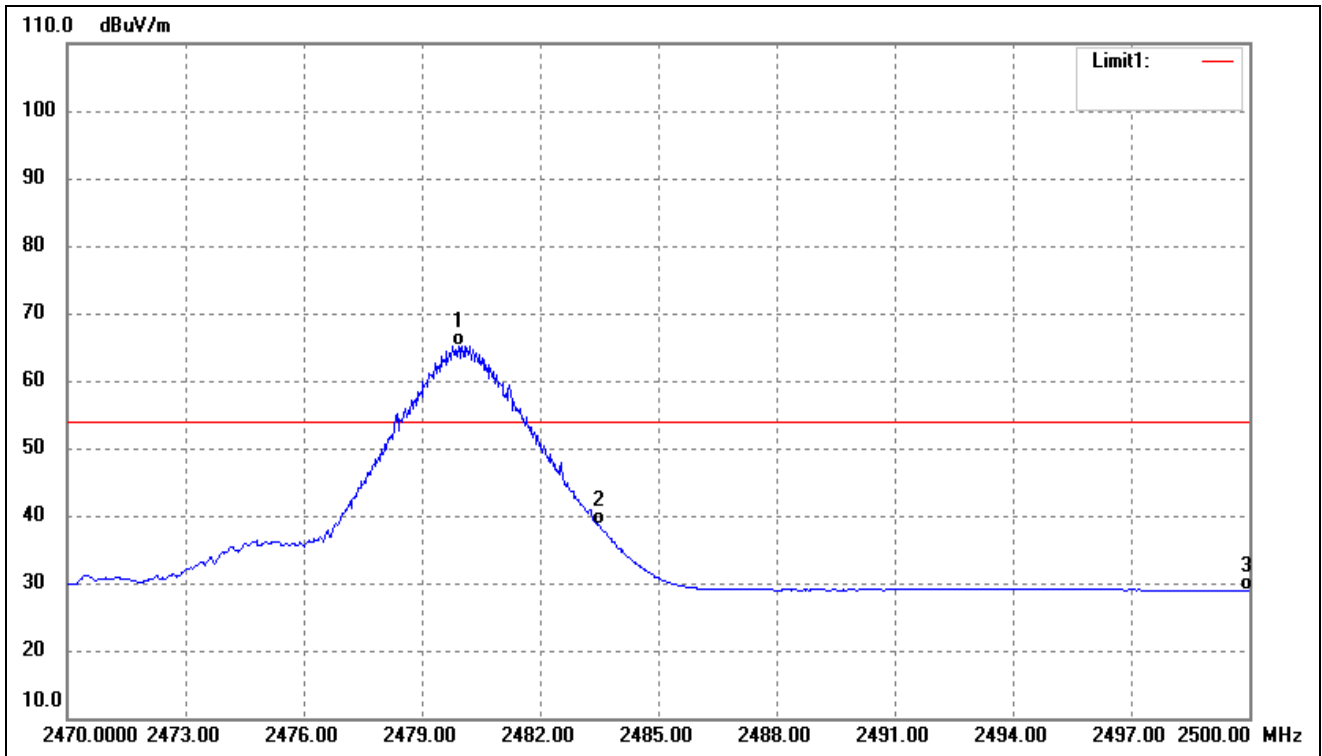

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.930	75.83	-10.58	65.25	/	/	Average Detector
	2480.470	95.72	-10.58	85.14	/	/	Peak Detector
2	2483.500	49.12	-10.58	38.54	54.00	-15.46	Average Detector
	2483.500	62.20	-10.58	51.62	74.00	-22.38	Peak Detector
3	2500.000	39.41	-10.55	28.86	54.00	-25.14	Average Detector
	2500.000	52.04	-10.55	41.49	74.00	-32.51	Peak Detector

➤ Conducted test

**Please refer to Appendix D**

## 9. Conducted Emissions

---


### 9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

### 9.2 Basic Test Setup Block Diagram

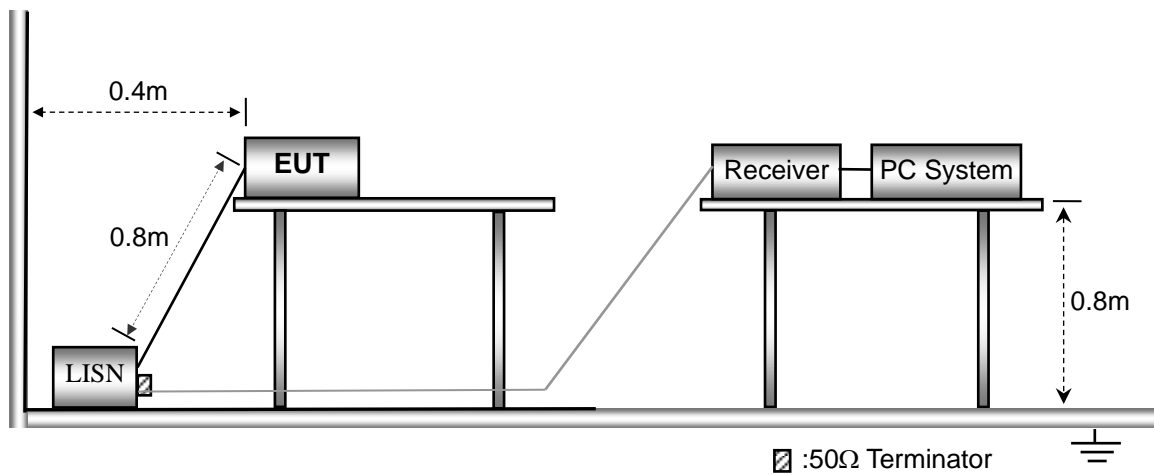


### 9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150kHz
Stop Frequency .....	30MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth .....	9kHz
Quasi-Peak Adapter Mode .....	Normal


### 9.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

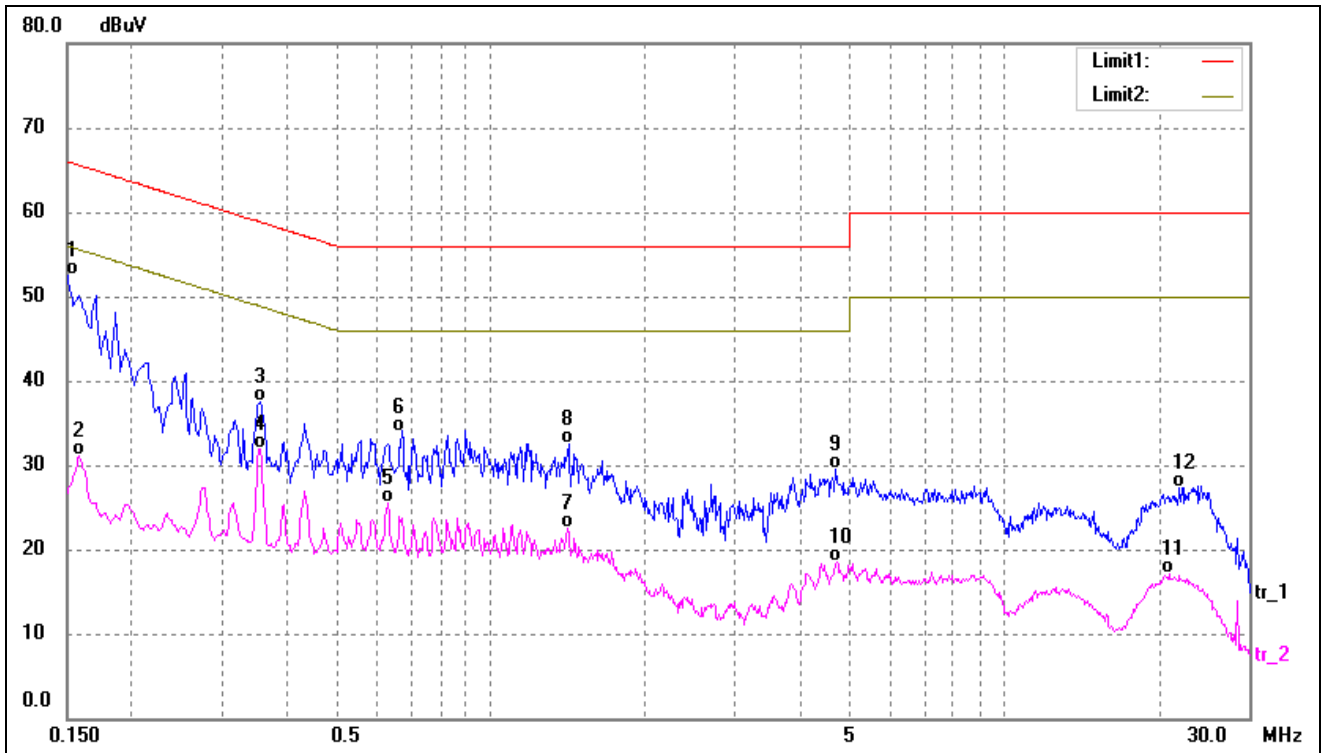

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1500	42.06	10.38	52.44	65.99	-13.55	QP
2	0.1580	20.79	10.37	31.16	55.56	-24.40	AVG
3	0.3540	27.10	10.31	37.41	58.87	-21.46	QP
4	0.3540	21.65	10.31	31.96	48.87	-16.91	AVG
5	0.6300	15.16	10.34	25.50	46.00	-20.50	AVG
6	0.6740	23.64	10.36	34.00	56.00	-22.00	QP
7	1.4180	12.14	10.38	22.52	46.00	-23.48	AVG
8	1.4220	22.20	10.38	32.58	56.00	-23.42	QP
9	4.7180	19.46	10.01	29.47	56.00	-26.53	QP
10	4.7340	8.51	10.01	18.52	46.00	-27.48	AVG
11	21.0060	6.85	10.24	17.09	50.00	-32.91	AVG
12	22.0100	17.06	10.23	27.29	60.00	-32.71	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

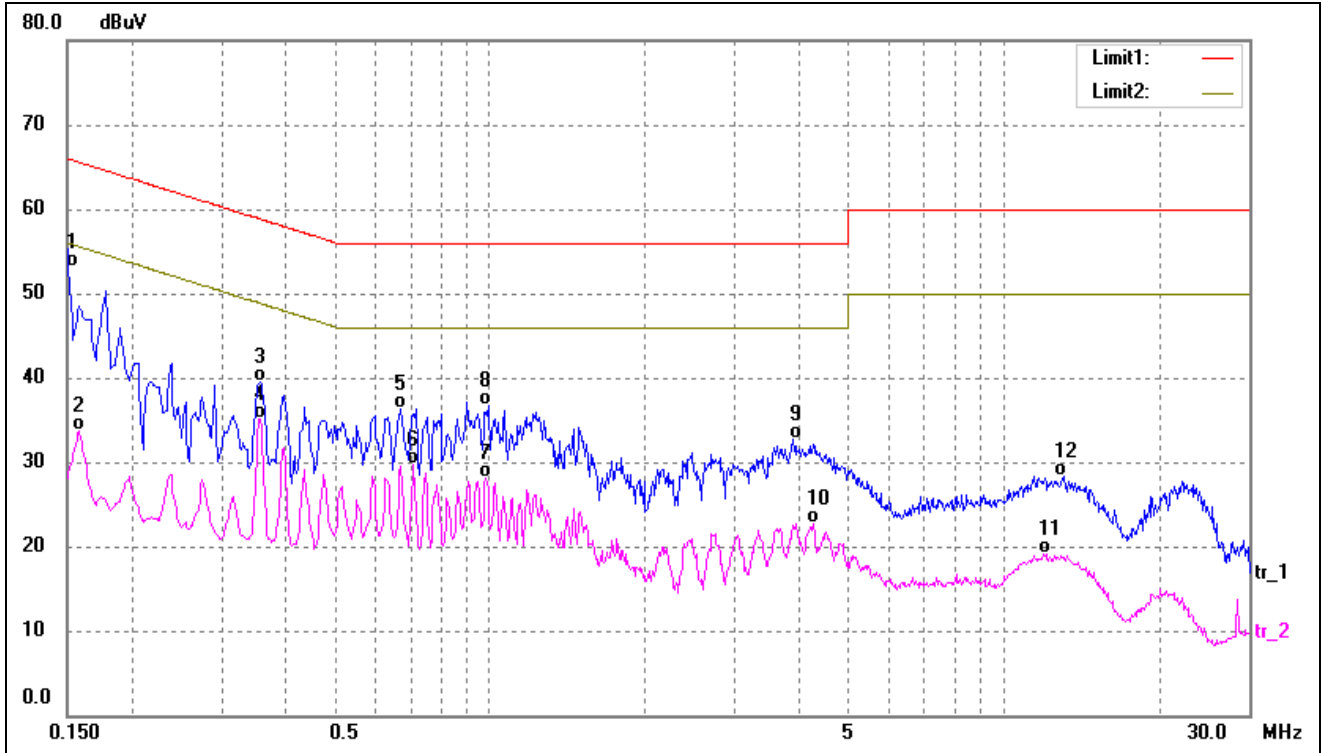

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1500	42.76	10.38	53.14	65.99	-12.85	QP
2	0.1580	23.41	10.37	33.78	55.56	-21.78	AVG
3	0.3539	29.11	10.31	39.42	58.87	-19.45	QP
4	0.3539	24.81	10.31	35.12	48.87	-13.75	AVG
5	0.6700	26.03	10.36	36.39	56.00	-19.61	QP
6	0.7099	19.28	10.39	29.67	46.00	-16.33	AVG
7	0.9819	17.47	10.55	28.02	46.00	-17.98	AVG
8	0.9899	26.07	10.55	36.62	56.00	-19.38	QP
9	3.8860	22.65	10.05	32.70	56.00	-23.30	QP
10	4.2660	12.61	10.03	22.64	46.00	-23.36	AVG
11	12.0980	9.13	9.99	19.12	50.00	-30.88	AVG
12	13.1020	18.26	10.04	28.30	60.00	-31.70	QP



## APPENDIX SUMMARY




---




Project No.	WTX22X03057847W	Test Engineer	Dashan
Start date	2022/04/07	Finish date	2022/04/18
Temperature	24.6°C	Humidity	47%

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant

**APPENDIX A**

Power Spectral Density			
Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
BLE-GFSK-1Mbps	Low	-18.02	8
	Middle	-17.31	8
	High	-17.84	8
BLE-GFSK-2Mbps	Low	-21.84	8
	Middle	-22.38	8
	High	-21.84	8
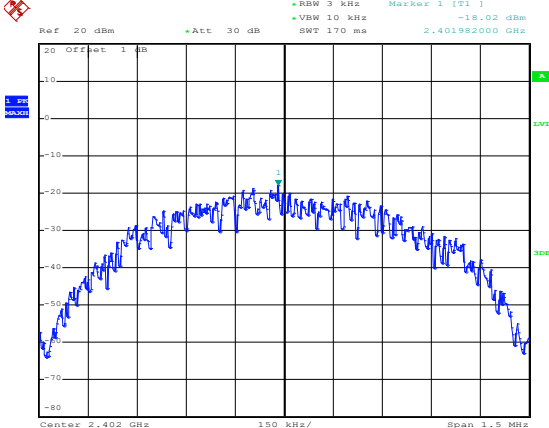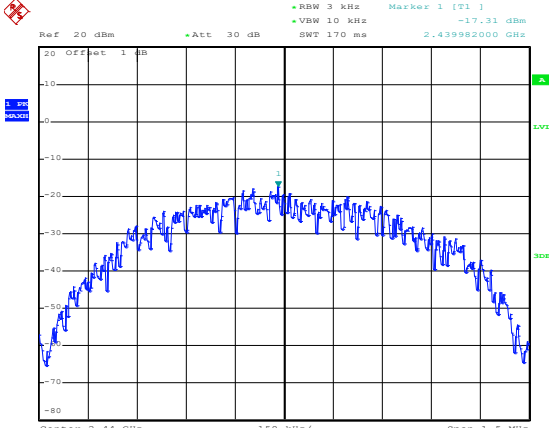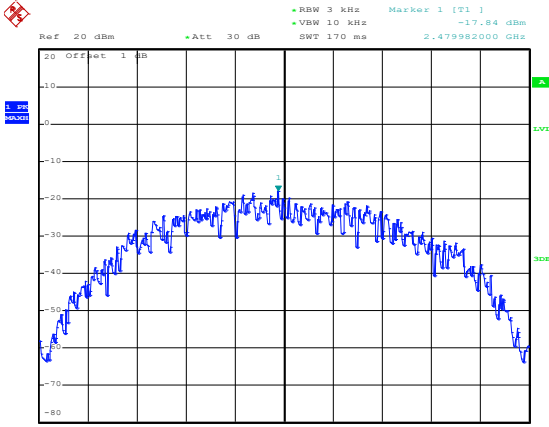
<p>Low-1Mbps</p>	 <p>Date: 7.APR.2022 15:15:53</p>
<p>Middle-1Mbps</p>	 <p>Date: 7.APR.2022 15:16:15</p>
<p>High-1Mbps</p>	 <p>Date: 7.APR.2022 15:16:37</p>

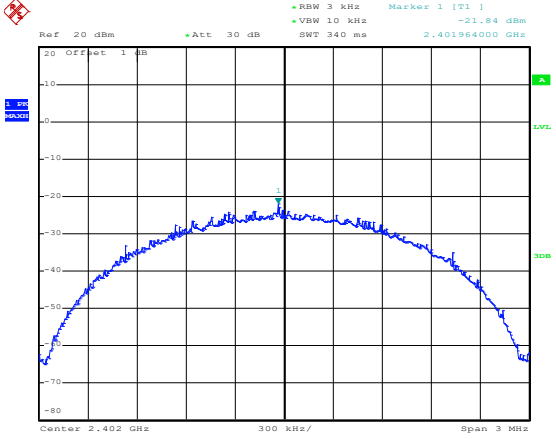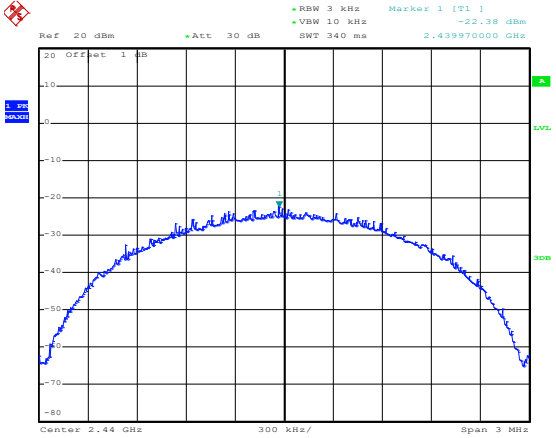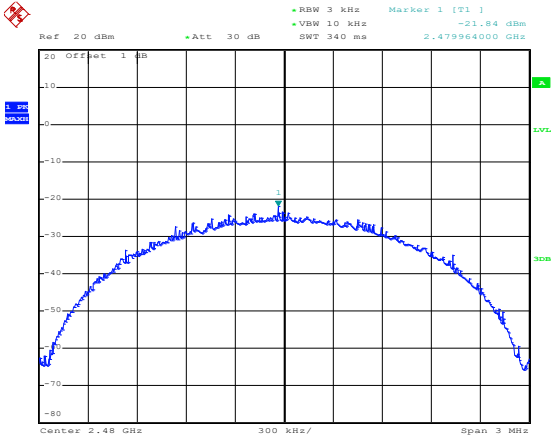
<p>Low-2Mbps</p>	 <p>Date: 7.APR.2022 18:28:53</p>
<p>Middle-2Mbps</p>	 <p>Date: 7.APR.2022 18:29:08</p>
<p>High-2Mbps</p>	 <p>Date: 7.APR.2022 18:29:32</p>

**APPENDIX B**

---


Test Mode	Test Channel	6 dB Bandwidth kHz	Limit kHz
BLE-GFSK-1Mbps	Low	714	$\geq 500$
	Middle	702	$\geq 500$
	High	702	$\geq 500$
BLE-GFSK-2Mbps	Low	1180	$\geq 500$
	Middle	1170	$\geq 500$
	High	1180	$\geq 500$

Low-1Mbps

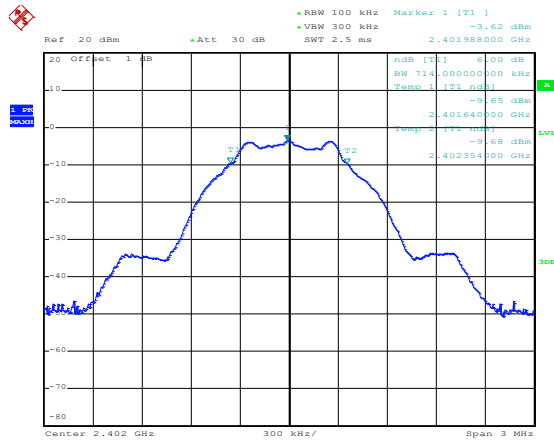


Date: 7.APR.2022 15:18:17

Middle-1Mbps



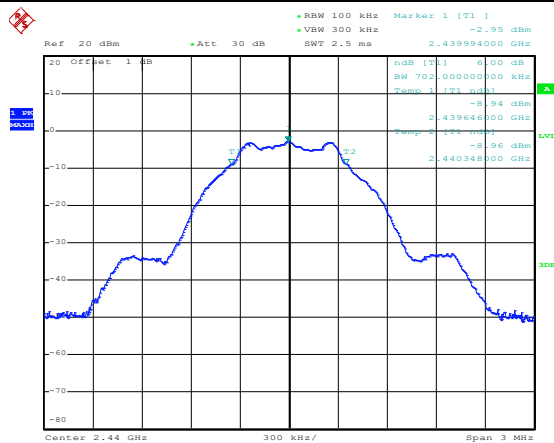


Date: 7.APR.2022 15:18:36

High-1Mbps

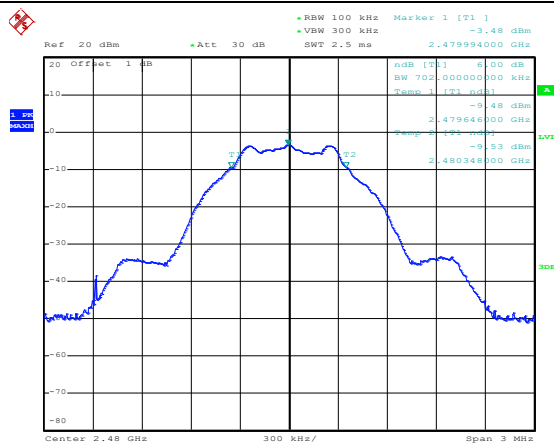




Date: 7.APR.2022 15:18:58

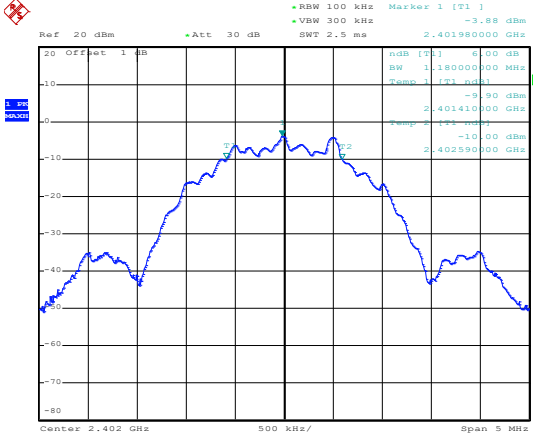
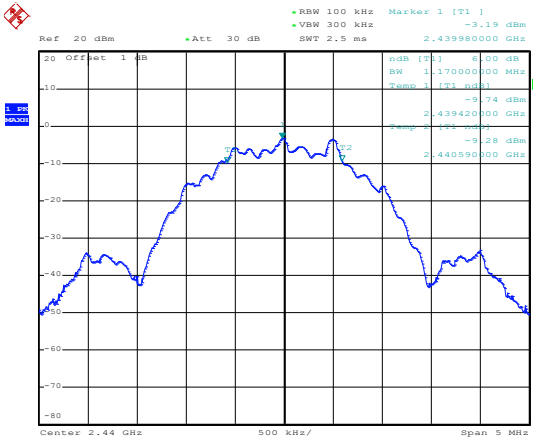
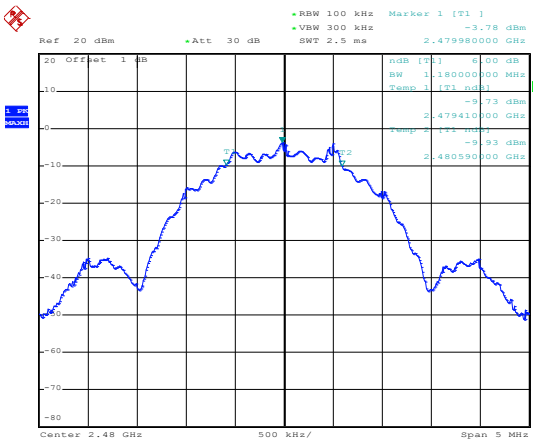
<p>Low-2Mbps</p>	 <p>Ref 20 dBm    +Att 30 dB    +RBW 100 kHz    Marker 1 [T1]    -3.88 dBm          +VBW 300 kHz    SWT 2.5 ms    2.401980000 GHz</p> <p>20 Offset 1 dB    n dB [T1]    6.00 dB          BW 1.180000000 MHz          Temp 1 [T1] n dB</p> <p>-9.90 dBm          2.401410000 GHz</p> <p>-10.00 dBm          2.402590000 GHz</p> <p>Center 2.402 GHz    500 kHz/    Span 5 MHz</p> <p>Date: 7.APR.2022 18:24:09</p>
<p>Middle-2Mbps</p>	 <p>Ref 20 dBm    +Att 30 dB    +RBW 100 kHz    Marker 1 [T1]    -3.19 dBm          +VBW 300 kHz    SWT 2.5 ms    2.439980000 GHz</p> <p>20 Offset 1 dB    n dB [T1]    6.00 dB          BW 1.170000000 MHz          Temp 1 [T1] n dB</p> <p>-9.74 dBm          2.439420000 GHz</p> <p>-9.28 dBm          2.440590000 GHz</p> <p>Center 2.44 GHz    500 kHz/    Span 5 MHz</p> <p>Date: 7.APR.2022 18:24:40</p>
<p>High-2Mbps</p>	 <p>Ref 20 dBm    +Att 30 dB    +RBW 100 kHz    Marker 1 [T1]    -3.78 dBm          +VBW 300 kHz    SWT 2.5 ms    2.479980000 GHz</p> <p>20 Offset 1 dB    n dB [T1]    6.00 dB          BW 1.180000000 MHz          Temp 1 [T1] n dB</p> <p>-9.73 dBm          2.479410000 GHz</p> <p>-9.93 dBm          2.480590000 GHz</p> <p>Center 2.48 GHz    500 kHz/    Span 5 MHz</p> <p>Date: 7.APR.2022 18:24:59</p>

## APPENDIX C

RF Output Power			
Test Mode	Test Channel	Reading dBm	Limit dBm
BLE-GFSK-1Mbps	Low	-2.74	30.00
	Middle	-2.10	30.00
	High	-2.63	30.00
BLE-GFSK-2Mbps	Low	-2.70	30.00
	Middle	-2.00	30.00
	High	-2.58	30.00

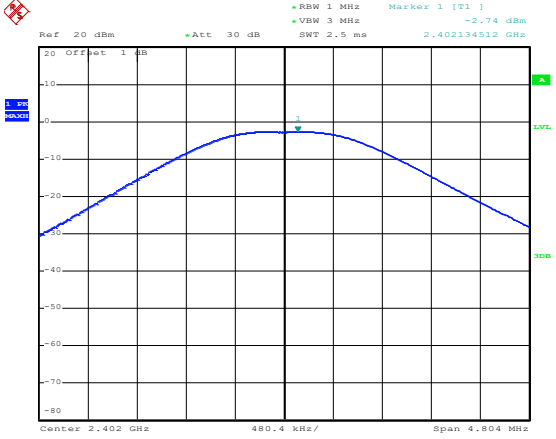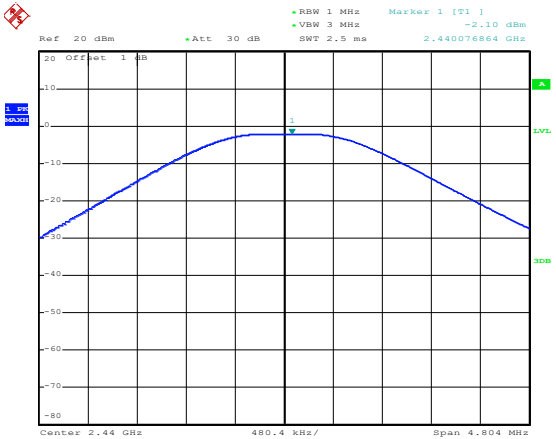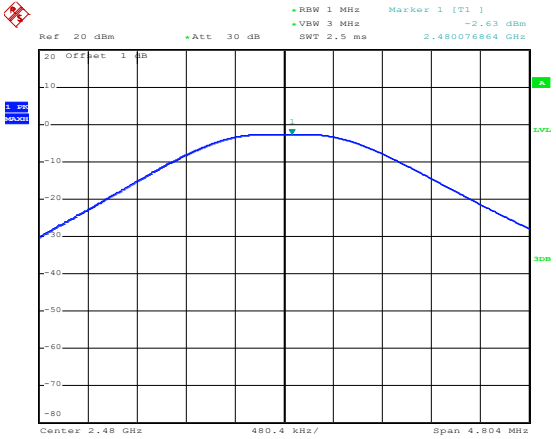


<p>Low-1Mbps</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz VBW 3 MHz SWT 2.5 ms Marker 1 [T1] -2.74 dBm 2.402134512 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.402 GHz 480.4 kHz/ Span 4.804 MHz</p> <p>Date: 7.APR.2022 15:13:20</p>
<p>Middle-1Mbps</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz VBW 3 MHz SWT 2.5 ms Marker 1 [T1] -2.10 dBm 2.440076864 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.44 GHz 480.4 kHz/ Span 4.804 MHz</p> <p>Date: 7.APR.2022 15:14:13</p>
<p>High-1Mbps</p>	 <p>Ref 20 dBm +Att 30 dB RBW 1 MHz VBW 3 MHz SWT 2.5 ms Marker 1 [T1] -2.63 dBm 2.480076864 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.48 GHz 480.4 kHz/ Span 4.804 MHz</p> <p>Date: 7.APR.2022 15:14:51</p>
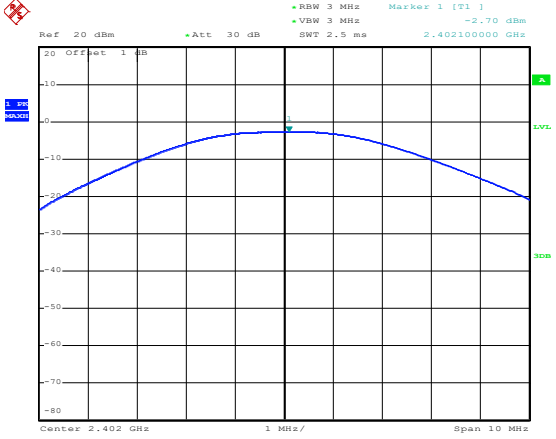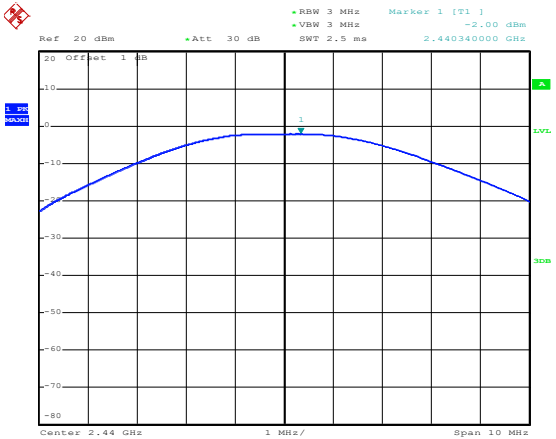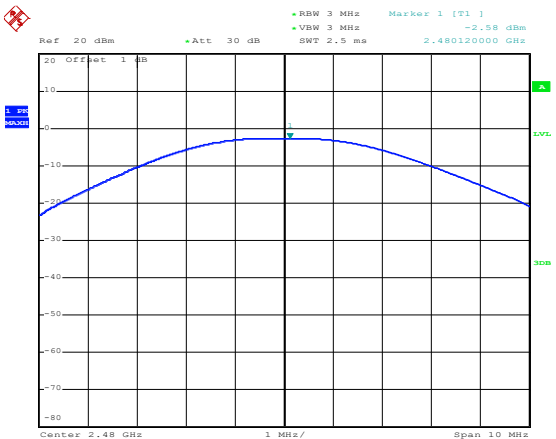
<p>Low-2Mbps</p>	 <p>Ref 20 dBm    +Att 30 dB    +RBW 3 MHz    Marker 1 [T1]    -2.70 dBm          +VBW 3 MHz    SWT 2.5 ms    2.402100000 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.402 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.APR.2022 18:26:07</p>
<p>Middle-2Mbps</p>	 <p>Ref 20 dBm    +Att 30 dB    +RBW 3 MHz    Marker 1 [T1]    -2.00 dBm          +VBW 3 MHz    SWT 2.5 ms    2.440340000 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.44 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.APR.2022 18:26:22</p>
<p>High-2Mbps</p>	 <p>Ref 20 dBm    +Att 30 dB    +RBW 3 MHz    Marker 1 [T1]    -2.58 dBm          +VBW 3 MHz    SWT 2.5 ms    2.480120000 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.48 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.APR.2022 18:26:37</p>


# APPENDIX D

## Conducted Out of Band Emissions

Low-1Mbps

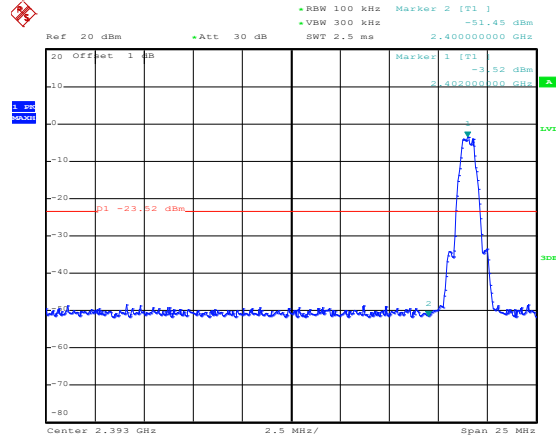


Date: 7.APR.2022 15:19:59



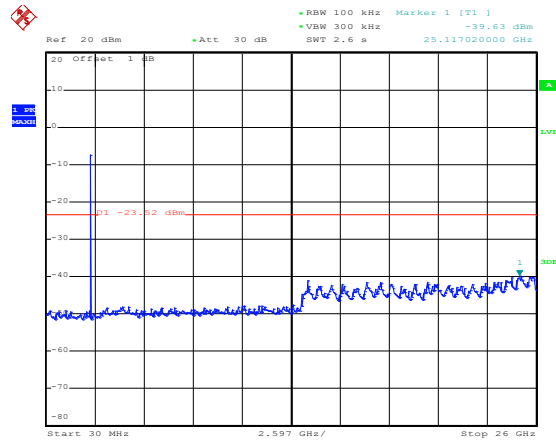


Date: 7.APR.2022 15:20:17



Middle-1Mbps

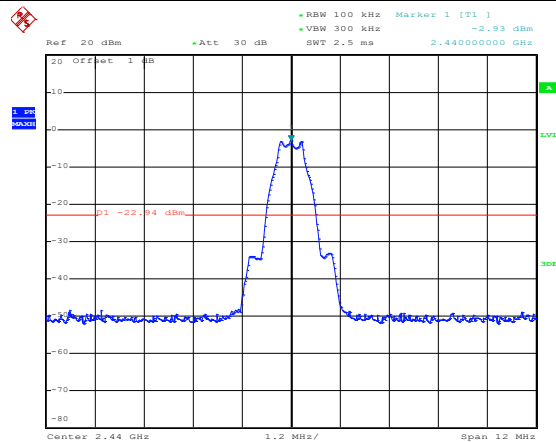


Date: 7.APR.2022 15:20:45

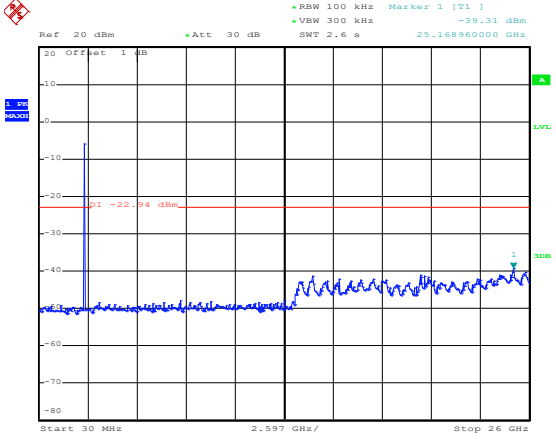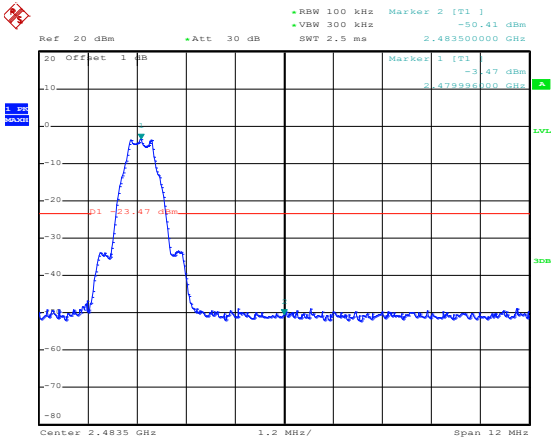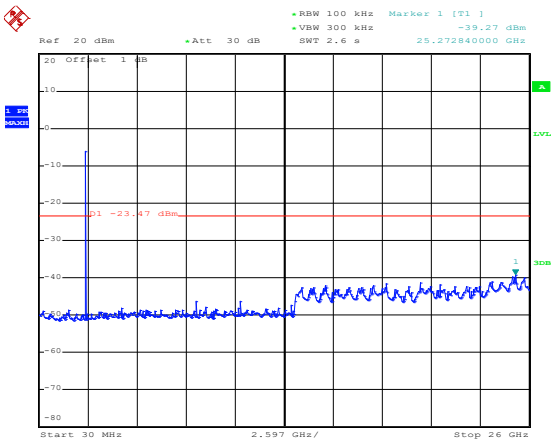
	 <p>             +RBW 100 kHz Marker 1 [T1] -39.31 dBm              +VBW 300 kHz              Ref 20 dBm +Att 30 dB SWT 2.6 s 25.168960000 GHz              20 Offset 1 dB              -22.94 dBm              Start 30 MHz 2.597 GHz/ Stop 26 GHz         </p> <p>Date: 7.APR.2022 15:23:25</p>
<p>High-1Mbps</p>	 <p>             +RBW 100 kHz Marker 2 [T1] -50.41 dBm              +VBW 300 kHz              Ref 20 dBm +Att 30 dB SWT 2.5 ms 2.483500000 GHz              20 Offset 1 dB              -23.47 dBm              Center 2.4835 GHz 1.2 MHz/ Span 12 MHz         </p> <p>Date: 7.APR.2022 15:23:57</p>
	 <p>             +RBW 100 kHz Marker 1 [T1] -39.27 dBm              +VBW 300 kHz              Ref 20 dBm +Att 30 dB SWT 2.6 s 25.272840000 GHz              20 Offset 1 dB              -23.47 dBm              Start 30 MHz 2.597 GHz/ Stop 26 GHz         </p> <p>Date: 7.APR.2022 15:24:12</p>

Low-2Mbps

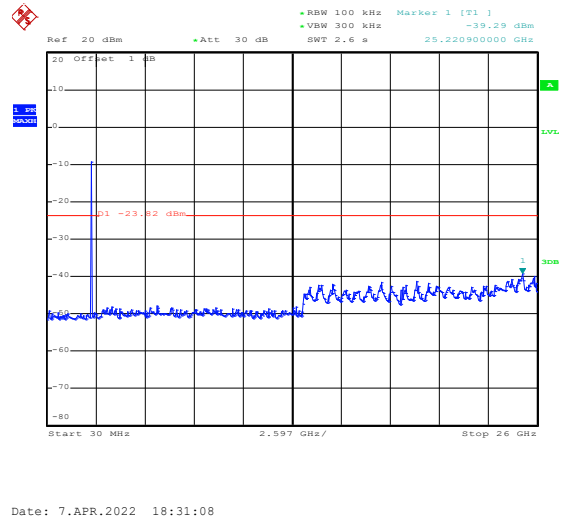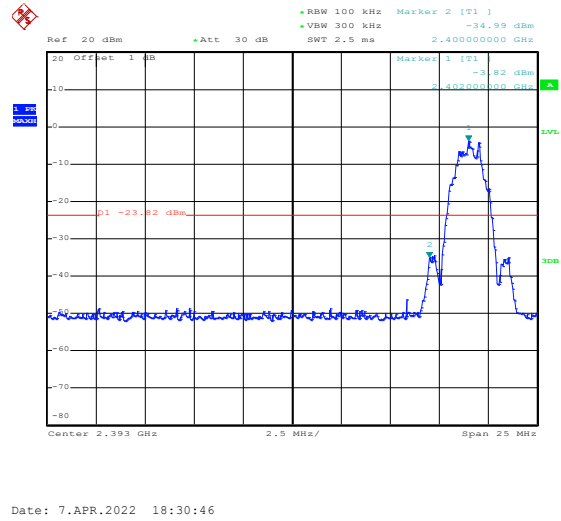

Middle-2Mbps

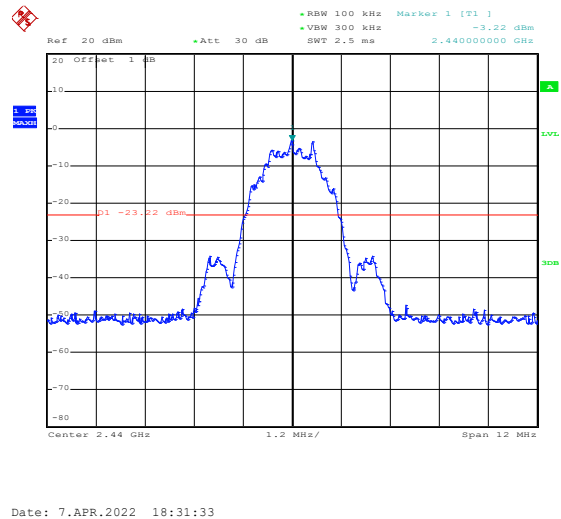

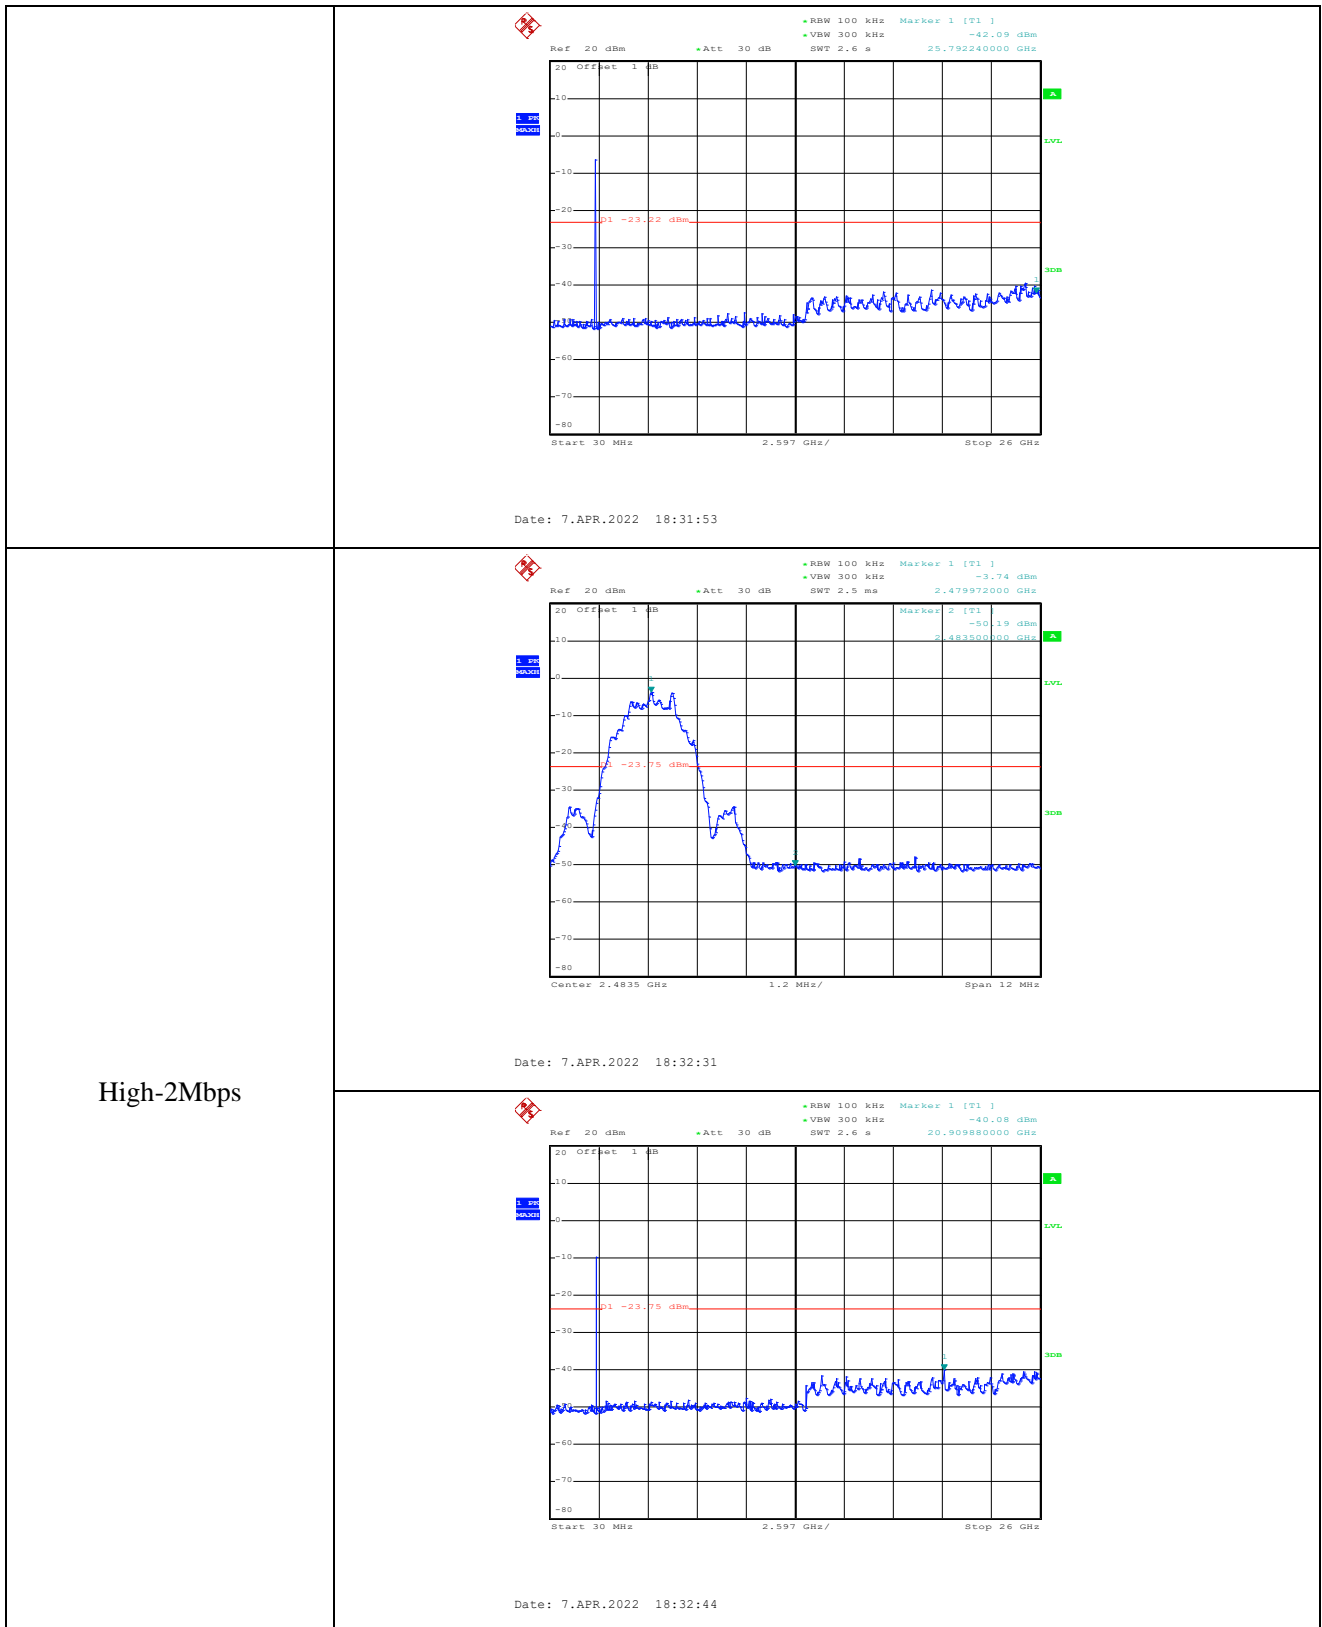

## **APPENDIX PHOTOGRAPHS**

---

**Please refer to “ANNEX”**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***