


# EMC TEST REPORT



Report No.: 18070322-FCC-E

Supersede Report No: N/A

Applicant	BLU Products, Inc.	
Product Name	Mobile Phone	
Model No.	STUDIO G4	
Serial No.	N/A	
Test Standard	FCC Part 15 Subpart B Class B, ANSI C63.4: 2014	
Test Date	April 12 to May 13, 2018	
Issue Date	May 14, 2018	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
<i>Evans He</i>	<i>David Huang</i>	
Evans He Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

**SIEMIC (SHENZHEN-CHINA) LABORATORIES**

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	18070322-FCC-E
Page	3 of 37

This page has been left blank intentionally.

# CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION .....	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	6
5. TEST SUMMARY .....	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	9
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	9
6.2 RADIATED EMISSIONS.....	15
ANNEX A. TEST INSTRUMENT.....	20
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	21
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	33
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST .....	36
ANNEX E. DECLARATION OF SIMILARITY.....	37

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
18070322-FCC-E	NONE	Original	May 14, 2018

## 2. Customer information

Applicant Name	BLU Products, Inc.
Applicant Add	10814 NW 33rd St # 100 Doral, FL 33172
Manufacturer	BLU Products, Inc.
Manufacturer Add	10814 NW 33rd St # 100 Doral, FL 33172

## 3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	535293
IC Test Site No.	4842E-1
Test Software of Radiated Emission	Radiated Emission Program-To Shenzhen v2.0
Test Software of Conducted Emission	EZ-EMC(ver.lcp-03A1)

## 4. Equipment under Test (EUT) Information

Description of EUT:	Mobile Phone
Main Model:	STUDIO G4
Serial Model:	N/A
Antenna Gain:	GSM850: -3dBi PCS1900: -2.5dBi UMTS-FDD Band V: -3.5dBi UMTS-FDD Band II: -2.7dBi UMTS-FDD Band IV: -2.3dBi WIFI: -3.6dBi Bluetooth/BLE: -3.3dBi GPS: -3.3dBi
Antenna Type:	PIFA antenna
Input Power:	Adapter: Model: TPA-46B050100UU Input: AC100-240V~50/60Hz,0.2A Output: DC 5V, 1.0A Battery: Model: C696047200L Spec: 3.8V, 2000mAh, 7.60Wh
Equipment Category :	JBP
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK UMTS-FDD: QPSK 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, $\pi$ /4DQPSK, 8DPSK BLE: GFSK GPS: BPSK

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz  
 PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz  
 UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz  
 UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;  
 RX: 1932.4 ~ 1987.6 MHz

RF Operating Frequency (ies): UMTS-FDD Band IV TX: 1712.4 ~ 1752.6 MHz;  
 RX : 2112.4 ~ 2152.6 MHz

WIFI: 802.11b/g/n(20M): 2412-2462 MHz  
 WIFI: 802.11n(40M): 2422-2452 MHz  
 Bluetooth& BLE: 2402-2480 MHz  
 GPS: 1575.42 MHz

Number of Channels: GSM 850: 124CH  
 PCS1900: 299CH  
 UMTS-FDD Band V: 102CH  
 UMTS-FDD Band IV: 202CH  
 UMTS-FDD Band II: 277CH  
 WIFI :802.11b/g/n(20M): 11CH  
 WIFI :802.11n(40M): 7CH  
 Bluetooth: 79CH  
 BLE: 40CH  
 GPS:1CH

Port: Please refer to the user' s manual

Trade Name : BLU

FCC ID: YHLBLUSTUDIOG4

Date EUT received: April 11, 2018

Test Date(s): April 12 to May 13, 2018

## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

### Measurement Uncertainty

Parameter	Uncertainty
AC Power Line Conducted Emissions (150kHz~30MHz)	±3.11dB
Radiated Emission(30MHz~1GHz)	±5.12dB
Radiated Emission(1GHz~6GHz)	±5.34dB




## 6. Measurements, Examination And Derived Results

### 6.1 AC Power Line Conducted Emissions

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1022mbar
Test date :	April 28, 2018
Tested By :	Evans He

#### Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBµV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dBµV)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

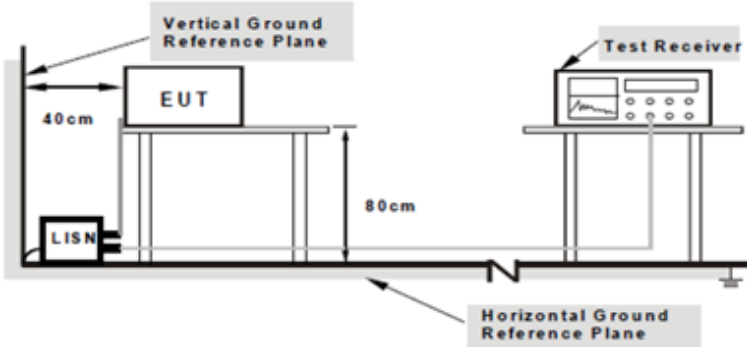Test Setup	 <p style="text-align: center;"> <b>Note: 1. Support units were connected to second LISN.</b>  <b>2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</b> </p>
------------	--

Procedure	<ol style="list-style-type: none"> <li>The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>The power supply for the EUT was fed through a 50Ω /50mH EUT LISN, connected to filtered mains.</li> </ol>
-----------	--

	<ol style="list-style-type: none"> <li>3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</li> <li>4. All other supporting equipment were powered separately from another main supply.</li> <li>5. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</li> <li>7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.</li> <li>8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).</li> </ol>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data     Yes                       N/A

Test Plot     Yes (See below)             N/A

<b>Test Mode 1:</b>	<b>USB Mode</b>
---------------------	-----------------


<b>Test Mode 2:</b>	<b>MP4 Mode</b>
---------------------	-----------------

<b>Test Mode 3:</b>	<b>Camera Mode</b>
---------------------	--------------------

<b>Test Mode 4:</b>	<b>FM Mode</b>
---------------------	----------------

Note: All modes were investigated, the results below show only the worst case(USB mode).

<b>Test Mode 1:</b>	<b>USB Mode</b>
---------------------	-----------------

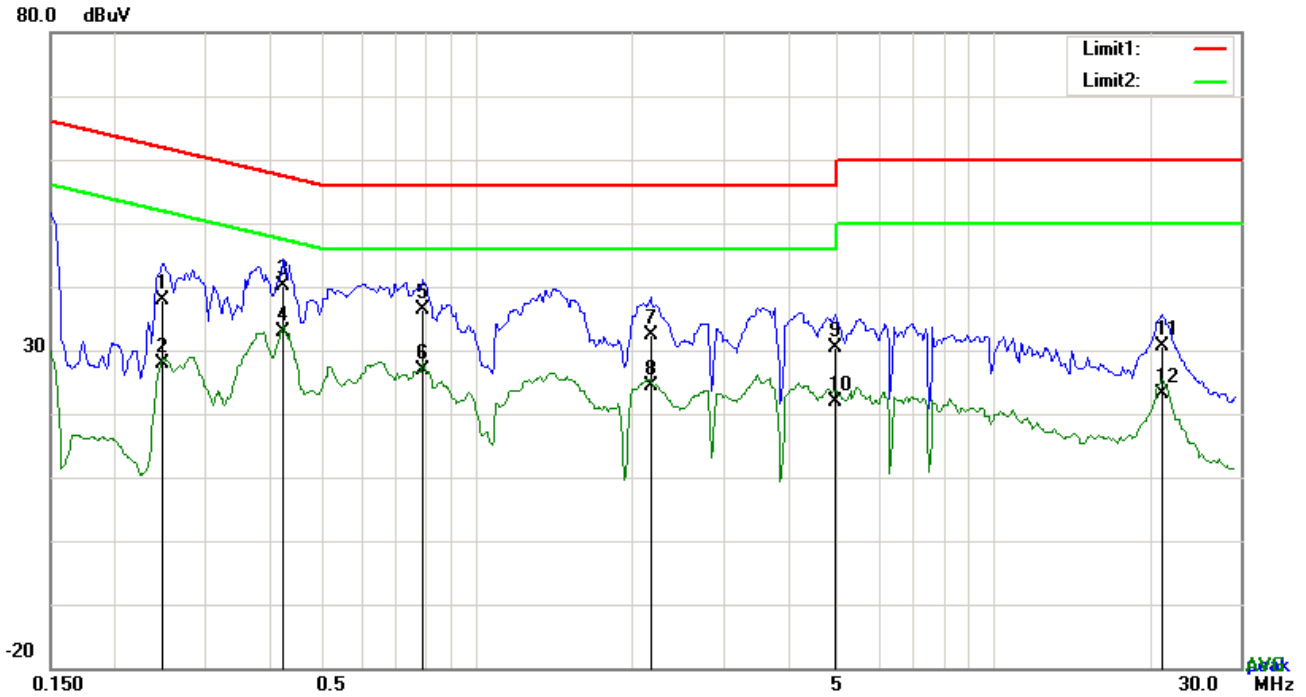


**Test Data**

**Phase Line Plot at 120Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.2475	27.91	QP	10.03	37.94	61.84	-23.90
2	L1	0.2475	17.97	AVG	10.03	28.00	51.84	-23.84
3	L1	0.4230	30.17	QP	10.03	40.20	57.39	-17.19
4	L1	0.4230	22.86	AVG	10.03	32.89	47.39	-14.50
5	L1	0.7857	26.38	QP	10.03	36.41	56.00	-19.59
6	L1	0.7857	16.82	AVG	10.03	26.85	46.00	-19.15
7	L1	2.1702	22.46	QP	10.04	32.50	56.00	-23.50
8	L1	2.1702	14.32	AVG	10.04	24.36	46.00	-21.64
9	L1	4.9461	20.25	QP	10.08	30.33	56.00	-25.67
10	L1	4.9461	11.70	AVG	10.08	21.78	46.00	-24.22
11	L1	21.1623	20.23	QP	10.32	30.55	60.00	-29.45
12	L1	21.1623	12.87	AVG	10.32	23.19	50.00	-26.81

<b>Test Mode 1:</b>	<b>USB Mode</b>
---------------------	-----------------

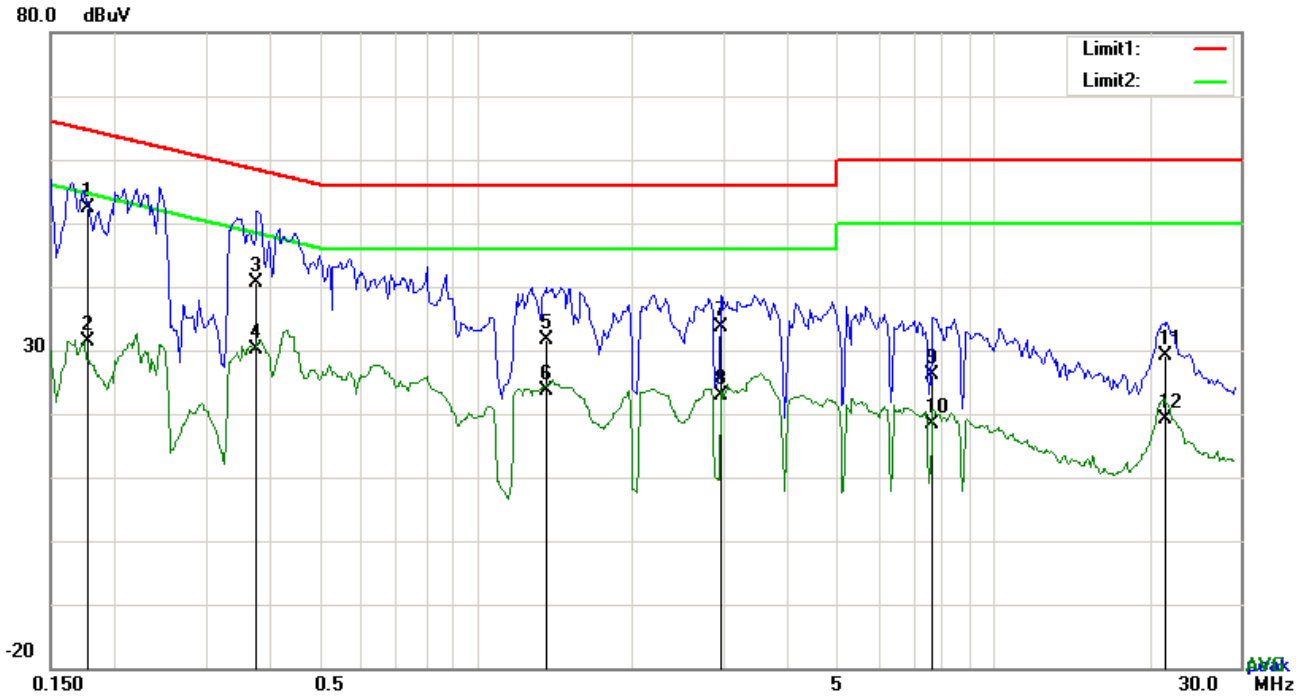


**Test Data**

**Phase Neutral Plot at 120Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.1773	42.24	QP	10.02	52.26	64.61	-12.35
2	N	0.1773	21.40	AVG	10.02	31.42	54.61	-23.19
3	N	0.3762	30.53	QP	10.02	40.55	58.36	-17.81
4	N	0.3762	20.01	AVG	10.02	30.03	48.36	-18.33
5	N	1.3629	21.65	QP	10.03	31.68	56.00	-24.32
6	N	1.3629	13.51	AVG	10.03	23.54	46.00	-22.46
7	N	2.9736	23.53	QP	10.05	33.58	56.00	-22.42
8	N	2.9736	12.90	AVG	10.05	22.95	46.00	-23.05
9	N	7.6371	16.07	QP	10.11	26.18	60.00	-33.82
10	N	7.6371	8.17	AVG	10.11	18.28	50.00	-31.72
11	N	21.5913	18.89	QP	10.29	29.18	60.00	-30.82
12	N	21.5913	8.81	AVG	10.29	19.10	50.00	-30.90

<b>Test Mode 1:</b>	<b>USB Mode</b>
---------------------	-----------------

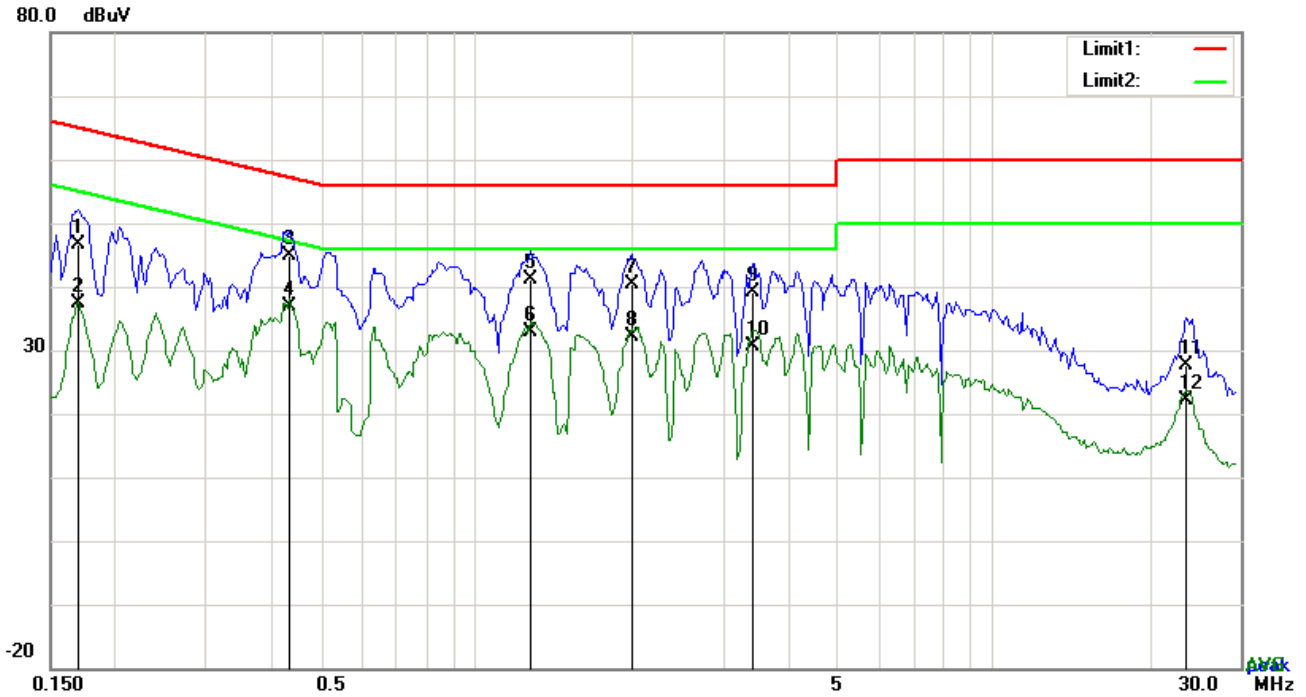


**Test Data**

**Phase Line Plot at 240Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	L1	0.1695	36.48	QP	10.03	46.51	64.98	-18.47
2	L1	0.1695	27.28	AVG	10.03	37.31	54.98	-17.67
3	L1	0.4347	34.92	QP	10.03	44.95	57.16	-12.21
4	L1	0.4347	26.95	AVG	10.03	36.98	47.16	-10.18
5	L1	1.2693	31.03	QP	10.03	41.06	56.00	-14.94
6	L1	1.2693	22.87	AVG	10.03	32.90	46.00	-13.10
7	L1	1.9947	30.30	QP	10.04	40.34	56.00	-15.66
8	L1	1.9947	21.99	AVG	10.04	32.03	46.00	-13.97
9	L1	3.4329	29.09	QP	10.06	39.15	56.00	-16.85
10	L1	3.4329	20.46	AVG	10.06	30.52	46.00	-15.48
11	L1	23.5179	17.31	QP	10.37	27.68	60.00	-32.32
12	L1	23.5179	11.85	AVG	10.37	22.22	50.00	-27.78

**Test Mode 1: USB Mode**

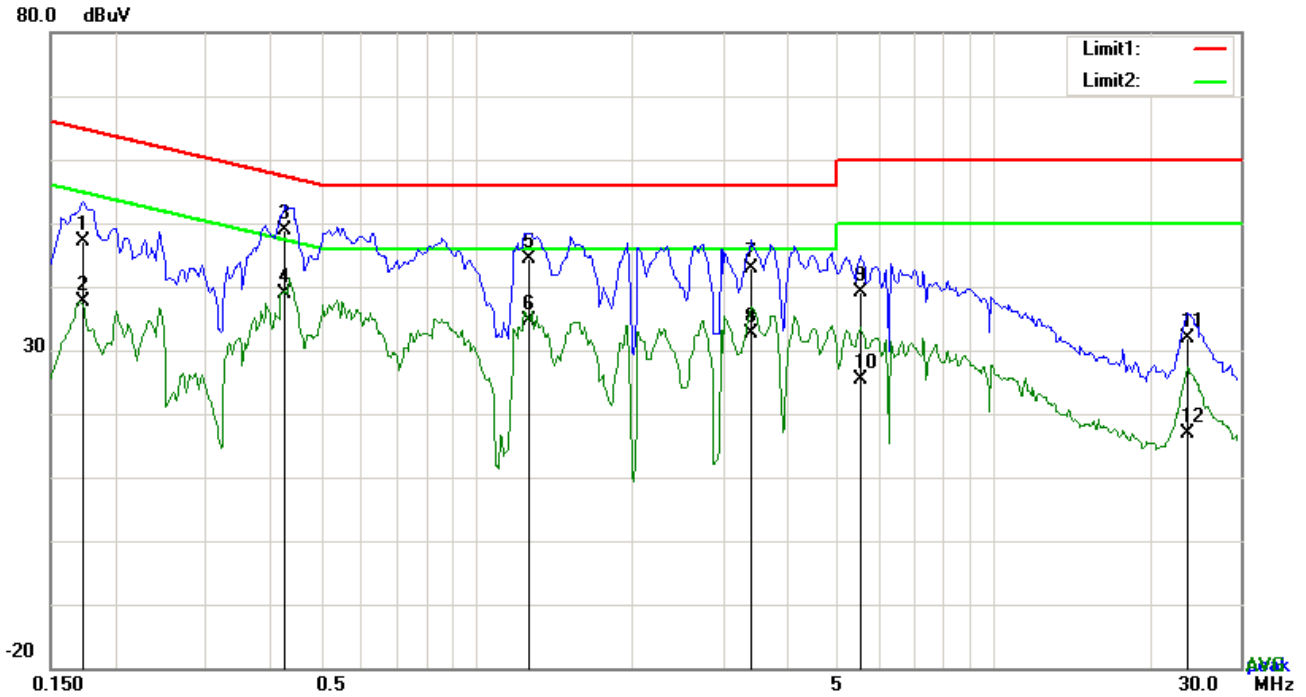

**Test Data**

**Phase Neutral Plot at 240Vac, 60Hz**


No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1734	37.00	QP	10.02	47.02	64.80	-17.78
2	N	0.1734	27.68	AVG	10.02	37.70	54.80	-17.10
3	N	0.4269	38.86	QP	10.02	48.88	57.31	-8.43
4	N	0.4269	28.82	AVG	10.02	38.84	47.31	-8.47
5	N	1.2654	34.33	QP	10.03	44.36	56.00	-11.64
6	N	1.2654	24.57	AVG	10.03	34.60	46.00	-11.40
7	N	3.3939	32.83	QP	10.05	42.88	56.00	-13.12
8	N	3.3939	22.63	AVG	10.05	32.68	46.00	-13.32
9	N	5.5155	29.01	QP	10.08	39.09	60.00	-20.91
10	N	5.5155	15.30	AVG	10.08	25.38	50.00	-24.62
11	N	23.7324	21.53	QP	10.32	31.85	60.00	-28.15
12	N	23.7324	6.61	AVG	10.32	16.93	50.00	-33.07

## 6.2 Radiated Emissions

Temperature	25°C
Relative Humidity	57%
Atmospheric Pressure	1022mbar
Test date :	April 28, 2018
Tested By :	Evans He

### Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15.109(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	<input checked="" type="checkbox"/>										
		<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (<math>\mu\text{V/m}</math>)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 - 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>		Frequency range (MHz)	Field Strength ( $\mu\text{V/m}$ )	30 – 88	100	88 – 216	150	216 - 960	200	Above 960	500
		Frequency range (MHz)		Field Strength ( $\mu\text{V/m}$ )									
		30 – 88		100									
		88 – 216		150									
216 - 960	200												
Above 960	500												

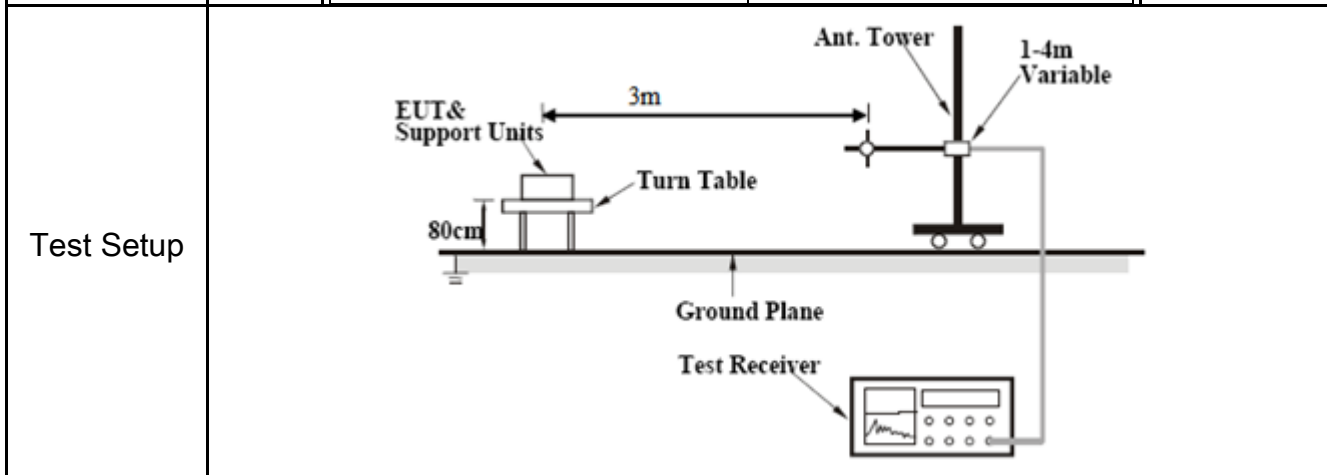

Procedure	<ol style="list-style-type: none"> <li>1. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:               <ol style="list-style-type: none"> <li>a. Vertical or horizontal polarization (whichever gave the higher emission level</li> </ol> </li> </ol>
-----------	---

	<p>over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz. ■ 1 kHz (Duty cycle &lt; 98%) □ 10 Hz (Duty cycle &gt; 98%)</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data     Yes                       N/A

Test Plot     Yes (See below)             N/A

<b>Test Mode 1:</b>	<b>USB Mode</b>
---------------------	-----------------

<b>Test Mode 2:</b>	<b>MP4 Mode</b>
---------------------	-----------------

<b>Test Mode 3:</b>	<b>Camera Mode</b>
---------------------	--------------------

<b>Test Mode 4:</b>	<b>FM Mode</b>
---------------------	----------------


Note: All modes were investigated, the results below show only the worst case(USB mode).



**Test Mode 1: USB Mode**

**Below 1GHz**

80.0 dBuV/m

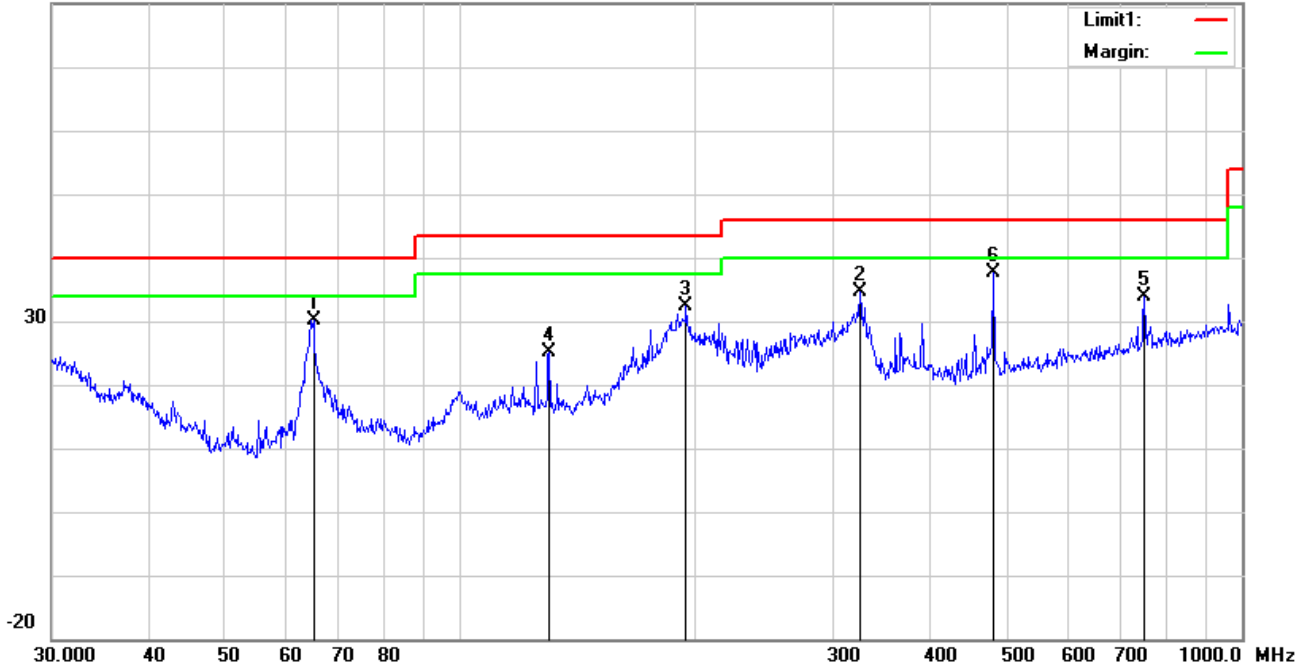


**Test Data**

**Horizontal Polarity Plot @3m**

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	H	64.8865	44.15	peak	7.54	22.40	0.88	30.17	40.00	-9.83	100	227
2	H	324.4561	40.85	peak	14.11	22.22	1.91	34.65	46.00	-11.35	100	11
3	H	194.4534	41.34	peak	11.79	22.34	1.54	32.33	43.50	-11.17	100	160
4	H	129.9226	33.06	peak	13.26	22.38	1.20	25.14	43.50	-18.36	200	151
5	H	750.1083	31.35	peak	20.80	21.25	2.87	33.77	46.00	-12.23	100	116
6	H	480.5276	39.97	peak	17.31	21.85	2.31	37.74	46.00	-8.26	100	132

### Below 1GHz

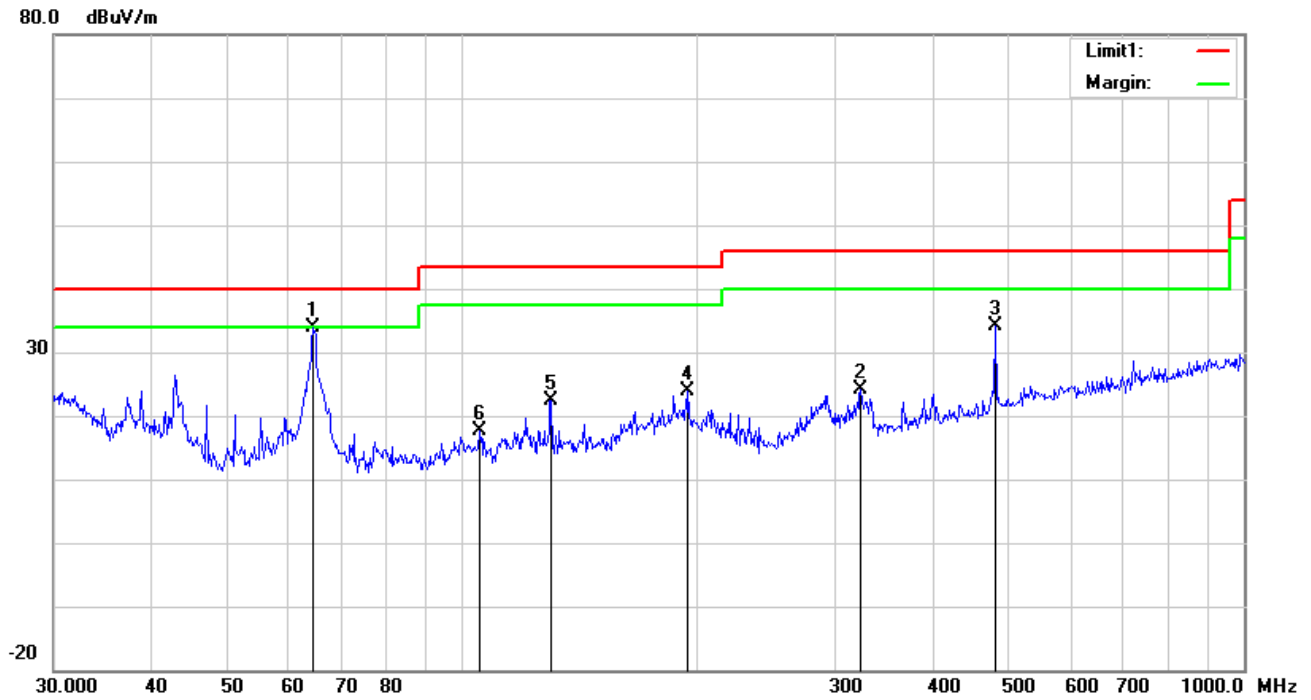

### Test Data

#### Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	V	64.4331	47.79	peak	7.52	22.40	0.87	33.78	40.00	-6.22	100	12
2	V	323.3204	30.40	peak	14.09	22.22	1.91	24.18	46.00	-21.82	200	143
3	V	480.5276	36.38	peak	17.31	21.85	2.31	34.15	46.00	-11.85	100	3
4	V	194.4534	32.78	peak	11.79	22.34	1.54	23.77	43.50	-19.73	100	218
5	V	129.9226	30.37	peak	13.26	22.38	1.20	22.45	43.50	-21.05	100	187
6	V	105.2718	27.38	peak	11.32	22.33	1.15	17.52	43.50	-25.98	100	334

***Above 1GHz***

Frequency (MHz)	Read_level (dBµV/m)	Azimuth	Height (cm)	Polarity (H/V)	Level (dBµV/m)	Factors (dB)	Limit (dBµV/m)	Margin (dB)	Detector (PK/AV)
1137.698	67.85	120	100	V	-20.02	47.83	74	-26.17	PK
2018.53	60.91	87	100	V	-14.9	46.01	74	-27.99	PK
3315.761	61.91	99	100	V	-12.86	49.05	74	-24.95	PK
1103.566	64.94	40	100	H	-20.16	44.78	74	-29.22	PK
2480.405	62.03	301	100	H	-13.7	48.33	74	-25.67	PK
3705.344	58.56	13	100	H	-11.53	47.03	74	-26.97	PK

*Note1: The highest frequency of the EUT is 2480 MHz, so the testing has been conformed to 5\*2480MHz =12,400MHz.*

*Note2: The frequency that above 3GHz is mainly from the environment noise.*

*Note3: The AV measurement performed, more than 20dB below limit so AV test data was not presented.*

## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
<b>AC Line Conducted Emissions</b>					
EMI test receiver	ESCS30	8471241027	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Line Impedance Stabilization Network	LI-125A	191106	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
Line Impedance Stabilization Network	LI-125A	191107	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>					
EMI test receiver	ESL6	100262	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/22/2018	03/21/2019	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/19/2017	09/18/2018	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna	AH-118	71259	09/22/2017	09/21/2018	<input checked="" type="checkbox"/>


## Annex B. EUT And Test Setup Photographs

### Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter - Label View

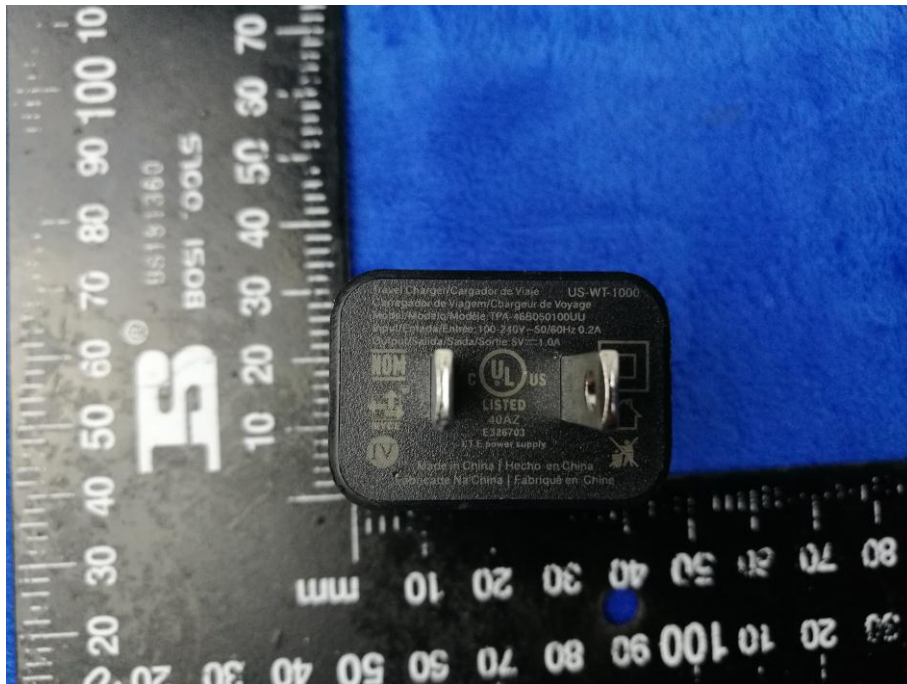


EUT - Front View



EUT - Rear View



EUT - Top View

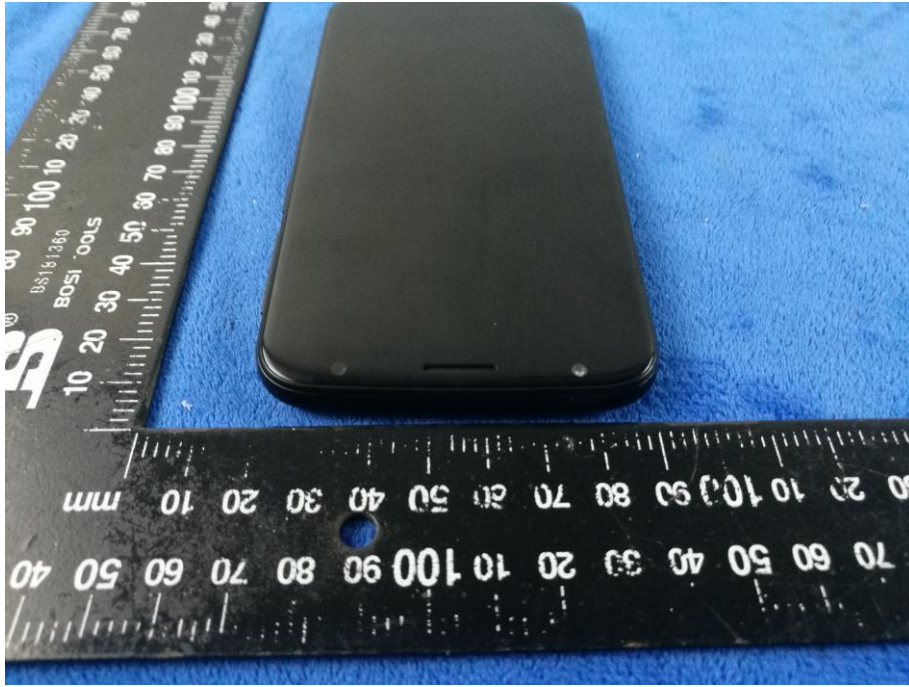


EUT - Bottom View



EUT - Left View



EUT - Right View

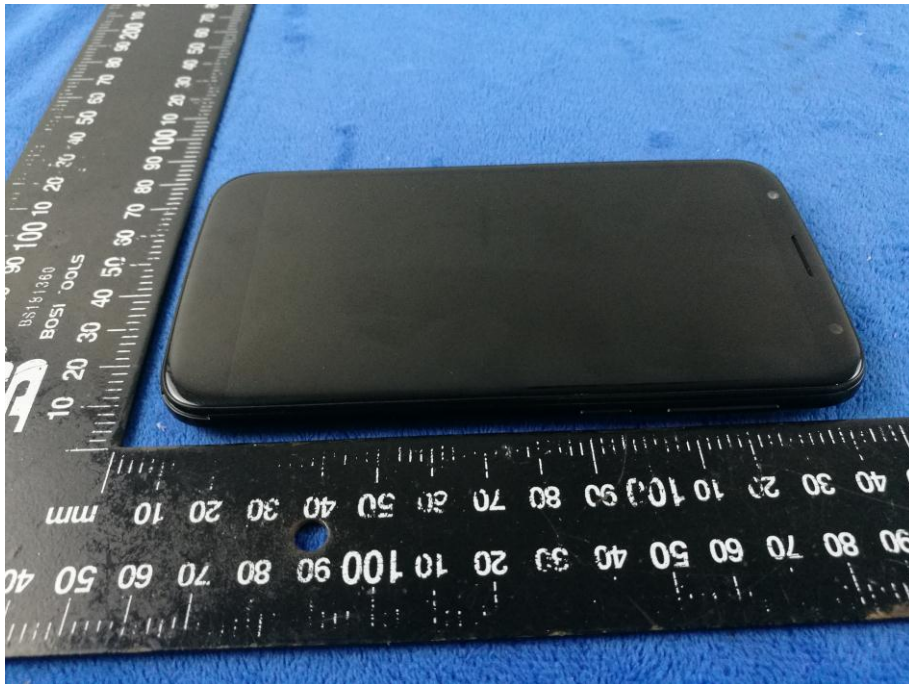



**Annex B.ii. Photograph: EUT Internal Photo**


Cover Off - Top View 1



Cover Off - Top View 2




Battery - Front View

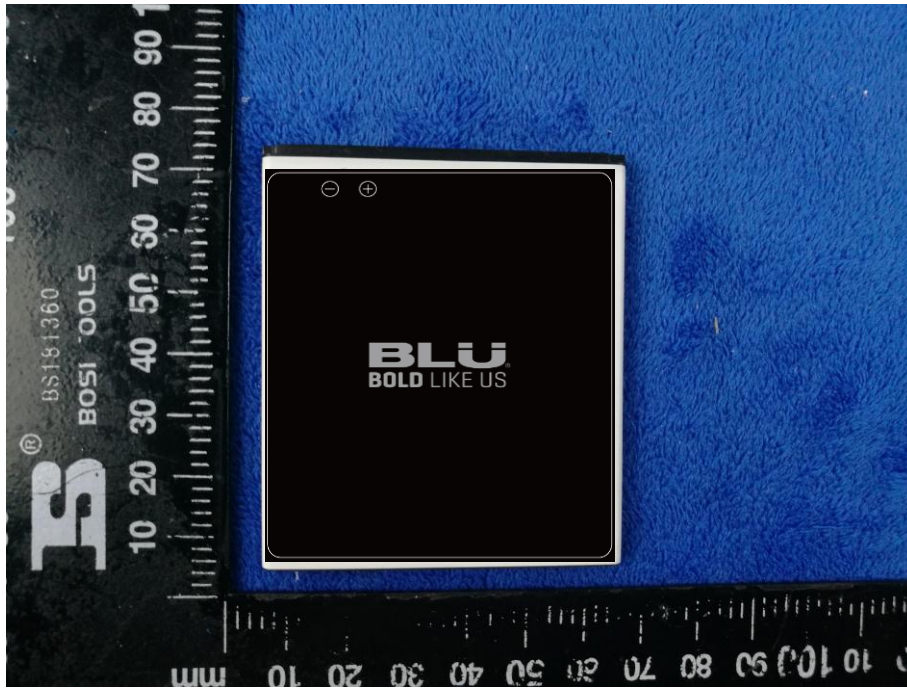


Battery - Rear View




Mainboard with Shielding - Front View

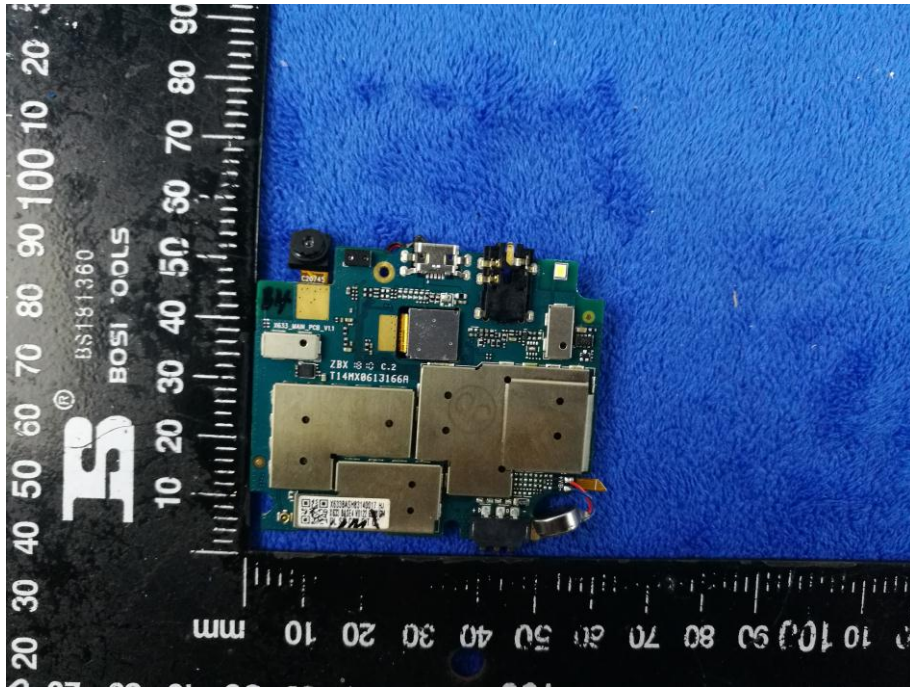


Mainboard without Shielding - Front View

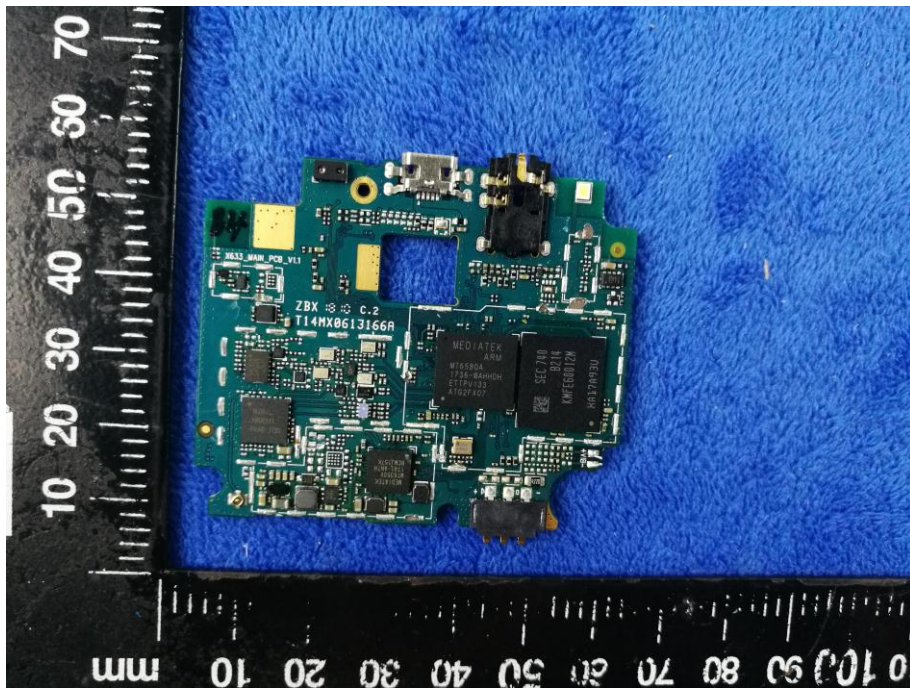


Mainboard with Shielding – Rear View

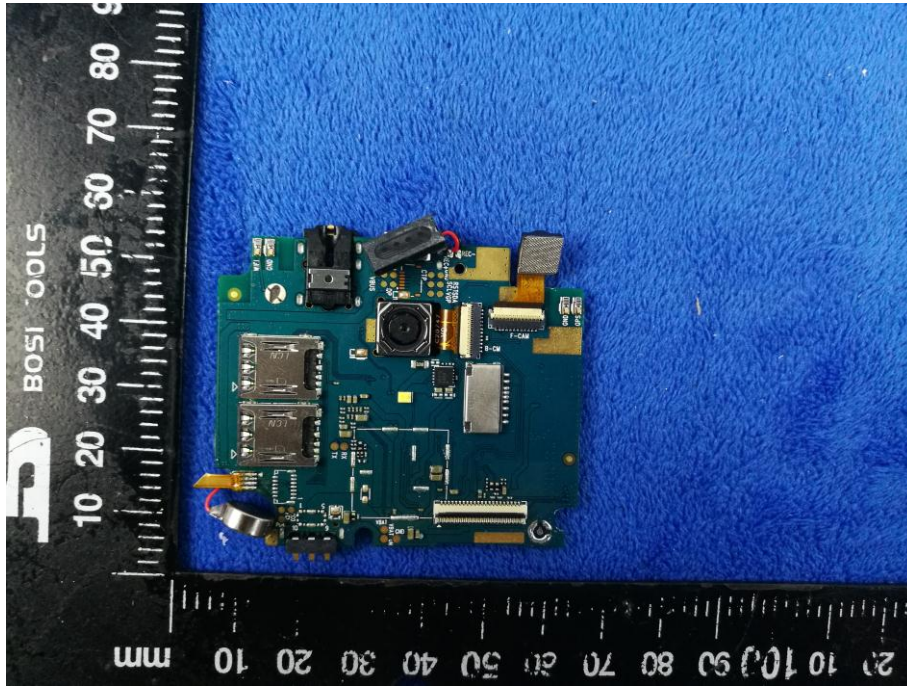

Mainboard without Shielding – Rear View

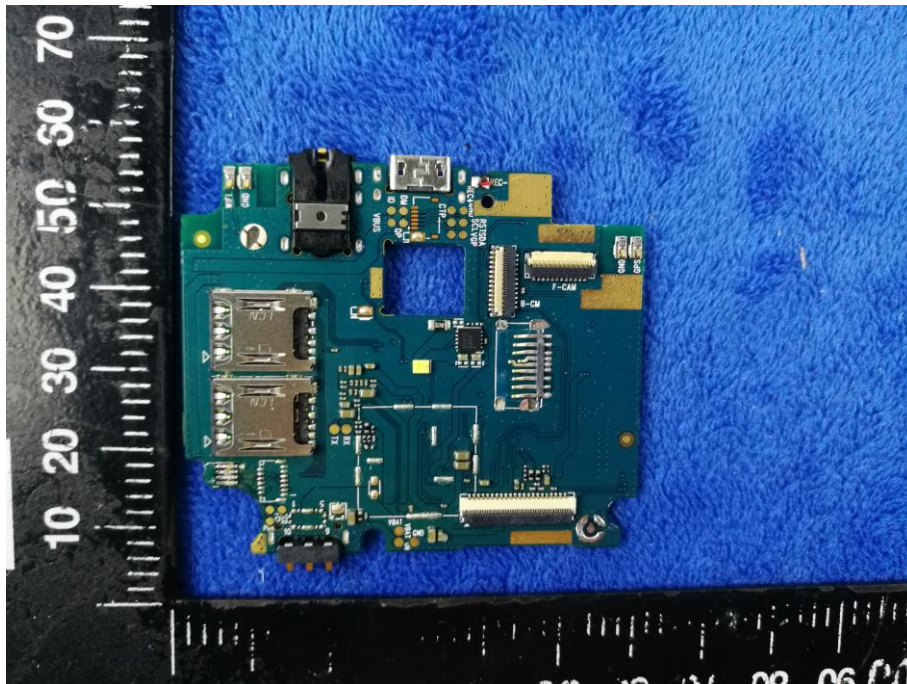

LCD – Front View

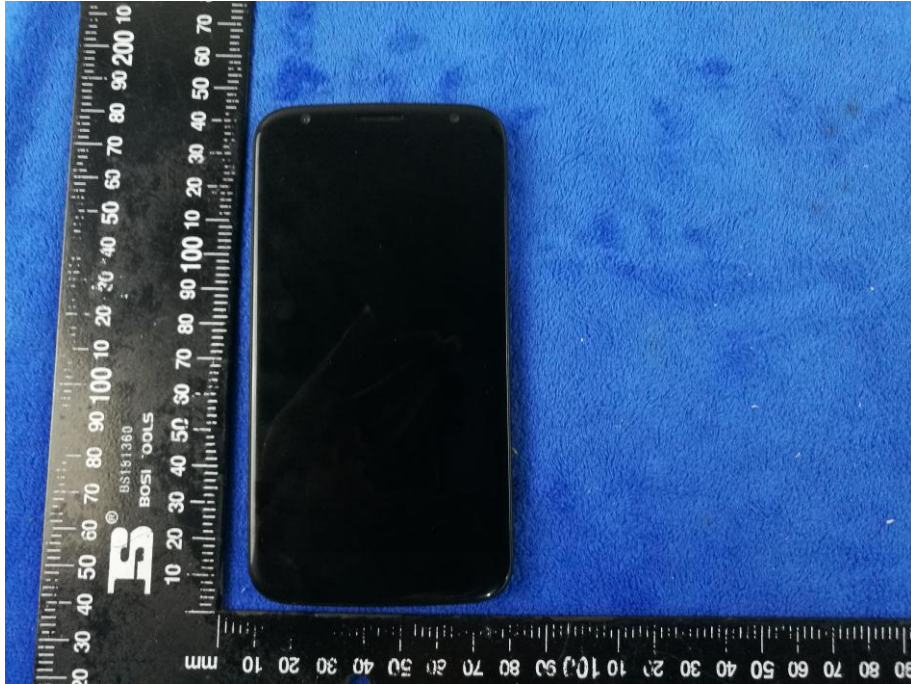


LCD – Rear View



GSM/PCS/UMTS-FDD Antenna View



WIFI/BT/BLE/GPS - Antenna View

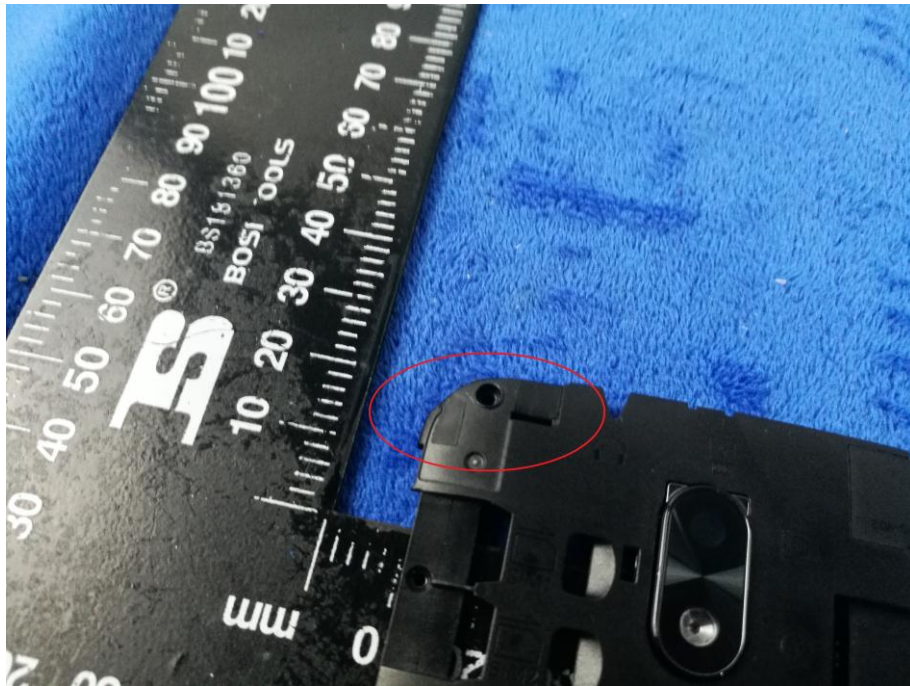

RXD - Antenna View




**Annex B.iii. Photograph: Test Setup Photo**




Conducted Emissions Test Setup – Front View



Conducted Emissions Test Setup – Side View

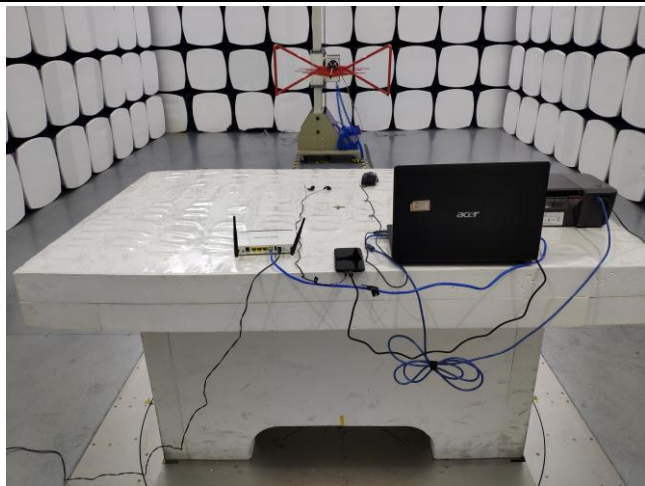

Radiated Emissions Test Setup Below 1GHz

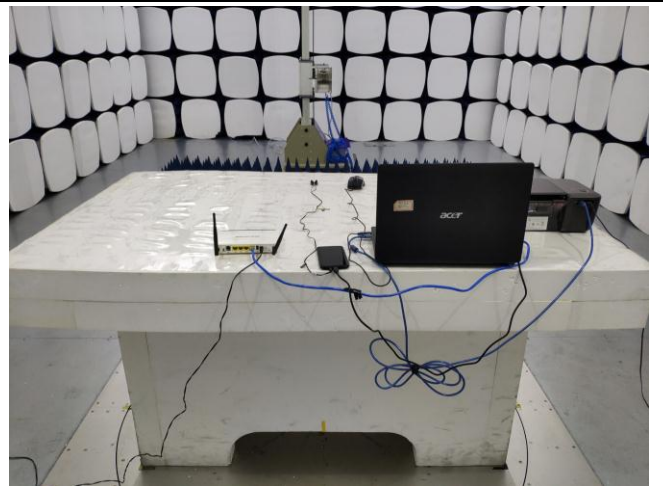


Radiated Emissions Test Setup Above 1GHz




## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Conducted Emissions

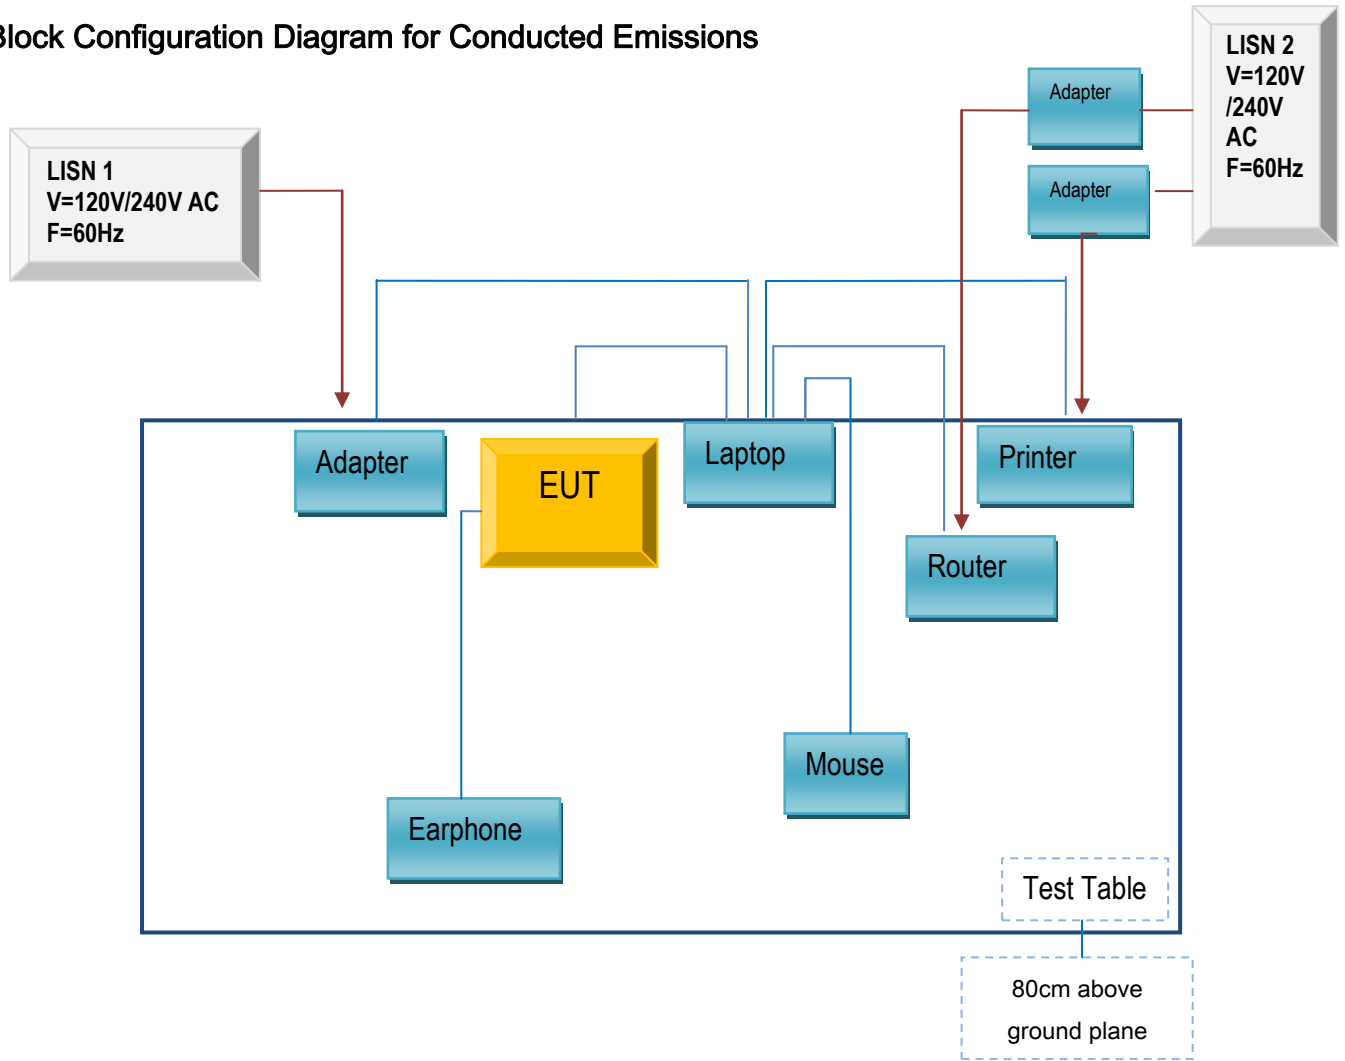

### Block Configuration Diagram for Radiated Emissions

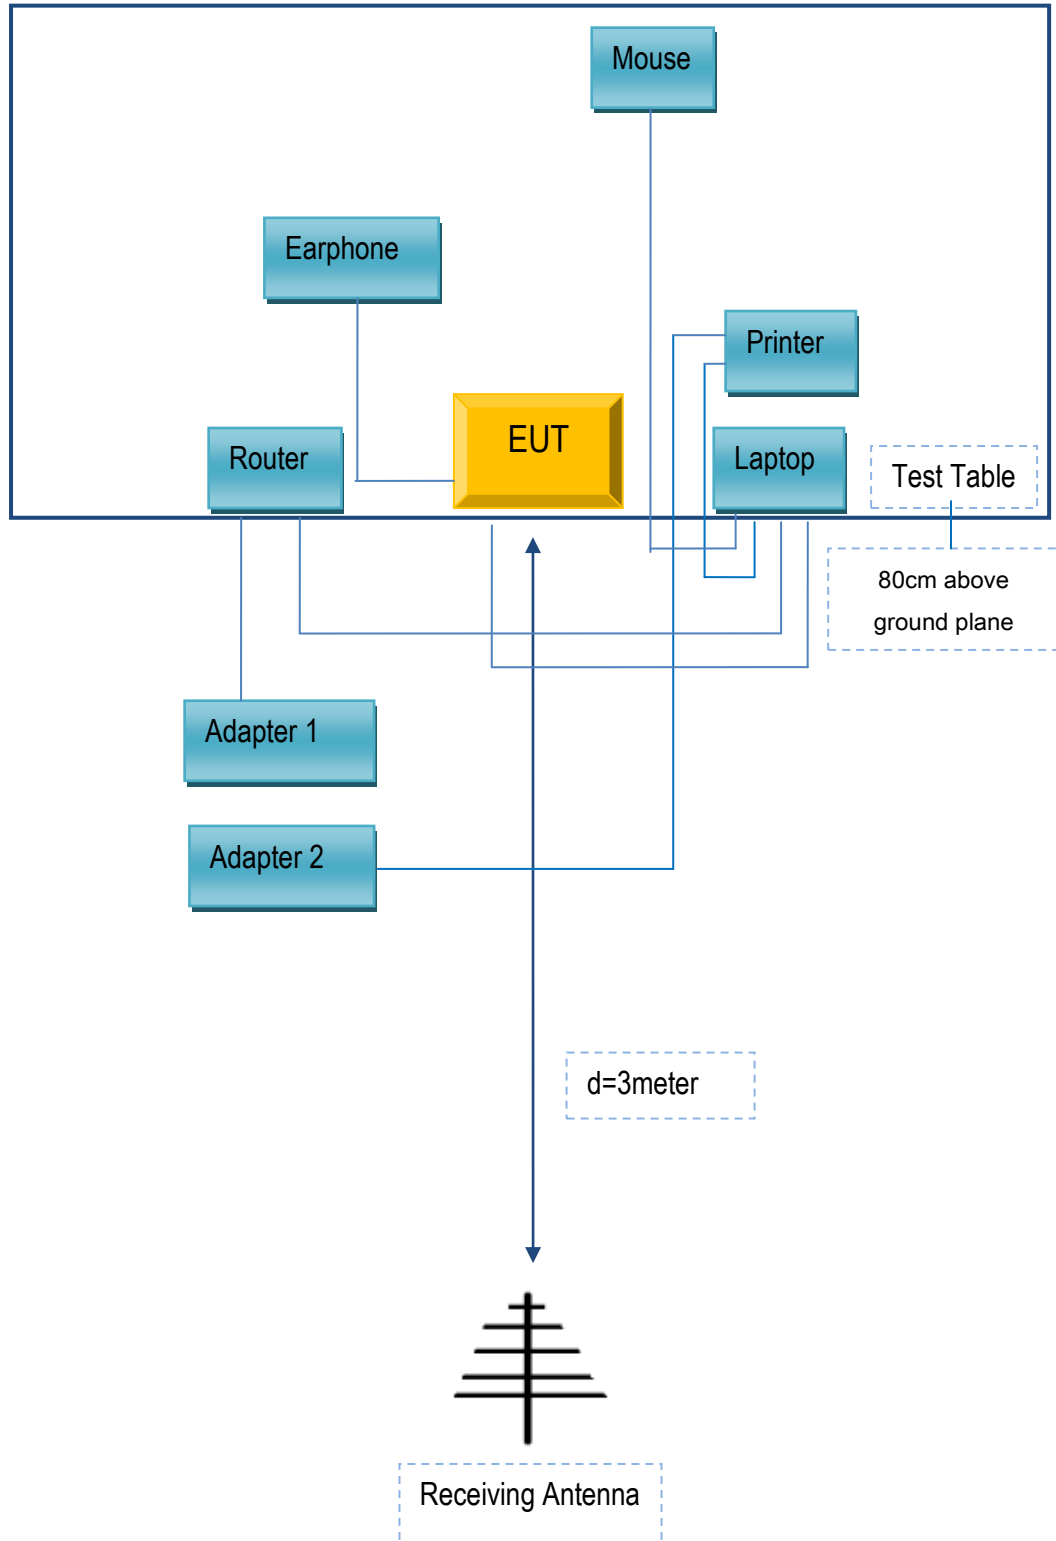

## Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

### Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Lenovo	Laptop	E40	LR-1EHRX
GOLDWEB	Router	R102	1202032094
Lenovo	AC Adapter	42T4416	21D9JU
HP	Printer	VCVRA-1003	CN36M19JWX
DELL	Mouse	E100	912NMTUT41481
BULL	Socket	GN-403	GN201203
N/A	Earphone	N/A	N/A

### Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	2m	N/A
USB Cable	Un-shielding	No	2m	N/A
RJ45 Cable	Un-shielding	No	2m	N/A
Router Power cable	Un-shielding	No	2m	N/A
Printer Power cable	Un-shielding	No	2m	N/A
Power Cable	Un-shielding	No	0.8m	N/A

Test Report	18070322-FCC-E
Page	36 of 37

## Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Test Report	18070322-FCC-E
Page	37 of 37

## Annex E. DECLARATION OF SIMILARITY

N/A