

FCC TEST REPORT

Product Name: Mobile Phone
Trade Mark: BLU
Model No.: TANK XTREME
Add. Model No.: N/A
Report Number: 191021014RFM-1
Test Standards: FCC 47 CFR Part 22 Subpart H
 FCC 47 CFR Part 24 Subpart E
 FCC 47 CFR Part 27 Subpart L
FCC ID: YHLBLUTKXTREME
Test Result: PASS
Date of Issue: November 18, 2019

Prepared for:

BLU Products, Inc.
10814 NW 33rd St # 100 Doral, FL 33172,USA

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F, Block A, Building 6, Baoneng Science and Technology Park,
Qingxiang Road No.1, Longhua New District, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by: _____

Tony Kang

Tony Kang
Project Engineer

Reviewed by: _____

Kevin Liang

Kevin Liang
Assistant Manager

Approved by: _____

Billy Li

Billy Li
Technical Director

Date: _____

November 18, 2019

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Version

Version No.	Date	Description
V1.0	November 18, 2019	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>UTTR-RF-FCC23G-V1.0

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	5
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	6
1.4 DESCRIPTION OF SUPPORT UNITS	7
1.5 TEST LOCATION	7
1.6 TEST FACILITY	7
1.7 DEVIATION FROM STANDARDS	7
1.8 ABNORMALITIES FROM STANDARD CONDITIONS	7
1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
1.10 MEASUREMENT UNCERTAINTY	8
2. TEST SUMMARY	8
3. EQUIPMENT LIST	10
4. TEST CONFIGURATION	11
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	11
4.2 TEST SETUP	12
4.2.1 FOR RADIATED EMISSIONS TEST SETUP	12
4.2.2 FOR CONDUCTED RF TEST SETUP	13
4.3 TEST CHANNELS	14
4.4 SYSTEM TEST CONFIGURATION	15
4.5 PRE-SCAN	15
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	18
5.1 REFERENCE DOCUMENTS FOR TESTING	18
5.2 MAXIMUM ERP/EIRP	18
5.3 CONDUCTED OUTPUT POWER	20
5.4 PEAK-TO-AVERAGE RATIO	21
5.5 99%&26DB BANDWIDTH	26
5.6 BAND EDGE AT ANTENNA TERMINALS	31
5.7 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	35
5.8 FIELD STRENGTH OF SPURIOUS RADIATION	40
5.9 FREQUENCY STABILITY	48
APPENDIX 1 PHOTOS OF TEST SETUP	51
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	51

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	BLU Products, Inc.
Address of Applicant:	10814 NW 33rd St # 100 Doral, FL 33172,USA
Manufacturer:	BLU Products, Inc.
Address of Manufacturer:	10814 NW 33rd St # 100 Doral, FL 33172,USA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Mobile Phone	
Model No.:	TANK XTREME	
Add. Model No.:	N/A	
Trade Mark:	BLU	
DUT Stage:	Identical Prototype	
EUT Supports Function:	GSM Bands:	GSM850/1900
	UTRA Bands:	Band II/ Band IV/ Band V
	E-UTRA Bands:	FDD Band 2/ Band 4/ Band 5/ Band 7/ Band 12/ Band 17
	2.4 GHz ISM Band:	IEEE 802.11b/g/n Bluetooth V4.0
Software Version:	TE536_BLU_39_P0_V0.3.2_S191011	
Hardware Version:	E536 V1.0	
Sample Received Date:	October 22, 2019	
Sample Tested Date:	October 22, 2019 to November 12, 2019	

1.2.2 Description of Accessories

Adapter	
Model No.:	TPA-46050200UU
Input:	100-240 V~50/60 Hz 0.3 A Max
Output:	5.0 V $\overline{\text{---}}$ 2000 mA

Battery	
Model No.:	C745464420L
Battery Type:	Lithium-ion Rechargeable Battery
Rated Voltage:	3.85 Vdc
Rated Capacity:	4200 mAh

Cable	
Description:	USB Micro-B Plug Cable
Cable Type:	Unshielded without ferrite
Length:	1.00 Meter

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Support Networks:	GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA	
Type of Modulation:	GSM/GPRS:	GMSK
	EDGE:	GMSK, 8PSK
	WCDMA	BPSK
	HSDPA	QPSK
	HSUPA:	QPSK
Frequency Range:	GSM/GPRS/EDGE 850:	824.2-848.8 MHz
	GSM/GPRS/EDGE 1900:	1850.2-1909.8 MHz
	WCDMA Band II:	1852.4-1907.6 MHz
	WCDMA Band IV:	1712.4-1752.6 MHz
	WCDMA Band V:	826.4-846.6 MHz
Max RF Output Power:	GSM/GPRS 850:	33.19dBm
	EDGE 850:	26.41dBm
	GSM/GPRS 1900:	30.54dBm
	EDGE 1900:	27.07dBm
	WCDMA Band II:	23.48dBm
	WCDMA Band IV:	22.85dBm
	WCDMA Band V:	22.88dBm
Emission Designator:	GSM/GPRS 850:	247KGXW
	EDGE 850:	250KG7W
	GSM/GPRS 1900:	247KGXW
	EDGE 1900:	254KG7W
	WCDMA Band II:	4M17F9W
	WCDMA Band IV:	4M18F9W
	WCDMA Band V:	4M17F9W
Antenna Type:	PIFA Antenna	
Antenna Gain:	GSM 850:	-1.2 dBi
	PCS 1900:	1.5 dBi
	WCDMA Band II:	1.5 dBi
	WCDMA Band IV:	1 dBi
	WCDMA Band V:	-1.2 dBi
GPRS/EDGE Class:	Class 12	
Normal Test Voltage:	3.85 Vdc	
Extreme Test Voltage:	3.45 to 4.4Vdc	
Extreme Test Temperature:	-10 °C to +55 °C	

1.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested independently

1.5 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109
Telephone: +86 (0) 755 2823 0888
Fax: +86 (0) 755 2823 0886

1.6 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.7 DEVIATION FROM STANDARDS

None.

1.8 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.10 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.8 dB
2	Conducted emission 150KHz-30MHz	±3.4 dB
3	Radiated emission 9KHz-30MHz	±4.9 dB
4	Radiated emission 30MHz-1GHz	±4.7 dB
5	Radiated emission 1GHz-18GHz	±5.1 dB
6	Radiated emission 18GHz-26GHz	±5.2 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB

2. TEST SUMMARY

FCC 47 CFR Part 22 Subpart H Test Cases			
Test Item	Test Requirement	Test Method	Result
Effective Radiated Power (ERP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 22.917(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 22.355	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 24 Subpart E Test Cases			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 24.232(d)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) & FCC 47 CFR Part 24.238(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 24.238(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 24.235	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

FCC 47 CFR Part 27 Subpart L Test Cases			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(d)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(d)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 27.50(d)(5)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 27.53(h)(1)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 27.54	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Dec. 03, 2018	Dec. 03, 2021
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	Nov. 24, 2018	Nov. 24, 2019
<input type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	Dec. 03, 2018	Dec. 03, 2019
<input type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Dec. 08, 2018	Dec. 08, 2019
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	Dec. 08, 2018	Dec. 08, 2019
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	Nov. 24, 2018	Nov. 24, 2019
<input type="checkbox"/>	Broadband Antenna (Pre-amplifier)	ETS-LINDGREN	3142E-PA	00201891	May 18, 2019	May 18, 2020
<input type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103002	Nov. 24, 2018	Nov. 24, 2019
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3117	00164202	Dec. 08, 2018	Dec. 08, 2019
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	May 18, 2019	May 18, 2020
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3116C	00200180	Jun. 23, 2019	Jun. 23, 2020
<input type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Jan. 05, 2019	Jan. 05, 2020
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

RF Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 24, 2018	Nov. 24, 2019
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Nov. 24, 2018	Nov. 24, 2019
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	R&S	CMW500	120932	Jul. 19, 2019	Jul. 19, 2020
<input type="checkbox"/>	Wideband Radio Communication Tester	R&S	CMW500	119583	Jul. 31, 2019	Jul. 31, 2020
<input checked="" type="checkbox"/>	Universal Radio Communication Tester	R&S	CMU200	114713	Nov. 24, 2018	Nov. 24, 2019
<input type="checkbox"/>	DC Source	KIKUSUI	PWR400L	LK003024	Sep. 09, 2019	Sep. 08, 2020
<input type="checkbox"/>	Temp & Humidity chamber	Espec	GL(U)04K A(W)	16921H201P3	Jul. 19, 2019	Jul. 19, 2020
<input type="checkbox"/>	Temp & Humidity chamber	Votisch	VT4002	58566133290020	Jun. 05, 2018	Jun. 05, 2020

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING


Test Environment	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
TN/VN	+15 to +35	3.85	20 to 75
TL/VL	-10	3.45	20 to 75
TH/VL	+55	3.45	20 to 75
TL/VH	-10	4.4	20 to 75
TH/VH	+55	4.4	20 to 75

Remark:


- 1) The EUT just work in such extreme temperature of -10 °C to +55 °C and the extreme voltage of 3.45 V to 4.4 V, so here the EUT is tested in the temperature of -10 °C to +55 °C and the voltage of 3.45 V to 4.4 V.
- 2) VN: Normal Voltage; TN: Normal Temperature;
 TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;
 VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.

4.2 TEST SETUP

4.2.1 For Radiated Emissions test setup

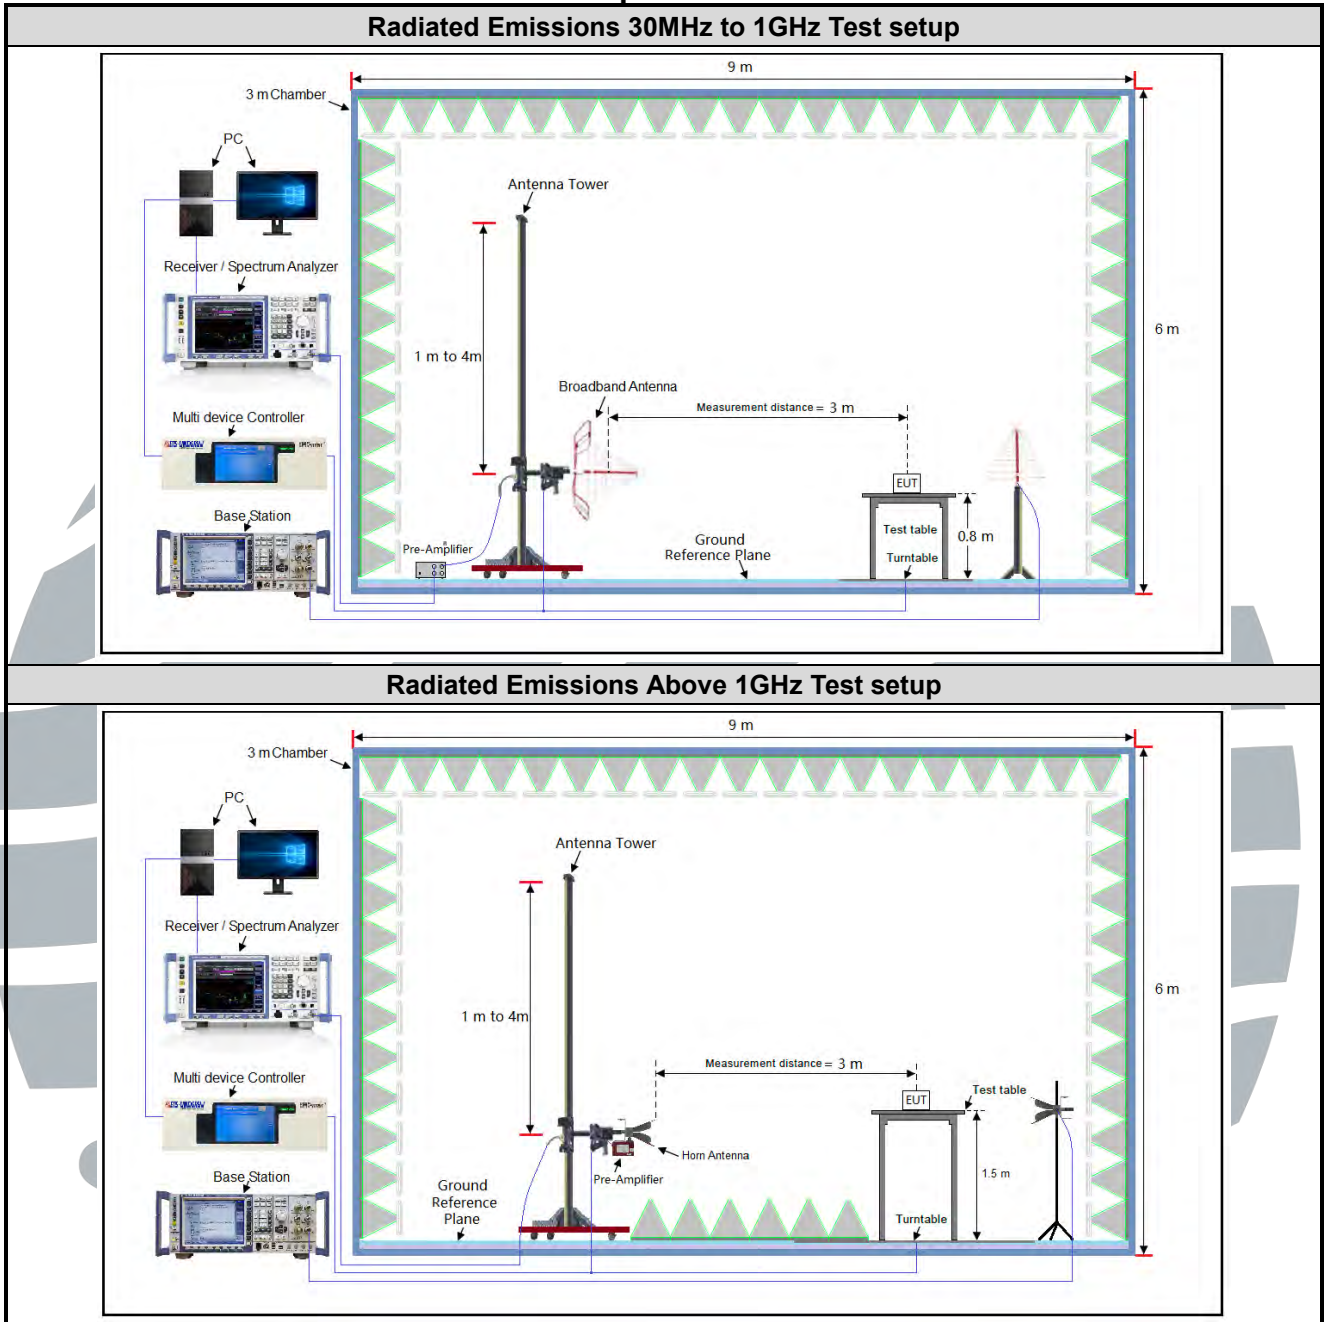

4.2.2 For Conducted RF test setup

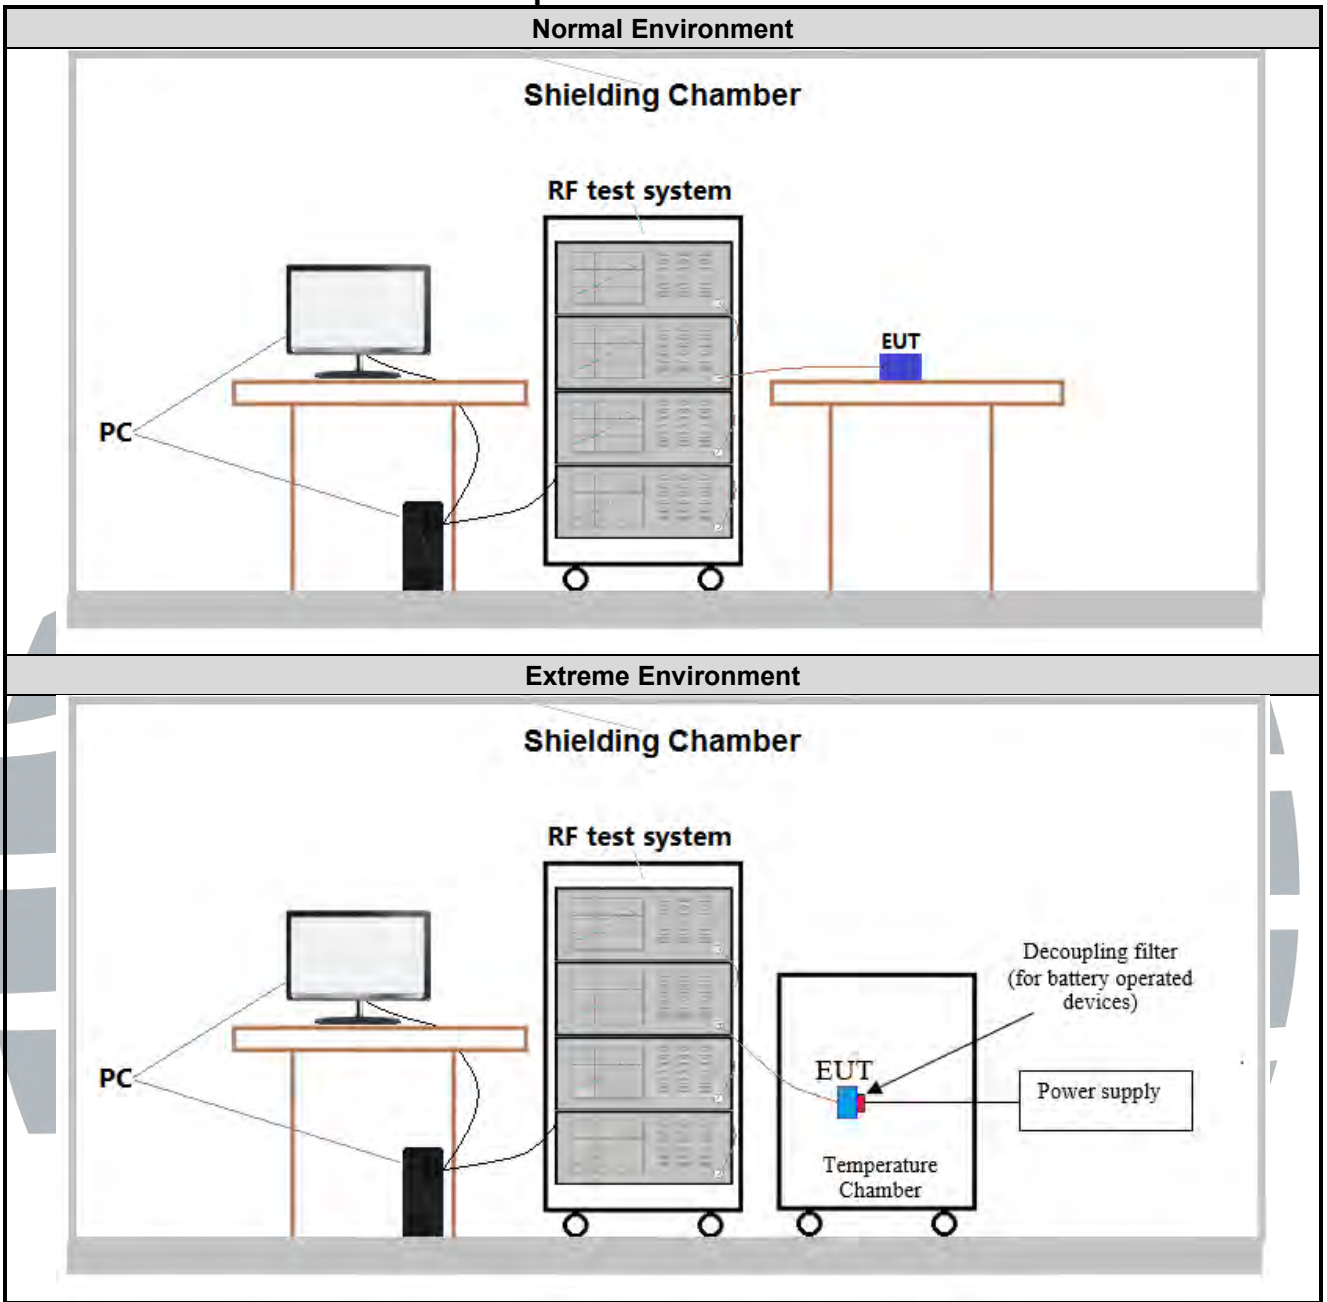

4.3 TEST CHANNELS

Bands	Tx/Rx Frequency	RF Channel		
		Low(L)	Middle(M)	High(H)
GSM/GPRS/ EDGE850	Tx (824 MHz ~ 849 MHz)	Channel 128	Channel 190	Channel 251
		824.2 MHz	836.6 MHz	848.8 MHz
WCDMA band V	Tx (824 MHz ~ 849 MHz)	Channel 4132	Channel 4182	Channel 4233
		826.4 MHz	836.4 MHz	846.6 MHz

Bands	Tx/Rx Frequency	RF Channel		
		Low(L)	Middle(M)	High(H)
GSM/GPRS/ EDGE1900	Tx (1850 MHz-1910 MHz)	Channel 512	Channel 661	Channel 810
		1850.2 MHz	1880.0 MHz	1909.8 MHz
WCDMA Band II	Tx (1850 MHz-1910 MHz)	Channel 9262	Channel 9400	Channel 9538
		1852.4 MHz	1880.0 MHz	1907.6 MHz

Bands	Tx/Rx Frequency	RF Channel		
		Low(L)	Middle(M)	High(H)
WCDMA Band IV	Tx (1710 MHz-1755 MHz)	Channel 1312	Channel 1412	Channel 1513
		1712.4 MHz	1732.4 MHz	1752.6 MHz

4.4 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.85Vdc rechargeable Li-on battery. Only the worst case data were recorded in this test report.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, X/Y/Z axis, and antenna ports.

The worst case was found when positioned as the table below.

Bands	Mode	Antenna Port	Worst-case axis positioning
GSM 850	1TX	Chain 0	Z axis
PCS 1900	1TX	Chain 0	Z axis
WCDMA Band II	1TX	Chain 0	Z axis
WCDMA Band IV	1TX	Chain 0	Z axis
WCDMA Band V	1TX	Chain 0	Z axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.5 PRE-SCAN

Pre-scan under all rate at lowest middle and highest channel, find the transmitter power as below:

SIM 1 Card Conducted transmitter power measurement result.

GSM 850 Maximum Average Power (dBm)			
Channel	128	190	251
Frequency(MHz)	824.2 MHz	836.6 MHz	848.8 MHz
GSM (GMSK, 1Tx-slot)	33.19	33.11	33.05
GPRS (GMSK, 1Tx-slot)	33.08	33.12	33.06
GPRS (GMSK, 2Tx-slot)	32.41	32.33	32.30
GPRS (GMSK, 3Tx-slot)	30.60	30.47	30.40
GPRS (GMSK, 4Tx-slot)	29.35	29.26	29.19
EDGE (8PSK, 1Tx-slot)	26.41	26.20	26.19
EDGE (8PSK, 2Tx-slot)	24.97	24.84	24.67
EDGE (8PSK, 3Tx-slot)	22.75	22.53	22.43
EDGE (8PSK, 4Tx-slot)	21.25	21.31	21.26

PCS 1900 Maximum Average Power (dBm)			
Channel	512	661	810
Frequency(MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz
GSM (GMSK, 1Tx-slot)	30.31	30.49	30.54
GPRS (GMSK, 1Tx-slot)	30.32	30.50	30.54
GPRS (GMSK, 2Tx-slot)	29.58	29.74	29.80
GPRS (GMSK, 3Tx-slot)	27.77	27.95	28.03
GPRS (GMSK, 4Tx-slot)	26.63	26.84	26.92
EDGE (8PSK, 1Tx-slot)	27.07	26.90	26.87
EDGE (8PSK, 2Tx-slot)	25.76	25.91	26.01
EDGE (8PSK, 3Tx-slot)	23.89	24.01	24.12
EDGE (8PSK, 4Tx-slot)	22.84	22.99	23.14

WCDMA Band II Maximum Average Power (dBm)			
Channel	9262	9400	9538
Frequency(MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz
RMC 12.2kbps	23.43	23.37	23.48
HSDPA Subtest-1	22.36	22.33	22.42
HSDPA Subtest-2	22.39	22.28	22.43
HSDPA Subtest-3	21.88	21.82	21.91
HSDPA Subtest-4	21.84	21.77	21.90
HSUPA Subtest-1	20.40	20.31	20.43
HSUPA Subtest-2	20.45	20.38	20.44
HSUPA Subtest-3	21.37	21.29	21.40
HSUPA Subtest-4	19.91	19.84	19.96
HSUPA Subtest-5	21.86	21.80	21.87

WCDMA Band IV Maximum Average Power (dBm)			
Channel	1312	1412	1513
Frequency(MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz
RMC 12.2kbps	22.80	22.76	22.88
HSDPA Subtest-1	21.79	21.71	21.84
HSDPA Subtest-2	21.74	21.72	21.83
HSDPA Subtest-3	21.31	21.24	21.33
HSDPA Subtest-4	21.23	21.19	21.30
HSUPA Subtest-1	19.79	19.73	19.88
HSUPA Subtest-2	19.83	19.76	19.91
HSUPA Subtest-3	20.87	20.78	20.91
HSUPA Subtest-4	19.34	19.26	19.41
HSUPA Subtest-5	21.26	21.22	21.30

WCDMA Band V Maximum Average Power (dBm)			
Channel	4132	4182	4233
Frequency(MHz)	826.4 MHz	836.4 MHz	846.6 MHz
RMC 12.2kbps	22.85	22.82	22.80
HSDPA Subtest-1	21.84	21.80	21.76
HSDPA Subtest-2	21.83	21.79	21.78
HSDPA Subtest-3	21.33	21.29	21.25
HSDPA Subtest-4	21.30	21.28	21.22
HSUPA Subtest-1	19.88	19.82	19.81
HSUPA Subtest-2	19.93	19.86	19.84
HSUPA Subtest-3	20.83	20.79	20.78
HSUPA Subtest-4	19.38	19.36	19.35
HSUPA Subtest-5	21.34	21.28	21.29

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band	Radiated	Conducted
GSM/GPRS/EDGE 850/1900	1) GSM (GMSK, 1Tx-slot) Link 2) GPRS (GMSK, 2Tx-slot) Link 3) EDGE (8PSK, 2Tx-slot) Link	1) GSM (GMSK, 1Tx-slot) Link 2) GPRS (GMSK, 2Tx-slot) Link 3) EDGE (8PSK, 2Tx-slot) Link
WCDMA Band II/IVV	RMC 12.2kbps Link	RMC 12.2kbps Link

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 22	Public Mobile Services
3	FCC 47 CFR Part 27	Miscellaneous Wireless Communications Services
4	FCC 47 CFR Part 24	Personal Communications Services
5	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
6	KDB 971168 D01	KDB 971168 D01 Power Meas License Digital Systems v03r01

5.2 MAXIMUM ERP/EIRP

Test Requirement: FCC 47 CFR Part 2.1046(a),
 FCC 47 CFR Part 22.913(a),
 FCC 47 CFR Part 24.232(c),
 FCC 47 CFR Part 27.50(d)(4)

Test Method: KDB 971168 D01v03r01 Section 5.6 & ANSI C63.26-2015

Limit:

FCC 47 CFR Part 22.913(a)

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c)

Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4)

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

Test Procedure:

$$ERP \text{ or } EIRP = P_{Meas} + G_T - L_c$$

where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas}, typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_c = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup: Refer to section 4.2.1 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: See table below

Bands	Modulation	Max. Conducted Avg. Power	Ant. Gain	Limit	ERP		Result
		(dBm)	(dBi)	(W)	(dBm)	(W)	
GSM 850 (824-849 MHz)	GSM	33.19	-1.20	7.0	31.99	1.581248	Pass
	EDGE	26.41	-1.20		25.21	0.331894	Pass
WCDMA Band V (824-849 MHz)	RMC 12.2kbps	22.85	-1.20	7.0	21.65	0.146218	Pass
	HSUPA	21.84	-1.20		20.64	0.115878	Pass
	HSDPA	21.34	-1.20		20.14	0.103276	Pass

Bands	Modulation	Max. Conducted Avg. Power	Ant. Gain	Limit	EIRP		Result
		(dBm)	(dBi)	(W)	(dBm)	(W)	
PCS 1900 (1850-1910 MHz)	GSM	30.54	1.50	2.0	32.04	1.599558	Pass
	EDGE	27.07	1.50		28.57	0.719449	Pass
WCDMA Band II (1850-1910 MHz)	RMC 12.2kbps	23.48	1.50	2.0	24.98	0.314775	Pass
	HSUPA	22.43	1.50		23.93	0.247172	Pass
	HSDPA	21.87	1.50		23.37	0.217270	Pass
WCDMA Band IV (1710-1755 MHz)	RMC 12.2kbps	22.88	1.00	1.0	23.88	0.244343	Pass
	HSUPA	21.84	1.00		22.84	0.192309	Pass
	HSDPA	21.30	1.00		22.30	0.169824	Pass

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

5.3 CONDUCTED OUTPUT POWER

Test Requirement: FCC 47 CFR Part 2.1046(a),
FCC 47 CFR Part 22.913(a),
FCC 47 CFR Part 24.232(c),
FCC 47 CFR Part 27.50(d)(4)

Test Method: KDB 971168 D01v03r01 & ANSI C63.26-2015

Limit:

FCC 47 CFR Part 22.913(a)

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c)

Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4)

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

Test Procedure:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA2000, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: The full result refer to section 4.5 for details.

5.4 PEAK-TO-AVERAGE RATIO

Test Requirement: FCC 47 CFR Part 22.913(a),
 FCC 47 CFR Part 24.232(c),
 FCC 47 CFR Part 27.50(d)(5)

Test Method: KDB 971168 D01v03r01 Section 5.7

Limit: In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

Test Procedure:
 The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

- a) Set resolution/measurement bandwidth \geq signal's occupied bandwidth
- b) Set the number of counts to a value that stabilizes the measured CCDF curve
- c) Record the maximum PAPR level associated with a probability of 0.1 %

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: See table below

Bands	Modulation	Peak-to-average ratio (dB)			Limit (dBm)	Result
		Lowest	Middle	Highest		
GSM 850	GSM	0.27	0.27	0.28	13	Pass
	EDGE	0.31	0.27	0.28	13	Pass
PCS 1900	GSM	0.28	0.29	0.28	13	Pass
	EDGE	0.28	0.28	0.28	13	Pass
WCDMA Band II	RMC 12.2kbps	3.39	3.42	3.22	13	Pass
WCDMA Band IV	RMC 12.2kbps	2.96	3.19	3.07	13	Pass
WCDMA Band V	RMC 12.2kbps	3.04	4.26	3.01	13	Pass

The test plots as follows:



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

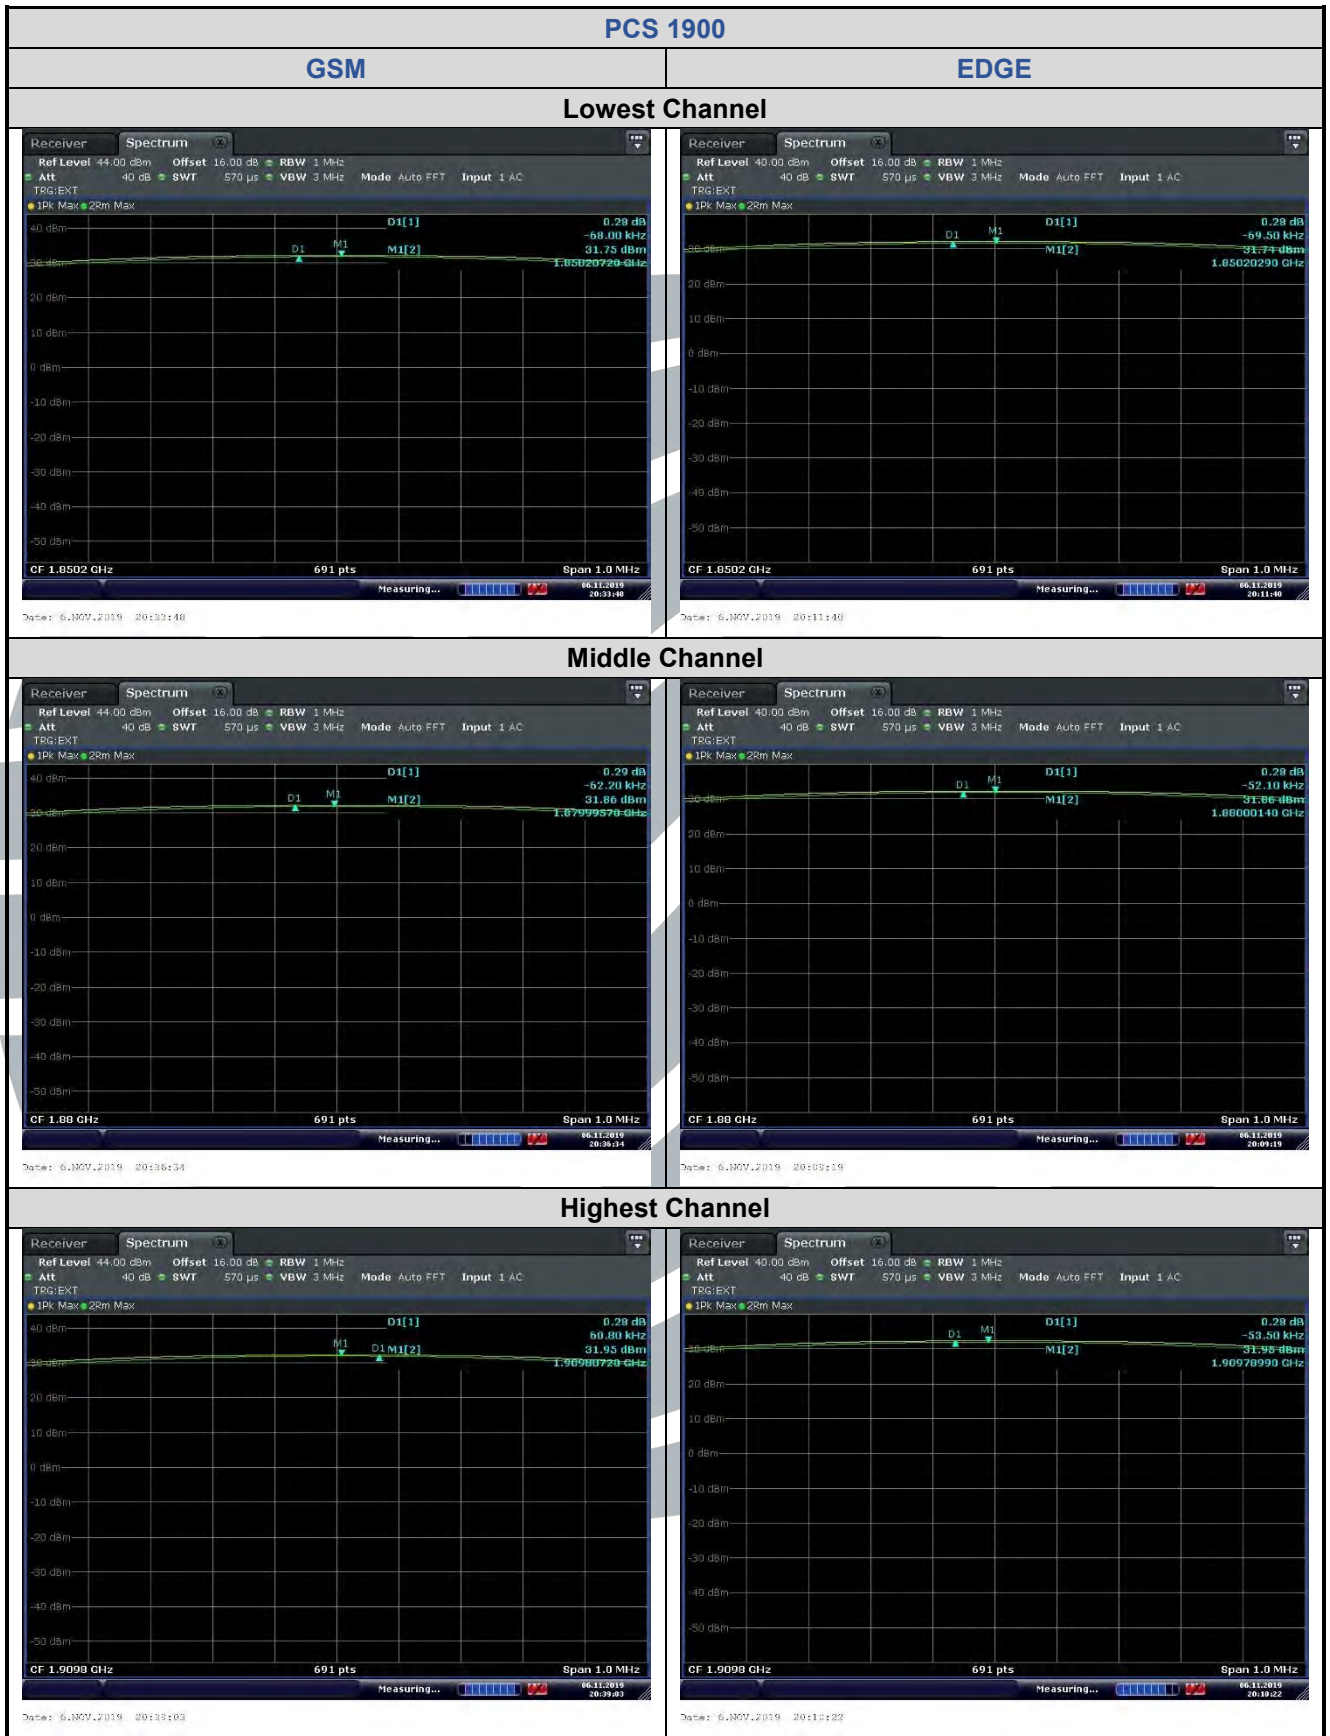

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

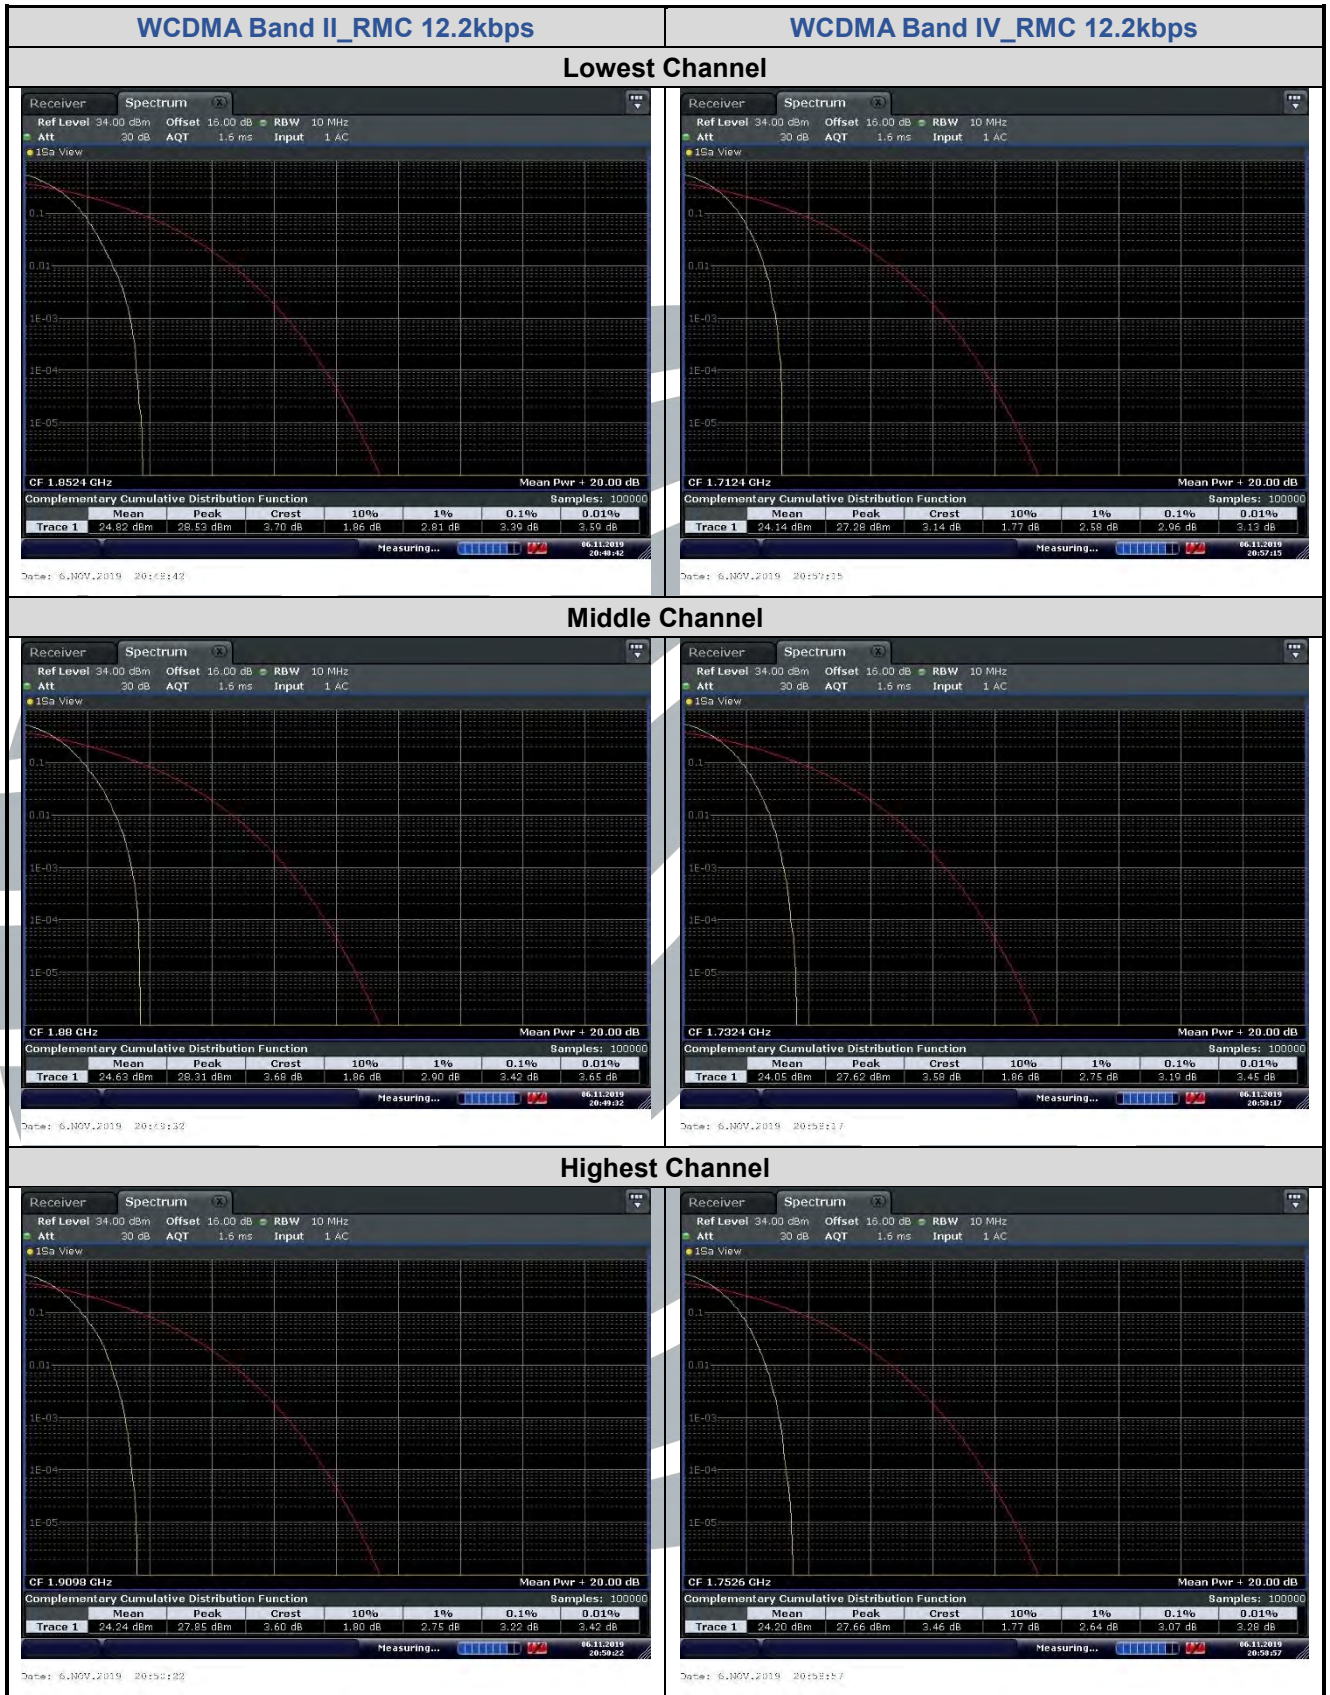

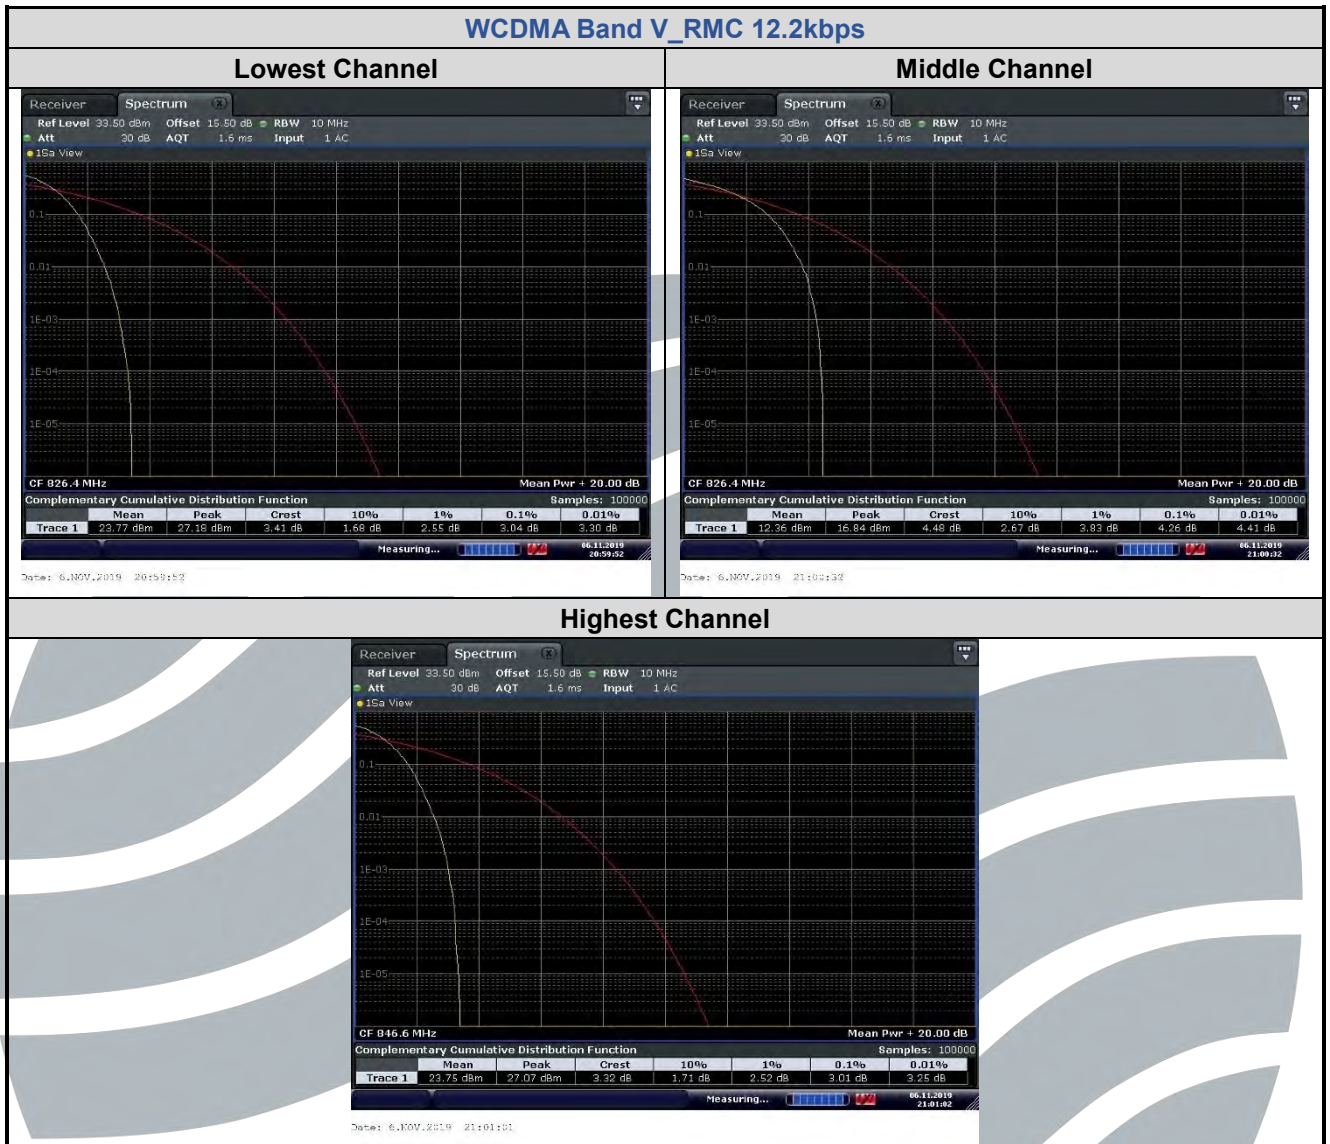

5.5 99%&26DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 2.1049(h),
 FCC 47 CFR Part 22.917(b),
 FCC 47 CFR Part 24.238(b),
 FCC 47 CFR Part 27.53(h)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01 Section 4

Limit: No Limit, for reporting purposes only.

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: See table below

Bands	Modulation	Channel	Frequency (MHz)	26 dB BW (kHz)	99% BW (kHz)
GSM 850	GSM	128	824.2	315.2	247.32
		190	836.6	314.3	246.57
		251	848.8	320.8	242.18
	EDGE	128	824.2	314.6	250.20
		190	836.6	316.7	249.37
		251	848.8	318.8	246.31
PCS 1900	GSM	512	1850.2	316.1	243.40
		661	1880.0	318.8	246.87
		810	1909.8	318.3	243.11
	EDGE	512	1850.2	325.1	253.56
		661	1880.0	317.5	251.83
		810	1909.8	320.9	251.35

Bands	Modulation	Channel	Frequency (MHz)	26 dB BW (MHz)	99% BW (MHz)
WCDMA Band II	RMC 12.2kbps	9262	1852.4	4.700	4.1713
		9400	1880.0	4.689	4.1600
		9538	1907.6	4.700	4.1586
WCDMA Band IV	RMC 12.2kbps	1312	1712.4	4.691	4.1734
		1412	1732.4	4.685	4.1766
		1513	1752.6	4.681	4.1602
WCDMA Band V	RMC 12.2kbps	4132	826.4	4.700	4.1730
		4182	836.4	4.696	4.1572
		4233	846.6	4.706	4.1550

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

The test plots as follows:



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

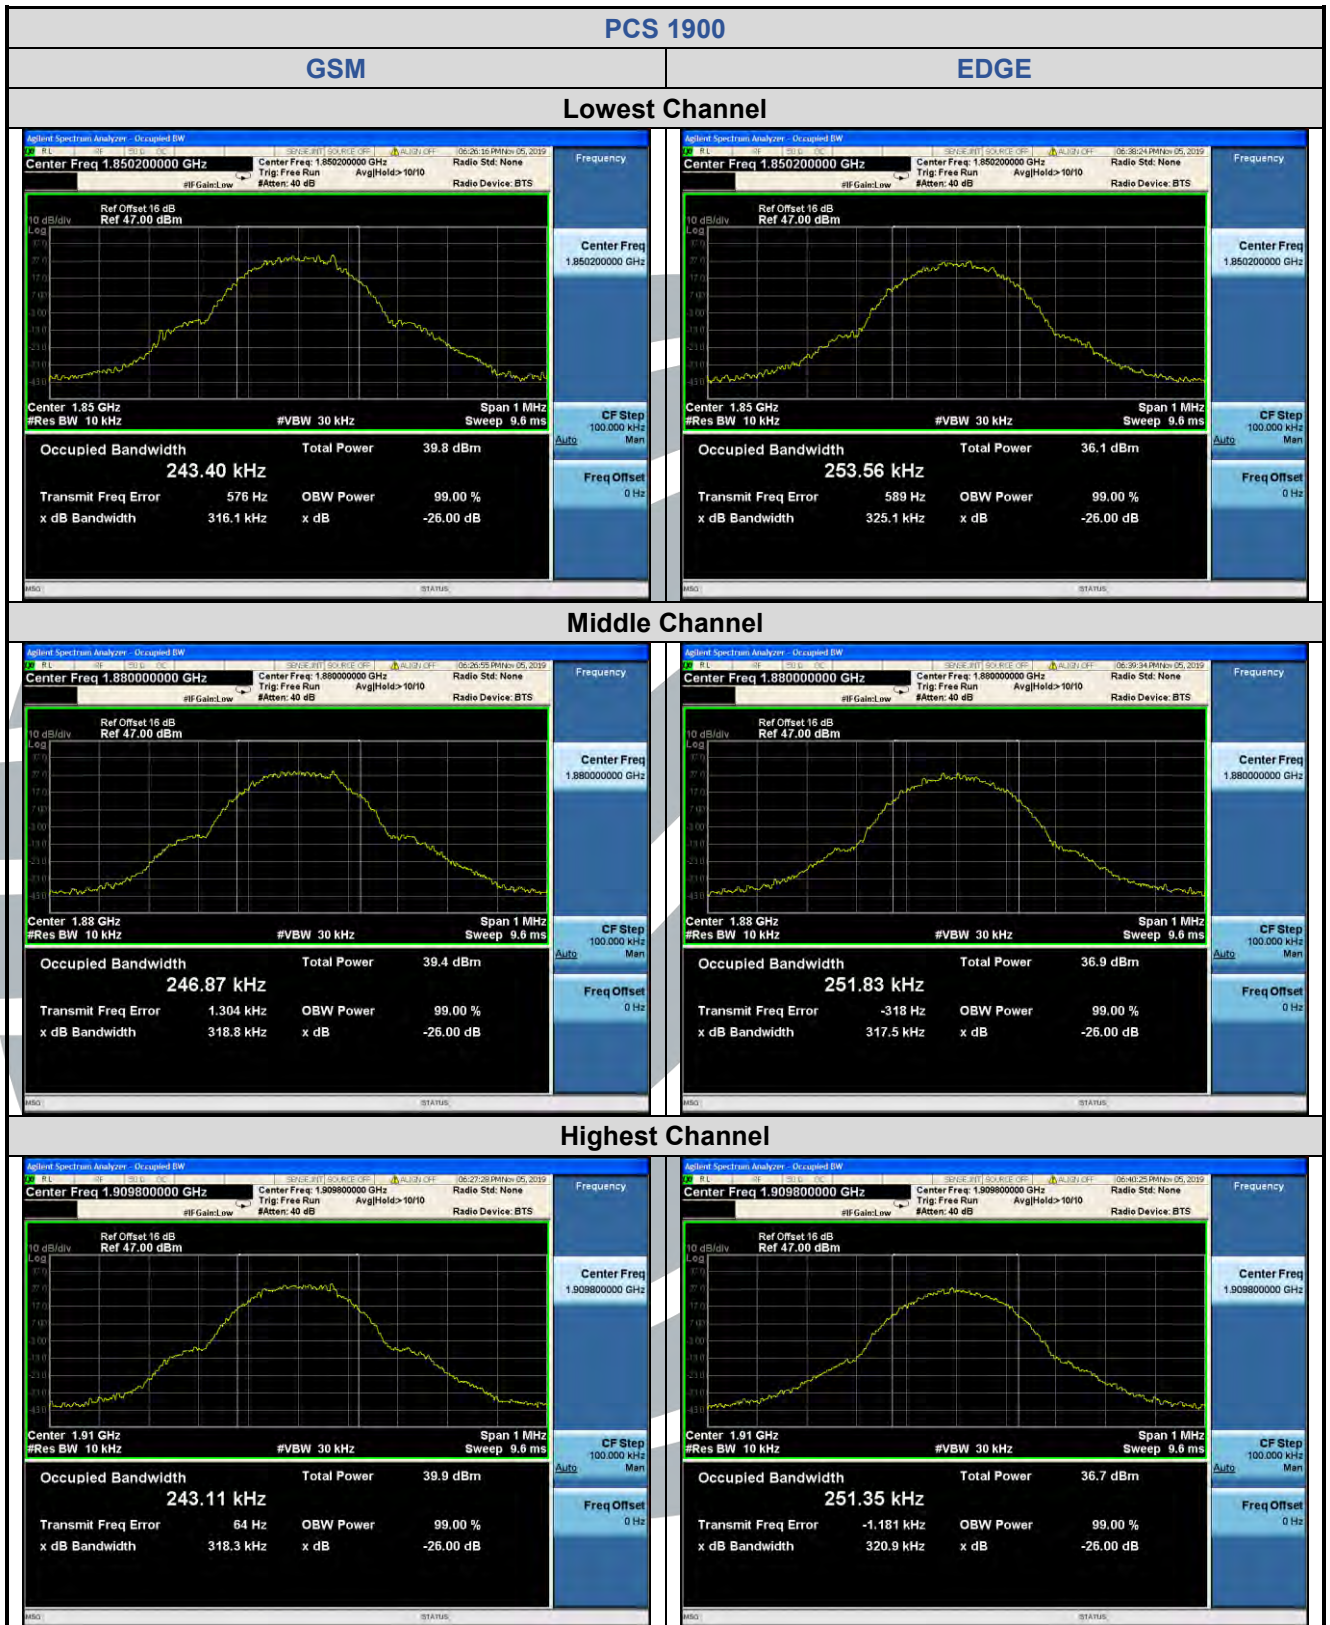

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

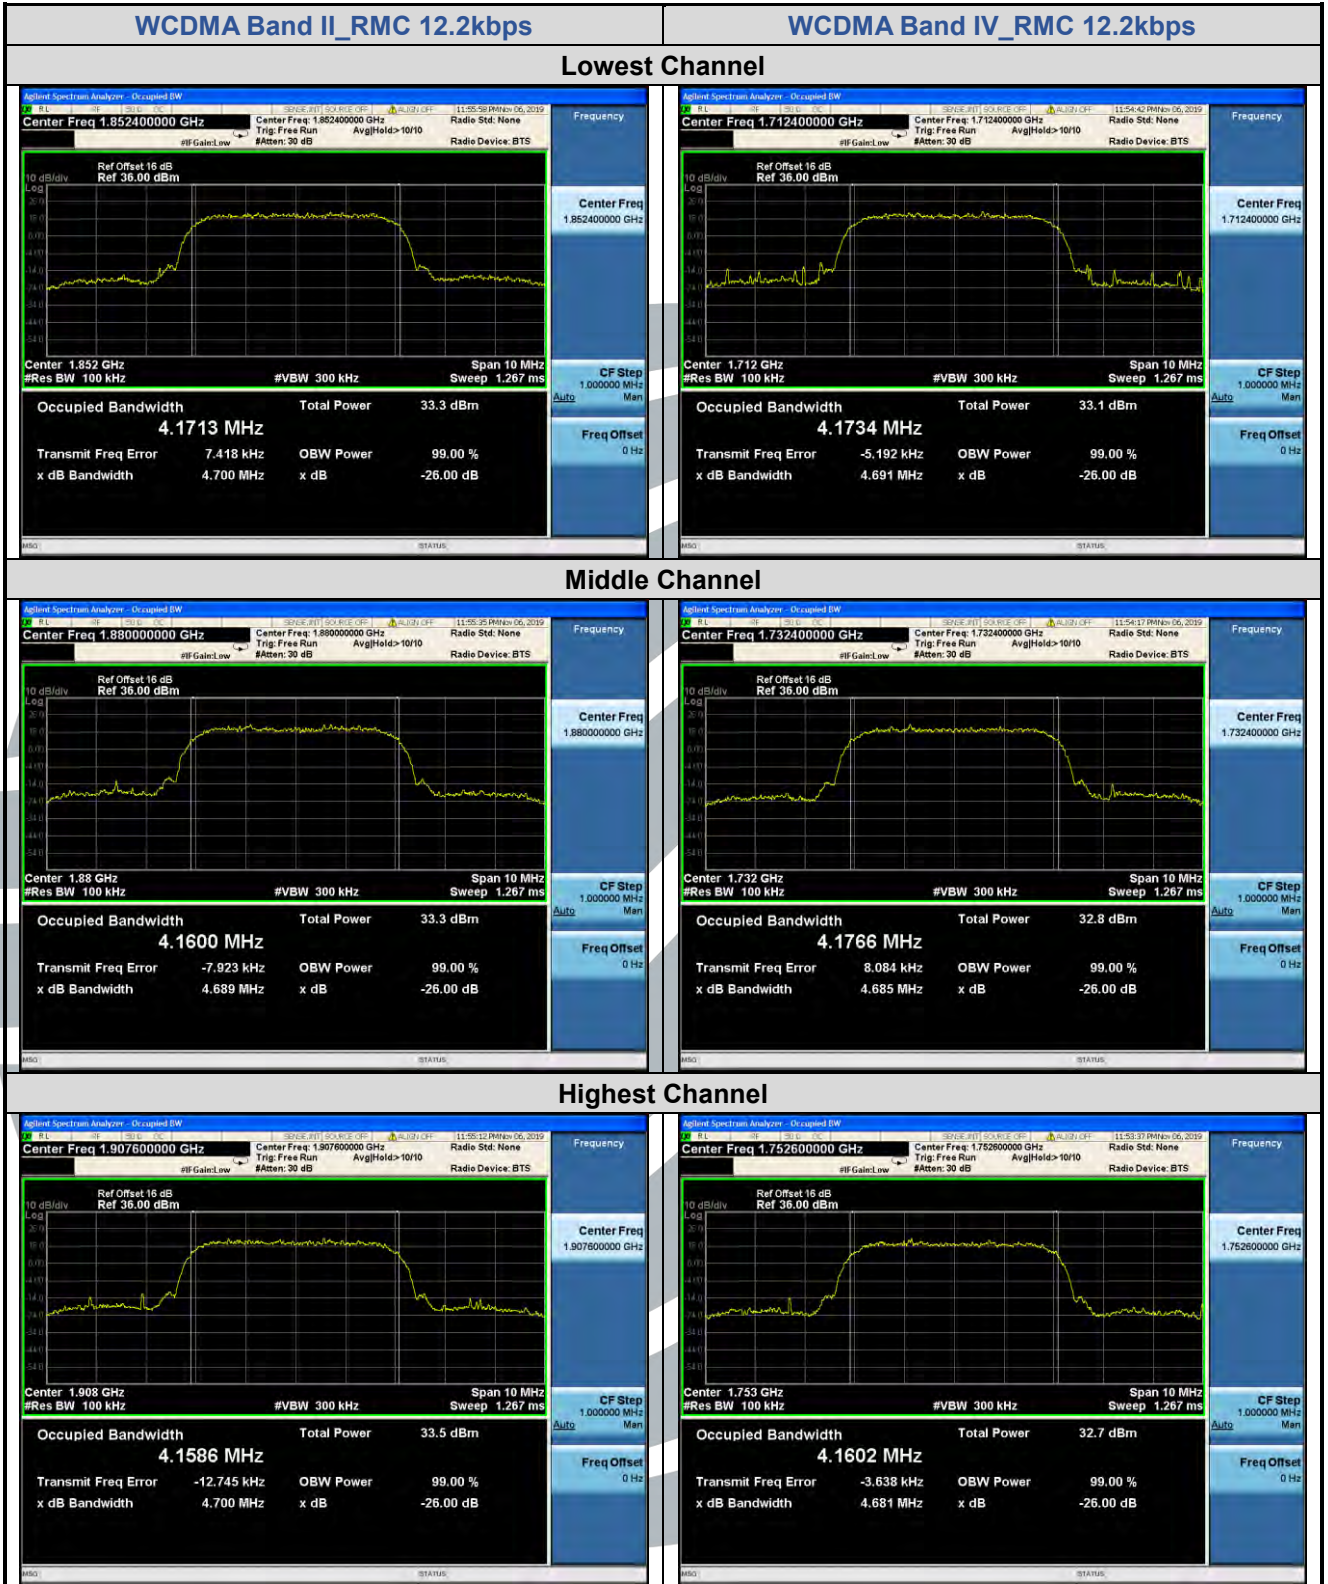

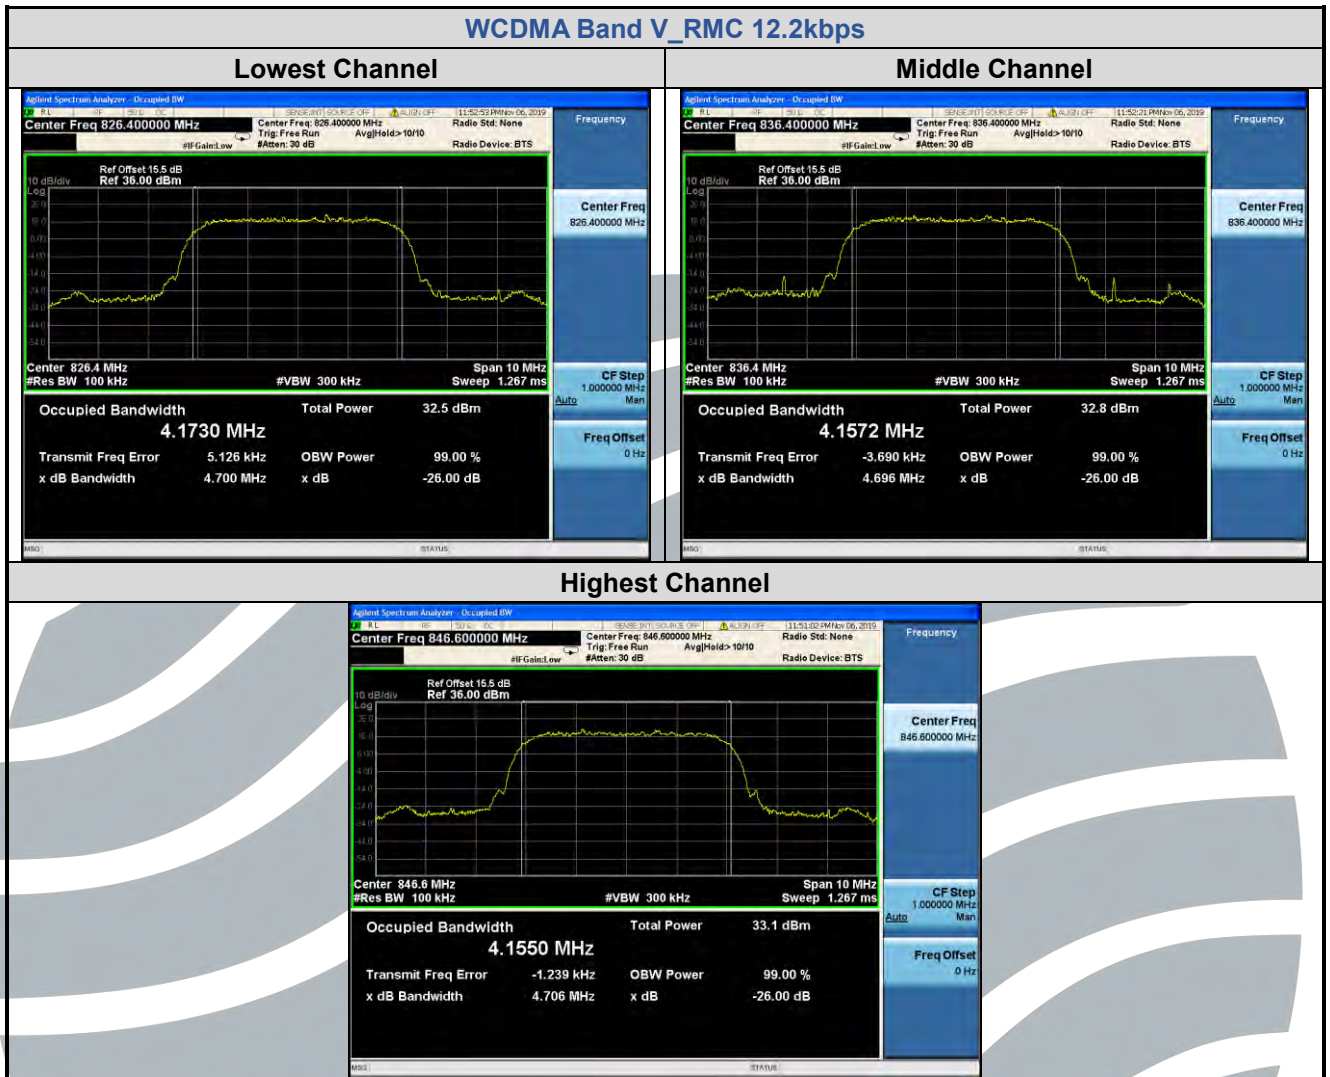

5.6 BAND EDGE AT ANTENNA TERMINALS

Test Requirement: FCC 47 CFR Part 2.1051,
 FCC 47 CFR Part 22.917(a),
 FCC 47 CFR Part 24.238(a),
 FCC 47 CFR Part 27.53(h)(1)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limit:
 The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

Test Procedure:
 The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

For each band edge measurement:

- 1) Set the spectrum analyzer span to include the block edge frequency.
- 2) Set a marker to point the corresponding band edge frequency in each test case.
- 3) Set display line at -13 dBm
- 4) Set resolution bandwidth to at least 1% of emission bandwidth.
- 5) Set spectrum analyzer with RMS detector.
- 6) Record the max trace plot into the test report

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


Test Setup: Refer to section 4.2.2 for details.


Instruments Used: Refer to section 3 for details


Test Mode: Link mode

Test Results: Pass

The test plots as follows:

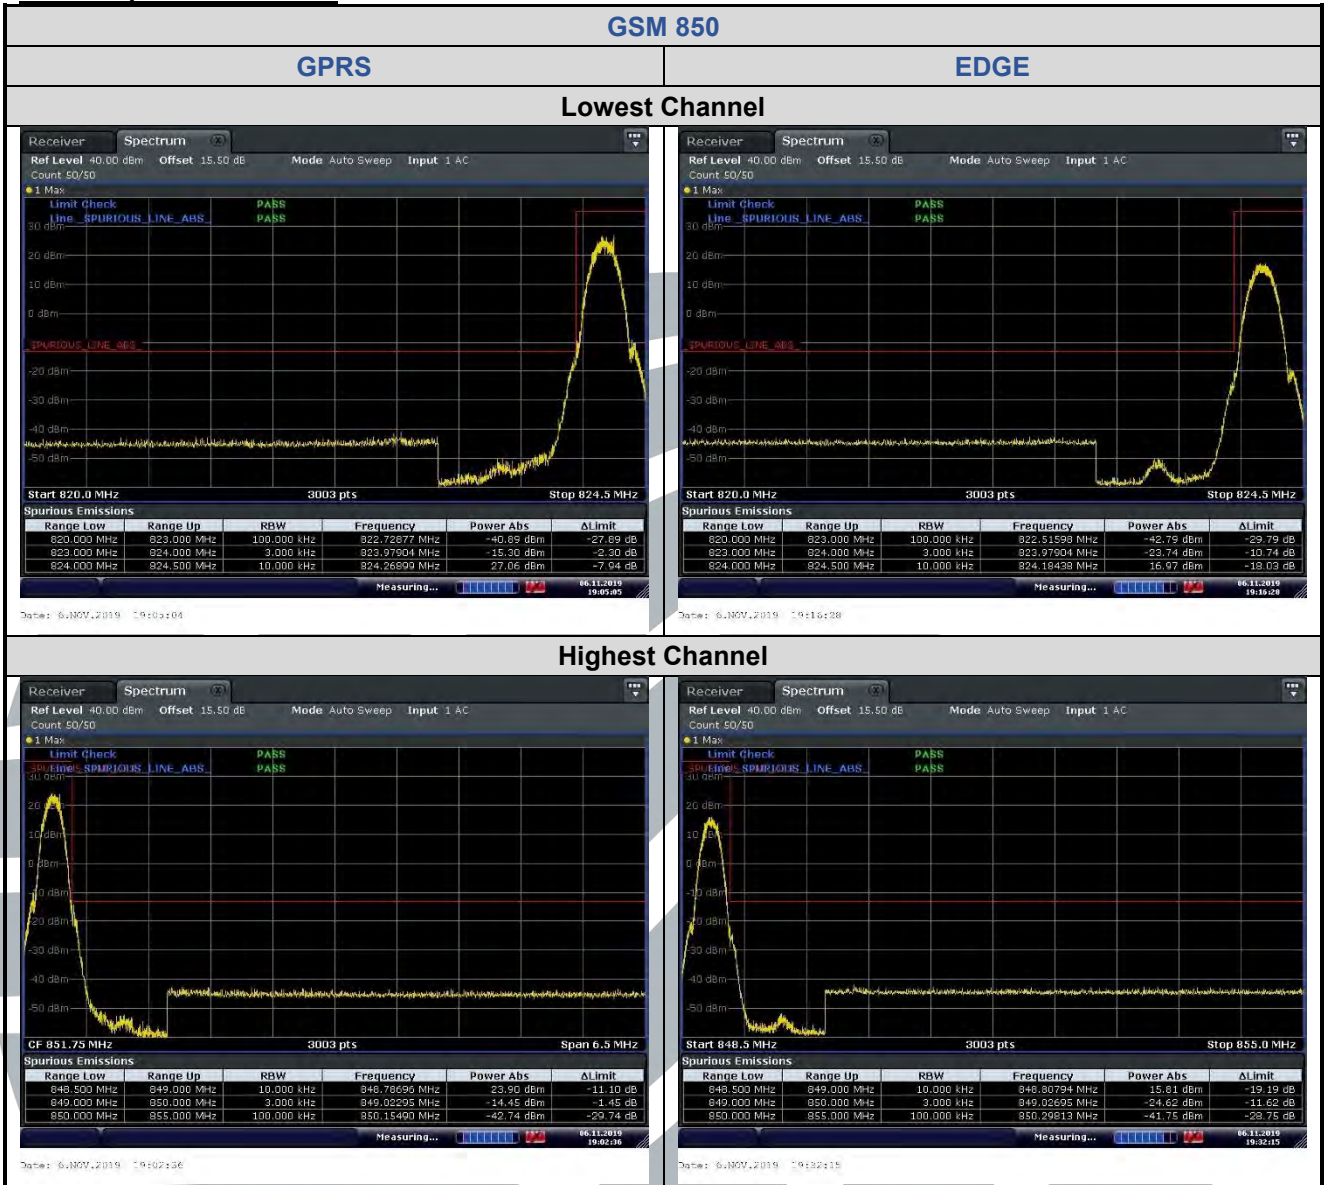

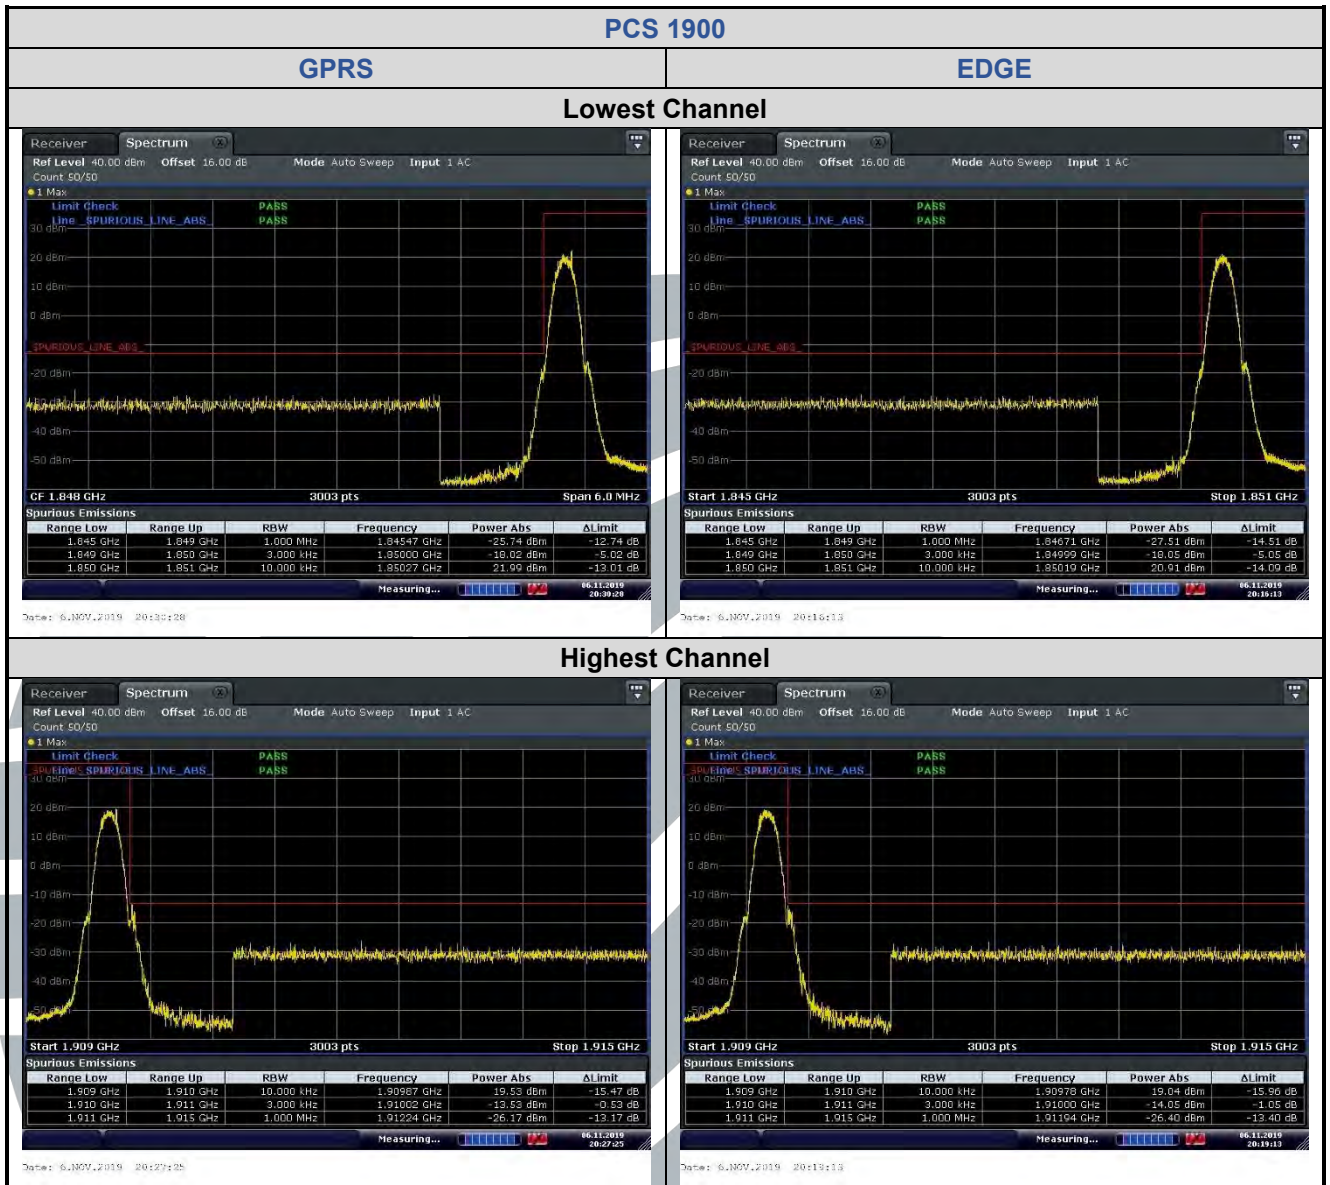

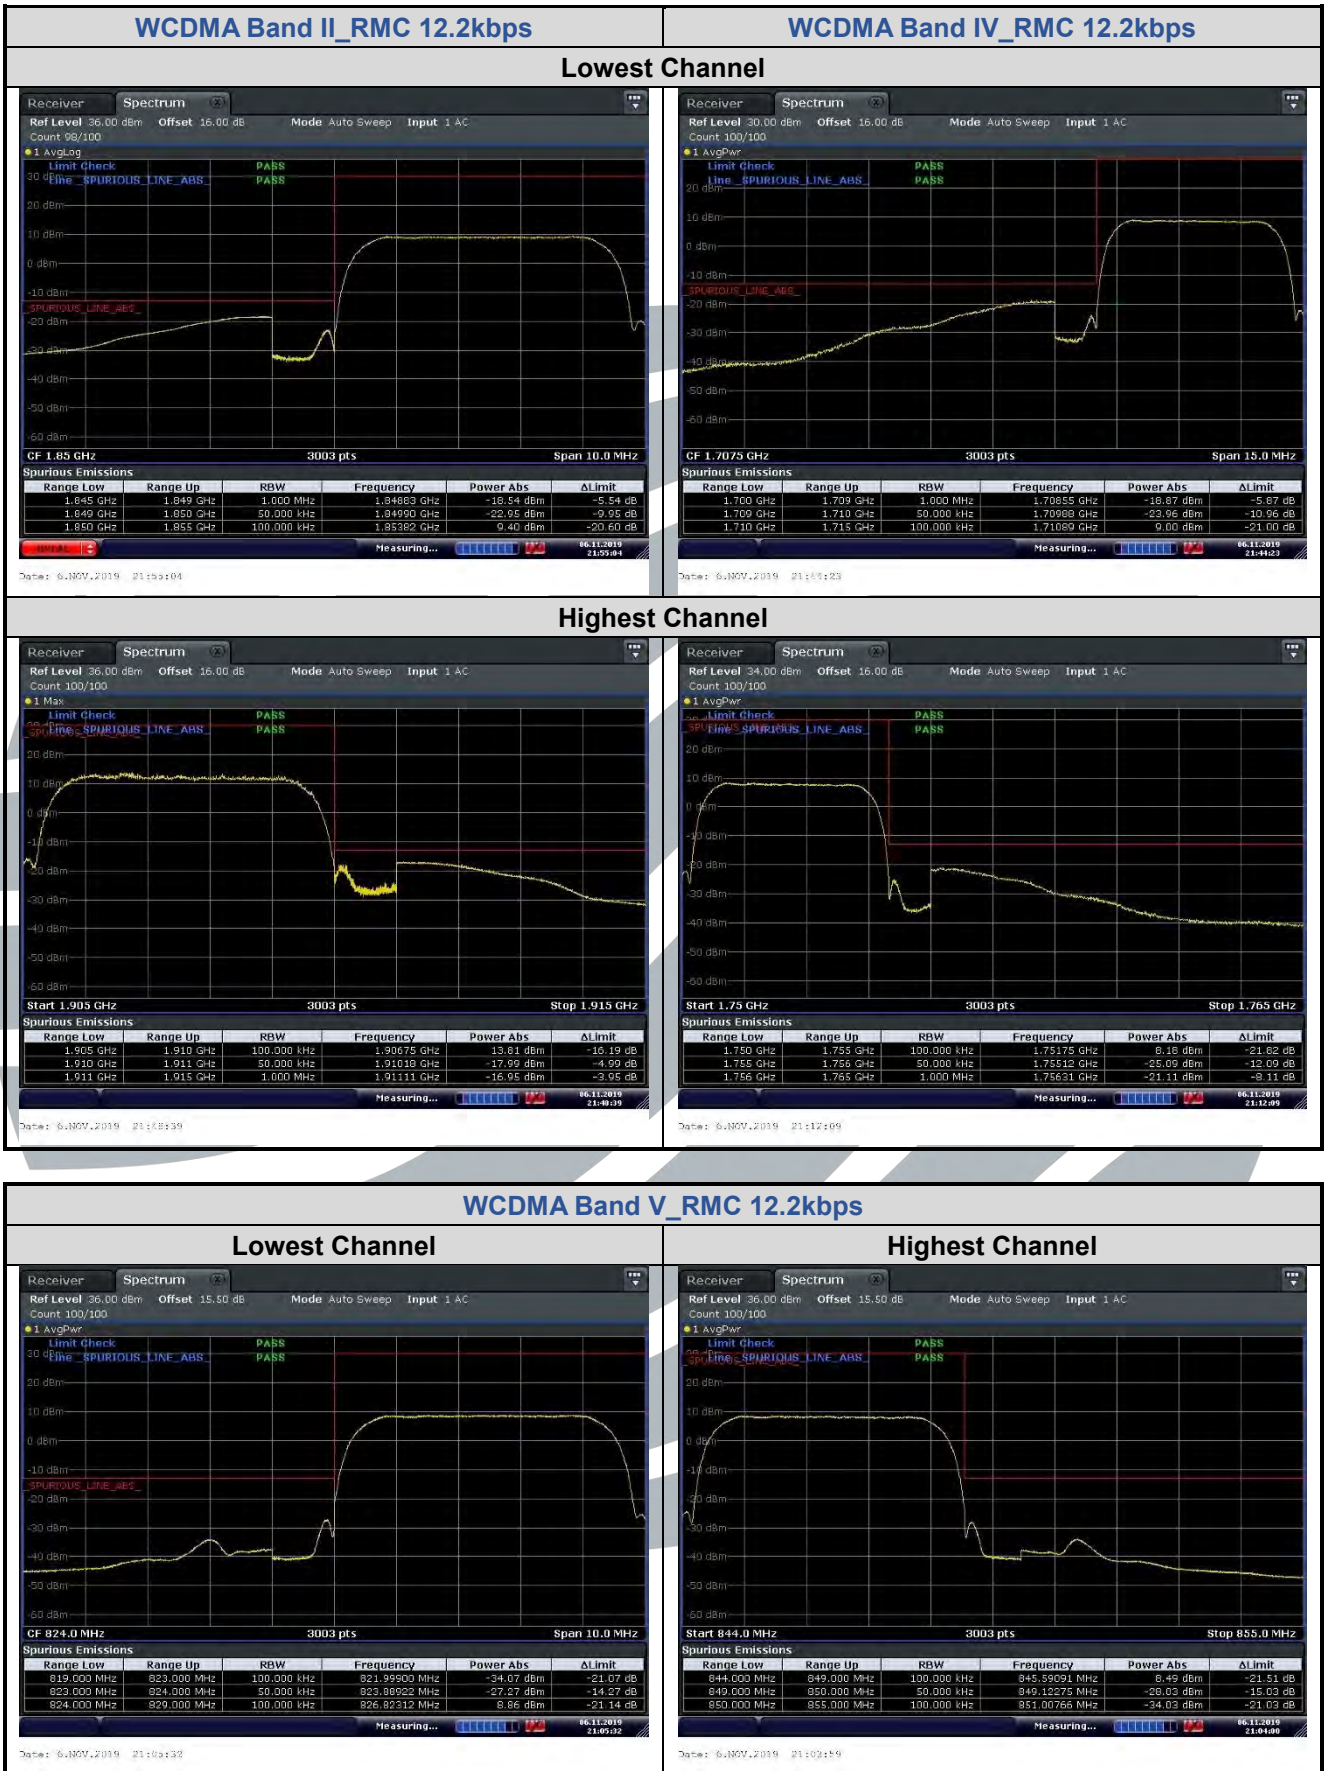

5.7 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Test Requirement: FCC 47 CFR Part 2.1051,
 FCC 47 CFR Part 22.917(a)(b),
 FCC 47 CFR Part 24.238(a)(b),
 FCC 47 CFR Part 27.53(h)(1)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limit:
 The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

Test Procedure:
 The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range. b. Measuring frequency range is from 30 MHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

The test plots as follows:

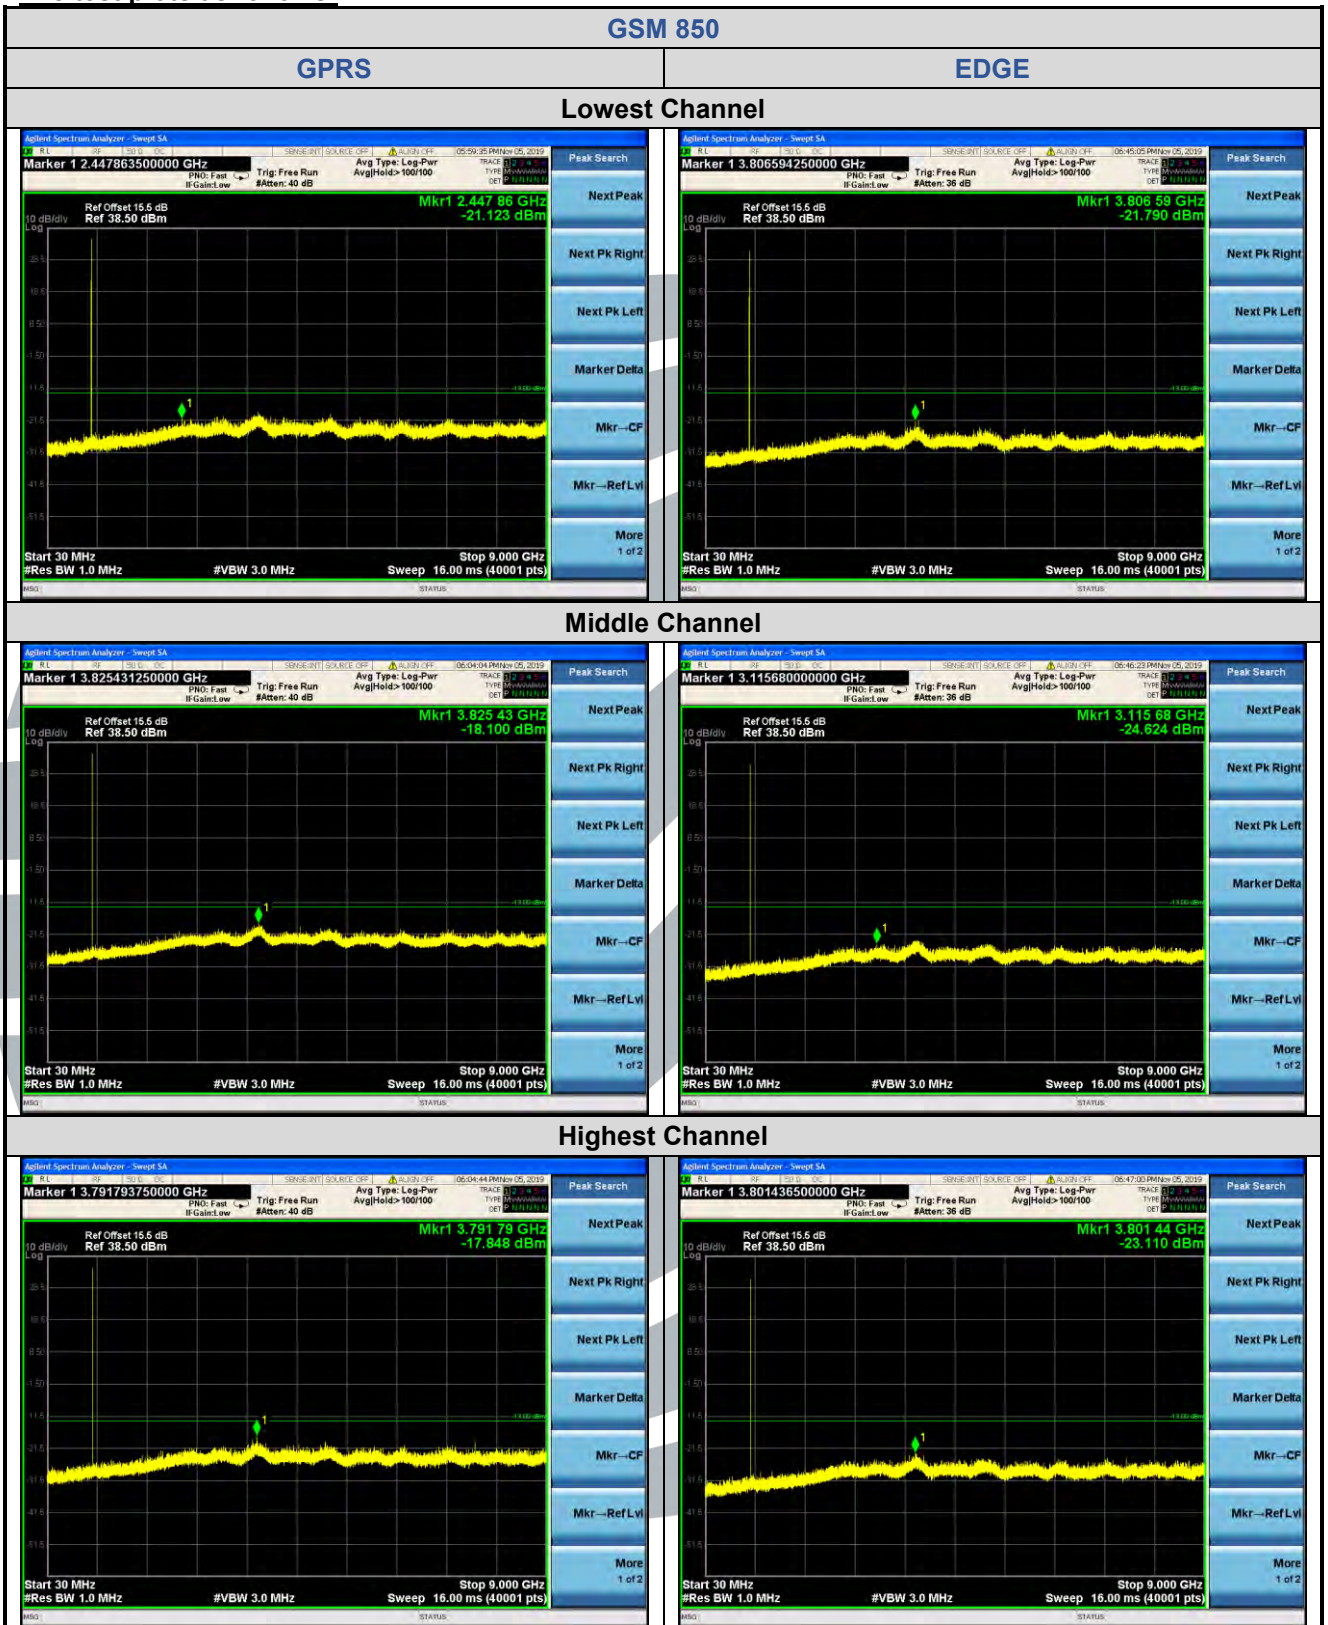

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

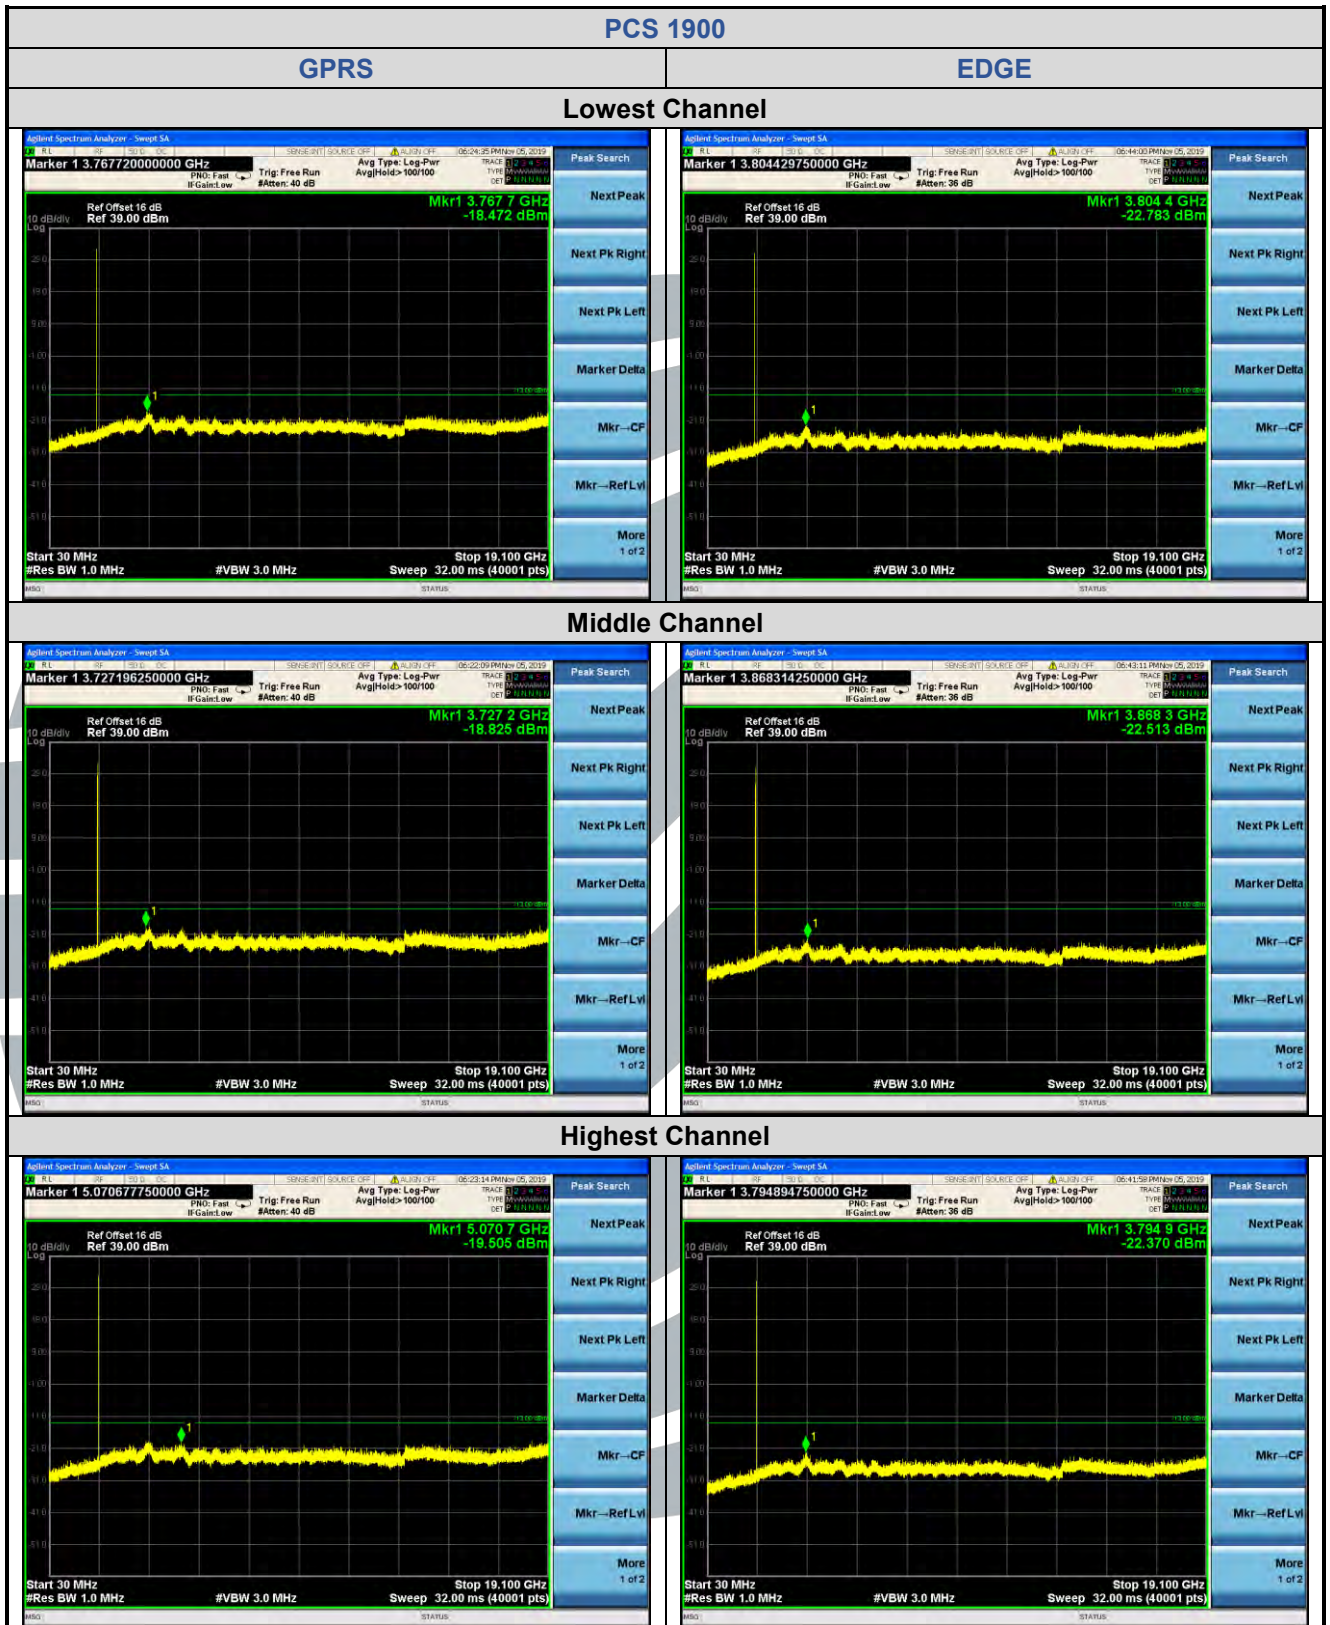

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

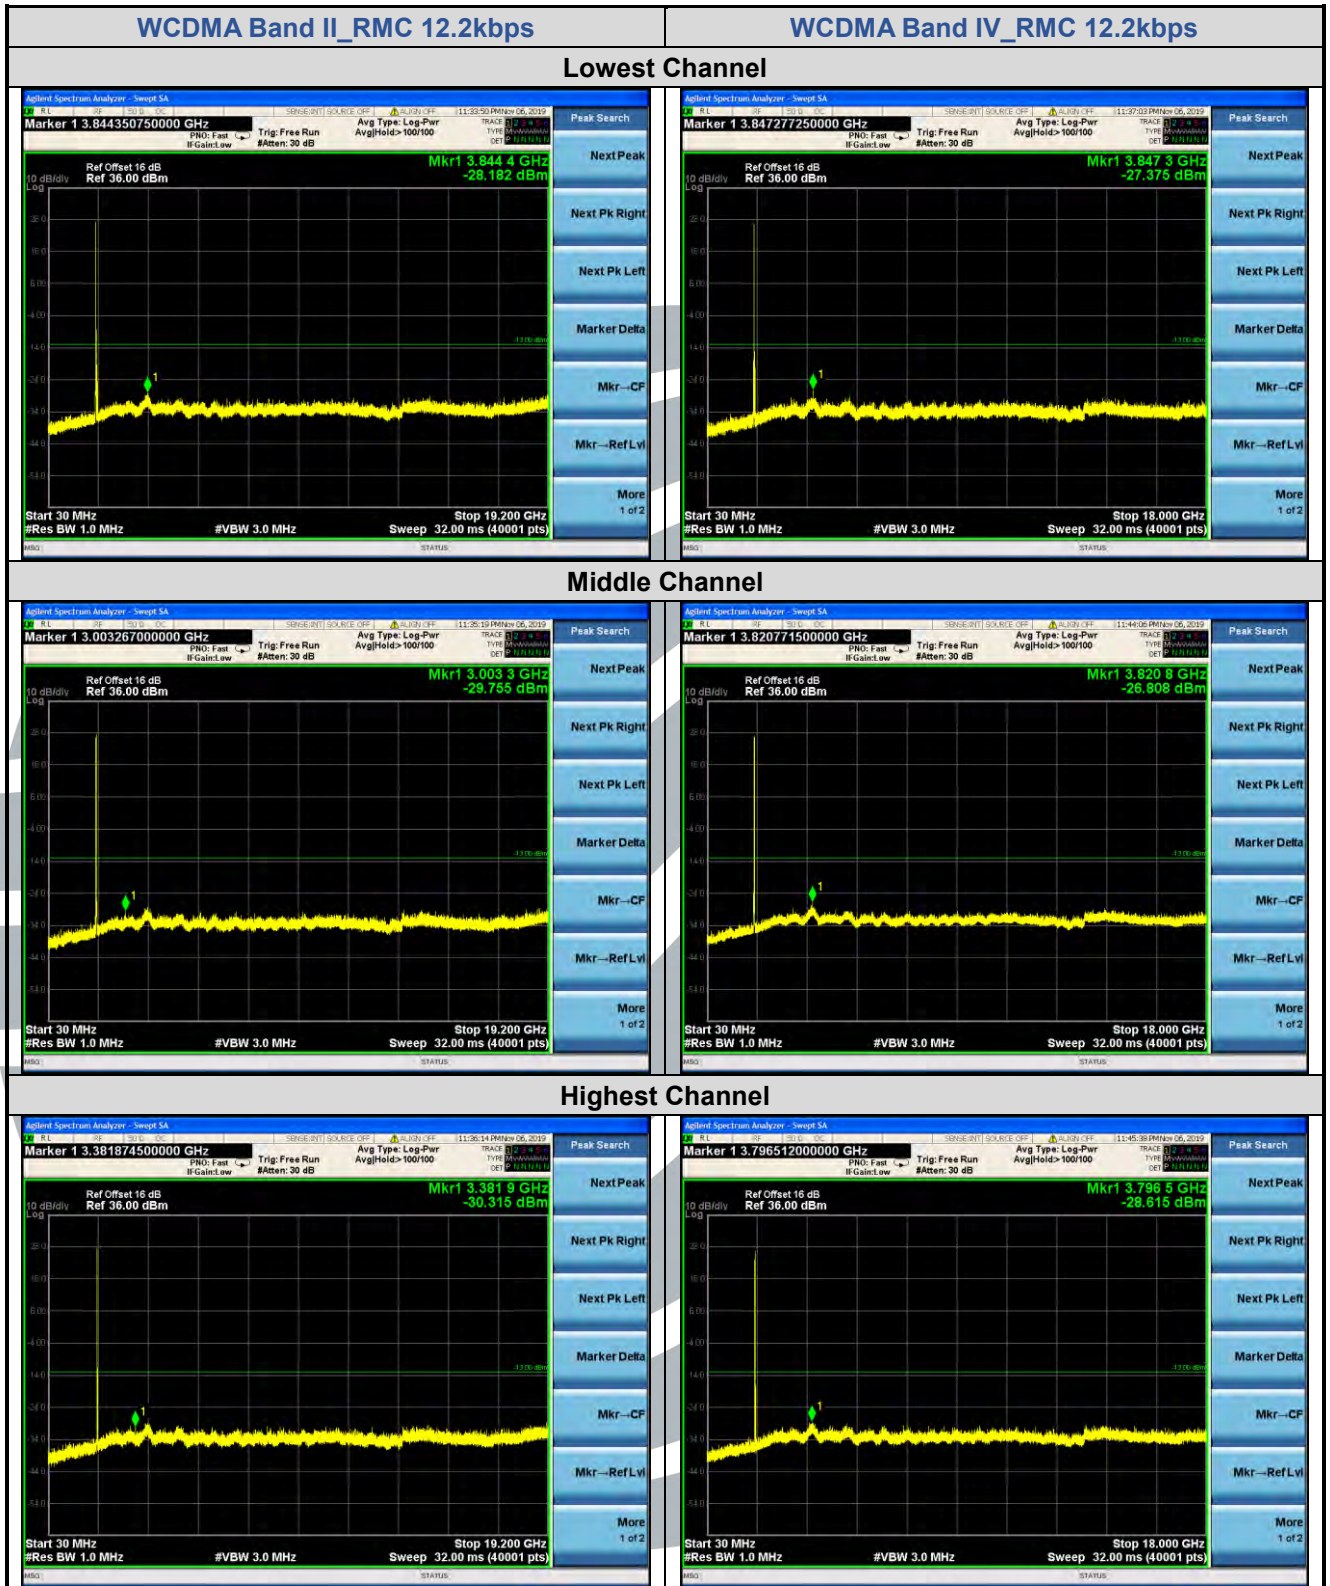

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

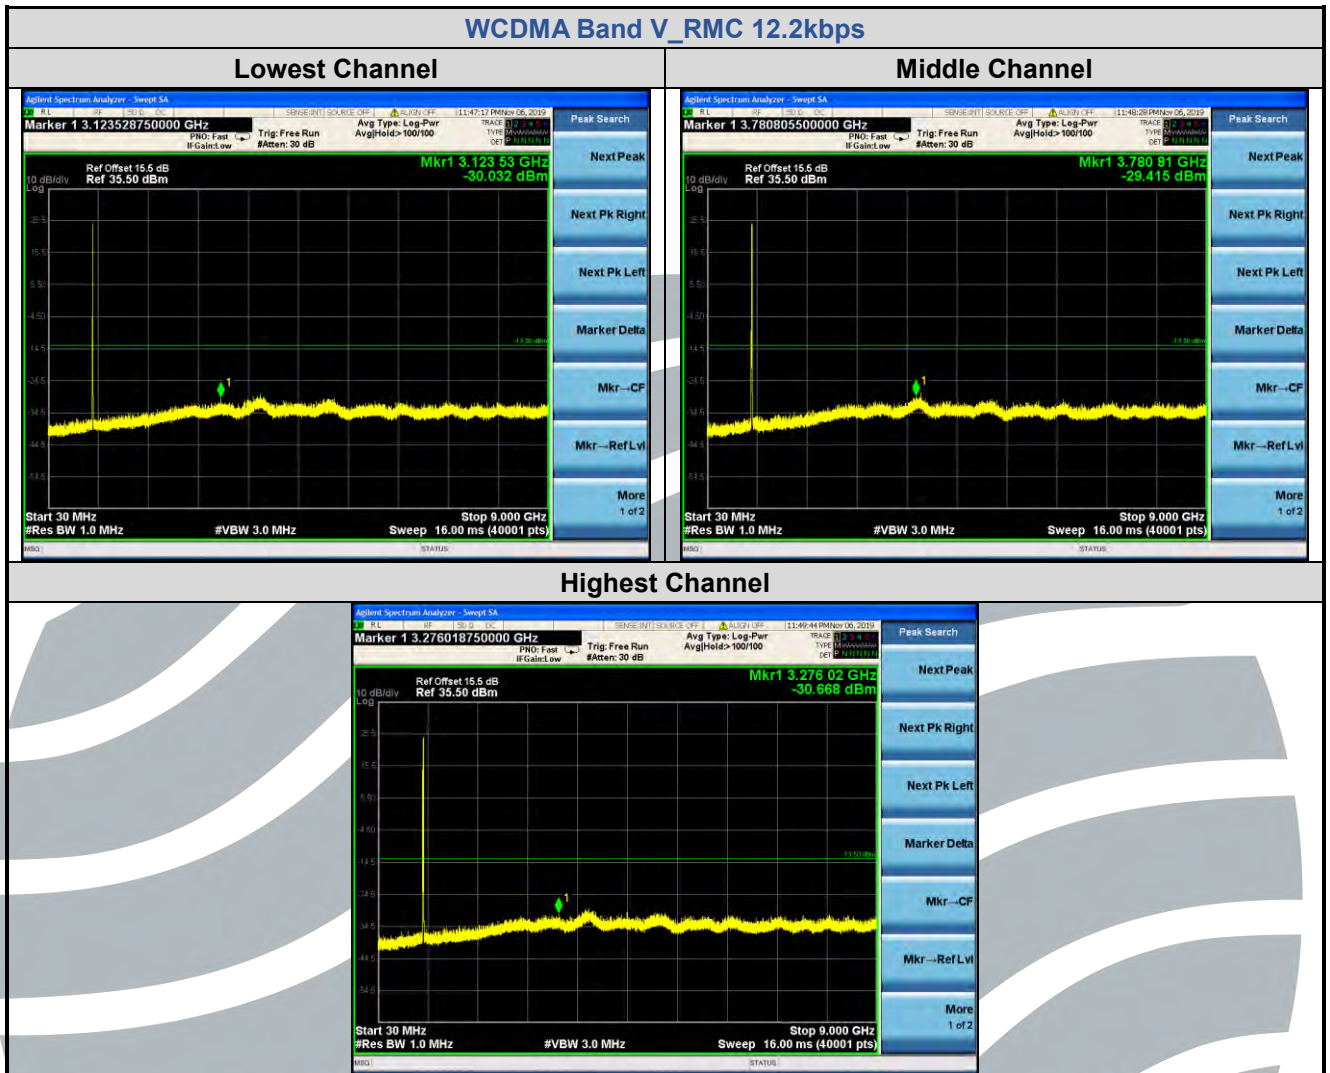

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

5.8 FIELD STRENGTH OF SPURIOUS RADIATION

Test Requirement: FCC 47 CFR Part 2.1053,
 FCC 47 CFR Part 22.917(a)(b),
 FCC 47 CFR Part 24.238(a)(b),
 FCC 47 CFR Part 27.53(h)(1)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01 Section 7

Limits:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB. The emission limit equal to -13 dBm.

Test Setup: Refer to section 4.2.1 for details.

Test Procedures: KDB 971168 D01v03r01 Section 7

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

5.8.1 Radiated Emission Test Data (30 MHz to 1 GHz)

GSM 850							
No.	Frequency (MHz)	SA Reading (Bm)	Correction factor (dB/m)	EIRP Result (dBm)	Limit (dBm)	Margin (dB)	Ant. Pol.
GSM _ Lowest Channel							
1	36.014	-76.52	30.01	-46.51	-13.00	-33.51	Horizontal
2	97.002	-72.68	26.45	-46.23	-13.00	-33.23	Horizontal
3	106.281	-71.96	26.35	-45.61	-13.00	-32.61	Horizontal
4	32.184	-79.24	32.91	-46.33	-13.00	-33.33	Vertical
5	36.781	-78.57	29.64	-48.93	-13.00	-35.93	Vertical
6	106.281	-72.22	26.35	-45.87	-13.00	-32.87	Vertical
GSM_ Middle Channel							
1	39.182	-75.31	28.47	-46.84	-13.00	-33.84	Horizontal
2	97.002	-73.15	26.45	-46.70	-13.00	-33.70	Horizontal
3	106.281	-72.16	26.35	-45.81	-13.00	-32.81	Horizontal
4	37.565	-76.41	29.26	-47.15	-13.00	-34.15	Vertical
5	97.002	-72.91	26.45	-46.46	-13.00	-33.46	Vertical
6	106.281	-72.01	26.35	-45.66	-13.00	-32.66	Vertical
GSM_ Highest Channel							
1	35.762	-78.11	30.17	-47.94	-13.00	-34.94	Horizontal
2	97.002	-72.98	26.45	-46.53	-13.00	-33.53	Horizontal
3	106.281	-72.22	26.35	-45.87	-13.00	-32.87	Horizontal
4	37.565	-78.11	29.26	-48.85	-13.00	-35.85	Vertical
5	97.002	-72.57	26.45	-46.12	-13.00	-33.12	Vertical
6	106.281	-72.14	26.35	-45.79	-13.00	-32.79	Vertical

PCS 1900							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
GSM_ Lowest Channel							
1	54.135	-71.92	-4.21	-76.13	-13.00	-63.13	Horizontal
2	97.002	-71.14	-2.26	-73.40	-13.00	-60.40	Horizontal
3	979.139	-82.93	16.01	-66.92	-13.00	-53.92	Horizontal
4	35.762	-72.63	1.33	-71.30	-13.00	-58.30	Vertical
5	97.002	-69.86	-2.26	-72.12	-13.00	-59.12	Vertical
6	958.714	-81.12	15.28	-65.84	-13.00	-52.84	Vertical
GSM_ Middle Channel							
1	35.762	-75.72	1.33	-74.39	-13.00	-61.39	Horizontal
2	97.002	-71.43	-2.26	-73.69	-13.00	-60.69	Horizontal
3	106.281	-70.90	-2.33	-73.23	-13.00	-60.23	Horizontal
4	31.735	-79.59	4.41	-75.18	-13.00	-62.18	Vertical
5	97.002	-70.97	-2.26	-73.23	-13.00	-60.23	Vertical
6	986.044	-83.09	16.43	-66.66	-13.00	-53.66	Vertical
GSM_ Highest Channel							
1	32.184	-78.33	4.06	-74.27	-13.00	-61.27	Horizontal
2	97.002	-71.44	-2.26	-73.70	-13.00	-60.70	Horizontal
3	965.474	-82.62	15.50	-67.12	-13.00	-54.12	Horizontal
4	35.762	-75.46	1.33	-74.13	-13.00	-61.13	Vertical
5	97.002	-70.38	-2.26	-72.64	-13.00	-59.64	Vertical
6	979.139	-82.31	16.01	-66.30	-13.00	-53.30	Vertical

WCDMA Band II							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
RMC 12.2kbps_ Lowest Channel							
1	30.425	-80.31	5.31	-75.00	-13.00	-62.00	Horizontal
2	97.002	-71.43	-2.26	-73.69	-13.00	-60.69	Horizontal
3	979.139	-81.87	16.01	-65.86	-13.00	-52.86	Horizontal
4	35.762	-74.59	1.33	-73.26	-13.00	-60.26	Vertical
5	97.002	-70.62	-2.26	-72.88	-13.00	-59.88	Vertical
6	992.997	-82.83	16.77	-66.06	-13.00	-53.06	Vertical
RMC 12.2kbps_ Middle Channel							
1	97.002	-71.51	-2.26	-73.77	-13.00	-60.77	Horizontal
2	106.281	-71.51	-2.33	-73.84	-13.00	-60.84	Horizontal
3	992.997	-83.23	16.77	-66.46	-13.00	-53.46	Horizontal
4	97.002	-70.49	-2.26	-72.75	-13.00	-59.75	Vertical
5	106.281	-72.23	-2.33	-74.56	-13.00	-61.56	Vertical
6	992.997	-83.20	16.77	-66.43	-13.00	-53.43	Vertical
RMC 12.2kbps_ Highest Channel							
1	97.002	-70.81	-2.26	-73.07	-13.00	-60.07	Horizontal
2	106.281	-71.56	-2.33	-73.89	-13.00	-60.89	Horizontal
3	972.283	-82.34	15.70	-66.64	-13.00	-53.64	Horizontal
4	97.002	-70.43	-2.26	-72.69	-13.00	-59.69	Vertical
5	106.281	-72.03	-2.33	-74.36	-13.00	-61.36	Vertical
6	1000.000	-83.44	17.01	-66.43	-13.00	-53.43	Vertical

WCDMA Band IV							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
RMC 12.2kbps_ Lowest Channel							
1	35.762	-73.66	1.33	-72.33	-13.00	-59.33	Horizontal
2	106.281	-71.17	-2.33	-73.50	-13.00	-60.50	Horizontal
3	992.997	-83.62	16.77	-66.85	-13.00	-53.85	Horizontal
4	97.002	-71.07	-2.26	-73.33	-13.00	-60.33	Vertical
5	106.281	-70.60	-2.33	-72.93	-13.00	-59.93	Vertical
6	979.139	-82.70	16.01	-66.69	-13.00	-53.69	Vertical
RMC 12.2kbps_ Middle Channel							
1	97.002	-71.69	-2.26	-73.95	-13.00	-60.95	Horizontal
2	106.281	-71.71	-2.33	-74.04	-13.00	-61.04	Horizontal
3	992.997	-82.64	16.77	-65.87	-13.00	-52.87	Horizontal
4	97.002	-71.05	-2.26	-73.31	-13.00	-60.31	Vertical
5	106.281	-71.95	-2.33	-74.28	-13.00	-61.28	Vertical
6	986.044	-82.85	16.43	-66.42	-13.00	-53.42	Vertical
RMC 12.2kbps_ Highest Channel							
1	35.762	-73.77	1.33	-72.44	-13.00	-59.44	Horizontal
2	106.281	-71.04	-2.33	-73.37	-13.00	-60.37	Horizontal
3	986.044	-82.48	16.43	-66.05	-13.00	-53.05	Horizontal
4	35.762	-73.38	1.33	-72.05	-13.00	-59.05	Vertical
5	97.002	-71.00	-2.26	-73.26	-13.00	-60.26	Vertical
6	952.000	-82.06	14.79	-67.27	-13.00	-54.27	Vertical

WCDMA Band V							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
RMC 12.2kbps_ Lowest Channel							
1	35.762	-75.03	30.17	-44.86	-13.00	-31.86	Horizontal
2	39.182	-73.65	28.47	-45.18	-13.00	-32.18	Horizontal
3	106.281	-71.08	26.35	-44.73	-13.00	-31.73	Horizontal
4	39.182	-76.82	28.47	-48.35	-13.00	-35.35	Vertical
5	97.002	-72.81	26.45	-46.36	-13.00	-33.36	Vertical
6	106.281	-72.79	26.35	-46.44	-13.00	-33.44	Vertical
RMC 12.2kbps_ Middle Channel							
1	35.762	-78.10	30.17	-47.93	-13.00	-34.93	Horizontal
2	97.002	-73.06	26.45	-46.61	-13.00	-33.61	Horizontal
3	106.281	-72.59	26.35	-46.24	-13.00	-33.24	Horizontal
4	32.184	-80.86	32.91	-47.95	-13.00	-34.95	Vertical
5	97.002	-73.27	26.45	-46.82	-13.00	-33.82	Vertical
6	106.281	-72.42	26.35	-46.07	-13.00	-33.07	Vertical
RMC 12.2kbps_ Highest Channel							
1	36.781	-76.20	29.64	-46.56	-13.00	-33.56	Horizontal
2	97.002	-73.39	26.45	-46.94	-13.00	-33.94	Horizontal
3	106.281	-72.59	26.35	-46.24	-13.00	-33.24	Horizontal
4	32.184	-80.84	32.91	-47.93	-13.00	-34.93	Vertical
5	95.649	-72.71	26.34	-46.37	-13.00	-33.37	Vertical
6	106.281	-72.43	26.35	-46.08	-13.00	-33.08	Vertical

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit

5.8.1 Radiated Emission Test Data (Above 1 GHz)

GSM 850							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(Bm)	(dB/m)	(dBm)	(dBm)	(dB)	
GSM_ Lowest Channel							
1	1648.400	-52.99	2.39	-50.60	-13.00	-37.60	Horizontal
2	2472.600	-63.35	9.16	-54.19	-13.00	-41.19	Horizontal
3	1648.400	-51.83	4.03	-47.80	-13.00	-34.80	Vertical
4	2472.600	-63.21	11.49	-51.72	-13.00	-38.72	Vertical
GSM_ Middle Channel							
1	1673.200	-43.26	2.59	-40.67	-13.00	-27.67	Horizontal
2	2509.800	-53.08	9.17	-43.91	-13.00	-30.91	Horizontal
3	1673.200	-44.58	4.31	-40.27	-13.00	-27.27	Vertical
4	2509.800	-55.30	11.46	-43.84	-13.00	-30.84	Vertical
GSM_ Highest Channel							
1	1697.600	-46.66	2.78	-43.88	-13.00	-30.88	Horizontal
2	2546.400	-60.02	9.22	-50.80	-13.00	-37.80	Horizontal
3	1697.600	-45.91	4.59	-41.32	-13.00	-28.32	Vertical
4	2546.400	-56.00	11.45	-44.55	-13.00	-31.55	Vertical

PCS 1900							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
GSM_ Lowest Channel							
1	5550.600	-49.95	16.02	-33.93	-13.00	-20.93	Horizontal
2	9251.000	-60.41	20.92	-39.49	-13.00	-26.49	Horizontal
3	5550.600	-58.10	16.91	-41.19	-13.00	-28.19	Vertical
4	9251.000	-65.51	19.82	-45.69	-13.00	-32.69	Vertical
GSM_ Middle Channel							
1	3760.000	-70.32	13.87	-56.45	-13.00	-43.45	Horizontal
2	5640.000	-54.14	16.10	-38.04	-13.00	-25.04	Horizontal
3	3760.000	-64.23	15.28	-48.95	-13.00	-35.95	Vertical
4	5640.000	-60.36	16.97	-43.39	-13.00	-30.39	Vertical
GSM_ Highest Channel							
1	3819.600	-65.78	13.98	-51.80	-13.00	-38.80	Horizontal
2	5729.400	-51.90	16.37	-35.53	-13.00	-22.53	Horizontal
3	3819.600	-63.60	15.44	-48.16	-13.00	-35.16	Vertical
4	5729.400	-57.96	17.23	-40.73	-13.00	-27.73	Vertical

WCDMA Band II							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
RMC 12.2kbps_ Lowest Channel							
1	3704.800	-74.77	13.78	-60.99	-13.00	-47.99	Horizontal
2	5557.200	-70.28	16.01	-54.27	-13.00	-41.27	Horizontal
3	3704.800	-73.05	15.14	-57.91	-13.00	-44.91	Vertical
4	5557.200	-68.85	16.90	-51.95	-13.00	-38.95	Vertical
RMC 12.2kbps_ Middle Channel							
1	3760.000	-73.74	13.87	-59.87	-13.00	-46.87	Horizontal
2	5640.000	-69.55	16.10	-53.45	-13.00	-40.45	Horizontal
3	3760.000	-70.60	15.28	-55.32	-13.00	-42.32	Vertical
4	5640.000	-69.91	16.97	-52.94	-13.00	-39.94	Vertical
RMC 12.2kbps_ Highest Channel							
1	3815.200	-73.32	13.97	-59.35	-13.00	-46.35	Horizontal
2	5722.800	-69.97	16.35	-53.62	-13.00	-40.62	Horizontal
3	3815.200	-71.93	15.43	-56.50	-13.00	-43.50	Vertical
4	5722.800	-69.24	17.21	-52.03	-13.00	-39.03	Vertical

WCDMA Band IV							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
RMC 12.2kbps_ Lowest Channel							
1	3424.800	-75.08	12.45	-62.63	-13.00	-49.63	Horizontal
2	5137.200	-70.31	16.11	-54.20	-13.00	-41.20	Horizontal
3	3424.800	-76.02	13.70	-62.32	-13.00	-49.32	Vertical
4	5137.200	-70.27	17.08	-53.19	-13.00	-40.19	Vertical
RMC 12.2kbps_ Middle Channel							
1	3464.800	-75.95	12.74	-63.21	-13.00	-50.21	Horizontal
2	5197.200	-70.57	16.21	-54.36	-13.00	-41.36	Horizontal
3	3464.800	-75.14	13.97	-61.17	-13.00	-48.17	Vertical
4	5197.200	-72.62	17.17	-55.45	-13.00	-42.45	Vertical
RMC 12.2kbps_ Highest Channel							
1	3505.200	-75.12	13.03	-62.09	-13.00	-49.09	Horizontal
2	5257.800	-70.33	16.20	-54.13	-13.00	-41.13	Horizontal
3	3505.200	-75.31	14.24	-61.07	-13.00	-48.07	Vertical
4	5257.800	-70.88	17.15	-53.73	-13.00	-40.73	Vertical

WCDMA Band V							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
RMC 12.2kbps_ Lowest Channel							
1	1652.800	-68.81	2.43	-66.38	-13.00	-53.38	Horizontal
2	2479.200	-75.08	9.16	-65.92	-13.00	-52.92	Horizontal
3	1652.800	-70.85	4.08	-66.77	-13.00	-53.77	Vertical
4	2479.200	-76.31	11.48	-64.83	-13.00	-51.83	Vertical
RMC 12.2kbps_ Middle Channel							
1	1672.800	-71.07	2.59	-68.48	-13.00	-55.48	Horizontal
2	2509.200	-75.62	9.17	-66.45	-13.00	-53.45	Horizontal
3	1672.800	-69.82	4.31	-65.51	-13.00	-52.51	Vertical
4	2509.200	-67.31	11.46	-55.85	-13.00	-42.85	Vertical
RMC 12.2kbps_ Highest Channel							
1	1693.200	-71.02	2.75	-68.27	-13.00	-55.27	Horizontal
2	2539.800	-75.84	9.22	-66.62	-13.00	-53.62	Horizontal
3	1693.200	-70.47	4.54	-65.93	-13.00	-52.93	Vertical
4	2539.800	-76.76	11.45	-65.31	-13.00	-52.31	Vertical

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limi

5.9 FREQUENCY STABILITY

Test Requirement: FCC 47 CFR Part 2.1055 &
 FCC 47 CFR Part 22.355 &
 FCC 47 CFR Part 24.235 &
 FCC 47 CFR Part 27.54

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limits:

FCC 47 CFR Part 22.355,

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

FCC 47 CFR Part 24.235, FCC 47 CFR Part 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Setup: Refer to section 4.2.2 for details.

Test Procedures:

- 1) Use CMW 500 with Frequency Error measurement capability.
 - a) Temp. = -30° to $+ 50^{\circ}\text{C}$
 - b) Voltage = low voltage, 3.45 Vdc, Normal, 3.85 Vdc and High voltage, 4.4 Vdc.

2) Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

3) Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

Equipment Used: Refer to section 3 for details.

Test Result: Pass

Modulation	Channel/ Frequency (MHz)	Voltage (Vdc)	Temperature ($^{\circ}\text{C}$)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850							
GSM	190 / 836.6	VL	TN	7	0.0084	± 2.5	Pass
		VN		14	0.0167	± 2.5	Pass
		VH		10	0.0120	± 2.5	Pass
		VN	50	7	0.0084	± 2.5	Pass
			40	-14	-0.0167	± 2.5	Pass
			30	2	0.0024	± 2.5	Pass
			20	18	0.0215	± 2.5	Pass
			10	-12	-0.0143	± 2.5	Pass
			0	10	0.0120	± 2.5	Pass
			-10	8	0.0096	± 2.5	Pass
			-20	-5	-0.0060	± 2.5	Pass
			-30	7	0.0084	± 2.5	Pass

Modulation	Channel/ Frequency (MHz)	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM	661 / 1880.0	VL	TN	-13	-0.0069	N/A	Pass
		VN		12	0.0064		Pass
		VH		15	0.0080		Pass
		VN	50	2	0.0011		Pass
			40	-5	-0.0027		Pass
			30	-13	-0.0069		Pass
			20	-14	-0.0074		Pass
			10	6	0.0032		Pass
			0	-15	-0.0080		Pass
			-10	6	0.0032		Pass
			-20	-3	-0.0016		Pass
			-30	-18	-0.0096		Pass

Modulation	Channel/ Frequency (MHz)	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
RMC 12.2kbps	9400 / 1880.0	VL	TN	-18	-0.0096	N/A	Pass
		VN		13	0.0069		Pass
		VH		-11	-0.0059		Pass
		VN	50	17	0.0090		Pass
			40	7	0.0037		Pass
			30	-4	-0.0021		Pass
			20	-17	-0.0090		Pass
			10	-16	-0.0085		Pass
			0	9	0.0048		Pass
			-10	18	0.0096		Pass
			-20	10	0.0053		Pass
			-30	20	0.0106		Pass

Modulation	Channel/ Frequency (MHz)	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
RMC 12.2kbps	1412 / 1732.4	VL	TN	-7	-0.0040	N/A	Pass
		VN		6	0.0035		Pass
		VH		-7	-0.0040		Pass
		VN	50	13	0.0075		Pass
			40	-7	-0.0040		Pass
			30	9	0.0052		Pass
			20	-16	-0.0092		Pass
			10	-20	-0.0115		Pass
			0	17	0.0098		Pass
			-10	-12	-0.0069		Pass
			-20	-6	-0.0035		Pass
			-30	-8	-0.0046		Pass

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

Modulation	Channel/ Frequency (MHz)	Voltage	Temperature	Deviation	Deviation	Limit	Result
		(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
WCDMA Band V							
RMC 12.2kbps	4182 / 836.4	VL	TN	10	0.0120	± 2.5	Pass
		VN		-5	-0.0060	± 2.5	Pass
		VH		-19	-0.0227	± 2.5	Pass
		VN	50	9	0.0108	± 2.5	Pass
			40	-9	-0.0108	± 2.5	Pass
			30	11	0.0132	± 2.5	Pass
			20	19	0.0227	± 2.5	Pass
			10	-17	-0.0203	± 2.5	Pass
			0	6	0.0072	± 2.5	Pass
			-10	-4	-0.0048	± 2.5	Pass
			-20	9	0.0108	± 2.5	Pass
			-30	9	0.0108	± 2.5	Pass

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.0

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
