

FCC RF Test Report


APPLICANT : CT Asia
EQUIPMENT : Mobile phone
BRAND NAME : BLU
MODEL NAME : BLU WIN HD LTE X150Q
FCC ID : YHLBLUWINHDLTE
STANDARD : 47 CFR Part 2, 27(L), 27(M), 27(H)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jan. 15, 2015 and completely tested on Mar. 17, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China



TABLE OF CONTENTS

REVISION HISTORY.....	4
SUMMARY OF TEST RESULT	5
1 GENERAL DESCRIPTION	6
1.1 Applicant.....	6
1.2 Manufacturer.....	6
1.3 Product Feature of Equipment Under Test.....	6
1.4 Product Specification subjective to this standard	6
1.5 Modification of EUT	7
1.6 Maximum Emission Designator, Frequency Tolerance, and ERP/EIRP Power	7
1.7 Testing Location	8
1.8 Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System.....	11
2.3 Support Unit used in test configuration and system	12
2.4 Measurement Results Explanation Example.....	12
3 CONDUCTED TEST ITEMS	13
3.1 Measuring Instruments	13
3.2 Test Setup	13
3.3 Test Result of Conducted Test	13
3.4 Conducted Output Power	14
3.5 Peak-to-Average Ratio	15
3.6 Effective Radiated Power and Effective Isotropic Radiated Power.....	16
3.7 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	18
3.8 Conducted Band Edge	19
3.9 Conducted Spurious Emission	21
3.10 Frequency Stability	22
4 RADIATED TEST ITEMS	23
4.1 Measuring Instruments	23
4.2 Test Result of Radiated Test	23
4.3 Radiated Spurious Emission	24
5 LIST OF MEASURING EQUIPMENT	26
6 UNCERTAINTY OF EVALUATION	27



APPENDIX A. TEST RESULTS OF CONDUCTED TEST

APPENDIX B. TEST RESULTS OF RADIATED TEST

APPENDIX C. TEST SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG511501B	Rev. 01	Initial issue of report	Mar. 19, 2015

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§27.50(c)(10)	Effective Radiated Power (Band 17)	ERP < 3 Watt	PASS	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 7)	EIRP < 2Watt		-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt		-
3.7	§2.1049 §27.53(h)(3) §27.53(m)(6)	99% Occupied Bandwidth and 26dB Bandwidth	Reporting Only	PASS	-
3.8	§2.1051 §27.53(g)	Conducted Band Edge Measurement (Band 4)(Band 17)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Band Edge Measurement (Band 7)	< 5MHz: -10 dBm 5 MHz~6MHz or 26dB(BW): -13 dBm ≥6MHz or 26dB(BW): -25 dBm	PASS	-
3.9	§2.1051 §27.53(g)	Conducted Spurious Emission (Band 4)(Band 17)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1053 §27.53(m)(4)	Conducted Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])		
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	
4.3	§2.1053 §27.53(g) §27.53(h)	Radiated Spurious Emission (Band 4) (Band 17)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 18.43 dB at 10104.360 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])		

1 General Description

1.1 Applicant

CT Asia

Unit 01, 15/F, Seaview Centre, 139-141 Hoi bun road, Kwun Tong, Kowloon, Hongkong

1.2 Manufacturer

Shanghai Huaqin telecom technology co., ltd

Building 1, NO.399, Keyuan Road, Zhangjiang Hi-tech Park, Pudong New District, Shanghai

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile phone
Brand Name	BLU
Model Name	BLU WIN HD LTE X150Q
FCC ID	YHLBLUWINHDLTE
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(Downlink Only)/LTE WLAN2.4GHz 802.11b/g/n HT20 Bluetooth v3.0+EDR Bluetooth v4.0 LE
HW Version	QL850B_Mg76c
SW Version	00150.04717.20001.15008
EUT Stage	Pre-Production

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz
Rx Frequency	LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz
Bandwidth	LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 7 : 5MHz/ 10MHz / 15MHz / 20MHz LTE Band 17 : 5MHz / 10MHz
Maximum Output Power to Antenna	LTE Band 4 : 22.49 dBm LTE Band 7 : 21.61 dBm LTE Band 17 : 23.01 dBm
Type of Modulation	QPSK / 16QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum Emission Designator, Frequency Tolerance, and ERP/EIRP Power

LTE Band 4	QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1M10G7D	-	0.3266	1M10W7D	-	0.3373
3	2M73G7D	-	0.3289	2M73W7D	-	0.3141
5	4M51G7D	-	0.2884	4M50W7D	-	0.2799
10	9M07G7D	0.0059	0.3475	9M05W7D	-	0.3296
15	13M5G7D	-	0.3243	13M5W7D	-	0.3540
20	18M5G7D	-	0.3451	18M5W7D	-	0.3373
LTE Band 7	QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	4M51G7D	-	0.1076	4M50W7D	-	0.0991
10	9M11G7D	0.0047	0.1040	9M05W7D	-	0.1000
15	13M5G7D	-	0.1064	13M5W7D	-	0.1050
20	18M5G7D	-	0.1035	18M6W7D	-	0.1086
LTE Band 17	QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
5	4M51G7D	-	0.0755	4M51W7D	-	0.0764
10	9M05G7D	0.0047	0.0782	9M01W7D	-	0.0766

1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	1F & 2F,Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	
	TH01-SZ	OTA02-SZ

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
Test Site No.	Sporton Site No.	FCC Registration No.
	03CH02-SZ	831040

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 27(L), 27(M), 27(H)
- ANSI / TIA / EIA-603-C-2004
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	7	-	-	v	v	v	v	v	v	v	v	v	v	v	v
	17	-	-	v	v	-	-	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	4						v	v	v	v		v	v	v	v
	7	-	-				v	v	v	v		v	v	v	v
	17	-	-		v	-	-	v	v	v		v	v	v	v
26dB and 99% Bandwidth	4	v	v	v	v	v	v	v	v			v	v	v	v
	7	-	-	v	v	v	v	v	v			v	v	v	v
	17	-	-	v	v	-	-	v	v			v	v	v	v
Conducted Band Edge	4	v	v	v	v	v	v	v	v	v		v	v		v
	7	-	-	v	v	v	v	v	v	v		v	v		v
	17	-	-	v	v	-	-	v	v	v		v	v		v



Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	4	v	v	v	v	v	v	v	v	v			v	v	v
	7	-	-	v	v	v	v	v	v	v			v	v	v
	17	-	-	v	v	-	-	v	v	v			v	v	v
Frequency Stability	4				v			v				v		v	
	7	-	-		v			v				v		v	
	17	-	-		v	-	-	v				v		v	
E.R.P/ E.I.R.P.	4	v	v	v	v	v	v	v	v	v	v		v	v	v
	7	-	-	v	v	v	v	v	v	v			v	v	v
	17	-	-	v	v	-	-	v	v	v			v	v	v
Radiated Spurious Emission	4	v	v	v	v	v	v	v		v				v	
	7	-	-	v	v	v	v	v		v				v	
	17	-	-	v	v	-	-	v		v				v	
Note	<p>1. The mark “v ” means that this configuration is chosen for testing</p> <p>2. The mark “-” means that this bandwidth is not supported.</p> <p>3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</p>														

2.2 Connection Diagram of Test System

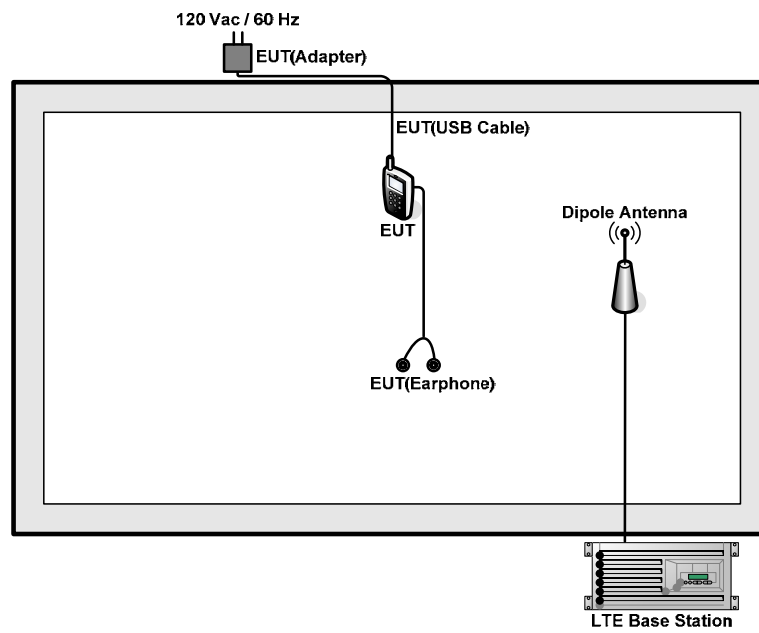

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	TOPWORD	3303DR	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5 + 10 = 15 \text{ (dB)}\end{aligned}$$

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

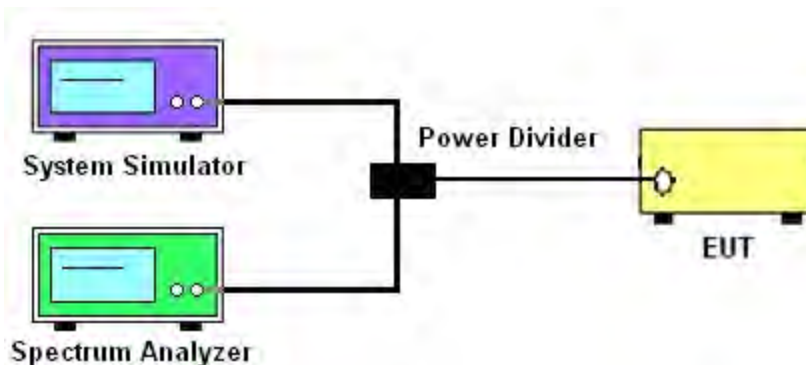

3.2.3 Frequency Stability

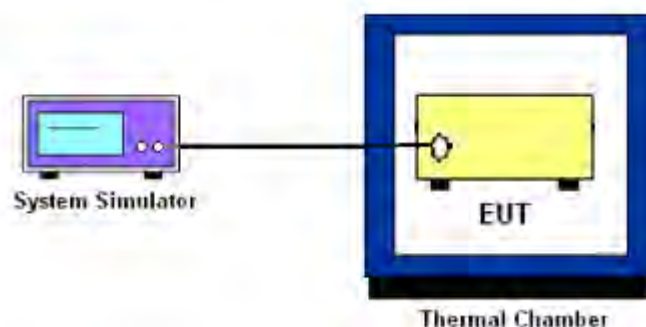

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Effective Radiated Power and Effective Isotropic Radiated Power

3.6.1 Description of the ERP/EIRP Measurement

Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-C-2004, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. Mobile and portable (hand-held) stations operating are limited to average ERP of 3 watts with LTE band 17.

Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-C-2004, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. Mobile and portable (hand-held) stations operating are limited to average EIRP of 2 watts with LTE band 7 and 1 watt with LTE band 4.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.



	LTE					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	3MHz	6MHz	10MHz	20MHz	30MHz	40MHz
RBW	30kHz	100kHz	100kHz	300kHz	300kHz	300kHz
VBW	100kHz	300kHz	300kHz	1MHz	1MHz	1MHz
Detector	RMS	RMS	RMS	RMS	RMS	RMS
Trace	Average	Average	Average	Average	Average	Average
Average Type	Power	Power	Power	Power	Power	Power
Sweep Count	100	100	100	100	100	100

3.7 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.7.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.

3.8 Conducted Band Edge

3.8.1 Description of Conducted Band Edge Measurement

27.53 (g) for Band 17

For operations in the 698 -746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53 (h) for Band 4

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4) for Band 7:

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.

3.9 Conducted Spurious Emission

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.
9. For Band 7
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25\text{dBm}$.

3.10 Frequency Stability

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.10.2 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation


1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

4 Radiated Test Items


4.1 Measuring Instruments

See list of measuring instruments of this test report.

4.1.1 For radiated test from 30MHz to 1GHz

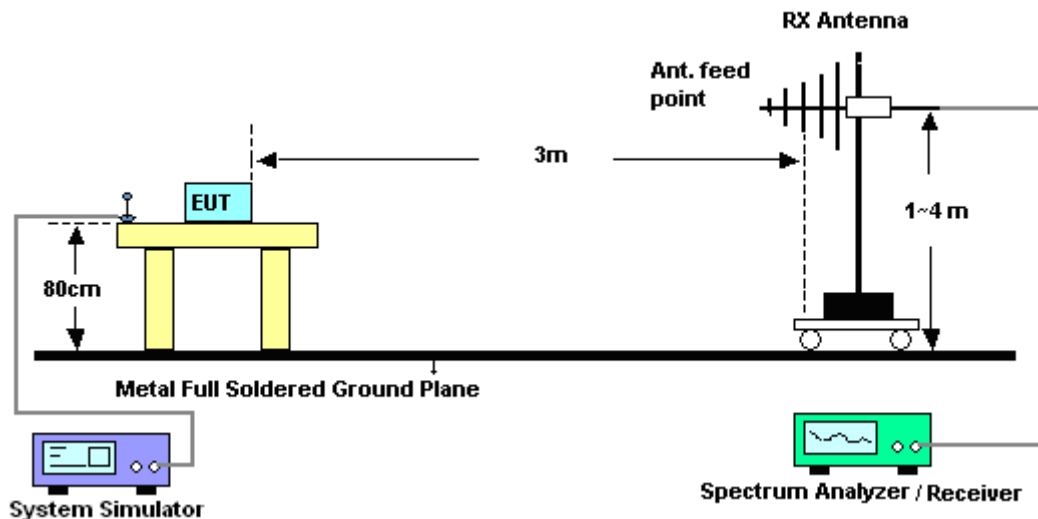

4.1.2 For radiated test above 1GHz

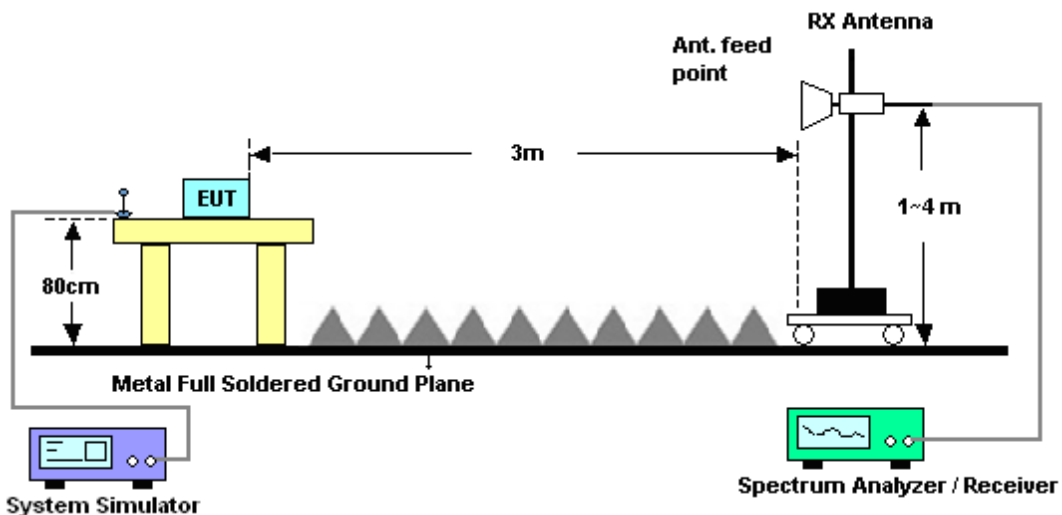

4.2 Test Result of Radiated Test

Please refer to Appendix B.



4.3 Radiated Spurious Emission

4.3.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

For LTE Band 17

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.3.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$

For Band 7:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [55 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [55 + 10\log(P)] \text{ (dB)}$$

$$= -25\text{dBm}.$$

12. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
13. ERP (dBm) = EIRP - 2.15



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	May 08, 2014	Jan. 28, 2015~ Mar. 17, 2015	May 07, 2015	Conducted (TH01-SZ)
Thermal Chamber	Hongzhangroup	LP-150U	HD20120425	-40℃~150℃	Jan. 28, 2015	Jan. 28, 2015~ Mar. 17, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
EMI TEST Receiver	R&S	ESC17	100768	9kHz~3GHz	May 04, 2014	Feb. 28, 2015~ Mar. 06, 2015	May 03, 2015	Radiation (03CH02-SZ)
Spectrum Analyzer	Agilent	N9038A	MY52260185	20Hz~26.5GHz	May 26, 2014	Feb. 28, 2015~ Mar. 06, 2015	May 25, 2015	Radiation (03CH02-SZ)
Bilog Antenna	TESEQ	CBL 6112D	37877	30MHz~2GHz	Oct. 15, 2014	Feb. 28, 2015~ Mar. 06, 2015	Oct. 14, 2015	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA	9120D-1285	1GHz~18GHz	Jan. 20, 2015	Feb. 28, 2015~ Mar. 06, 2015	Jan. 19, 2016	Radiation (03CH02-SZ)
Double Ridged Horn Antenna	COM-POWER	AH-840	101071	18GHz~40GHz	Sep. 04, 2014	Feb. 28, 2015~ Mar. 06, 2015	Sep. 03, 2015	Radiation (03CH02-SZ)
Amplifier	com-power	PA-103A	161069	1~1000MHz	May 04, 2014	Feb. 28, 2015~ Mar. 06, 2015	May 03, 2015	Radiation (03CH02-SZ)
Amplifier	Agilent	8449B	3008A01023	1GHz~26.5GHz	Oct. 29, 2014	Feb. 28, 2015~ Mar. 06, 2015	Oct. 28, 2015	Radiation (03CH02-SZ)
AC Source(AVR)	CHROMA	61601ACSO	616010002470	100Vac~240Vac	NCR	Feb. 28, 2015~ Mar. 06, 2015	NCR	Radiation (03CH02-SZ)
Turn Table	Qiangdian	3000	N/A	0~360 degree	NCR	Feb. 28, 2015~ Mar. 06, 2015	NCR	Radiation (03CH02-SZ)
Antenna Mast	Qiangdian	3000	N/A	1 m~4 m	NCR	Feb. 28, 2015~ Mar. 06, 2015	NCR	Radiation (03CH02-SZ)
Spectrum Analyzer	R&S	FSP 7	100818	9kHz~7GHz	Jul. 17, 2014	Jan. 28, 2015~ Jan. 29, 2015	Jul. 16, 2015	ERP/EIRP (OTA02-SZ)
Quad-Ridged Horn	ETS-Lindgren	3164-08	00102954	700MHz~10000MHz	N/A	Jan. 28, 2015~ Jan. 29, 2015	N/A	ERP/EIRP (OTA02-SZ)
Multi-Devices Controller	ETS-Lindgren	2090-OPT1	00108147	N/A	N/A	Jan. 28, 2015~ Jan. 29, 2015	N/A	ERP/EIRP (OTA02-SZ)
Switch Control Mainframe	Agilent	3499A	MY42005451	N/A	N/A	Jan. 28, 2015~ Jan. 29, 2015	N/A	ERP/EIRP (OTA02-SZ)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.5 dB
---	--------



Appendix A. Test Results of Conducted Test

LTE Band 4

Conducted Output Power(Average power)

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	21.79	22.08	22.08
1.4	1	2		22.02	22.27	22.06
1.4	1	5		21.79	22.04	21.89
1.4	3	0		21.96	22.19	21.96
1.4	3	1		22.01	22.21	22.16
1.4	3	2		22.05	22.21	22.03
1.4	6	0		21.00	21.30	20.99
1.4	1	0	16-QAM	21.34	21.43	20.67
1.4	1	2		21.40	21.46	20.88
1.4	1	5		21.34	21.86	20.61
1.4	3	0		21.52	21.82	21.09
1.4	3	1		21.65	21.83	21.26
1.4	3	2		21.74	21.90	21.02
1.4	6	0		19.89	20.02	19.73
3	1	0	QPSK	22.05	22.04	21.84
3	1	7		21.94	22.40	21.89
3	1	14		21.88	22.08	21.79
3	8	0		20.92	21.13	21.03
3	8	4		20.90	21.03	20.95
3	8	7		21.01	21.07	20.87
3	15	0		20.90	21.13	20.99
3	1	0	16-QAM	21.40	21.64	21.81
3	1	7		21.33	21.77	21.98
3	1	14		21.30	21.40	21.68
3	8	0		19.94	20.09	20.10
3	8	4		19.94	20.21	20.03
3	8	7		20.12	20.38	20.10



3	15	0		20.11	20.38	19.94
---	----	---	--	-------	-------	-------

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.77	22.06	22.22
5	1	12		21.99	22.32	21.97
5	1	24		21.79	22.08	21.80
5	12	0		20.84	21.17	21.05
5	12	6		20.96	21.10	20.96
5	12	11		20.97	21.12	20.97
5	25	0		20.97	21.15	20.91
5	1	0	16-QAM	21.04	22.01	21.52
5	1	12		21.13	22.28	21.45
5	1	24		21.10	21.32	20.80
5	12	0		20.04	20.13	20.02
5	12	6		20.05	20.14	19.77
5	12	11		19.96	20.07	19.88
5	25	0		19.87	20.01	19.80
10	1	0	QPSK	22.20	22.33	22.19
10	1	24		22.34	22.34	22.30
10	1	49		22.30	22.32	21.91
10	25	0		21.01	21.25	21.18
10	25	12		20.97	21.17	21.09
10	25	24		21.05	21.16	20.98
10	50	0		21.08	21.26	21.07
10	1	0	16-QAM	20.99	21.45	21.63
10	1	24		21.41	21.49	22.06
10	1	49		21.23	21.40	21.80
10	25	0		20.14	20.16	20.26
10	25	12		20.00	20.17	20.04
10	25	24		19.98	20.05	19.71
10	50	0		20.08	20.17	19.87



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.09	22.24	22.38
15	1	37		22.35	22.12	22.23
15	1	74		22.04	22.07	22.13
15	36	0		21.09	21.26	21.18
15	36	18		21.07	21.18	21.16
15	36	37		20.95	21.14	21.10
15	75	0		20.91	21.19	21.13
15	1	0	16-QAM	20.96	21.76	21.26
15	1	37		21.02	21.30	20.94
15	1	74		20.98	21.64	21.03
15	36	0		20.08	20.25	20.22
15	36	18		20.04	20.22	20.17
15	36	37		19.92	20.18	20.02
15	75	0		19.88	20.17	19.96
20	1	0	QPSK	22.24	22.38	22.47
20	1	49		22.39	22.42	22.49
20	1	99		22.18	22.26	22.18
20	50	0		21.10	21.32	21.38
20	50	24		21.03	21.20	21.19
20	50	49		21.04	21.14	21.23
20	100	0		21.07	21.26	21.28
20	1	0	16-QAM	21.69	21.27	21.37
20	1	49		21.87	21.30	21.51
20	1	99		21.46	21.03	21.30
20	50	0		20.27	20.28	20.39
20	50	24		20.11	20.26	20.21
20	50	49		20.15	20.20	20.13
20	100	0		20.04	20.18	20.20


**Peak-to-Average Ratio**

Mode	LTE Band 4 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	RB Size	Result
Lowest CH	4.17	4.55	4.87	5.57	PASS
Middle CH	4.12	4.58	4.87	5.48	
Highest CH	3.88	4.67	5.13	5.65	




LTE Band 4 / 20MHz / QPSK

Lowest Channel / 1RB

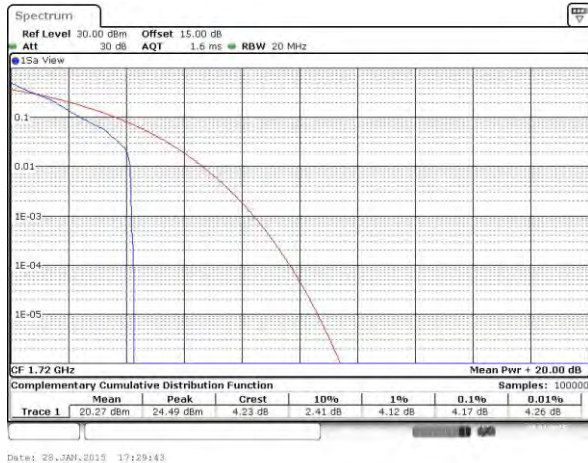


Date: 28-JAN-2015 17:29:43

Lowest Channel / Full RB

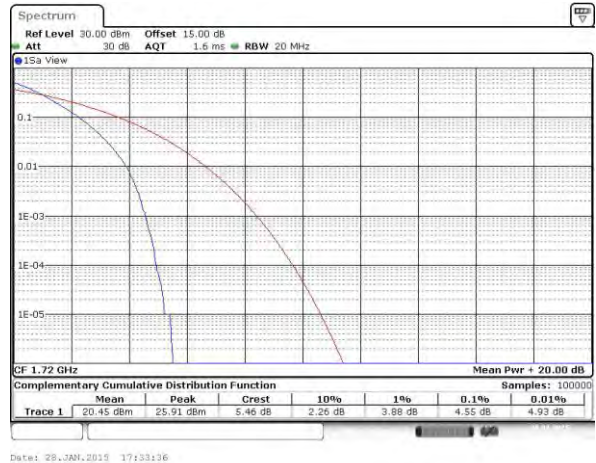


Date: 28-JAN-2015 17:33:36

Middle Channel / 1RB

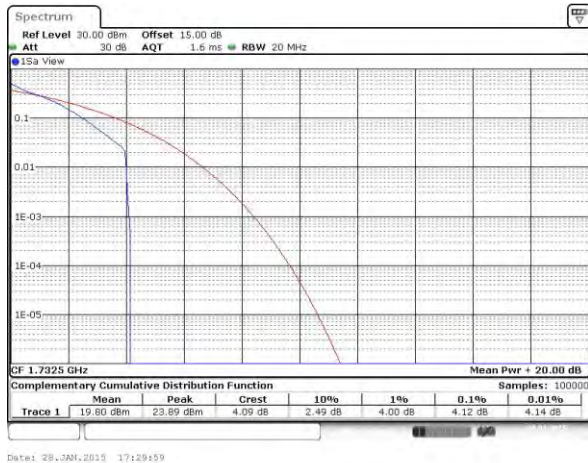


Date: 28-JAN-2015 17:29:59

Middle Channel / Full RB

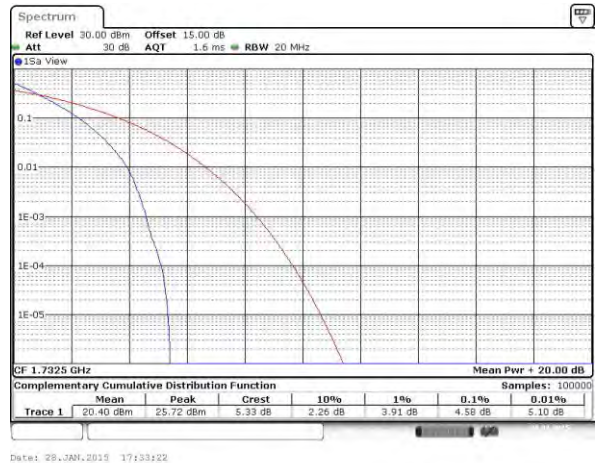


Date: 28-JAN-2015 17:33:22

Highest Channel / 1RB

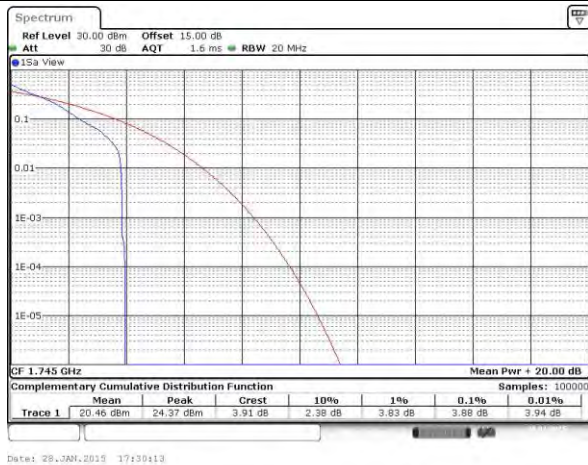

Date: 28-JAN-2015 17:30:13

Highest Channel / Full RB

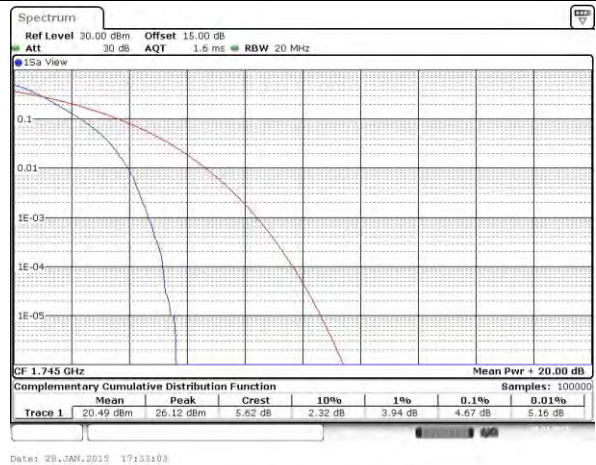


Date: 28-JAN-2015 17:33:03




LTE Band 4 / 20MHz / 16QAM

Lowest Channel / 1RB

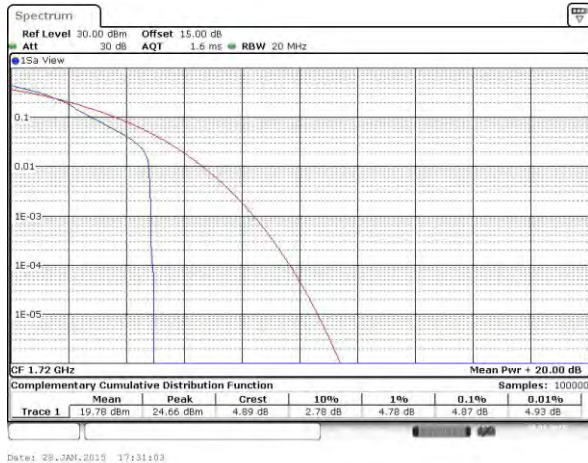


Lowest Channel / Full RB

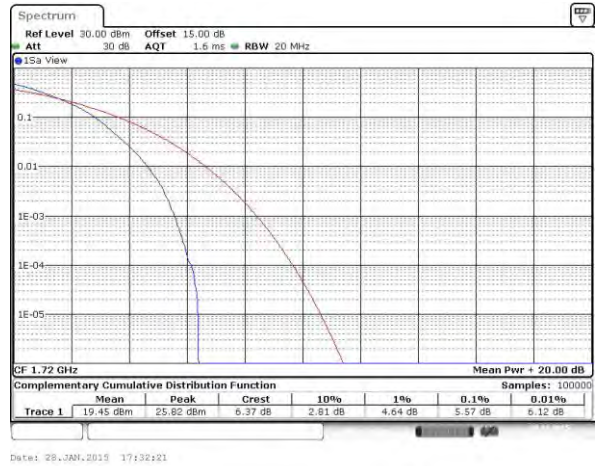

Middle Channel / 1RB



Middle Channel / Full RB

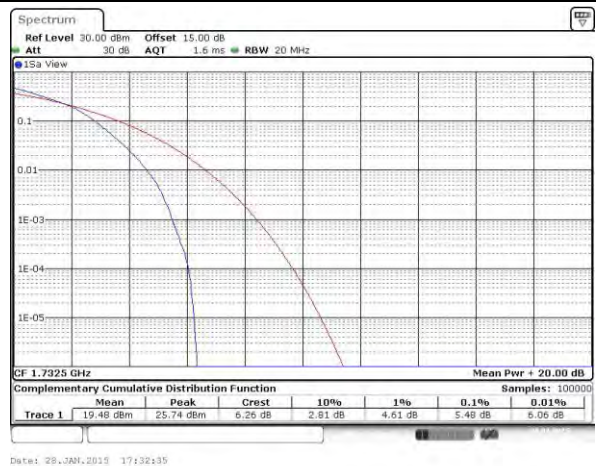

Highest Channel / 1RB



Highest Channel / Full RB




**26dB Bandwidth**

Mode	LTE Band 4 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.30	1.31	3.06	3.07	5.07	5.04	10.03	9.99	14.75	14.93	20.46	20.50
Middle CH	1.30	1.30	3.06	3.07	5.09	5.05	10.01	10.05	14.63	14.84	20.46	20.38
Highest CH	1.30	1.31	3.06	3.06	5.07	5.05	10.09	10.03	14.63	14.60	20.26	20.46




LTE Band 4


Lowest Channel / 1.4MHz / QPSK

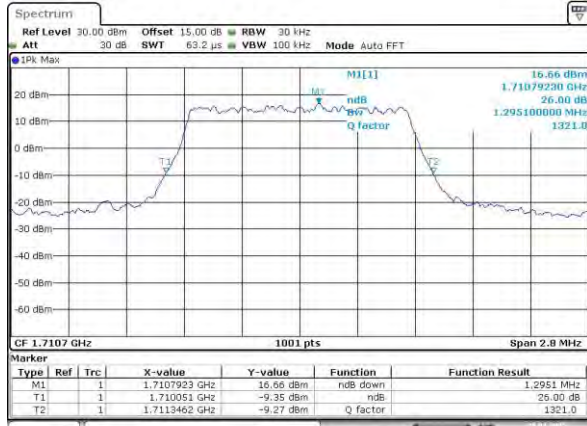


Lowest Channel / 1.4MHz / 16QAM

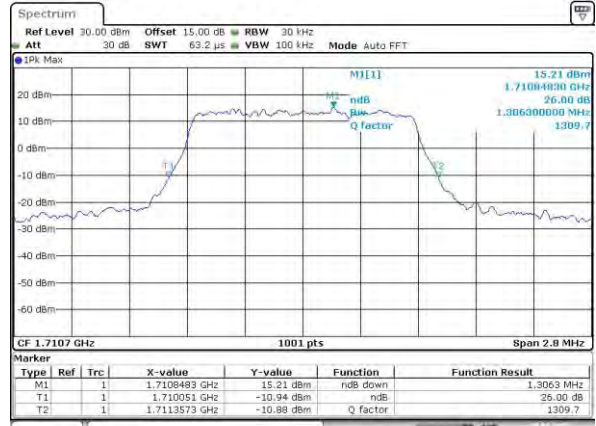


Middle Channel / 1.4MHz / QPSK

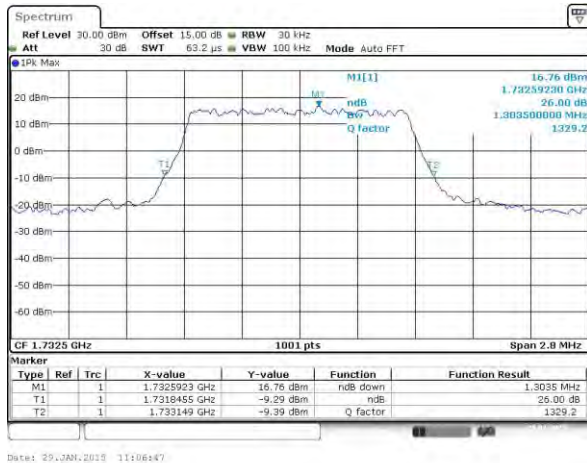


Middle Channel / 1.4MHz / 16QAM

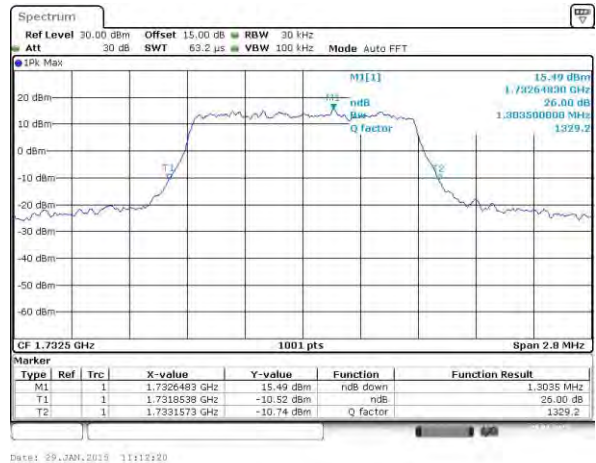

Highest Channel / 1.4MHz / QPSK

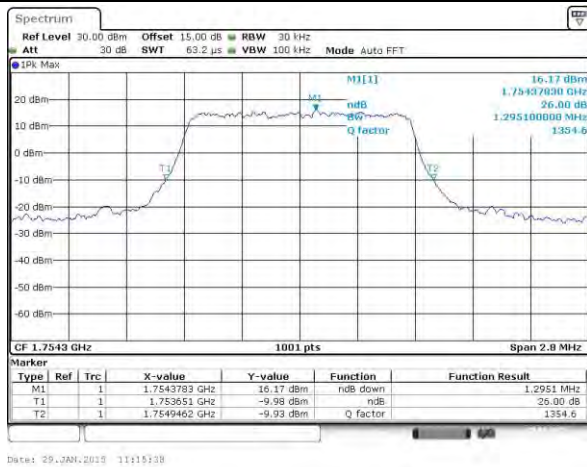


Highest Channel / 1.4MHz / 16QAM

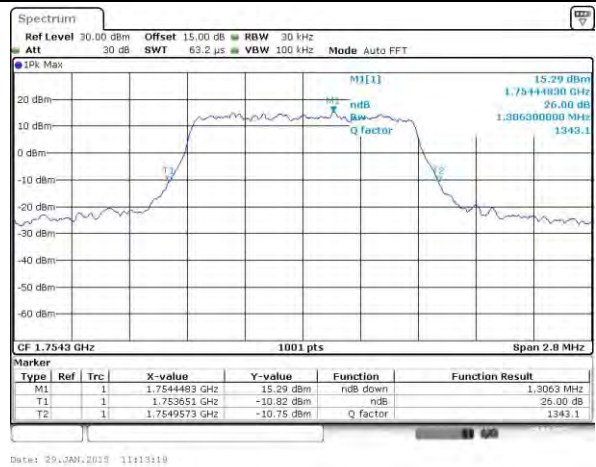




LTE Band 4


Lowest Channel / 3MHz / QPSK

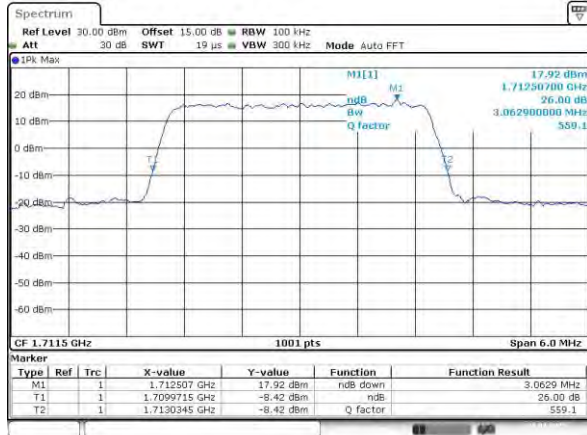


Lowest Channel / 3MHz / 16QAM

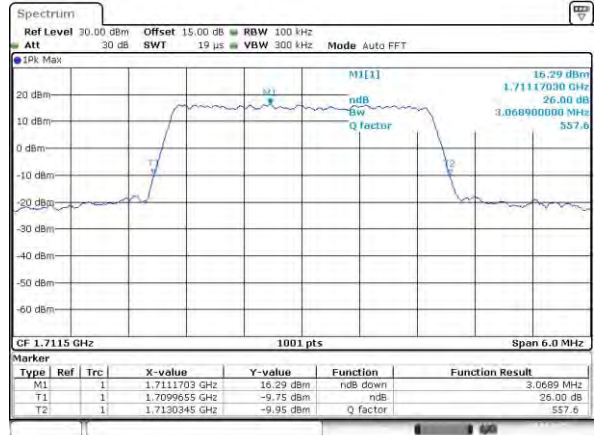


Middle Channel / 3MHz / QPSK

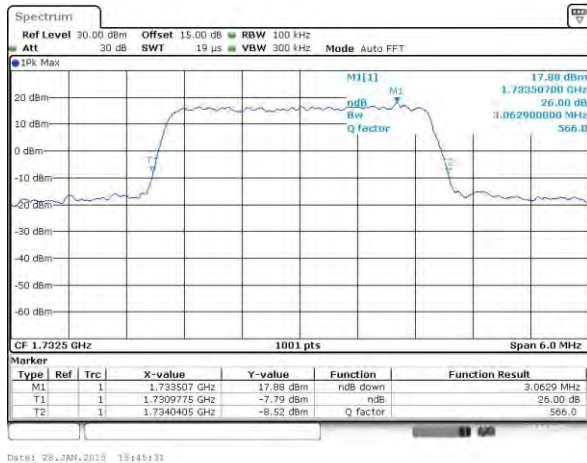


Middle Channel / 3MHz / 16QAM

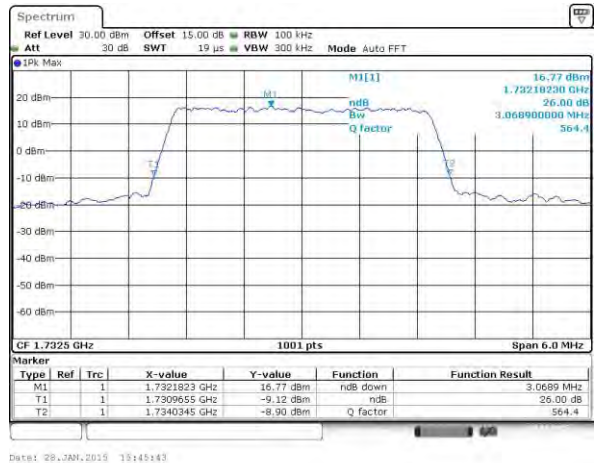

Highest Channel / 3MHz / QPSK

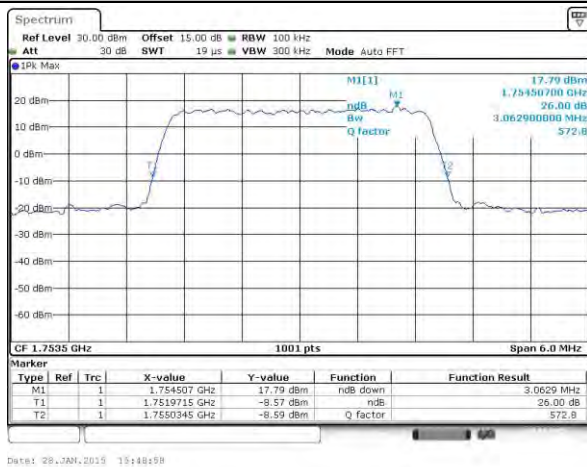


Highest Channel / 3MHz / 16QAM

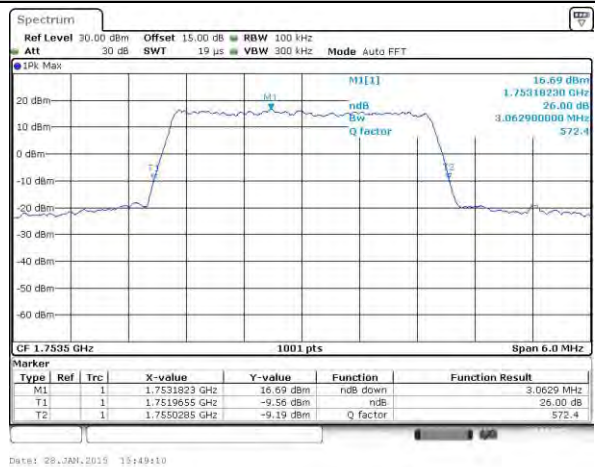




LTE Band 4


Lowest Channel / 5MHz / QPSK

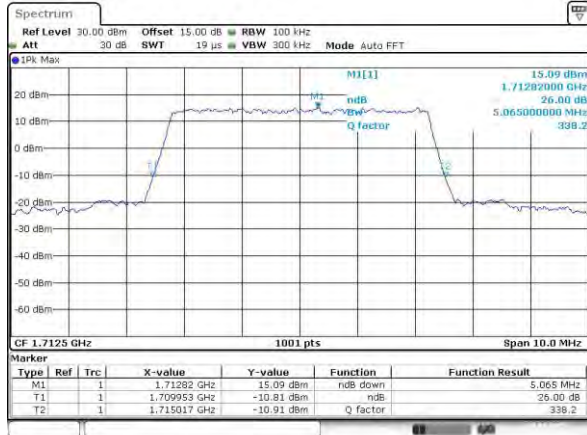


Lowest Channel / 5MHz / 16QAM

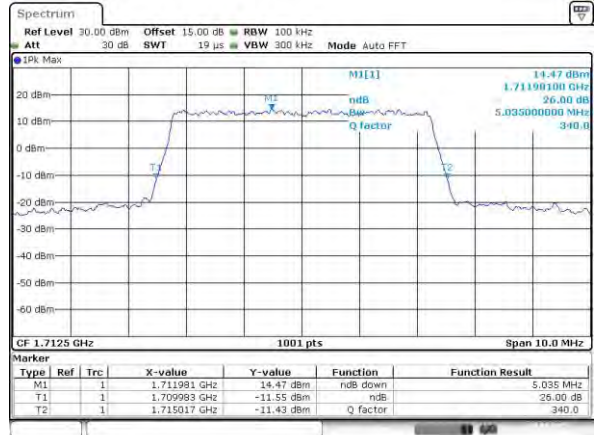


Middle Channel / 5MHz / QPSK

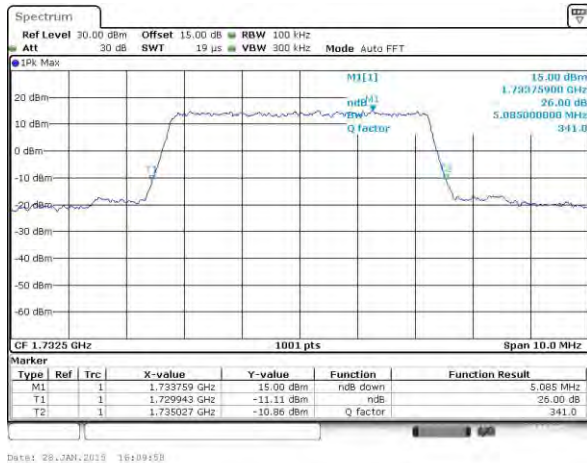


Middle Channel / 5MHz / 16QAM

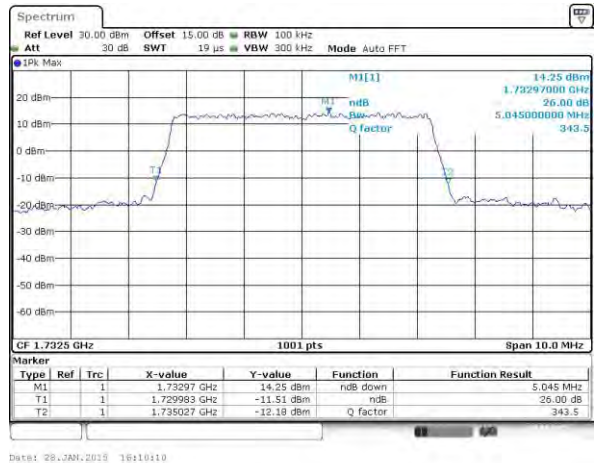

Highest Channel / 5MHz / QPSK

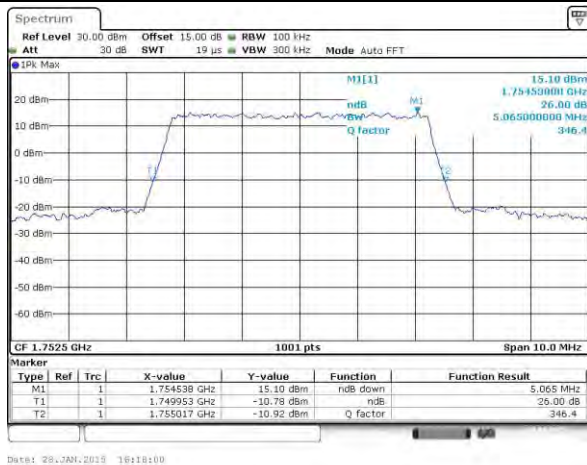


Highest Channel / 5MHz / 16QAM

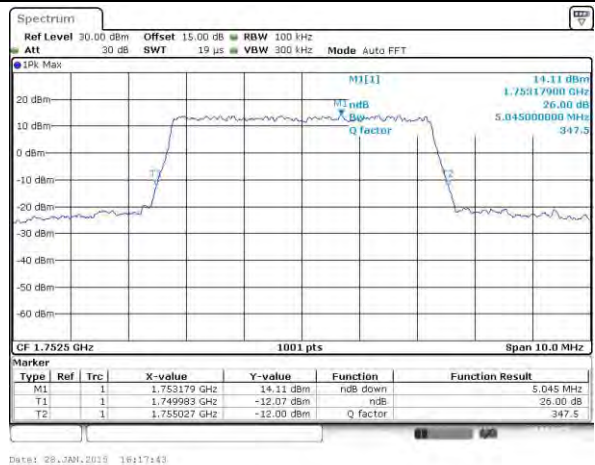




LTE Band 4


Lowest Channel / 10MHz / QPSK

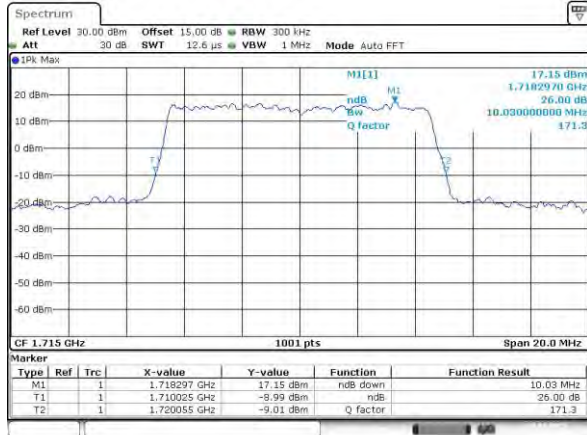


Lowest Channel / 10MHz / 16QAM

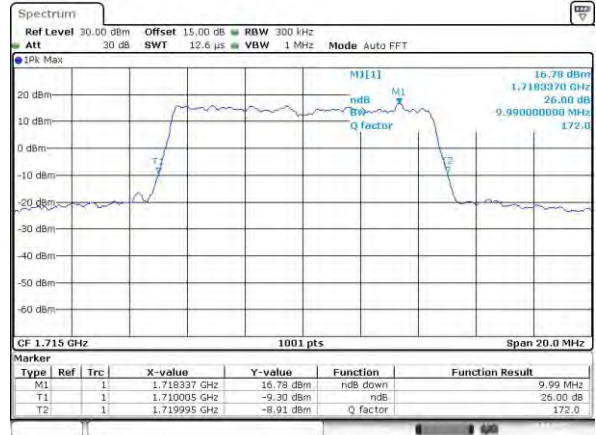


Middle Channel / 10MHz / QPSK

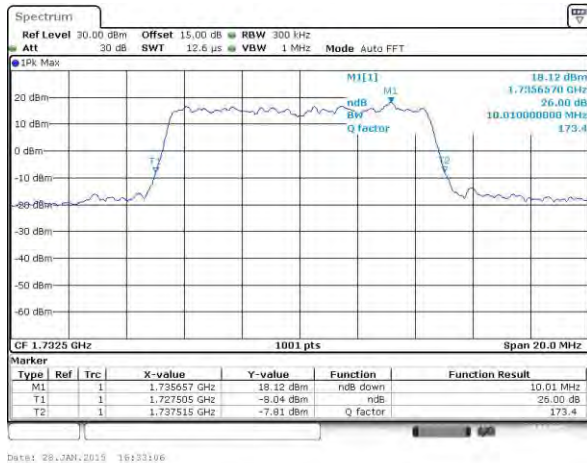


Middle Channel / 10MHz / 16QAM

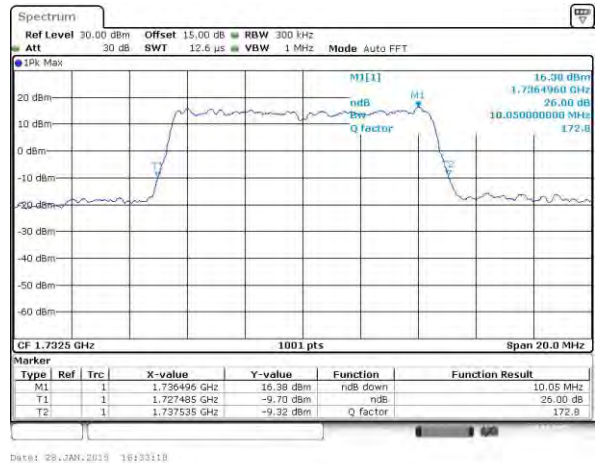

Highest Channel / 10MHz / QPSK

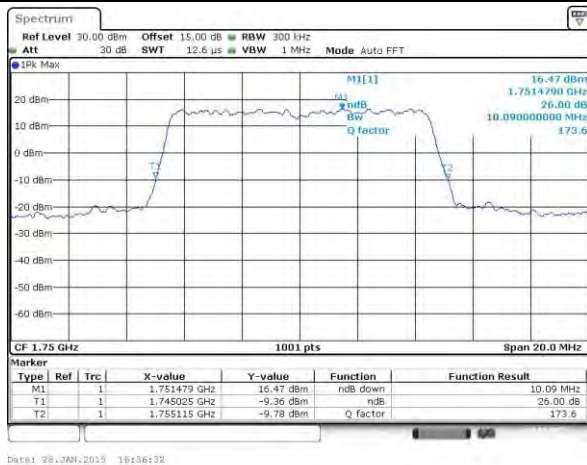


Highest Channel / 10MHz / 16QAM

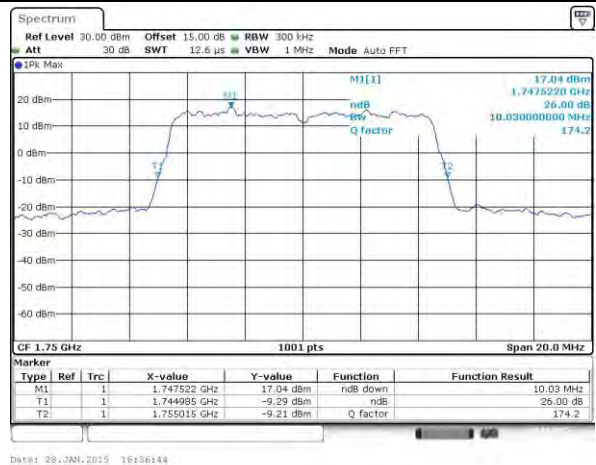




LTE Band 4


Lowest Channel / 15MHz / QPSK

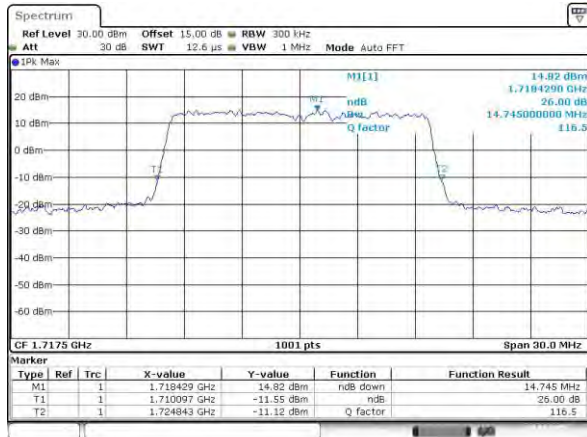


Lowest Channel / 15MHz / 16QAM

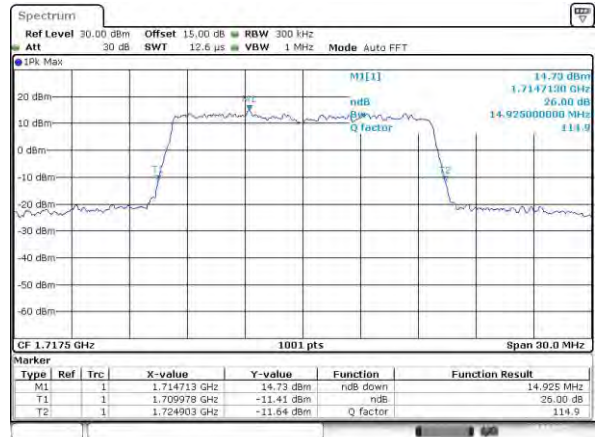


Middle Channel / 15MHz / QPSK

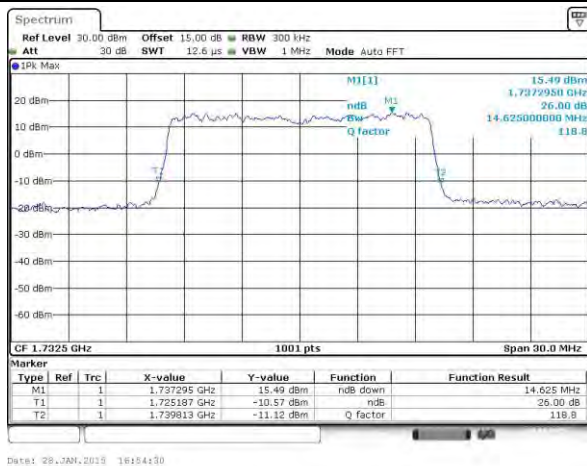


Middle Channel / 15MHz / 16QAM

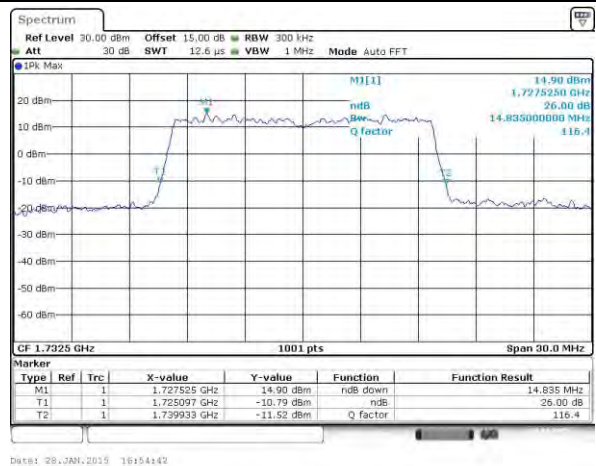

Highest Channel / 15MHz / QPSK

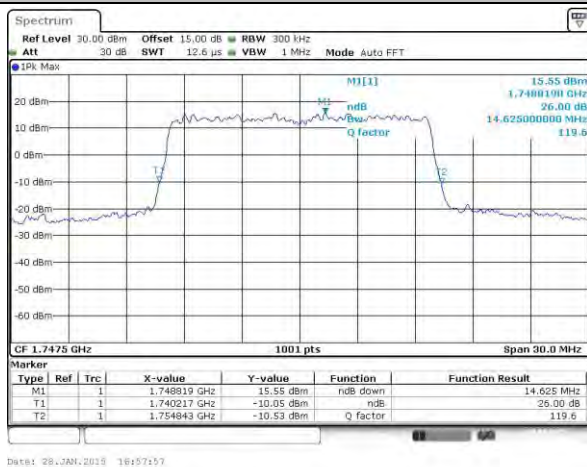


Highest Channel / 15MHz / 16QAM

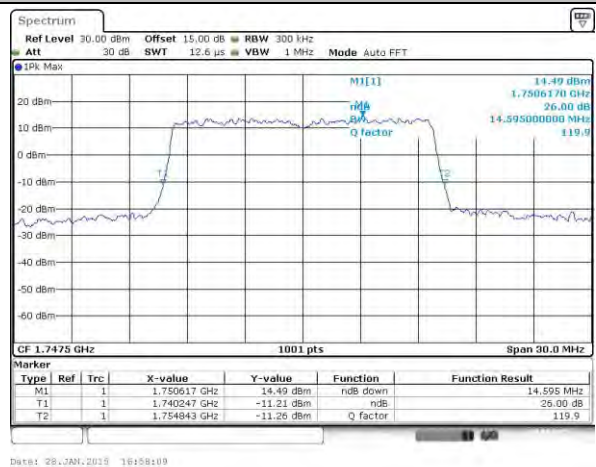




LTE Band 4

Lowest Channel / 20MHz / QPSK

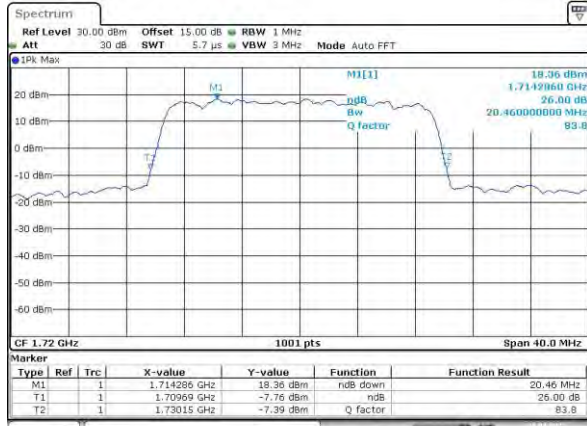


Date: 28.JAN.2015 17:10:17

Lowest Channel / 20MHz / 16QAM

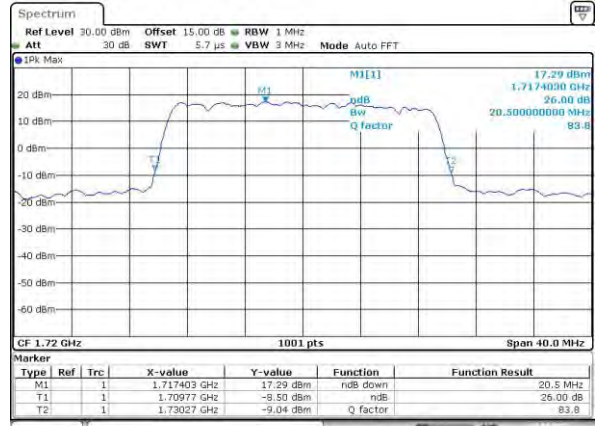


Date: 28.JAN.2015 17:10:29

Middle Channel / 20MHz / QPSK

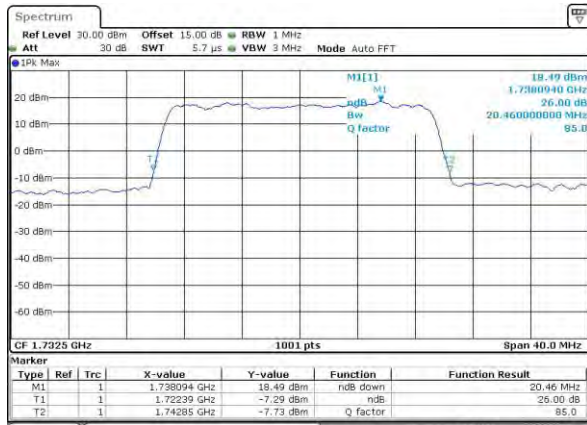


Date: 28.JAN.2015 17:17:04

Middle Channel / 20MHz / 16QAM

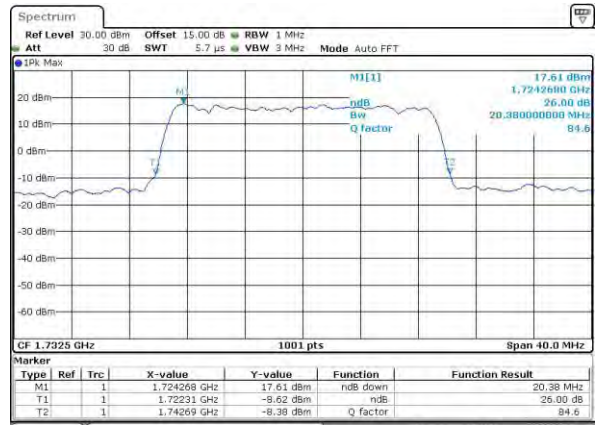


Date: 28.JAN.2015 17:17:16

Highest Channel / 20MHz / QPSK

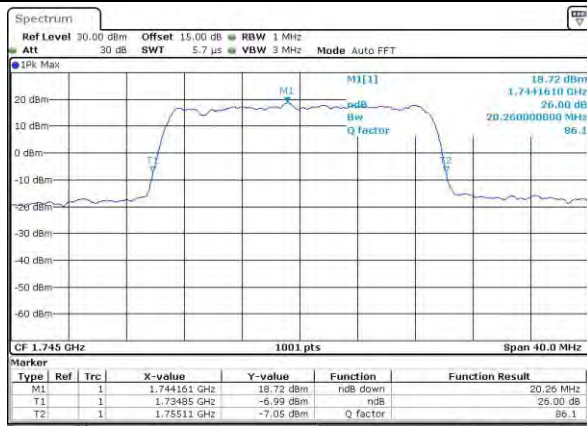

Date: 28.JAN.2015 17:20:30

Highest Channel / 20MHz / 16QAM

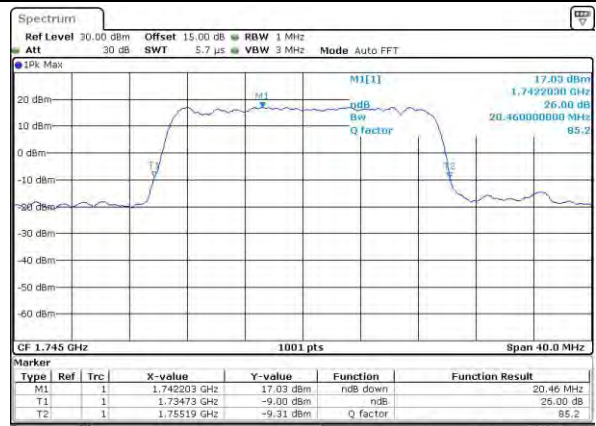

Date: 28.JAN.2015 17:20:42


**Occupied Bandwidth**

Mode	LTE Band 4 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.10	2.72	2.73	4.51	4.50	9.07	9.03	13.46	13.46	18.26	18.50
Middle CH	1.09	1.10	2.73	2.73	4.51	4.50	9.07	9.05	13.52	13.49	18.34	18.42
Highest CH	1.10	1.10	2.73	2.72	4.51	4.50	9.07	9.01	13.49	13.49	18.50	18.26




LTE Band 4


Lowest Channel / 1.4MHz / QPSK

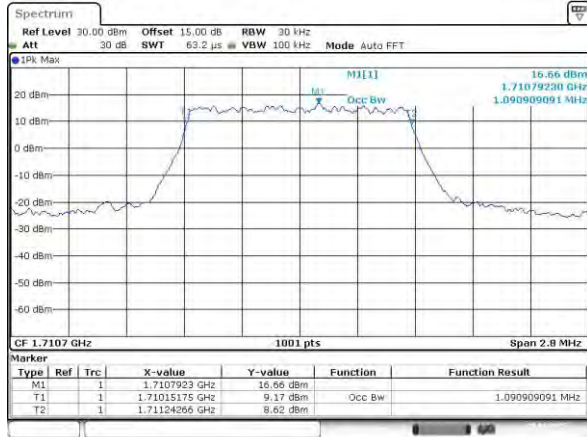


Lowest Channel / 1.4MHz / 16QAM

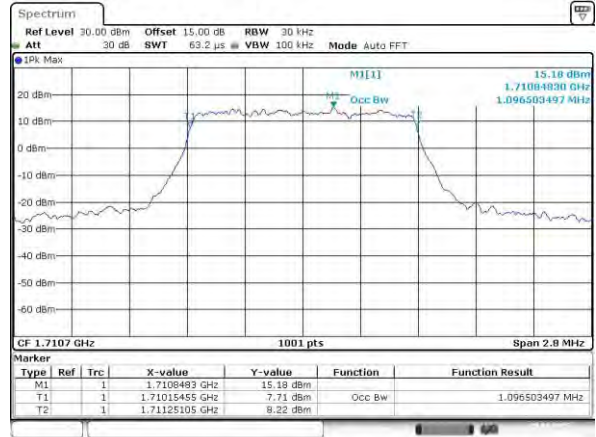


Middle Channel / 1.4MHz / QPSK

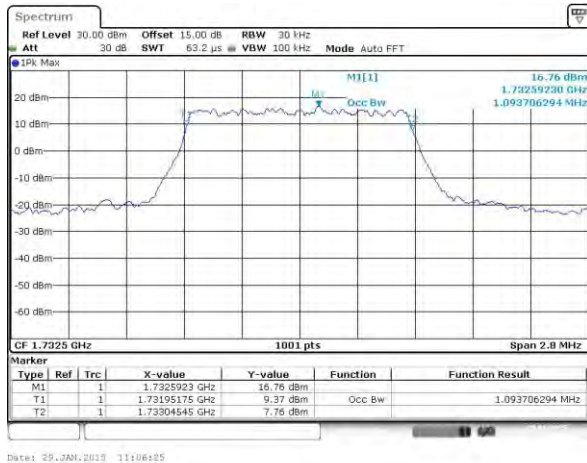


Middle Channel / 1.4MHz / 16QAM

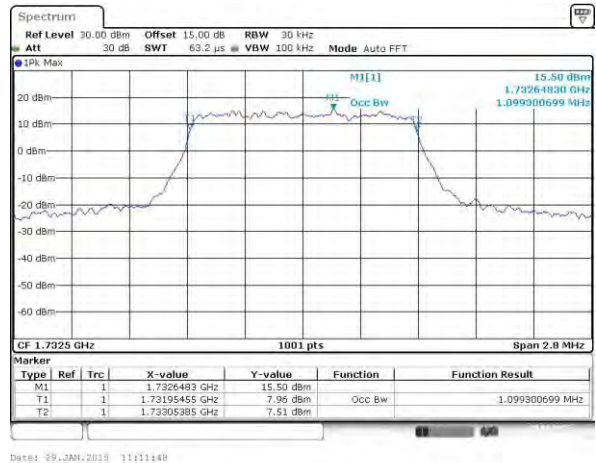

Highest Channel / 1.4MHz / QPSK

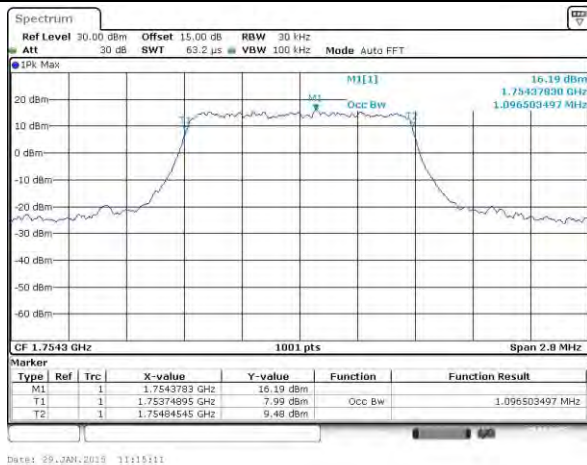


Highest Channel / 1.4MHz / 16QAM

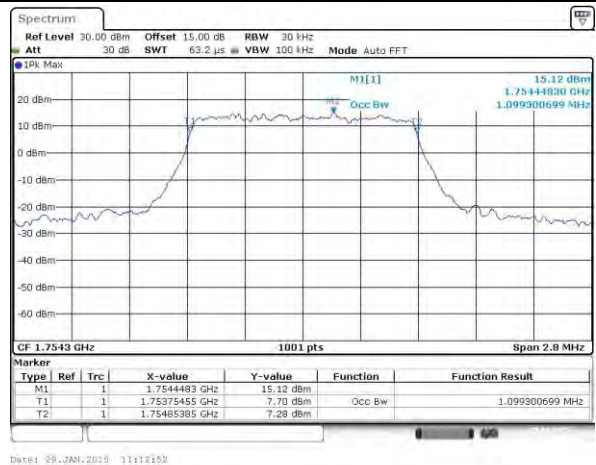




LTE Band 4


Lowest Channel / 3MHz / QPSK

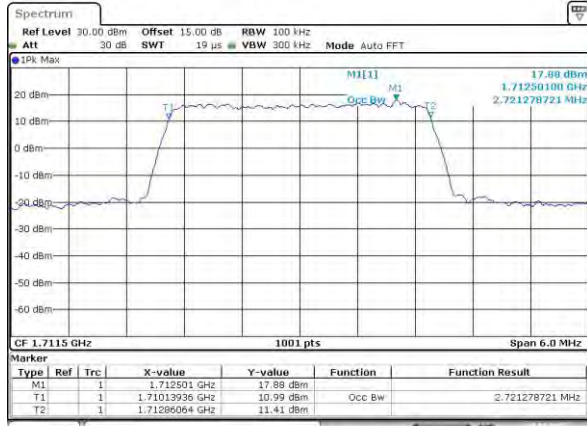


Lowest Channel / 3MHz / 16QAM

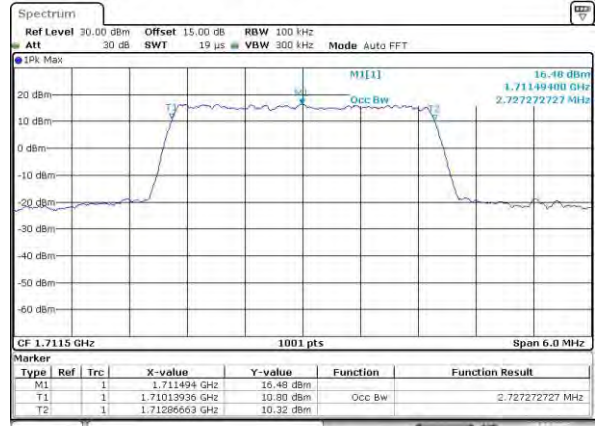


Middle Channel / 3MHz / QPSK

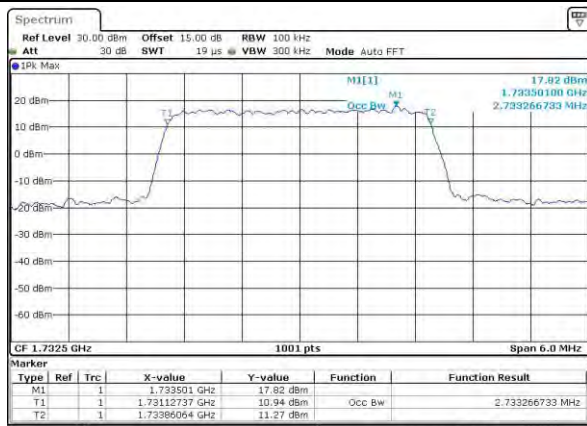


Middle Channel / 3MHz / 16QAM

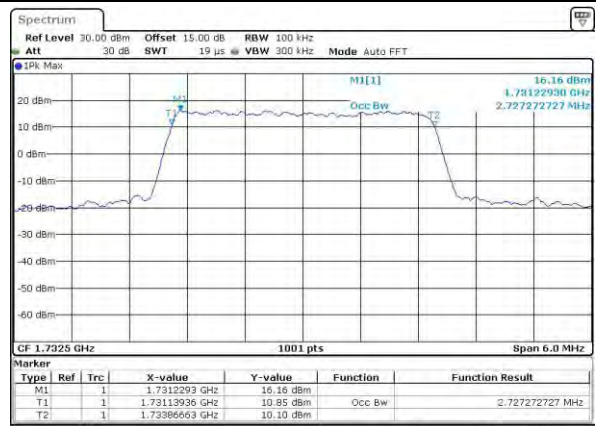

Highest Channel / 3MHz / QPSK

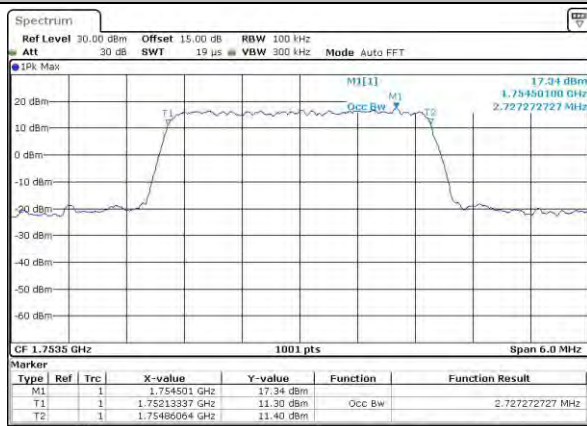


Highest Channel / 3MHz / 16QAM

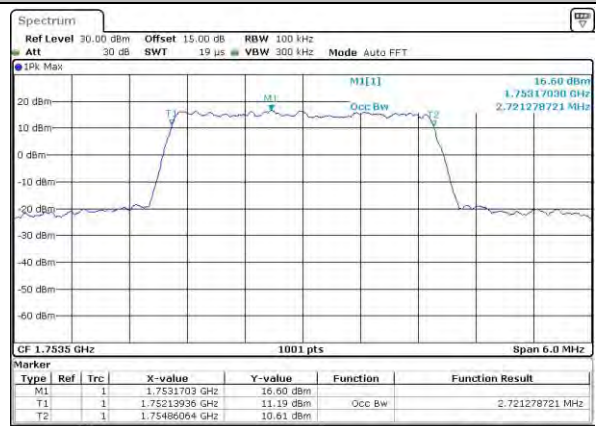




LTE Band 4


Lowest Channel / 5MHz / QPSK

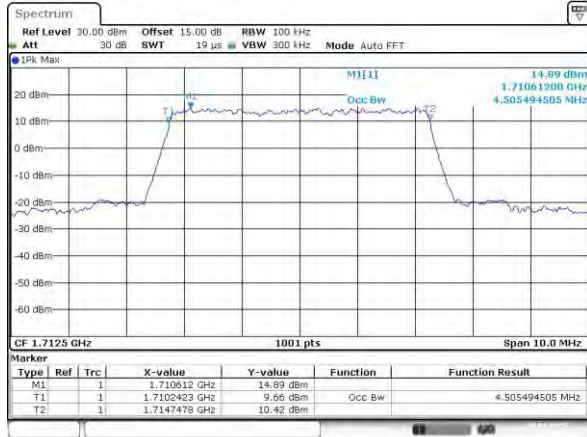


Lowest Channel / 5MHz / 16QAM

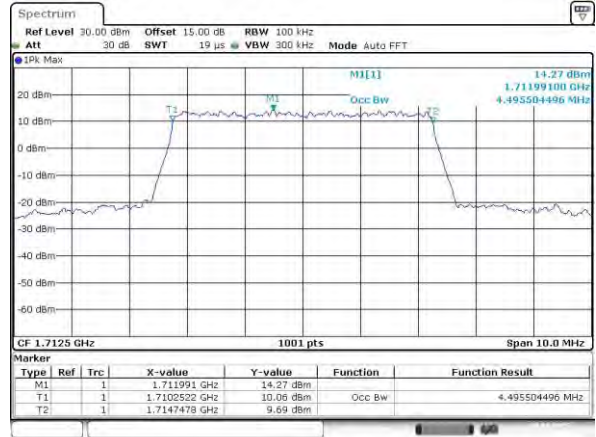


Middle Channel / 5MHz / QPSK

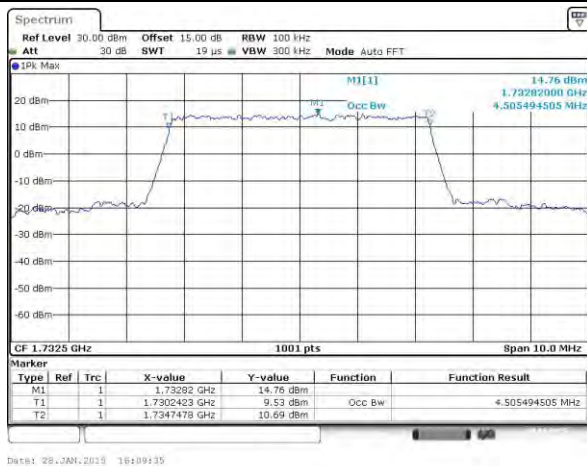


Middle Channel / 5MHz / 16QAM

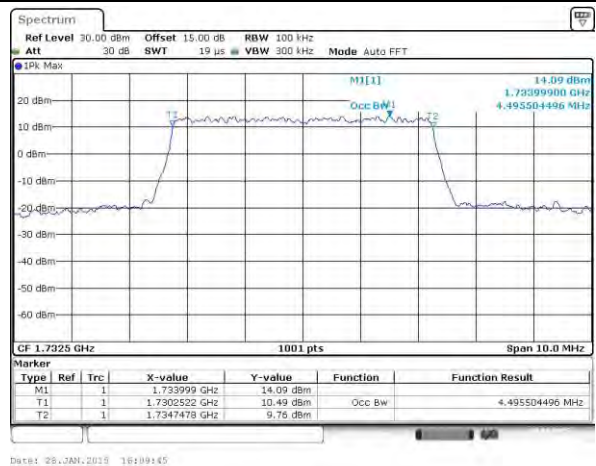

Highest Channel / 5MHz / QPSK

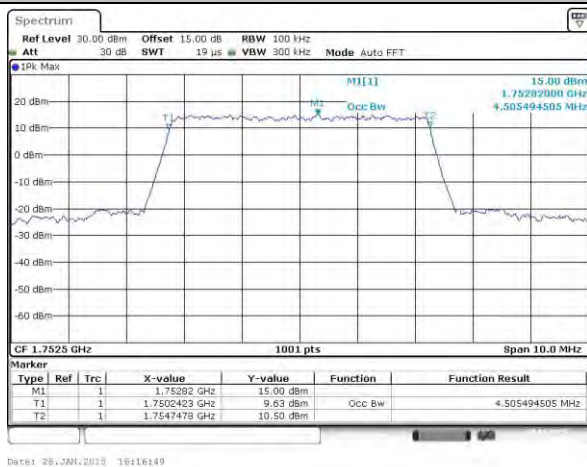


Highest Channel / 5MHz / 16QAM

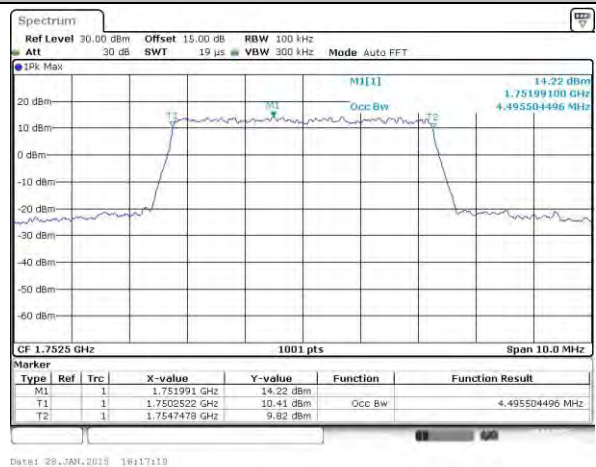




LTE Band 4


Lowest Channel / 10MHz / QPSK

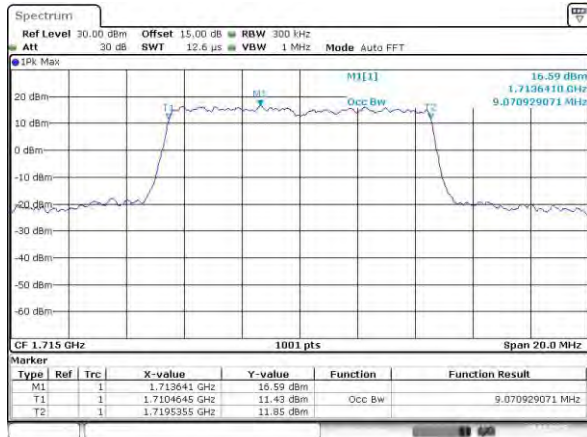


Lowest Channel / 10MHz / 16QAM

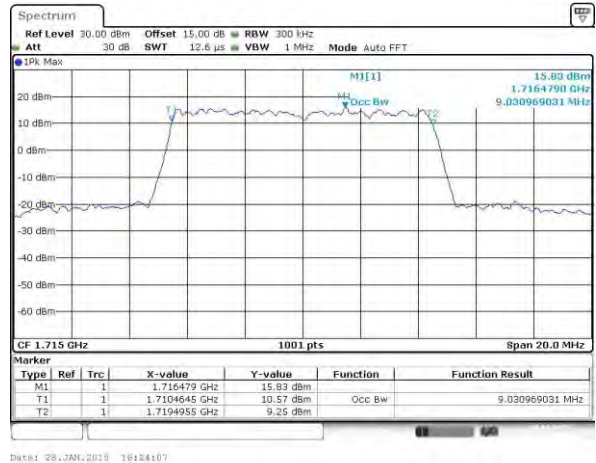


Middle Channel / 10MHz / QPSK

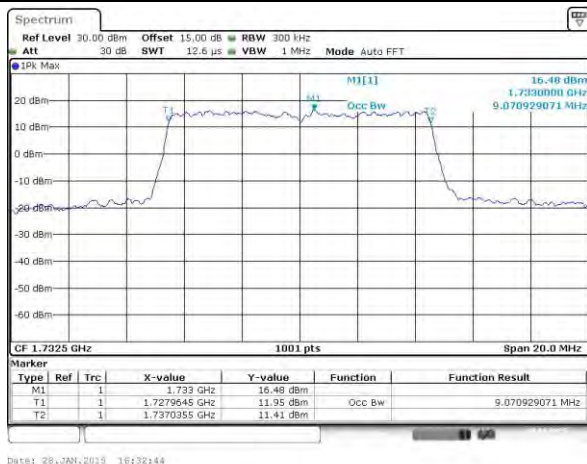


Middle Channel / 10MHz / 16QAM

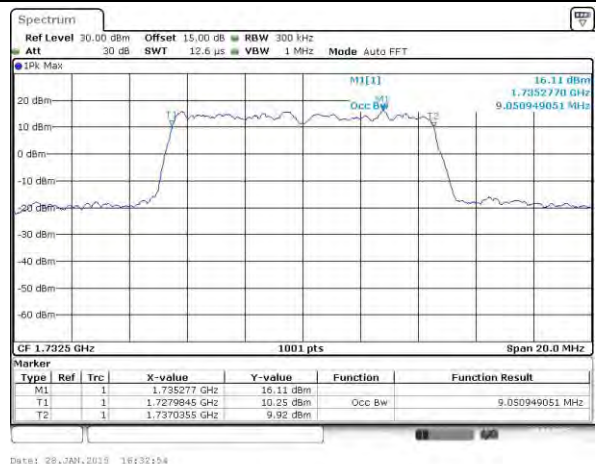

Highest Channel / 10MHz / QPSK

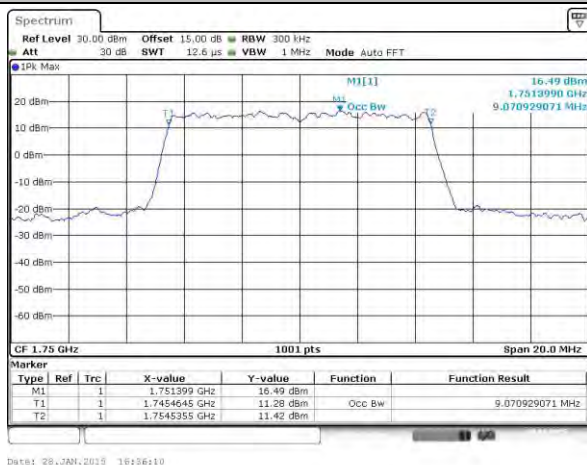


Highest Channel / 10MHz / 16QAM

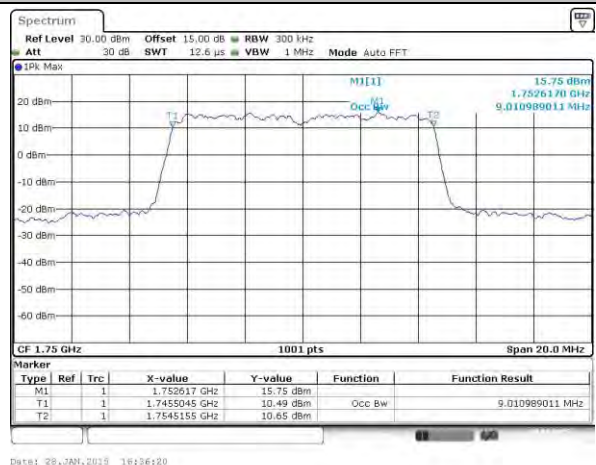




LTE Band 4


Lowest Channel / 15MHz / QPSK

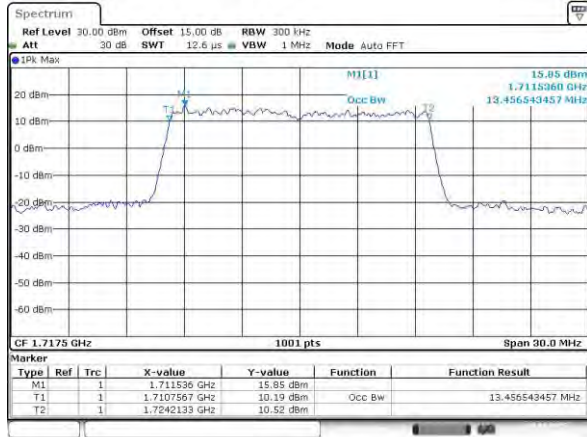


Lowest Channel / 15MHz / 16QAM

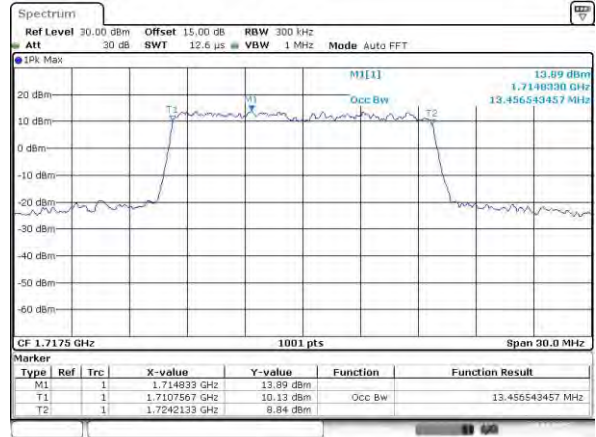


Middle Channel / 15MHz / QPSK

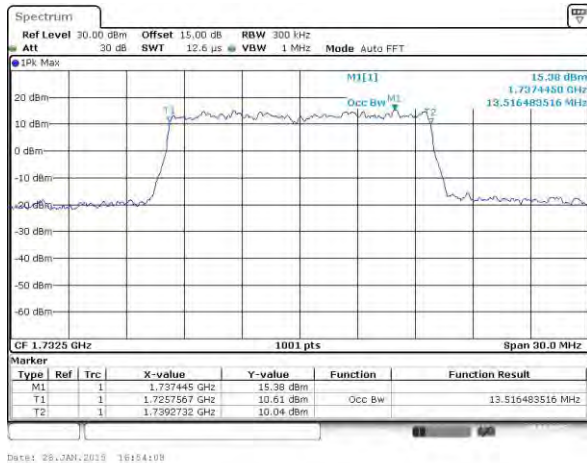


Middle Channel / 15MHz / 16QAM

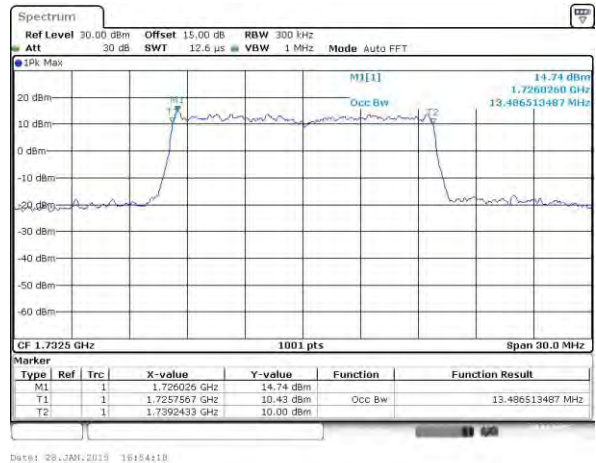

Highest Channel / 15MHz / QPSK

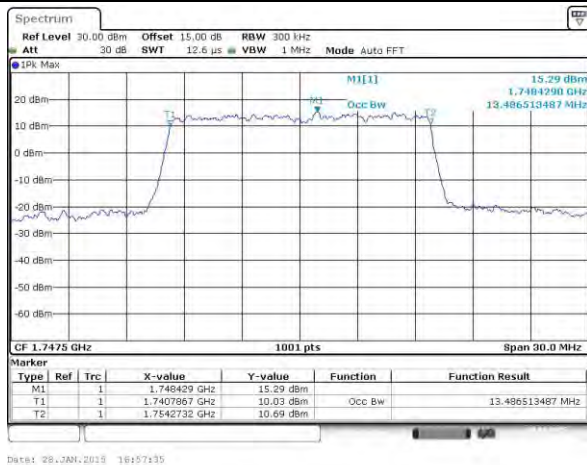


Highest Channel / 15MHz / 16QAM

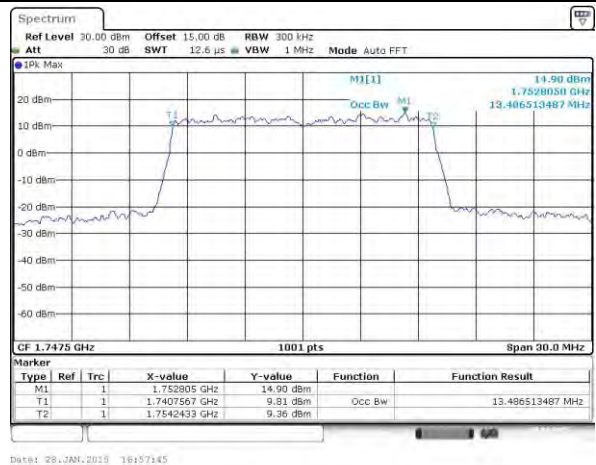




LTE Band 4


Lowest Channel / 20MHz / QPSK

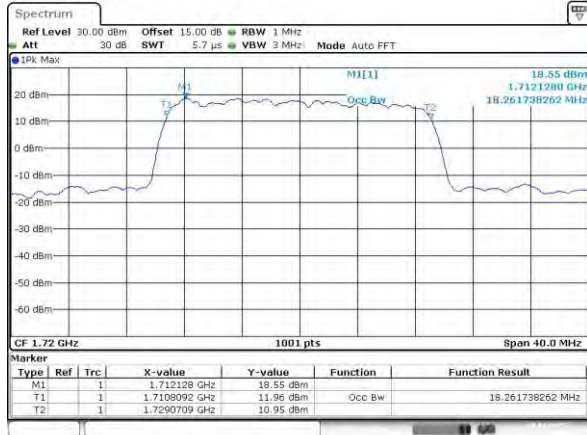


Lowest Channel / 20MHz / 16QAM

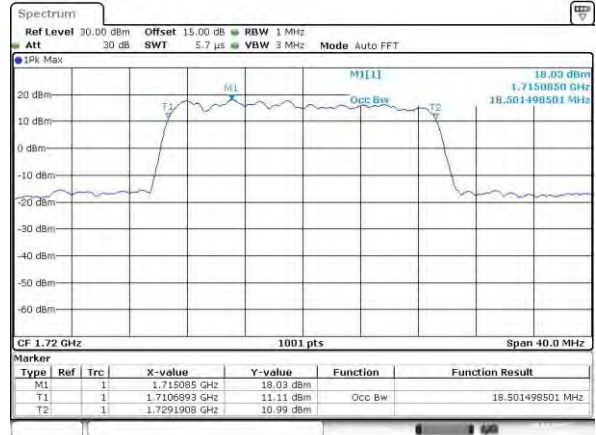


Middle Channel / 20MHz / QPSK

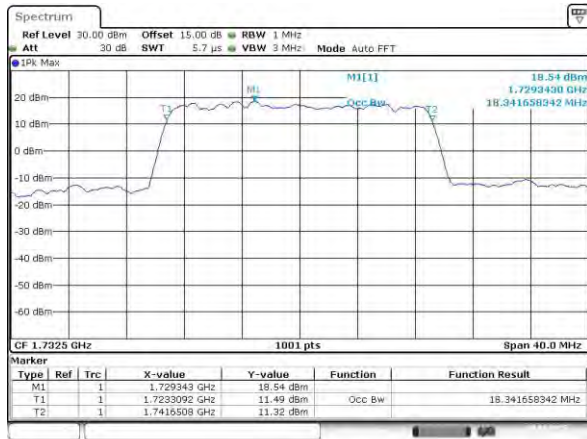


Middle Channel / 20MHz / 16QAM

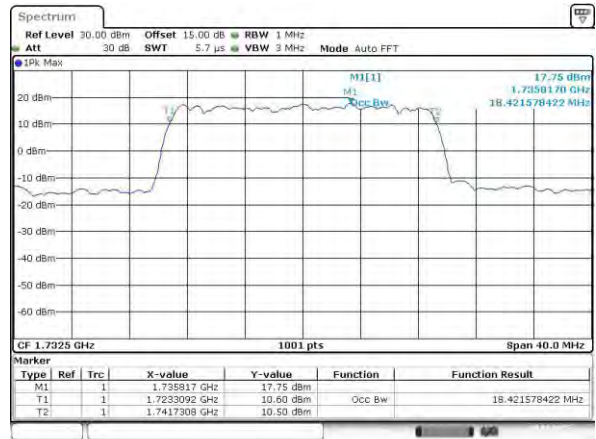

Highest Channel / 20MHz / QPSK

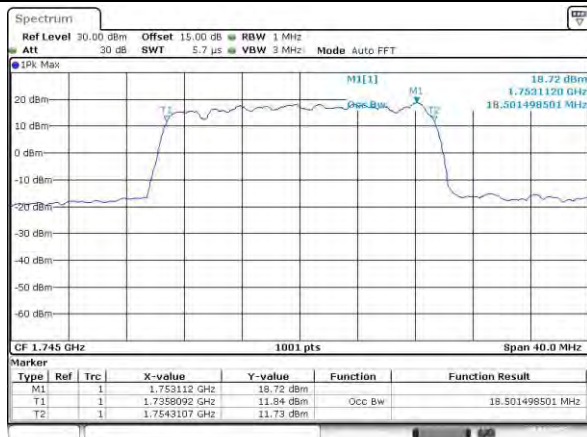

Highest Channel / 20MHz / 16QAM

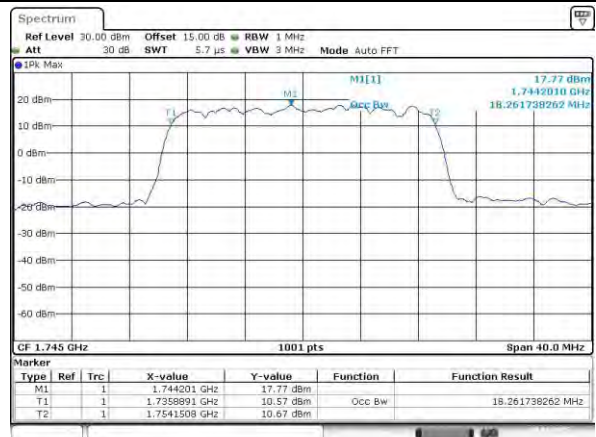

**Conducted Band Edge****LTE Band 4 / 1.4MHz / QPSK****Lowest Band Edge / 1RB****Highest Band Edge / 1RB****Lowest Band Edge / Full RB****Highest Band Edge / Full RB**



LTE Band 4 / 1.4MHz / 16QAM

Lowest Band Edge / 1 RB




Highest Band Edge / 1 RB



Lowest Band Edge / Full RB




Highest Band Edge / Full RB

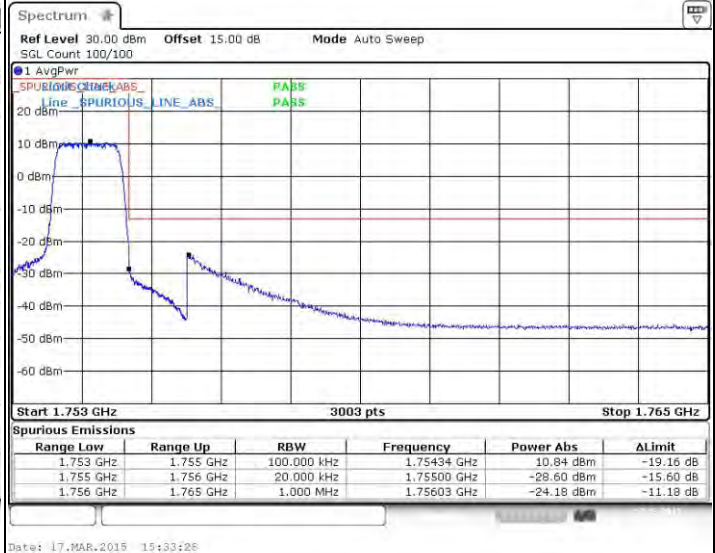



LTE Band 4 / 3MHz / QPSK

Lowest Band Edge / 1RB

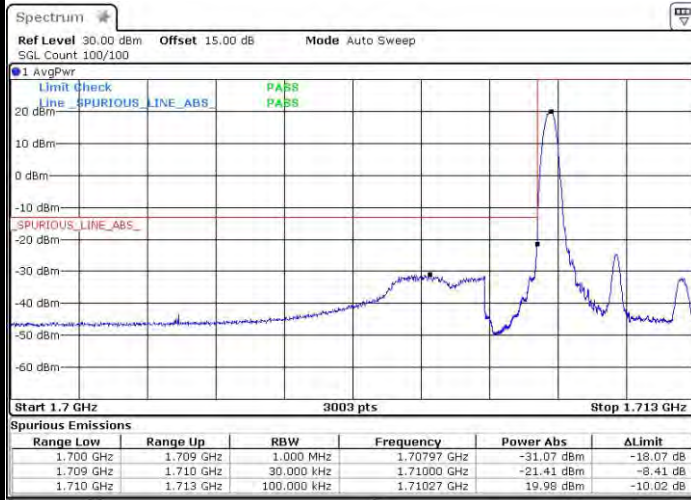

Highest Band Edge / 1 RB



Lowest Band Edge / Full RB



Highest Band Edge / Full RB






LTE Band 4 / 3MHz / 16QAM

Lowest Band Edge / 1 RB



Highest Band Edge / 1 RB

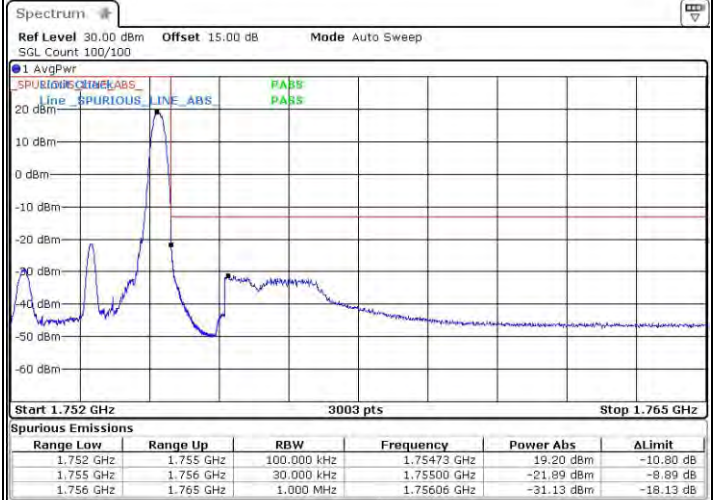

Lowest Band Edge / Full RB




Highest Band Edge / Full RB






LTE Band 4 / 5MHz / QPSK

Lowest Band Edge / 1 RB

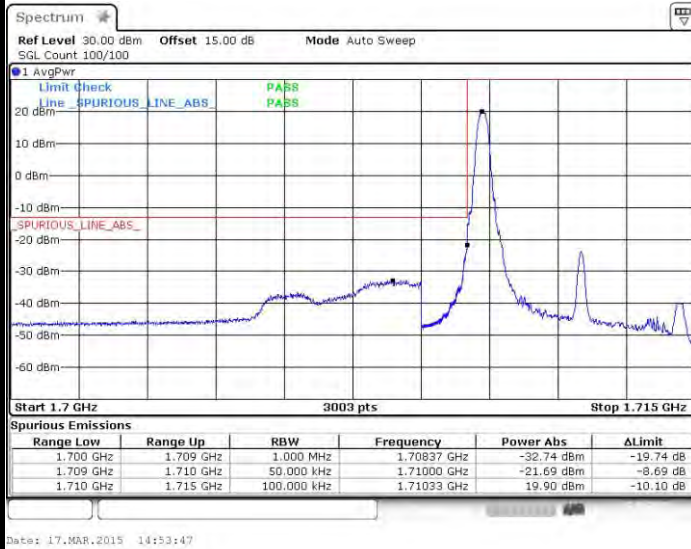

Highest Band Edge / 1 RB

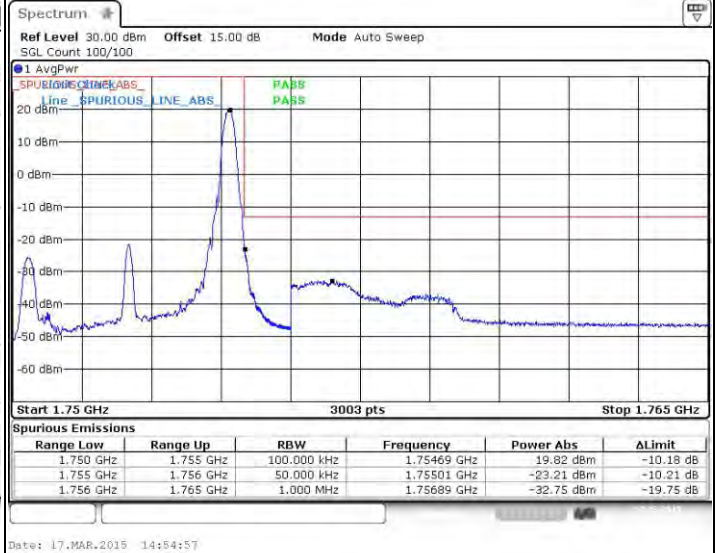

Lowest Band Edge / Full RB




Highest Band Edge / Full RB






LTE Band 4 / 5MHz / 16QAM

Lowest Band Edge / 1RB

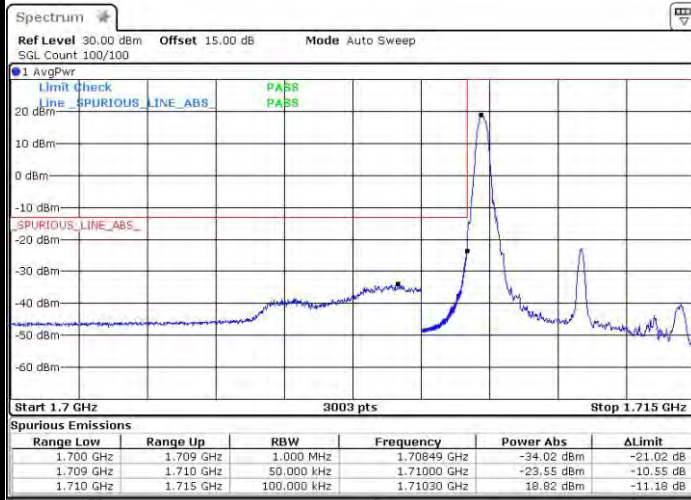

Date: 17.MAR.2015 14:53:11

Highest Band Edge / 1 RB

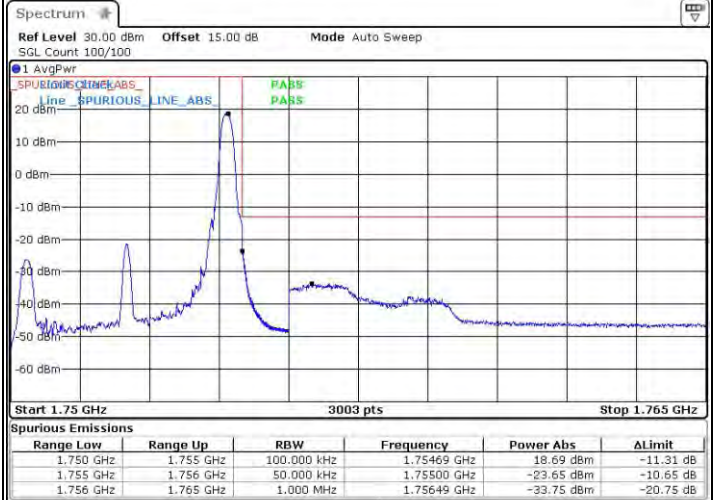

Date: 17.MAR.2015 14:55:37

Lowest Band Edge / Full RB



Date: 17.MAR.2015 14:51:46

Highest Band Edge / Full RB




Date: 17.MAR.2015 14:56:25




LTE Band 4 / 10MHz / QPSK


Lowest Band Edge / 1 RB

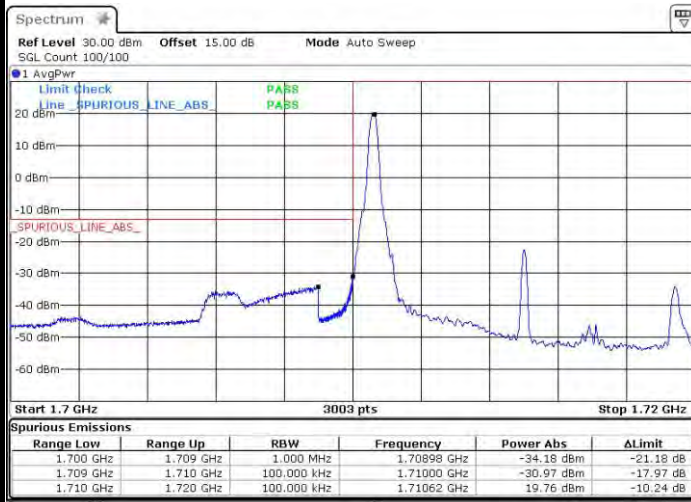


Highest Band Edge / 1 RB

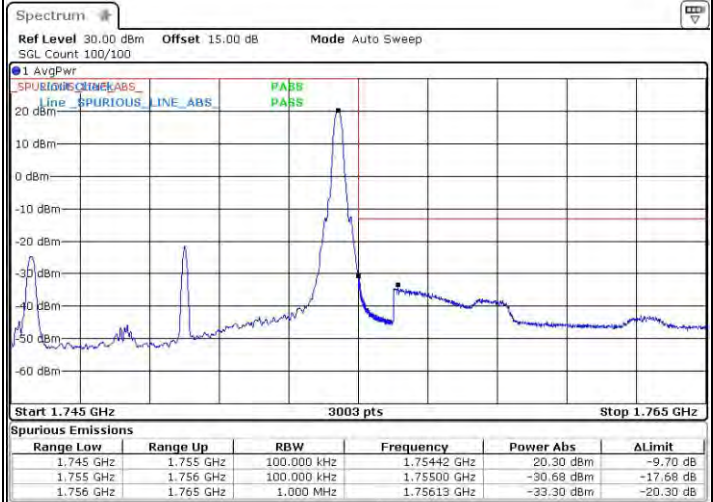

Lowest Band Edge / Full RB

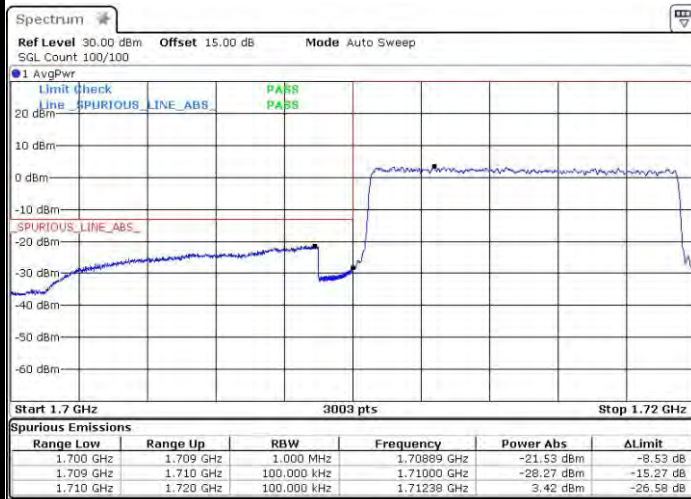


Highest Band Edge / Full RB

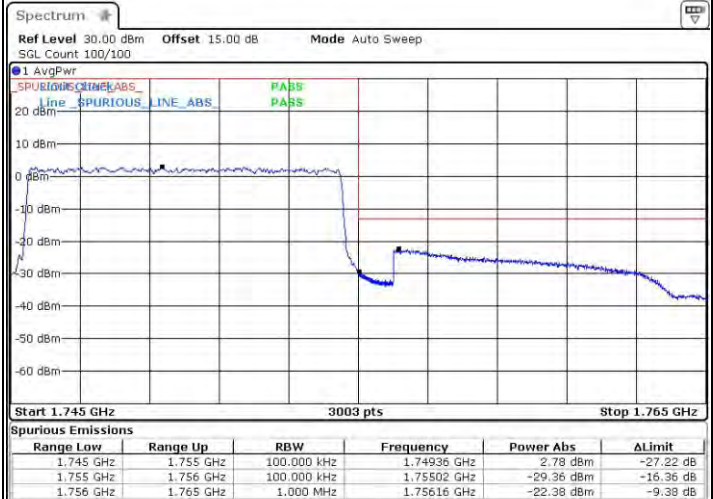




LTE Band 4 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

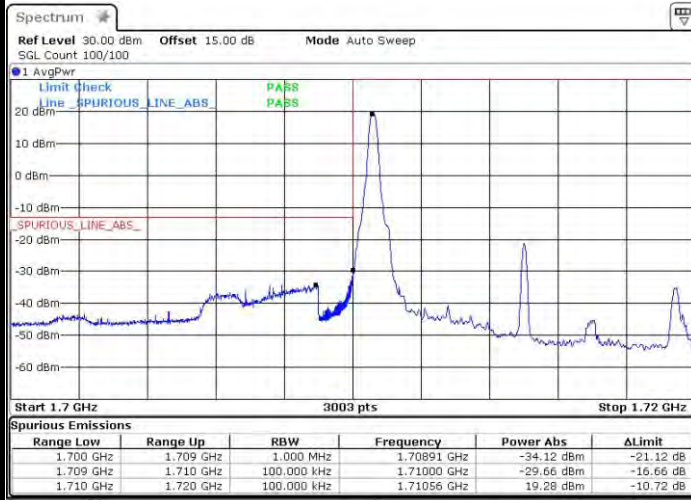

Highest Band Edge / 1 RB

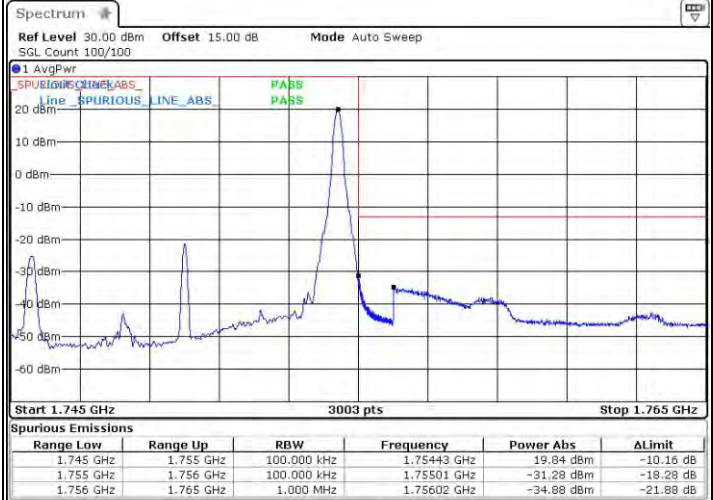

Lowest Band Edge / Full RB




Highest Band Edge / Full RB






LTE Band 4 / 15MHz / QPSK


Lowest Band Edge / 1 RB

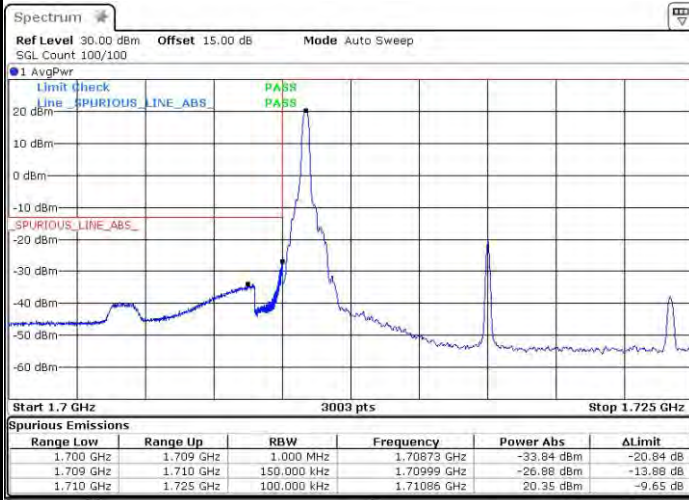

Highest Band Edge / 1 RB

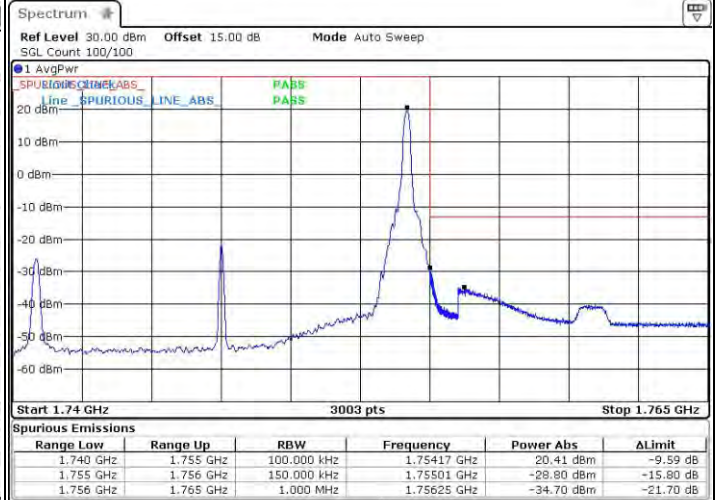

Lowest Band Edge / Full RB

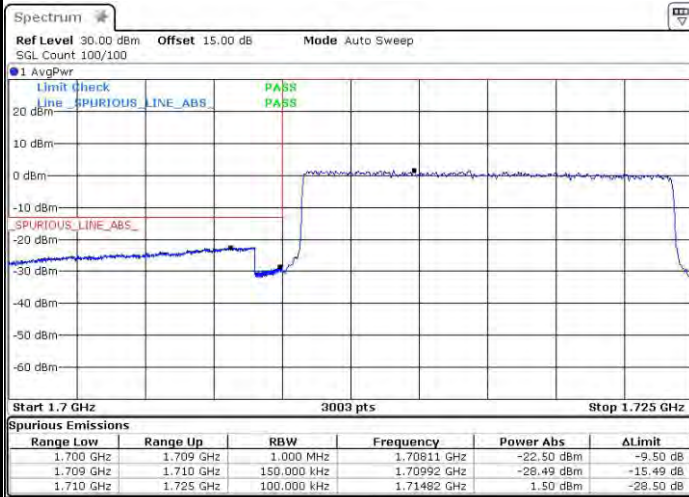


Highest Band Edge / Full RB






LTE Band 4 / 15MHz / 16QAM


Lowest Band Edge / 1 RB

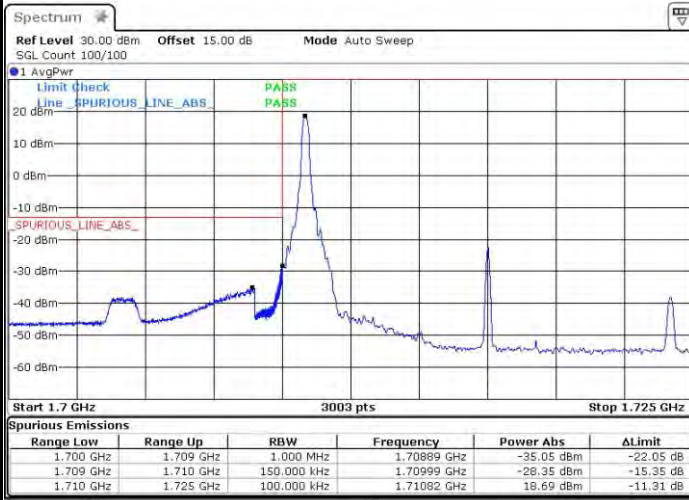

Highest Band Edge / 1 RB

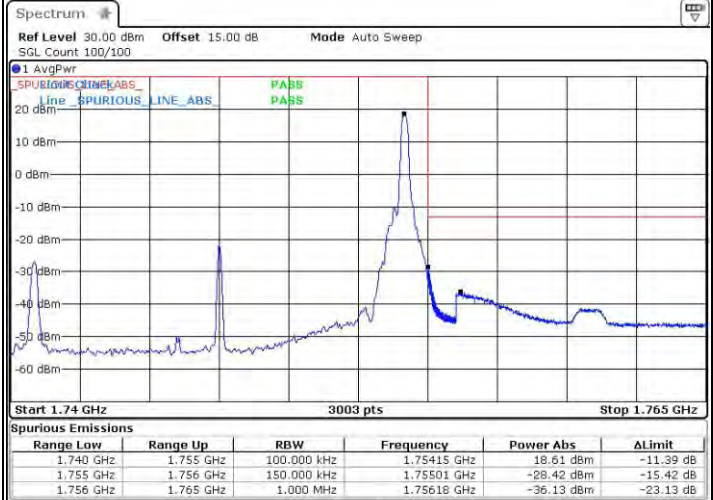

Lowest Band Edge / Full RB

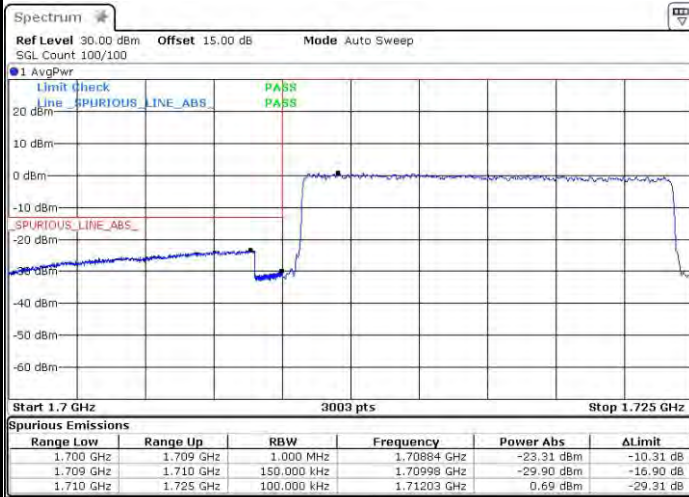


Highest Band Edge / Full RB






LTE Band 4 / 20MHz / QPSK


Lowest Band Edge / 1 RB

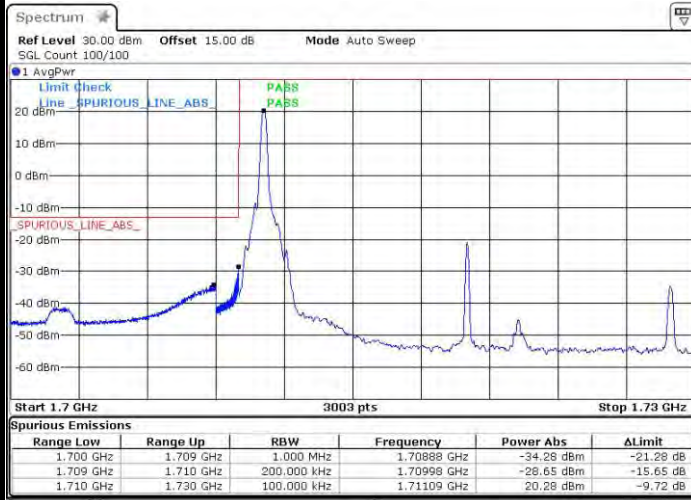


Highest Band Edge / 1 RB

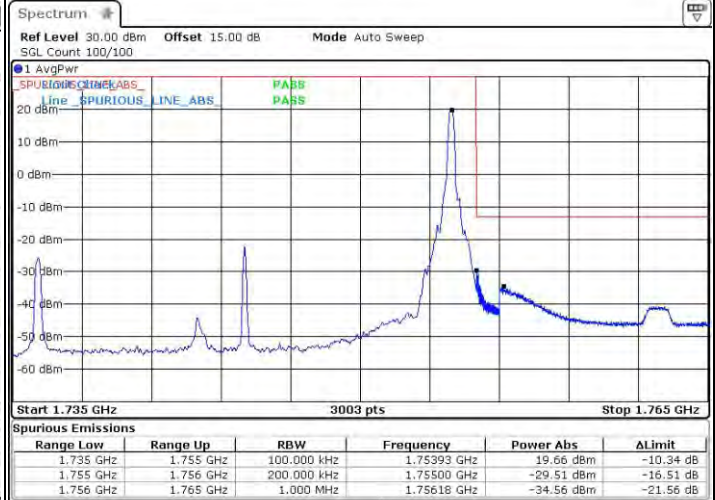

Lowest Band Edge / Full RB

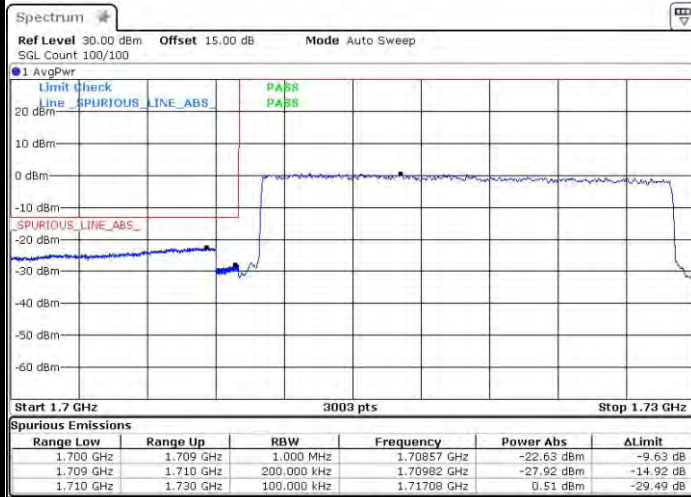


Highest Band Edge / Full RB

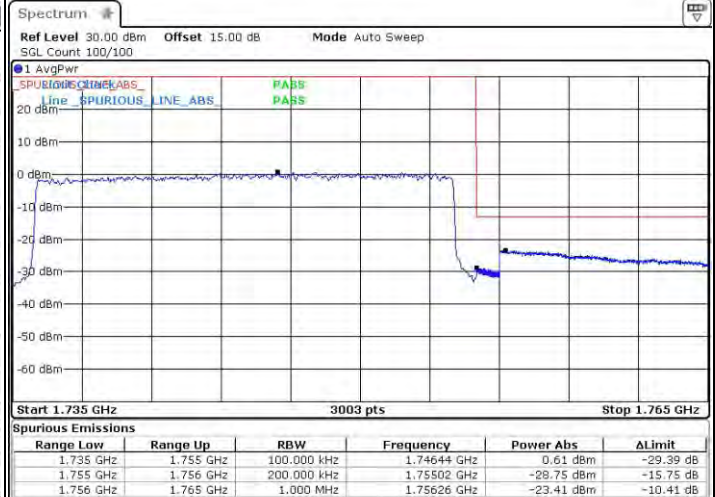




LTE Band 4 / 20MHz / 16QAM


Lowest Band Edge / 1 RB

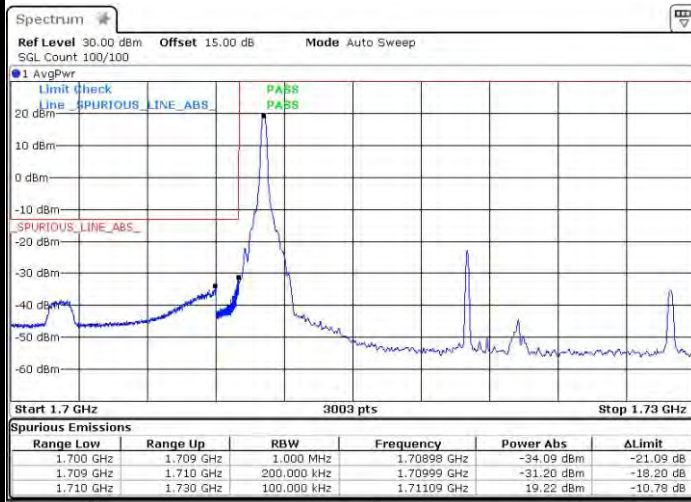


Highest Band Edge / 1 RB

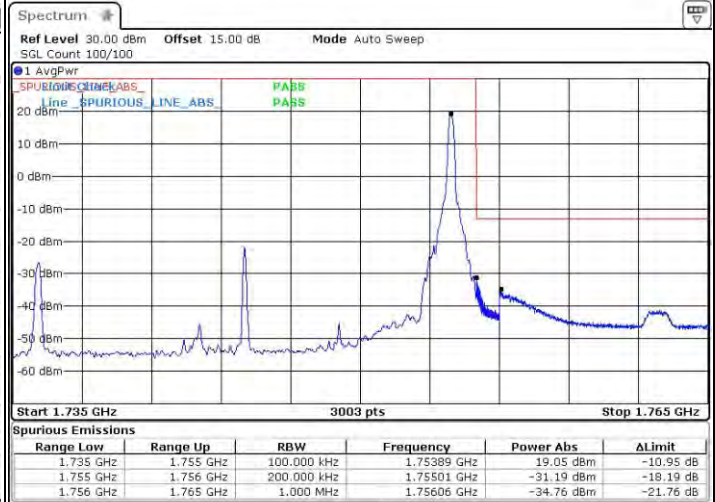

Lowest Band Edge / Full RB

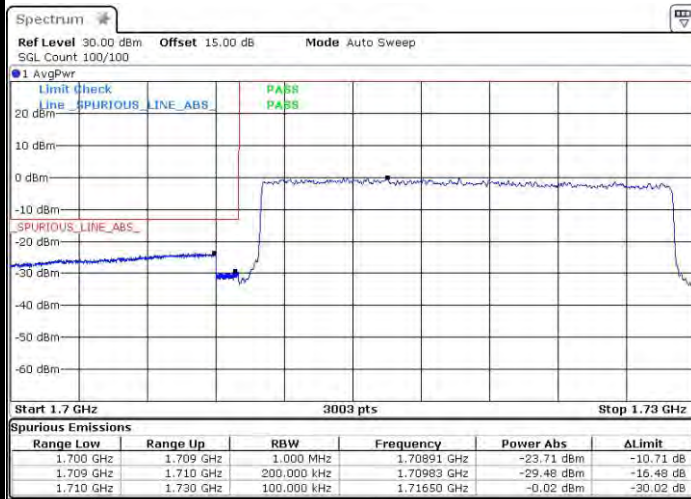

Highest Band Edge / Full RB

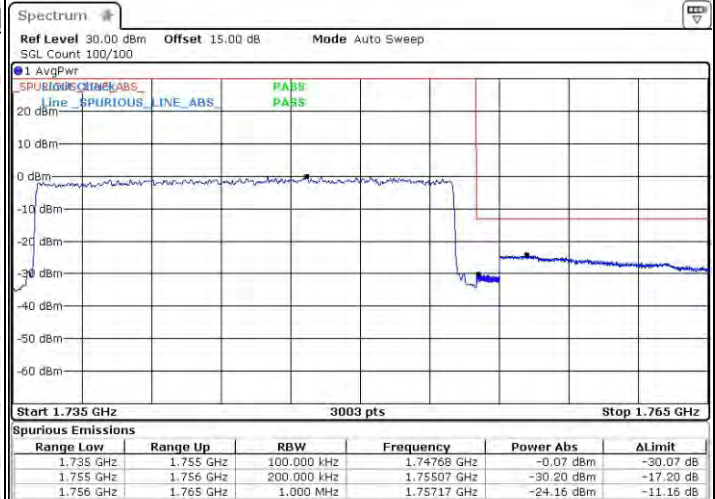





Conducted Spurious Emission

LTE Band 4 / 1.4MHz


Lowest Channel / QPSK

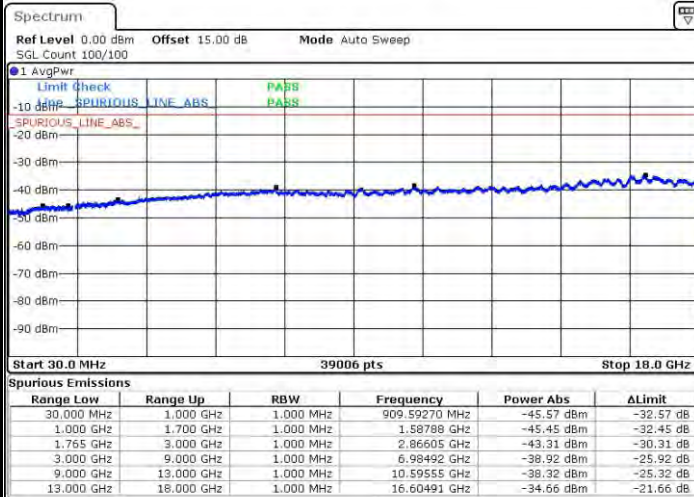


Lowest Channel / 16QAM

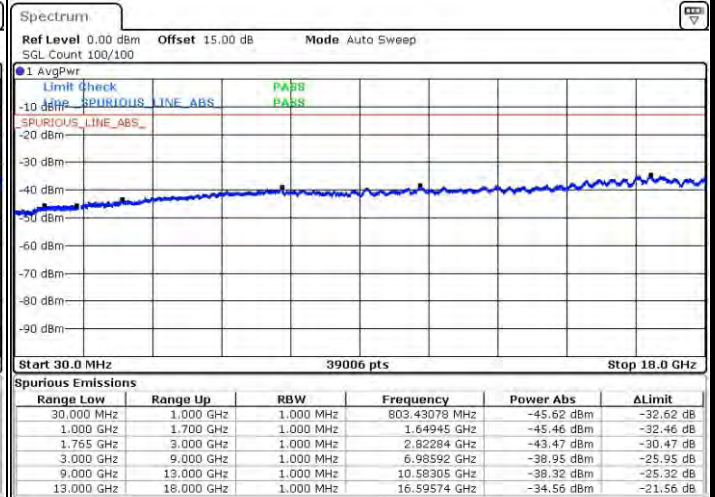

Middle Channel / QPSK

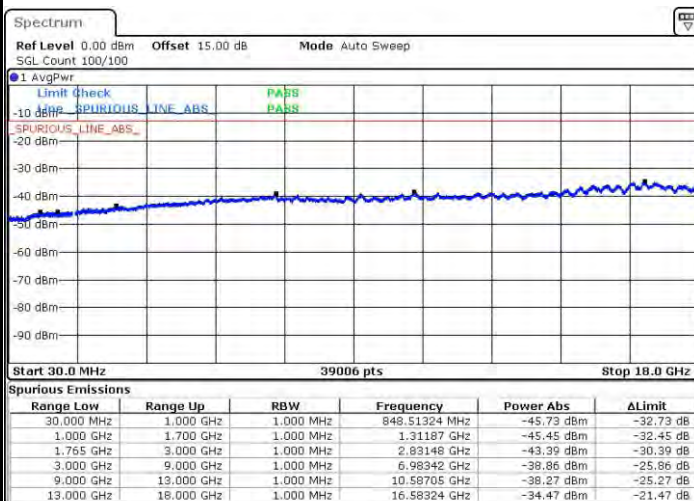


Middle Channel / 16QAM

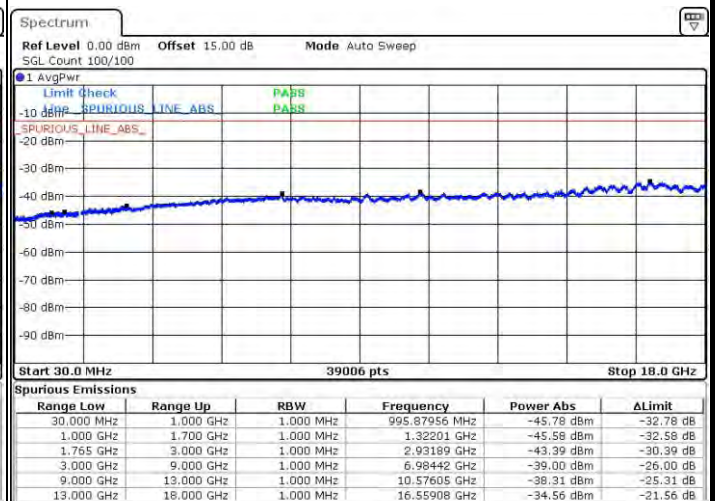




LTE Band 4 / 1.4MHz

Highest Channel / QPSK

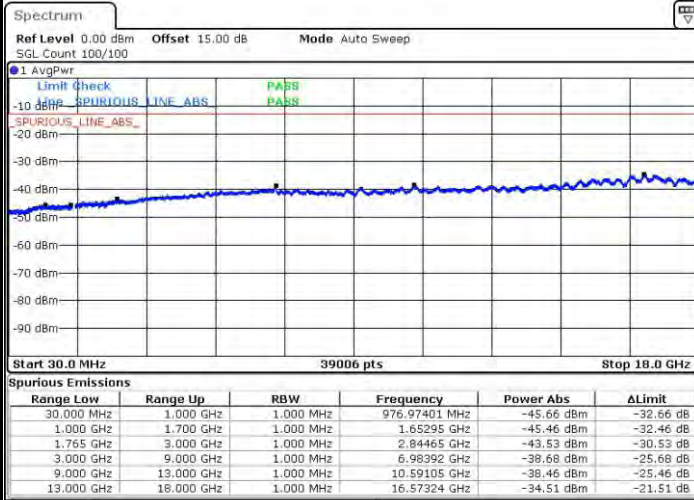

Date: 29.JAN.2015 11:27:28


Highest Channel / 16QAM

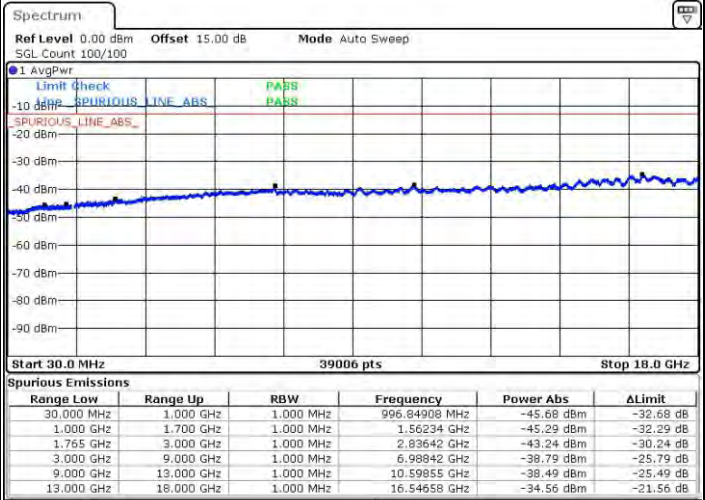

Date: 29.JAN.2015 11:28:32


LTE Band 4 / 3MHz

Lowest Channel / QPSK

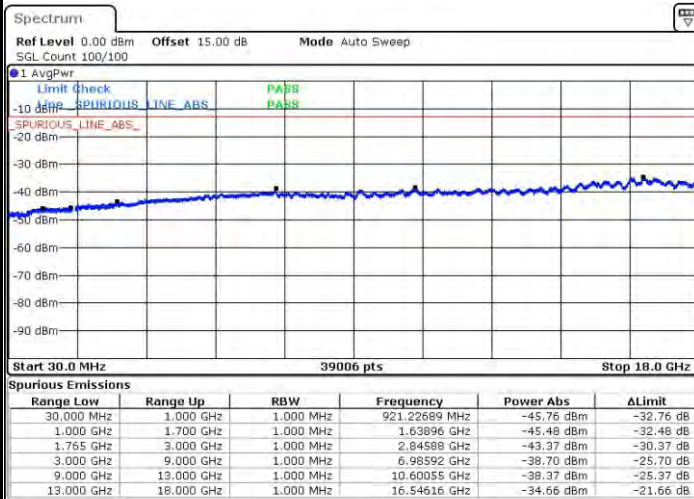

Date: 28.JAN.2015 15:43:26

Lowest Channel / 16QAM

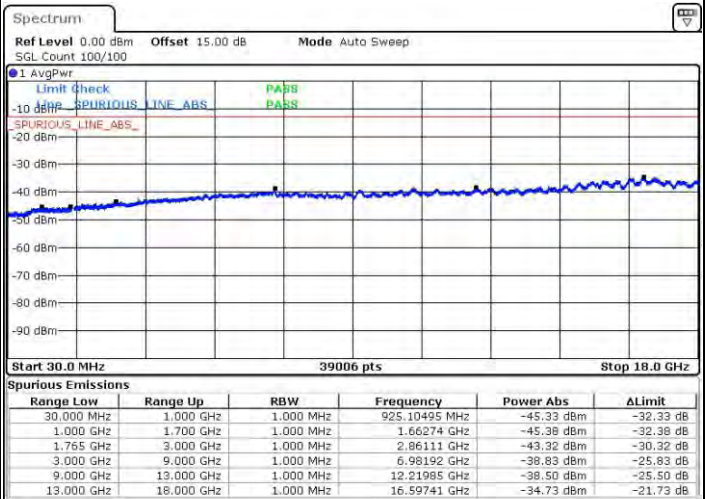


Date: 28.JAN.2015 15:44:47




LTE Band 4 / 3MHz

Middle Channel / QPSK

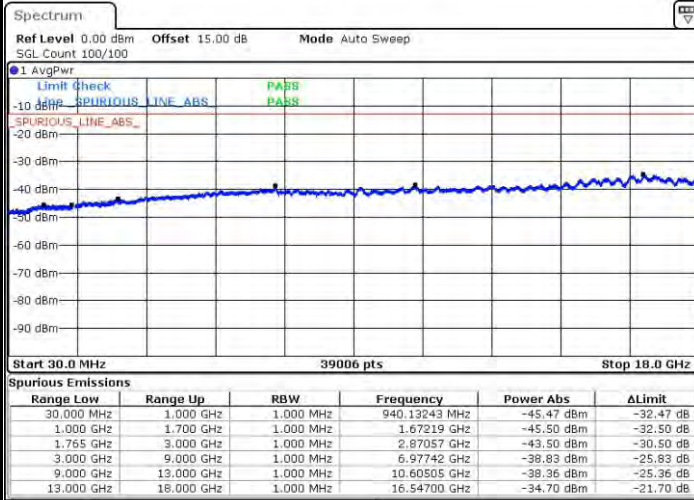


Date: 28.JAN.2015 15:46:53

Middle Channel / 16QAM

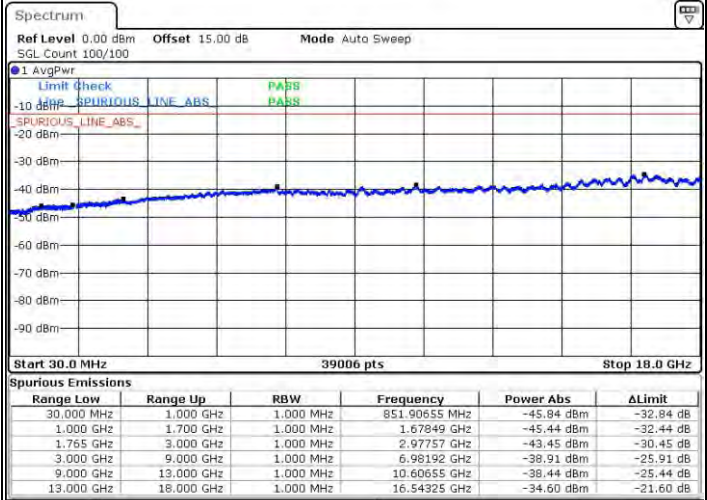


Date: 28.JAN.2015 15:48:14

Highest Channel / QPSK

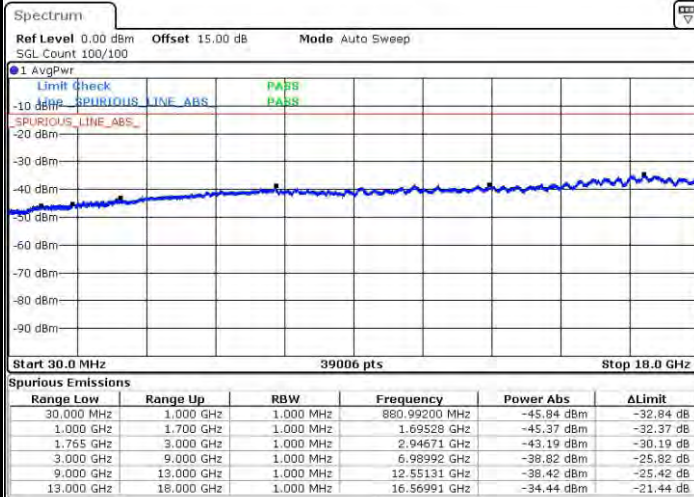

Date: 28.JAN.2015 15:55:40

Highest Channel / 16QAM

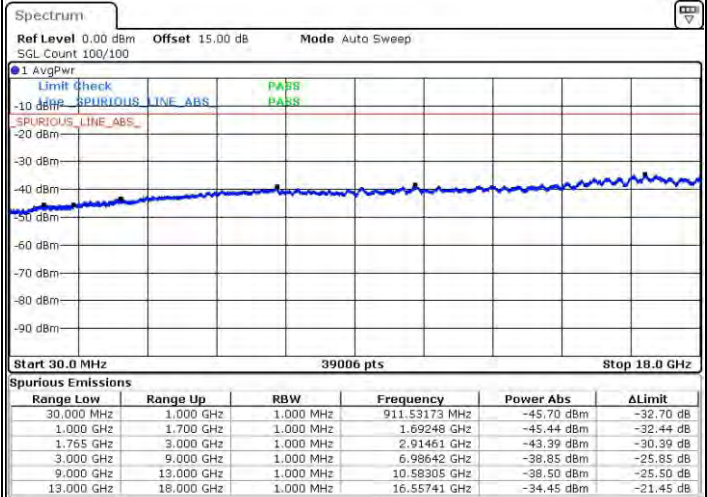


Date: 28.JAN.2015 15:57:01




LTE Band 4 / 5MHz

Lowest Channel / QPSK

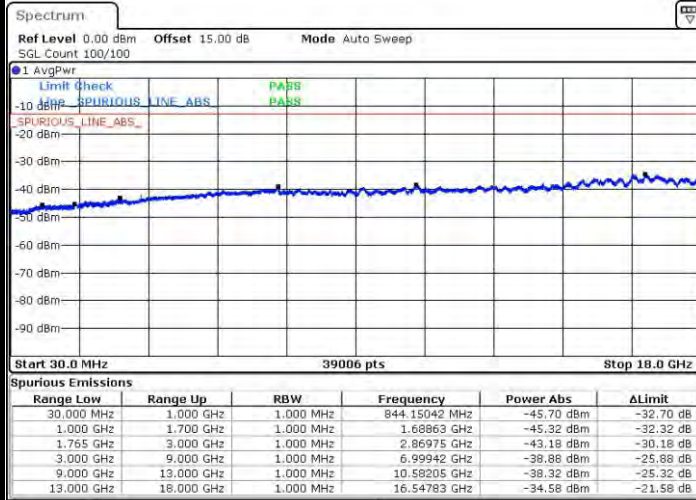


Date: 28.JAN.2015 16:07:52

Lowest Channel / 16QAM

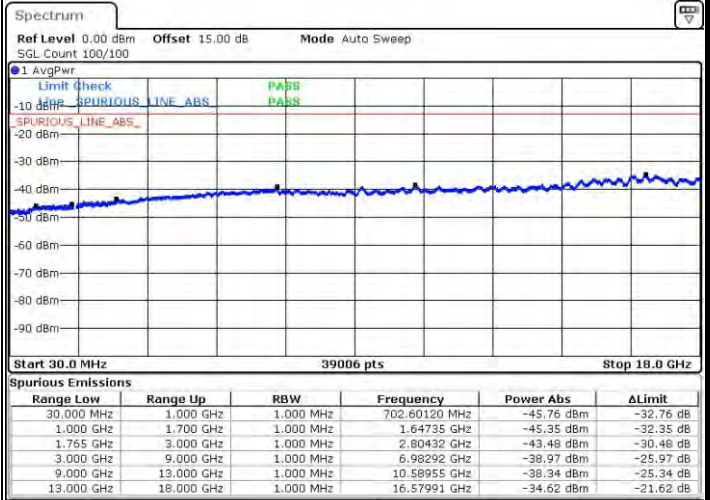


Date: 28.JAN.2015 16:09:13

Middle Channel / QPSK

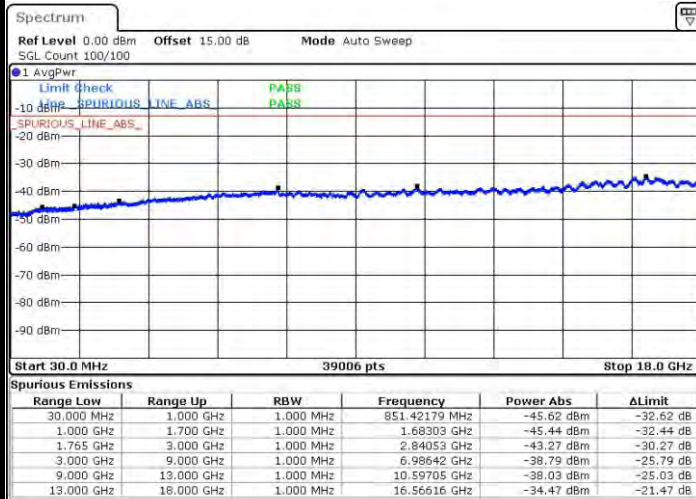

Date: 28.JAN.2015 16:11:20

Middle Channel / 16QAM

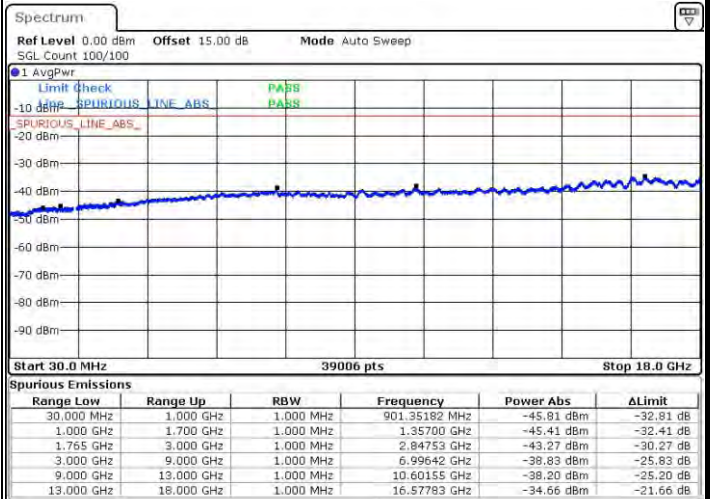


Date: 28.JAN.2015 16:12:41




LTE Band 4 / 5MHz

Highest Channel / QPSK

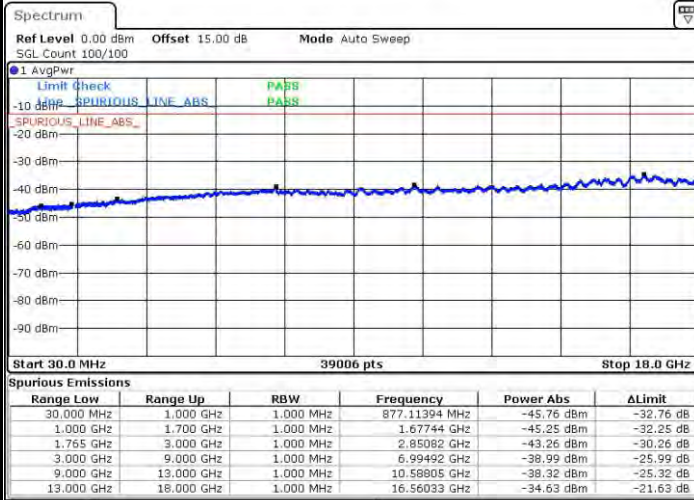

Date: 28.JAN.2015 16:22:42


Highest Channel / 16QAM

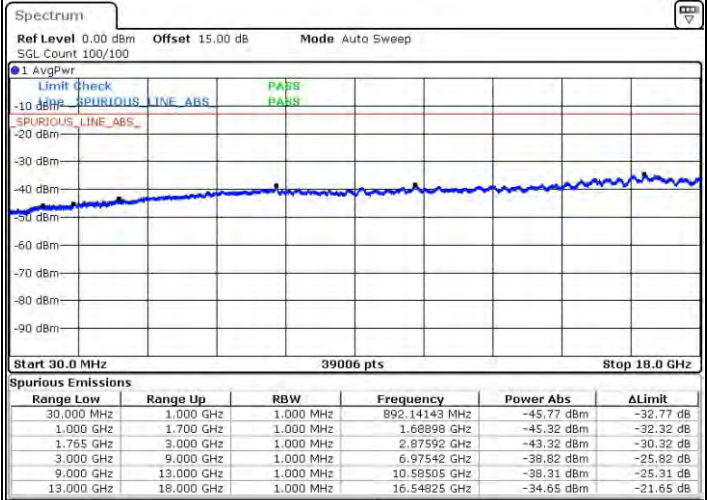

Date: 28.JAN.2015 16:23:27


LTE Band 4 / 10MHz

Lowest Channel / QPSK

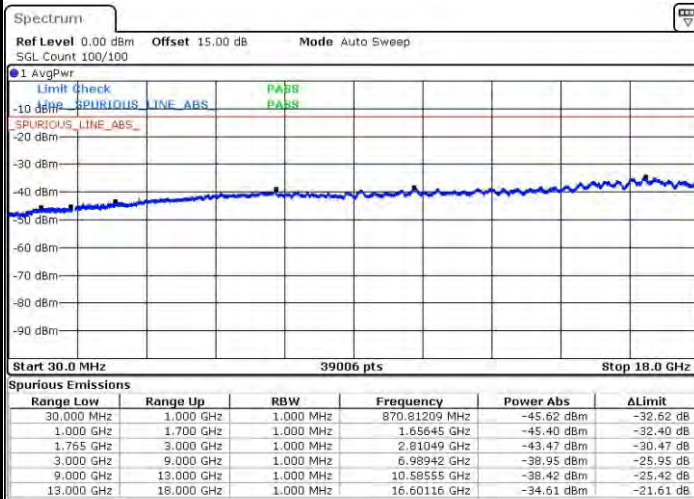

Date: 28.JAN.2015 16:31:01

Lowest Channel / 16QAM

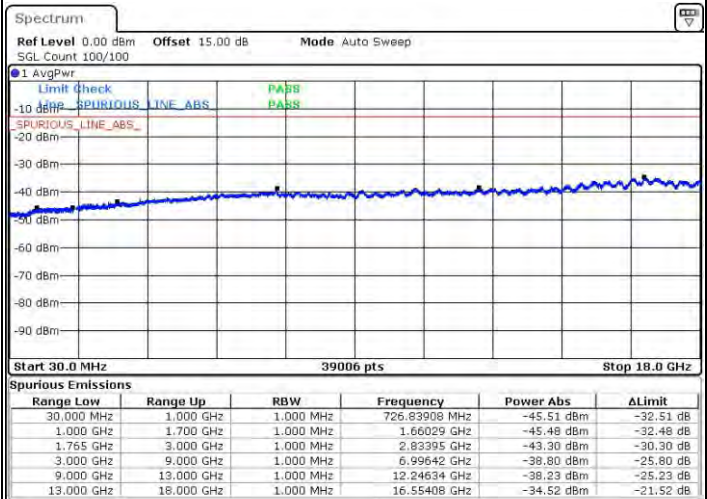


Date: 28.JAN.2015 16:32:22




LTE Band 4 / 10MHz

Middle Channel / QPSK

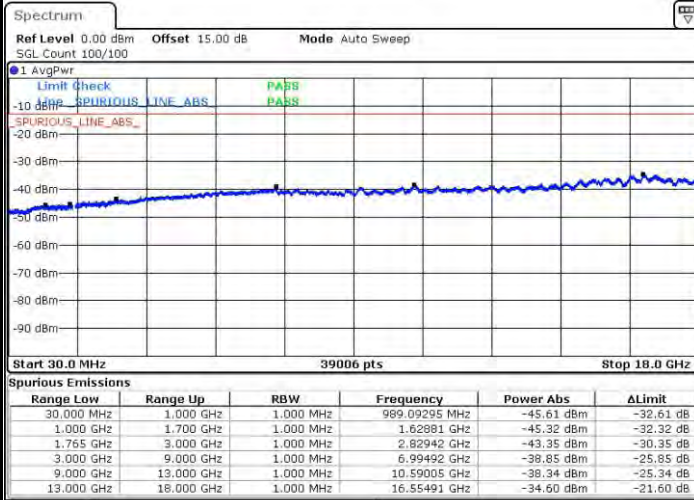


Date: 28.JAN.2015 16:34:27

Middle Channel / 16QAM

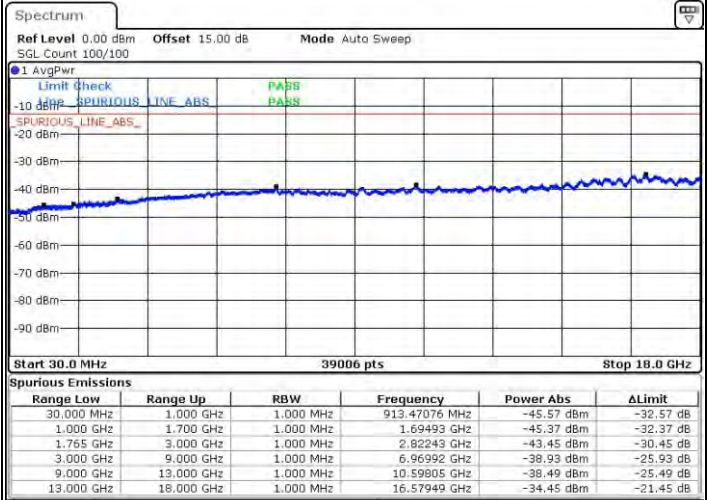


Date: 28.JAN.2015 16:35:46

Highest Channel / QPSK

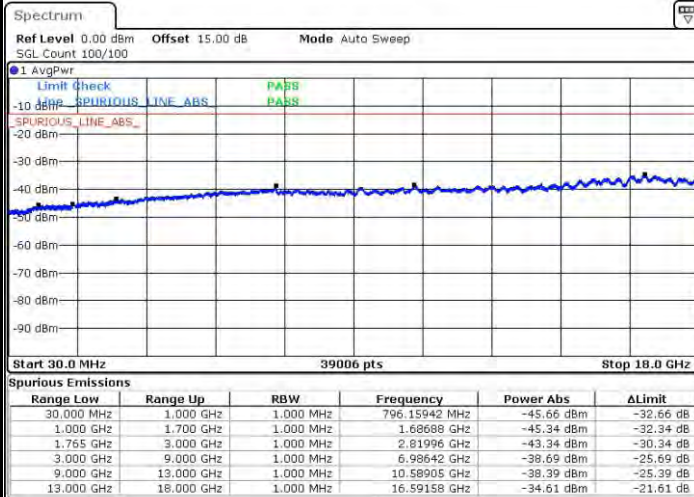

Date: 28.JAN.2015 16:43:25

Highest Channel / 16QAM

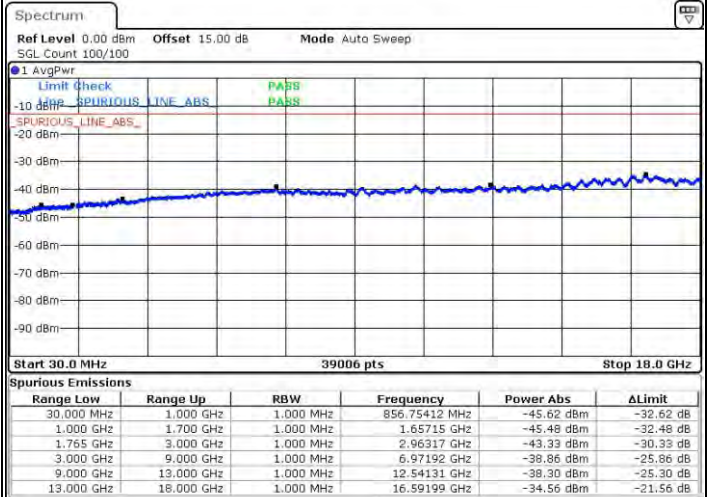

Date: 28.JAN.2015 16:44:47