

GSM850_GPRS10_Right Cheek_251

DUT: EUT

Communication System: GPRS 850-2solt; Frequency: 848.8 MHz;Duty Cycle: 1:4

Medium: H835 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.927 \text{ mho/m}$; $\epsilon_r = 39.4$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.273 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.51 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.319 W/kg

SAR(1 g) = 0.244 mW/g; SAR(10 g) = 0.183 mW/g

Maximum value of SAR (measured) = 0.270 mW/g

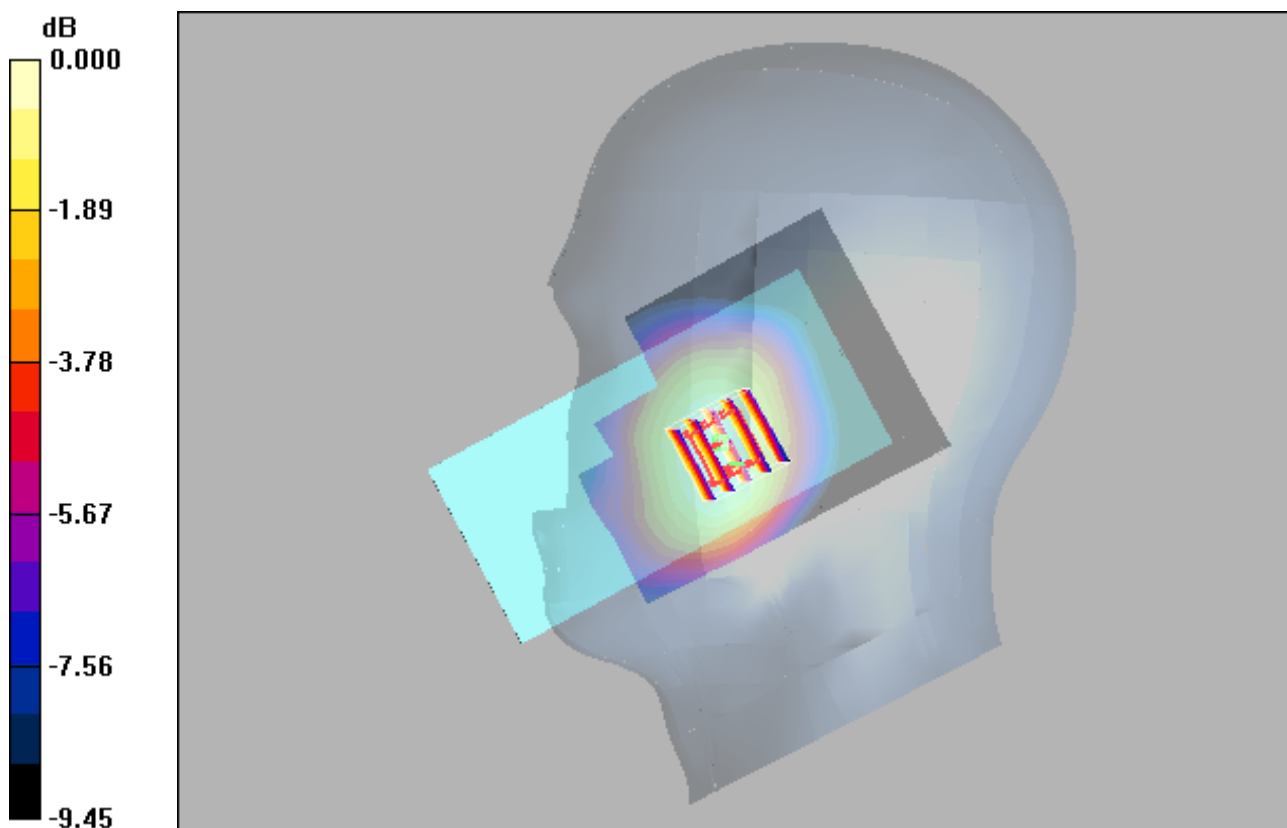

0 dB = 0.270mW/g

GSM1900_GPRS10_Right Cheek_512

DUT: EUT


Communication System: GPRS1900-2slots; Frequency: 1850.2 MHz; Duty Cycle: 1:4
Medium: H1900 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.771 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.3 V/m; Power Drift = 0.076 dB
Peak SAR (extrapolated) = 1.13 W/kg
SAR(1 g) = 0.589 mW/g; SAR(10 g) = 0.310 mW/g
Maximum value of SAR (measured) = 0.690 mW/g

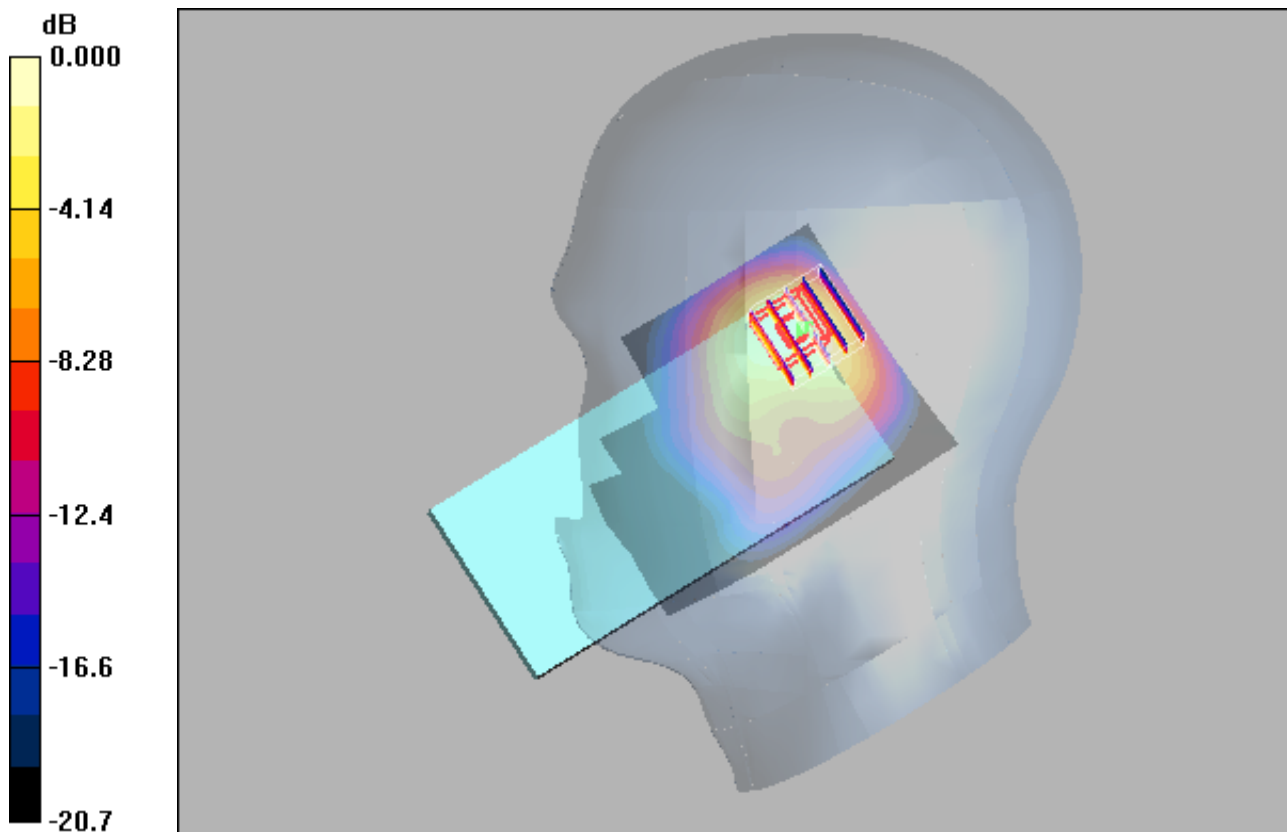

0 dB = 0.690mW/g

WCDMA II_RMC12.2K_Right Cheek_9262

DUT: EUT


Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
 Medium: H1900 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.552 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 12.2 V/m; Power Drift = 0.060 dB
 Peak SAR (extrapolated) = 0.826 W/kg
SAR(1 g) = 0.439 mW/g; SAR(10 g) = 0.239 mW/g
 Maximum value of SAR (measured) = 0.523 mW/g

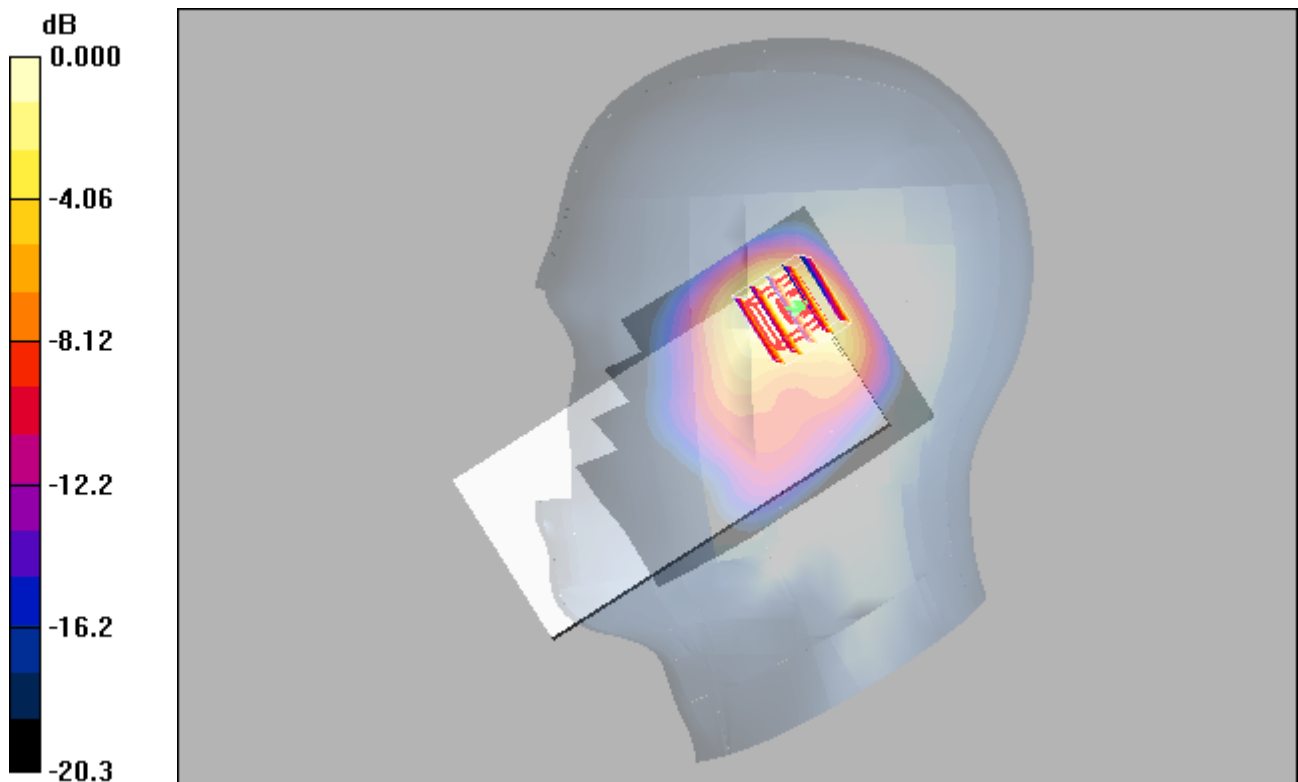

0 dB = 0.523mW/g

WCDMA IV_RMC12.2K_Right Cheek_1513

DUT: EUT


Communication System: WCDMA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1
 Medium: H1750 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.32$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.36, 5.36, 5.36); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.588 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 12.7 V/m; Power Drift = 0.031 dB
 Peak SAR (extrapolated) = 0.834 W/kg
SAR(1 g) = 0.465 mW/g; SAR(10 g) = 0.252 mW/g
 Maximum value of SAR (measured) = 0.562 mW/g

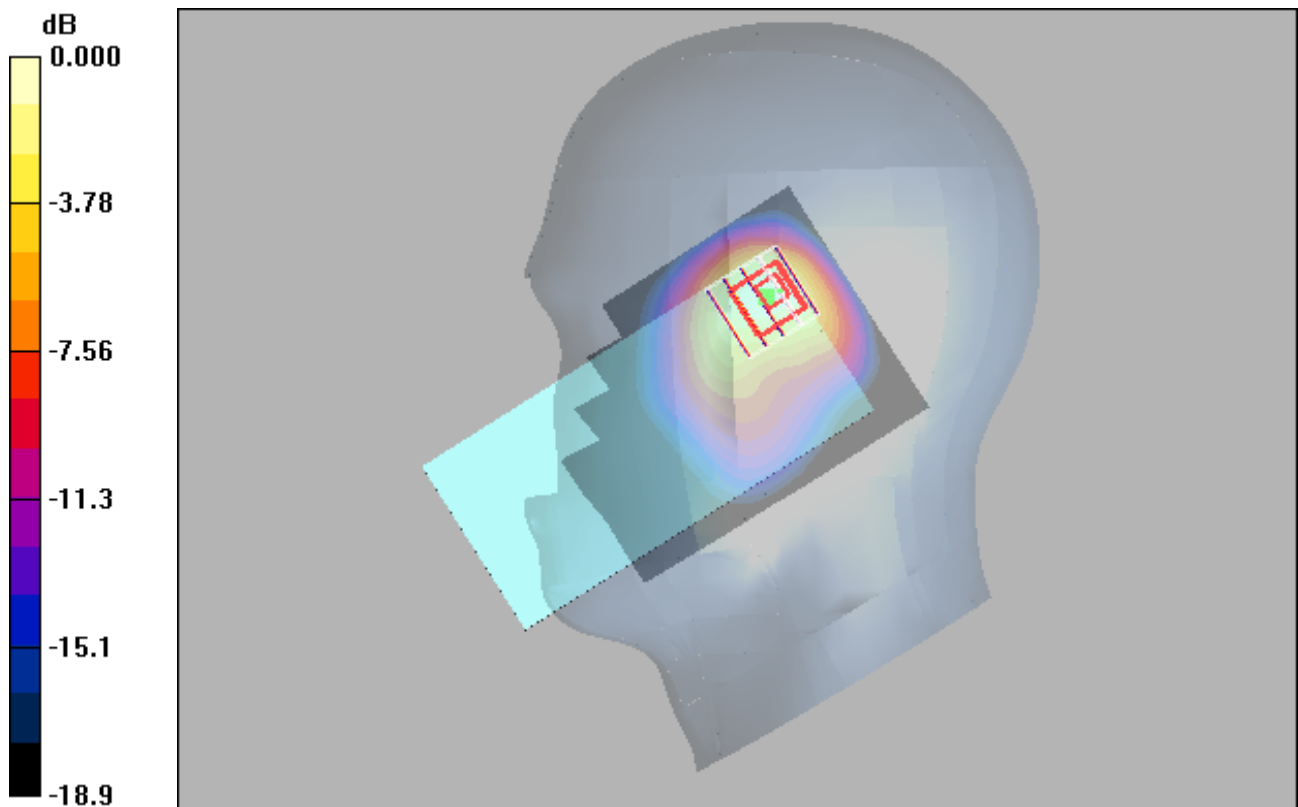

0 dB = 0.562mW/g

WCDMA V_RMC12.2K_Right Cheek_4233

DUT: EUT

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 847 \text{ MHz}$; $\sigma = 0.925 \text{ mho/m}$; $\epsilon_r = 39.4$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.210 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.39 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.240 W/kg

SAR(1 g) = 0.186 mW/g; SAR(10 g) = 0.140 mW/g

Maximum value of SAR (measured) = 0.204 mW/g

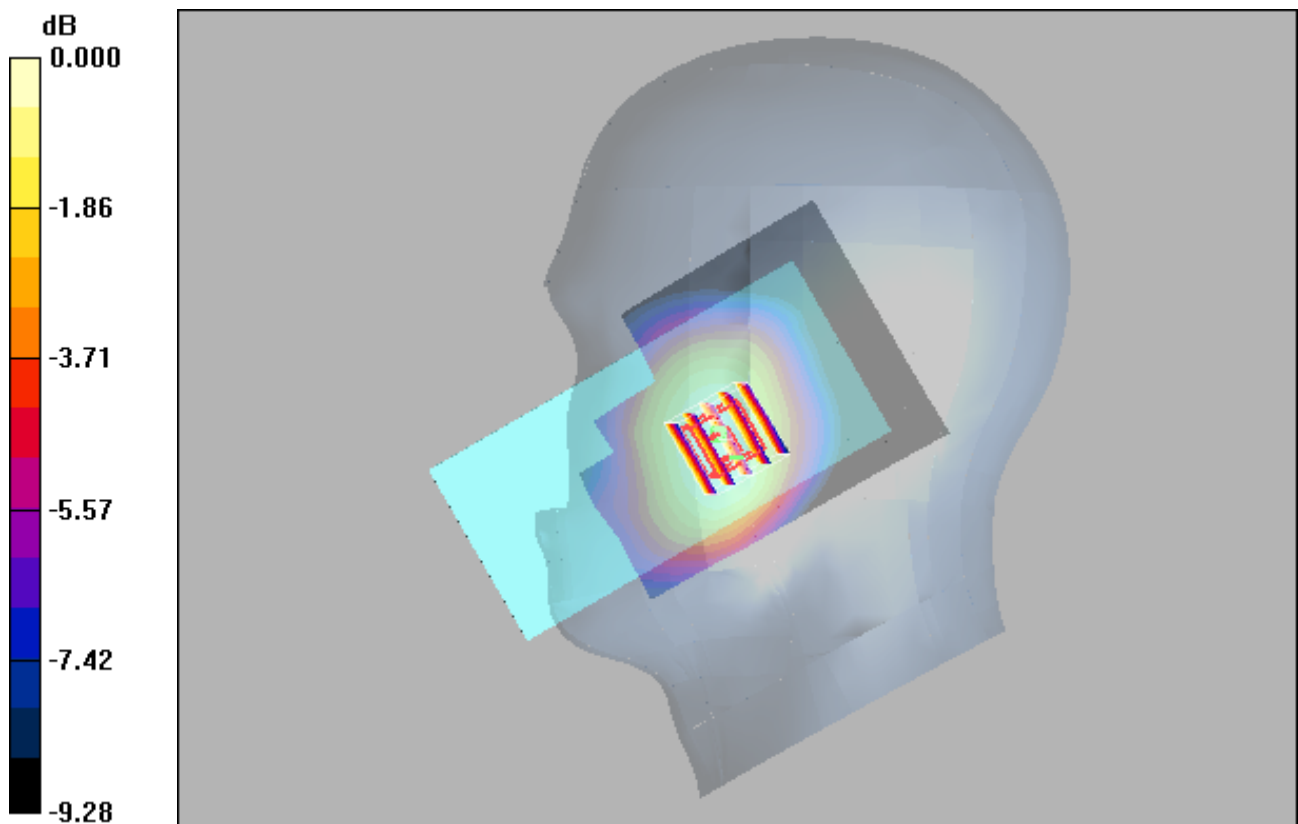

0 dB = 0.204mW/g

LTE 2_QPSK20M_1_0_Right Cheek_18900

DUT: EUT


Communication System: LTE Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium: H1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.541 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 12.3 V/m; Power Drift = -0.149 dB
 Peak SAR (extrapolated) = 0.864 W/kg
SAR(1 g) = 0.458 mW/g; SAR(10 g) = 0.244 mW/g
 Maximum value of SAR (measured) = 0.553 mW/g

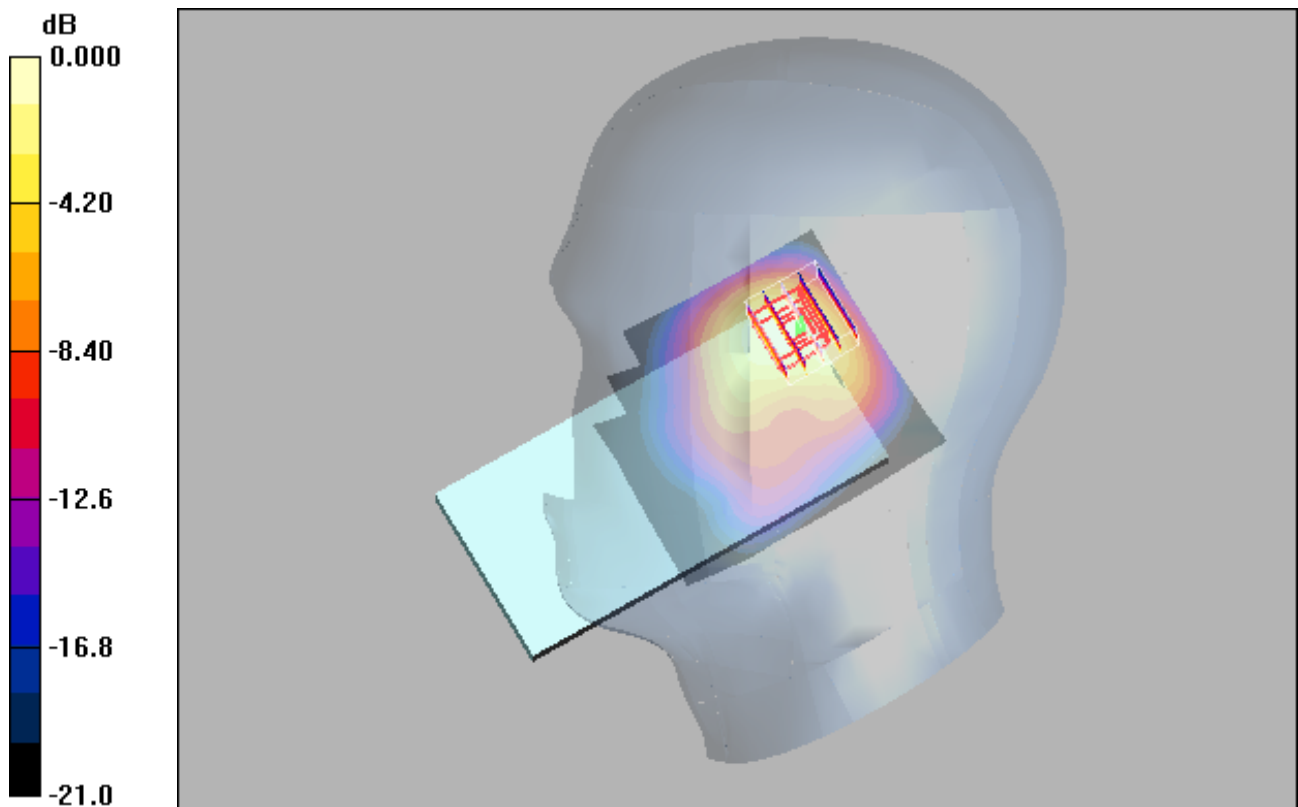

0 dB = 0.553mW/g

LTE 5_QPSK10M_1_25_Left Cheek_20450

DUT: EUT

Communication System: LTE Band5; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 829$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.077 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.80 V/m; Power Drift = 0.147 dB

Peak SAR (extrapolated) = 0.091 W/kg

SAR(1 g) = 0.072 mW/g; SAR(10 g) = 0.054 mW/g

Maximum value of SAR (measured) = 0.079 mW/g

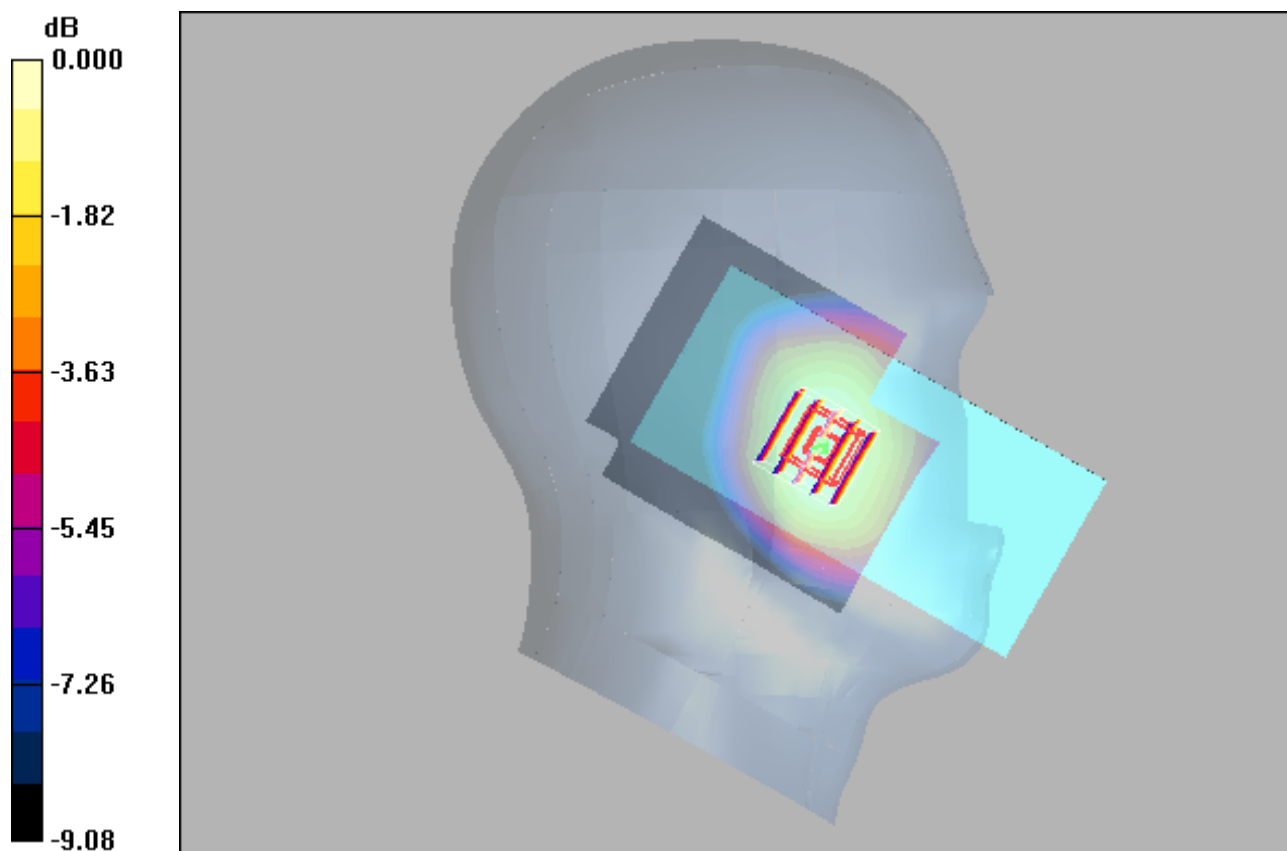

0 dB = 0.079mW/g

LTE 7_QPSK20M_1_0_Right Tilted_21100

DUT: EUT


Communication System: LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium: H2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (interpolated) = 0.932 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 7.32 V/m; Power Drift = -0.074 dB
 Peak SAR (extrapolated) = 1.65 W/kg
SAR(1 g) = 0.660 mW/g; SAR(10 g) = 0.257 mW/g
 Maximum value of SAR (measured) = 0.956 mW/g

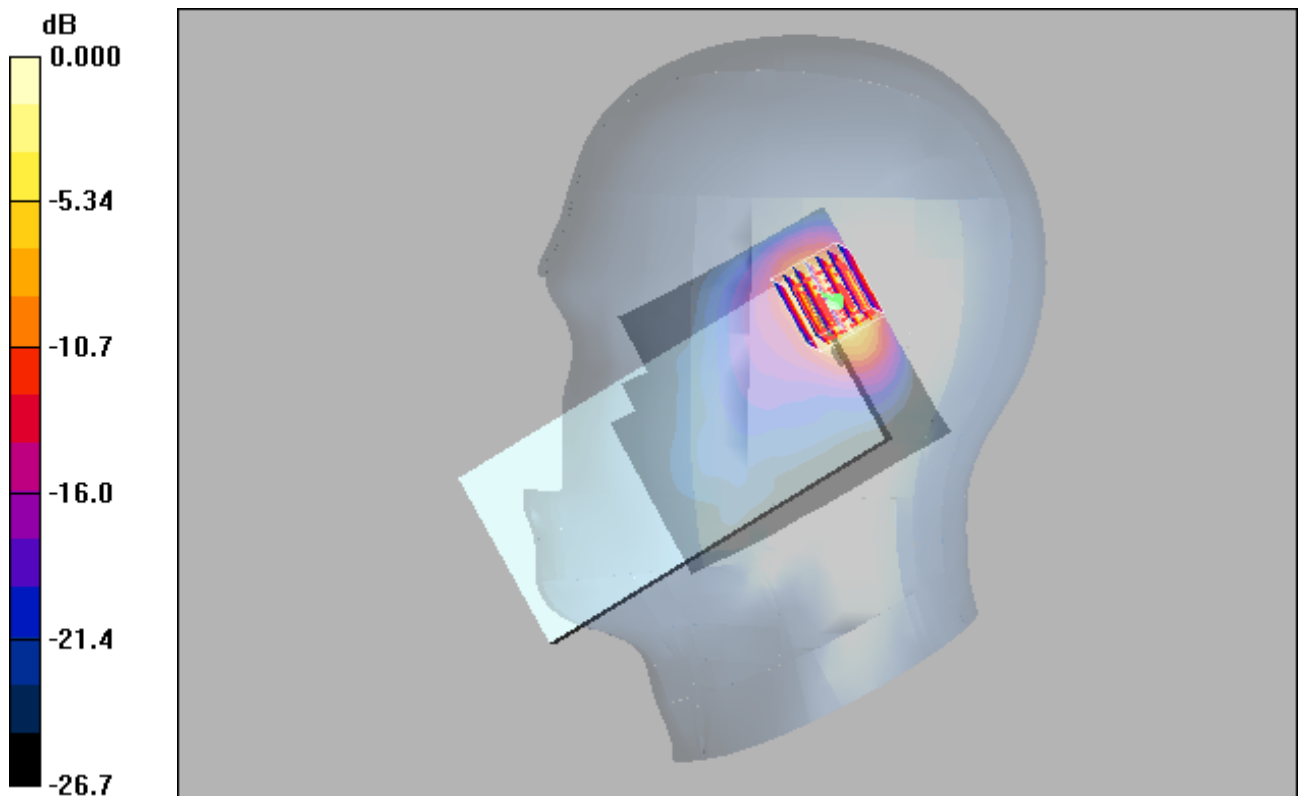

0 dB = 0.956mW/g

LTE 12_QPSK10M_1_49_Right Cheek_23095

DUT: EUT

Communication System: LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.85$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.28, 6.28, 6.28); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.157 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.53 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.182 W/kg

SAR(1 g) = 0.144 mW/g; SAR(10 g) = 0.113 mW/g

Maximum value of SAR (measured) = 0.158 mW/g

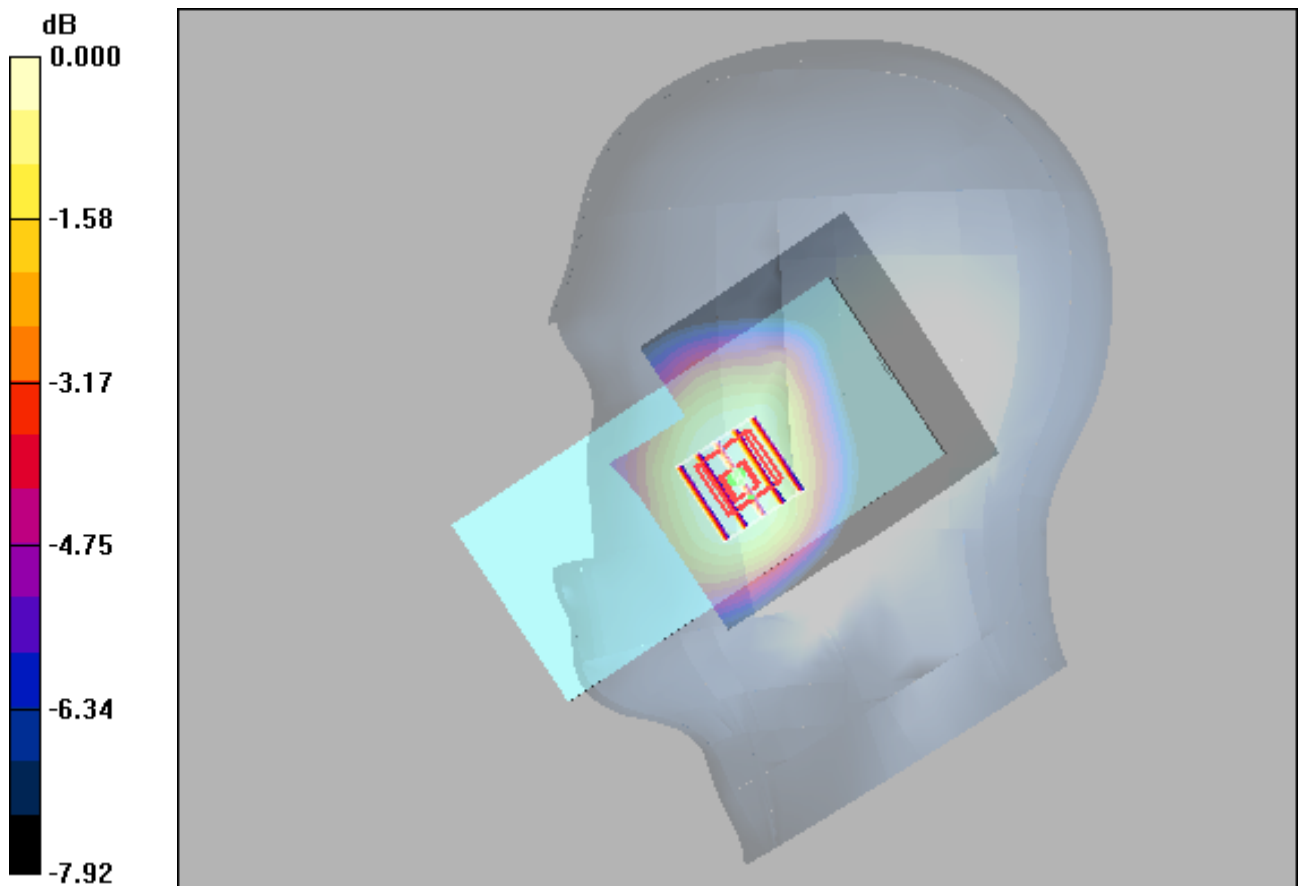

0 dB = 0.158mW/g

LTE 66_QPSK20M_1_0_Right Cheek_132572

DUT: EUT


Communication System: LTE Band 66&QPSK20M; Frequency: 1770 MHz;Duty Cycle: 1:1
 Medium: H1750 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.36, 5.36, 5.36); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.821 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 14.7 V/m; Power Drift = 0.188 dB
 Peak SAR (extrapolated) = 1.23 W/kg
SAR(1 g) = 0.668 mW/g; SAR(10 g) = 0.363 mW/g
 Maximum value of SAR (measured) = 0.794 mW/g

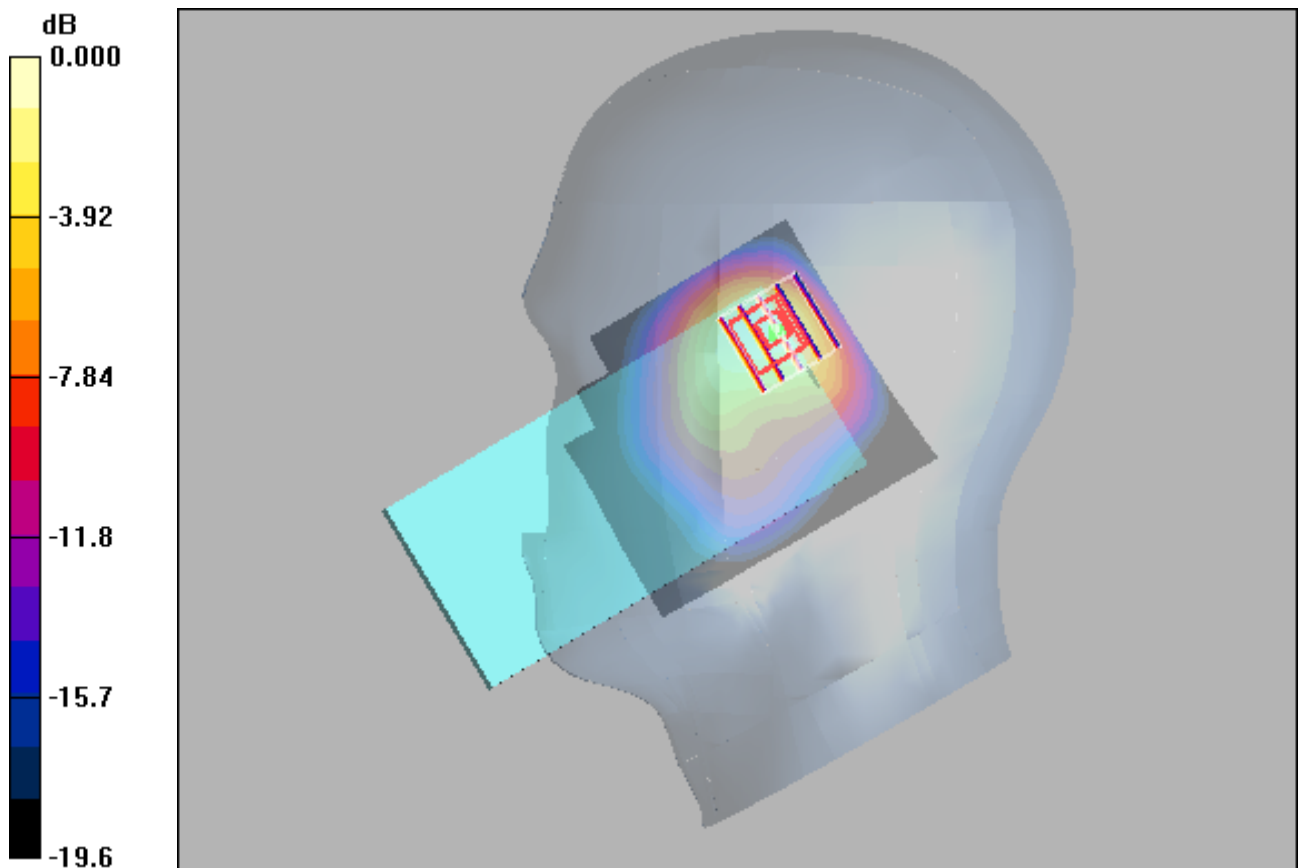

0 dB = 0.794mW/g

EDR_DH5_Left Tilted_0

DUT: EUT


Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.78$ mho/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.080 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.89 V/m; Power Drift = 0.139 dB
Peak SAR (extrapolated) = 0.141 W/kg
SAR(1 g) = 0.059 mW/g; SAR(10 g) = 0.022 mW/g
Maximum value of SAR (measured) = 0.082 mW/g

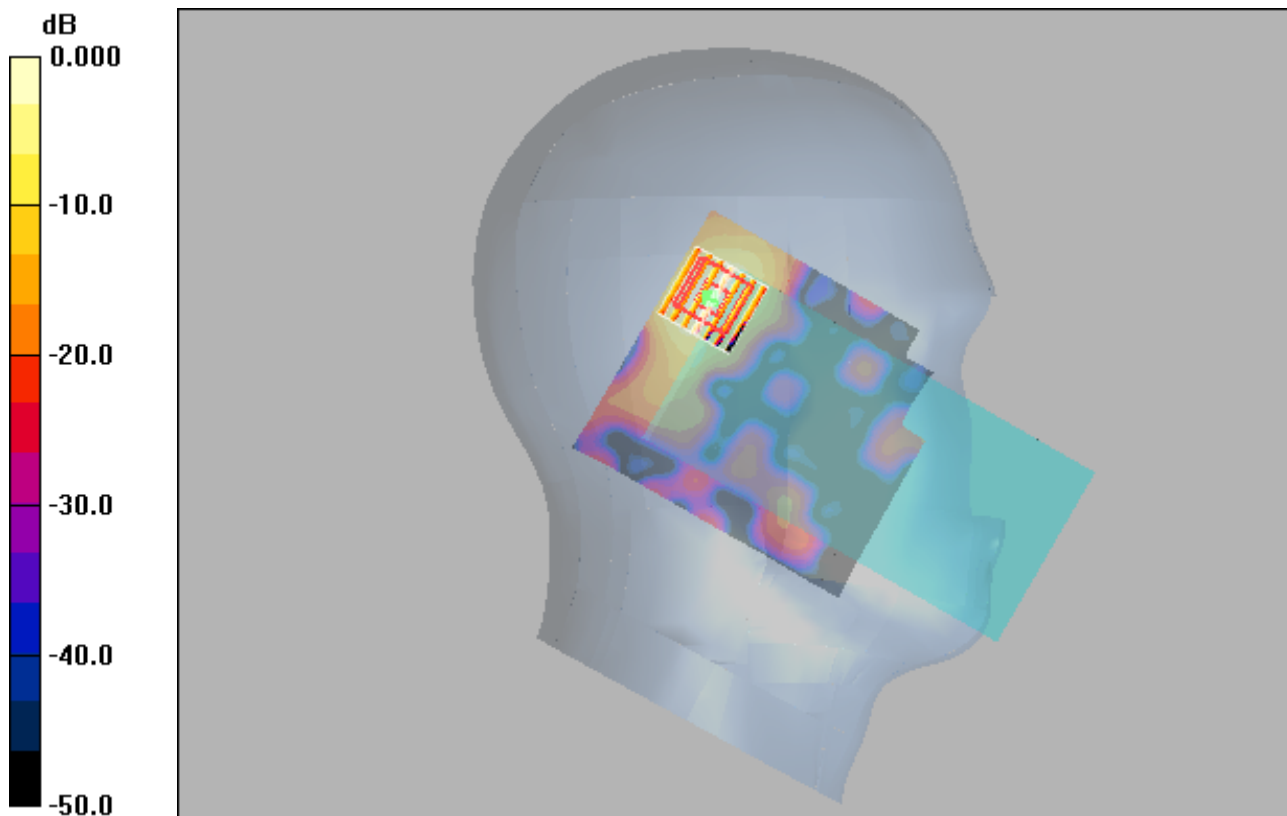

0 dB = 0.082mW/g

WIFI 2.4G_802.11b_Left Tilted_6

DUT: EUT

Communication System: Wlan 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 37.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.849 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.88 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.549 mW/g; SAR(10 g) = 0.215 mW/g

Maximum value of SAR (measured) = 0.780 mW/g

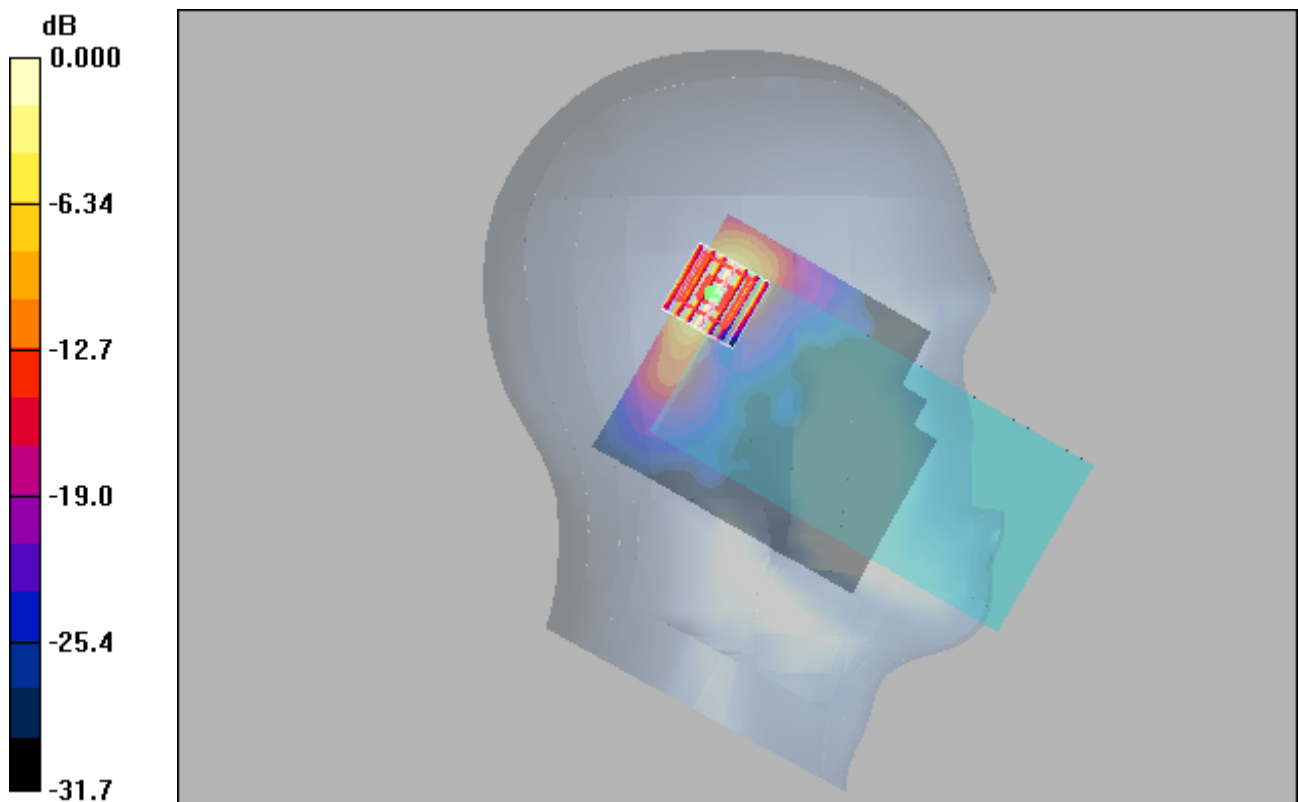

0 dB = 0.780mW/g

WIFI 5G_802.11ac80_Left Cheek_42

DUT: EUT


Communication System: 802.11ac (VHT80); Frequency: 5210 MHz; Duty Cycle: 1:1.04
Medium: H5250 Medium parameters used: $f = 5210$ MHz; $\sigma = 4.82$ mho/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (111x121x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.053 mW/g

Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.495 V/m; Power Drift = 0.087 dB
Peak SAR (extrapolated) = 0.103 W/kg
SAR(1 g) = 0.00468 mW/g; SAR(10 g) = 0.00135 mW/g
Maximum value of SAR (measured) = 0.042 mW/g

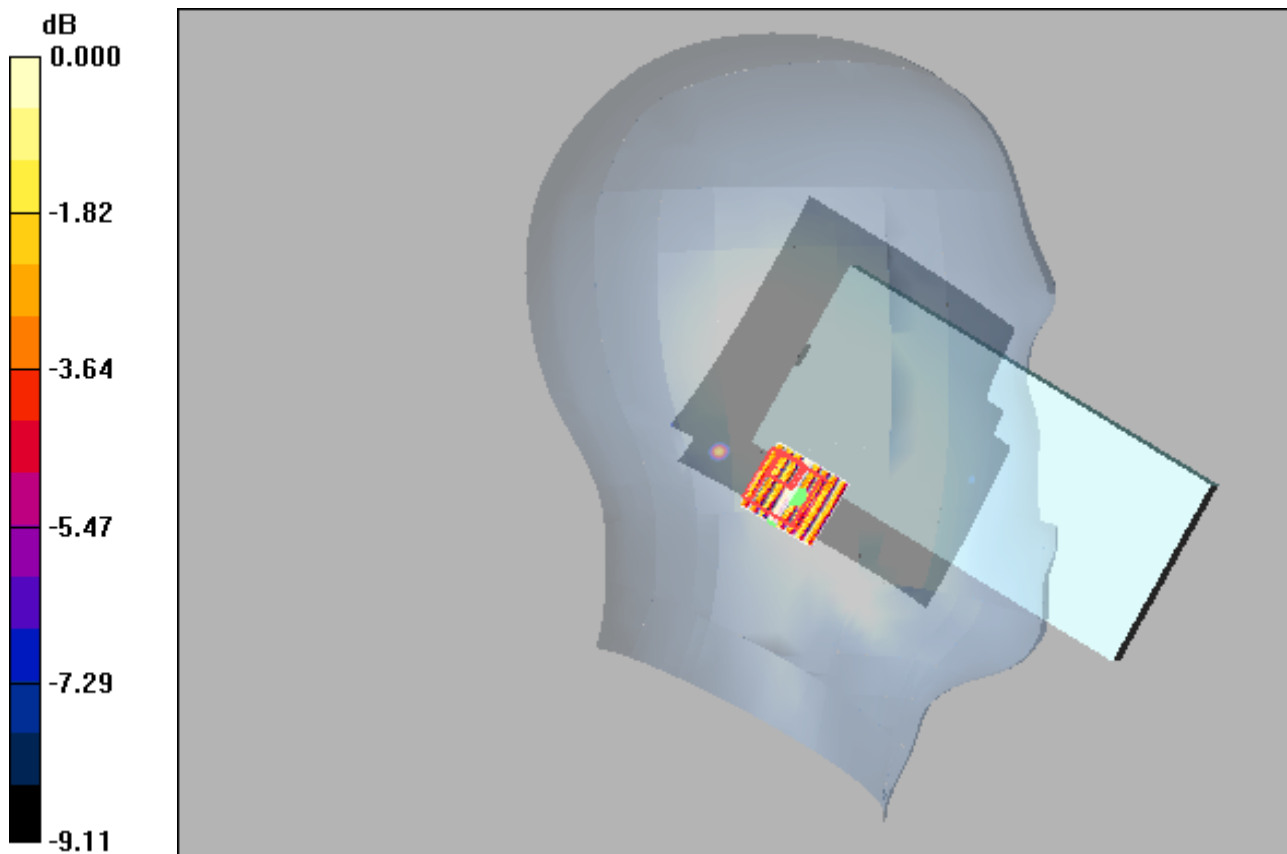

0 dB = 0.042mW/g

WIFI 5G_802.11ac80_Left Tilted_58

DUT: EUT


Communication System: 802.11ac (VHT80); Frequency: 5290 MHz; Duty Cycle: 1:1.04
Medium: H5250 Medium parameters used: $f = 5290$ MHz; $\sigma = 4.88$ mho/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (111x121x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.383 mW/g

Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 4.42 V/m; Power Drift = 0.187 dB
Peak SAR (extrapolated) = 0.961 W/kg
SAR(1 g) = 0.193 mW/g; SAR(10 g) = 0.045 mW/g
Maximum value of SAR (measured) = 0.450 mW/g

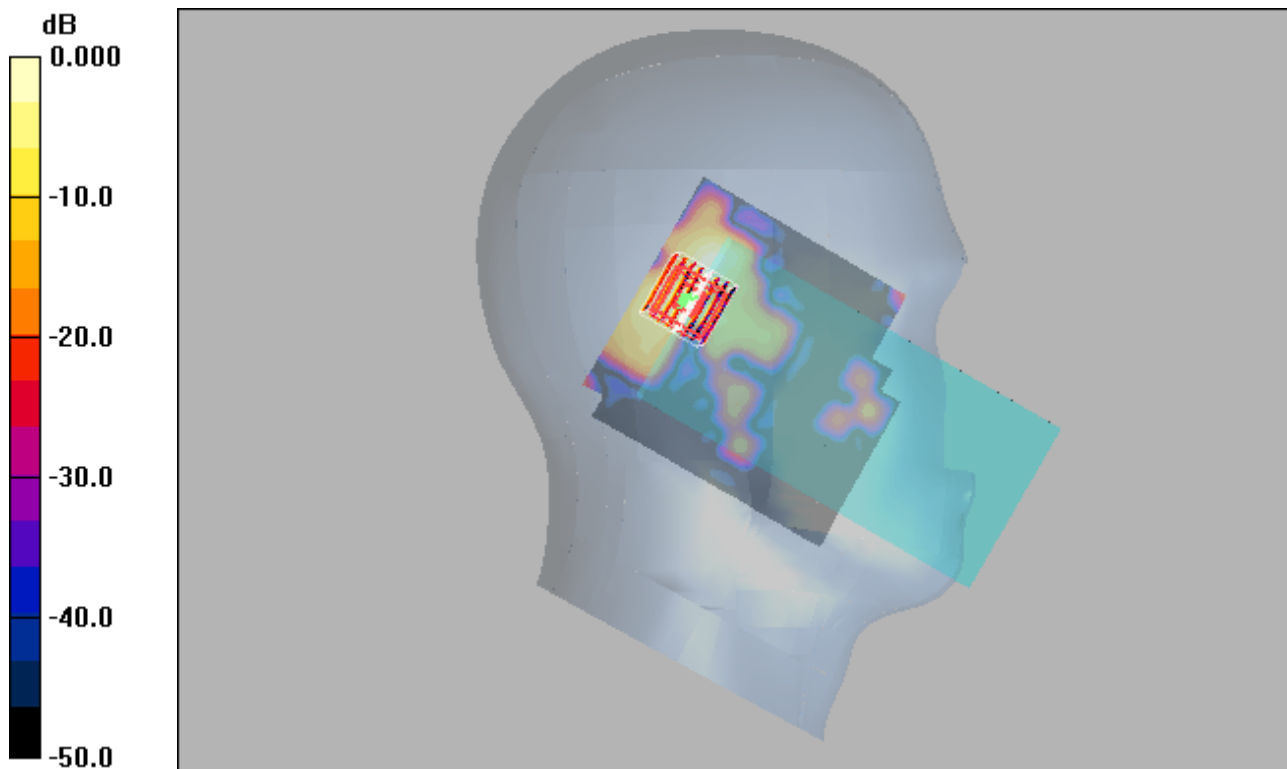

0 dB = 0.450mW/g

WIFI 5G_802.11ac80_Left Cheek_106

DUT: EUT


Communication System: 802.11ac (VHT80); Frequency: 5530 MHz; Duty Cycle: 1:1.04
 Medium: H5600 Medium parameters used: $f = 5530$ MHz; $\sigma = 5.17$ mho/m; $\epsilon_r = 35.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.82, 4.82, 4.82); Calibrated: 2022/8/6
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (111x121x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.008 mW/g

Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 0.550 V/m; Power Drift = -0.090 dB
 Peak SAR (extrapolated) = 0.010 W/kg
SAR(1 g) = 3e-005 mW/g; SAR(10 g) = 3.9e-006 mW/g
 Maximum value of SAR (measured) = 0.012 mW/g

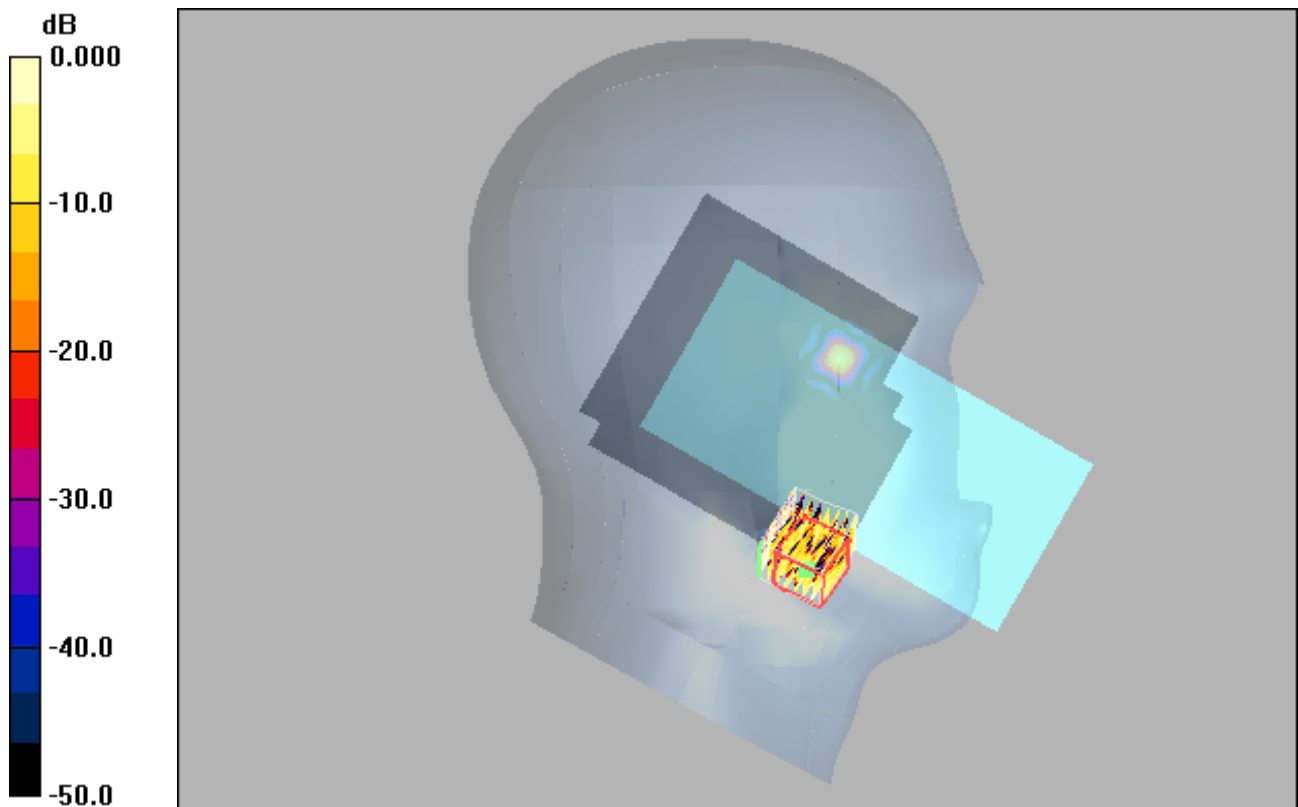

0 dB = 0.012mW/g

WIFI 5G_802.11ac80_Left Tilted_155

DUT: EUT


Communication System: 802.11ac (VHT80); Frequency: 5775 MHz; Duty Cycle: 1:1.04
 Medium: H5800 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.42$ mho/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (111x121x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.009 mW/g

Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 3.72 V/m; Power Drift = -0.168 dB
 Peak SAR (extrapolated) = 0.032 W/kg
SAR(1 g) = 0.000808 mW/g; SAR(10 g) = 0.00024 mW/g
 Maximum value of SAR (measured) = 0.015 mW/g

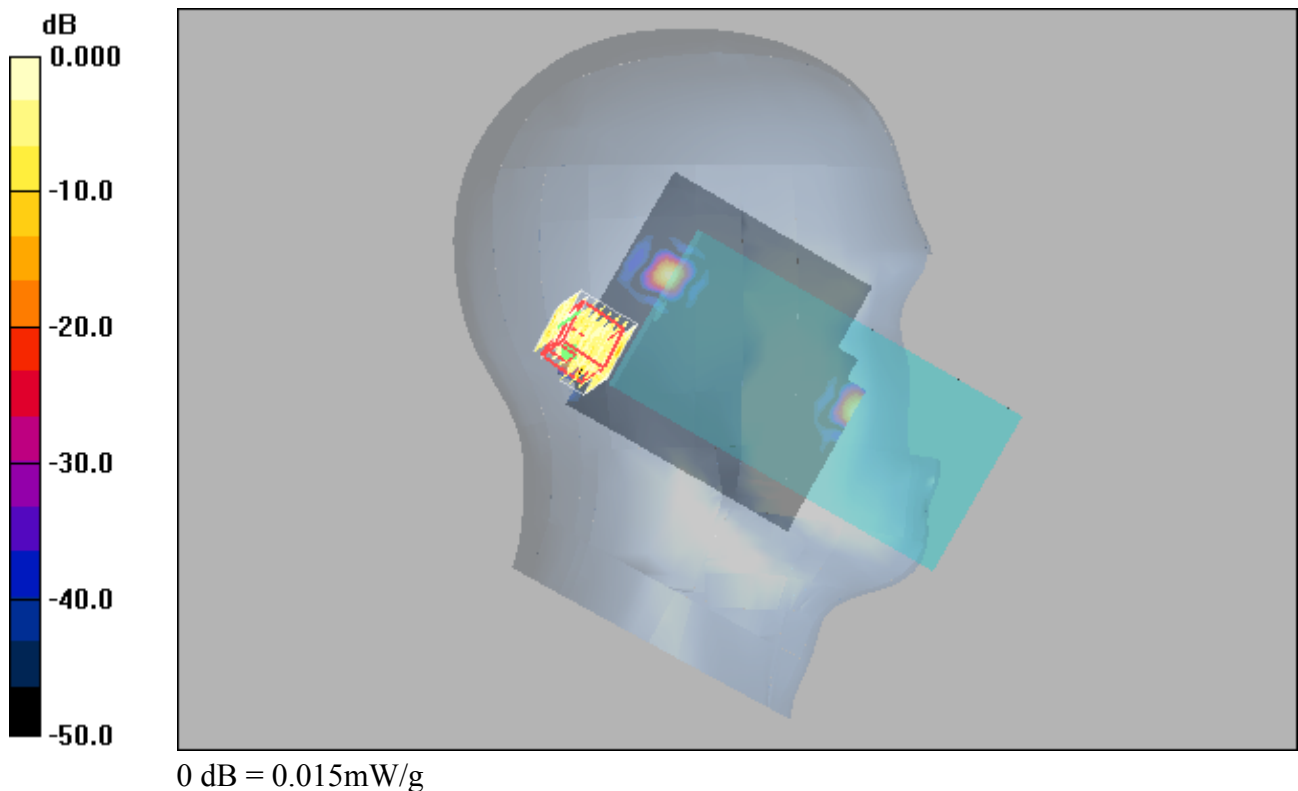

GSM850_GPRS10_Rear Face_10MM_251

DUT: EUT

Communication System: GPRS 850-2solt; Frequency: 848.8 MHz;Duty Cycle: 1:4

Medium: H835 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.927 \text{ mho/m}$; $\epsilon_r = 39.4$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.291 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.8 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.427 W/kg

SAR(1 g) = 0.238 mW/g; SAR(10 g) = 0.137 mW/g

Maximum value of SAR (measured) = 0.278 mW/g

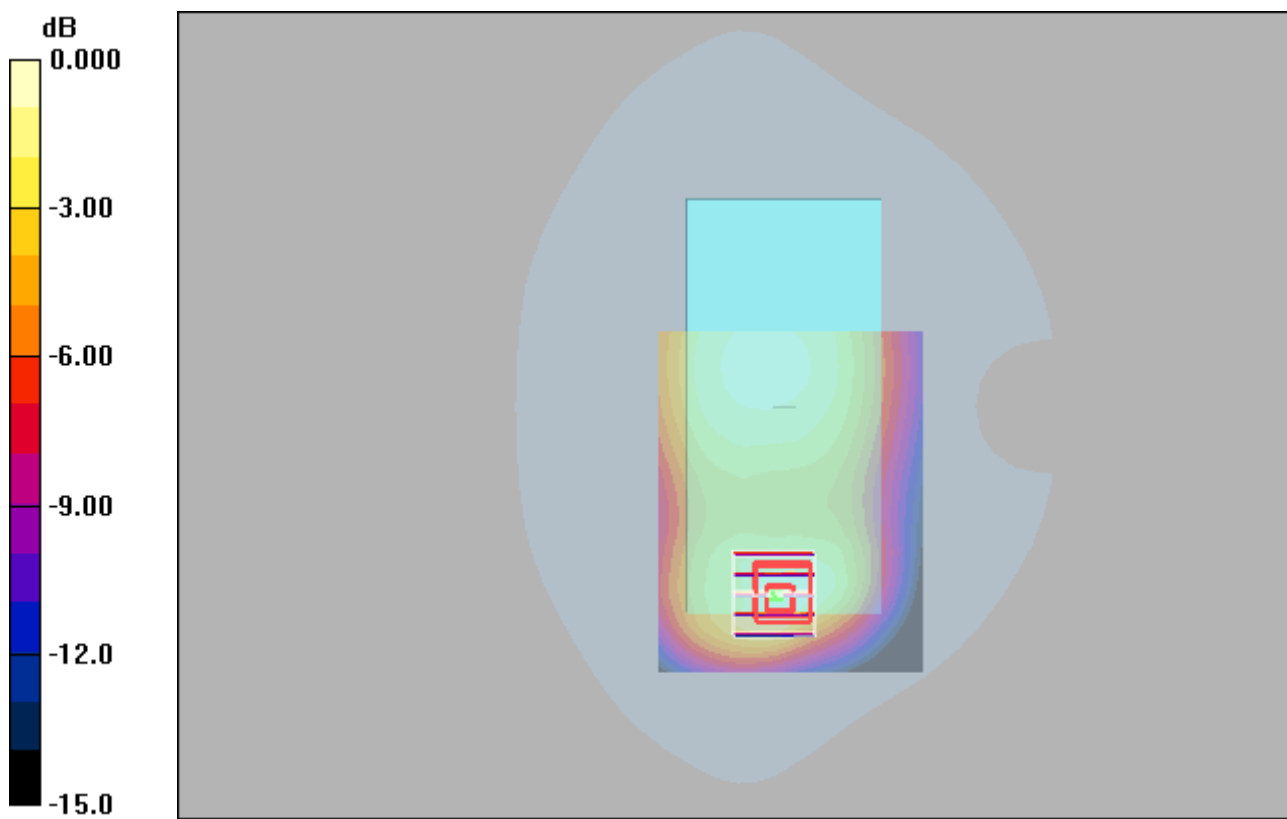

0 dB = 0.278mW/g

GSM1900_GPRS10_Rear Face_10mm_512

DUT: EUT


Communication System: GPRS1900-2slots; Frequency: 1850.2 MHz; Duty Cycle: 1:4
Medium: H1900 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.654 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.84 V/m; Power Drift = 0.032 dB
Peak SAR (extrapolated) = 0.961 W/kg
SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.272 mW/g
Maximum value of SAR (measured) = 0.649 mW/g

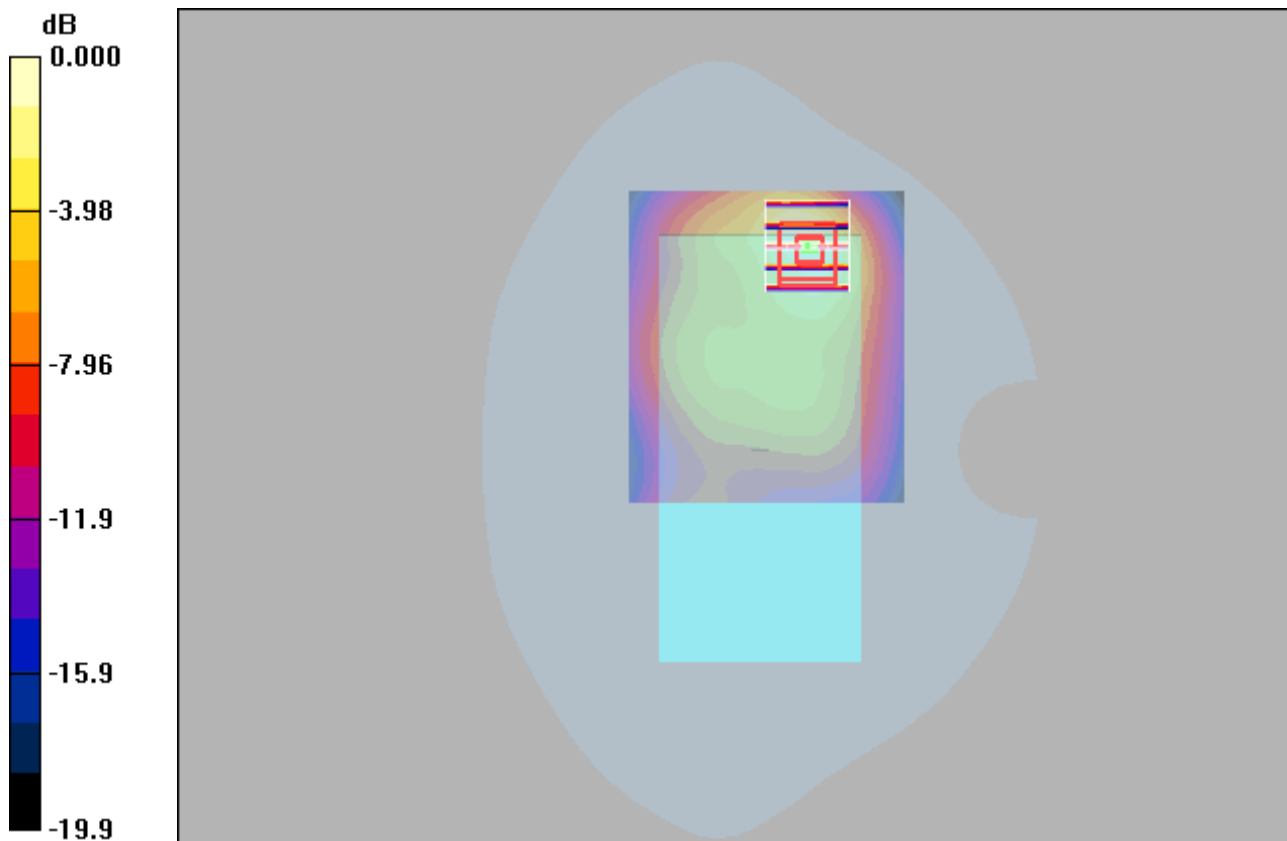

0 dB = 0.649mW/g

WCDMA II_RMC12.2K_Rear Face_10mm_9262

DUT: EUT


Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
 Medium: H1900 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.815 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 10.4 V/m; Power Drift = -0.040 dB
 Peak SAR (extrapolated) = 1.21 W/kg
SAR(1 g) = 0.645 mW/g; SAR(10 g) = 0.343 mW/g
 Maximum value of SAR (measured) = 0.810 mW/g

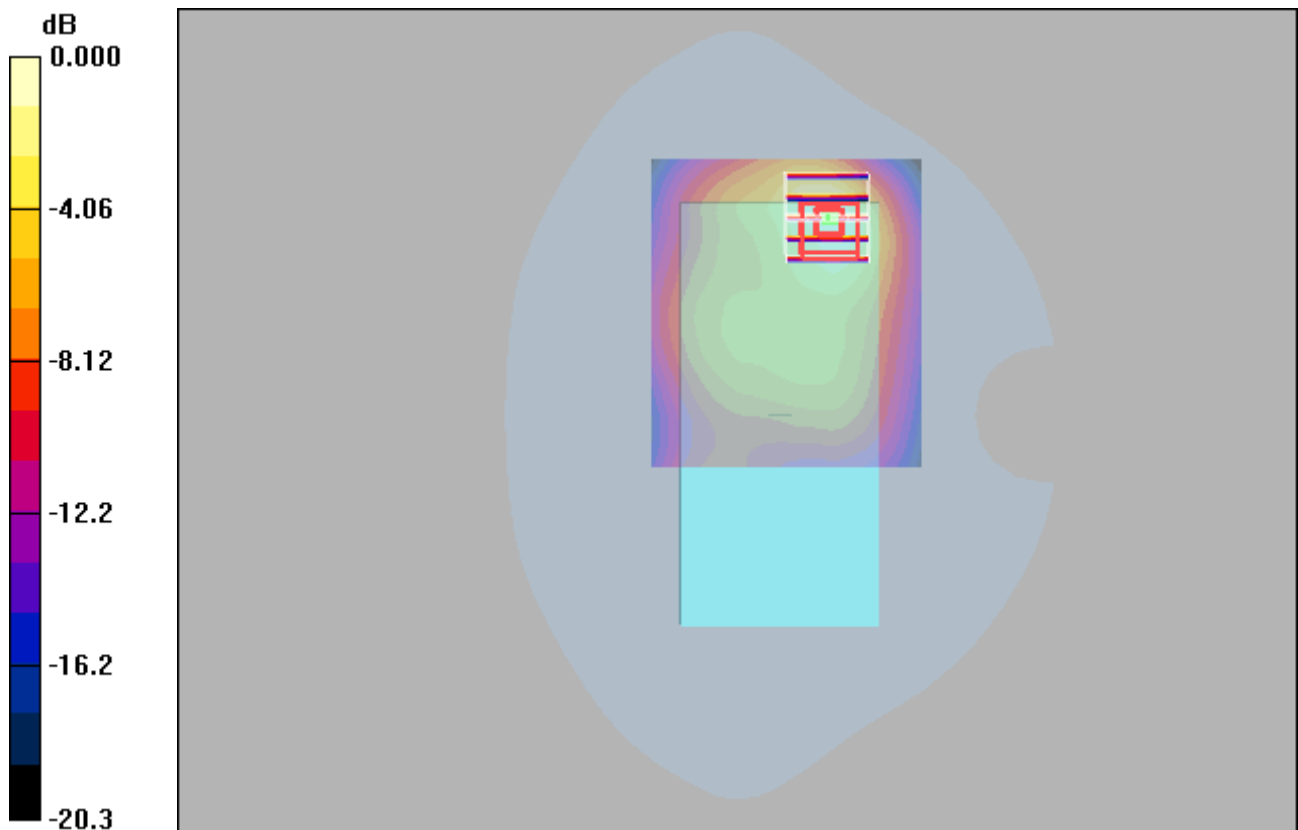

0 dB = 0.810mW/g

WCDMA IV_RMC12.2K_Rear Face_10mm_1513

DUT: EUT


Communication System: WCDMA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.32$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.36, 5.36, 5.36); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.588 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.16 V/m; Power Drift = -0.060 dB
Peak SAR (extrapolated) = 0.880 W/kg
SAR(1 g) = 0.470 mW/g; SAR(10 g) = 0.252 mW/g
Maximum value of SAR (measured) = 0.596 mW/g

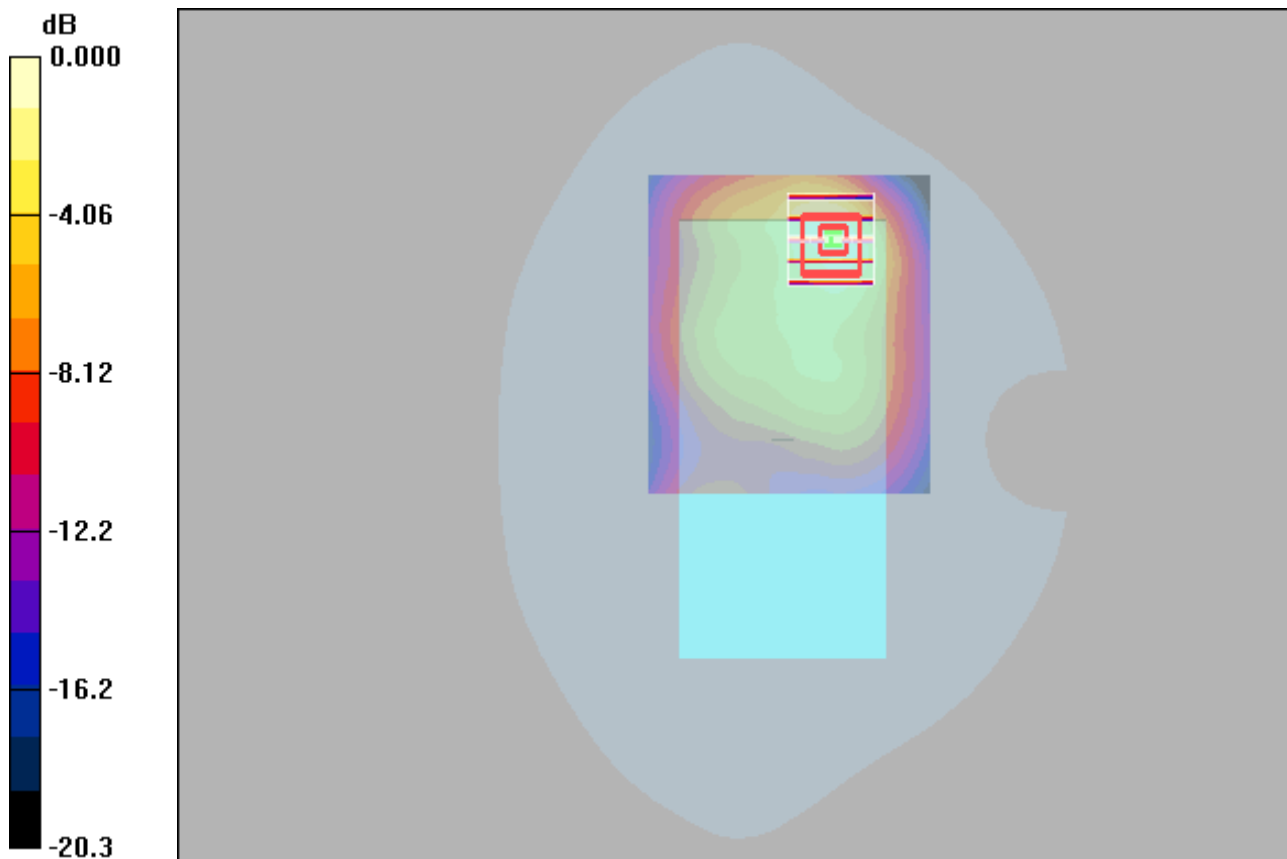

0 dB = 0.596mW/g

WCDMA V_RMC12.2K_Rear Face_10MM_4233

DUT: EUT

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 847 \text{ MHz}$; $\sigma = 0.925 \text{ mho/m}$; $\epsilon_r = 39.4$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.242 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.9 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 0.372 W/kg

SAR(1 g) = 0.205 mW/g; SAR(10 g) = 0.117 mW/g

Maximum value of SAR (measured) = 0.245 mW/g

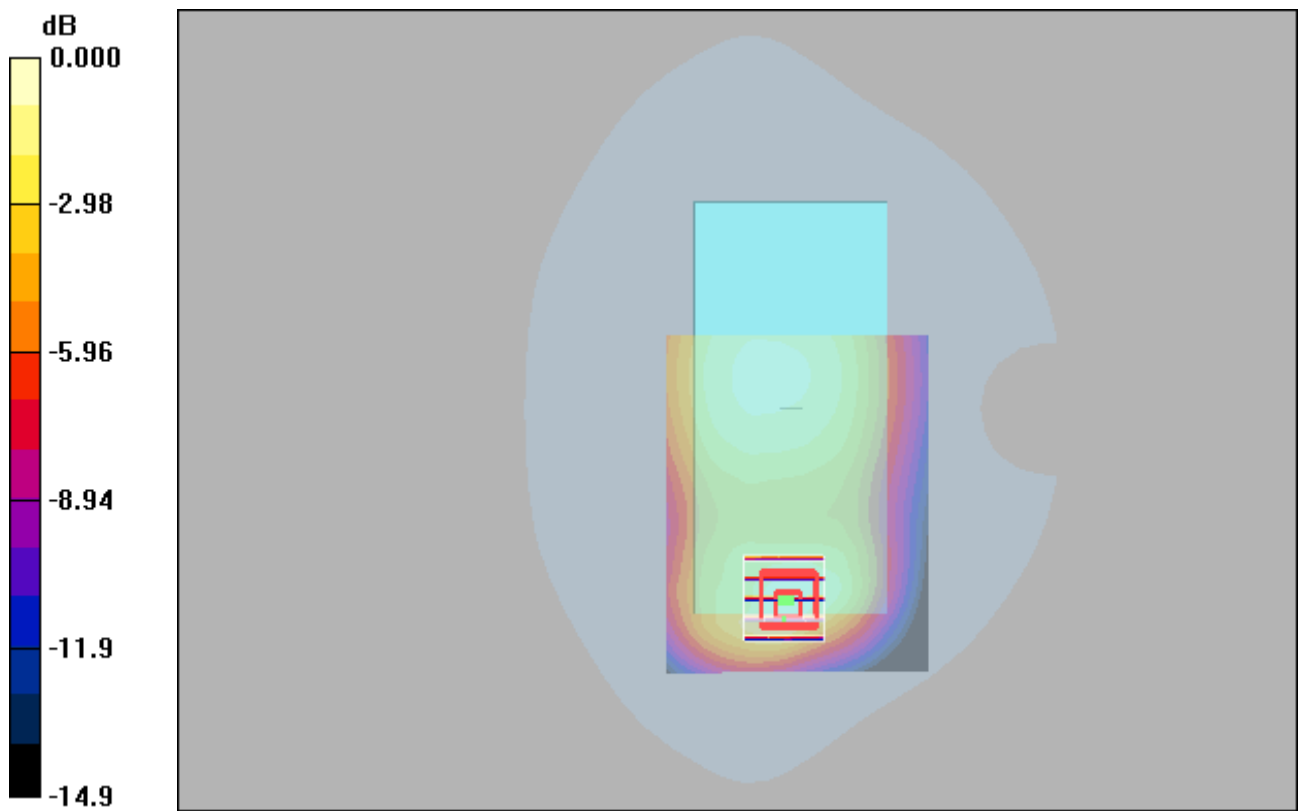

0 dB = 0.245mW/g

LTE 2_QPSK20M_1_99_Rear Face_10MM_18900

DUT: EUT

Communication System: LTE Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.820 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = -0.172 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.633 mW/g; SAR(10 g) = 0.335 mW/g

Maximum value of SAR (measured) = 0.803 mW/g

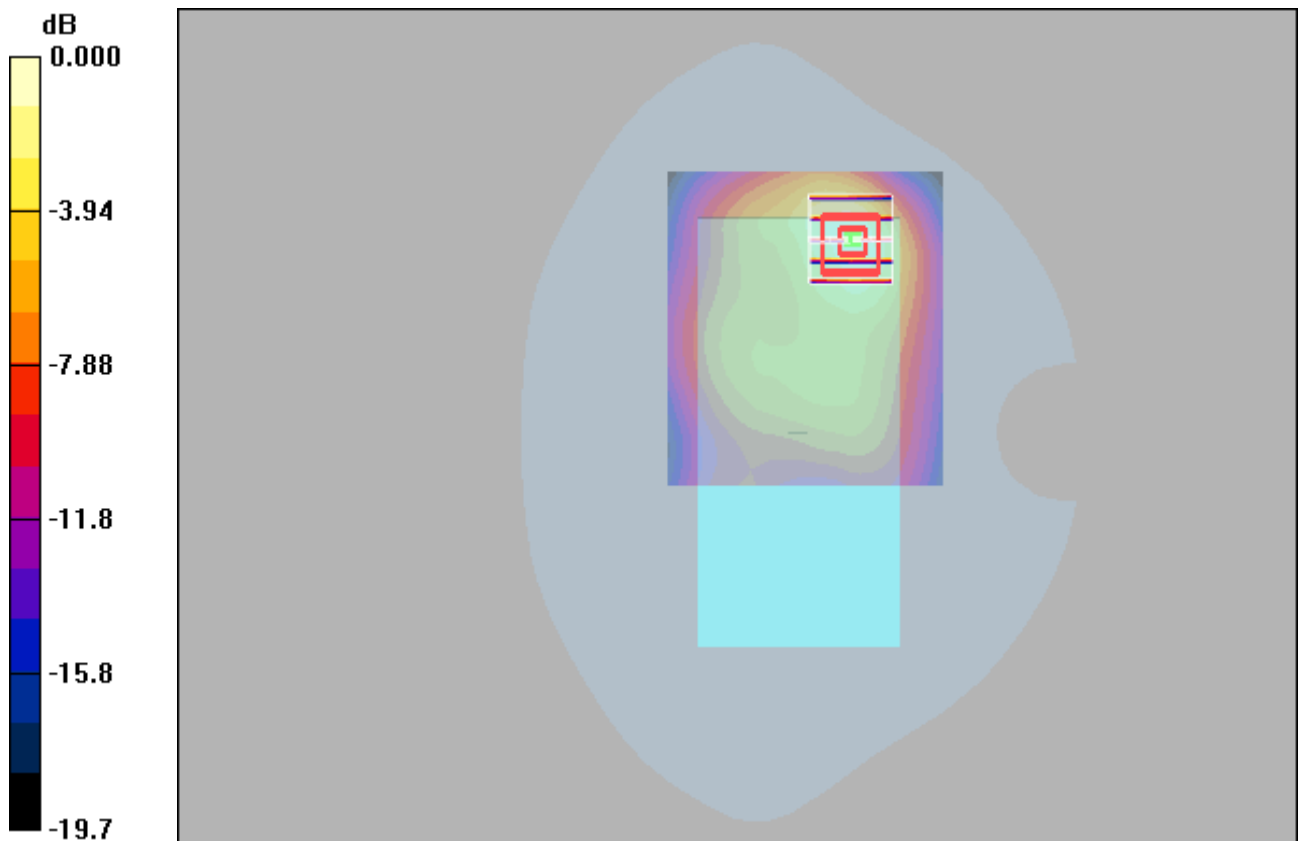

0 dB = 0.803mW/g

LTE 5_QPSK10M_1_25_Rear Face_10mm_20450

DUT: EUT

Communication System: LTE Band5; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 829 \text{ MHz}$; $\sigma = 0.915 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.171 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.8 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.134 mW/g; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.165 mW/g

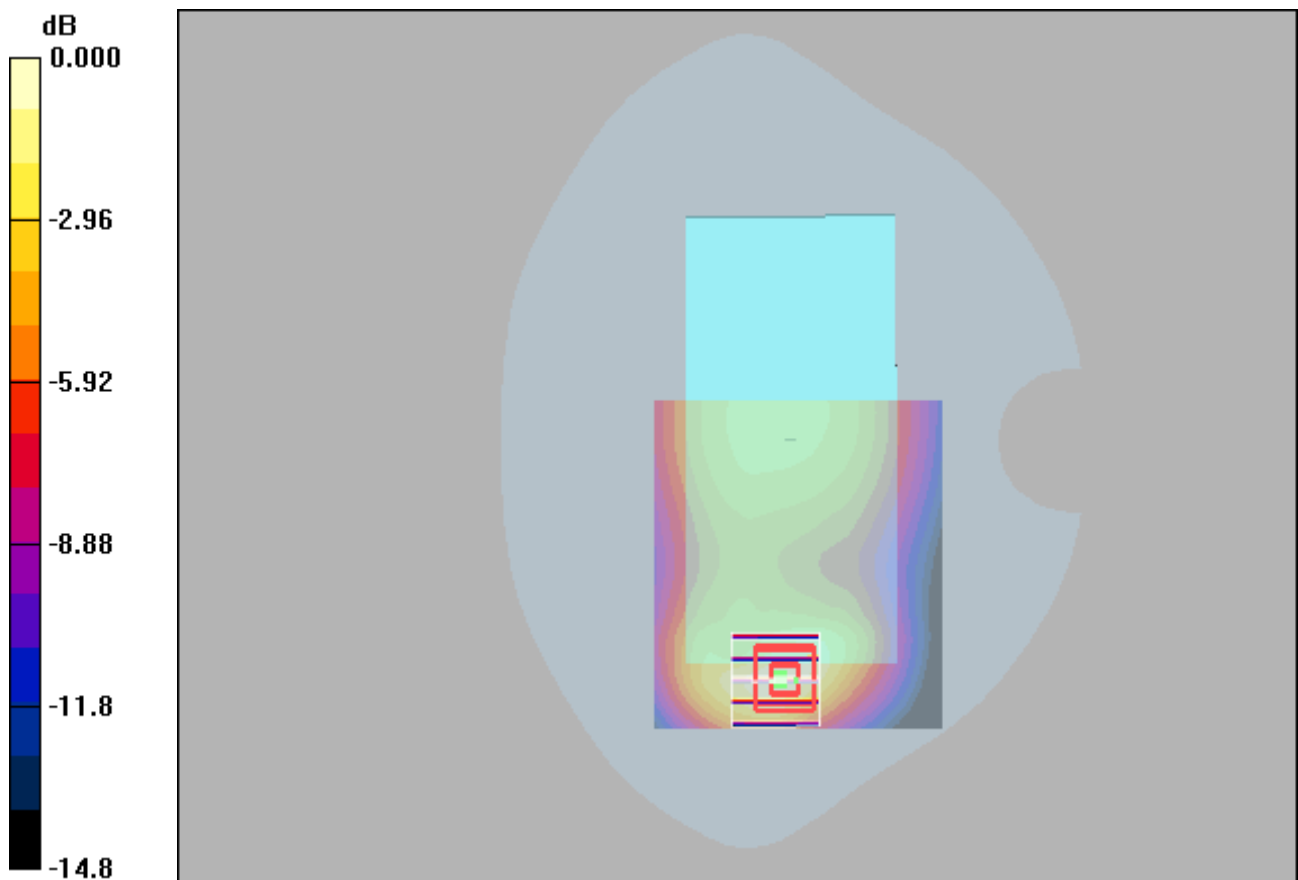

0 dB = 0.165mW/g

LTE 7_QPSK20M_1_0_Rear Face_10mm_21100

DUT: EUT


Communication System: LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.579 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.12 V/m; Power Drift = -0.017 dB
Peak SAR (extrapolated) = 1.01 W/kg
SAR(1 g) = 0.453 mW/g; SAR(10 g) = 0.196 mW/g
Maximum value of SAR (measured) = 0.613 mW/g

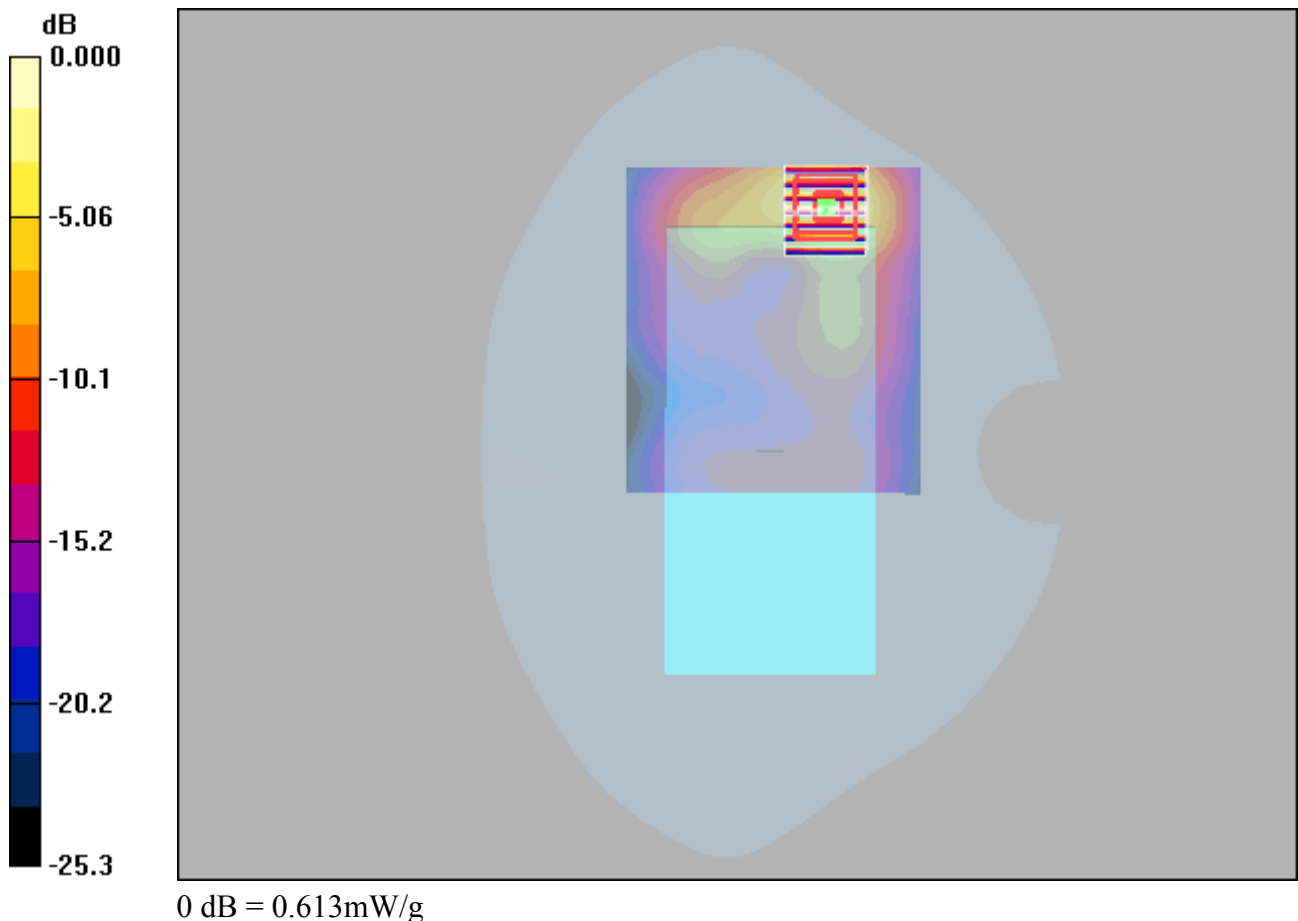

LTE 12_QPSK10M_1_49_Rear Face_10mm_23095

DUT: EUT

Communication System: LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used : $f = 707.5 \text{ MHz}$; $\sigma = 0.85 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.28, 6.28, 6.28); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.243 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.5 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.283 W/kg

SAR(1 g) = 0.222 mW/g; SAR(10 g) = 0.170 mW/g

Maximum value of SAR (measured) = 0.246 mW/g

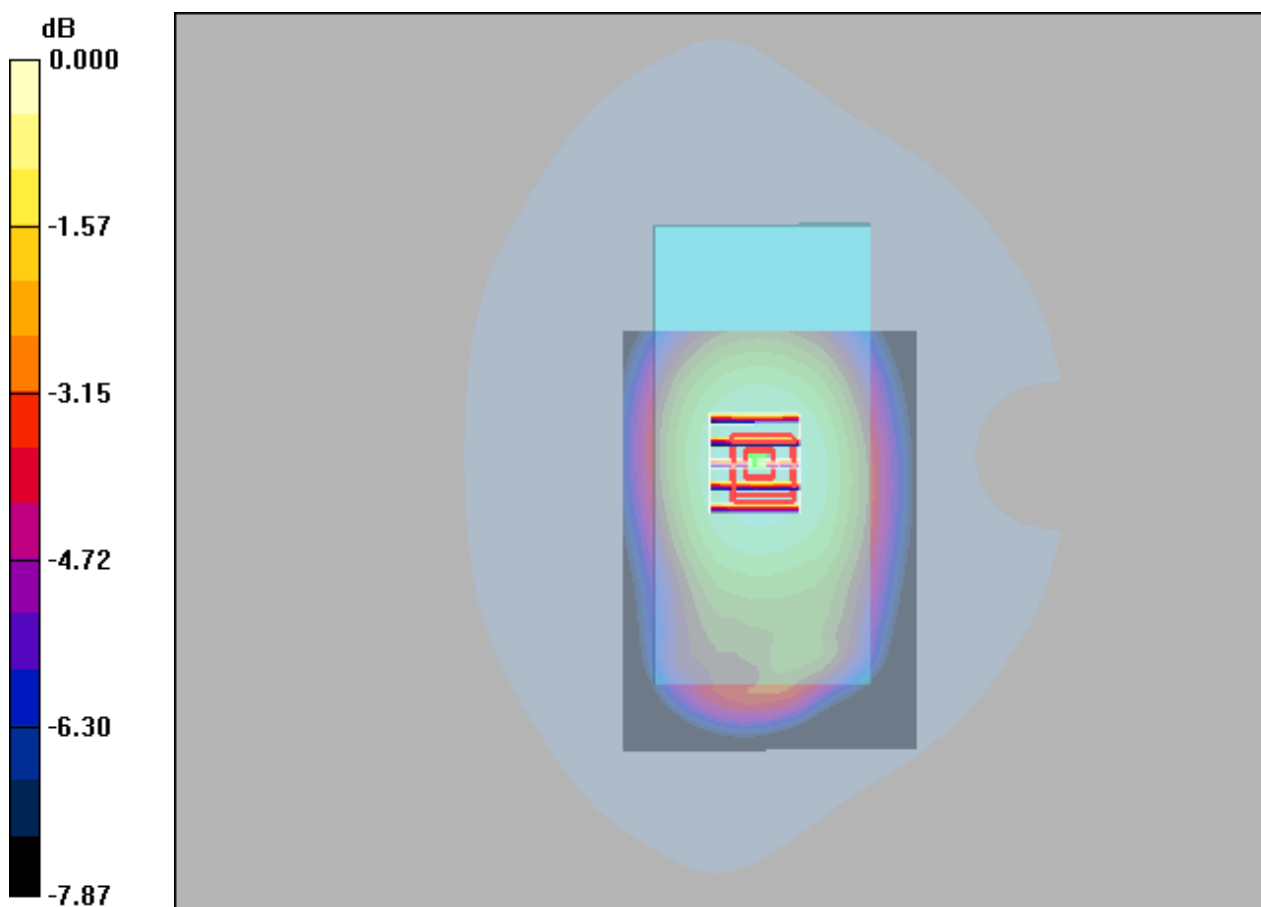

0 dB = 0.246mW/g

LTE 66_QPSK20M_1_99_Rear Face_10MM_132322

DUT: EUT


Communication System: LTE Band 66&QPSK20M; Frequency: 1745 MHz;Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.36, 5.36, 5.36); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.665 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.2 V/m; Power Drift = -0.043 dB
Peak SAR (extrapolated) = 0.990 W/kg
SAR(1 g) = 0.534 mW/g; SAR(10 g) = 0.287 mW/g
Maximum value of SAR (measured) = 0.677 mW/g

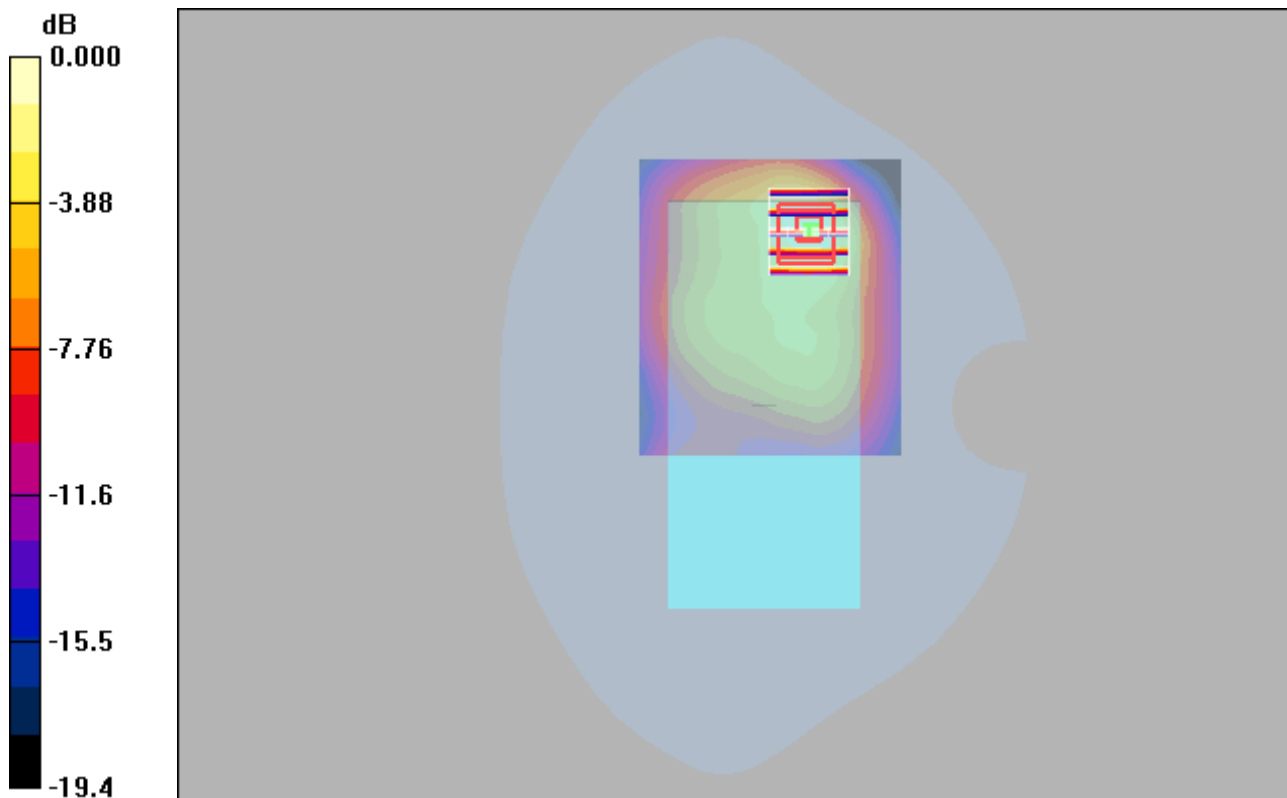

0 dB = 0.677mW/g

EDR_DH5_Rear Face_10MM_0

DUT: EUT


Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.78$ mho/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.037 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.241 V/m; Power Drift = 0.079 dB
Peak SAR (extrapolated) = 0.059 W/kg
SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.012 mW/g
Maximum value of SAR (measured) = 0.035 mW/g

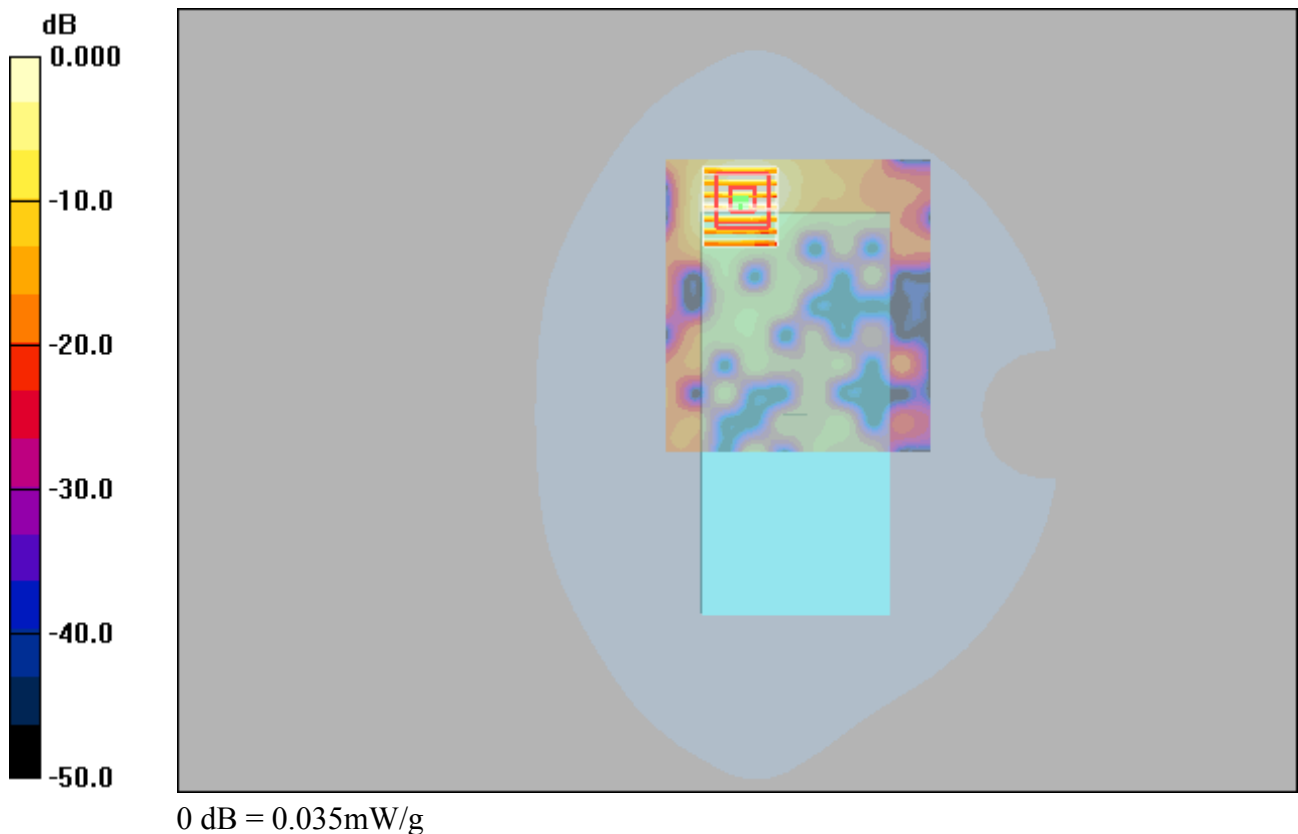

WIFI 2.4G_802.11b_Rear Face_10mm_6

DUT: EUT

Communication System: Wlan 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 37.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.347 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.88 V/m; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 0.492 W/kg

SAR(1 g) = 0.239 mW/g; SAR(10 g) = 0.107 mW/g

Maximum value of SAR (measured) = 0.313 mW/g

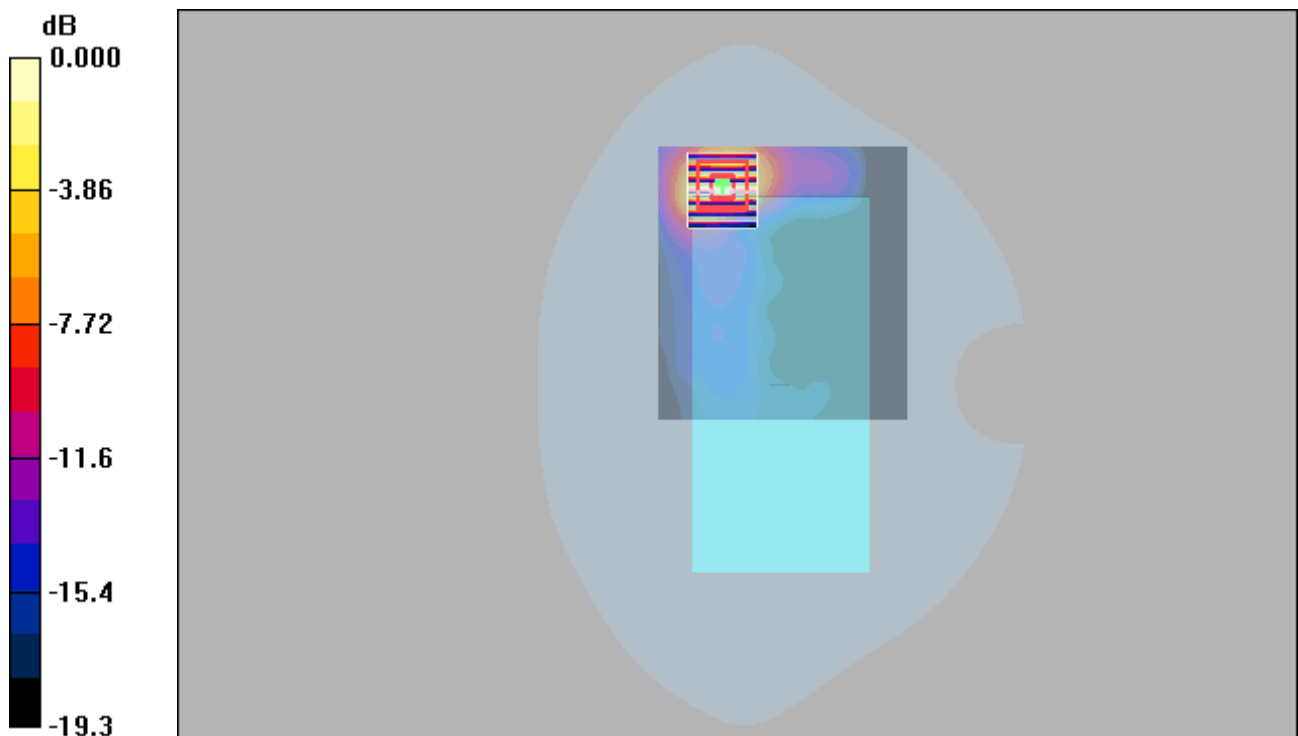

0 dB = 0.313mW/g

WIFI 5G_802.11ac80_Rear Face_10mm_42

DUT: EUT


Communication System: 802.11ac (VHT80); Frequency: 5210 MHz; Duty Cycle: 1:1.04
Medium: H5250 Medium parameters used: $f = 5210$ MHz; $\sigma = 4.82$ mho/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (111x121x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.137 mW/g

Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.571 V/m; Power Drift = 0.131 dB
Peak SAR (extrapolated) = 0.393 W/kg
SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.00497 mW/g
Maximum value of SAR (measured) = 0.092 mW/g

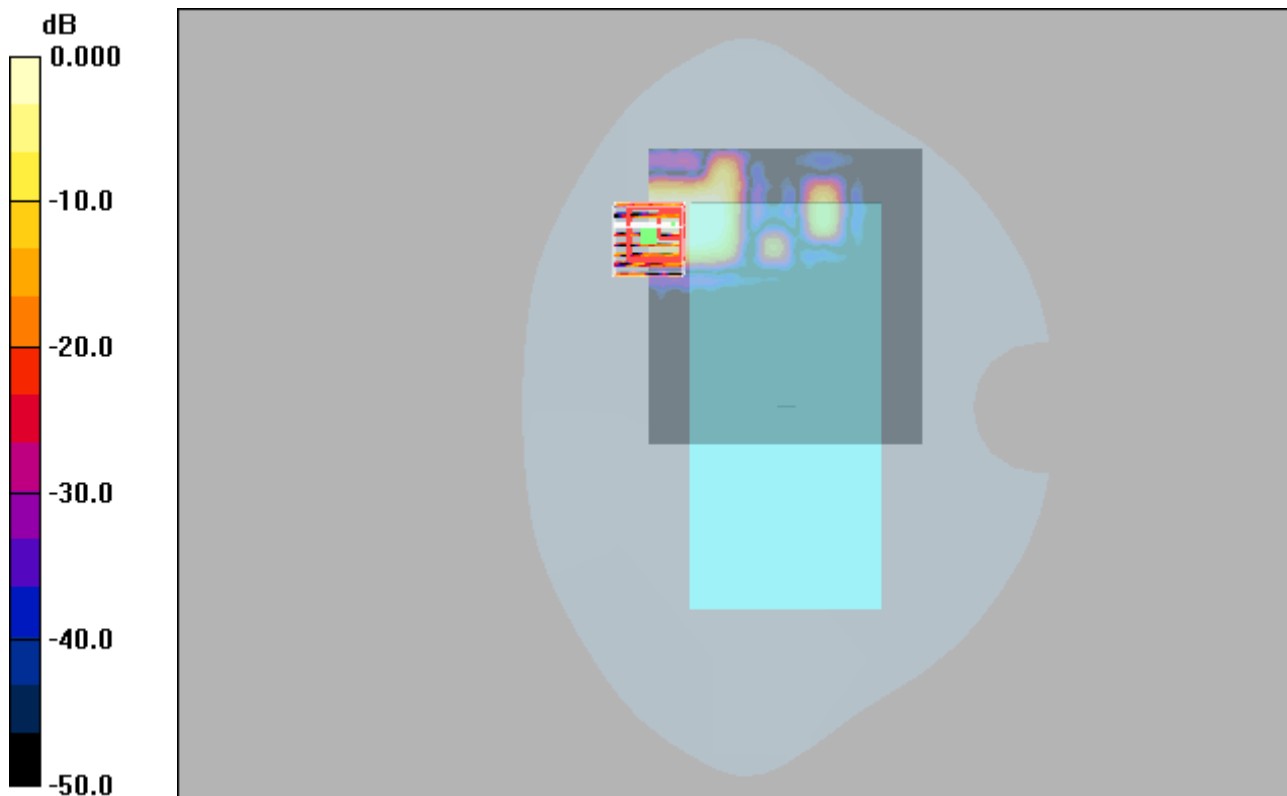

WIFI 5G_802.11ac80_Rear Face_10mm_58

DUT: EUT


Communication System: 802.11ac (VHT80); Frequency: 5290 MHz; Duty Cycle: 1:1.04
Medium: H5250 Medium parameters used: $f = 5290$ MHz; $\sigma = 4.88$ mho/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (111x121x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.144 mW/g

Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.902 V/m; Power Drift = -0.100 dB
Peak SAR (extrapolated) = 0.175 W/kg
SAR(1 g) = 0.049 mW/g; SAR(10 g) = 0.017 mW/g
Maximum value of SAR (measured) = 0.104 mW/g

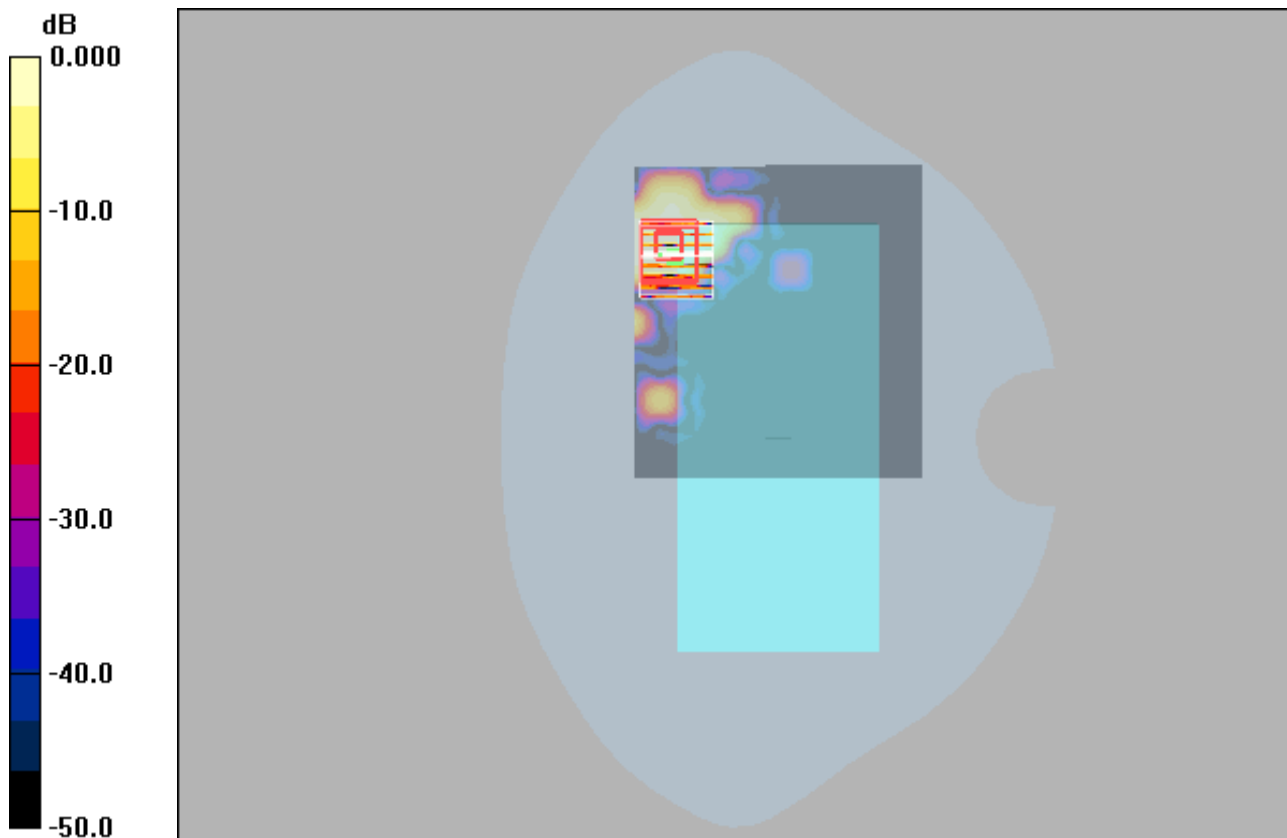

0 dB = 0.104mW/g

WIFI 5G_802.11ac80_Rear Face_10mm_106

DUT: EUT


Communication System: 802.11ac (VHT80); Frequency: 5530 MHz; Duty Cycle: 1:1.04
Medium: H5600 Medium parameters used: $f = 5530$ MHz; $\sigma = 5.17$ mho/m; $\epsilon_r = 35.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.82, 4.82, 4.82); Calibrated: 2022/8/6
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (111x121x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.180 mW/g

Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.834 V/m; Power Drift = -0.116 dB
Peak SAR (extrapolated) = 0.288 W/kg
SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.00947 mW/g
Maximum value of SAR (measured) = 0.061 mW/g

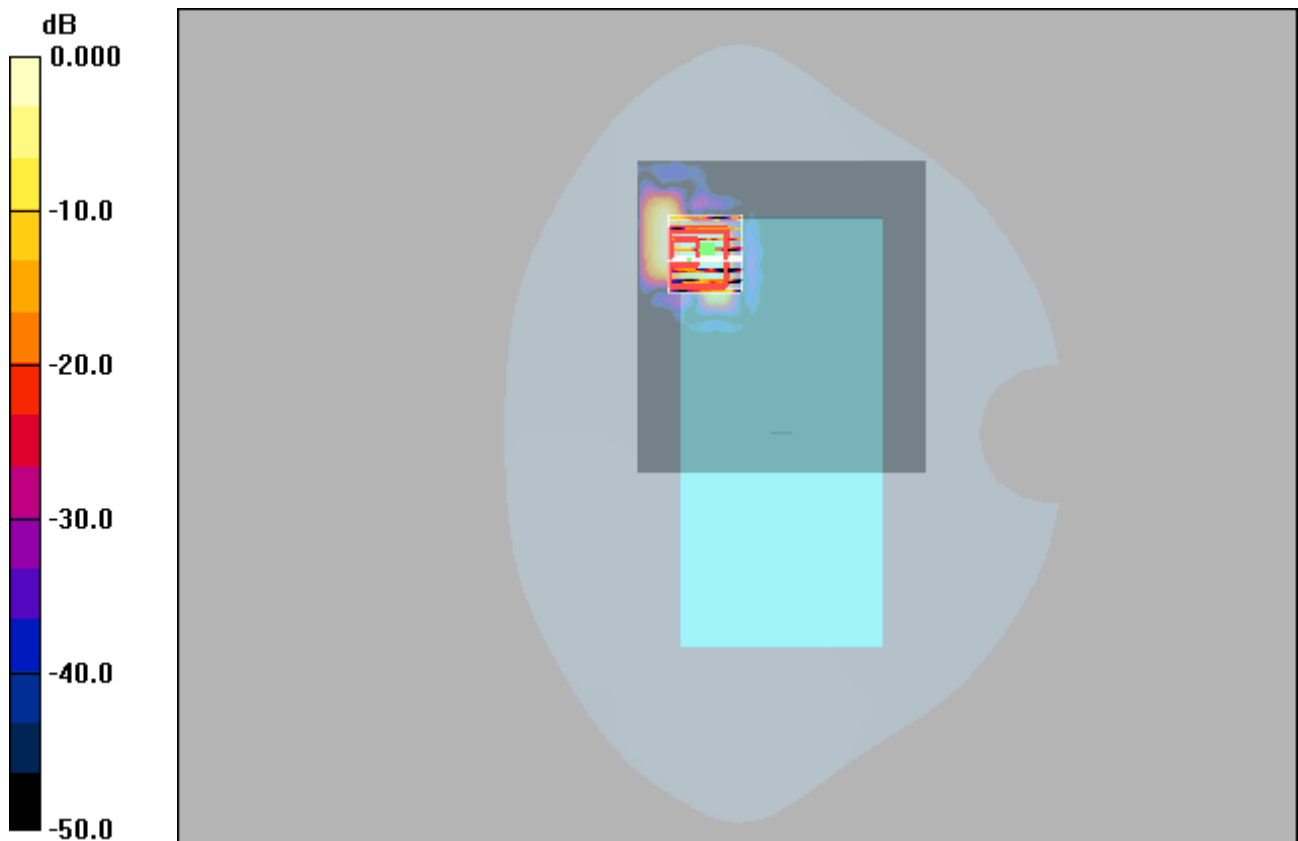

0 dB = 0.061mW/g

WIFI 5G_802.11ac80_Rear Face_10mm_155

DUT: EUT


Communication System: 802.11ac (VHT80); Frequency: 5775 MHz; Duty Cycle: 1:1.04
Medium: H5800 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.42$ mho/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (111x121x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.071 mW/g

Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.000 V/m; Power Drift = 0.000 dB
Peak SAR (extrapolated) = 0.268 W/kg
SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.00634 mW/g
Maximum value of SAR (measured) = 0.034 mW/g

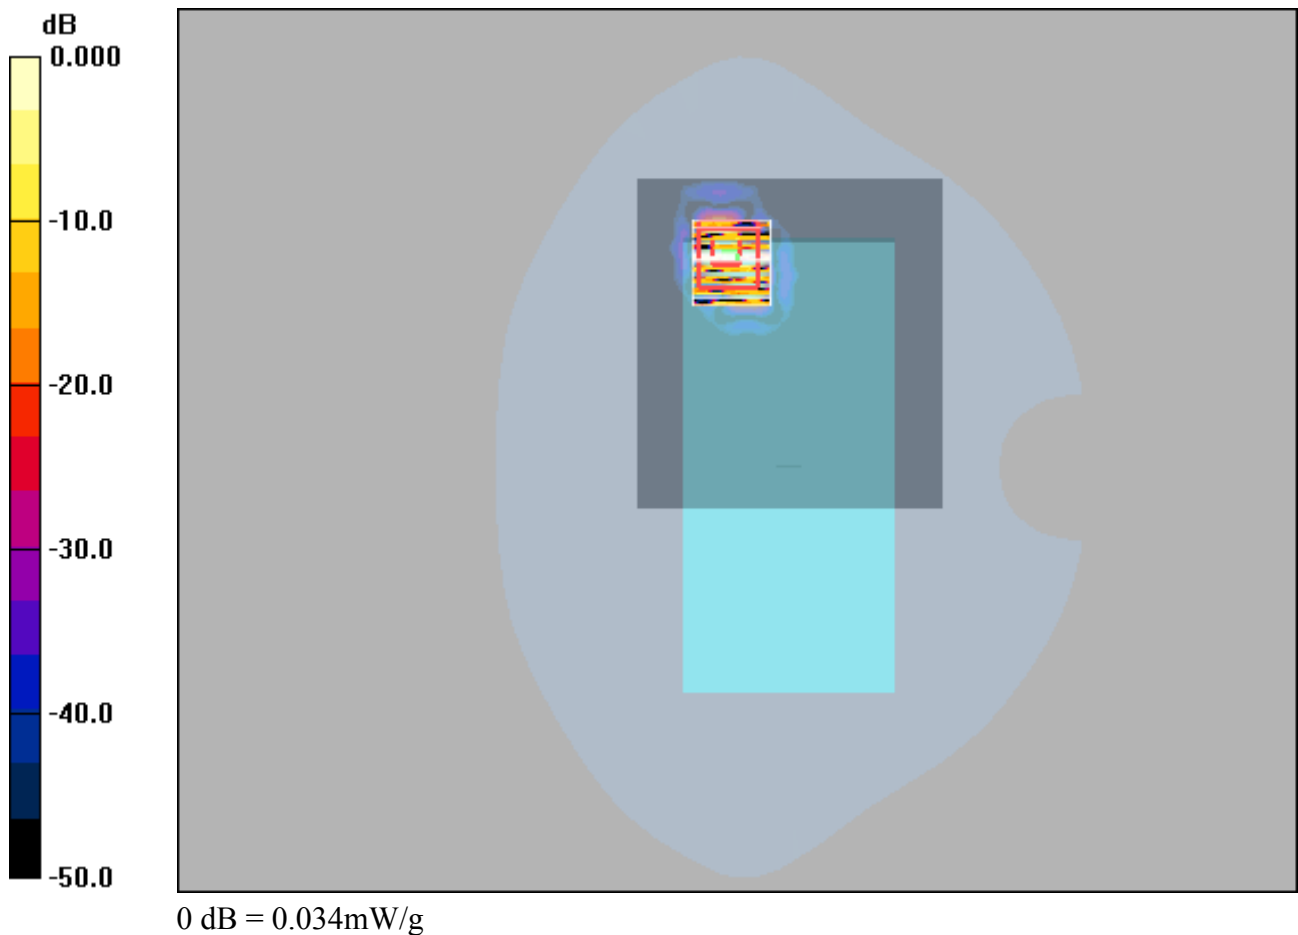

LTE 7_QPSK20M_1_0_Top Side_10mm_21100

DUT: EUT


Communication System: LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 37.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x101x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 1.37 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 17.5 V/m; Power Drift = 0.073 dB
Peak SAR (extrapolated) = 2.26 W/kg
SAR(1 g) = 0.991 mW/g; SAR(10 g) = 0.408 mW/g
Maximum value of SAR (measured) = 1.36 mW/g

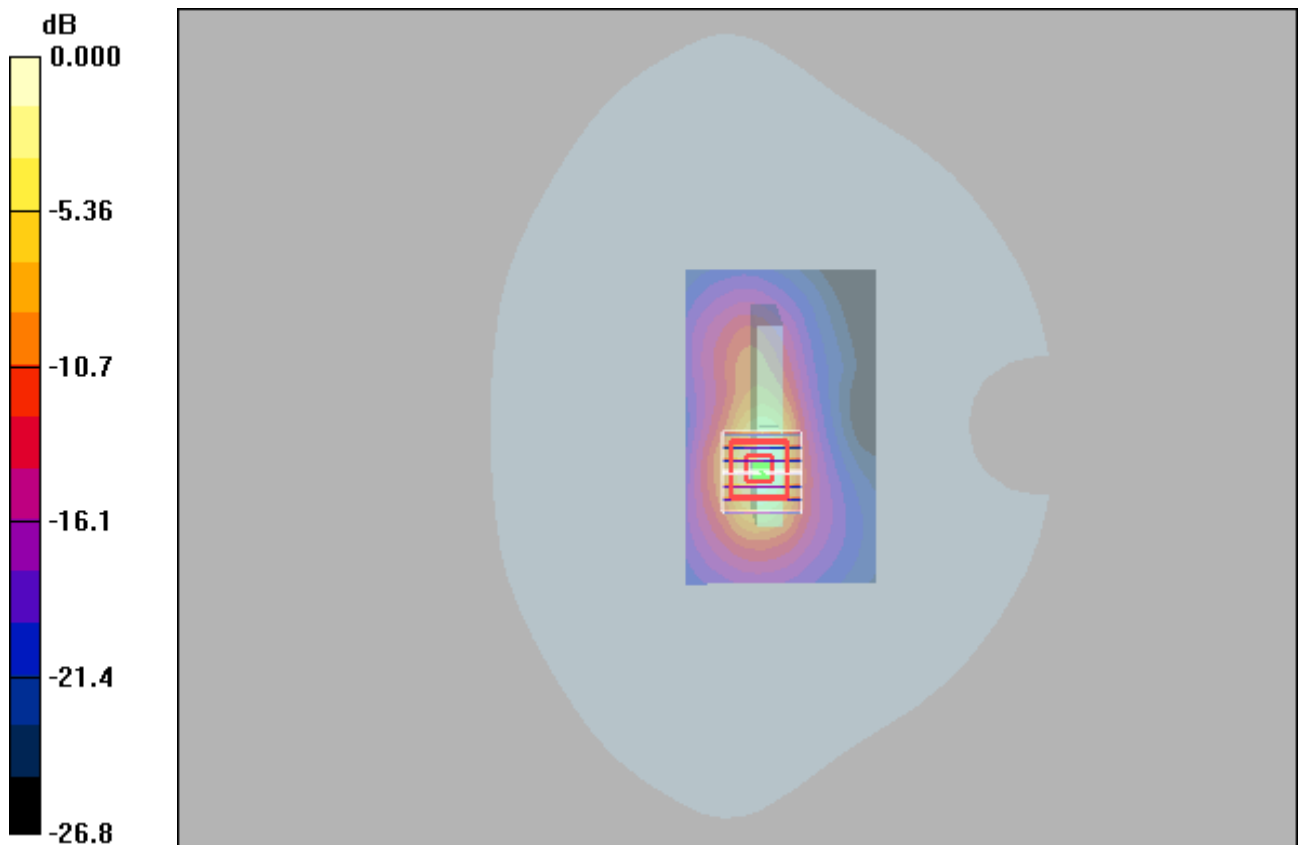

0 dB = 1.36mW/g

LTE 12_QPSK10M_1_49_Right Side_10mm_23095

DUT: EUT

Communication System: LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.85$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.28, 6.28, 6.28); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.254 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.5 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.158 mW/g

Maximum value of SAR (measured) = 0.257 mW/g

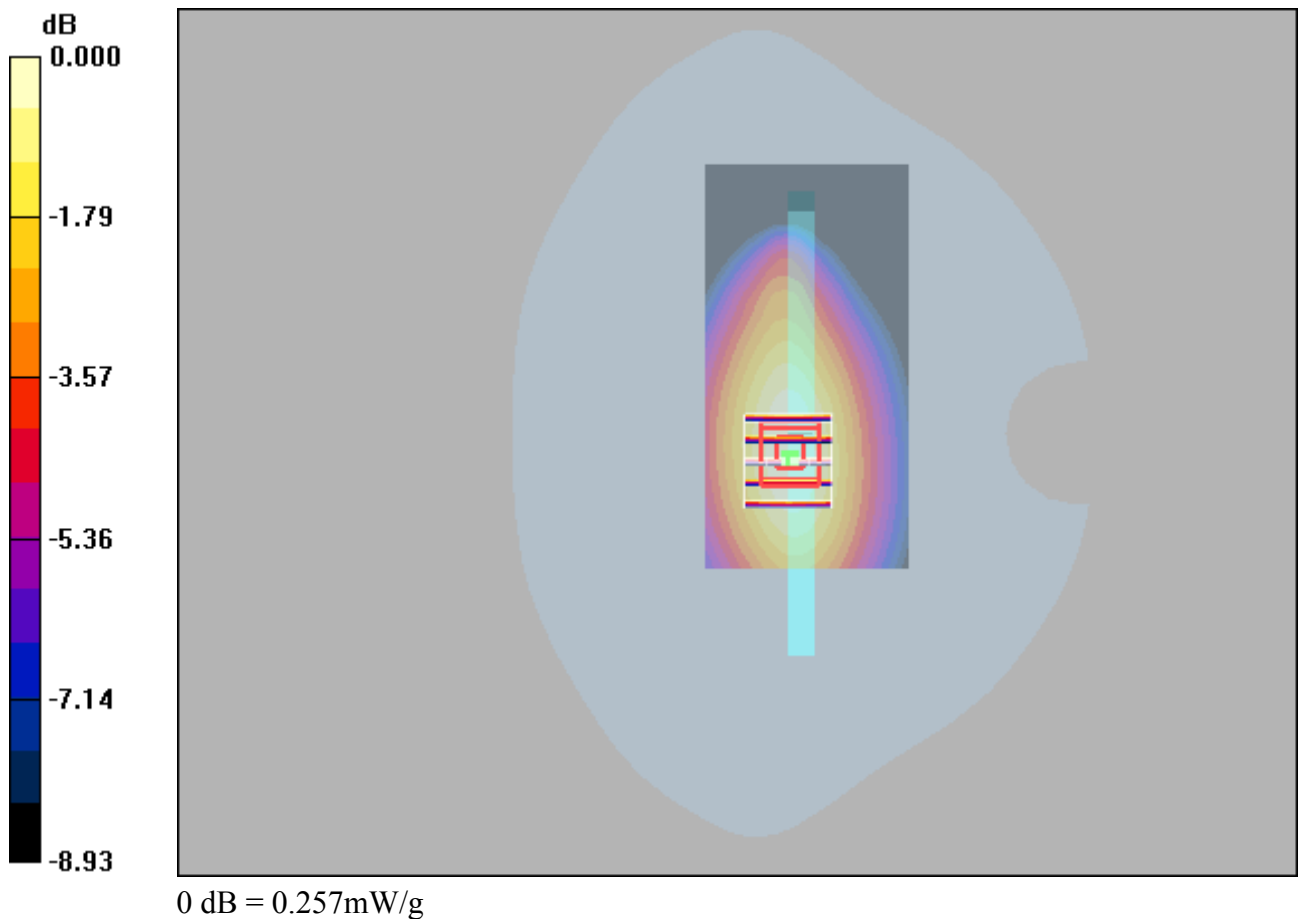

EDR_DH5_Top Sode_10MM_0

DUT: EUT


Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.78$ mho/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x101x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.061 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.58 V/m; Power Drift = 0.030 dB
Peak SAR (extrapolated) = 0.091 W/kg
SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.036 mW/g
Maximum value of SAR (measured) = 0.061 mW/g

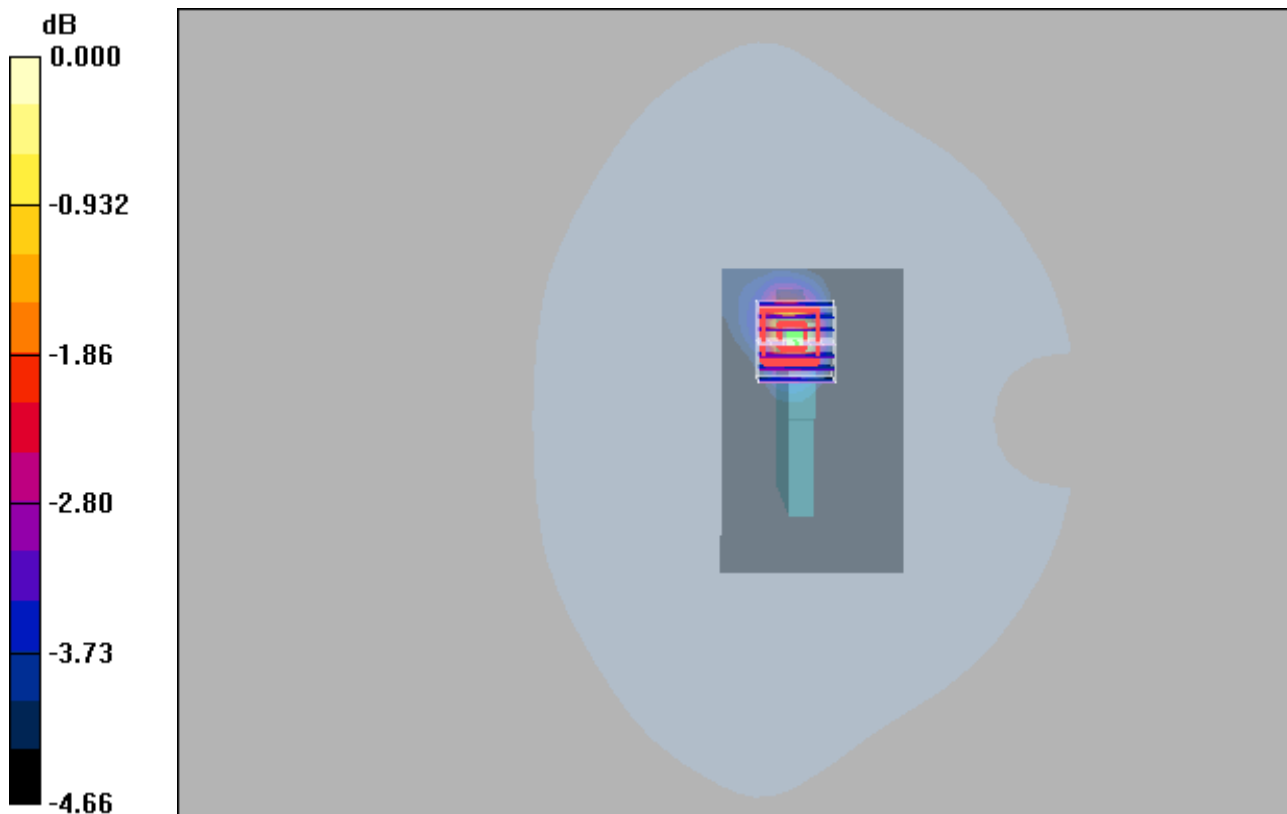

0 dB = 0.061mW/g

WIFI 5G_802.11ac80_Top Side_10mm_42

DUT: EUT


Communication System: 802.11ac (VHT80); Frequency: 5210 MHz; Duty Cycle: 1:1.04
Medium: H5250 Medium parameters used: $f = 5210$ MHz; $\sigma = 4.82$ mho/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x121x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.308 mW/g

Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 3.15 V/m; Power Drift = -0.040 dB
Peak SAR (extrapolated) = 0.700 W/kg
SAR(1 g) = 0.157 mW/g; SAR(10 g) = 0.044 mW/g
Maximum value of SAR (measured) = 0.325 mW/g

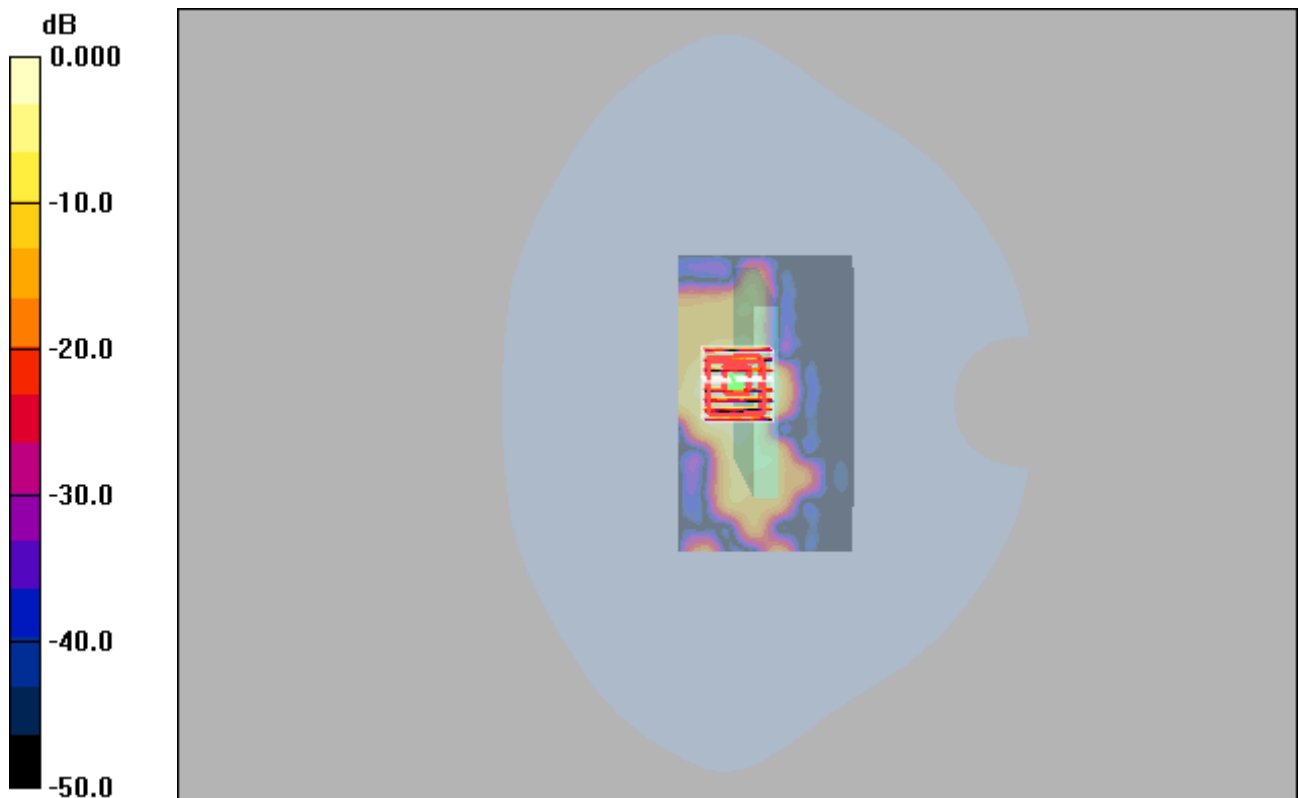

0 dB = 0.325mW/g

WIFI 5G_802.11ac80_Top Side_10mm_58

DUT: EUT

Communication System: 802.11ac (VHT80); Frequency: 5290 MHz; Duty Cycle: 1:1.04
Medium: H5250 Medium parameters used: $f = 5290$ MHz; $\sigma = 4.88$ mho/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x121x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.234 mW/g

Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 2.78 V/m; Power Drift = 0.109 dB
Peak SAR (extrapolated) = 0.456 W/kg
SAR(1 g) = 0.114 mW/g; SAR(10 g) = 0.034 mW/g
Maximum value of SAR (measured) = 0.246 mW/g



WIFI 5G_802.11ac80_Top Side_10mm_106

DUT: EUT


Communication System: 802.11ac (VHT80); Frequency: 5530 MHz; Duty Cycle: 1:1.04
Medium: H5600 Medium parameters used: $f = 5530$ MHz; $\sigma = 5.17$ mho/m; $\epsilon_r = 35.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.82, 4.82, 4.82); Calibrated: 2022/8/6
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x121x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.182 mW/g

Zoom Scan (8x8x13)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 2.36 V/m; Power Drift = -0.154 dB
Peak SAR (extrapolated) = 0.364 W/kg
SAR(1 g) = 0.031 mW/g; SAR(10 g) = 0.00998 mW/g
Maximum value of SAR (measured) = 0.070 mW/g

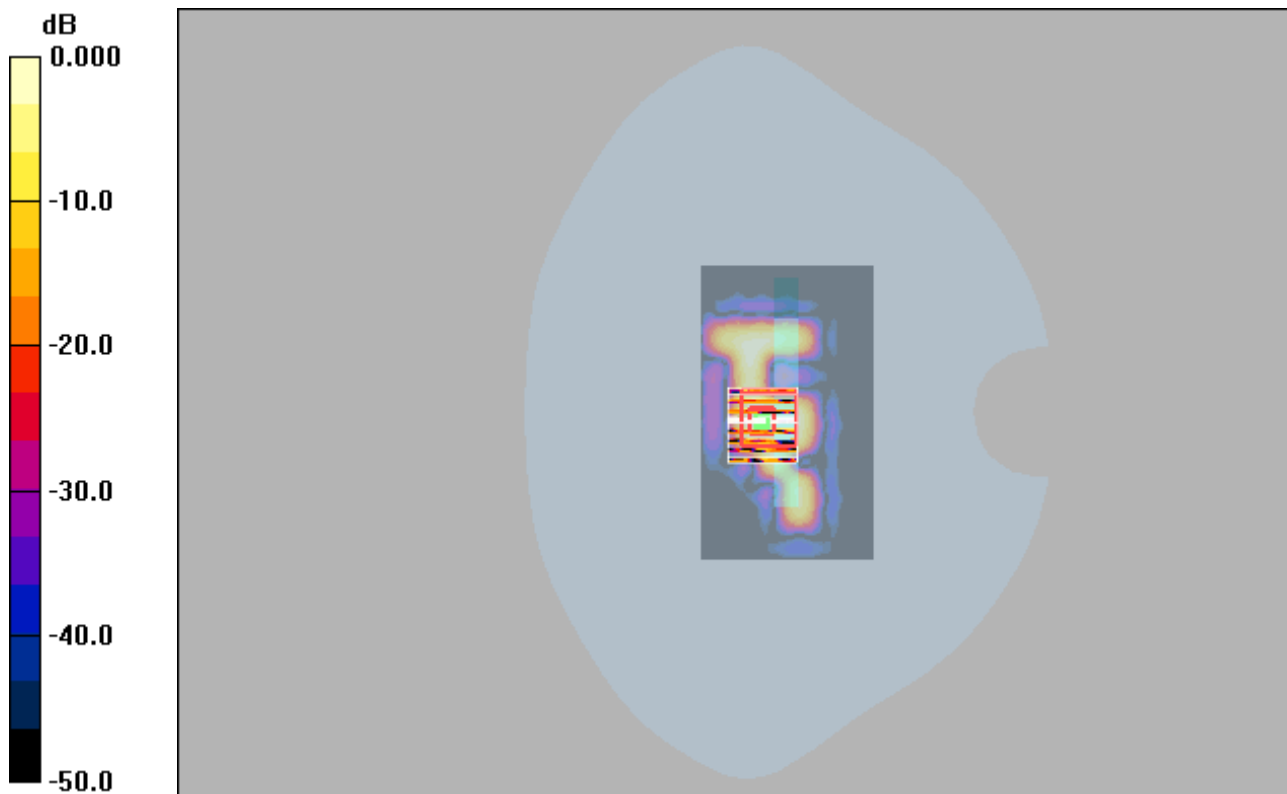

0 dB = 0.070mW/g