

FCC Part 15B Measurement and Test Report

For

Spheris Digital Ltd.

**Flat Room A21, BLK a, 4/F, Sheung Shui Plaza, 3ka fu close,
Sheung Shui Hong Kong**

FCC ID: YHO-PXT51515

Test Rule(s):	<u>FCC Part 15 Subpart B</u>
Product Description:	<u>Wireless Digital Display</u>
Tested Model:	<u>PXT515WR04F</u>
Report No.:	<u>STR15078176I-2</u>
Tested Date:	<u>2015-07-15 to 2015-08-10</u>
Issued Date:	<u>2015-08-10</u>
Tested By:	<u>Jong Wang / Engineer</u> <i>Jong Wang</i>
Reviewed By:	<u>Lahm Peng / EMC Manager</u> <i>Lahm peng</i>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u> <i>Jandyso</i>
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION3

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)3

1.2 TEST STANDARDS.....4

1.3 TEST METHODOLOGY4

1.4 TEST FACILITY4

1.5 EUT SETUP AND OPERATION MODE5

1.6 TEST EQUIPMENT LIST AND DETAILS5

2. SUMMARY OF TEST RESULTS6

3. CONDUCTED EMISSIONS7

3.1 MEASUREMENT UNCERTAINTY7

3.2 TEST PROCEDURE.....7

3.3 BASIC TEST SETUP BLOCK DIAGRAM.....7

3.4 ENVIRONMENTAL CONDITIONS8

3.5 SUMMARY OF TEST RESULTS/PLOTS8

3.6 CONDUCTED EMISSIONS TEST DATA.....8

4. RADIATED EMISSIONS13

4.1 MEASUREMENT UNCERTAINTY13

4.2 TEST PROCEDURE.....13

4.3 TEST RECEIVER SETUP14

4.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....14

4.5 ENVIRONMENTAL CONDITIONS14

4.6 SUMMARY OF TEST RESULTS/PLOTS15

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant:	Spheris Digital Ltd.
Address of applicant:	Flat Room A21, BLK a, 4/F, Sheung Shui Plaza, 3ka fu close, Sheung Shui Hong Kong
Manufacturer:	Spheris Digital Ltd.
Address of manufacturer:	Flat Room A21, BLK a, 4/F, Sheung Shui Plaza, 3ka fu close, Sheung Shui Hong Kong

General Description of EUT	
Product Name:	Wireless Digital Display
Trade Name:	Pix-Star
Model No.:	PXT515WR04F
Adding Model(s):	PXT515VR02F, PXT515GR02F, PXT515WR02F, PXT515VR04F, PXT515GR04
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model PXT515WR04F, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Rated Voltage:	Adapter:DC12V
Rated Current:	2A
Rated Power:	/
Power Adapter Model:	GFP241-1220BX-1 Input: AC 100-240V Output: DC 12V/2A
Lowest Internal Frequency:	32.768KHz
Highest Internal Frequency:	24MHz
Classification of ITE:	Class B

1.2 Test Standards

The following report is prepared on behalf of the Spheris Digital Ltd in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	USB Playing	/
TM2	SD Playing	/

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
DC Cable	1.7	Unshielded	With Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
USB flash disk	SONY	8G	USB flash disk
SD Card	Kingston	4G	SD Card
Headset	HUAWEI	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2015-06-17	2016-06-16
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2015-06-17	2016-06-16
Amplifier	Agilent	8447F	3113A06717	2015-06-17	2016-06-16
Amplifier	C&D	PAP-1G18	2002	2015-06-17	2016-06-16
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2015-06-17	2016-06-16
Horn Antenna	ETS	3117	00086197	2015-06-17	2016-06-16
Loop Antenna	Schwarz beck	FMZB 1516	9773	2015-06-17	2016-06-16
Attenuator	ATTEN	ATS100-4-20	/	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2015-06-17	2016-06-16
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2015-06-17	2016-06-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2015-06-17	2016-06-16

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable

3. Conducted Emissions


3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

3.2 Test Procedure

Test is conducting under the description of ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.3 Basic Test Setup Block Diagram

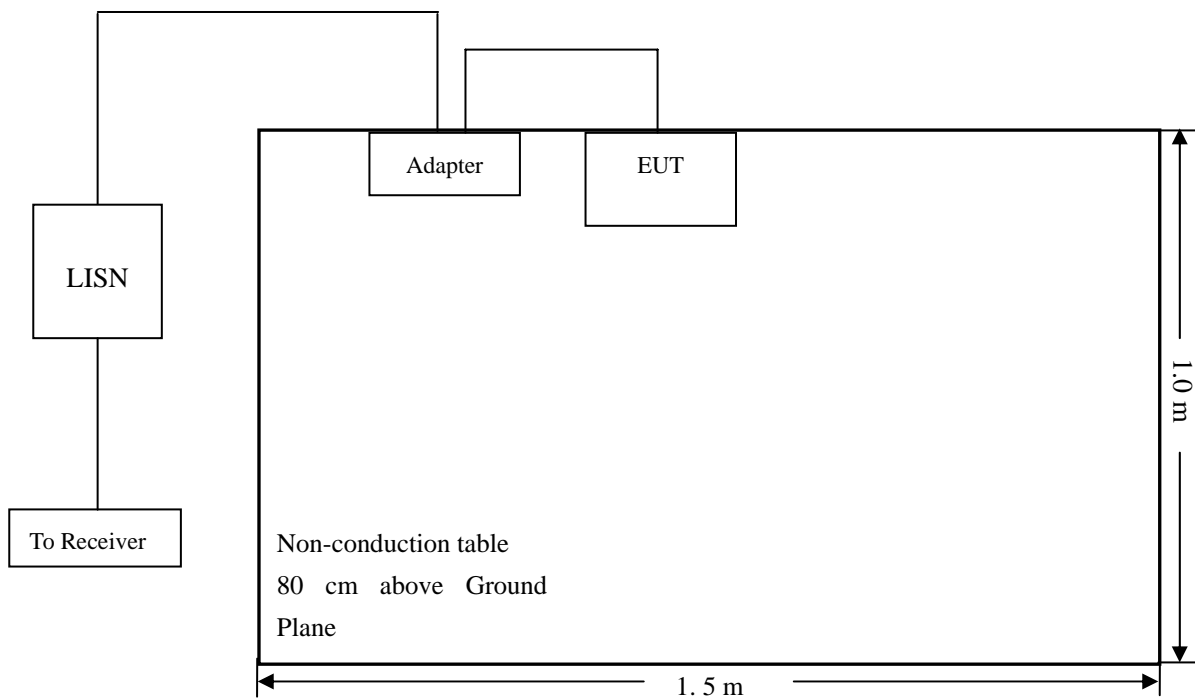

3.4 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

3.5 Summary of Test Results/Plots

According to the data in section 3.6, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:


-10.91 dB at **0.1820 MHz** in the **Neutral, Peak** detector, 0.15-30MHz

3.6 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: *Wireless Digital Display*
 Tested Model: *PXT515WR04F*
 Operating Condition: *TM1*
 Comment: *AC 120V/60Hz Adapter:DC12V*

Test Specification: *Neutral*

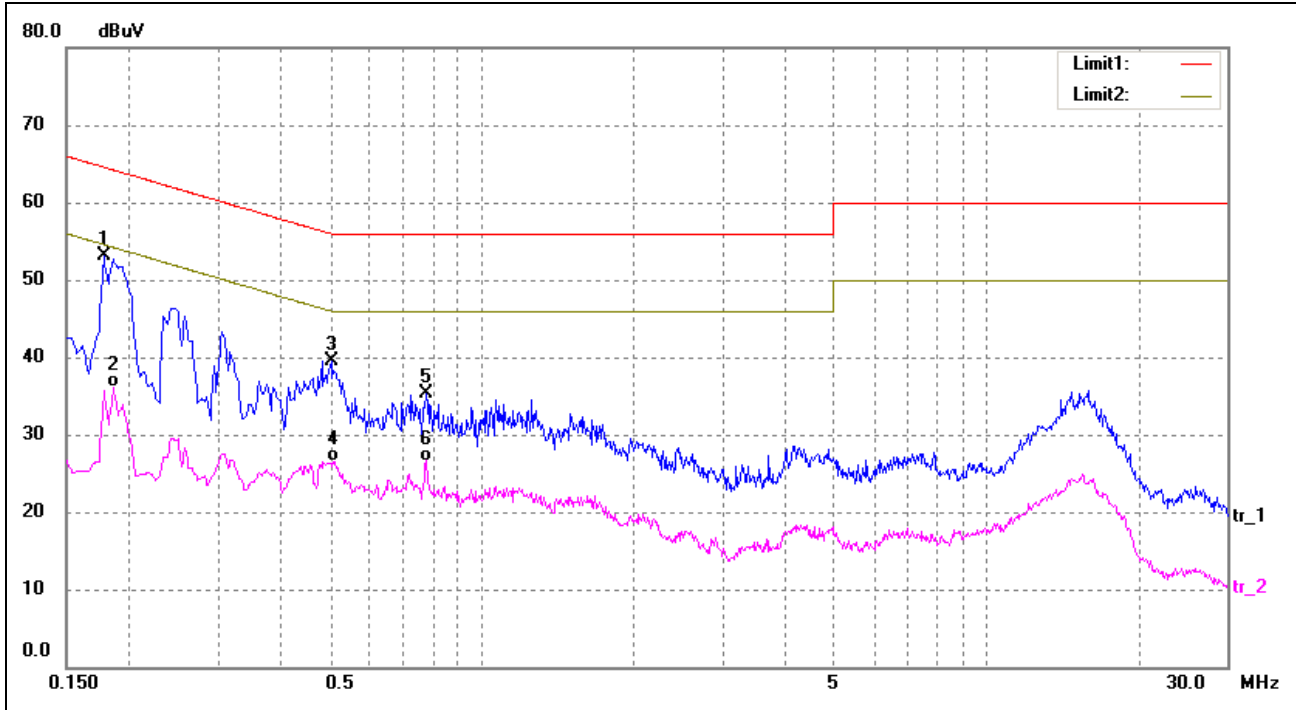

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1780	40.52	12.50	53.02	64.58	-11.56	peak
2	0.1860	23.65	12.50	36.15	54.21	-18.06	AVG
3	0.5020	27.09	12.50	39.59	56.00	-16.41	peak
4	0.5100	13.98	12.51	26.49	46.00	-19.51	AVG
5	0.7780	22.60	12.78	35.38	56.00	-20.62	peak
6	0.7780	13.82	12.78	26.60	46.00	-19.40	AVG

Test Specification: Live

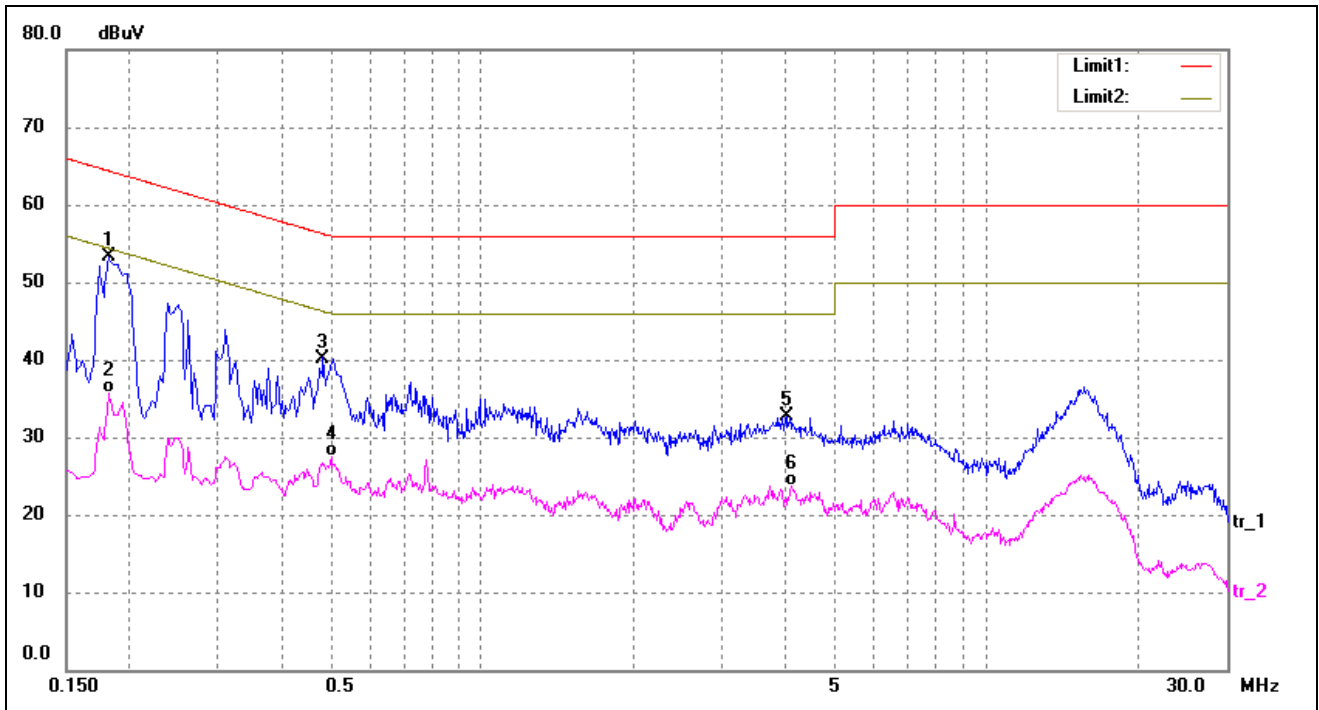


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1820	40.77	12.50	53.27	64.39	-11.12	peak
2	0.1820	23.18	12.50	35.68	54.39	-18.71	AVG
3	0.4860	27.70	12.50	40.20	56.24	-16.04	peak
4	0.5020	15.05	12.50	27.55	46.00	-18.45	AVG
5	4.0420	19.65	13.00	32.65	56.00	-23.35	peak
6	4.1220	10.78	13.00	23.78	46.00	-22.22	AVG

Plot of Conducted Emissions Test Data


EUT: *Wireless Digital Display*
 Tested Model: *PXT515WR04F*
 Operating Condition: *TM2*
 Comment: *AC 120V/60Hz Adapter:DC12V*

Test Specification: *Neutral*

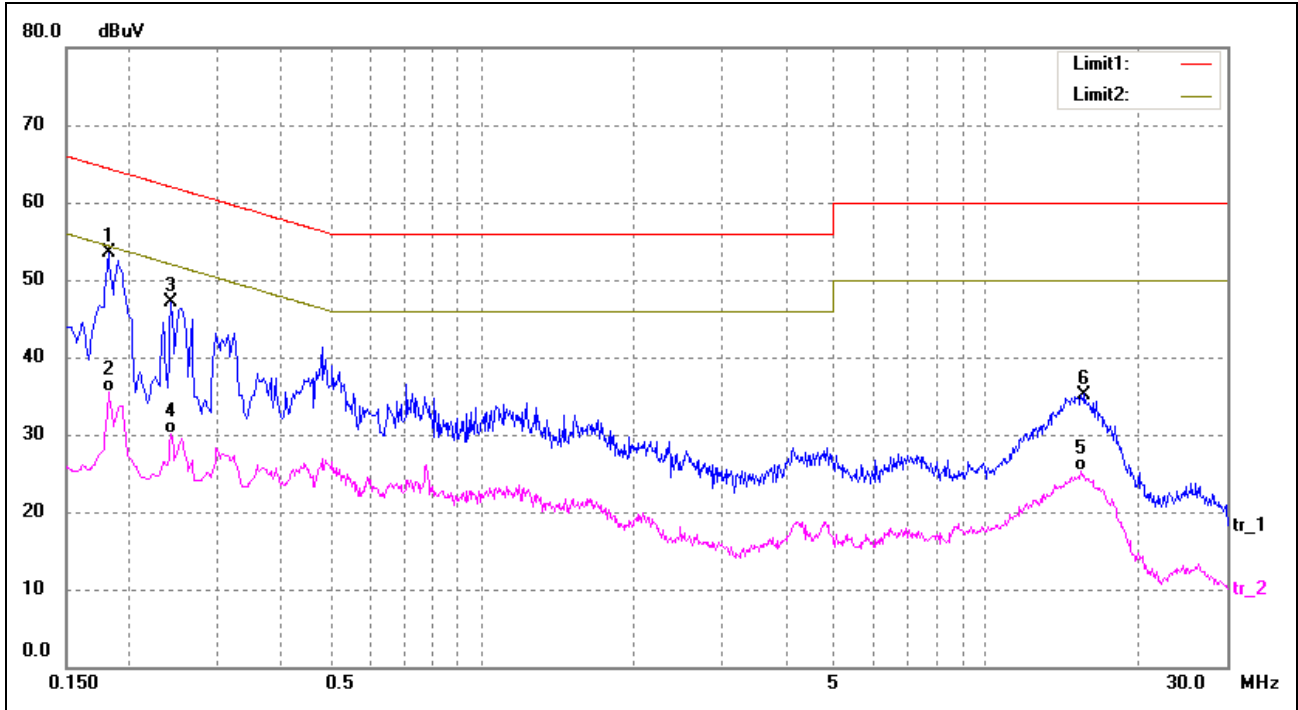

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1820	40.98	12.50	53.48	64.39	-10.91	peak
2	0.1820	23.02	12.50	35.52	54.39	-18.87	AVG
3	0.2420	34.53	12.50	47.03	62.03	-15.00	peak
4	0.2420	17.69	12.50	30.19	52.03	-21.84	AVG
5	15.4460	14.15	11.09	25.24	50.00	-24.76	AVG
6	15.6900	24.06	11.14	35.20	60.00	-24.80	peak

Test Specification: Line

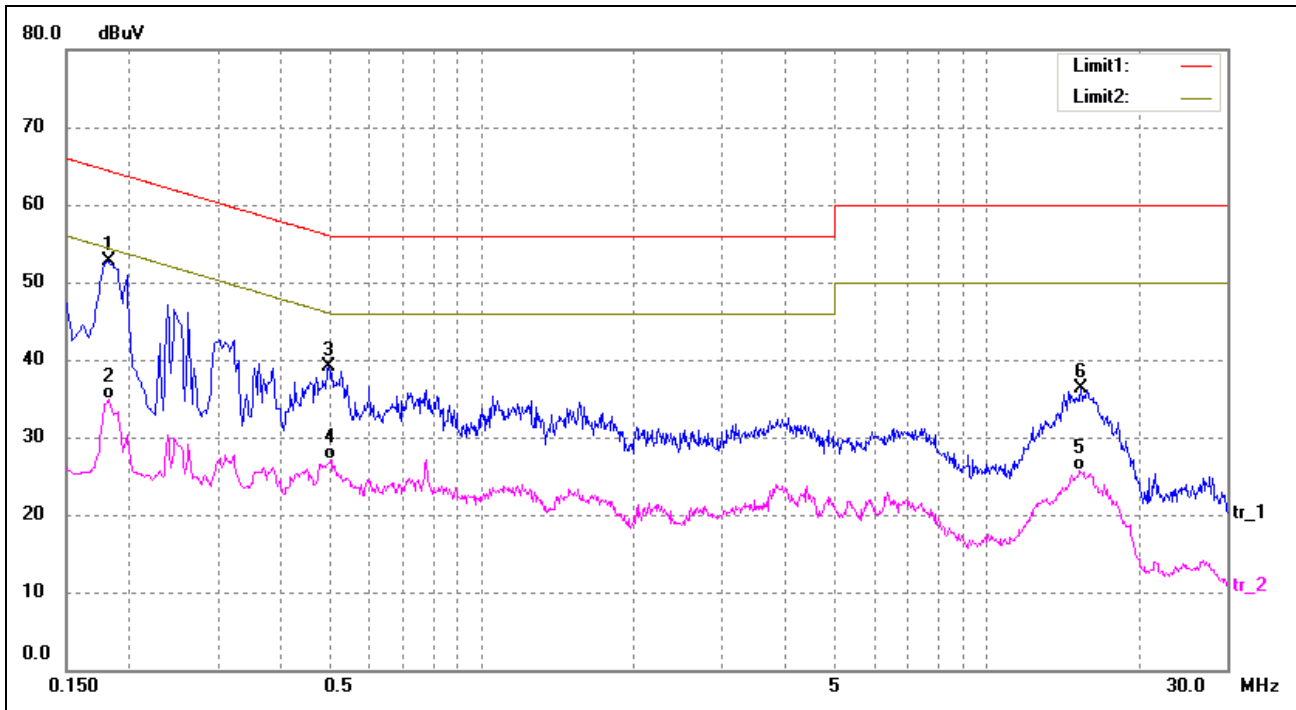

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1820	40.27	12.50	52.77	64.39	-11.62	peak
2	0.1820	22.35	12.50	34.85	54.39	-19.54	AVG
3	0.4980	26.53	12.50	39.03	56.03	-17.00	peak
4	0.5020	14.58	12.50	27.08	46.00	-18.92	AVG
5	15.3860	14.61	11.08	25.69	50.00	-24.31	AVG
6	15.4460	25.13	11.09	36.22	60.00	-23.78	peak

4. Radiated Emissions

4.1 Measurement Uncertainty


Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is ± 5.10 dB.


4.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

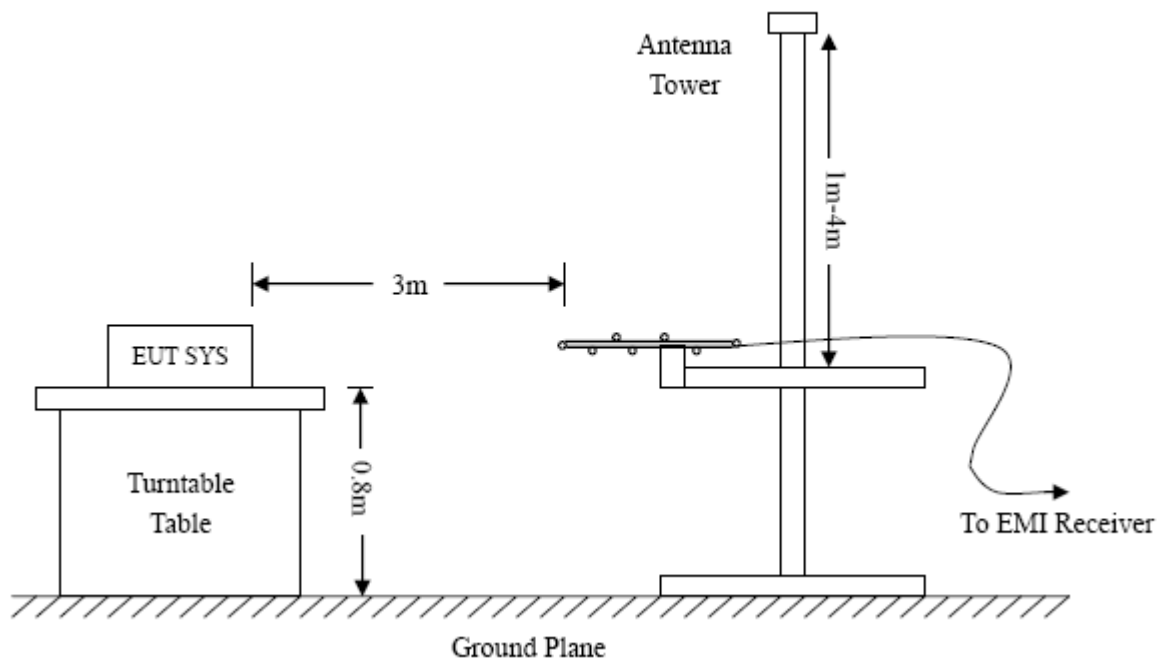

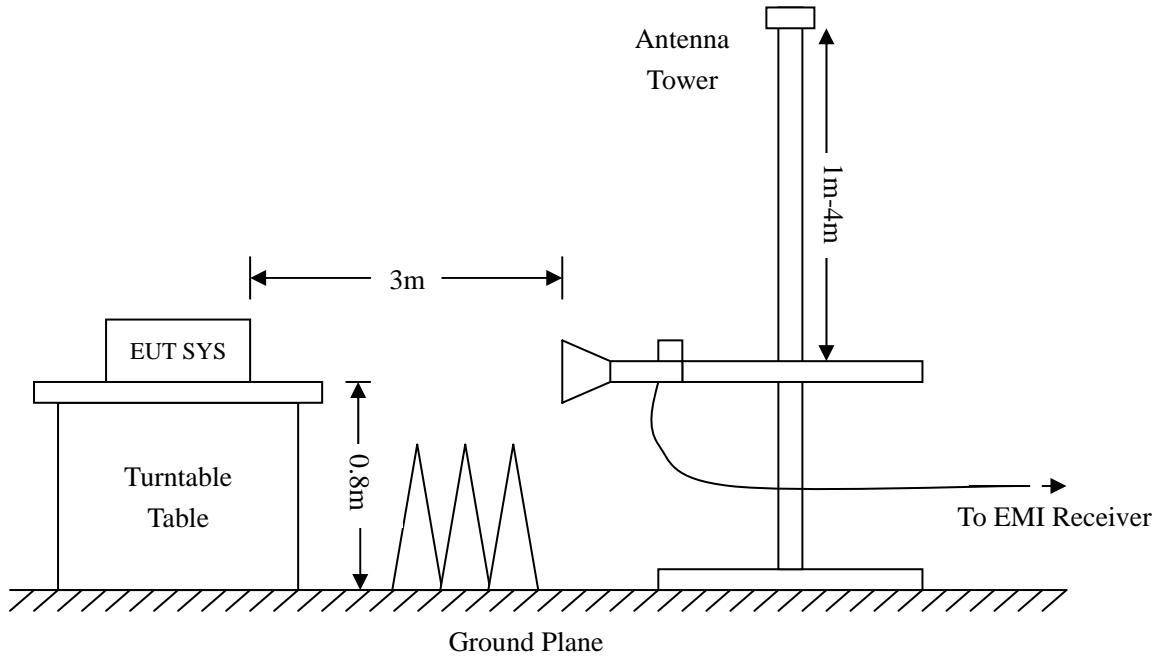

4.3 Test Receiver Setup

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

4.6 Summary of Test Results/Plots

According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:


Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

-2.69 dB at 616.3718 MHz in the Horizontal polarization, 9 kHz to 1 GHz, 3Meters

Plot of Radiated Emissions Test Data


EUT: *Wireless Digital Display*
 Tested Model: *PXT515WR04F*
 Operating Condition: *TM1*
 Comment: *AC 120V/60Hz Adapter:DC12V*

Test Specification: *Horizontal*

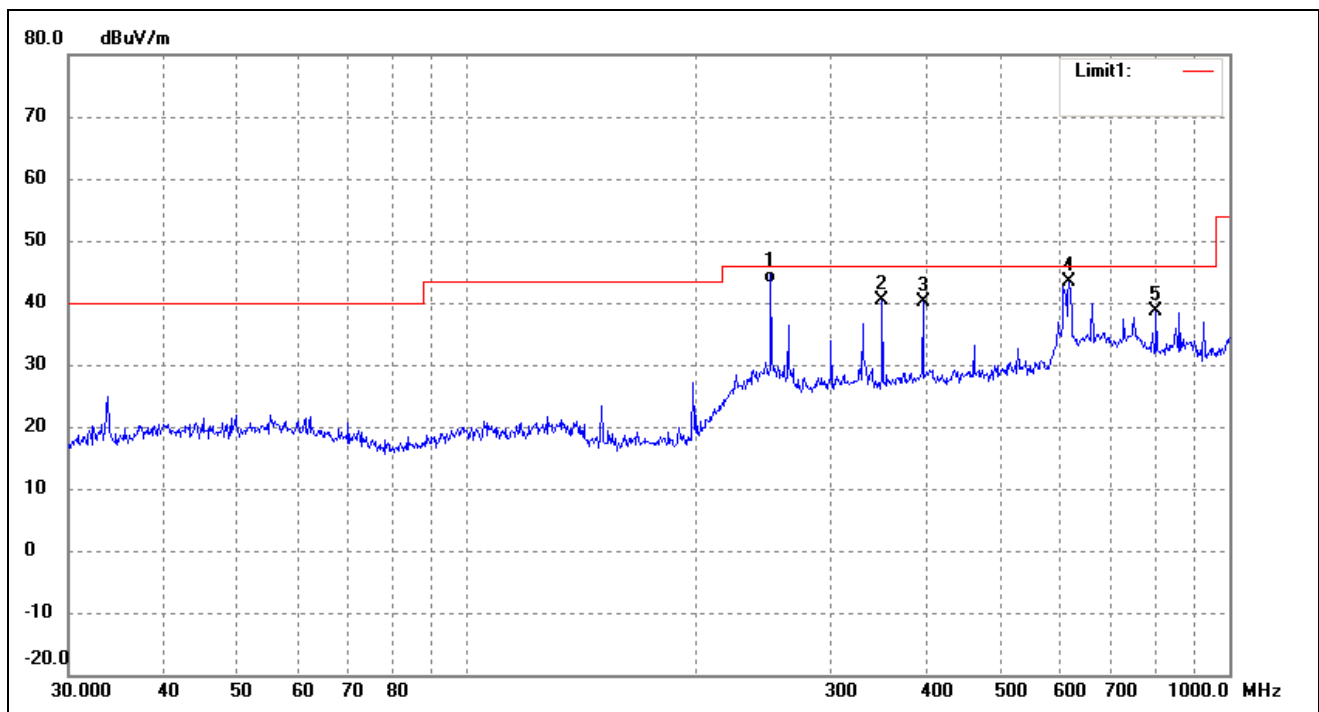

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	250.3012	33.40	9.71	43.11	46.00	-2.89	35	100	peak
2	350.4768	28.35	11.99	40.34	46.00	-5.66	124	100	peak
3	396.2415	27.29	12.95	40.24	46.00	-5.76	168	100	peak
4	616.3718	25.14	18.17	43.31	46.00	-2.69	213	100	peak
5	801.7863	21.41	17.26	38.67	46.00	-7.33	279	100	peak

Test Specification: Vertical

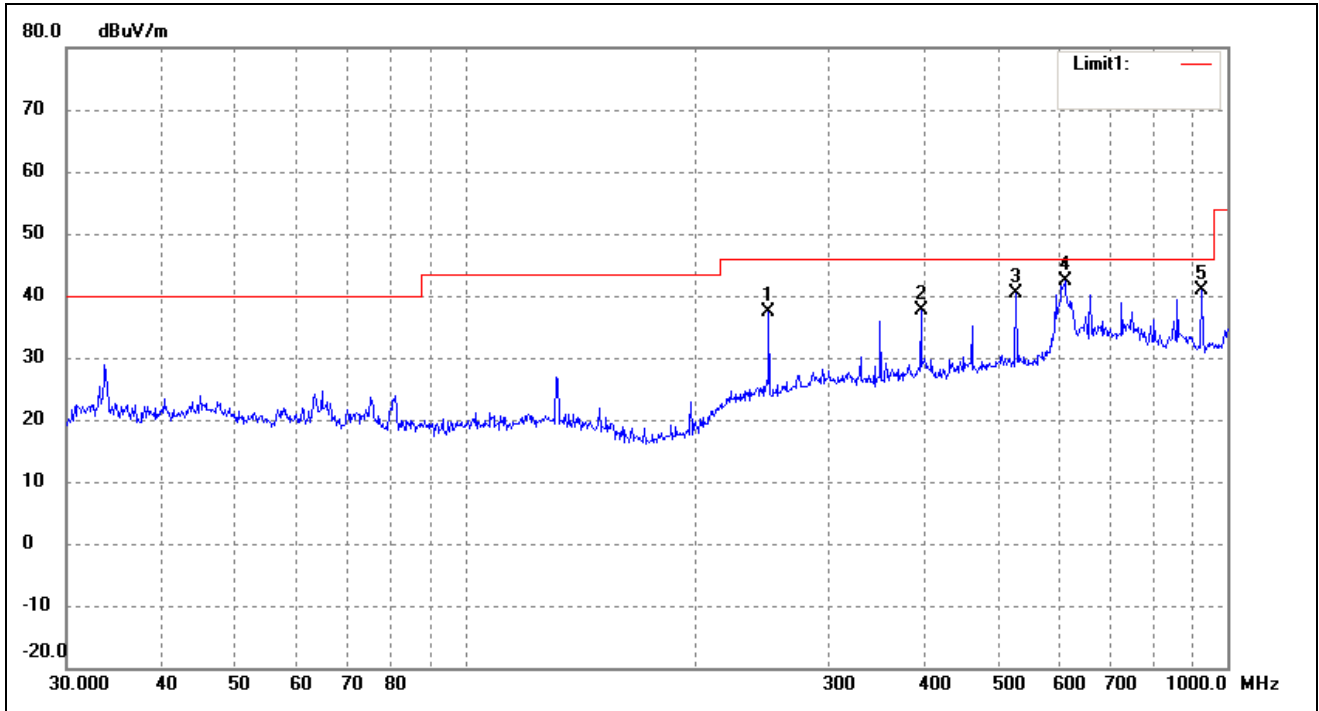


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	250.3012	27.61	9.71	37.32	46.00	-8.68	71	100	peak
2	396.2415	24.68	12.95	37.63	46.00	-8.37	158	100	peak
3	528.2458	26.06	14.35	40.41	46.00	-5.59	192	100	peak
4	612.0642	23.90	18.48	42.38	46.00	-3.62	219	100	peak
5	925.7563	25.26	15.69	40.95	46.00	-5.05	267	100	peak

Plot of Radiated Emissions Test Data


EUT: *Wireless Digital Display*
 Tested Model: *PXT515WR04F*
 Operating Condition: *TM2*
 Comment: *AC 120V/60Hz Adapter:DC12V*

Test Specification: *Horizontal*

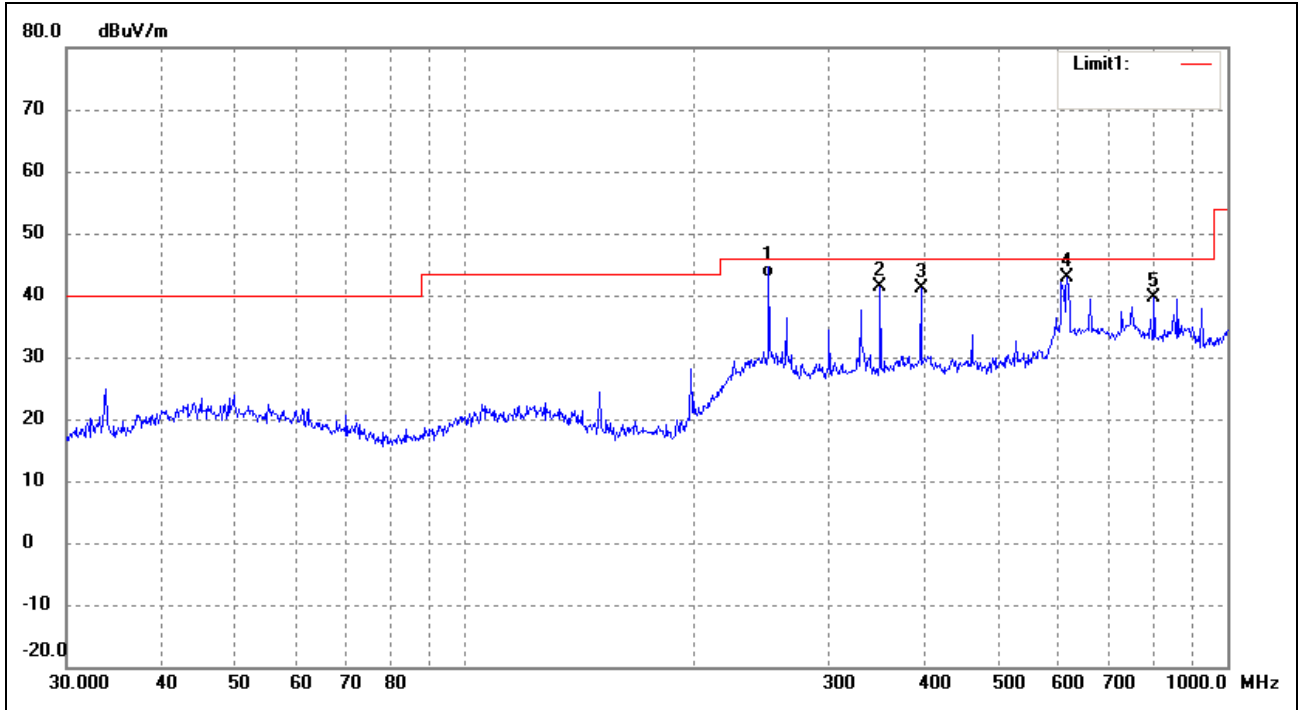

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	250.3009	33.10	9.71	42.81	46.00	-3.19	135	100	peak
2	350.4768	29.35	11.99	41.34	46.00	-4.66	176	100	peak
3	396.2413	28.29	12.95	41.24	46.00	-4.76	265	100	peak
4	616.3718	24.64	18.17	42.81	46.00	-3.19	51	100	peak
5	801.7862	22.41	17.26	39.67	46.00	-6.33	316	100	peak

Test Specification: Vertical

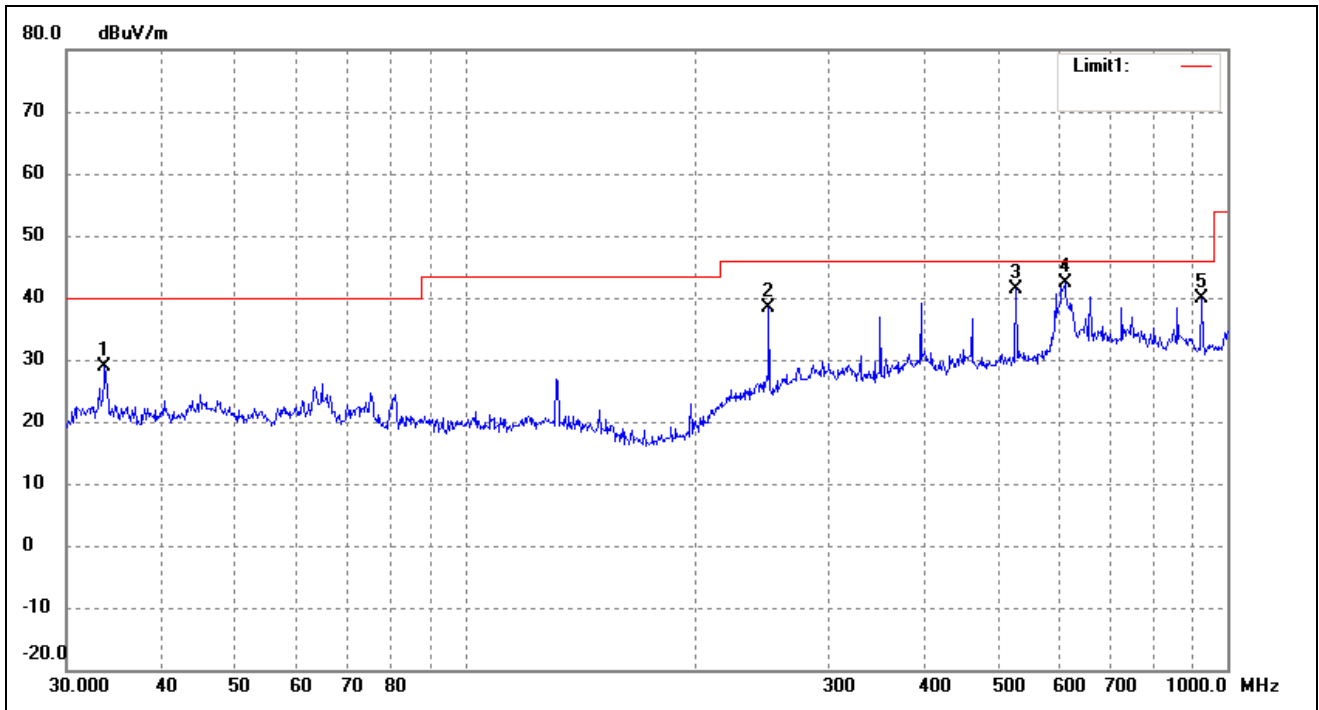

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.6803	24.57	4.19	28.76	40.00	-11.24	33	100	peak
2	250.3010	28.61	9.71	38.32	46.00	-7.68	158	100	peak
3	528.2458	27.06	14.35	41.41	46.00	-4.59	191	100	peak
4	612.0642	23.90	18.48	42.38	46.00	-3.62	256	100	peak
5	925.7563	24.26	15.69	39.95	46.00	-6.05	315	100	peak

The measurements greater than 20dB below the limit from 9kHz to 30MHz and test data are not provided.

***** END OF REPORT *****