

# FCC Part 15C Measurement and Test Report

For

**Spheris Digital Ltd.**

**Flat B, 18/F., Two Chinachem Plaza, 68 Connaught Road, Central**

**Hong Kong**

**FCC ID: YHO-PXT51516**

<b>FCC Rule(s):</b>	<u>FCC Part 15C</u>
<b>Product Description:</b>	<u>Wireless Digital Display</u>
<b>Tested Model:</b>	<u>PXT515WR04G</u>
<b>Report No.:</b>	<u>STR16058106I</u>
<b>Tested Date:</b>	<u>2016-05-26 to 2016-07-04</u>
<b>Issued Date:</b>	<u>2016-07-04</u>
<b>Tested By:</b>	<u>Leo Lee / Engineer</u> <i>Leo Lee</i>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u> <i>Silin Chen</i>
<b>Approved &amp; Authorized By:</b>	<u>Jandy so / PSQ Manager</u> <i>Jandyso</i>
<b>Prepared By:</b>	

**Shenzhen SEM.Test Technology Co., Ltd.**  
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)  
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
<b>2. SUMMARY OF TEST RESULTS</b>	<b>7</b>
<b>3. RF EXPOSURE</b>	<b>8</b>
3.1 STANDARD APPLICABLE	8
3.2 TEST RESULT	8
<b>4. ANTENNA REQUIREMENT</b>	<b>9</b>
4.1 STANDARD APPLICABLE	9
4.2 EVALUATION INFORMATION	9
<b>5. POWER SPECTRAL DENSITY</b>	<b>10</b>
5.1 STANDARD APPLICABLE	10
5.2 TEST PROCEDURE	10
5.3 ENVIRONMENTAL CONDITIONS	10
5.4 SUMMARY OF TEST RESULTS/PLOTS	11
<b>6. 6DB BANDWIDTH</b>	<b>17</b>
6.1 STANDARD APPLICABLE	17
6.2 TEST PROCEDURE	17
6.3 ENVIRONMENTAL CONDITIONS	17
6.4 SUMMARY OF TEST RESULTS/PLOTS	17
<b>7. RF OUTPUT POWER</b>	<b>23</b>
7.1 STANDARD APPLICABLE	23
7.2 TEST PROCEDURE	23
7.3 ENVIRONMENTAL CONDITIONS	23
7.4 SUMMARY OF TEST RESULTS/PLOTS	24
<b>8. FIELD STRENGTH OF SPURIOUS EMISSIONS</b>	<b>30</b>
8.1 STANDARD APPLICABLE	30
8.2 TEST PROCEDURE	30
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	31
8.4 ENVIRONMENTAL CONDITIONS	31
8.5 SUMMARY OF TEST RESULTS/PLOTS	32
<b>9. OUT OF BAND EMISSIONS</b>	<b>53</b>
9.1 STANDARD APPLICABLE	53
9.2 TEST PROCEDURE	53
9.3 ENVIRONMENTAL CONDITIONS	54
9.4 SUMMARY OF TEST RESULTS/PLOTS	54
<b>10. CONDUCTED EMISSIONS</b>	<b>69</b>
10.1 TEST PROCEDURE	69
10.2 BASIC TEST SETUP BLOCK DIAGRAM	69
10.3 ENVIRONMENTAL CONDITIONS	69
10.4 TEST RECEIVER SETUP	70
10.5 SUMMARY OF TEST RESULTS/PLOTS	70
10.6 CONDUCTED EMISSIONS TEST DATA	70

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Spheris Digital Ltd.  
 Address of applicant: Flat B, 18/F., Two Chinachem Plaza, 68 Connaught Road, Central Hong Kong

Manufacturer: Spheris Digital Ltd.  
 Address of manufacturer: Flat B, 18/F., Two Chinachem Plaza, 68 Connaught Road, Central Hong Kong

General Description of EUT	
Product Name:	Wireless Digital Display
Trade Name:	Pix-Star
Model No.:	PXT515WR04G
Adding Model(s):	PXT515VR02G, PXT515GR02G, PXT515WR02G, PXT515VR04G, PXT515GR04G
Rated Voltage:	DC 12V
Power Adapter Model:	GME24A-120200FXR
	AC 100-240/50-60Hz,0.8A; DC 12V, 2A
<p><i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model PXT515WR04G, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz
RF Output Power:	12.91dBm(Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	-2.0 dBi
Lowest Internal Frequency	32.768kHz

## 1.2 Test Standards

The following report is prepared on behalf of the Spheris Digital Ltd in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 v03r05 for digital transmission systems shall be performed also.

## 1.4 Test Facility

### **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2<sup>nd</sup> Road, Bao'an District, Shenzhen, P.R.C (518101).

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz
TM2	802.11g	2412MHz, 2437MHz, 2462MHz
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC cable	1.71	Unshielded	With Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2016-06-04	2017-06-03
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2016-06-04	2017-06-03
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2016-06-04	2017-06-03
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2016-06-04	2017-06-03
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2016-06-04	2017-06-03
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2016-06-04	2017-06-03
SEMT-1042	Horn Antenna	ETS	3117	00086197	2016-06-04	2017-06-03
SEMT-1121	Horn Antenna	ETS	3116B	00088203	2016-06-04	2017-06-03
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2016-06-04	2017-06-03
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2016-06-04	2017-06-03
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2016-06-04	2017-06-03
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2016-06-04	2017-06-03

## 2. SUMMARY OF TEST RESULTS

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the SAR Report.



## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has an integral antenna, fulfill the requirement of this section.

## 5. Power Spectral Density

---

### 5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2 Test Procedure

According to the KDB 558074 D01 v03r05, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

### 5.3 Environmental Conditions


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

#### 5.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b	2412	-11.59	8
	2437	-10.83	8
	2462	-11.41	8
802.11g	2412	-17.13	8
	2437	-15.98	8
	2462	-17.30	8
802.11n HT20	2412	-19.05	8
	2437	-18.69	8
	2462	-19.04	8

Please refer to the following test plots:


802.11b-Low Channel

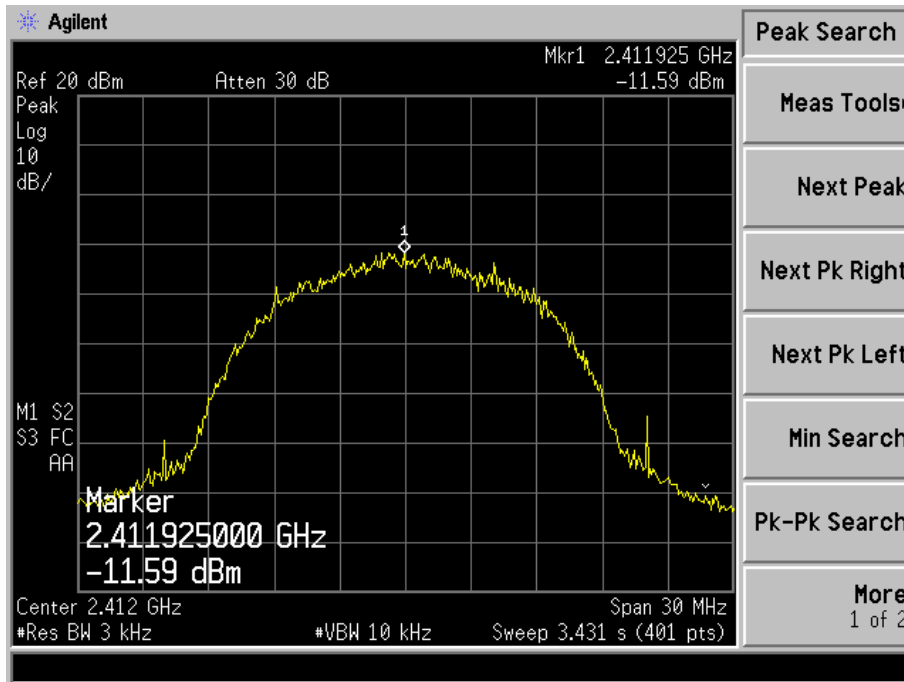


802.11b-Middle Channel

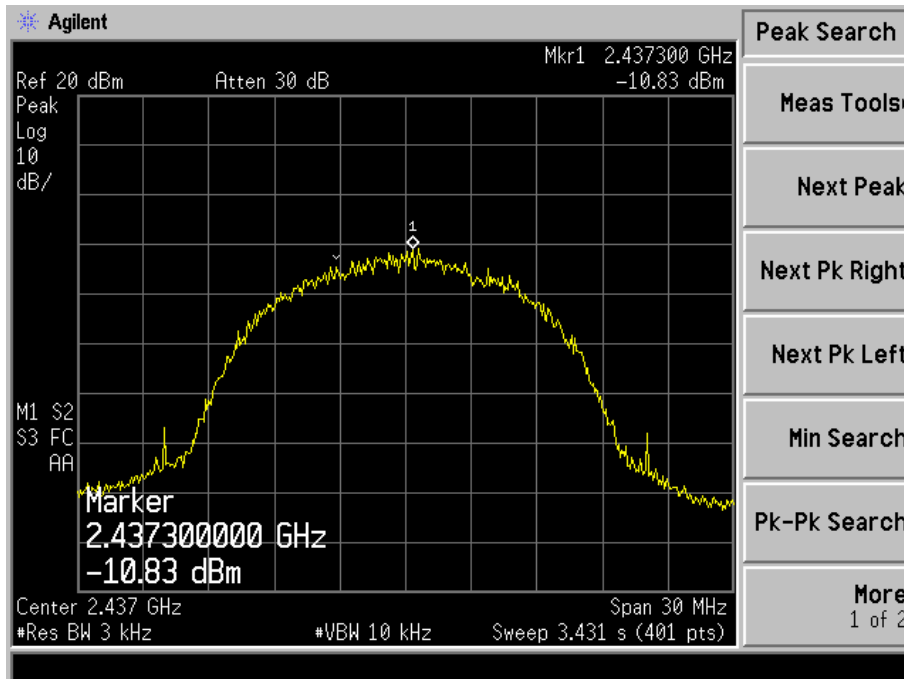


802.11b-High Channel

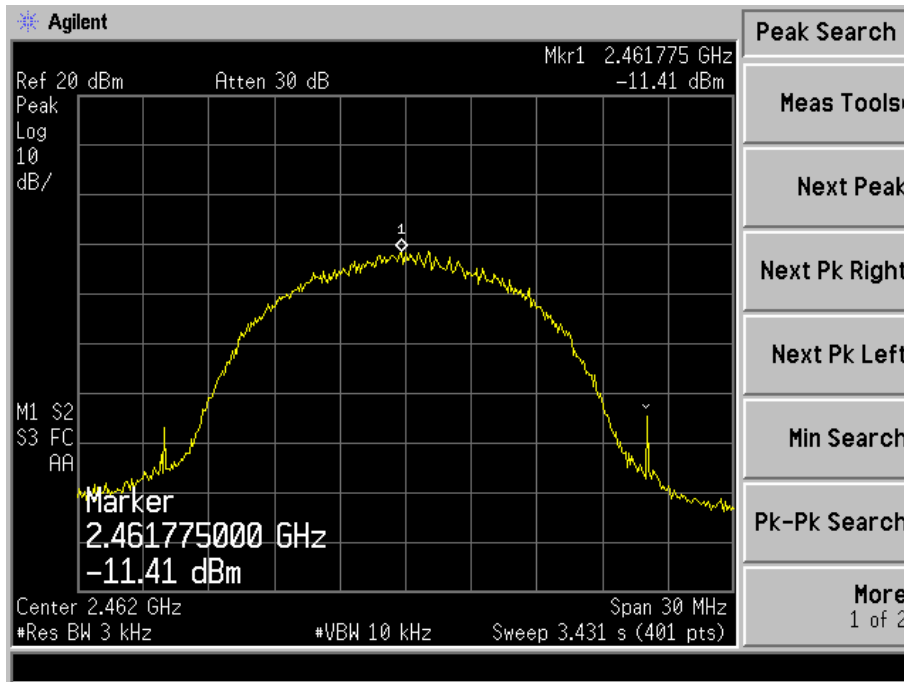


802.11g-Low Channel

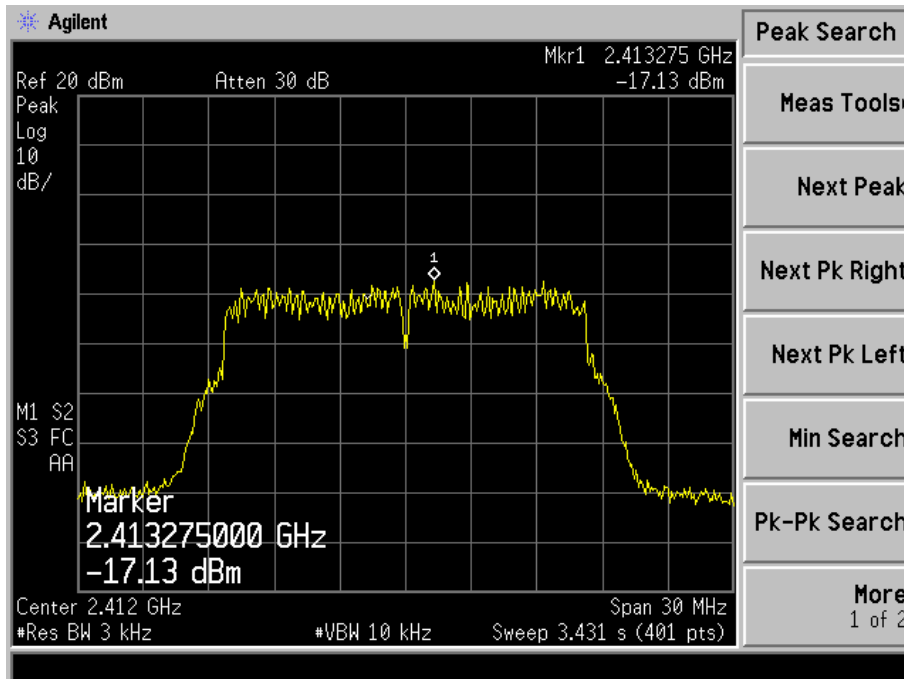


802.11g-Middle Channel

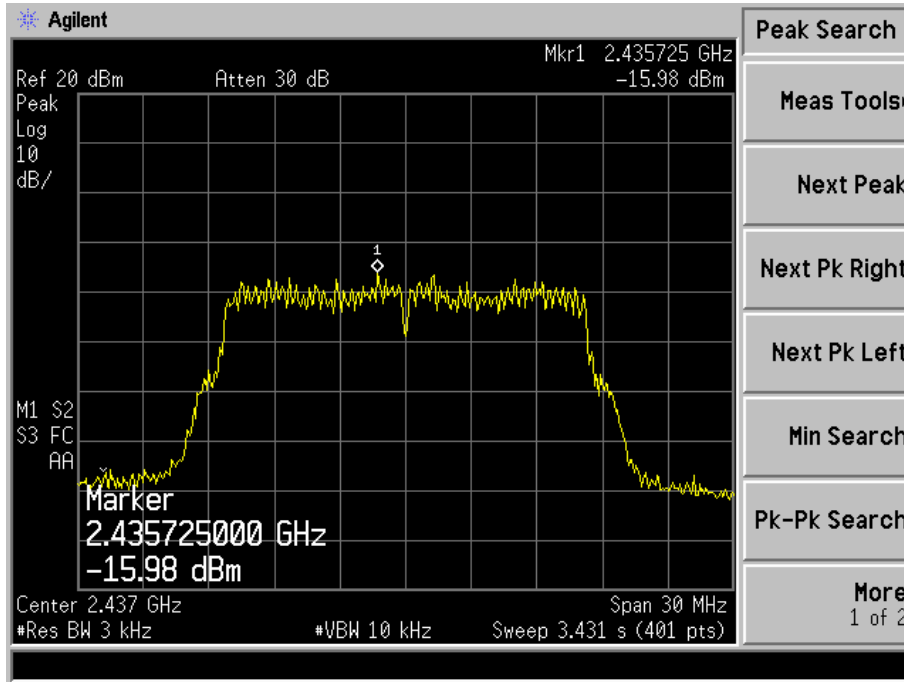


802.11g-High Channel

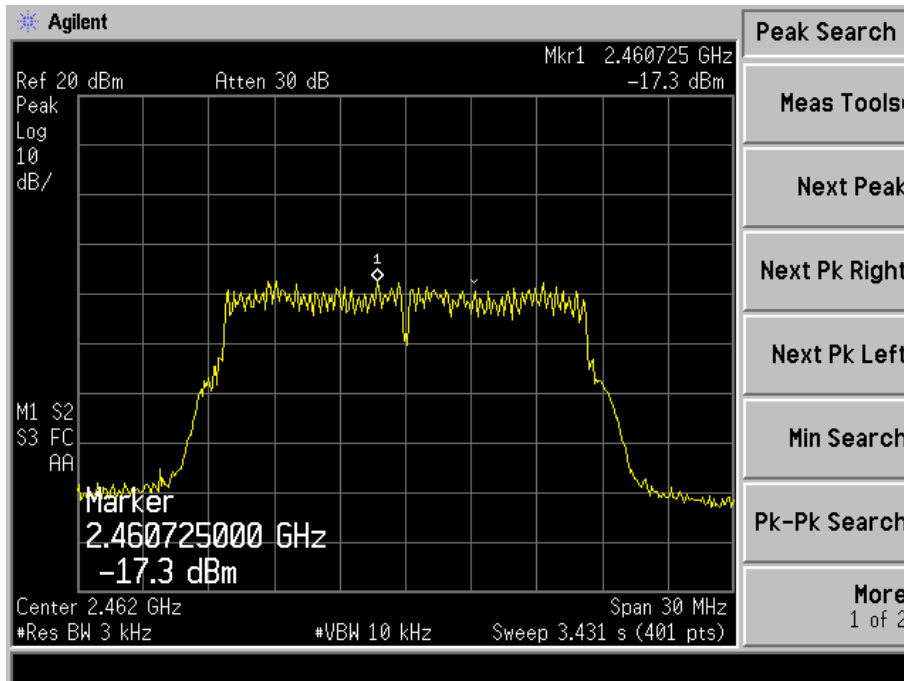


802.11n-HT20-Low Channel

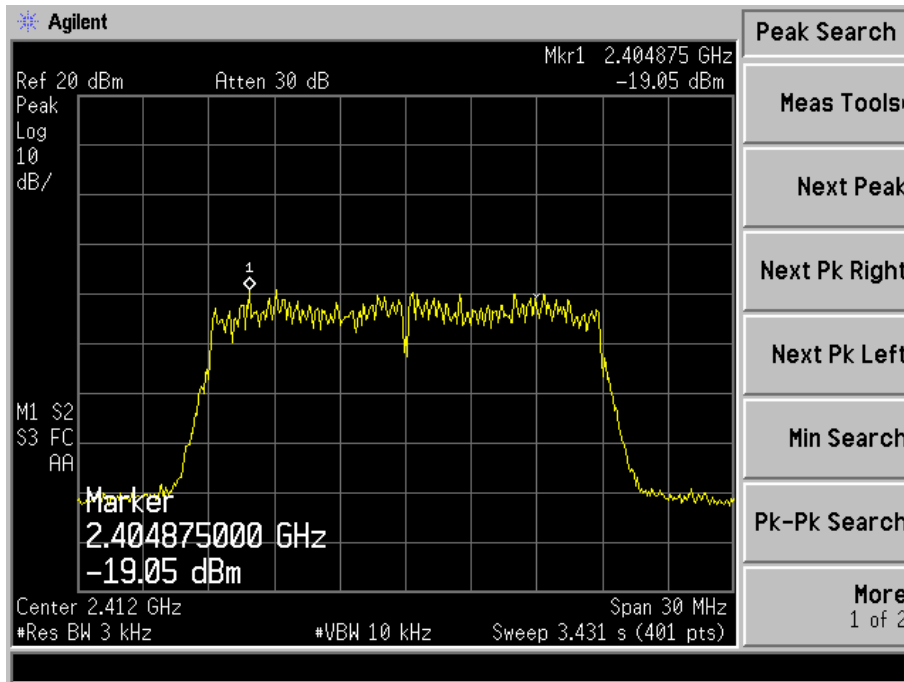

802.11n-HT20-Middle Channel

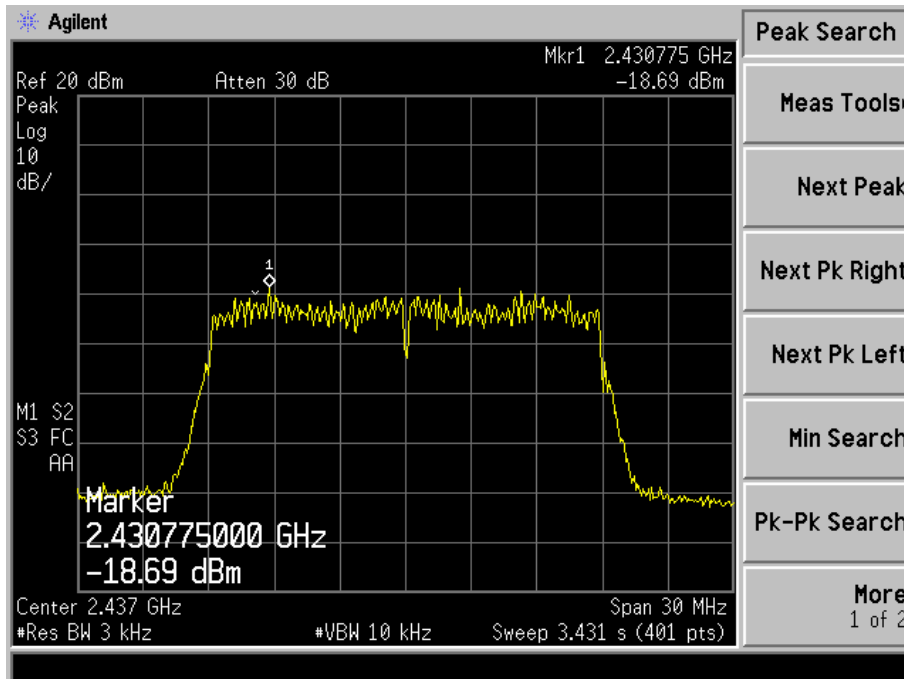

802.11n-HT20-High Channel

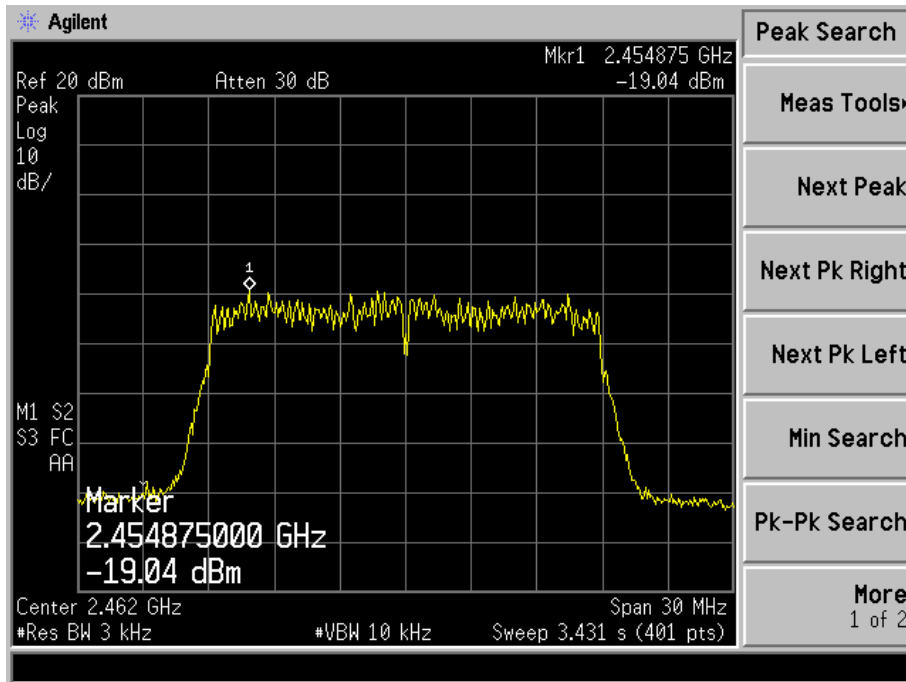



## 6. 6dB Bandwidth

### 6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.3 Environmental Conditions


Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

### 6.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz
802.11b	2412	9416	13842.0	$\geq 500$
	2437	8939	13789.7	$\geq 500$
	2462	8436	13759.7	$\geq 500$
802.11g	2412	16053	16389.8	$\geq 500$
	2437	16396	16384.6	$\geq 500$
	2462	16329	16378.6	$\geq 500$
802.11n-HT20	2412	17684	17645.9	$\geq 500$
	2437	17692	17640.6	$\geq 500$
	2462	17756	17665.1	$\geq 500$

Please refer to the following test plots:


## 802.11b-Low Channel

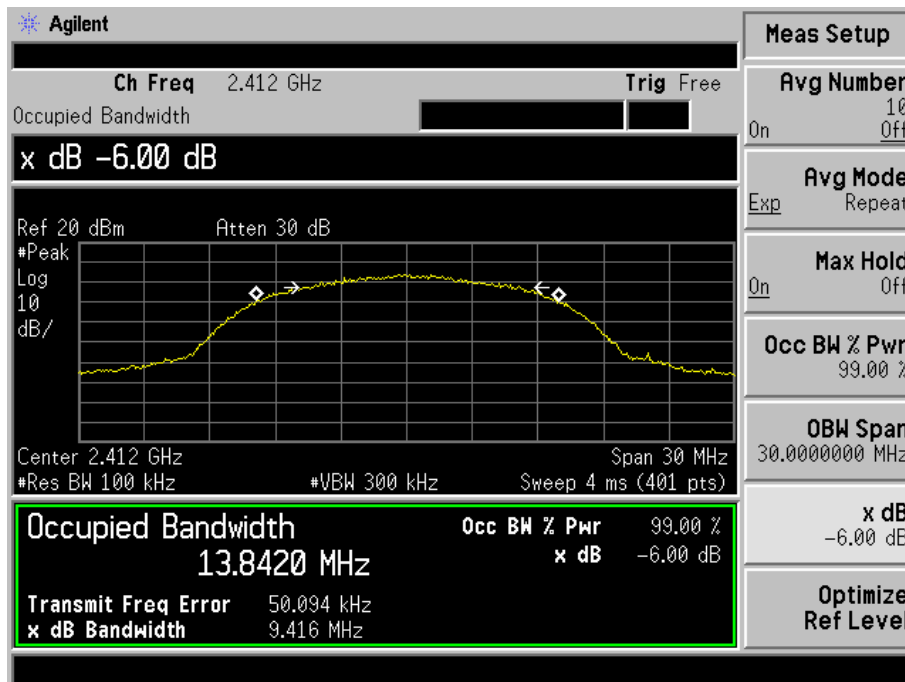


## 802.11b-Middle Channel

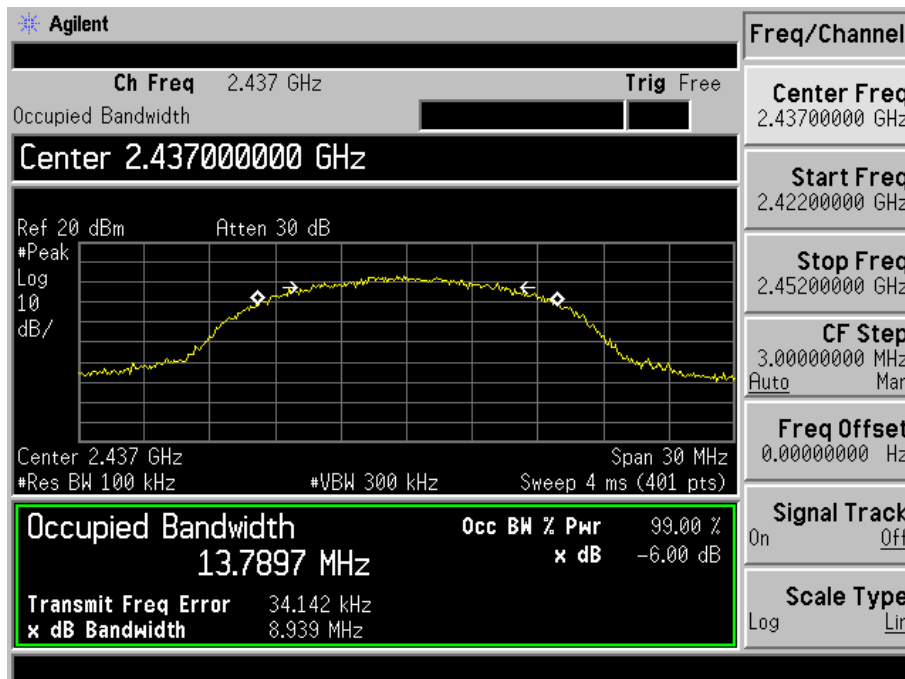


## 802.11b-High Channel

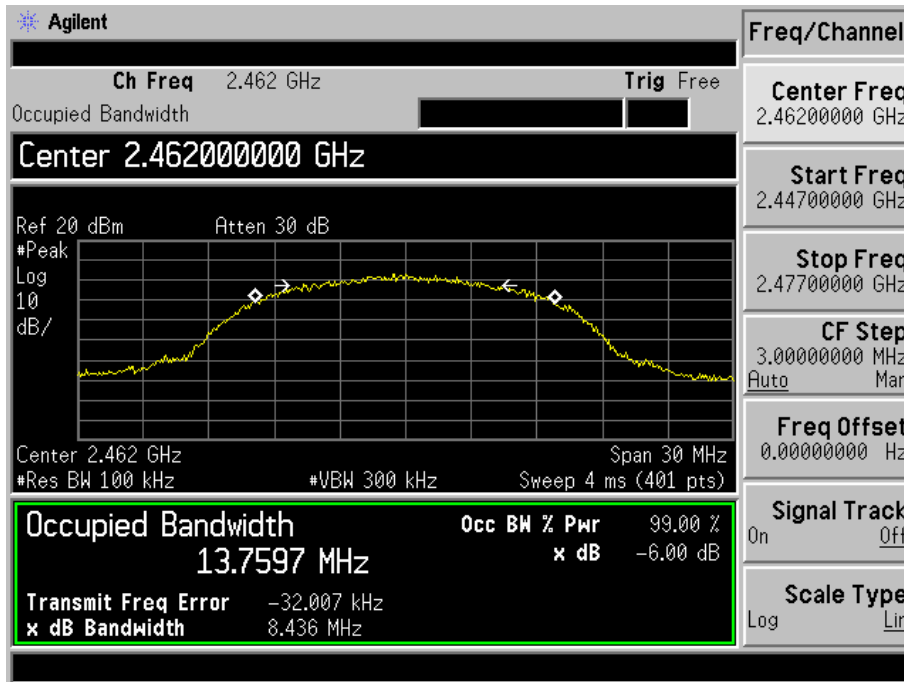


## 802.11g-Low Channel

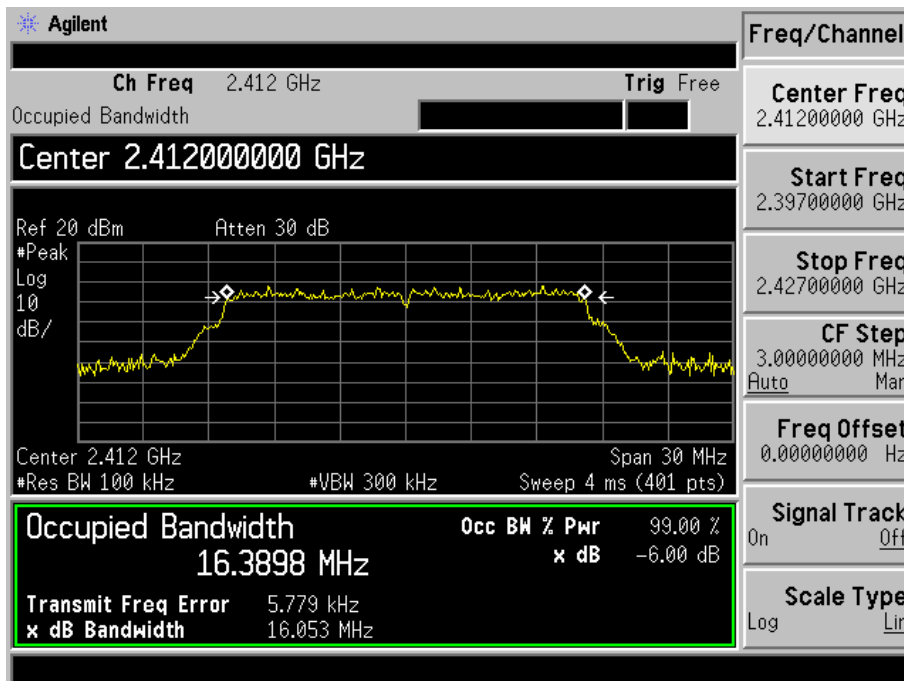


## 802.11g-Middle Channel

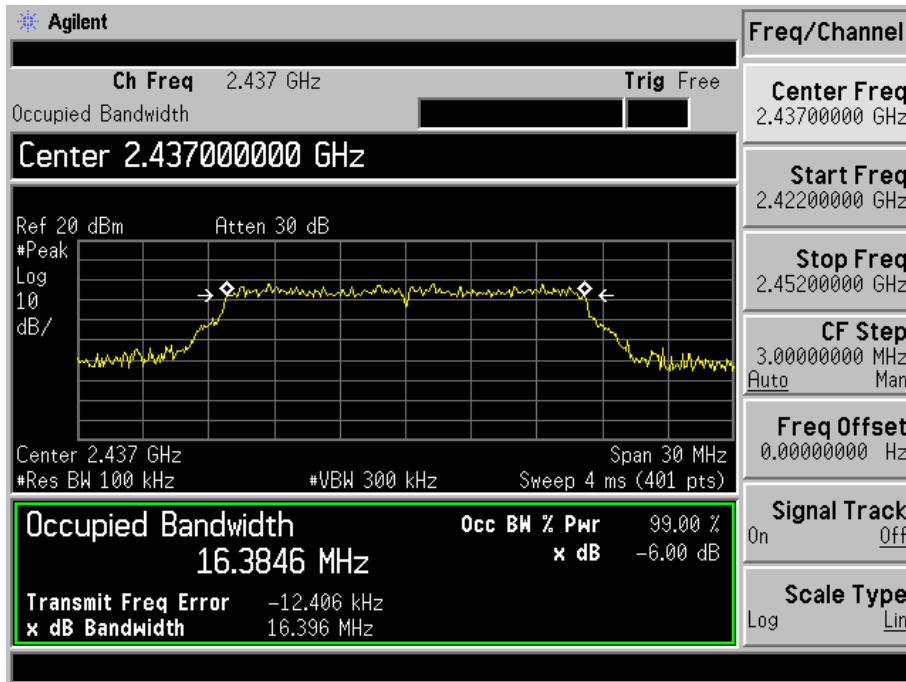


## 802.11g-High Channel

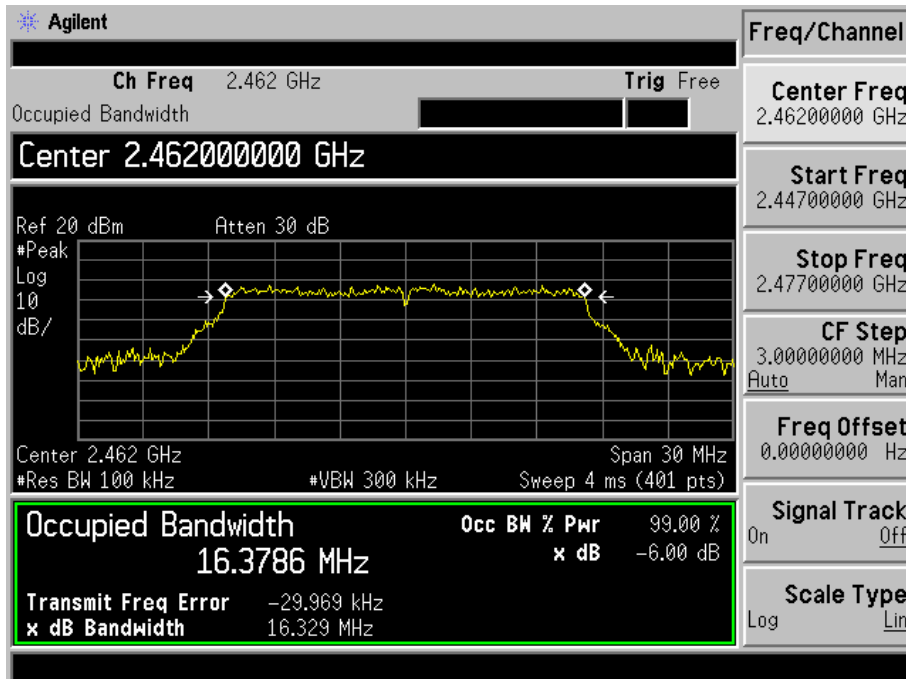


## 802.11n-HT20-Low Channel

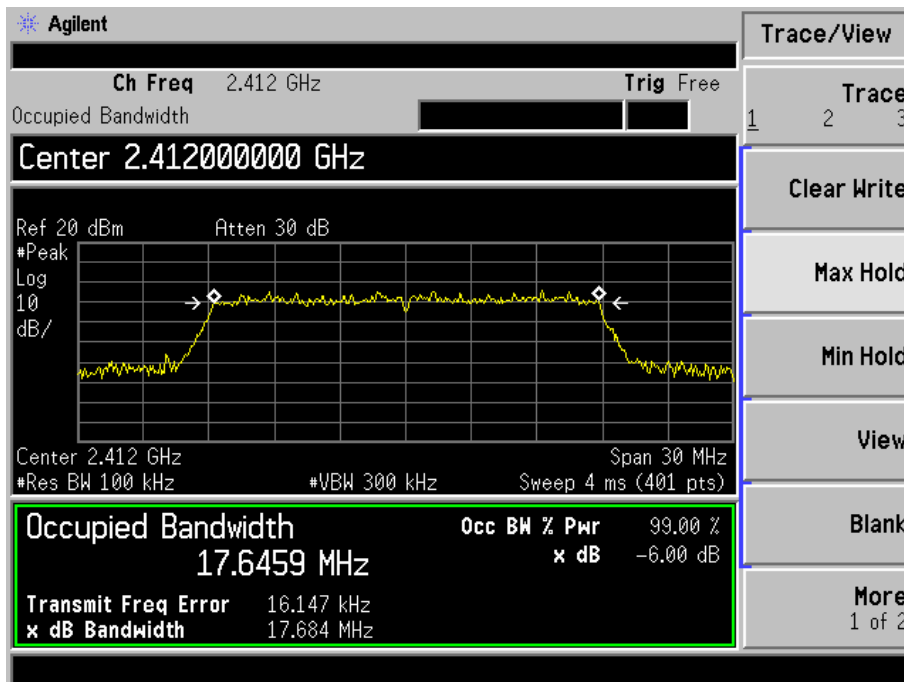

## 802.11n-HT20-Middle Channel

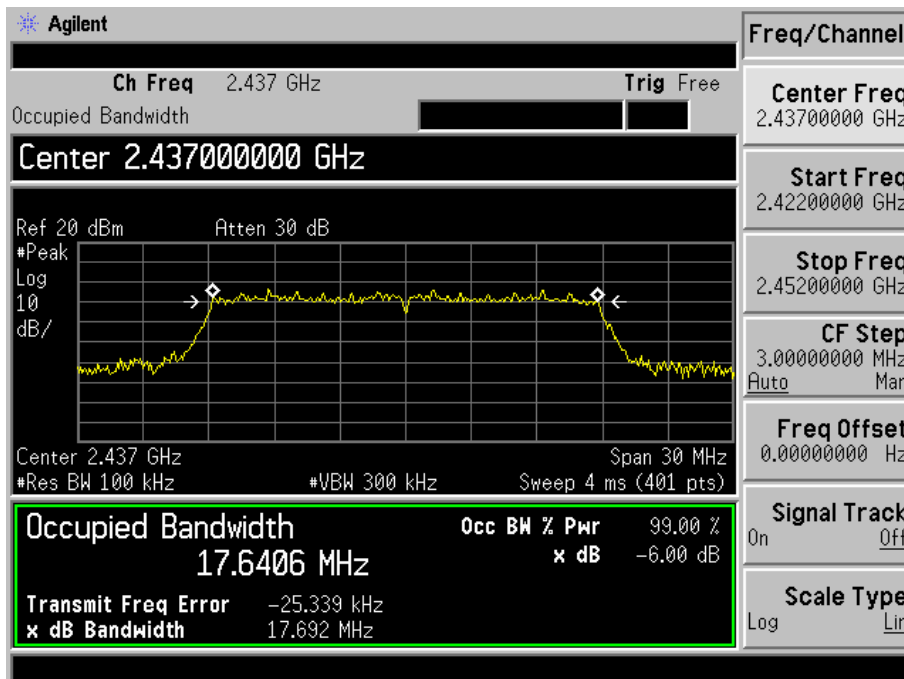

802.11n-HT20-High Channel

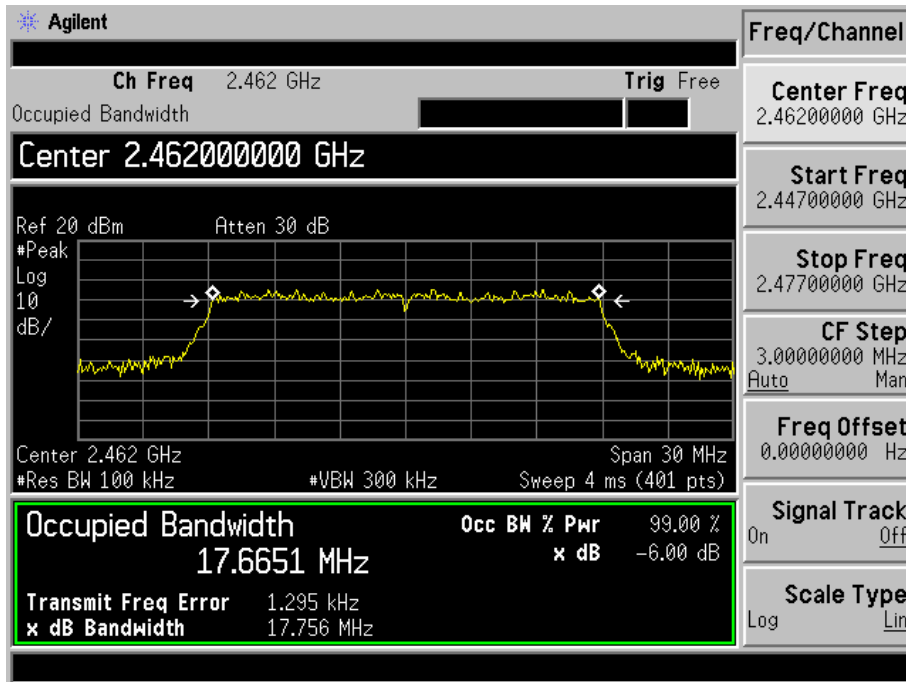

## 7. RF Output Power

### 7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 7.2 Test Procedure

According to the KDB-558074 D01 v03r05, 9.2.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle  $< 98 \%$ , use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98 \%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

### 7.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar


#### 7.4 Summary of Test Results/Plots

Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b_11Mbps	2412	12.91	19.54	1000
	2437	12.16	16.44	1000
	2462	12.00	15.85	1000
802.11g_54Mbps	2412	8.37	6.87	1000
	2437	8.61	7.26	1000
	2462	8.42	6.95	1000
802.11n HT20_MCS7	2412	6.99	5.00	1000
	2437	6.13	4.10	1000
	2462	6.07	4.05	1000


Please refer to the following test plots:




## 802.11b-11Mbps-Low Channel

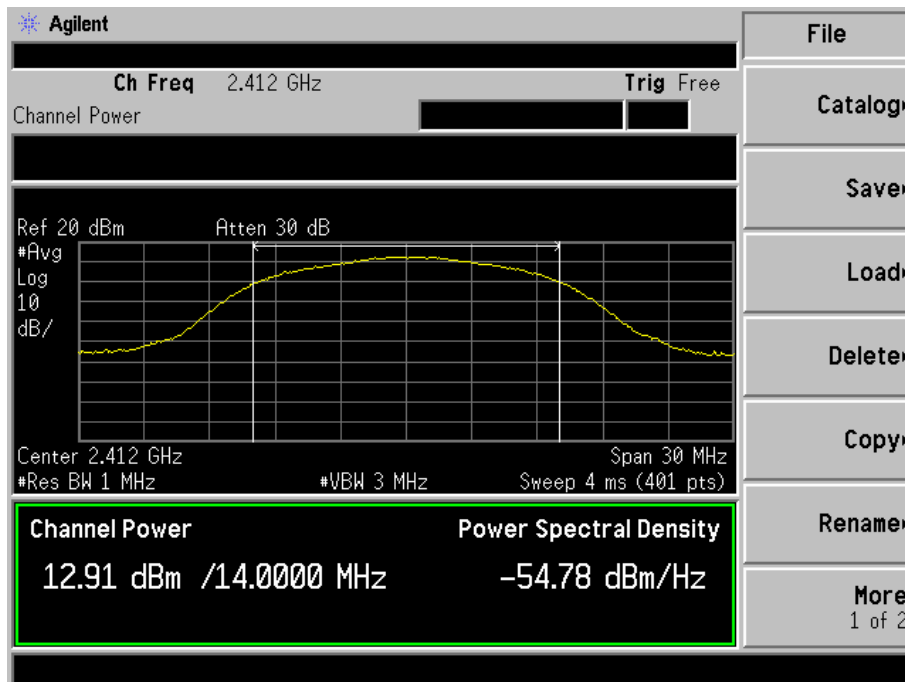


## 802.11b -11Mbps-Middle Channel

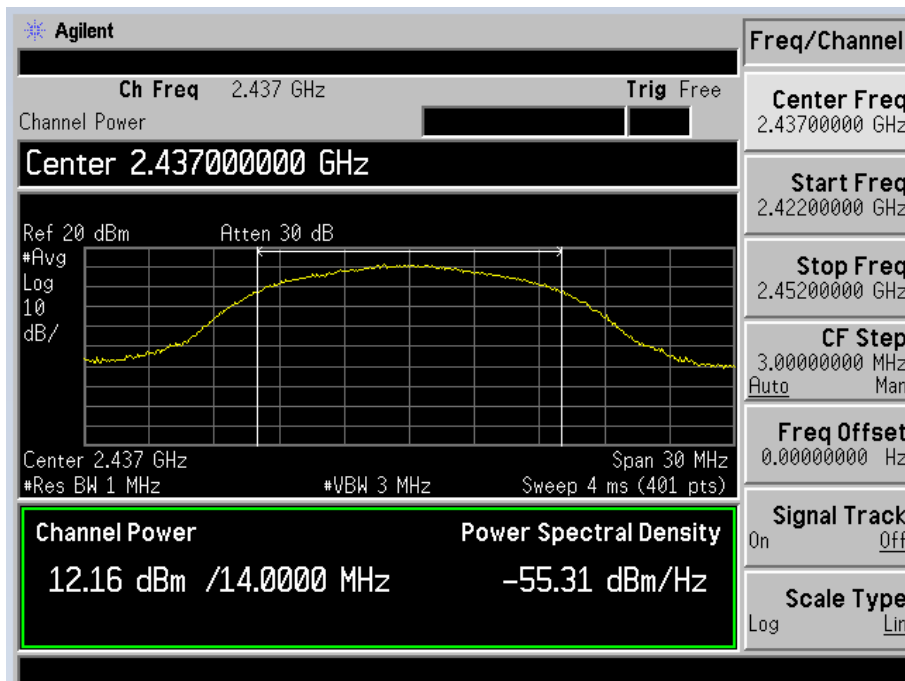


## 802.11b -11Mbps-High Channel

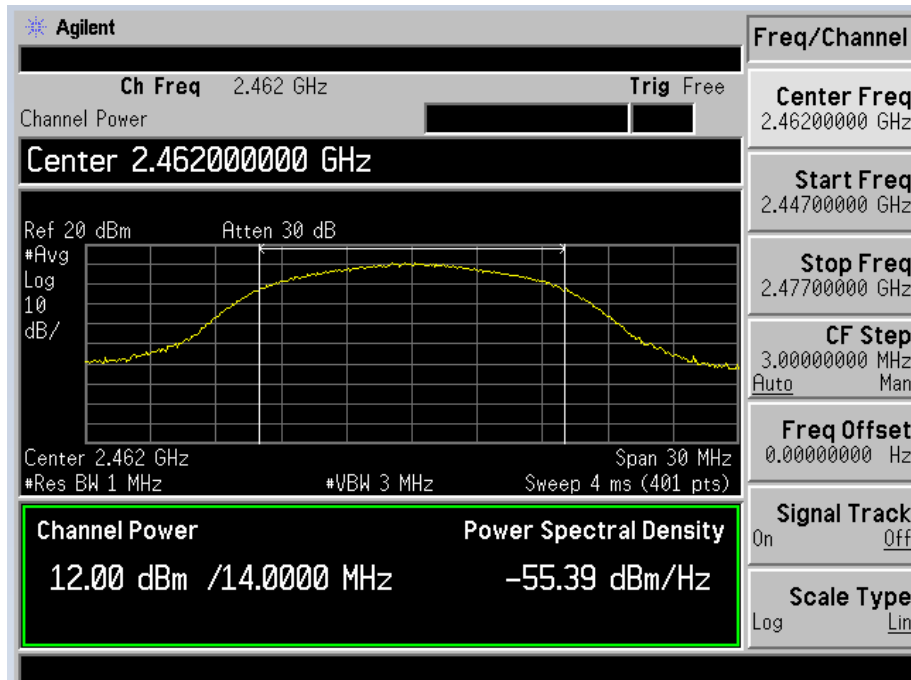


## 802.11g-54Mbps-Low Channel

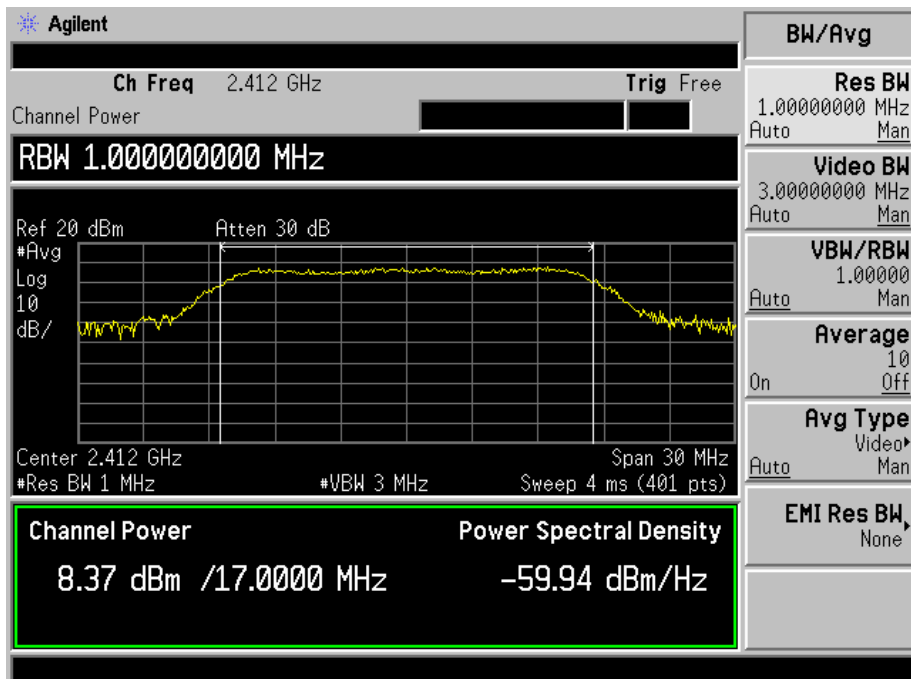


802.11g -54Mbps-Middle Channel

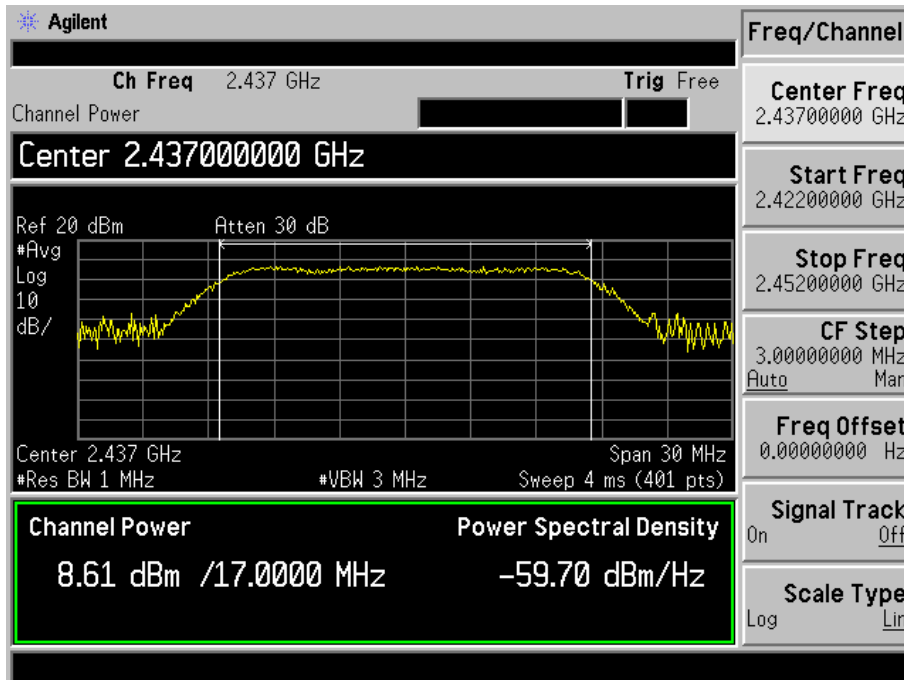


802.11g -54Mbps-High Channel

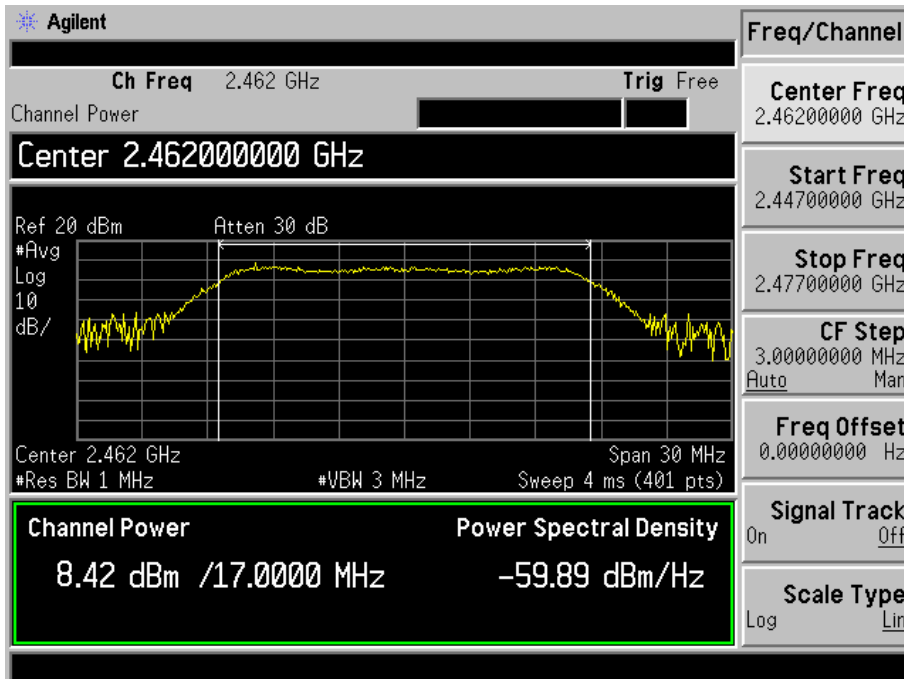


## 802.11n-HT20-MCS7-Low Channel

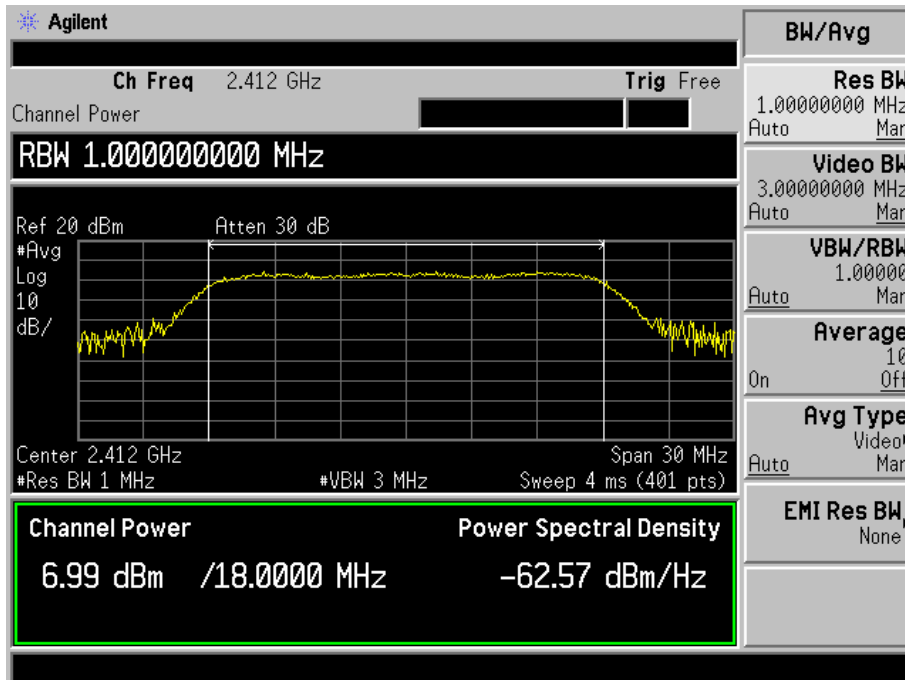

## 802.11n-HT20-MCS7-Middle Channel

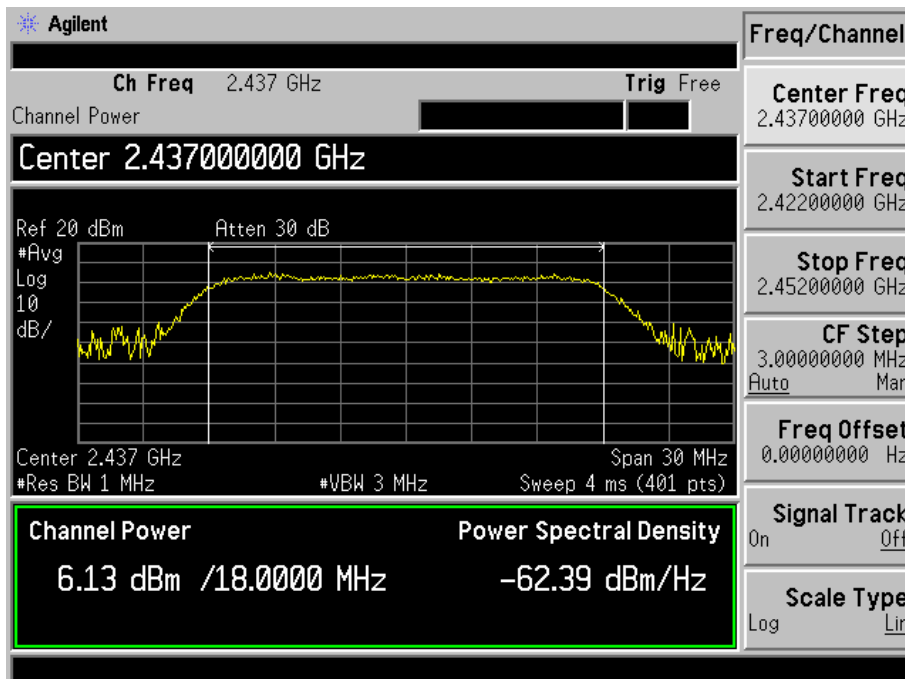

802.11n-HT20-MCS7-High Channel

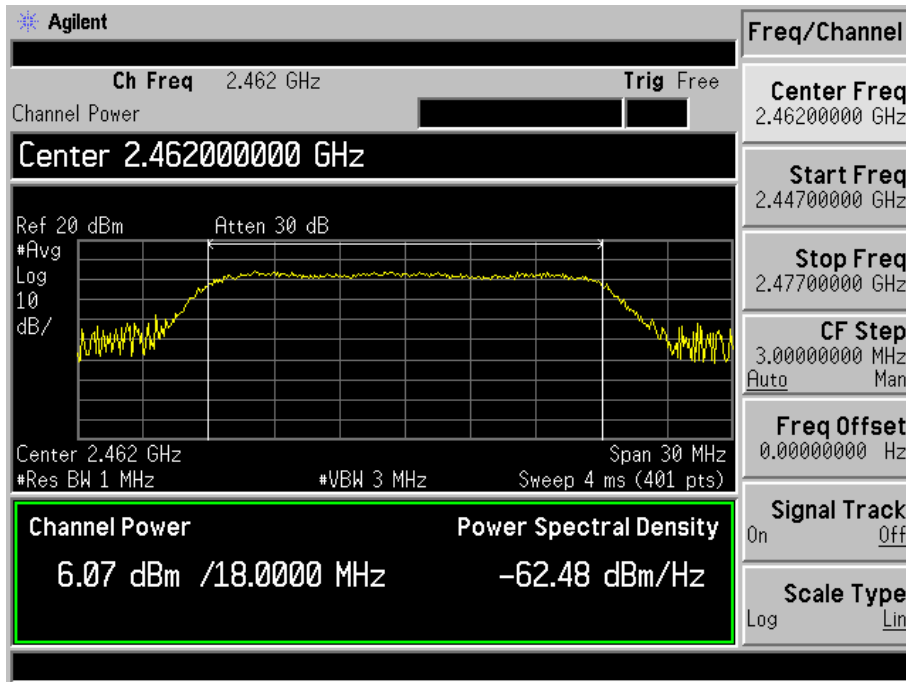

## 8. Field Strength of Spurious Emissions

### 8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

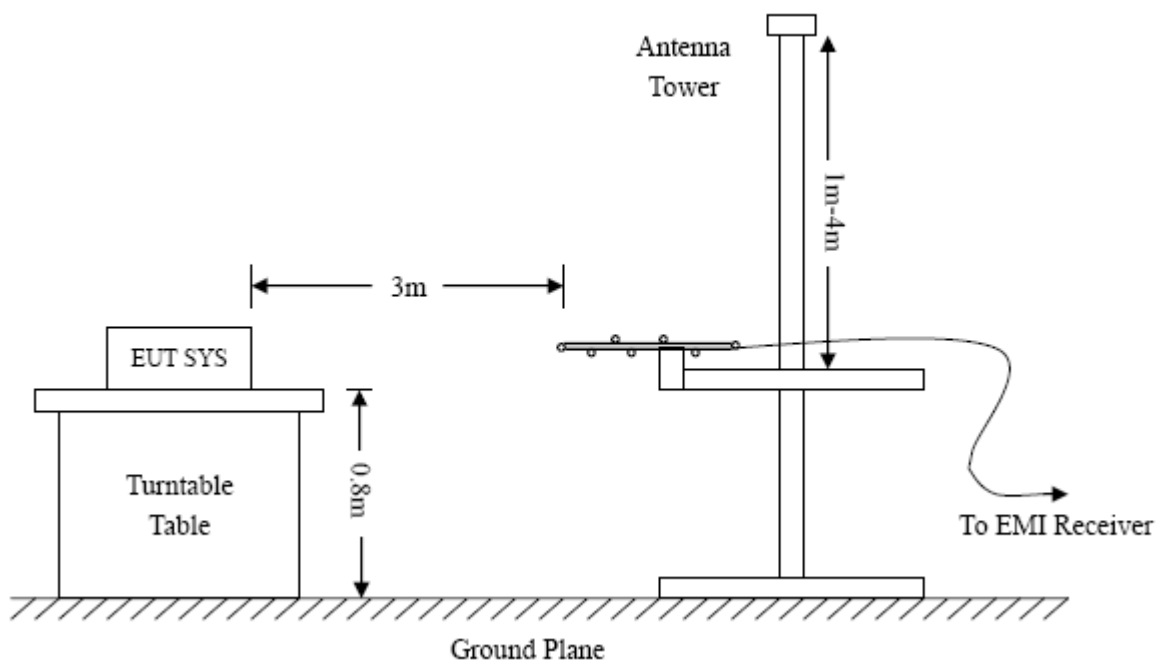

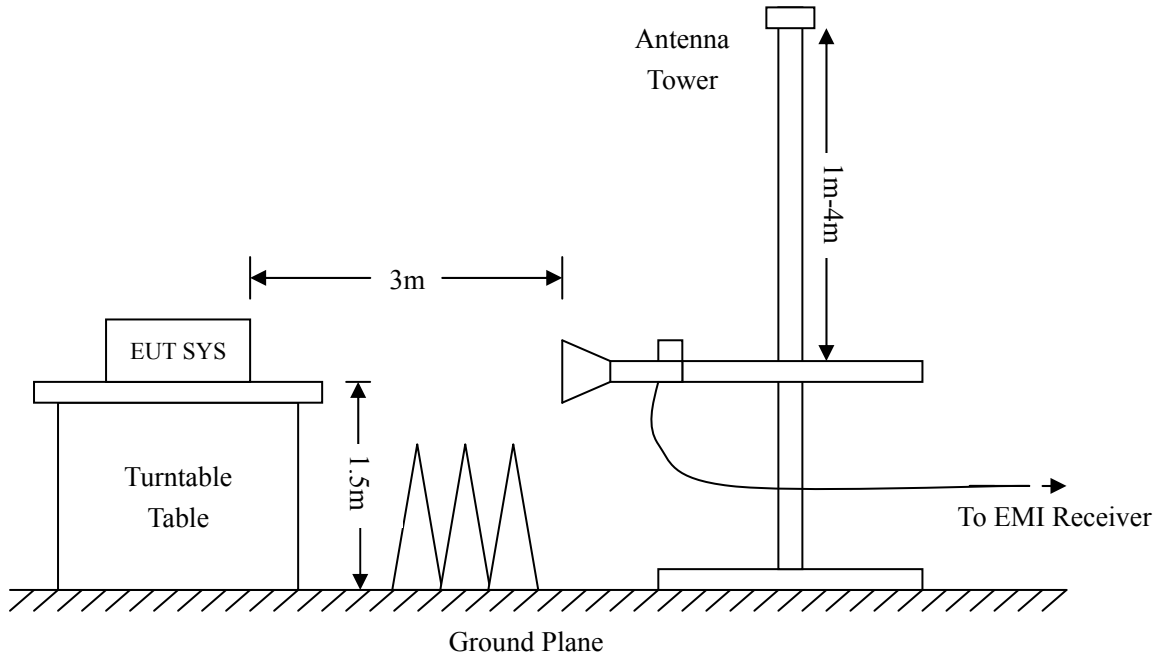

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

### 8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 8.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

### 8.5 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

#### Plot of Radiated Emissions Test Data (30MHz to 1GHz)

EUT: *Wireless Digital Display*  
 Tested Model: *PXT515WR04G*  
 Operating Condition: *802.11b Transmitting Low Channel-2412MHz*  
 Comment: *AC 120V/60Hz; Adapter DC 12V*


Test Specification: *Horizontal*

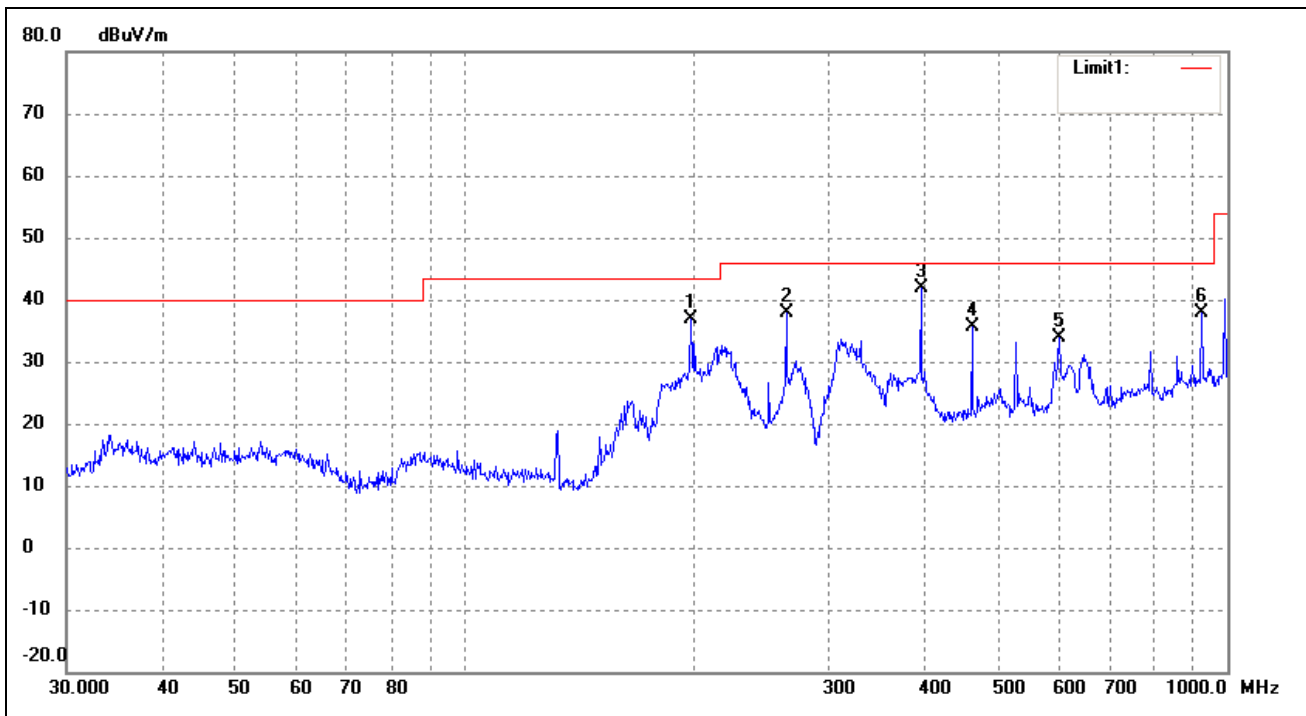

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	197.8928	45.80	-8.94	36.86	43.50	-6.64	254	100	peak
2	263.8190	44.59	-6.79	37.80	46.00	-8.20	113	100	peak
3	396.2415	44.85	-2.95	41.90	46.00	-4.10	284	100	peak
4	462.3455	38.13	-2.50	35.63	46.00	-10.37	360	100	peak
5	601.4265	33.92	-0.05	33.87	46.00	-12.13	100	100	peak
6	925.7563	33.99	3.83	37.82	46.00	-8.18	147	100	peak



Test Specification: Vertical

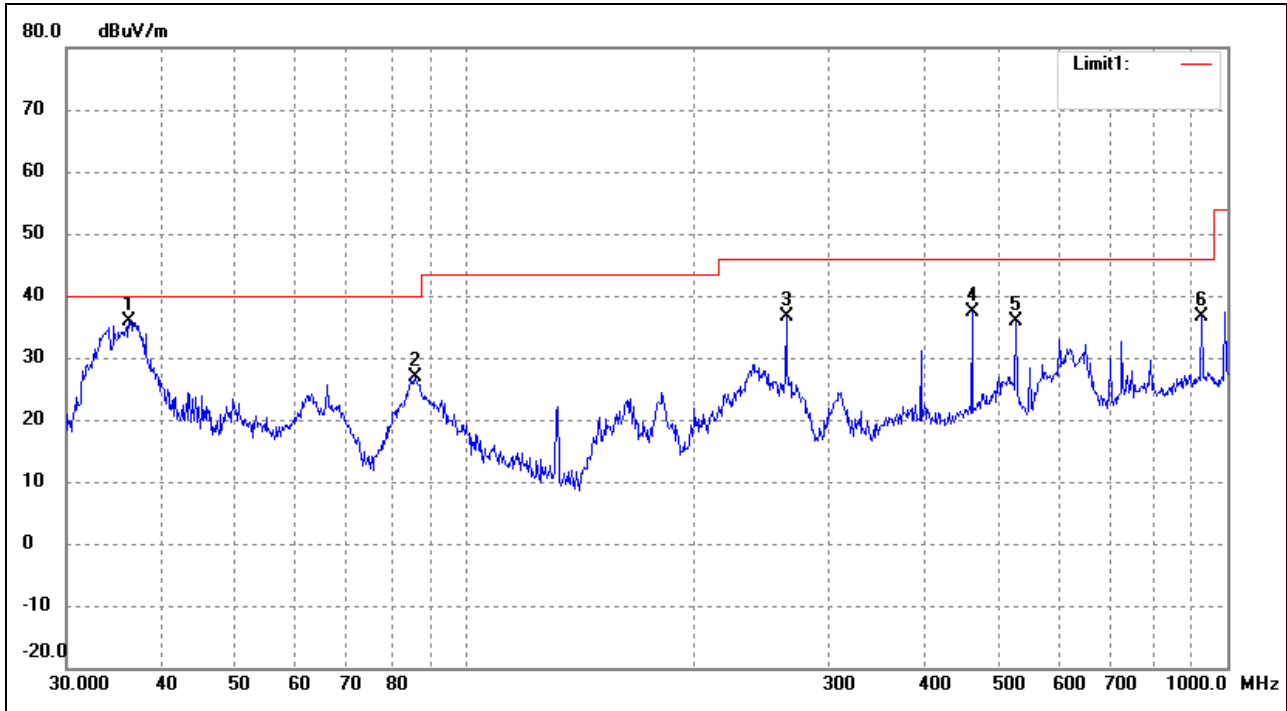


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.2541	44.61	-8.69	35.92	40.00	-4.08	114	100	peak
2	85.8984	39.54	-12.55	26.99	40.00	-13.01	270	100	peak
3	263.8190	43.48	-6.79	36.69	46.00	-9.31	360	100	peak
4	462.3455	39.98	-2.50	37.48	46.00	-8.52	116	100	peak
5	528.2458	37.75	-1.85	35.90	46.00	-10.10	257	100	peak
6	925.7563	32.85	3.83	36.68	46.00	-9.32	131	100	peak

Operating Condition: 802.11b Transmitting Middle Channel-2437MHz


Comment: AC 120V/60Hz; Adapter DC 12V

Test Specification: Horizontal

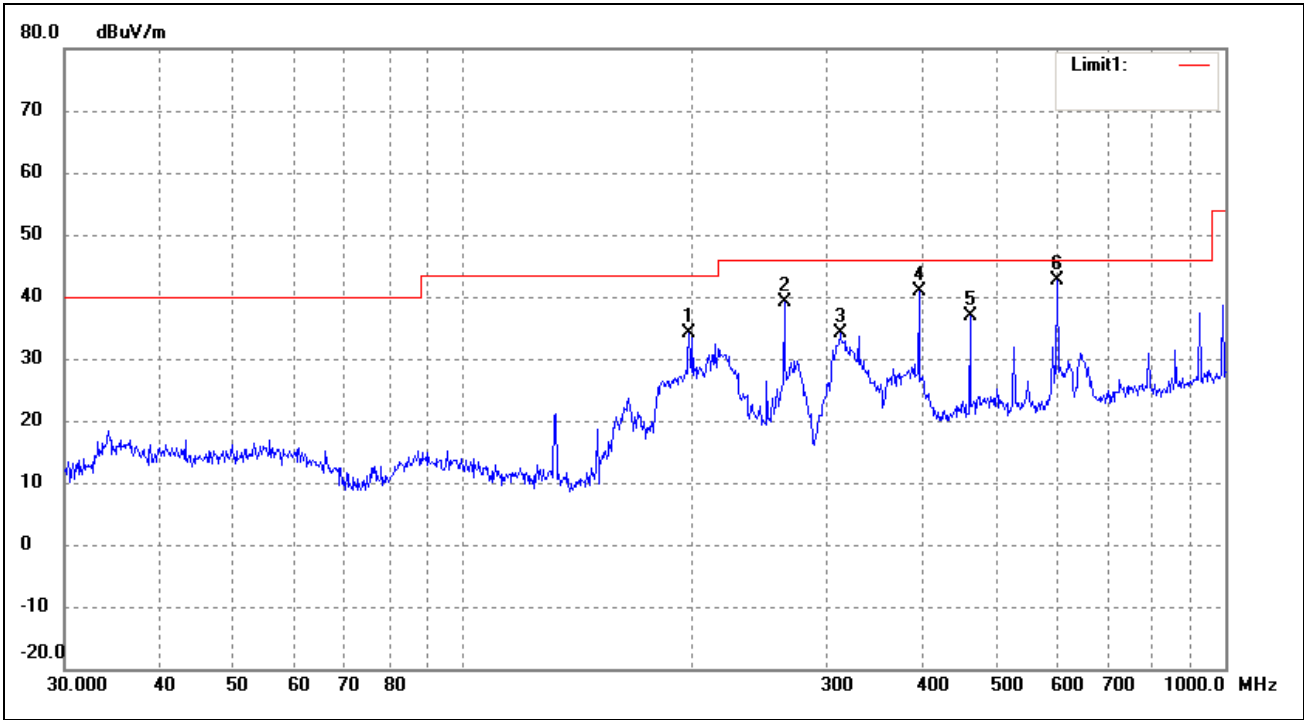

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	197.8928	43.15	-8.94	34.21	43.50	-9.29	178	100	peak
2	263.8190	45.99	-6.79	39.20	46.00	-6.80	224	100	peak
3	312.1794	39.06	-5.03	34.03	46.00	-11.97	160	100	peak
4	396.2415	43.87	-2.95	40.92	46.00	-5.08	290	100	peak
5	462.3455	39.44	-2.50	36.94	46.00	-9.06	247	100	peak
6	601.4265	42.72	-0.05	42.67	46.00	-3.33	238	100	peak

Test Specification: Vertical

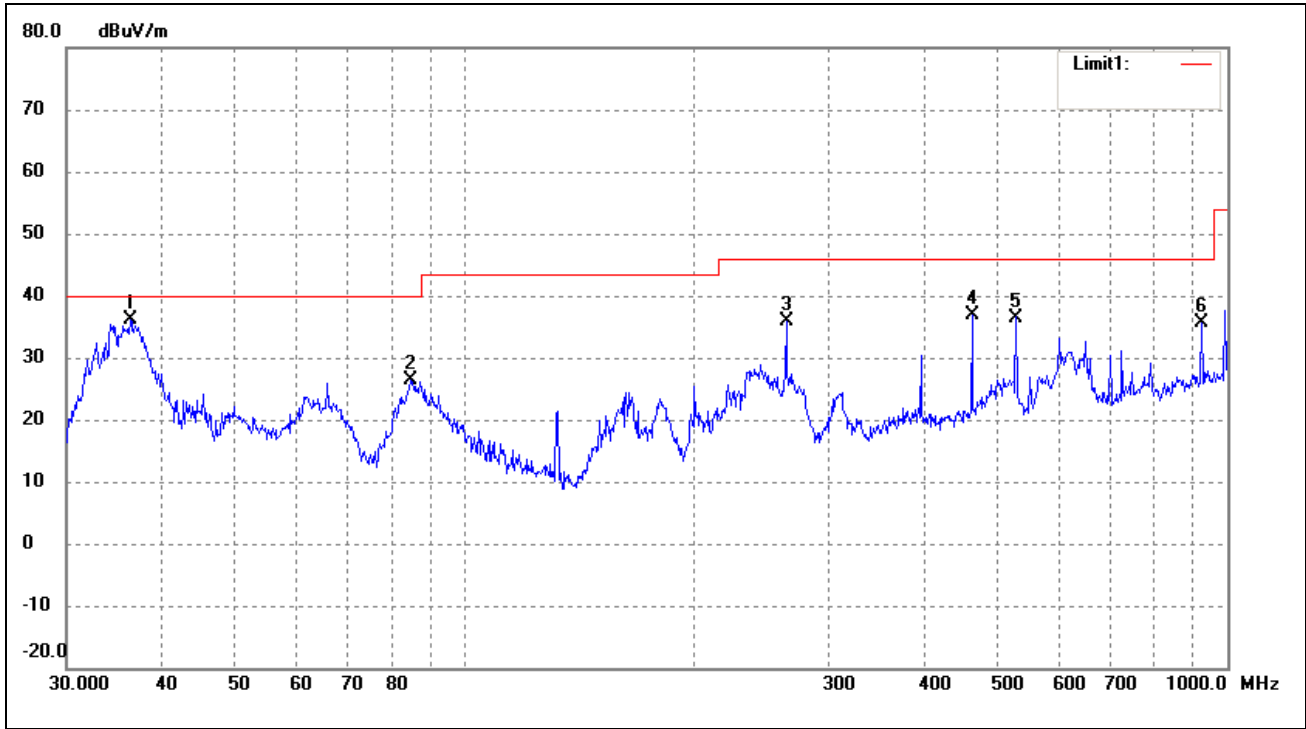


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.3814	44.82	-8.66	36.16	40.00	-3.84	256	100	peak
2	84.7019	38.79	-12.44	26.35	40.00	-13.65	147	100	peak
3	263.8190	42.69	-6.79	35.90	46.00	-10.10	162	100	peak
4	462.3455	39.43	-2.50	36.93	46.00	-9.07	139	100	peak
5	528.2458	38.35	-1.85	36.50	46.00	-9.50	257	100	peak
6	925.7563	31.80	3.83	35.63	46.00	-10.37	130	100	peak

Operating Condition: 802.11b Transmitting High Channel-2462MHz


Comment: AC 120V/60Hz; Adapter DC 12V

Test Specification: Horizontal

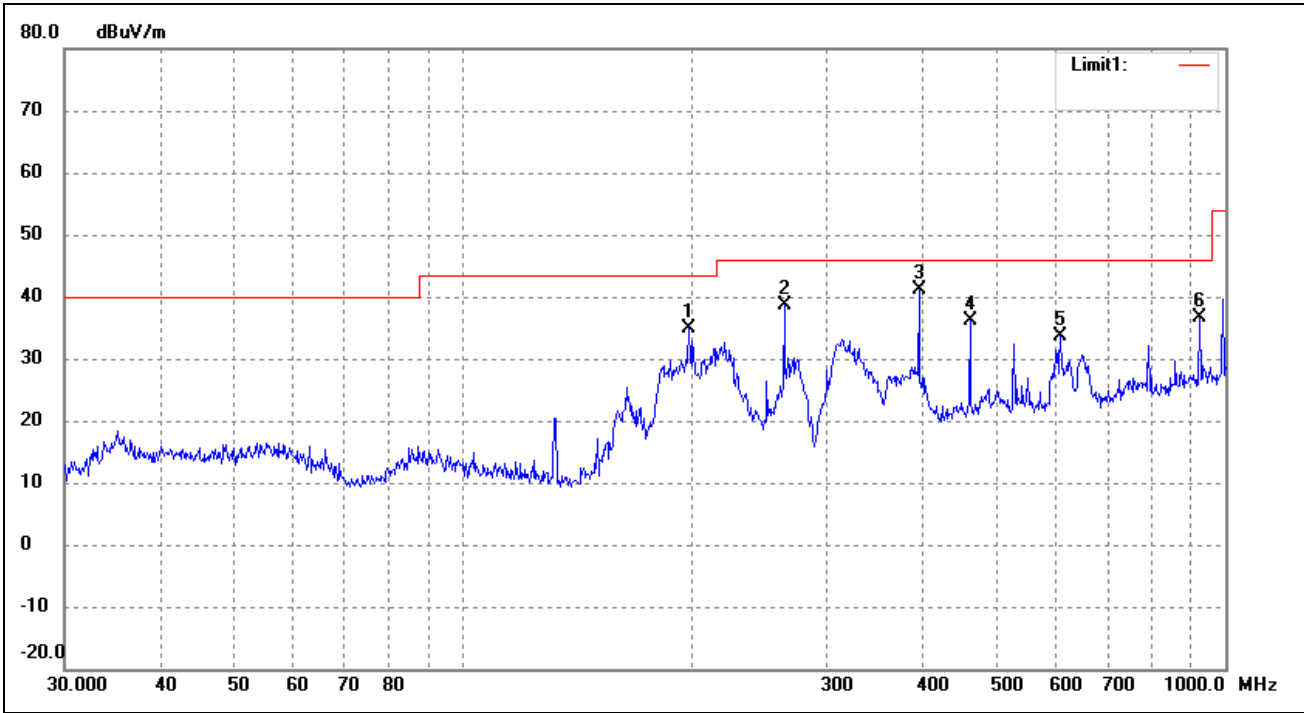

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	197.8928	43.71	-8.94	34.77	43.50	-8.73	176	100	peak
2	263.8190	45.45	-6.79	38.66	46.00	-7.34	255	100	peak
3	396.2415	44.08	-2.95	41.13	46.00	-4.87	360	100	peak
4	462.3455	38.61	-2.50	36.11	46.00	-9.89	178	100	peak
5	607.7867	33.12	0.40	33.52	46.00	-12.48	249	100	peak
6	925.7563	32.73	3.83	36.56	46.00	-9.44	162	100	peak

Test Specification: Vertical

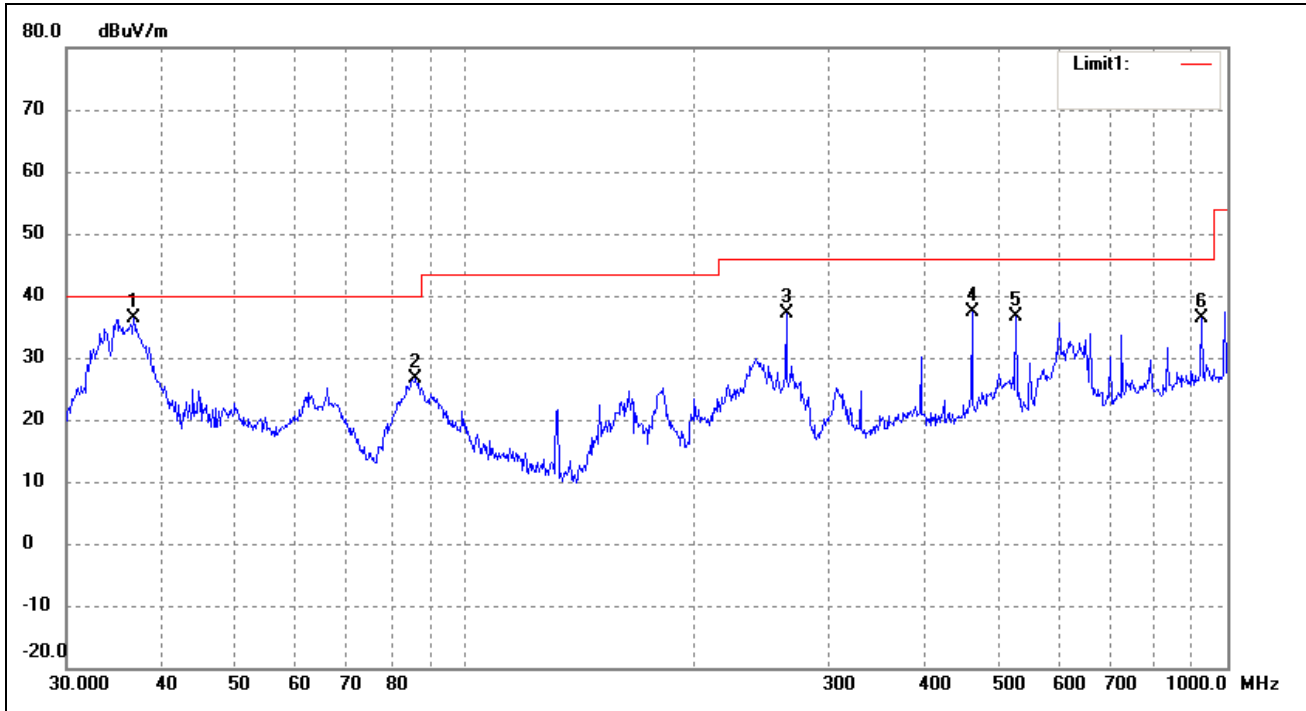


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.7662	44.88	-8.55	36.33	40.00	-3.67	169	100	peak
2	86.2001	39.27	-12.58	26.69	40.00	-13.31	225	100	peak
3	263.8190	44.04	-6.79	37.25	46.00	-8.75	160	100	peak
4	462.3455	39.87	-2.50	37.37	46.00	-8.63	310	100	peak
5	528.2458	38.51	-1.85	36.66	46.00	-9.34	179	100	peak
6	925.7563	32.46	3.83	36.29	46.00	-9.71	153	100	peak

**Plot of Radiated Emissions Test Data (30MHz to 1GHz)**


EUT: *Wireless Digital Display*  
 Tested Model: *PXT515WR04G*  
 Operating Condition: *802.11g Transmitting Low Channel-2412MHz*  
 Comment: *AC 120V/60Hz; Adapter DC 12V*

Test Specification: *Horizontal*

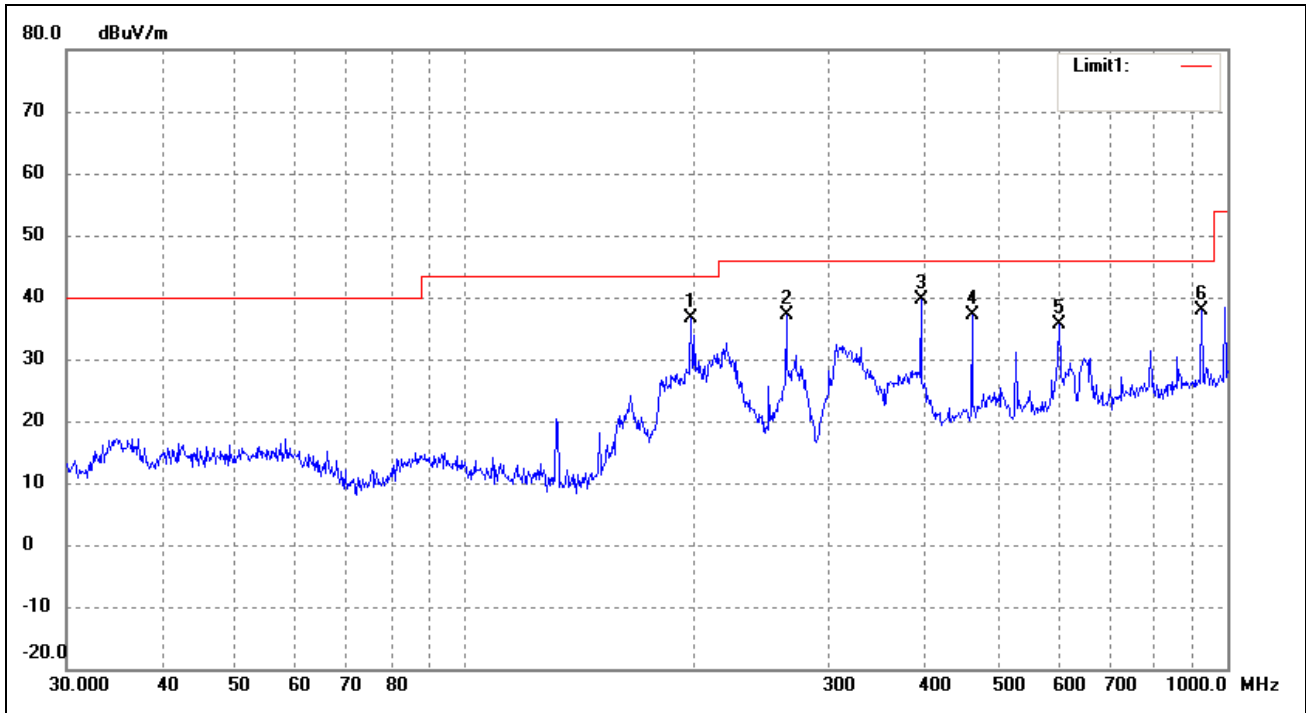

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	197.8928	45.59	-8.94	36.65	43.50	-6.85	174	100	peak
2	263.8190	43.82	-6.79	37.03	46.00	-8.97	160	100	peak
3	396.2415	42.53	-2.95	39.58	46.00	-6.42	320	100	peak
4	462.3455	39.70	-2.50	37.20	46.00	-8.80	230	100	peak
5	601.4265	35.61	-0.05	35.56	46.00	-10.44	183	100	peak
6	925.7563	33.94	3.83	37.77	46.00	-8.23	167	100	peak

Test Specification: Vertical

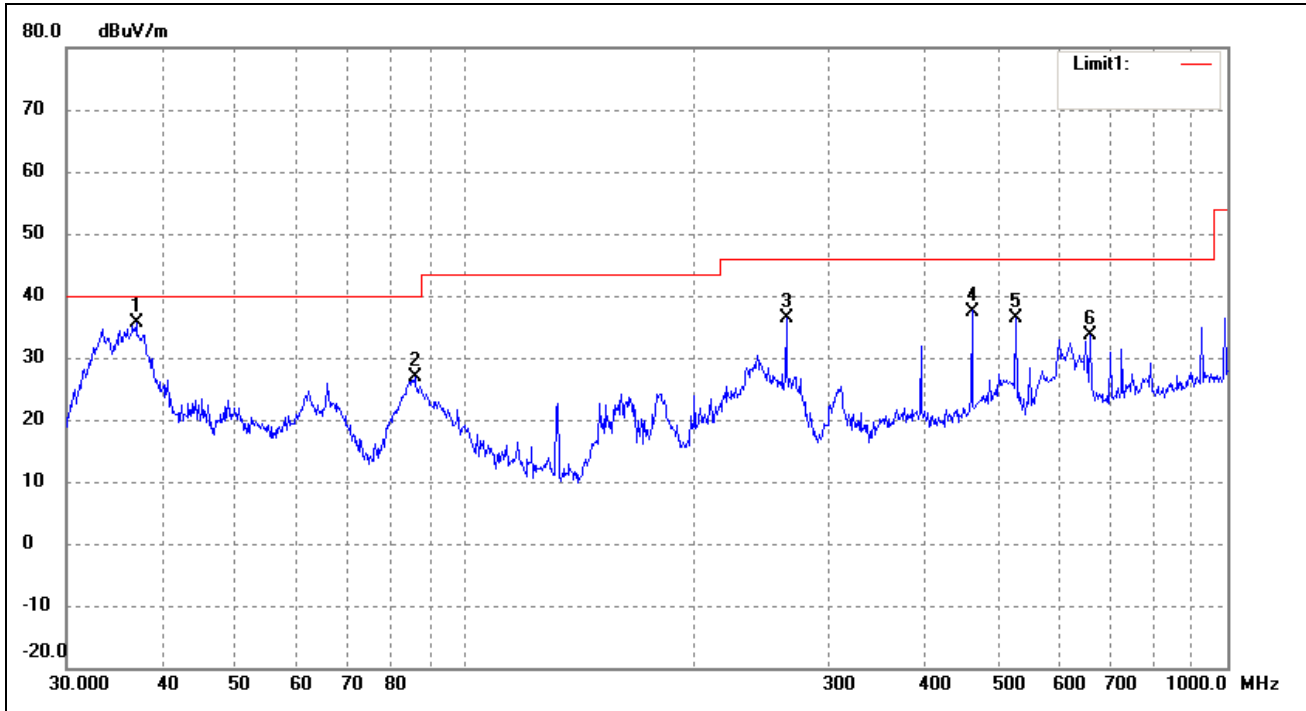


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	37.0249	44.22	-8.48	35.74	40.00	-4.26	177	100	peak
2	85.8984	39.47	-12.55	26.92	40.00	-13.08	90	100	peak
3	263.8190	43.15	-6.79	36.36	46.00	-9.64	336	100	peak
4	462.3455	40.00	-2.50	37.50	46.00	-8.50	360	100	peak
5	528.2458	38.23	-1.85	36.38	46.00	-9.62	127	100	peak
6	661.1505	33.44	0.29	33.73	46.00	-12.27	336	100	peak

Operating Condition: 802.11g Transmitting Middle Channel-2437MHz

Comment: AC 120V/60Hz; Adapter DC 12V


Test Specification: Horizontal

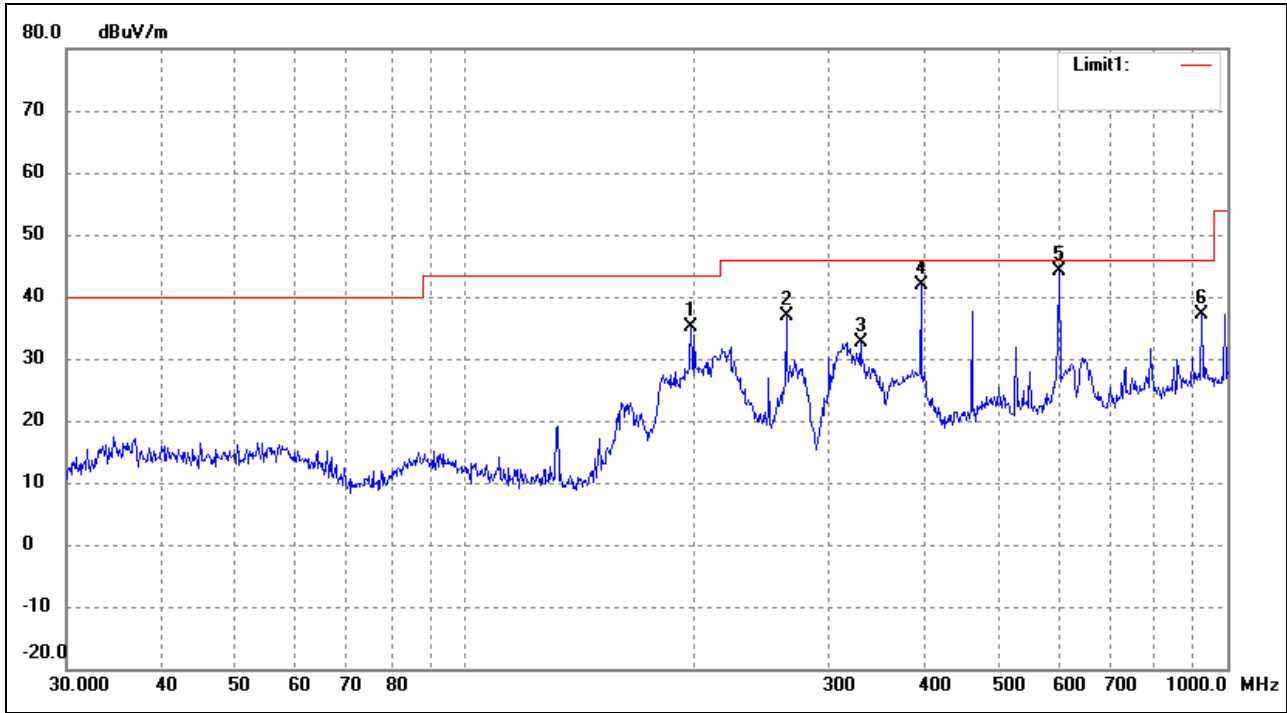

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	197.8928	43.97	-8.94	35.03	43.50	-8.47	270	100	peak
2	263.8190	43.63	-6.79	36.84	46.00	-9.16	164	100	peak
3	330.1949	37.42	-4.81	32.61	46.00	-13.39	228	200	peak
4	396.2415	44.73	-2.95	41.78	46.00	-4.22	130	200	peak
5	601.4265	44.06	-0.05	44.01	46.00	-1.99	360	100	peak
6	925.7563	33.20	3.83	37.03	46.00	-8.97	168	100	peak



Test Specification: Vertical

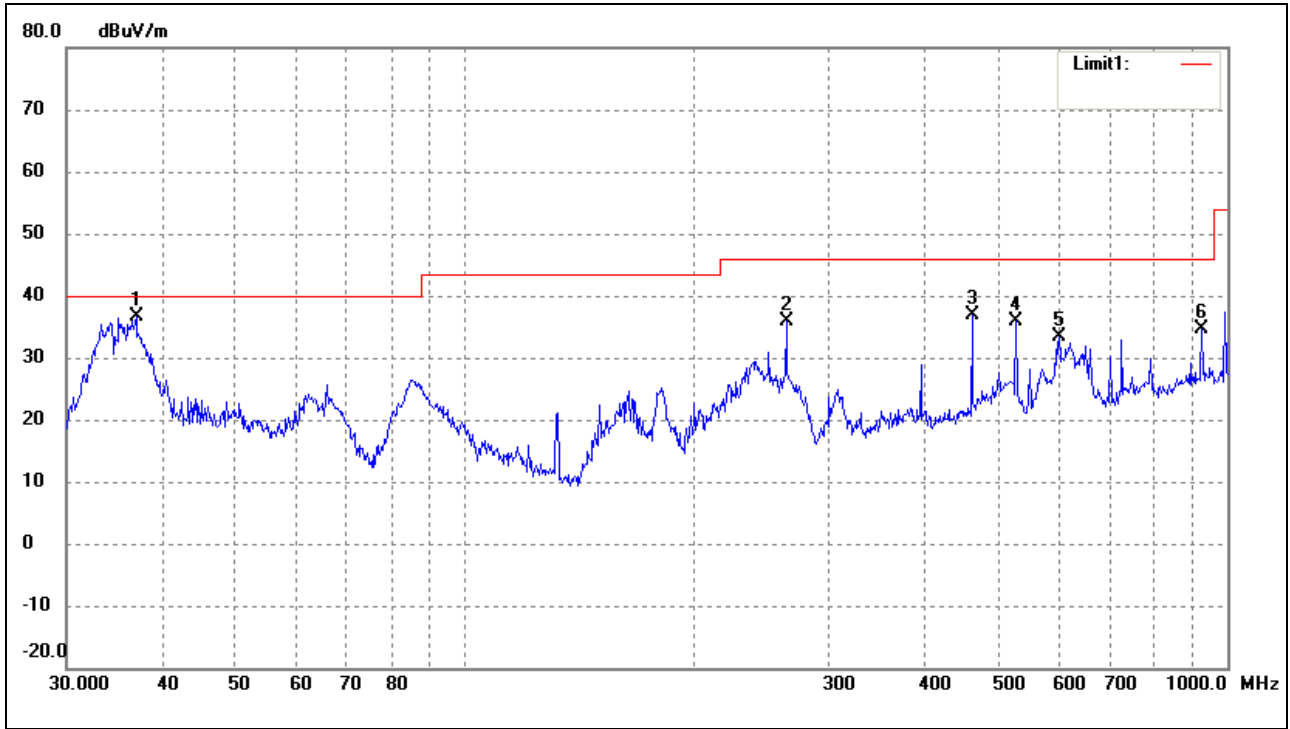


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	37.0249	45.11	-8.48	36.63	40.00	-3.37	360	100	peak
2	263.8190	42.58	-6.79	35.79	46.00	-10.21	255	100	peak
3	462.3455	39.45	-2.50	36.95	46.00	-9.05	270	100	peak
4	528.2458	37.83	-1.85	35.98	46.00	-10.02	180	100	peak
5	601.4265	33.42	-0.05	33.37	46.00	-12.63	169	100	peak
6	925.7563	30.90	3.83	34.73	46.00	-11.27	283	100	peak

Operating Condition: 802.11g Transmitting High Channel-2462MHz


Comment: AC 120V/60Hz; Adapter DC 12V

Test Specification: Horizontal

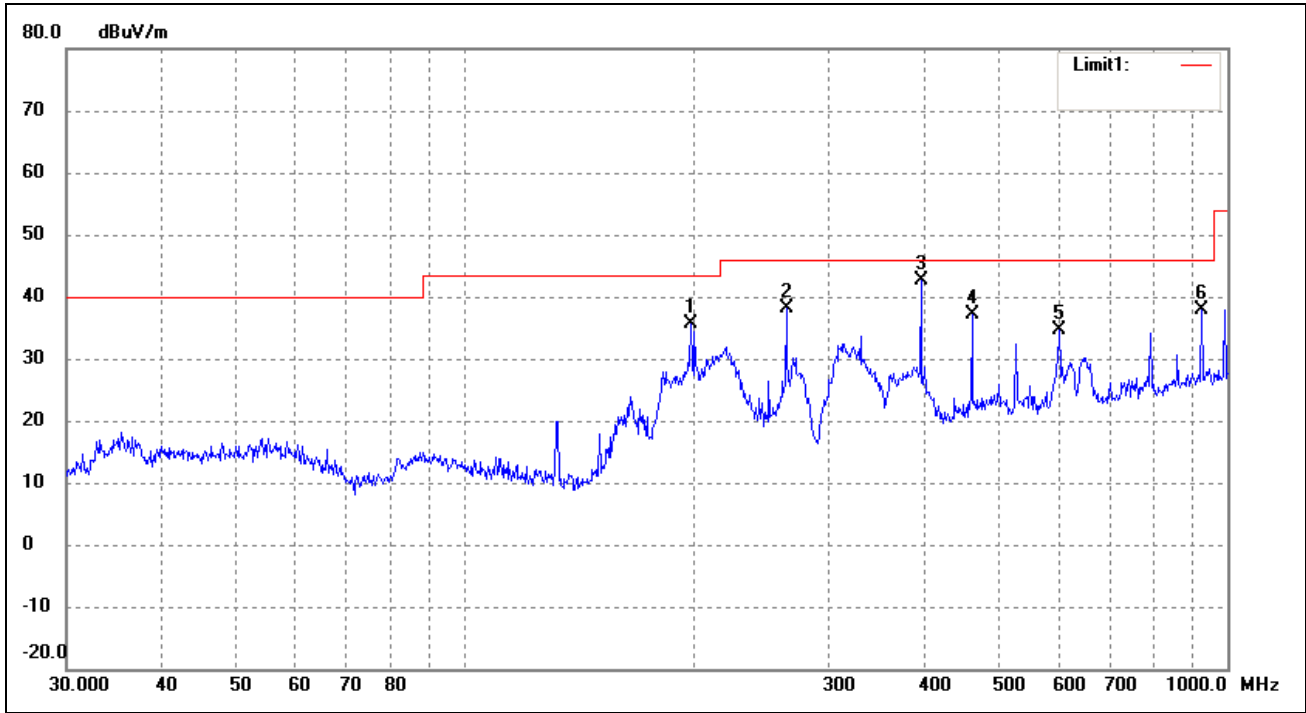

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	197.8928	44.51	-8.94	35.57	43.50	-7.93	154	100	peak
2	263.8190	44.88	-6.79	38.09	46.00	-7.91	151	100	peak
3	396.2415	45.61	-2.95	42.66	46.00	-3.34	317	100	peak
4	462.3455	39.58	-2.50	37.08	46.00	-8.92	289	100	peak
5	601.4265	34.68	-0.05	34.63	46.00	-11.37	132	100	peak
6	925.7563	34.02	3.83	37.85	46.00	-8.15	161	100	peak

Test Specification: Vertical

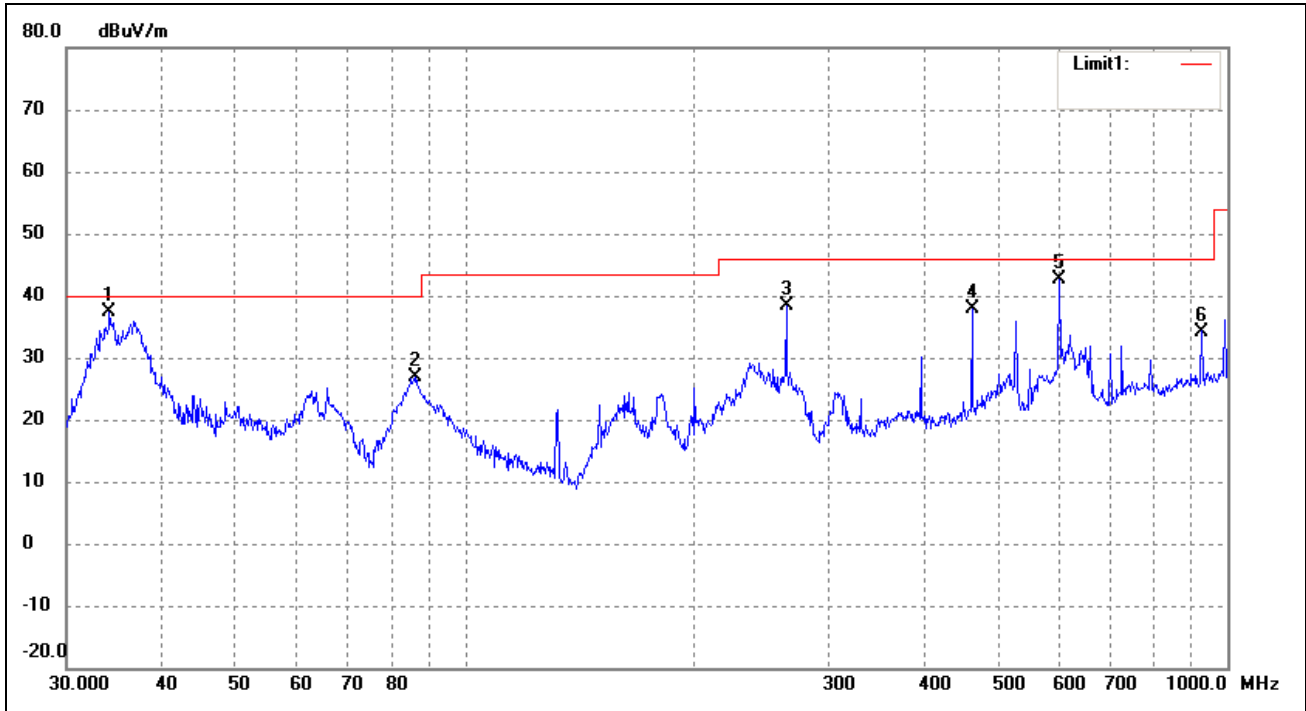


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	34.1561	46.53	-9.25	37.28	40.00	-2.72	320	100	peak
2	86.2001	39.35	-12.58	26.77	40.00	-13.23	180	100	peak
3	263.8190	45.15	-6.79	38.36	46.00	-7.64	225	100	peak
4	462.3455	40.30	-2.50	37.80	46.00	-8.20	267	100	peak
5	601.4265	42.71	-0.05	42.66	46.00	-3.34	187	100	peak
6	925.7563	30.42	3.83	34.25	46.00	-11.75	254	100	peak

**Plot of Radiated Emissions Test Data (30MHz to 1GHz)**


EUT: *Wireless Digital Display*  
 Tested Model: *PXT515WR04G*  
 Operating Condition: *802.11n-HT20 Transmitting Low Channel-2412MHz*  
 Comment: *AC 120V/60Hz; Adapter DC 12V*

Test Specification: *Horizontal*

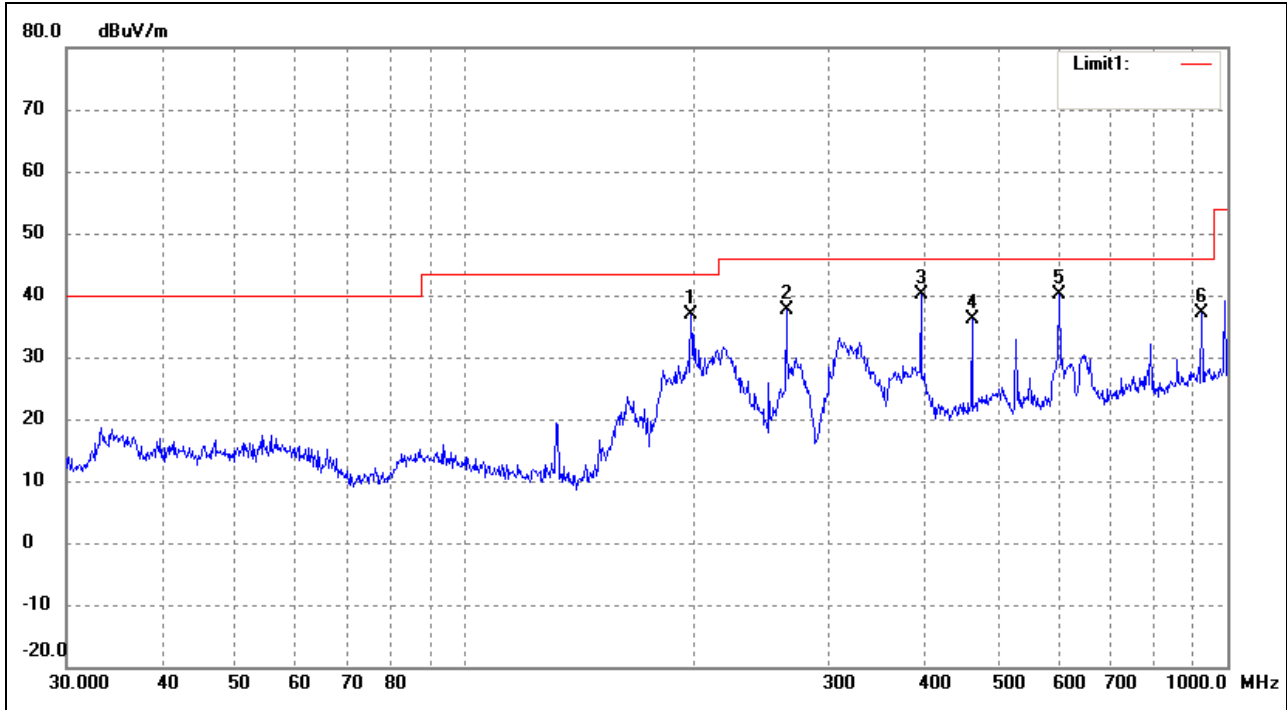

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	197.8928	45.74	-8.94	36.80	43.50	-6.70	150	100	peak
2	263.8190	44.48	-6.79	37.69	46.00	-8.31	131	100	peak
3	396.2415	42.99	-2.95	40.04	46.00	-5.96	285	100	peak
4	462.3455	38.55	-2.50	36.05	46.00	-9.95	224	100	peak
5	601.4265	40.16	-0.05	40.11	46.00	-5.89	162	100	peak
6	925.7563	33.26	3.83	37.09	46.00	-8.91	185	100	peak

Test Specification: Vertical

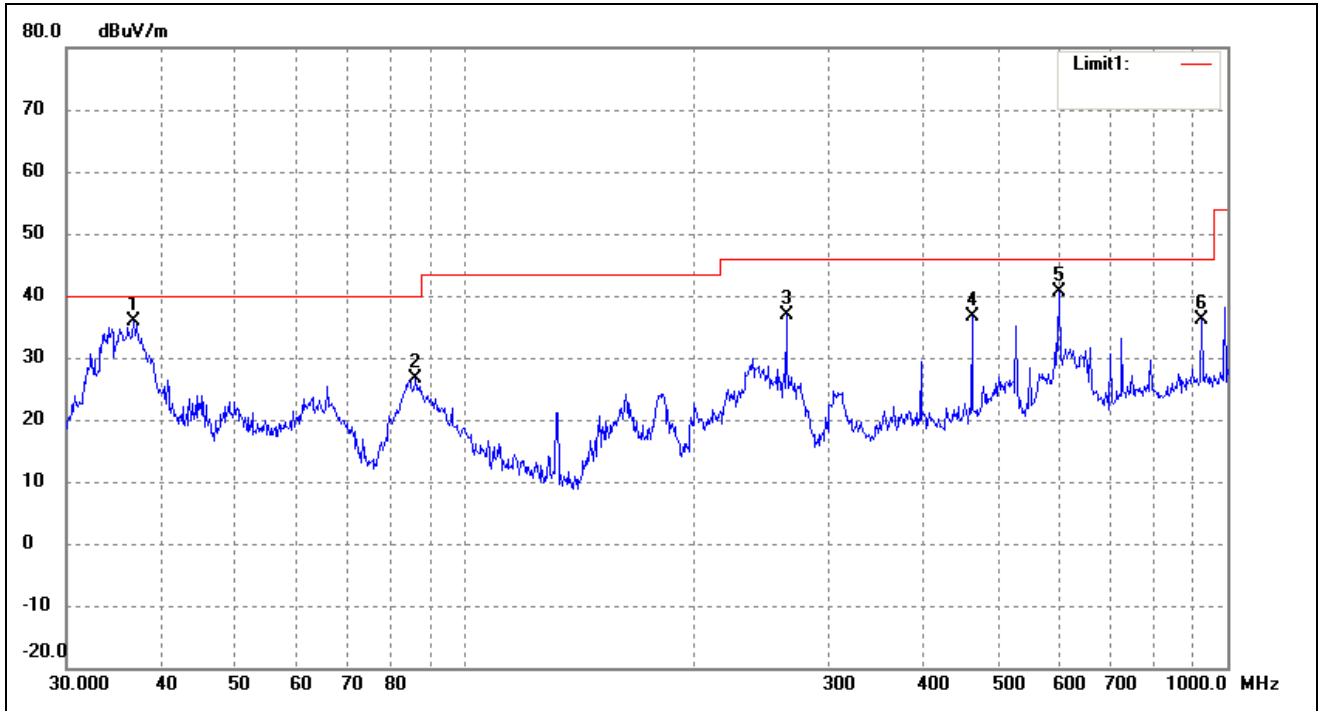


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.7662	44.38	-8.55	35.83	40.00	-4.17	155	100	peak
2	86.2001	39.12	-12.58	26.54	40.00	-13.46	197	100	peak
3	263.8190	43.73	-6.79	36.94	46.00	-9.06	310	100	peak
4	462.3455	39.13	-2.50	36.63	46.00	-9.37	229	100	peak
5	601.4265	40.77	-0.05	40.72	46.00	-5.28	130	100	peak
6	925.7563	32.19	3.83	36.02	46.00	-9.98	163	100	peak

Operating Condition: 802.11n-HT20 Transmitting Middle Channel-2437MHz


Comment: AC 120V/60Hz; Adapter DC 12V

Test Specification: Horizontal

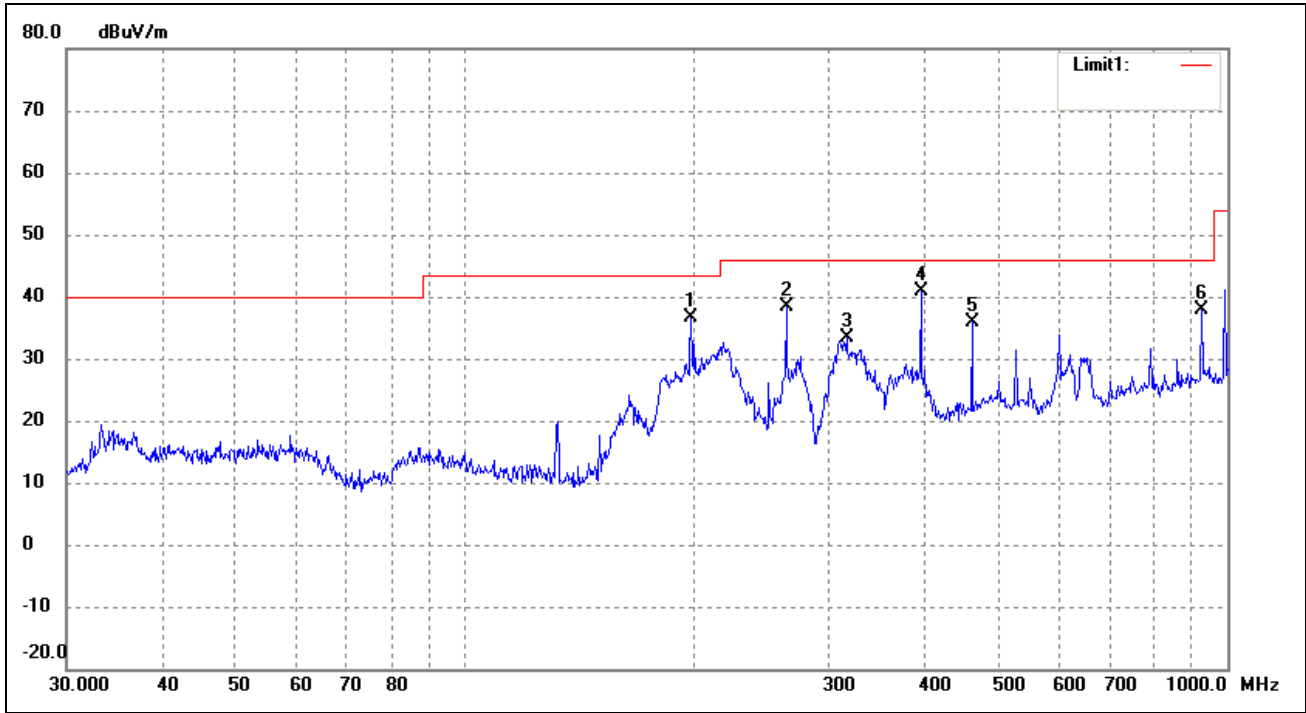

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	197.8928	45.61	-8.94	36.67	43.50	-6.83	274	100	peak
2	263.8190	45.23	-6.79	38.44	46.00	-7.56	116	100	peak
3	316.5890	38.19	-4.79	33.40	46.00	-12.60	82	100	peak
4	396.2415	43.95	-2.95	41.00	46.00	-5.00	134	100	peak
5	462.3455	38.44	-2.50	35.94	46.00	-10.06	257	100	peak
6	925.7563	34.08	3.83	37.91	46.00	-8.09	136	100	peak

Test Specification: Vertical

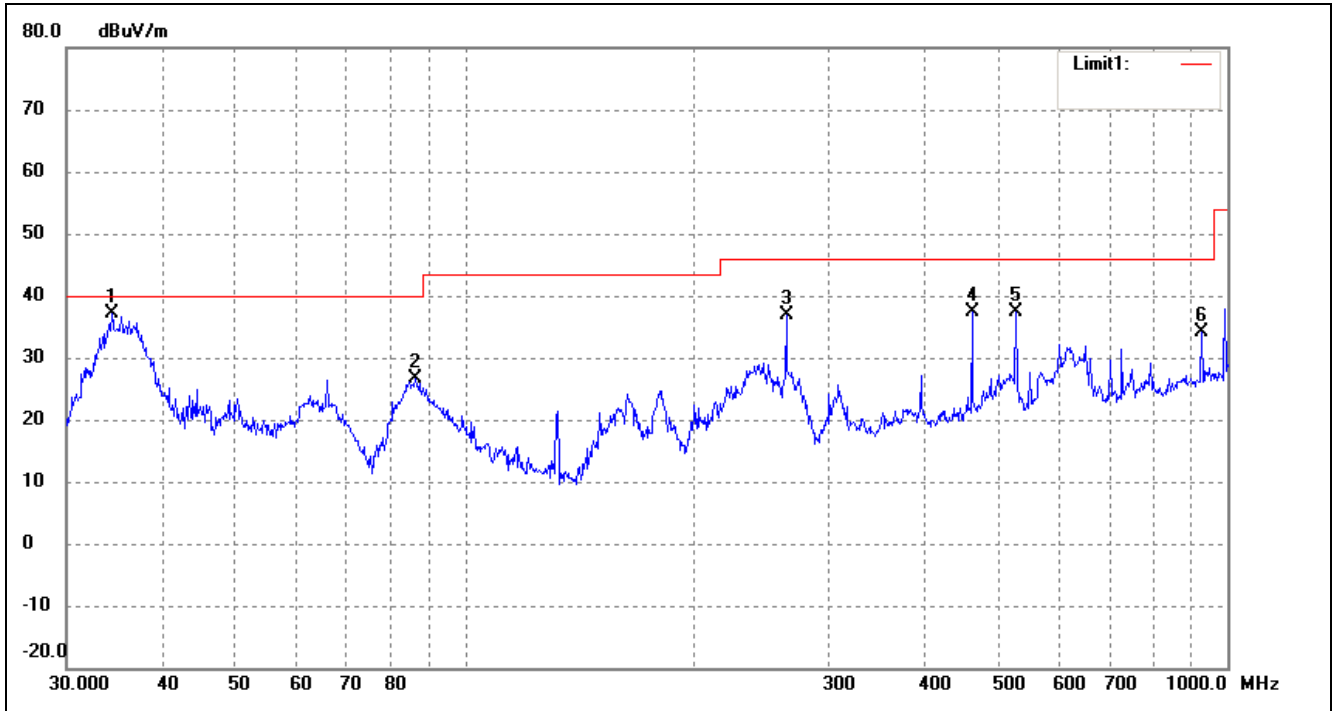


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	34.3964	46.36	-9.20	37.16	40.00	-2.84	264	100	peak
2	86.2001	39.21	-12.58	26.63	40.00	-13.37	110	100	peak
3	263.8190	43.76	-6.79	36.97	46.00	-9.03	136	100	peak
4	462.3455	39.93	-2.50	37.43	46.00	-8.57	90	100	peak
5	528.2458	39.15	-1.85	37.30	46.00	-8.70	263	100	peak
6	925.7563	30.39	3.83	34.22	46.00	-11.78	181	100	peak

Operating Condition: 802.11n-HT20 Transmitting High Channel-2462MHz

Comment: AC 120V/60Hz; Adapter DC 12V


Test Specification: Horizontal

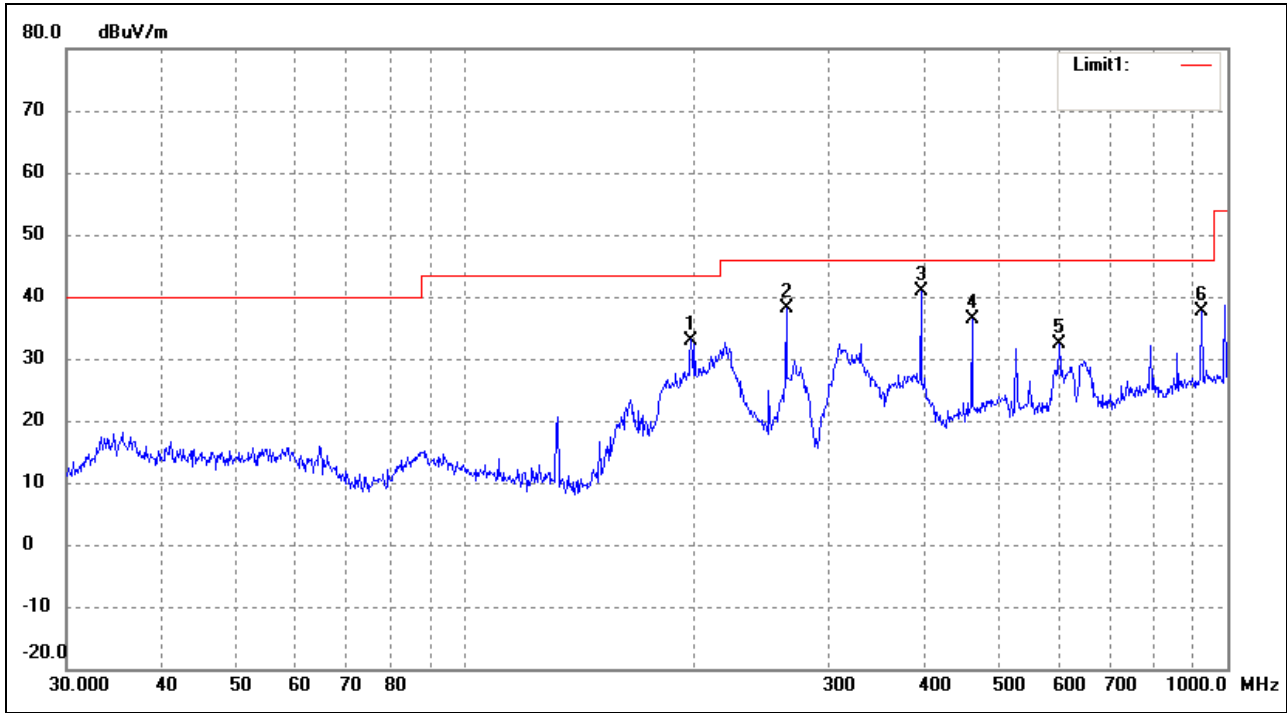

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	197.8928	41.94	-8.94	33.00	43.50	-10.50	360	100	peak
2	263.8190	44.92	-6.79	38.13	46.00	-7.87	112	100	peak
3	396.2415	43.77	-2.95	40.82	46.00	-5.18	180	100	peak
4	462.3455	38.82	-2.50	36.32	46.00	-9.68	270	100	peak
5	601.4265	32.40	-0.05	32.35	46.00	-13.65	149	100	peak
6	925.7563	33.83	3.83	37.66	46.00	-8.34	158	100	peak



Test Specification: Vertical

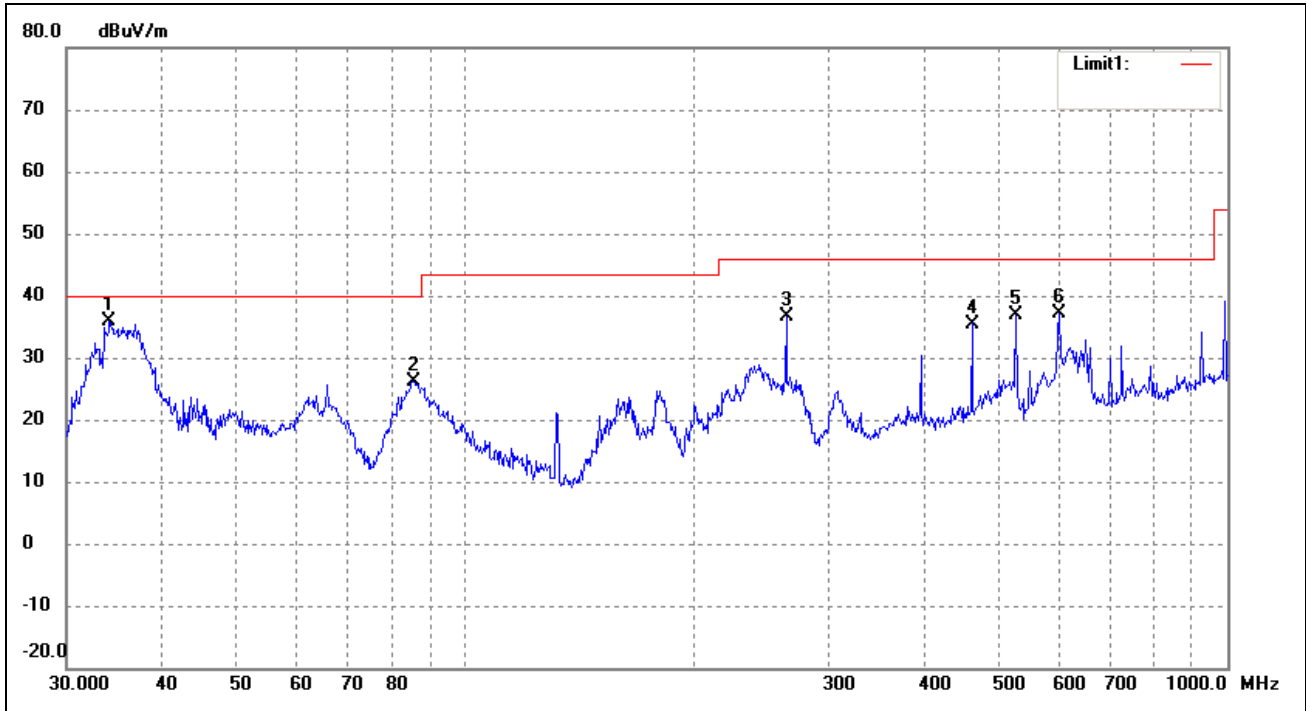

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	34.1561	45.17	-9.25	35.92	40.00	-4.08	267	100	peak
2	85.5977	38.61	-12.52	26.09	40.00	-13.91	116	100	peak
3	263.8190	43.33	-6.79	36.54	46.00	-9.46	360	100	peak
4	462.3455	38.00	-2.50	35.50	46.00	-10.50	228	100	peak
5	528.2458	38.79	-1.85	36.94	46.00	-9.06	270	100	peak
6	601.4265	37.30	-0.05	37.25	46.00	-8.75	126	100	peak

*Spurious Emissions Above 1GHz*

Test Mode: 802.11b

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	50.59	-3.87	46.72	74.00	-27.28	H	PK
4824.000	39.92	-3.87	36.05	54.00	-17.95	H	AV
7236.000	50.75	1.14	51.89	74.00	-22.11	H	PK
7236.000	38.49	1.19	39.68	54.00	-14.32	H	AV
4824.000	52.38	-3.86	48.52	74.00	-25.48	V	PK
4824.000	38.16	-3.86	34.30	54.00	-19.70	V	AV
7236.000	51.03	1.10	52.13	74.00	-21.87	V	PK
7236.000	37.84	1.10	38.94	54.00	-15.06	V	AV
Middle Channel-2437MHz							
4874.000	51.61	-3.74	47.87	74.00	-26.13	H	PK
4874.000	36.55	-3.74	32.81	54.00	-21.19	H	AV
7311.000	48.03	1.47	49.50	74.00	-24.50	H	PK
7311.000	35.26	1.47	36.73	54.00	-17.27	H	AV
4874.000	52.73	-3.74	48.99	74.00	-25.01	V	PK
4874.000	39.20	-3.74	35.46	54.00	-18.54	V	AV
7311.000	49.94	1.47	51.41	74.00	-22.59	V	PK
7311.000	36.50	1.47	37.97	54.00	-16.03	V	AV
High Channel-2462MHz							
4924.000	51.46	-3.59	47.87	74.00	-26.13	H	PK
4924.000	36.4	-3.59	32.81	54.00	-21.19	H	AV
7386.000	47.71	1.79	49.50	74.00	-24.50	H	PK
7386.000	34.94	1.79	36.73	54.00	-17.27	H	AV
4924.000	52.58	-3.59	48.99	74.00	-25.01	V	PK
4924.000	39.05	-3.59	35.46	54.00	-18.54	V	AV
7386.000	49.62	1.79	51.41	74.00	-22.59	V	PK
7386.000	36.18	1.79	37.97	54.00	-16.03	V	AV

Test Mode: 802.11g

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	51.49	-3.87	47.62	74.00	-26.38	H	PK
4824.000	39.67	-3.87	35.80	54.00	-18.20	H	AV
7236.000	49.18	1.14	50.32	74.00	-23.68	H	PK
7236.000	37.02	1.19	38.21	54.00	-15.79	H	AV
4824.000	53.45	-3.86	49.59	74.00	-24.41	V	PK
4824.000	40.24	-3.86	36.38	54.00	-17.62	V	AV
7236.000	50.24	1.10	51.34	74.00	-22.66	V	PK
7236.000	37.17	1.10	38.27	54.00	-15.73	V	AV
Middle Channel-2437MHz							
4874.000	50.56	-3.74	46.82	74.00	-27.18	H	PK
4874.000	37.31	-3.74	33.57	54.00	-20.43	H	AV
7311.000	49.29	1.47	50.76	74.00	-23.24	H	PK
7311.000	36.84	1.47	38.31	54.00	-15.69	H	AV
4874.000	52.67	-3.74	48.93	74.00	-25.07	V	PK
4874.000	39.25	-3.74	35.51	54.00	-18.49	V	AV
7311.000	50.69	1.47	52.16	74.00	-21.84	V	PK
7311.000	38.06	1.47	39.53	54.00	-14.47	V	AV
High Channel-2462MHz							
4924.000	51.36	-3.59	47.77	74.00	-26.23	H	PK
4924.000	38.09	-3.59	34.50	54.00	-19.50	H	AV
7386.000	48.87	1.79	50.66	74.00	-23.34	H	PK
7386.000	34.90	1.79	36.69	54.00	-17.31	H	AV
4924.000	51.86	-3.59	48.27	74.00	-25.73	V	PK
4924.000	38.52	-3.59	34.93	54.00	-19.07	V	AV
7386.000	49.63	1.79	51.42	74.00	-22.58	V	PK
7386.000	35.95	1.79	37.74	54.00	-16.26	V	AV

Test Mode: 802.11n-HT20

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	48.92	-3.87	45.05	74.00	-28.95	H	PK
4824.000	34.27	-3.87	30.40	54.00	-23.60	H	AV
7236.000	46.68	1.14	47.82	74.00	-26.18	H	PK
7236.000	33.78	1.19	34.97	54.00	-19.03	H	AV
4824.000	50.12	-3.86	46.26	74.00	-27.74	V	PK
4824.000	36.33	-3.86	32.47	54.00	-21.53	V	AV
7236.000	47.62	1.10	48.72	74.00	-25.28	V	PK
7236.000	35.84	1.10	36.94	54.00	-17.06	V	AV
Middle Channel-2437MHz							
4874.000	49.13	-3.74	45.39	74.00	-28.61	H	PK
4874.000	35.85	-3.74	32.11	54.00	-21.89	H	AV
7311.000	47.40	1.47	48.87	74.00	-25.13	H	PK
7311.000	32.50	1.47	33.97	54.00	-20.03	H	AV
4874.000	51.32	-3.74	47.58	74.00	-26.42	V	PK
4874.000	37.31	-3.74	33.57	54.00	-20.43	V	AV
7311.000	49.95	1.47	51.42	74.00	-22.58	V	PK
7311.000	36.89	1.47	38.36	54.00	-15.64	V	AV
High Channel-2462MHz							
4924.000	49.04	-3.59	45.45	74.00	-28.55	H	PK
4924.000	34.04	-3.59	30.45	54.00	-23.55	H	AV
7386.000	46.81	1.79	48.60	74.00	-25.40	H	PK
7386.000	32.89	1.79	34.68	54.00	-19.32	H	AV
4924.000	50.01	-3.59	46.42	74.00	-27.58	V	PK
4924.000	35.21	-3.59	31.62	54.00	-22.38	V	AV
7386.000	49.14	1.79	50.93	74.00	-23.07	V	PK
7386.000	35.11	1.79	36.90	54.00	-17.10	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

---

## 9. Out of Band Emissions

---

### 9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 9.2 Test Procedure

According to the KDB 558074D01 v03r05, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v03r05, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW  $\geq$  300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

### 9.3 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

### 9.4 Summary of Test Results/Plots


802.11b-Lowest Bandedge  
Vertical (Worst case)

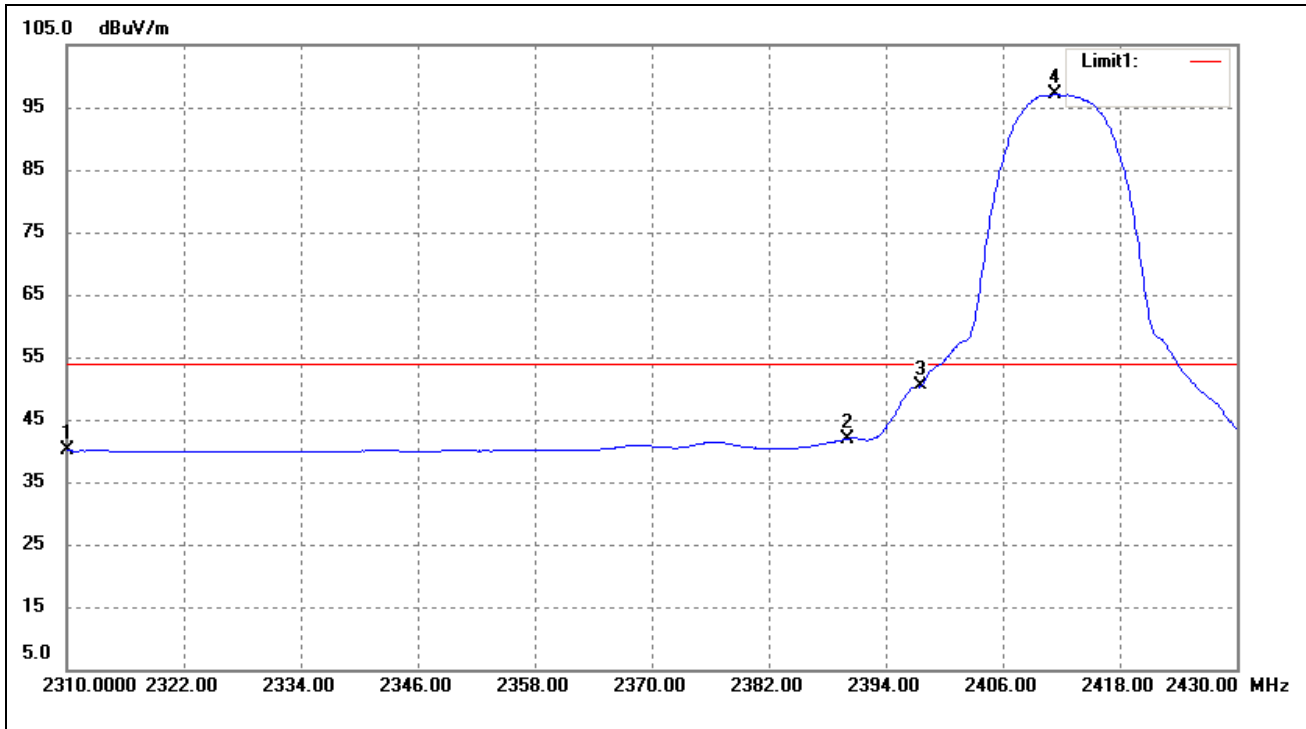

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.73	-3.71	40.02	54.00	-13.98	Average Detector
	2310.000	55.43	-3.71	51.72	74.00	-22.28	Peak Detector
2	2390.000	45.45	-3.54	41.91	54.00	-12.09	Average Detector
	2390.000	56.97	-3.54	53.43	74.00	-20.57	Peak Detector
3	2400.000	55.89	-3.51	52.38	Delta =44.84dBc		Average Detector
4	2412.600	100.70	-3.48	97.22			Average Detector

802.11b-Highest Bandedge


Vertical (Worst case)

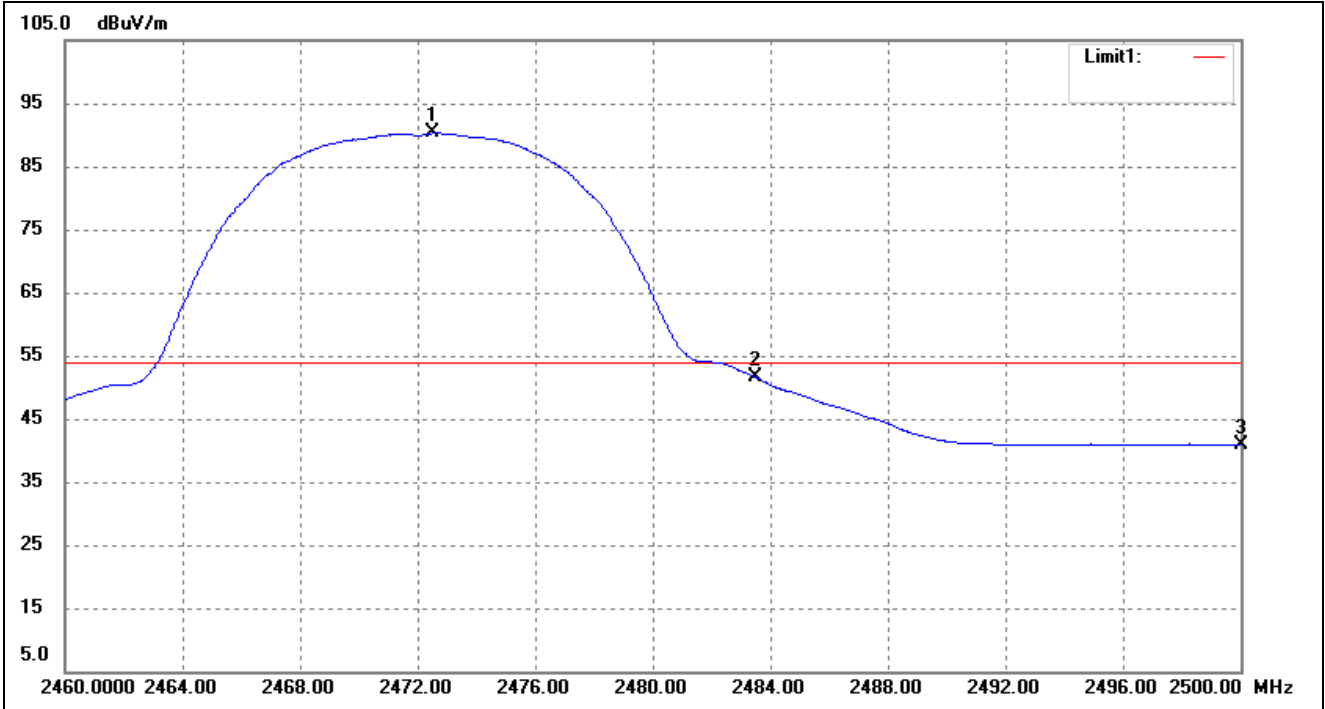

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.050	93.46	-3.16	90.30	/	/	Average Detector
	2462.600	108.92	-3.16	105.76	/	/	Peak Detector
2	2483.500	54.54	-3.01	51.53	54.00	-23.47	Average Detector
	2483.500	72.88	-3.01	69.87	74.00	-29.58	Peak Detector
3	2500.000	43.73	-2.88	40.85	54.00	-23.45	Average Detector
	2500.000	55.53	-2.88	52.65	74.00	-32.24	Peak Detector

## 802.11g-Lowest Bandedge

Vertical (Worst case)

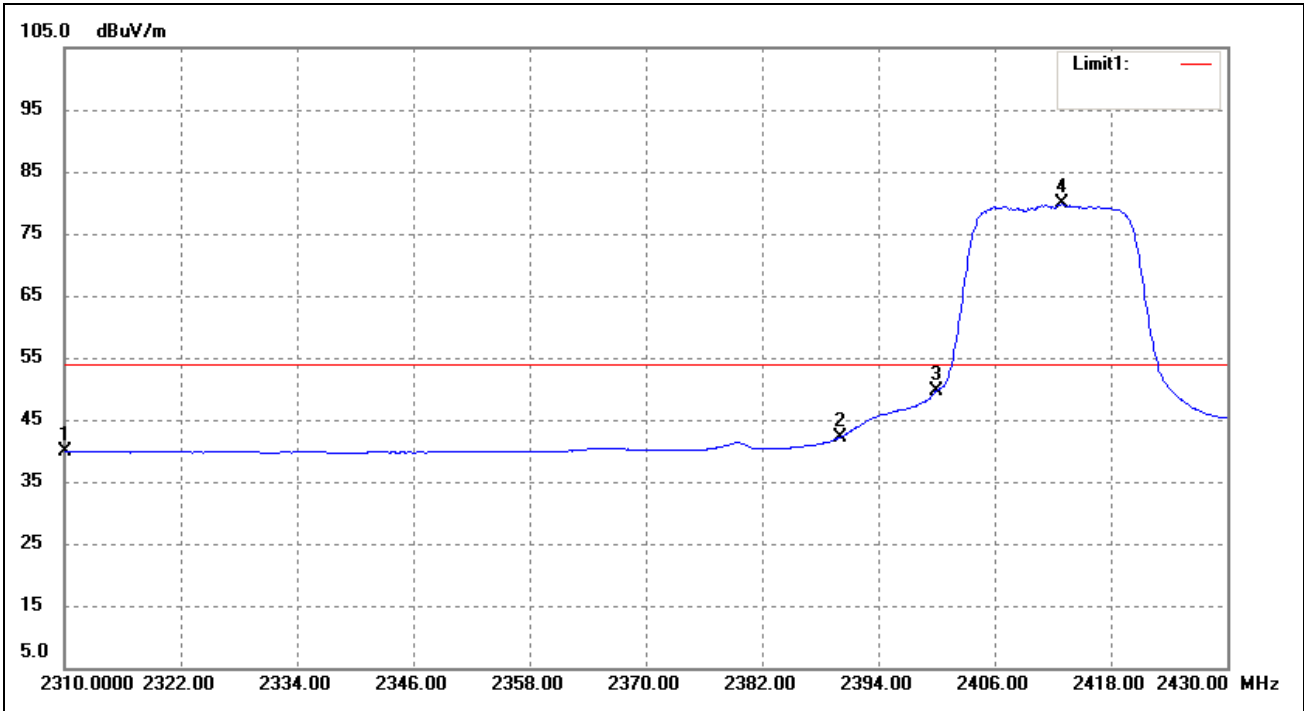


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	44.22	-4.42	39.80	54.00	-14.20	Average Detector
		55.28	-4.42	50.86	74.00	-23.14	Peak Detector
2	2390.000	45.91	-3.72	42.19	54.00	-11.81	Average Detector
		65.10	-3.72	61.38	74.00	-12.62	Peak Detector
3	2400.000	53.26	-3.64	49.62	Delta =30.14dBc		Average Detector
4	2418.120	82.88	-3.12	79.76			Average Detector



## 802.11g-Highest Bandedge


Vertical (Worst case)

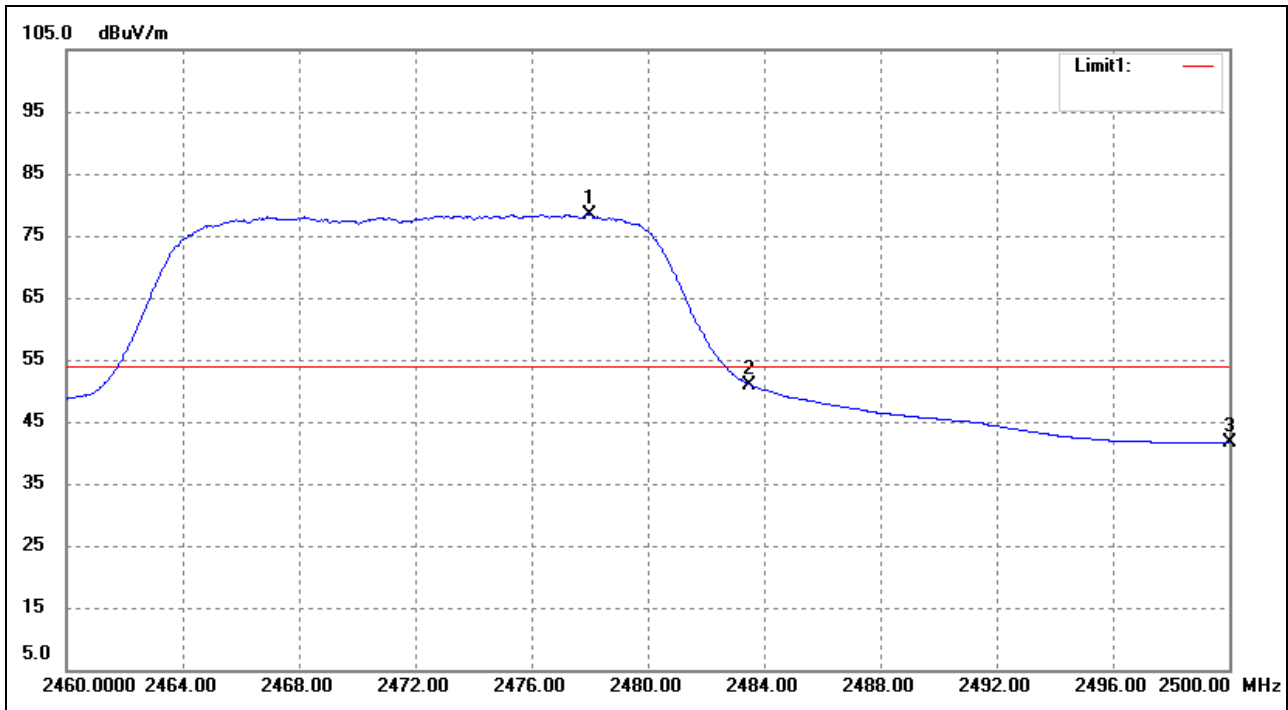

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.350	81.57	-3.16	78.41	/	/	Average Detector
	2463.700	105.66	-3.16	102.50	/	/	Peak Detector
2	2483.500	53.93	-3.01	50.92	54.00	-21.68	Average Detector
	2483.500	76.33	-3.01	73.32	74.00	-24.04	Peak Detector
3	2500.000	44.41	-2.88	41.53	54.00	-23.33	Average Detector
	2500.000	57.63	-2.88	54.75	74.00	-30.75	Peak Detector

## 802.11n-HT20-Lowest Bandedge


Vertical (Worst case)

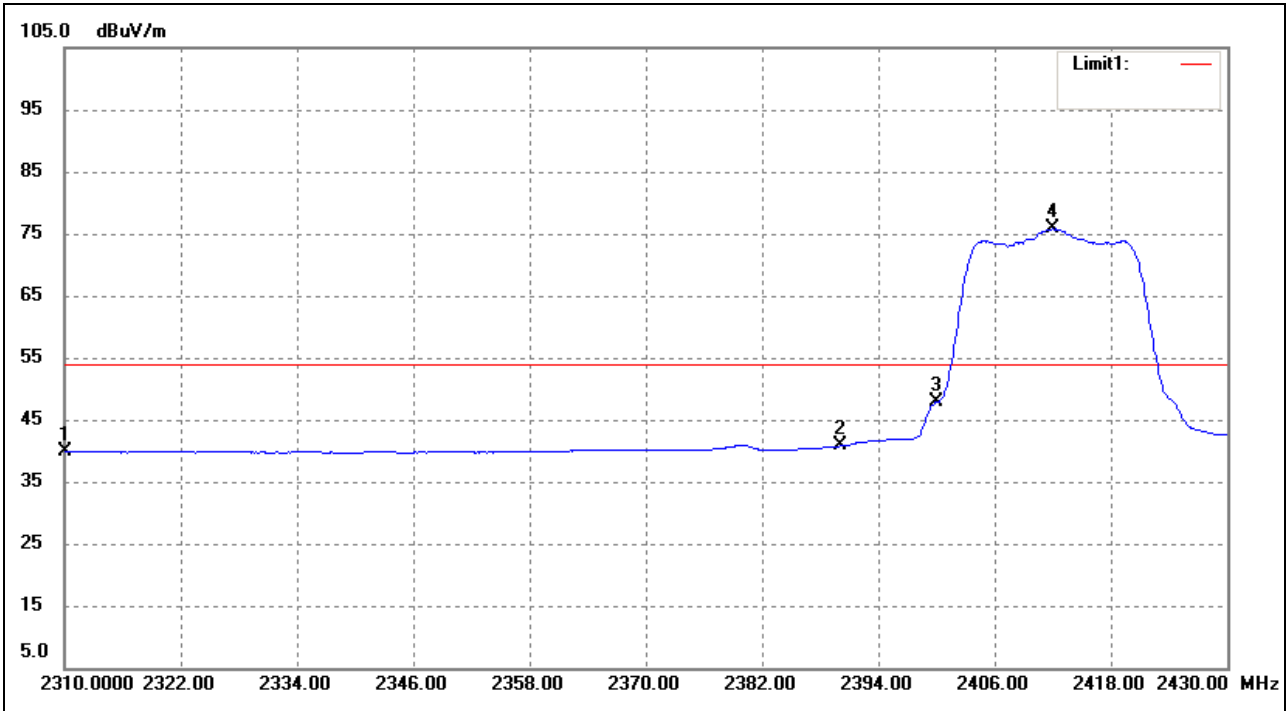

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	44.23	-4.42	39.81	54.00	-14.19	Average Detector
	2310.000	55.66	-4.42	51.24	74.00	-22.76	Peak Detector
2	2390.000	44.48	-3.72	40.76	54.00	-13.24	Average Detector
	2390.000	57.73	-3.72	54.01	74.00	-19.99	Peak Detector
3	2400.000	51.46	-3.64	47.82	Delta =28.07dBc		Average Detector
	2413.680	79.49	-3.60	75.89			Average Detector



802.11n-HT20-Highest Bandedge

Vertical (Worst case)


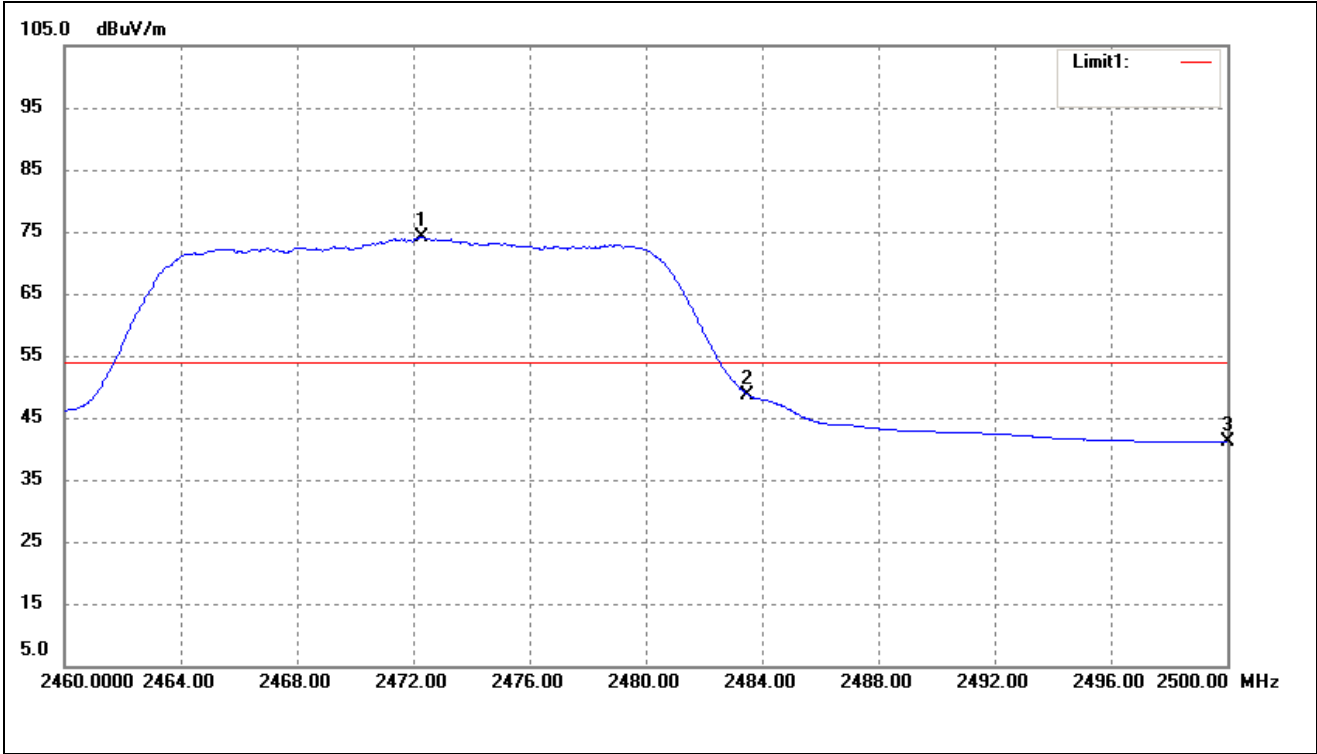


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.300	77.35	-3.16	74.19	/	/	Average Detector
	2463.300	102.54	-3.16	99.38	/	/	Peak Detector
2	2483.500	51.67	-3.01	48.66	54.00	-21.41	Average Detector
	2483.500	69.41	-3.01	66.40	74.00	-23.01	Peak Detector
3	2500.000	43.96	-2.88	41.08	54.00	-23.26	Average Detector
	2500.000	54.89	-2.88	52.01	74.00	-30.99	Peak Detector



Bandedge (Conducted)  
11b- Lowest Bandedge

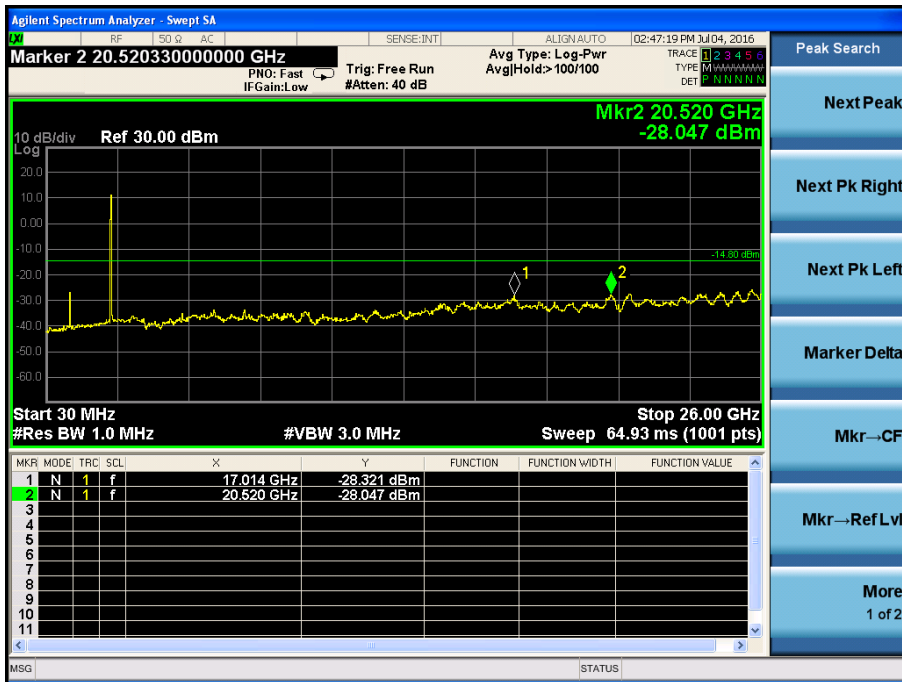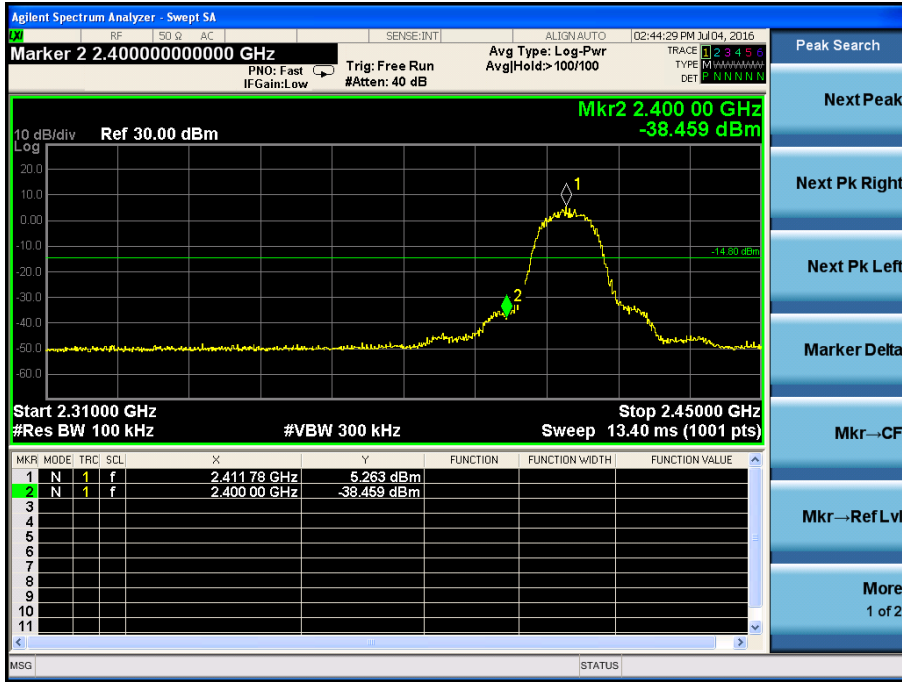



## 11b- Middle Bandedge

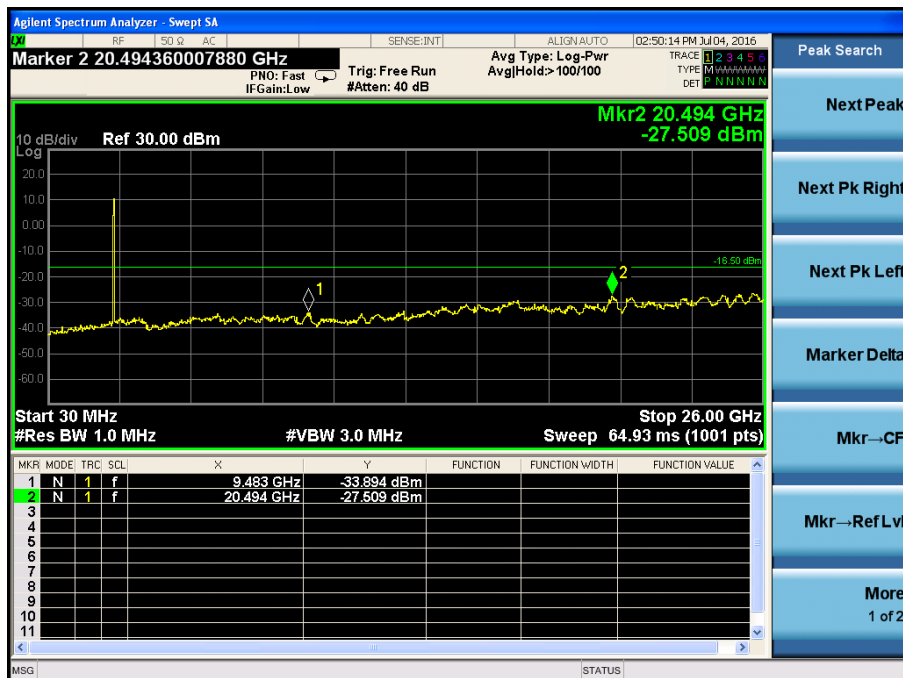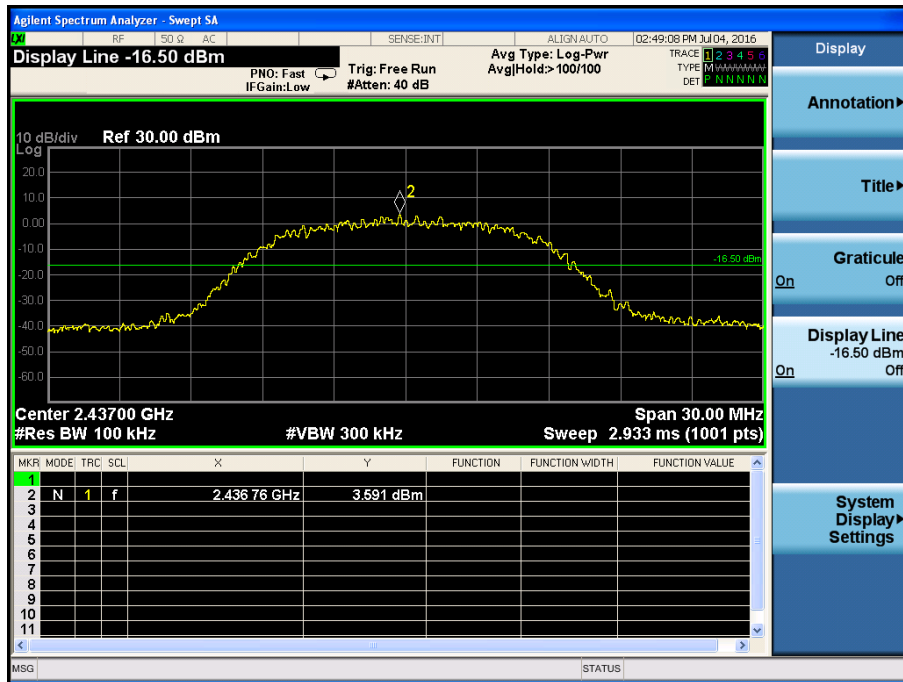



11b- Highest Bandedge

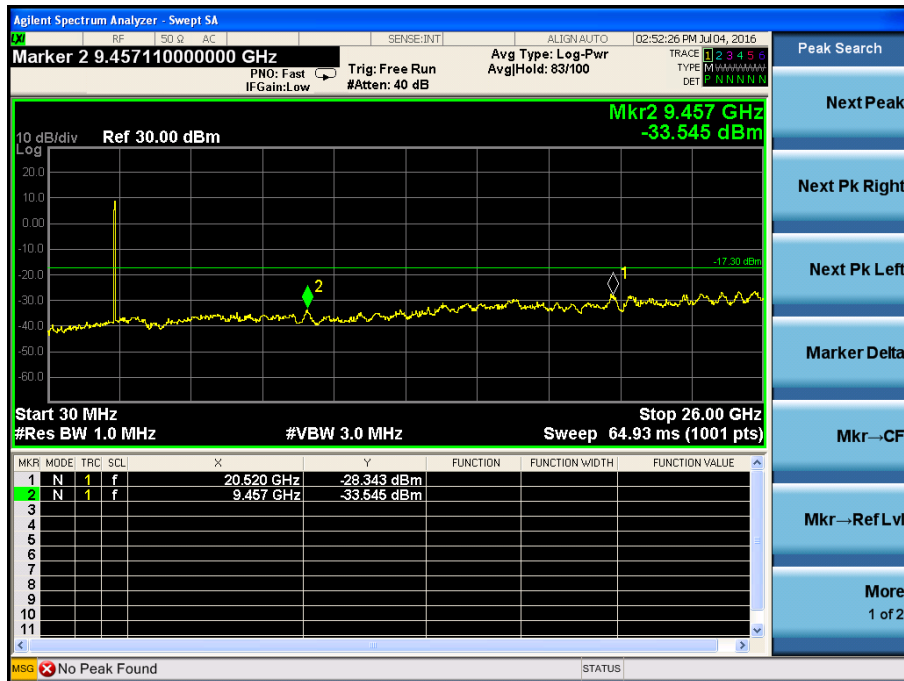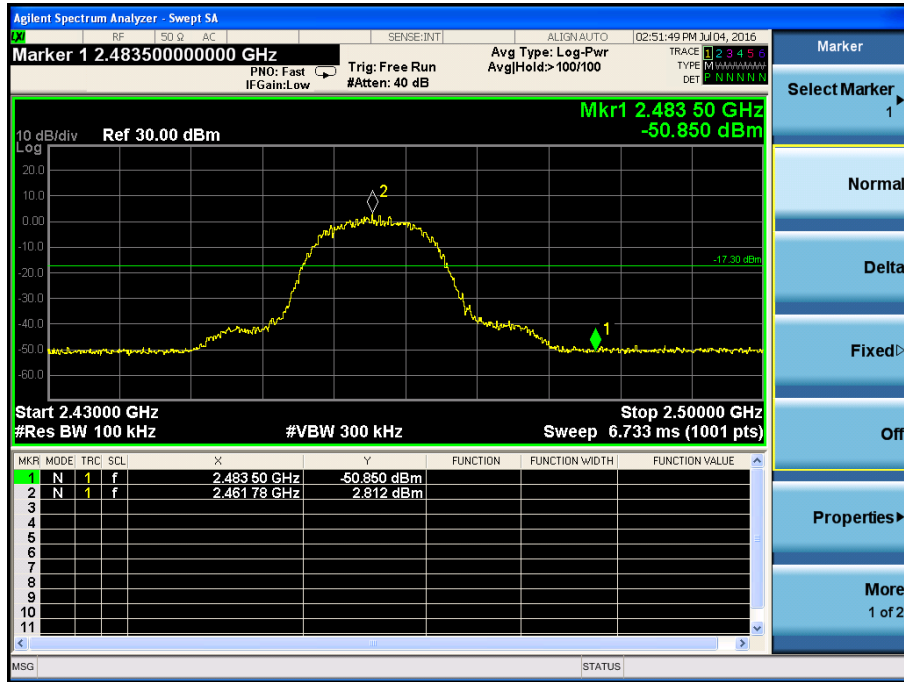

11g- Lowest Bandedge

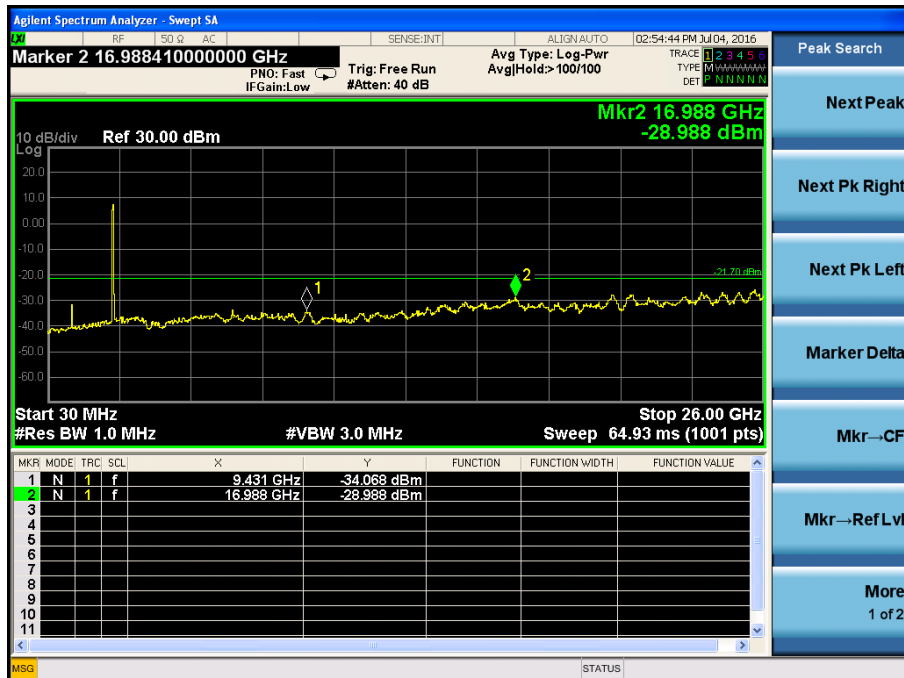
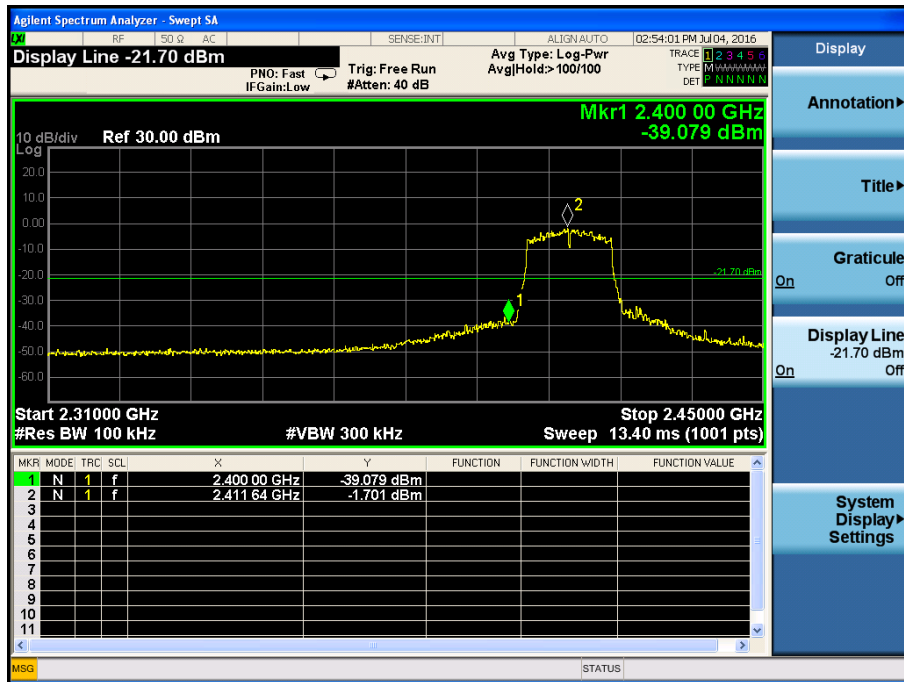


11g- Middle Bandedge

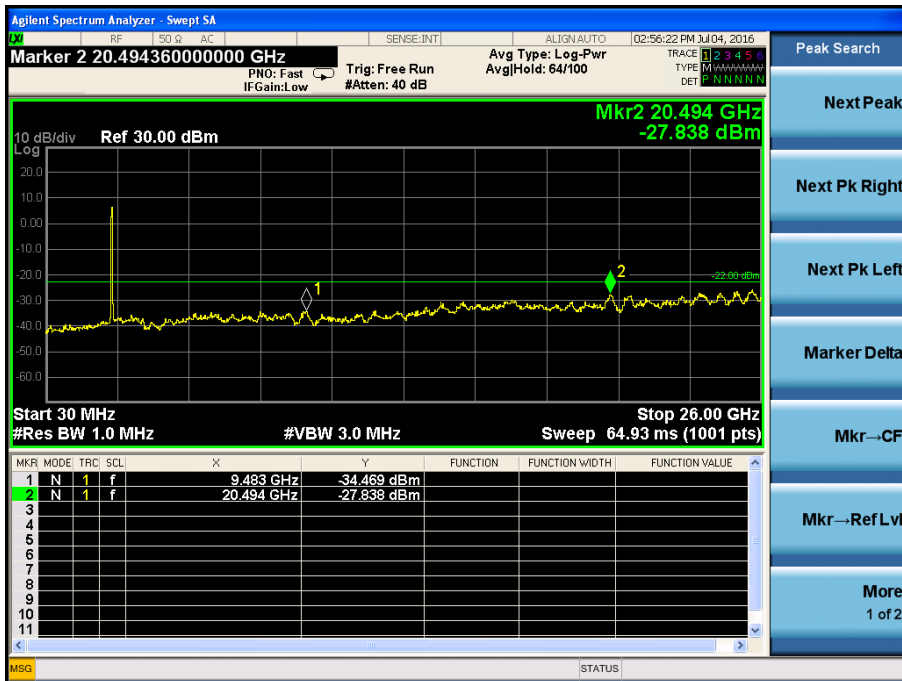
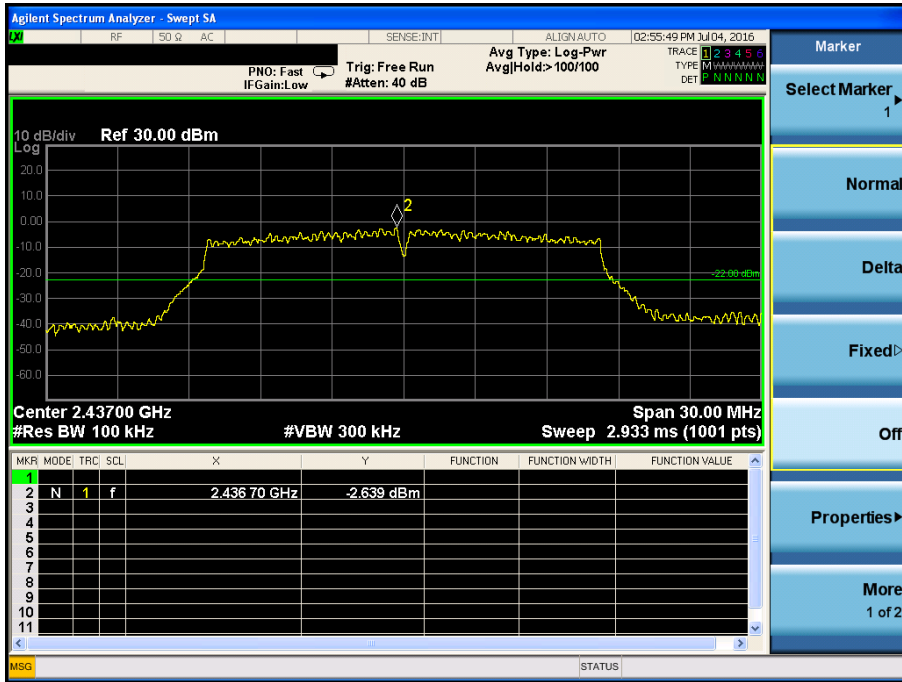






11g- Highest Bandedge

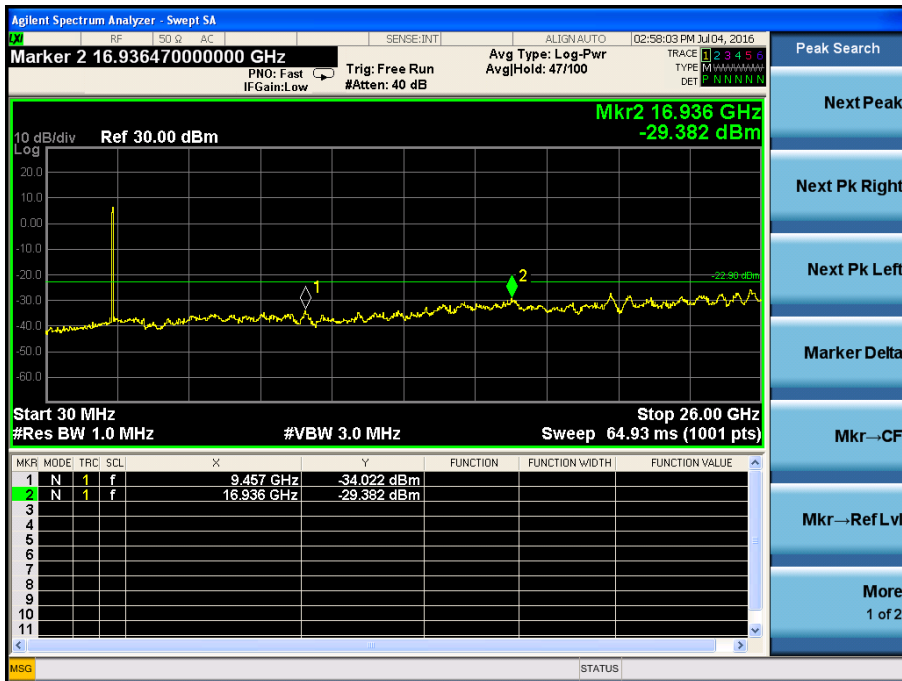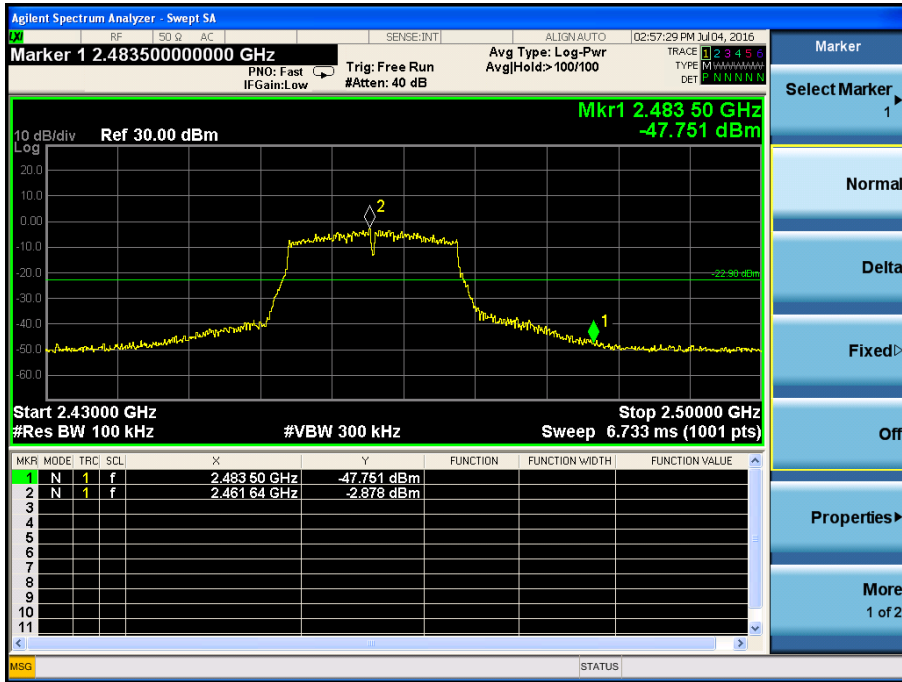



11n\_HT20- Lowest Bandedge

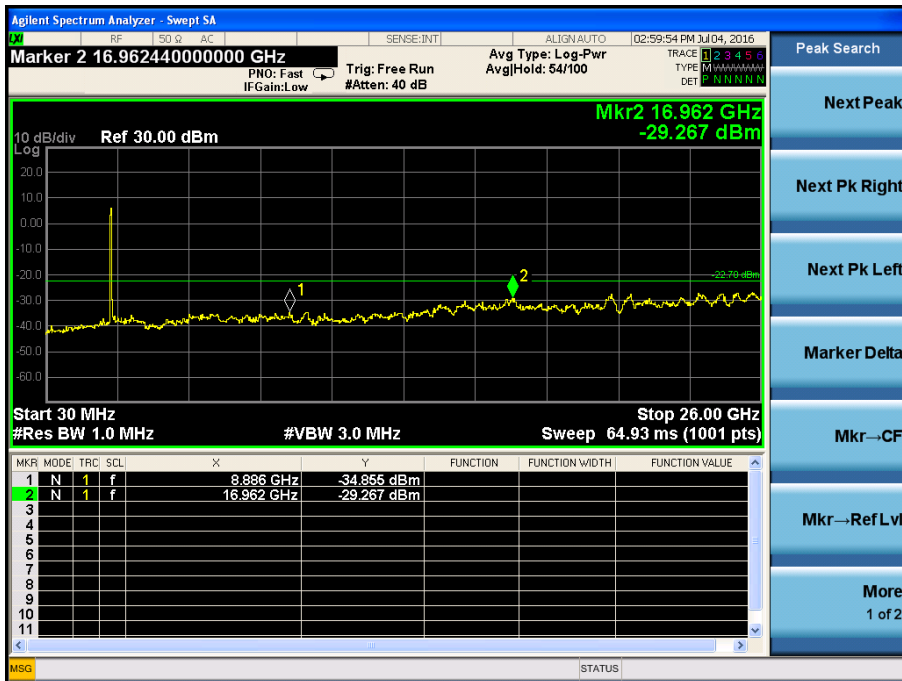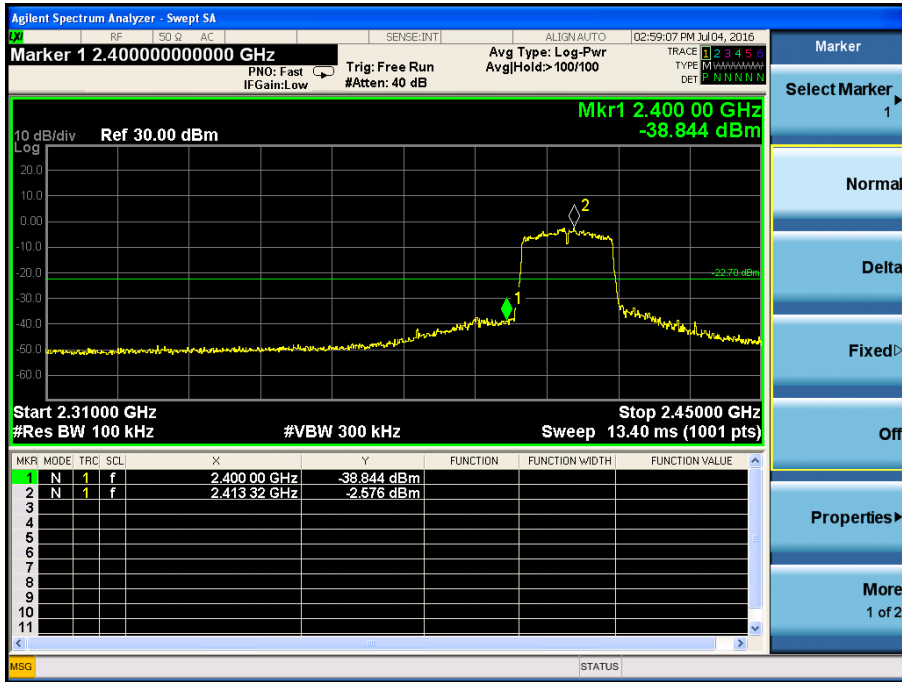

11n\_HT20- Middle Bandedge

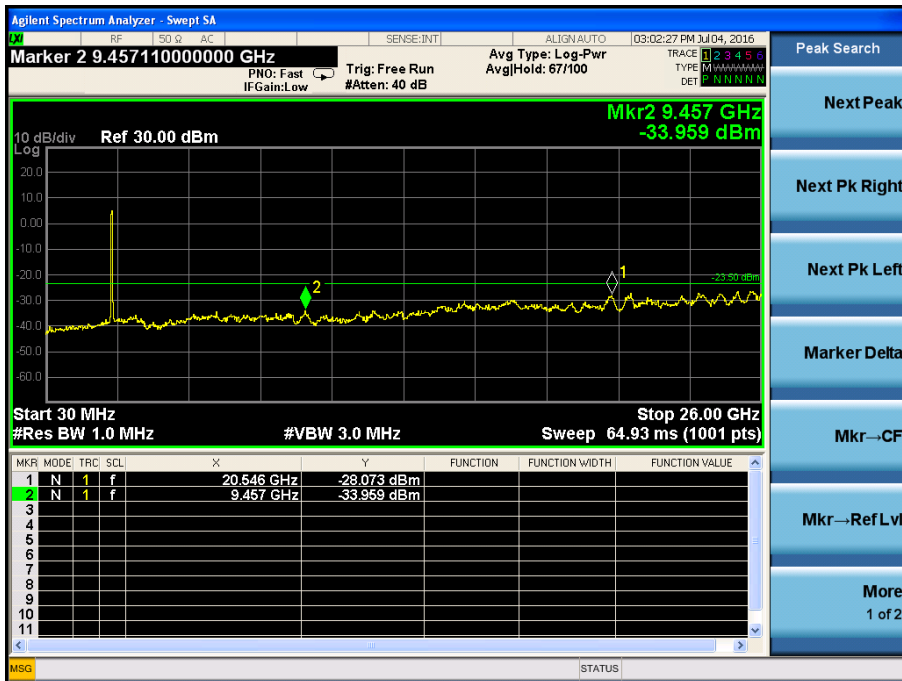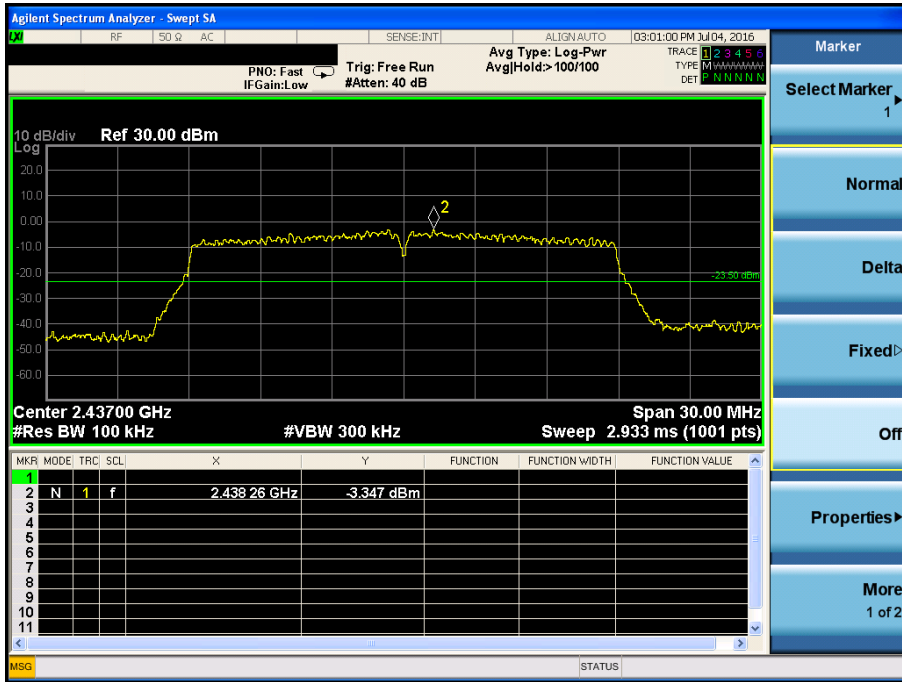

11n\_HT20- Highest Bandedge

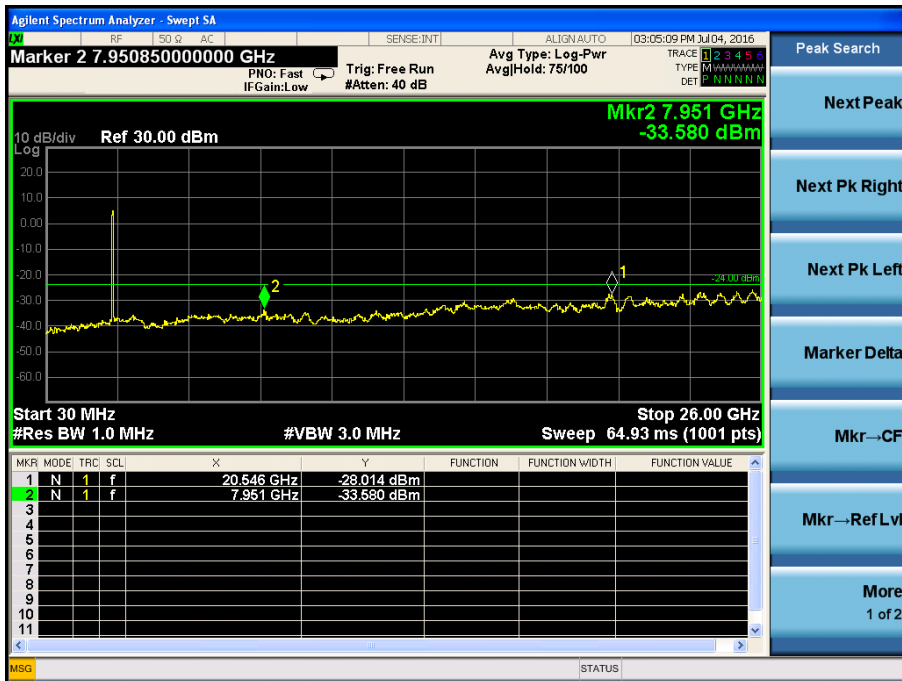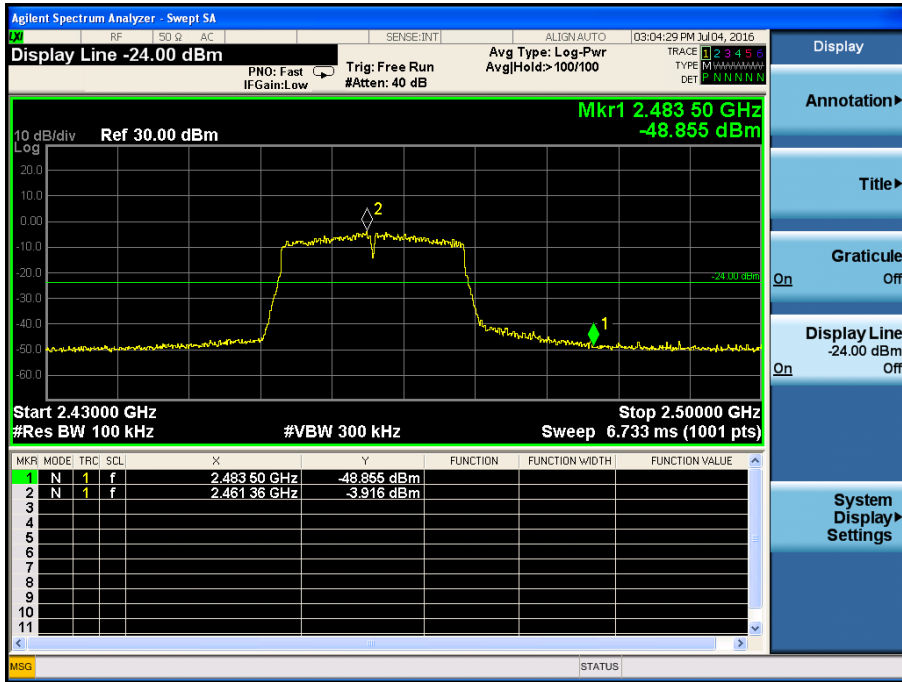


## 10. Conducted Emissions

### 10.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 10.2 Basic Test Setup Block Diagram

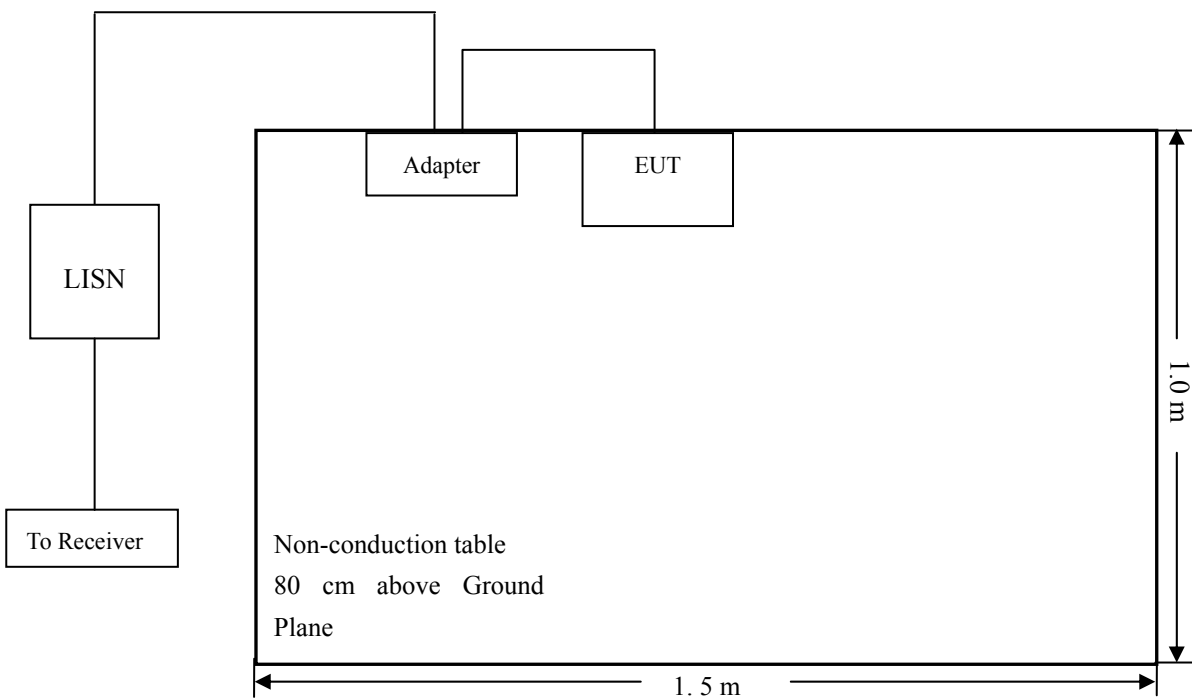

### 10.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 10.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz  
Stop Frequency..... 30 MHz  
Sweep Speed ..... Auto  
IF Bandwidth..... 10 kHz  
Quasi-Peak Adapter Bandwidth ..... 9 kHz  
Quasi-Peak Adapter Mode ..... Normal

## 10.5 Summary of Test Results/Plots

According to the data in section 10.6, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:


**-4.44 dB at 0.9220 MHz in the Neutral mode, Average detector, 0.15-30MHz**

## 10.6 Conducted Emissions Test Data

**Plot of Conducted Emissions Test Data**


EUT: *Wireless Digital Display*  
 Tested Model: *PXT515WR04G*  
 Operating Condition: *Transmitting(Wi-Fi)*  
 Comment: *AC 120V/60Hz; Adapter DC 12V*

Test Specification: *Neutral*

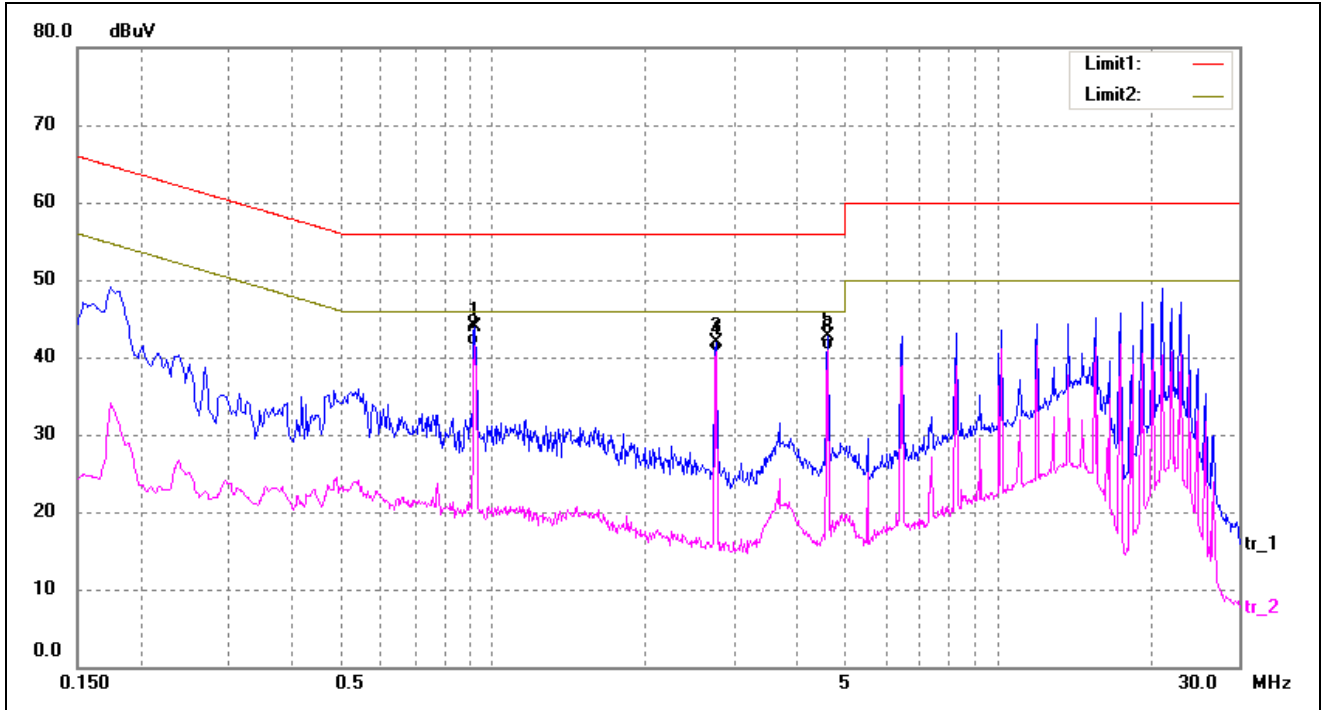

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.9220	34.15	9.66	43.81	56.00	-12.19	peak
2*	0.9220	31.90	9.66	41.56	46.00	-4.44	AVG
3	2.7660	31.88	9.93	41.81	56.00	-14.19	peak
4	2.7660	30.74	9.93	40.67	46.00	-5.33	AVG
5	4.6100	32.46	10.19	42.65	56.00	-13.35	peak
6	4.6100	30.81	10.19	41.00	46.00	-5.00	AVG

Test Specification: Live

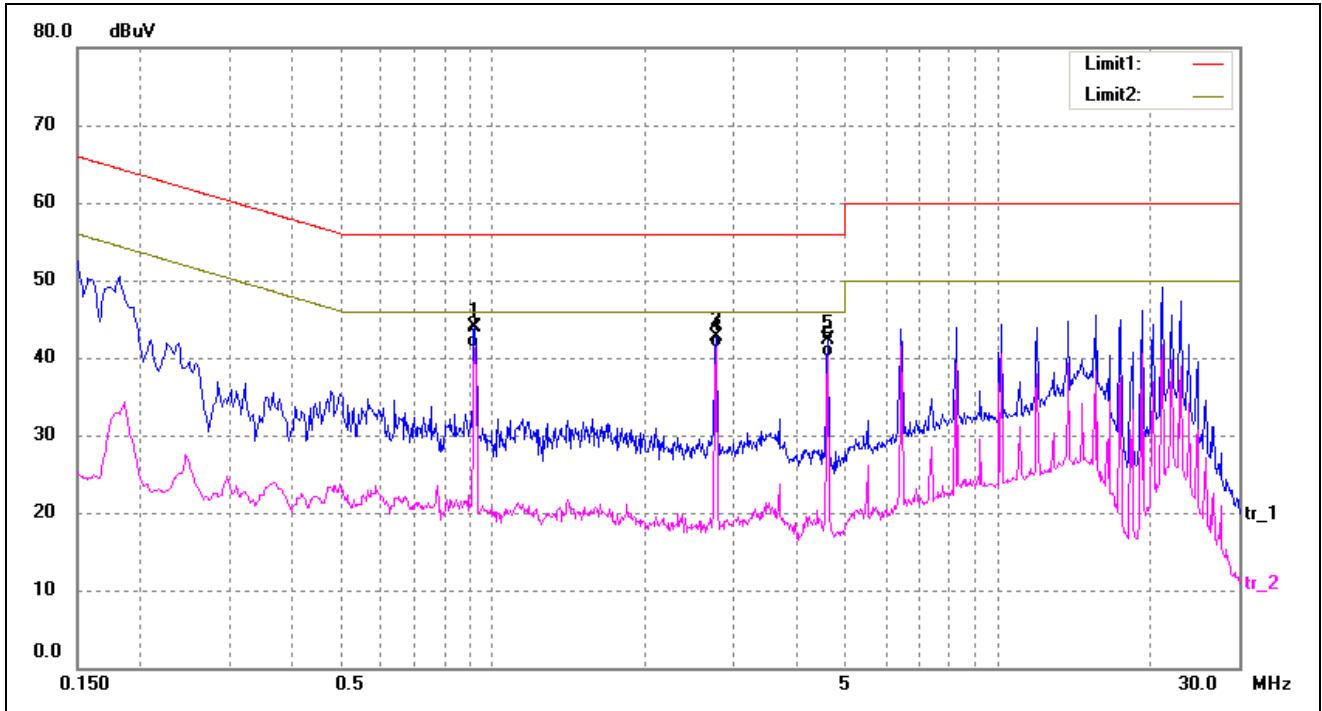

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.9220	34.26	9.66	43.92	56.00	-12.08	peak
2*	0.9220	31.73	9.66	41.39	46.00	-4.61	AVG
3	2.7660	32.83	9.93	42.76	56.00	-13.24	peak
4	2.7660	31.34	9.93	41.27	46.00	-4.73	AVG
5	4.6100	32.09	10.19	42.28	56.00	-13.72	peak
6	4.6100	30.00	10.19	40.19	46.00	-5.81	AVG

\*\*\*\*\* END OF REPORT \*\*\*\*\*