



TEST REPORT

Applicant Name & Address : Masterbuilt Manufacturing Inc.
 1 Masterbuilt Court Columbus, Georgia, 31907, USA

Manufacturing Site : Fudeer Electric Appliance Co.,Ltd.
 286, Kaifa Avenue, Taizhou Economic Development Zone, Zhejiang Province, China

Sample Description

Product : 30" Electric Smoker with RF
 40" Electric Smoker with RF

FCC ID : YHXESQ-3040R2

Model No. : 20070411, 20071111, 20071011, 20070911, 20070211, 20070311, 20071211, 20071311, 20071411

Electrical Rating : 40" Electric Smoker with RF: 120VAC, 60Hz, 1200W, 10A
 30" Electric Smoker with RF: 120VAC, 60Hz, 800W, 6.7A
 Remote controller: 2*1.5V/AAA battery

Frequency : 2.440GHz Transceiver

Date Received : 24 June 2011

Date Test Conducted : 06 July 2011 – 13 September 2011

Test standards : **FCC Part 15: 2010**

Test Result : Pass

Conclusion : The submitted samples complied with the above rules/standards.


Remark : None.

*****End of Page*****

Prepared and Checked By:

Approved By:

Helen Ma
 Helen Ma
 Project Engineer
 Intertek Guangzhou


 Carrie Chen
 Sr. Project Engineer
 Intertek Guangzhou
14 September 2011 Date

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. The test report only allows to be revised within three years from its original issued date unless further standard or the requirement was noticed.

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
 Block E, No.7-2 Guang Dong Software Science Park, Caipin Road, Guangzhou Science City, GETDD Guangzhou, China
 Tel / Fax: 86-20-8213 9688/86-20-3205 7538

CONTENT

TEST REPORT	1
CONTENT	2
1. General Description	3
1.1 Product Description	3
1.2 Related Submittal (s) / Grants	3
1.3 Test Methodology	3
1.4 Test Facility.....	3
1.5 Measurement Uncertainty	4
2. System Test Configuration	5
2.1 Justification	5
2.2 EUT Exercising Software.....	5
2.3 Special Accessories	5
2.4 Equipment Modification	5
2.5 Support Equipment List and Description.....	5
3. Summary of Test Results	6
3.1 Antenna Requirement	6
3.2 Conducted Emission	6
3.3 Radiated Emission.....	7
3.4 Bandedges Measurement	11
4. Appendix III - Document List.....	16

1. General Description

1.1 Product Description

The equipment under test (EUT) is a transceiver for remote control of Electric Smoker with RF at 2.440GHz. The EUT is powered by 2*1.5V/AAA battery. It send the command of temperature & time settings & lighting to the Electric Smoker, and it sends a signal to Electric Smoker to request "meat probe" temperature and receives temperature information (probe) from Electric Smoker.

Antenna Type: internal integrated antenna.

The remote controllers of the model: 20071411, 20070311, 20071211, 20071311, 20070411, 20071111, 20071011, 20070911 are the same as the test model 20070211 in hardware and software aspect. The only differences are the appearance, and model number for trading purpose.

We tested the remote controllers, model: 20070211, to determine if it was in compliance with the relevant FCC standards. We found that the unit met the requirements of FCC part 15.249 when tested as received. The worst case's test data was presented in this test report.

1.2 Related Submittal (s) / Grants

The FCC IC of corresponding transceiver for this transceiver is YHXESQ-3040C2.

1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003). Radiated emission measurement was performed in semi-anechoic chamber room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

1.4 Test Facility

The Radiated Emission test is performed at:
Shenzhen Academy of Metrology & Quality Inspection located at Longzhu Road Shenzhen,China. This test facility and site measurement data have been fully placed on file with the FCC, test firm registration number is 97379.

The Bandedge and Average factor measurements are performed at:
Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch and located at 6F, Block D, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China. This test facility and site measurement data have been fully placed on file with the FCC, test firm registration number is 242492.

Test Equipment List


Radiated Emission test:

Equipment No.	Equipment	Manufacturer	Model No.	Cal. Date	Due Date
SB3434	Horn Antenna	R&S	HF906	25-Jan-11	25-Jan-12
SB3436	EMI Test Receiver	R&S	ESI26	24-Jan-11	24-Jan-12
SB3440	Bilog Antenna	Chase	CBL6112B	24-Jan-11	24-Jan-12
SB3435/01	Amplifier	R&S	—	22-Jan-11	22-Jan-12
SB3450	3m Semi-anechoic chamber	Albatross Projects	9X6X6	24-Jan-11	24-Jan-12

Bandedge and Average factor measurements:

Equipment No.	Equipment	Manufacturer	Model No.	Cal. Date	Due Date
SZ056-03	Spectrum Analyzer	R&S	FSP 30	19-Mar-11	19-Mar-12

Test setup figure

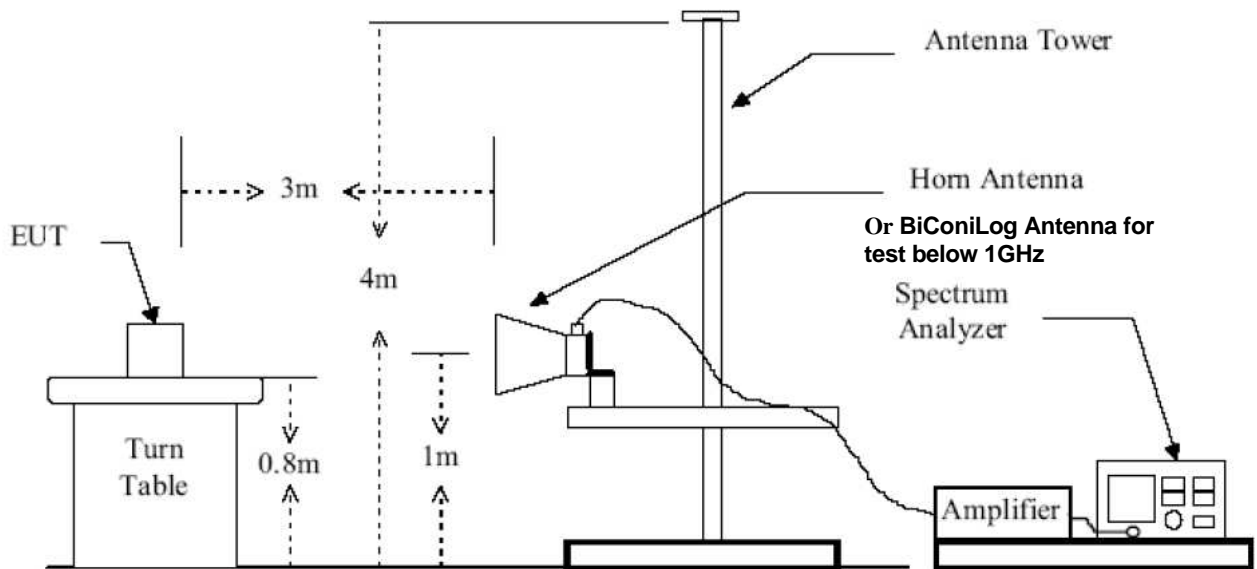

Test setup figure

1.5 Measurement Uncertainty

Radiated Emission: 4.5dB in the frequency range of 30MHz-1000MHz, 4.6dB in the frequency range of 1GHz-25GHz at a level of confidence of 95%.
 When determining the test conclusion, the Measurement Uncertainty of test has been considered.

2. System Test Configuration

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2003).

The EUT was powered by 2*1.5V/AAA battery in the testing.

Type of modulation: GFSK modulation, and only the worst data was reported in this report.

The unit was operated standalone and placed in the center of the turntable.

For maximizing emissions, the unit was placed in the center of the turntable, and the turntable was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Chapter 3.

2.2 EUT Exercising Software

There was no special software to exercise the device.

2.3 Special Accessories

No special accessories used.

2.4 Equipment Modification

Any modifications installed previous to testing by Masterbuilt Manufacturing Inc will be incorporated in each production model sold/leased in the United States. No modifications were installed by Intertek Testing Services Shenzhen Ltd. Guangzhou Branch.

2.5 Support Equipment List and Description

N/A

3. Summary of Test Results

FCC Rules	Description of Test	Result
15.203	Antenna Requirement	Pass
15.207	Disturbance Voltage at the Mains Terminals	N/A
15.249	Radiated Emission	Pass
15.249	Band Edges Measurement	Pass

Remark: When determining the test results, measurement uncertainty of tests has been considered.

3.1 Antenna Requirement

The EUT Antenna Type: internal integrated antenna.

3.2 Conducted Emission

The EUT is battery operating device, the conducted emission is unnecessary.

3.3 Radiated Emission

Data is included worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.3.1 Radiated Emission Limits

According to FCC 15.249, operating within the bands 2400-2483.5 MHz, the field strength of emissions from intentional radiators operated within this frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
2400 - 2483.5	50	500

3.3.2 Test Setup

Reference 1.4

3.3.3 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 62.0 dB μ V
 AF = 7.4 dB
 CF = 1.6 dB
 AG = 29.0 dB
 PD = 0 dB

AV = -10 dB

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

3.3.4 Radiated Emission Test Data

Date of test: 16 July 2011
 Operation: EUT on receiving operation

Radiated Emissions

Pursuant to FCC 15.109: Emissions Requirement

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB μ V/m)	QP Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	33.887	7.7	10.9	17.6	-	14.4	40.0	-25.6
Horizontal	101.924	13.9	11.6	12.3	-	14.6	43.5	-28.9
Horizontal	582.064	17.9	13.9	18.6	-	22.6	46.0	-23.4
Vertical	43.607	16.4	11.2	11.7	-	16.9	40.0	-23.1
Vertical	617.054	15.9	14.3	19.1	-	20.7	46.0	-25.3
Vertical	722.024	19.2	14.5	20.0	-	24.7	46.0	-21.3

Operation: EUT on transmitting operation

Pursuant to FCC 15.249: Emissions Requirement (30MHz-1GHz)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB μ V/m)	QP Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	364.349	14.6	13.2	15.9	-	17.3	46.0	-28.7
Horizontal	514.028	20.2	13.8	17.6	-	24.0	46.0	-22.0
Horizontal	624.830	17.7	14.3	19.1	-	22.5	46.0	-23.5
Vertical	30.000	6.5	10.9	18.8	-	14.4	40.0	-25.6
Vertical	405.170	14.3	13.2	17.0	-	18.1	46.0	-27.9
Vertical	628.717	16.9	14.3	19.1	-	21.7	46.0	-24.3

Pursuant to FCC 15.249: Emissions Requirement(1GHz-25GHz)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2440.000	96.0	32.2	28.5	92.3	114.0	-21.7
Horizontal	4880.000	53.4	31.0	33.3	55.7	74.0	-18.3
Horizontal	9760.000	43.9	28.2	37.5	53.2	74.0	-20.8
Vertical	2440.000	96.6	32.2	28.5	92.9	114.0	-21.1
Vertical	4880.000	54.4	31.0	33.3	56.7	74.0	-17.3
Vertical	9760.000	49.6	28.2	37.5	58.9	74.0	-15.1

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
Horizontal	2440.000	96.0	32.2	28.5	9.1	83.2	94.0	-10.8
Horizontal	4880.000	53.4	31.0	33.3	9.1	46.6	54.0	-7.4
Horizontal	9760.000	43.9	28.2	37.5	9.1	44.1	54.0	-9.9
Vertical	2440.000	96.6	32.2	28.5	9.1	83.8	94.0	-10.2
Vertical	4880.000	54.4	31.0	33.3	9.1	47.6	54.0	-6.4
Vertical	9760.000	49.6	28.2	37.5	9.1	49.8	54.0	-4.2

- Notes:
1. AT frequencies equal to or less than 1000MHz, quasi-peak detector was used, above 1000MHz, Peak detector was used.
 2. All measurements were made at 3 meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.

3.3.5 Test Result

The data on the above test result table lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

According 15.249, the worst case radiated emission at 9760.000 MHz
 Judgement: Passed by 4.2dB

3.4 Bandedges Measurement

3.4.1 Limited of the bandedges measurement

Sec15.249:

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

(e) As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.



Sec15.215:

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20dB bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


3.4.2 Test Setup

Refer to 1.4

3.4.3 Test Plot
Frequency Bands
Operating mode: Transmitting

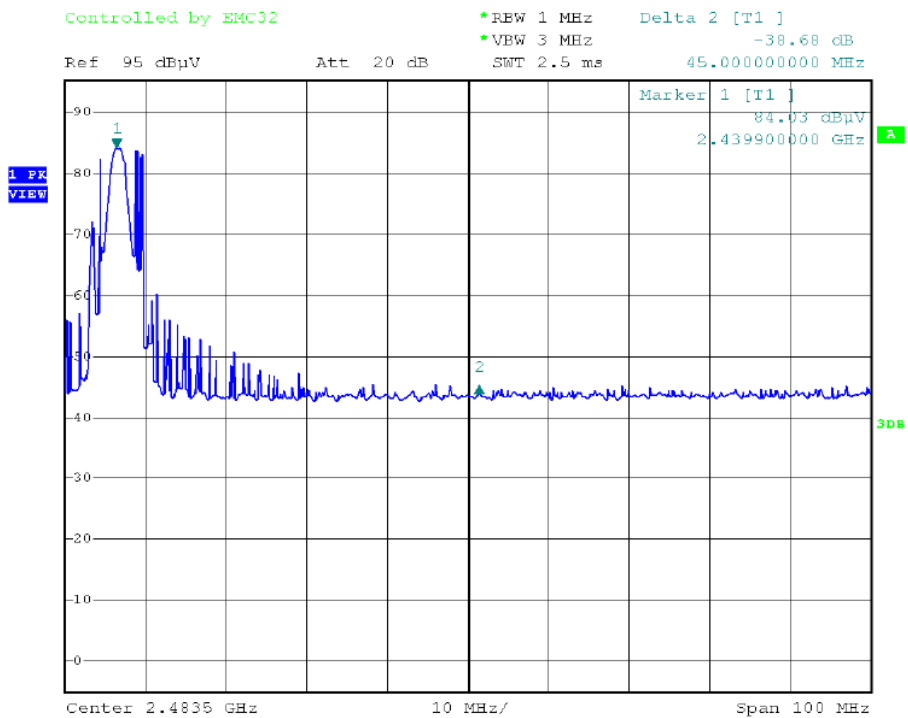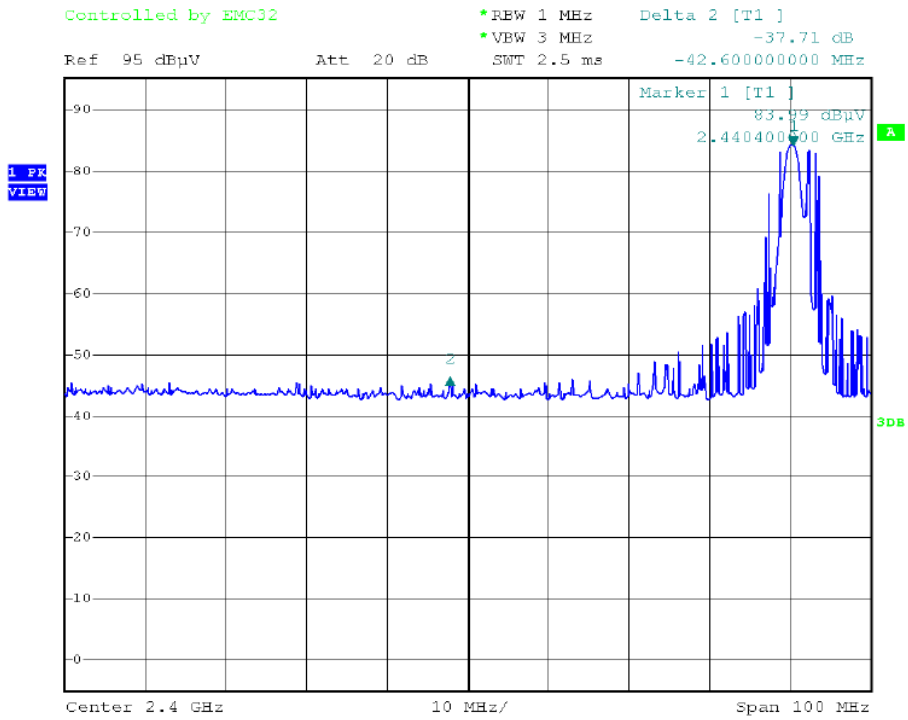

Modulation Bandwidth
Operating mode: Transmitting

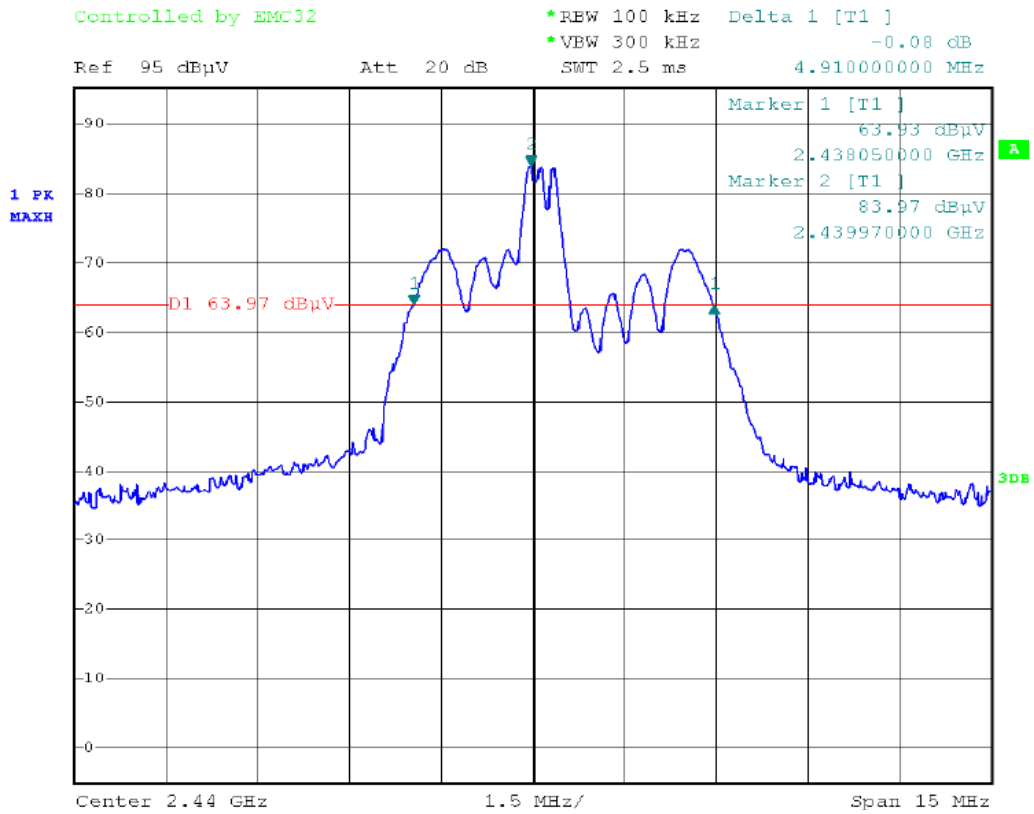

3.4.4 Test Result

From the plot, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfil the requirement of 15.249(d).

Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e (Bandedge Plot).

(i) Lower bandedge:

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

$$\begin{aligned} &= 92.9\text{dB}\mu\text{v/m} - 37.7\text{dB} \\ &= 55.2\text{dB}\mu\text{v/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

$$\begin{aligned} &= 83.8\text{dB}\mu\text{v/m} - 37.7\text{dB} \\ &= 46.1\text{dB}\mu\text{v/m} \end{aligned}$$

(ii) Upper bandedge:

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

$$\begin{aligned} &= 92.9\text{dB}\mu\text{v/m} - 38.7\text{dB} \\ &= 54.2\text{dB}\mu\text{v/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

$$\begin{aligned} &= 83.8\text{dB}\mu\text{v/m} - 38.7\text{dB} \\ &= 45.1\text{dB}\mu\text{v/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74 dB μ v/m (Peak Limit) and 54dB μ v/m (Average Limit).

3.4.5 Transmitter Duty Cycle Calculation FCC Rule 15.35(b, c)

Averaging factor in dB = $20 \log(\text{duty cycle})$

The specification for output field strengths in accordance with the FCC rules specify measurements with an average detector. During testing, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation. The duty cycle is measured by placing the spectrum analyzer in zero scan (receiver mode) and linear mode at maximum bandwidth (3 MHz at 3 dB down) and viewing the resulting time domain signal output from the analyzer on a Tektronix oscilloscope. The oscilloscope is used because of its superior time base and triggering facilities.

A plot of the worst-case duty cycle as detected in this manner is shown below.

The duty cycle is simply the on-time divided by the period:

The duration of one cycle = 9.96ms

Effective period of the cycle = 3.48ms

DC = $3.48/9.96=0.3494$ or 34.94%

Therefore, the averaging factor is found by $20\lg 0.3494=-9.1\text{dB}$

4. Appendix III - Document List

Exhibit type	File Description	Filename
Average factor	Average factor	Average factor.pdf
Bandwidth Plot	Bandwidth Plot	Bandwidth Plot.pdf
Block Diagram	Block Diagram	Block Diagram.pdf
Circuit Diagram	Circuit Diagram	Circuit Diagram.pdf
External photos	External photos	External photos.pdf
Label and Location	Label and Location	Label and Location.pdf
internal photos	internal photos	internal photos.pdf
Test Setup Photos(Radiated Emission)	Test Setup Photos(Radiated Emission)	Test Setup Photos(Radiated Emission).pdf
Test Report	Test Report	Test Report.pdf
Letter of Agency	Letter of Agency	Letter of Agency.pdf
TCB Agreement	TCB Agreement	TCB Agreement.pdf
Technical description	Technical description	Technical description.pdf
User Manual	User Manual	User Manual.pdf
Form 731	Form 731	Form 731.pdf

----- End of Report -----