



## FCC 47 CFR PART 15 SUBPART C

### TEST REPORT

For

**2.4G Dongle**

**Model Number:**

**R1~Rxx (x=A~Z, a~z, 0~9, or blank, any character)**

**Trade Name: OMEGA**

*Issued to*

**OMEGA TECHNOLOGY INC.**

**6F, NO. 87 SEC.3, Chung-Yang Road, Tu-Cheng Dist, New Taipei City 236, Taiwan, R.O.C.**

*Issued by*

**Compliance Certification Services Inc.**

**No.11, Wugong 6th Rd., Wugu Dist.,  
New Taipei City 24891, Taiwan. (R.O.C.)**

**<http://www.ccsrf.com>**

**[service@ccsrf.com](mailto:service@ccsrf.com)**

**Issued Date: March 26, 2015**



---

*Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



**Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	March 26, 2015	Initial Issue	ALL	Becca Chen



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>4</b>
<b>2. EUT DESCRIPTION .....</b>	<b>5</b>
<b>3. TEST METHODOLOGY .....</b>	<b>6</b>
3.1 EUT CONFIGURATION .....	6
3.2 EUT EXERCISE.....	6
3.3 GENERAL TEST PROCEDURES .....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS .....	7
3.5 DESCRIPTION OF TEST MODES .....	7
<b>4. INSTRUMENT CALIBRATION.....</b>	<b>8</b>
4.1 MEASURING INSTRUMENT CALIBRATION .....	8
4.2 MEASUREMENT EQUIPMENT USED.....	8
4.3 MEASUREMENT UNCERTAINTY .....	9
<b>5. FACILITIES AND ACCREDITATIONS .....</b>	<b>10</b>
5.1 FACILITIES .....	10
5.2 EQUIPMENT .....	10
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	11
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>12</b>
6.1 SETUP CONFIGURATION OF EUT.....	12
6.2 SUPPORT EQUIPMENT .....	12
<b>7. FCC PART 15.249 REQUIREMENTS.....</b>	<b>13</b>
7.1 20 DB BANDWIDTH .....	13
7.2 BAND EDGES MEASUREMENT.....	16
7.3 SPURIOUS EMISSION .....	22
7.4 POWERLINE CONDUCTED EMISSIONS.....	30
<b>APPENDIX I PHOTOGRAPHS OF TEST SETUP.....</b>	<b>33</b>
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>	



# 1. TEST RESULT CERTIFICATION

**Applicant:** OMEGA TECHNOLOGY INC.  
6F, NO. 87 SEC.3, Chung-Yang Road, Tu-Cheng Dist, New Taipei City 236, Taiwan, R.O.C.

**Equipment Under Test:** 2.4G Dongle

**Trade Name:** OMEGA

**Model Number:** R1~Rxx (x=A~Z, a~z, 0~9, or blank, any character)

**Date of Test:** March 19 ~ March 20, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C(10-1-12 Edition)	No non-compliance noted

## We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2009** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements emission limits of FCC Rules Part 15.207, 15.209 and 15.249.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Reviewed by:

---

Miller Lee  
Section Manager  
Compliance Certification Services Inc.

---

Angel Cheng  
Section Manager  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	2.4G Dongle																																																																														
<b>Trade Name</b>	OMEGA																																																																														
<b>Model Number</b>	R1~Rxx (x=A~Z, a~z, 0~9, or blank, any character)																																																																														
<b>Received Date</b>	February 11, 2015																																																																														
<b>Power Supply</b>	Powered from host device																																																																														
<b>Frequency Range</b>	<table border="1"> <thead> <tr> <th colspan="4">2408 ~ 2474MHz</th> </tr> <tr> <th>Channel</th> <th>Frequency (MHz)</th> <th>Channel</th> <th>Frequency (MHz)</th> </tr> </thead> <tbody> <tr><td>1</td><td>2408</td><td>18</td><td>2442</td></tr> <tr><td>2</td><td>2410</td><td>19</td><td>2444</td></tr> <tr><td>3</td><td>2412</td><td>20</td><td>2446</td></tr> <tr><td>4</td><td>2414</td><td>21</td><td>2448</td></tr> <tr><td>5</td><td>2416</td><td>22</td><td>2450</td></tr> <tr><td>6</td><td>2418</td><td>23</td><td>2452</td></tr> <tr><td>7</td><td>2420</td><td>24</td><td>2454</td></tr> <tr><td>8</td><td>2422</td><td>25</td><td>2456</td></tr> <tr><td>9</td><td>2424</td><td>26</td><td>2458</td></tr> <tr><td>10</td><td>2426</td><td>27</td><td>2460</td></tr> <tr><td>11</td><td>2428</td><td>28</td><td>2462</td></tr> <tr><td>12</td><td>2430</td><td>29</td><td>2464</td></tr> <tr><td>13</td><td>2432</td><td>30</td><td>2466</td></tr> <tr><td>14</td><td>2434</td><td>31</td><td>2468</td></tr> <tr><td>15</td><td>2436</td><td>32</td><td>2470</td></tr> <tr><td>16</td><td>2438</td><td>33</td><td>2472</td></tr> <tr><td>17</td><td>2440</td><td>34</td><td>2474</td></tr> </tbody> </table>			2408 ~ 2474MHz				Channel	Frequency (MHz)	Channel	Frequency (MHz)	1	2408	18	2442	2	2410	19	2444	3	2412	20	2446	4	2414	21	2448	5	2416	22	2450	6	2418	23	2452	7	2420	24	2454	8	2422	25	2456	9	2424	26	2458	10	2426	27	2460	11	2428	28	2462	12	2430	29	2464	13	2432	30	2466	14	2434	31	2468	15	2436	32	2470	16	2438	33	2472	17	2440	34	2474
2408 ~ 2474MHz																																																																															
Channel	Frequency (MHz)	Channel	Frequency (MHz)																																																																												
1	2408	18	2442																																																																												
2	2410	19	2444																																																																												
3	2412	20	2446																																																																												
4	2414	21	2448																																																																												
5	2416	22	2450																																																																												
6	2418	23	2452																																																																												
7	2420	24	2454																																																																												
8	2422	25	2456																																																																												
9	2424	26	2458																																																																												
10	2426	27	2460																																																																												
11	2428	28	2462																																																																												
12	2430	29	2464																																																																												
13	2432	30	2466																																																																												
14	2434	31	2468																																																																												
15	2436	32	2470																																																																												
16	2438	33	2472																																																																												
17	2440	34	2474																																																																												
<b>Modulation Technique</b>	FSK																																																																														
<b>Antenna Gain</b>	4.775dBi																																																																														
<b>Antenna Designation</b>	PCB Antenna																																																																														

**Remark:**

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **YI8R1** filing to comply with Section 15.107, 15.109, 15.207, 15.209, 15.249 (FCC Part 15, Subpart C Rules.)



### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC CFR 47 Part 15.207, 15.209, 15.247.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.249 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4: 2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2009.



### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 3.5 DESCRIPTION OF TEST MODES

The EUT (model: R6) had been tested under operating condition.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and powerline conducted emission below 30MHz, which worst case was in normal link mode.

**Channel Low (2408MHz), Channel Mid (2440MHz) and Channel High (2474MHz) were chosen for the final testing.**



## 4. INSTRUMENT CALIBRATION

### 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

*Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.*

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	11/23/2015
Thermostatic/Hygrosatic Chamber	TAICHY	MHG-150LF	930619	10/07/2015
AC Power Source	EXTECH	6205	1140845	N.C.R
DC Power Supply	ABM	8301HD	D011531	N.C.R
Power Meter	Anritsu	ML2495A	1012009	06/03/2015
Power Sensor	Anritsu	MA2411A	0917072	06/03/2015
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101073	07/09/2015

3M Chamber Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510268	09/18/2015
EMI Test Receiver	R&S	ESCI	100064	05/30/2015
Bilog Antenna	Sunol Sciences	JB3	A030105	08/19/2015
Horn Antenna	EMCO	3117	00055165	01/26/2016
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission room #A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TEST RECEIVER	R&S	ESCI	101201	08/31/2015
LISN (EUT)	SCHWARZBECK	NSLK 8127	8127527	08/28/2015
LISN	SCHWARZBECK	NSLK 8127	8127526	08/28/2015
BNC CABLE	EMCI	CFD300-NL	BNC A6	06/23/2015
Pulse Limiter	R&S	ESH3-Z2	C3010026-2	08/26/2015
THERMO-HYGRO METER	WISEWIND	201A	No. 02	05/12/2015
Test S/W	EZ-EMC			





### 4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.59
3M Semi Anechoic Chamber / <200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chungshen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

*Remark: The powerline conducted emissions test items was tested at Compliance Certification Services Inc. (Hsintien Lab.) The test equipments were listed in page 8 and the test data, please refer page 31~32.*

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.




Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



### 5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No.	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC	IBM	7663 (T61)	L3E9812	FCC DoC	LAN Cable: Unshielded, 10m Line Cable: Unshielded, 1.0m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2	USB Keyboard	Logitech	Y-U0011	N/A	FCC DoC	Shielded, 1.8m	N/A
3	Printer	EPSON	C20SX	N/A	FCC DoC	Shielded, 1.8m	Unshielded, 1.8m
4	Host PC	DELL	T3500	8X36VBX	FCC DoC	N/A	Unshielded, 1.8m
5	LCD Monitor	DELL	P2415Qb	N/A	FCC DoC	Shielded, 1.5m with two cores	Unshielded, 1.8m
6	Modem	GALILEO	AL-56ERM	0MERM04A0212	FCC DoC	Shielded, 1.8m	Unshielded, 1.8m with a core

**Remark:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.




## 7. FCC PART 15.249 REQUIREMENTS

### 7.1 20 DB BANDWIDTH

#### LIMIT

None; for reporting purposes only.

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=51kHz, VBW = 100kHz, Span = 200MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

#### TEST RESULTS

*No non-compliance noted*

#### Test Data

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2408	1.675
Mid	2440	1.675
High	2474	1.675



### Test Plot

#### CH Low


Agilent

R T

Mkr2 1.675 MHz  
0.86 dB

Ref -17 dBm

#Atten 0 dB

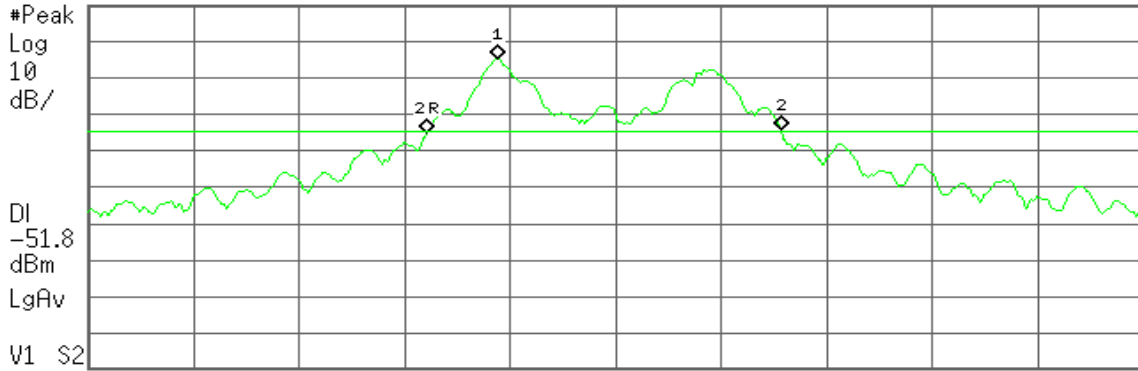

Center 2.408 000 GHz

Span 5 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.407 442 GHz	-31.81 dBm
2R	(1)	Freq	2.407 108 GHz	-51.94 dBm
2Δ	(1)	Freq	1.675 MHz	0.86 dB

#### CH Mid


Agilent

R T

Mkr2 1.675 MHz  
-0.68 dB

Ref -17 dBm

#Atten 0 dB

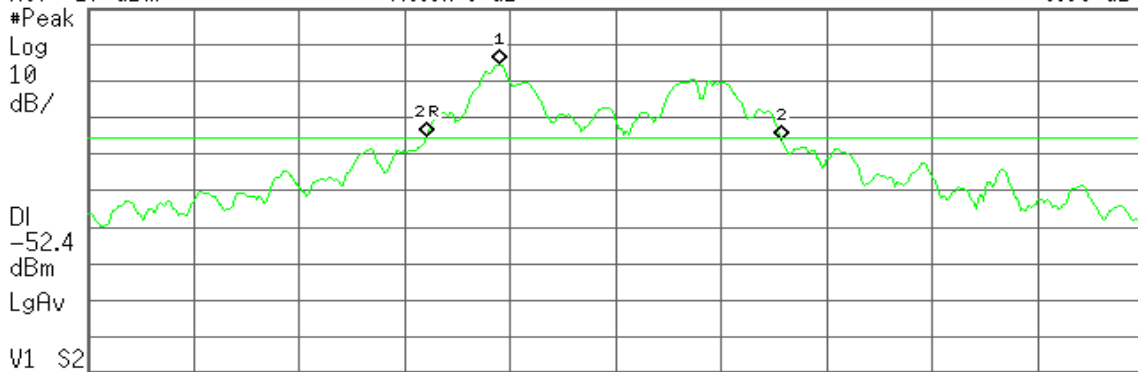

Center 2.440 000 GHz

Span 5 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.439 458 GHz	-32.36 dBm
2R	(1)	Freq	2.439 108 GHz	-52.21 dBm
2Δ	(1)	Freq	1.675 MHz	-0.68 dB



### CH High

Agilent


R T

▲ Mkr2 1.675 MHz

Ref -17 dBm

#Atten 0 dB

0.41 dB

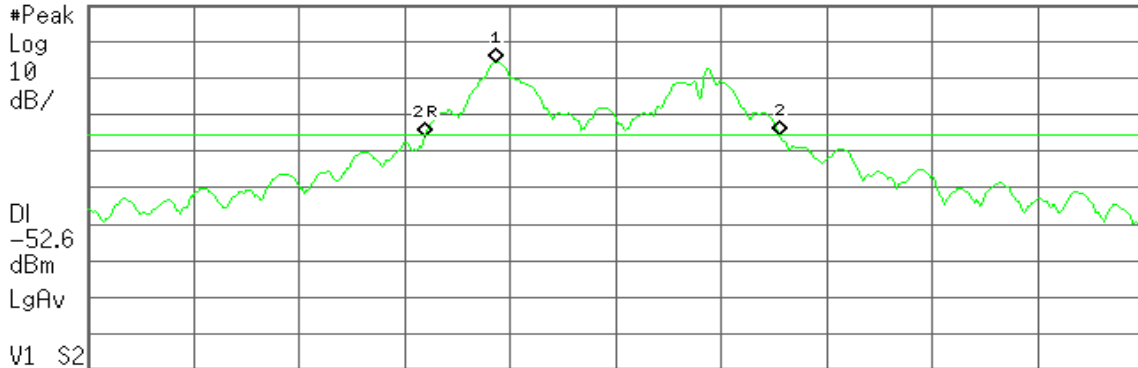

Center 2.474 000 GHz

Span 5 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.473 433 GHz	-32.60 dBm
2R	(1)	Freq	2.473 100 GHz	-52.89 dBm
2▲	(1)	Freq	1.675 MHz	0.41 dB



## 7.2 BAND EDGES MEASUREMENT

### LIMIT


1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz}) + 80$	$20\text{LOG}((240/F(\text{kHz}))+80)$
0.490 - 1.705	$24000/F(\text{kHz}) + 40$	$20\text{LOG}((2400/F(\text{kHz}))+40)$
1.705 – 30.0	70	36.9
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

### Test Configuration

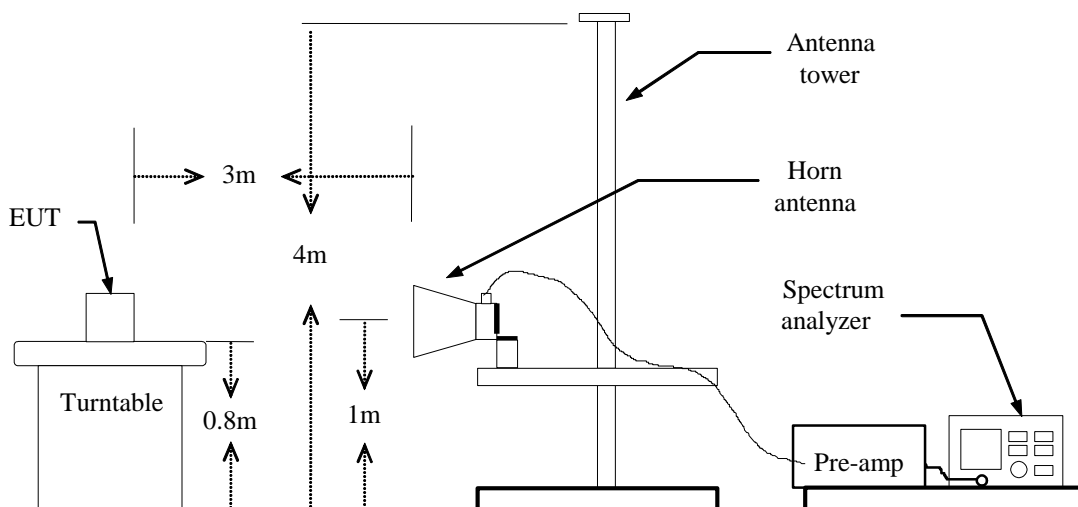





## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=100ms
  - (b) AVERAGE: RBW=1MHz / VBW=300Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.


## **TEST RESULTS**

Refer to attach spectrum analyzer data chart.



**Band Edges (CH Low)**


**Polarity: Vertical**

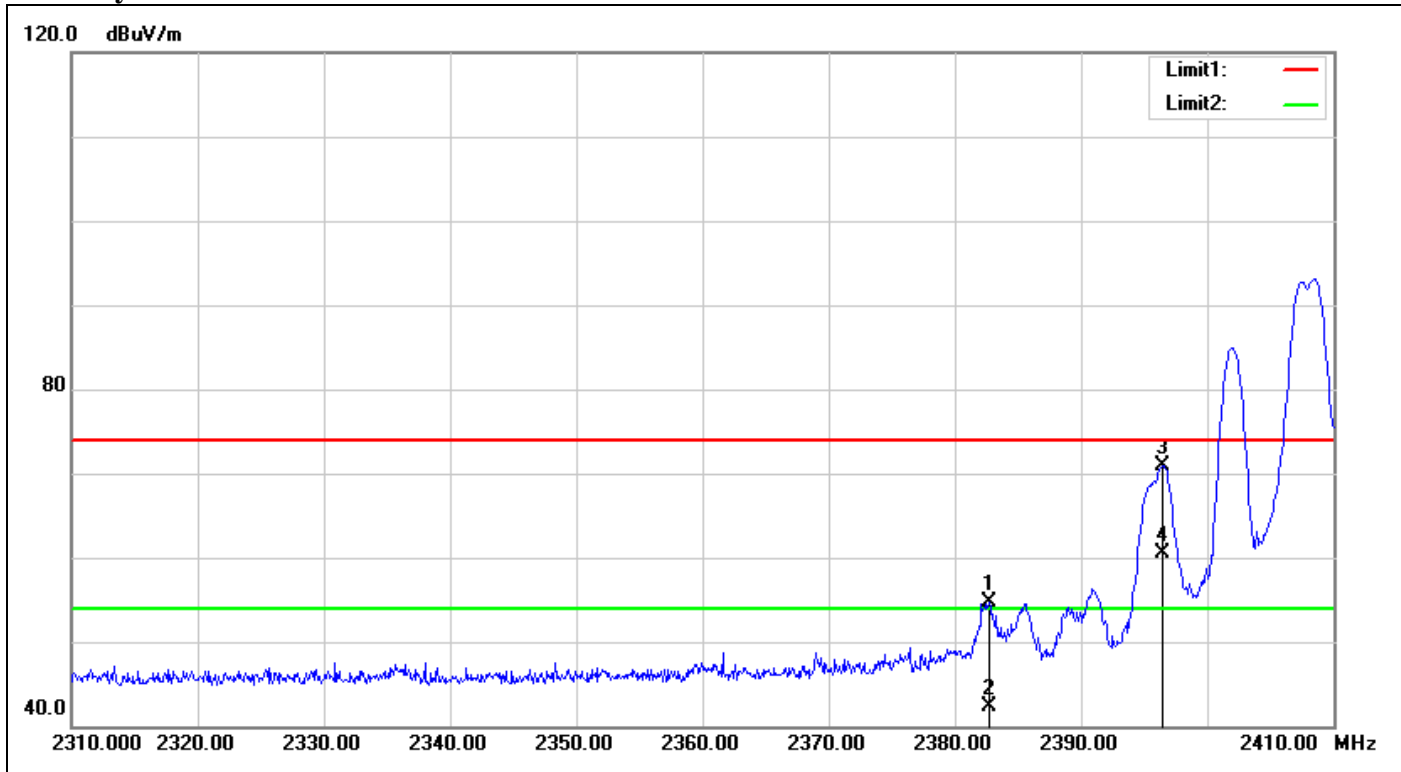

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2382.700	58.53	-3.84	54.69	74.00	-19.31	100	23	peak
2	2382.700	46.17	-3.84	42.33	54.00	-11.67	100	23	AVG
3	2396.400	74.71	-3.72	70.99	73.02	-2.03	100	107	peak
4	2396.400	64.31	-3.72	60.59	69.56	-8.97	100	107	AVG



**Polarity: Horizontal**

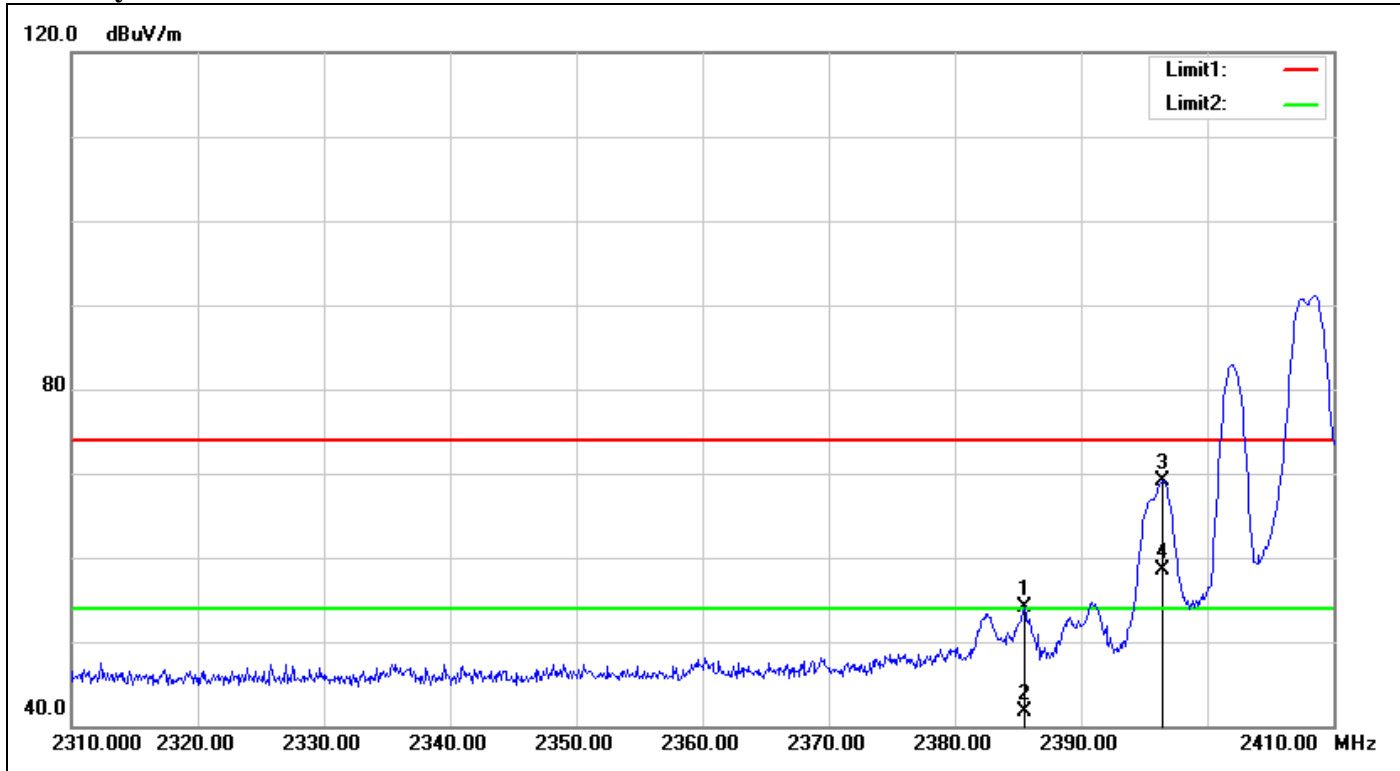


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2385.500	57.85	-3.81	54.04	74.00	-19.96	100	295	peak
2	2385.500	45.47	-3.81	41.66	54.00	-12.34	100	295	AVG
3	2396.400	72.87	-3.72	69.15	79.50	-10.35	100	280	peak
4	2396.400	62.27	-3.72	58.55	67.73	-9.18	100	280	AVG



**Band Edges (CH High)**


**Polarity: Vertical**

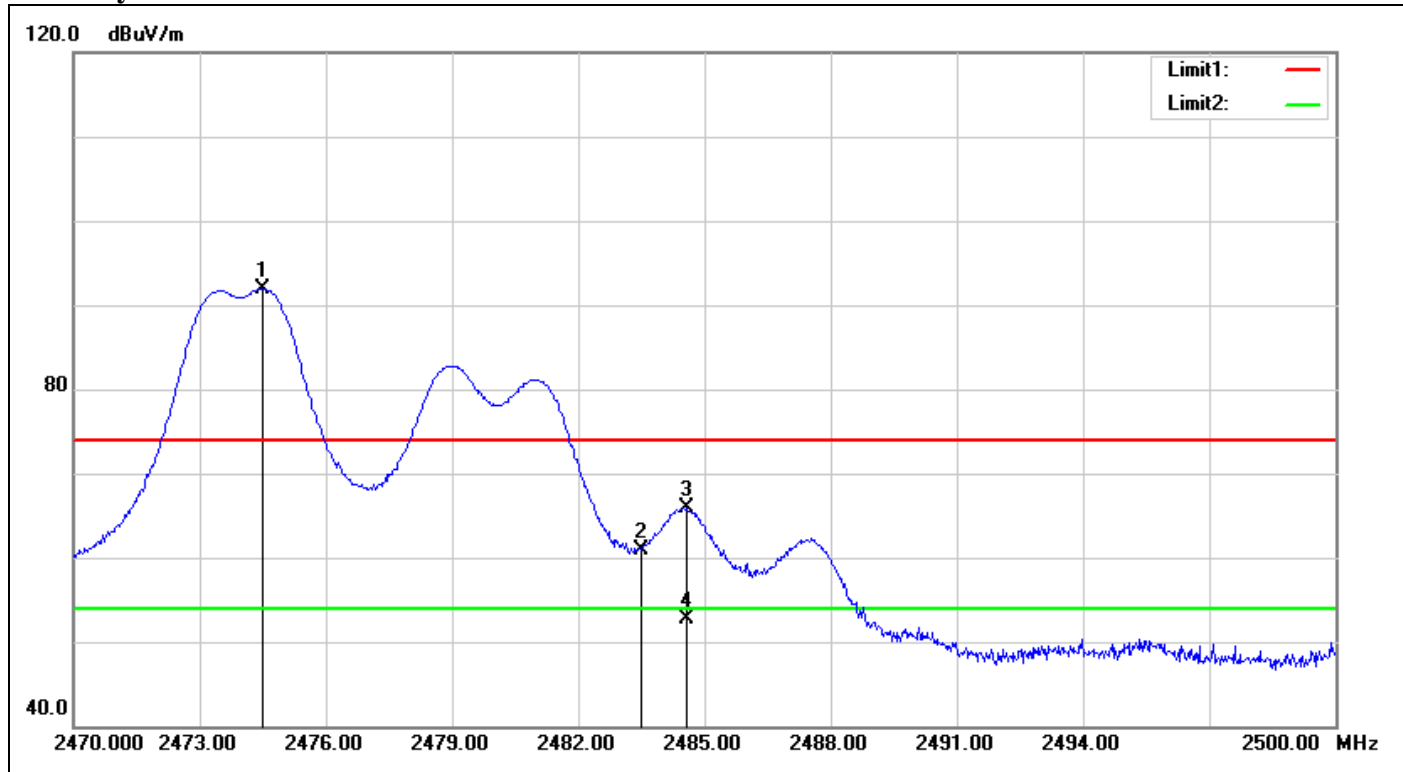

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2474.500	95.27	-3.33	91.94	114.00	-22.06	100	107	peak
2	2483.500	64.22	-3.27	60.95	74.00	-13.05	100	107	peak
3	2484.580	69.10	-3.26	65.84	74.00	-8.16	100	107	peak
4	2484.580	56.02	-3.26	52.76	54.00	-1.24	100	107	AVG



**Polarity: Horizontal**

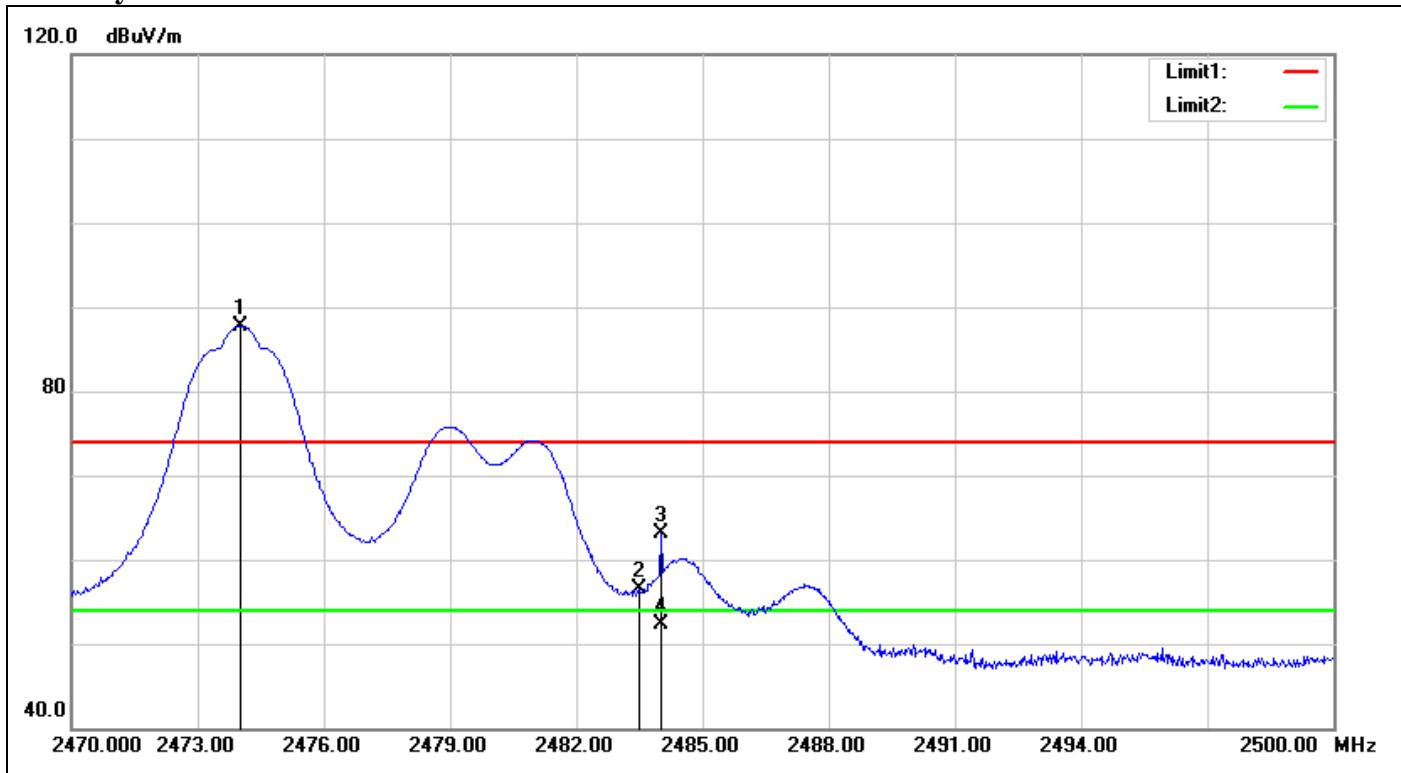

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
1	2474.020	91.12	-3.33	87.79	114.00	-26.21	100	78	peak
2	2483.500	59.78	-3.27	56.51	74.00	-17.49	100	320	peak
3	2484.010	66.36	-3.27	63.09	74.00	-10.91	100	335	peak
4	2484.010	55.51	-3.27	52.24	54.00	-1.76	100	335	AVG



### 7.3 SPURIOUS EMISSION

#### LIMIT

1. In the section 15.249(a):

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental Field Strength (mV/m)	Field Strength of Harmonics (µV/m)
902-928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

2. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz}) + 80$	$20\text{LOG}((240/F(\text{kHz}))+80)$
0.490 - 1.705	$24000/F(\text{kHz}) + 40$	$20\text{LOG}((2400/F(\text{kHz}))+40)$
1.705 – 30.0	70	36.9
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.




### Test Configuration

#### 9kHz ~ 30MHz

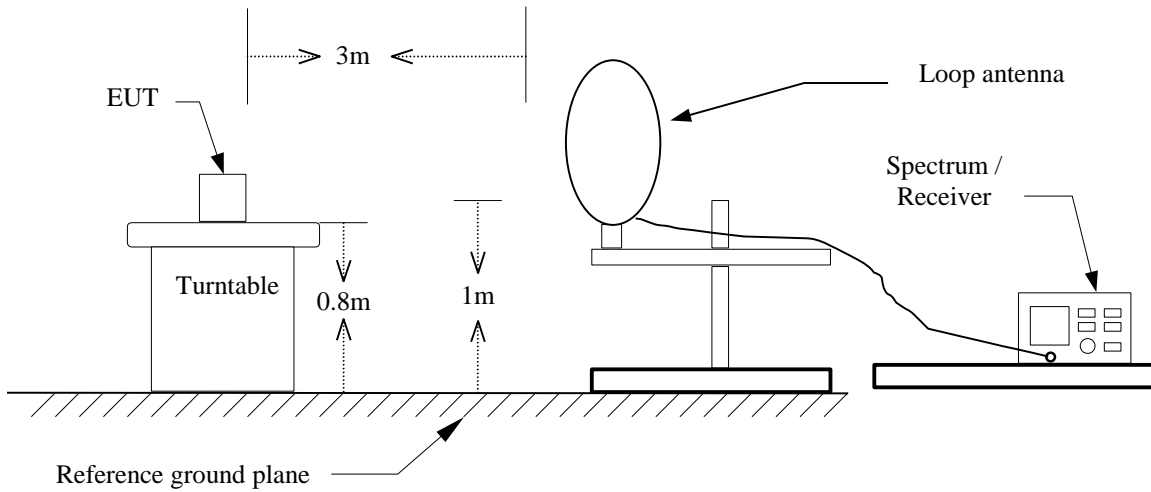


#### 30MHz ~ 1GHz

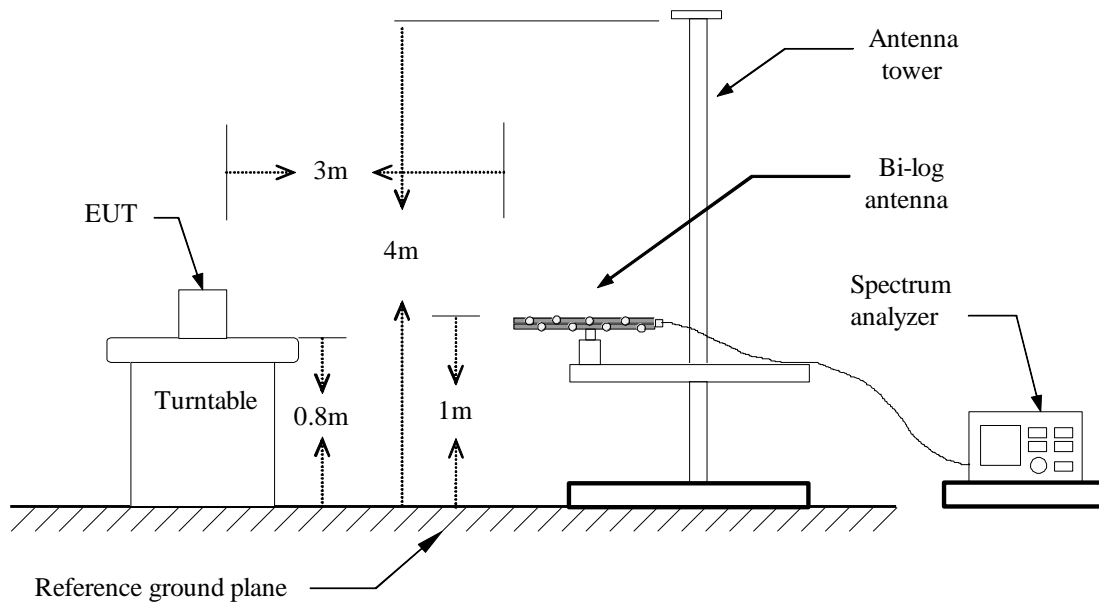



**Above 1 GHz**

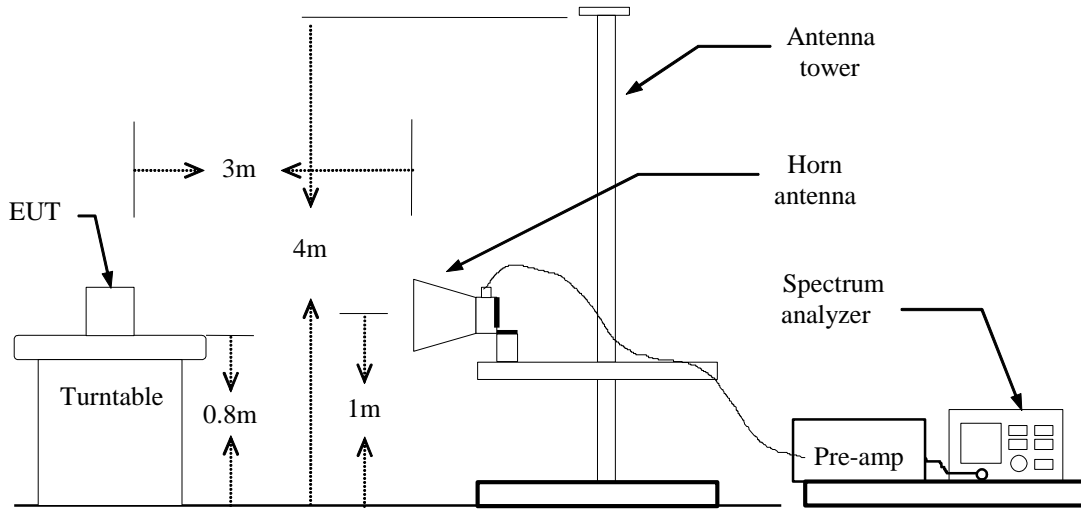





## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:  
Below 1GHz:  
RBW=100kHz / VBW=300kHz / Sweep=AUTO  
Above 1GHz:  
(a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO  
(b) AVERAGE: RBW=1MHz / VBW=300Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.



**Below 1 GHz**

**Operation Mode:** Normal Link

**Test Date:** March 19, 2015

**Temperature:** 27°C

**Tested by:** Owen Wu

**Humidity:** 53% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Detector Mode (PK/QP)	Ant.Pol. (H/V)
102.7500	46.42	-20.43	25.99	43.50	-17.51	Peak	V
180.3500	44.41	-19.32	25.09	43.50	-18.41	Peak	V
359.8000	46.45	-14.96	31.49	46.00	-14.51	Peak	V
551.8600	40.20	-10.98	29.22	46.00	-16.78	Peak	V
600.3600	35.36	-10.50	24.86	46.00	-21.14	Peak	V
797.2700	34.55	-7.41	27.14	46.00	-18.86	Peak	V
121.1800	44.23	-17.39	26.84	43.50	-16.66	Peak	H
167.7400	47.73	-18.69	29.04	43.50	-14.46	Peak	H
359.8000	52.00	-14.96	37.04	46.00	-8.96	Peak	H
503.3600	40.70	-11.77	28.93	46.00	-17.07	Peak	H
695.4200	39.89	-8.84	31.05	46.00	-14.95	Peak	H
798.2400	42.96	-7.40	35.56	46.00	-10.44	Peak	H

**Remark:**

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

**Above 1 GHz****Operation Mode:** TX / CH Low**Test Date:** March 19, 2015**Temperature:** 27°C**Tested by:** Owen Wu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2408.000	96.73	-3.71	93.02	114.00	-20.98	peak	V
2408.000	93.27	-3.71	89.56	94.00	-4.44	AVG	V
1850.000	50.43	-5.67	44.76	74.00	-29.24	peak	V
4815.000	49.66	4.02	53.68	74.00	-20.32	peak	V
4815.000	44.38	4.02	48.40	54.00	-5.60	AVG	V
7230.000	39.19	10.64	49.83	74.00	-24.17	peak	V
2408.000	93.21	-3.71	89.50	114.00	-24.5	peak	H
2408.000	91.44	-3.71	87.73	94.00	-6.27	AVG	H
2178.000	50.08	-4.55	45.53	74.00	-28.47	peak	H
4815.000	50.18	4.02	54.20	74.00	-19.80	peak	H
4815.000	44.79	4.02	48.81	54.00	-5.19	AVG	H
7215.000	35.91	10.62	46.53	74.00	-27.47	peak	H

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Result (dBuV/m) – limit (dBuV/m).



Operation Mode: TX / CH Mid

Test Date: March 19, 2015

Temperature: 27°C

Tested by: Owen Wu

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2440.000	91.97	-3.49	88.48	114.00	-25.52	peak	V
2440.000	93.34	-3.49	89.85	94.00	-4.15	AVG	V
2062.000	50.02	-4.94	45.08	74.00	-28.92	peak	V
4875.000	49.05	3.92	52.97	74.00	-21.03	peak	V
7325.000	38.81	10.73	49.54	74.00	-24.46	peak	V
2440.000	93.52	-3.49	90.03	114.00	-23.97	peak	H
2440.000	90.65	-3.49	87.16	94.00	-6.84	AVG	H
2256.000	50.13	-4.35	45.78	74.00	-28.22	peak	H
4880.000	47.81	3.91	51.72	74.00	-22.28	peak	H
7315.000	35.95	10.72	46.67	74.00	-27.33	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Result (dBuV/m) – limit (dBuV/m).



Operation Mode: TX / CH High

Test Date: March 19, 2015

Temperature: 27°C

Tested by: Owen Wu

Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2474.000	91.70	-3.33	88.37	114.00	-25.63	peak	V
2474.000	92.57	-3.33	89.24	94.00	-4.76	AVG	V
1980.000	51.55	-4.99	46.56	74.00	-27.44	peak	V
3315.000	44.50	-1.35	43.15	74.00	-30.85	peak	V
4950.000	46.04	3.92	49.96	74.00	-24.04	peak	V
7415.000	36.95	10.82	47.77	74.00	-26.23	peak	V
2474.000	93.28	-3.33	89.95	114.00	-24.05	peak	H
2474.000	91.12	-3.33	87.79	94.00	-6.21	AVG	H
2298.000	50.43	-4.29	46.14	74.00	-27.86	peak	H
4950.000	45.40	3.92	49.32	74.00	-24.68	peak	H
N/A							

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Result (dBuV/m) – limit (dBuV/m).



## 7.4 POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



### TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

#### Test Data

**Operation Mode:** Normal Link

**Test Date:** March 20, 2015

**Temperature:** 22°C

**Tested by:** David Cheng

**Humidity:** 56% RH

Freq. (MHz)	Reading (dBuV)	Corr. factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Note
0.1580	29.82	10.01	39.83	65.56	-25.73	L1
0.1900	29.35	10.02	39.37	64.03	-24.66	L1
0.3820	21.82	10.04	31.86	58.23	-26.37	L1
4.5380	26.16	10.36	36.52	56.00	-19.48	L1
13.6740	30.82	10.70	41.52	60.00	-18.48	L1
17.8940	29.30	10.84	40.14	60.00	-19.86	L1
0.1580	30.72	10.01	40.73	65.56	-24.83	L2
0.1900	28.71	10.02	38.73	64.03	-25.30	L2
0.5980	19.68	10.07	29.75	56.00	-26.25	L2
4.4100	27.20	10.37	37.57	56.00	-18.43	L2
15.0820	28.41	10.77	39.18	60.00	-20.82	L2
18.9780	29.31	10.88	40.19	60.00	-19.81	L2


**Remark:**

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPN between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)
5. "-" means Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



### Test Plots

#### Conducted emissions (Line 1)

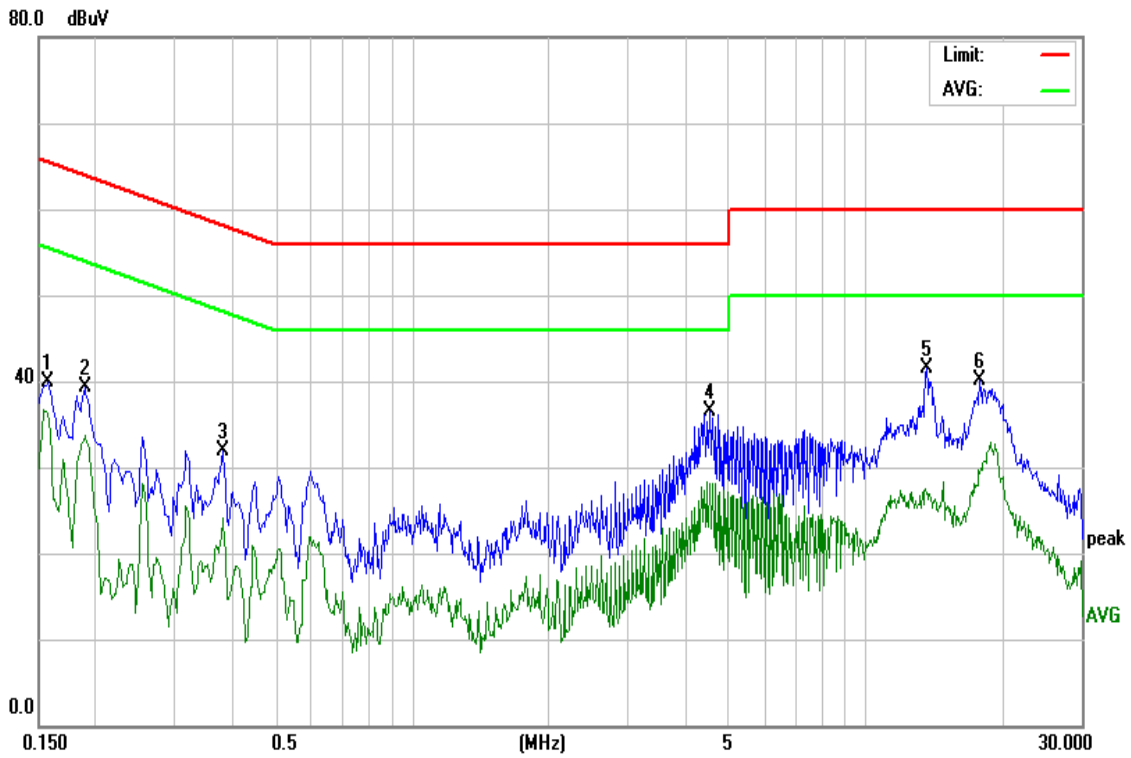

#### Conducted emissions (Line 2)

