



Global Product Certification
EMC-EMF Safety Approvals

Melbourne
176 Harrick Road
Keilor Park, Vic 3042
Tel: +61 3 9365 1000

Sydney
Unit 3/87 Station Road
Seven Hills, NSW 2147
Tel: +61 2 9624 2777

Email: emc-general@emctech.com.au
Web: www.emctech.com.au

RADIO TEST REPORT

REPORT NUMBER: M2001004-1 V2

**TEST STANDARD: FCC PART 15 SUBPART C
SECTION 15.247**

ISED RSS-247 SECTION 5.0

CLIENT: DIGITAL MINING TECHNOLOGY

DEVICE: CAS TOF UNITS

MODEL: PROD0813

FCC ID: YIY-CASTOF

IC: 8903A-CASTOF


DATE OF ISSUE: 25 MAY 2020

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.



Accredited for compliance with ISO/IEC 17025 – Testing. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, medical testing, calibration and inspection reports.

This document shall not be reproduced except in full.

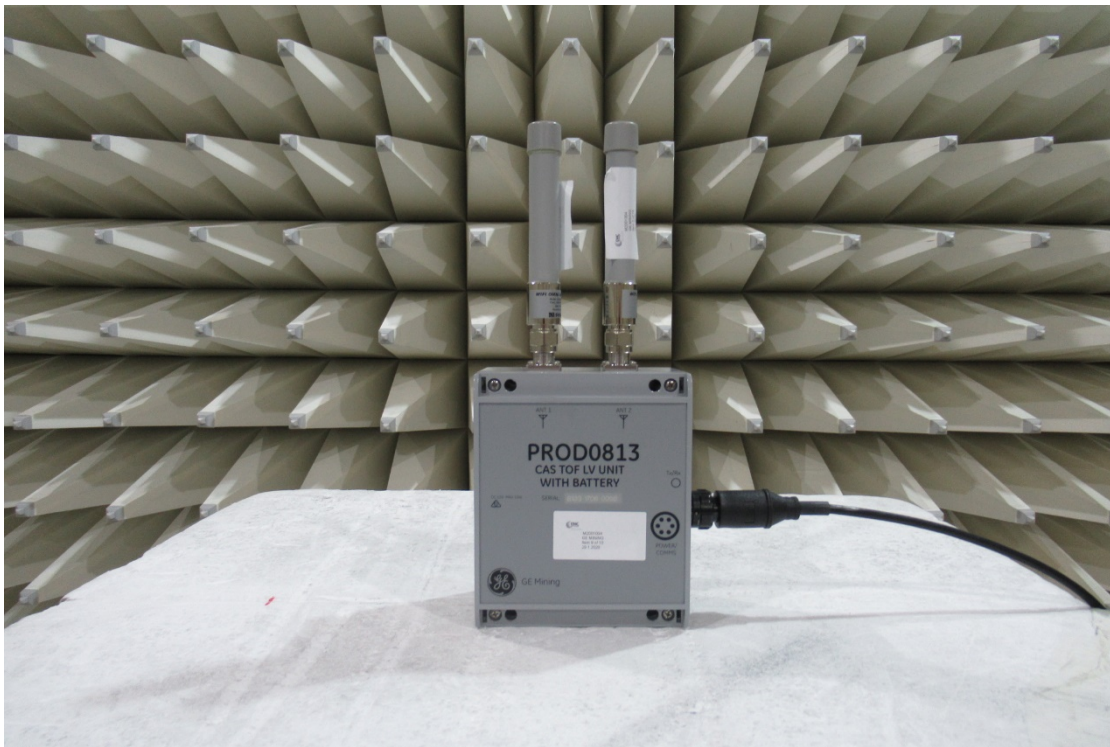

Equipment Under Test (EUT): CAS ToF Units

REVISION TABLE

Version	Sec/Para Changed	Change Made	Date
1		Initial issue of document	21/05/2020
V2		Updates as per TCB request	25/05/2020

CONTENTS

1	Test Summary	6
2	Test Facility	6
2.1	General	6
2.2	Test Laboratory/Accreditations	6
3	Test Equipment Calibration	7
4	Measurement Uncertainty	7
5	Device Details.....	8
5.1	EUT (Transmitter) Details	8
5.2	EUT (Host) Details	8
5.3	Test Configuration	8
5.4	Modifications	8
5.5	Deviations from the Standard	8
6	Results.....	9
6.1	§15.203/ RSS-Gen 6.8 Antenna Requirement	9
6.2	§15.205/ RSS-Gen 8.10 Restricted Bands of Operation	9
6.3	§15.207/ RSS-Gen 8.8 Conducted Limits	9
6.4	§15.209/ RSS-Gen 8.9 Radiated emission limits; general requirements	9
6.5	§15.247(a)(2)/ RSS-247 5.2(a) 6 dB bandwidth	9
6.5.1	Test Procedure	9
6.5.2	Limits.....	9
6.5.3	Results	9
6.6	§15.247(b)(3)/ RSS-247 5.4(d) Peak Output Power	11
6.6.1	Test Procedure	11
6.6.2	Limits.....	11
6.6.3	Results	11
6.7	§15.247(d)/ RSS-247 5.5 Out-of-Band/Spurious Emissions	15
6.7.1	Test procedure.....	15
6.7.2	Evaluation of field strength	15
6.7.3	Limits.....	15
6.7.4	Transmitter Spurious Emissions: 9 kHz to 30 MHz	17
6.7.5	Transmitter Spurious Emissions: 30 - 1000 MHz	18
6.7.6	Transmitter Spurious Emissions: 1 - 18 GHz	20
6.7.7	Transmitter Spurious Emissions: 18 – 26 GHz.....	24
6.8	§15.247(d)/ §RSS-247 5.5 Band Edge Emission Measurements	26
6.9	§15.247(e)/ RSS-247 5.2(b) Power Spectral Density.....	30
6.9.1	Test procedure.....	30
6.9.2	Limits.....	30
6.9.3	Results	30
6.10	§15.247(i)/ §RSS-Gen 3.4/§RSS-102 Maximum Permissible Exposure.....	31
6.11	§15.215/ §RSS-Gen 6.7 Occupied Bandwidth – 99% power	31

6.11.1	Test procedure.....	31
6.11.2	Limits.....	31
6.11.3	Results.....	31

GRAPHS

Graph 6-1: 6 dB bandwidth, 22 MHz Bandwidth	10
Graph 6-2: 6 dB bandwidth, 80 MHz Bandwidth	10
Graph 6-3: Single Pulse, 22 MHz Bandwidth	12
Graph 6-4: Number of Pulses, 22 MHz Bandwidth	12
Graph 6-5: Single Pulse, 80 MHz Bandwidth	13
Graph 6-6: Number of Pulses, 80 MHz Bandwidth	13
Graph 6-7: Max EIRP Power, 22 MHz Bandwidth.....	14
Graph 6-8: Max EIRP Power, 80 MHz Bandwidth.....	14
Graph 6-9: 100 kHz bandwidth reference level, 22 MHz Bandwidth.....	16
Graph 6-10: 100 kHz bandwidth reference level, 80 MHz Bandwidth.....	17
Graph 6-11: Transmitter Spurious Emissions, 9kHz – 30 MHz, 22 MHz Bandwidth	17
Graph 6-12: Transmitter Spurious Emissions, 9kHz – 30 MHz, 80 MHz Bandwidth	18
Graph 6-13: Transmitter Spurious Emissions, 30 – 1000 MHz, 22 MHz Bandwidth	18
Graph 6-14: Transmitter Spurious Emissions, 30 – 1000 MHz, 80 MHz Bandwidth	19
Graph 6-15: Transmitter Spurious Emissions, 1 – 18 GHz, 22 MHz Bandwidth, Peak	20
Graph 6-16: Transmitter Spurious Emissions, 1 – 18 GHz, 80 MHz Bandwidth, Peak	21
Graph 6-17: Transmitter Spurious Emissions, 1 – 18 GHz, 22 MHz Bandwidth, Average	22
Graph 6-18: Transmitter Spurious Emissions, 1 – 18 GHz, 80 MHz Bandwidth, Average	23
Graph 6-19: Transmitter Spurious Emissions, 18 – 26 GHz, 22 MHz Bandwidth, Peak	24
Graph 6-20: Transmitter Spurious Emissions, 18 – 26 GHz, 80 MHz Bandwidth, Peak	24
Graph 6-21: Transmitter Spurious Emissions, 18 – 26 GHz, 22 MHz Bandwidth, Average	25
Graph 6-22: Transmitter Spurious Emissions, 18 – 26 GHz, 80 MHz Bandwidth, Average	25
Graph 6-23: 22 MHz Bandwidth, lower Band edge, Peak.....	26
Graph 6-24: 22 MHz Bandwidth, Upper Band edge, Peak.....	26
Graph 6-25: 22 MHz Nominal Bandwidth, Upper Band edge, Average	27
Graph 6-26: 80 MHz Bandwidth, lower Band edge, Peak.....	28
Graph 6-27: 80 MHz Bandwidth, Upper Band edge, Peak.....	28
Graph 6-28: 80 MHz Bandwidth, Upper Band edge, Average	29
Graph 6-29: Radiated – Power Spectral Density, 22 MHz Bandwidth	30
Graph 6-30: Radiated – Power Spectral Density, 80 MHz Bandwidth	31
Graph 6-31: Occupied bandwidth, 22 MHz Bandwidth	32
Graph 6-32: Occupied bandwidth, 80 MHz Bandwidth	32

TABLES

Table 6-1: 6dB Bandwidth	9
Table 6-2: Duty Cycle	11
Table 6-3: Maximum peak power	11
Table 6-4: 100 kHz reference level measurement	16
Table 6-5: Transmitter Spurious Emissions, 30 – 1000 MHz, 80 MHz Bandwidth	19
Table 6-6: Transmitter Spurious Emissions, 1 – 18 GHz, 22 MHz Bandwidth, Peak	20
Table 6-7: Transmitter Spurious Emissions, 1 – 18 GHz, 80 MHz Bandwidth, Peak	21
Table 6-8: Transmitter Spurious Emissions, 1 – 18 GHz, 22 MHz Bandwidth, Average	22
Table 6-9: Transmitter Spurious Emissions, 1 – 18 GHz, 80 MHz Bandwidth, Average	23
Table 6-10: 22 MHz Nominal Bandwidth, Band edge	27
Table 6-11: 80 MHz Bandwidth, Band edge.....	29
Table 6-12: Power spectral density	30
Table 6-13: Occupied Bandwidth	31

RADIO TEST REPROT

CERTIFICATE OF COMPLIANCE

Device: CAS ToF Units
Model Number: PROD0813
Serial Number: 8133 1706 0056
Equivalent Model Numbers: PROD0810, PROD0811, PROD0812, PROD0814, PROD0815, PROD0821, PROD0822
Manufacturer: DIGITAL MINING TECHNOLOGY

Radio Module: Time of Flight, 2.4 GHz nanoPAN 5375 RF Module
Part Number: MN5375V2
FCC ID: FCC ID: YYY-CASTOF
IC ID: IC: 8903A-CASTOF

Tested for: DIGITAL MINING TECHNOLOGY
Address: 3 CO-WYN CLOSE, FOUNTAINDALE NSW 2258, AUSTRALIA
Phone Number: +61 2 4336 1800
Contact: P C SHIVALINGAM
Email: Pc.Shivalingam@wabtec.com



Standard: FCC Part 15, Subpart C, Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

ISED RSS-247, Issue 2, Section 5 Standard specifications for frequency hopping systems and digital transmission systems operating in the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz


Result: The CAS ToF Units complied with the applicable requirements above standards.
Refer to Report M2001004-1 V2 for full details.

Test Date(s): 5, 6, 7 and 10 February, 2020

Issue Date: 25 May 2020

Test Engineer(s): 
Wilson Xiao 
Shaun Reid

Attestation: *I hereby certify that the device(s) described herein were tested as described in this report and that the data included is that which was obtained during such testing.*

Authorised Signatory: 
Shabbir Ahmed
Lead RF and Wireless Engineer

Issued by: EMC Technologies Pty. Ltd.,
176 Harrick Road, Keilor Park, VIC, 3042, Australia.

Phone: +61 3 9365 1000

E-mail: emc-general@emctech.com.au

Web: www.emctech.com.au



Accreditation No.5292

This document shall not be reproduced except in full.

RADIO REPORT FOR CERTIFICATION

1 TEST SUMMARY

Section	Description	FCC	ISED	Result(s)
6.1	Antenna Requirement	§15.203	§RSS-Gen 6.8	Complied
6.2	Restricted Bands of Operation	§15.205	§RSS-Gen 8.10	Complied
6.3	Conducted Limits	§15.207	§RSS-Gen 8.8	Not Applicable
6.4	Radiated emission limits; general requirements	§15.209	§RSS-Gen 8.9	Complied
6.5	6 dB Bandwidth	§15.247(a)(2)	§RSS-247 5.2(a)	Complied
6.6	Peak Output Power	§15.247(b)(3)	§RSS-247 5.4(d)	Complied
6.7	Out-of-Band/Spurious Emissions	§15.247(d)	§RSS-247 5.5	Complied
6.8	Band-Edge Emission Measurements	§15.247(d)	§RSS-247 5.5	Complied
6.9	Power spectral density	§15.247(e)	§RSS-247 5.2(b)	
6.10	Maximum Permissible Exposure	§15.247(i)	§RSS-Gen 3.4/§RSS-102	Complied
6.11	Occupied Bandwidth – 99% power	§15.215	§RSS-Gen 6.7	Complied

2 TEST FACILITY

2.1 General

EMC Technologies Pty Ltd is accredited by the FCC as a test laboratory able to perform compliance testing for the public. EMC Technologies Pty Ltd has also been designated as a Conformity Assessment Body (CAB) by Australian Communications and Media Authority (ACMA) under the APECTEL MRA and is designated to perform compliance testing on equipment subject to Declaration of Conformity (DoC) and Certification under Parts 15 and 18 of the FCC Commission's rules – **Registration Number 494713 & Designation number AU0001.**

EMC Technologies Pty Ltd is also an ISED Canada recognized testing laboratory – **ISED company number: 3569B and CAB identifier number: AU0001.**

2.2 Test Laboratory/Accreditations

NATA is the Australian National laboratory accreditation body and has accredited EMC Technologies to operate to the IEC/ISO17025 requirements. A major requirement for accreditation is the assessment of the company and its personnel as being technically competent in testing to the standards. This requires fully documented test procedures, continued calibration of all equipment to the National Standard at the National Measurements Institute (NMI) and an internal quality system similar to ISO 9002. NATA has mutual recognition agreements with the National Voluntary Laboratory Accreditation Program (NVLAP) and the American Association for Laboratory Accreditation (A²LA).

All testing in this report has been conducted in accordance with EMC Technologies' scope of NATA accreditation to ISO 17025 for both testing and calibration and ISO 17020 for Inspection – **Accreditation Number 5292.**

The current full scope of accreditation can be found on the NATA website: www.nata.com.au

3 TEST EQUIPMENT CALIBRATION

Measurement instrumentation and transducers were calibrated in accordance with the applicable standards by an independent NATA registered laboratory such as Keysight Technologies (Australia) Pty Ltd or the National Measurement Institute (NMI) or in-house. All equipment calibration is traceable to Australian national standards at the National Measurements Institute.

Equipment Type	Make/Model/Serial Number	Last Cal. dd/mm/yyyy	Due Date dd/mm/yyyy	Cal. Interval
Chamber	Frankonia SAC-3-2 (R-144)	17/07/2017	17/07/2020	3 Year* ¹
EMI Receiver	R&S ESW26 Sn: 101306 (R-143)	31/05/2019	31/05/2020	1 Year* ²
Antennas	EMCO 6502 Active Loop Antenna Sn: 9311-2801 (A-231)	16/11/2018	16/11/2020	2 Year* ²
	SUNOL JB1 Sn. A061917 (A-425)	09/04/2019	09/04/2021	2 Year* ²
	EMCO 3115 Horn Antenna Sn: 9501-4398 (A-406)	16/01/2019	16/01/2022	3 Year* ¹
	ETS-Lindgren 3160-09 Horn Antenna Sn. 66032 (A-307)	12/06/2018	12/06/2021	3 Year* ²
Cables* ³	Huber & Suhner Sucoflex 104A Sn: 503055 (C-457)	03/01/2020	03/01/2021	1 Year* ¹
	Huber & Suhner Sucoflex 104A Sn: 507100 (C-478)	03/01/2020	03/01/2021	1 Year* ¹
	Huber & Suhner Sucoflex 104A Sn: 503061 (C-463)	03/01/2020	03/01/2021	1 Year* ¹

Note *1. Internal NATA calibration.

Note *2. External NATA / A2LA calibration.

Note *3. Cables are verified before measurements are taken.

4 MEASUREMENT UNCERTAINTY

EMC Technologies has evaluated the equipment and the methods used to perform the emissions testing. The estimated measurement uncertainties for emissions tests shown within this report are as follows:

Radiated Emissions:	9 kHz to 30 MHz	±4.1 dB
	30 MHz to 300 MHz	±5.1 dB
	300 MHz to 1000 MHz	±4.7 dB
	1 GHz to 18 GHz	±4.6 dB
	18 GHz to 40 GHz	±4.6 dB
Peak Output Power:		±1.5 dB

The above expanded uncertainties are based on standard uncertainties multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Application of measurement uncertainty for this report:

The referenced uncertainty standard specifies that determination of compliance shall be based on measurements without taking into account measurement instrumentation uncertainty. However, the measurement uncertainty shall appear in the test report.

5 Device Details

(Information supplied by the Client)

CAS ToF units are robust 2.4 GHz IEEE 802.15.4a Radio Transceiver containing two 2.4GHz Time of Flight antenna fittings, RS-232/485 communications and an optional internal battery for enhanced radio coverage and accuracy. Intended for installation on mobile plant equipment (Mining industry vehicles) and stationary objects to provide situational awareness functionality between the installed equipment and other CAS enabled fleet and infrastructure.

5.1 EUT (Transmitter) Details

Radio:	Time of Flight, 2.4 GHz nanoPAN 5375 RF Module
Manufacturer:	Nanotron Technologies GmbH
Frequency band:	2400 - 2483.5 MHz
Number of Channels:	1
Operating Frequency:	2437 or 2442 MHz
Nominal Bandwidth:	22 or 80 MHz (<i>declared by client</i>)
Modulation:	CSS
Antenna:	SYSKIM WIFI OMNI ANTENNA Model: OYH02Ø20-NM
Antenna Peak Gain:	3 dBi (max)
No of Antenna used:	2

5.2 EUT (Host) Details

Test Sample:	CAS ToF Units
Model Number:	PROD0813, LV BATTERY UNIT
Variant Model:	PROD0810, CAS TOF HV UNIT PROD0811, CAS TOF LV UNIT PROD0812, CAS TOF MV VISITOR UNIT PROD0814, CAS TOF TEST UNIT PROD0815, CAS TOF STATIONARY OBJECT UNIT PROD0821, CAS TOF HV SINGLE UNIT PROD0822, CAS TOF LV VISITOR UNIT
Serial Number:	8133 1706 0056
Supply Rating:	12V DC
Manufacturer:	Digital Mining Technology

5.3 Test Configuration

Testing was performed with the EUT set to transmit continuously at 22 MHz and 80 MHz nominal bandwidth.

TOF parameter "Power dBm: 10" was set via CASBUS MANAGER V5.2.0.0.

5.4 Modifications

No modifications were required to achieve compliance.

5.5 Deviations from the Standard

Note any deviations to the standard

6 RESULTS

6.1 §15.203/ RSS-Gen 6.8 Antenna Requirement

CAS ToF Units with 2.4 GHz nanoPAN 5375 RF Module has two female type N connectors and incorporates the following external antenna only:

Antenna Type: SYSKIM WIFI OMNI ANTENNA
 Antenna gain: 3.0 dBi
 Connector: male type N connector

The above antenna will be installed by professional installers who have been trained by DIGITAL MINING TECHNOLOGY. Such installation shall be accomplished using only antennas and installation materials provided by DIGITAL MINING TECHNOLOGY. Said installation will preclude any unauthorized switching of antennas.

6.2 §15.205/ RSS-Gen 8.10 Restricted Bands of Operation

The provisions of the §15.205/ RSS-Gen 8.10 restricted bands of operation and §15.209 radiated emissions limits have been met, refer to section 6.7

6.3 §15.207/ RSS-Gen 8.8 Conducted Limits

The device is battery DC powered and does not connect directly or indirectly to the AC mains network. Test was not applicable.

6.4 §15.209/ RSS-Gen 8.9 Radiated emission limits; general requirements

The provisions of the §15.205/ RSS-Gen 8.10/ RSS-247 3.3 restricted bands of operation and §15.209/ RSS-Gen 8.9 radiated emissions limits have been met, refer to section 6.7

6.5 §15.247(a)(2)/ RSS-247 5.2(a) 6 dB bandwidth

6.5.1 Test Procedure

The tests were performed in accordance with ANSI C63.10: 2013 Clause 11.8 DTS bandwidth.

The 6 dB bandwidth was measured while the device was transmitting with typical modulation applied. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilised when measuring the bandwidth.


6.5.2 Limits

In the band 2400-2483.5MHz, the minimum 6 dB bandwidth is to be at least 500 kHz.

6.5.3 Results


Table 6-1: 6dB Bandwidth

Freq. [MHz]	Nominal Bandwidth	6 dB Bandwidth [kHz]	Limit [kHz]
2437	22 MHz	16168	>= 500
2442	80 MHz	54590	>= 500

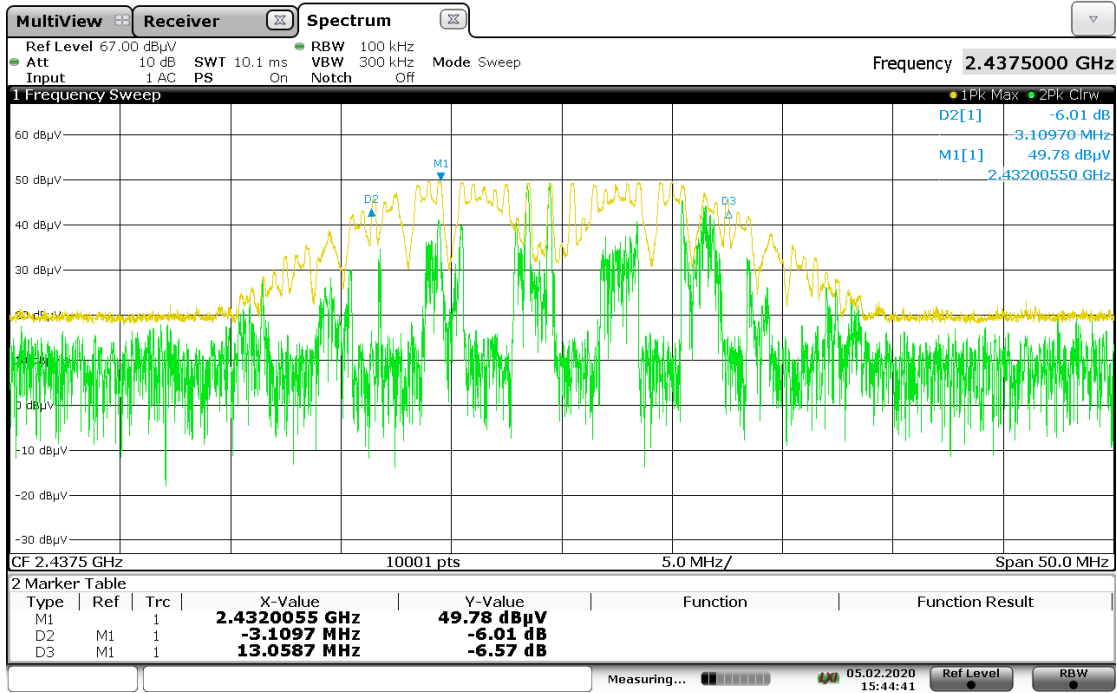

15:44:41 05.02.2020

Graph 6-1: 6 dB bandwidth, 22 MHz Bandwidth

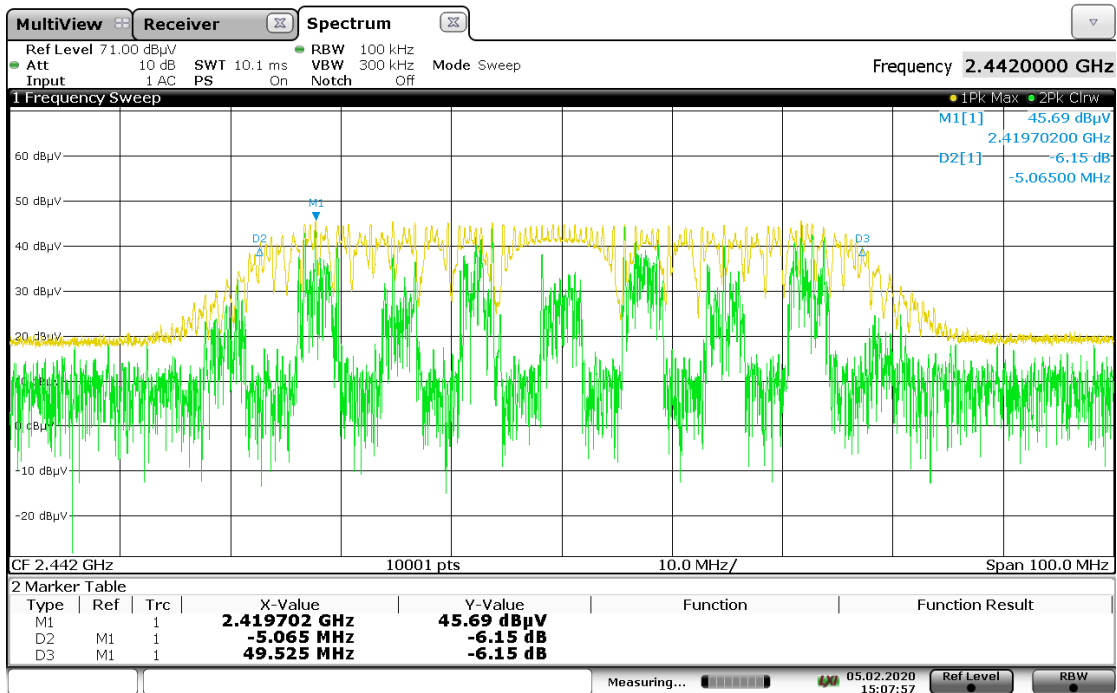

15:07:58 05.02.2020

Graph 6-2: 6 dB bandwidth, 80 MHz Bandwidth

6.6 §15.247(b)(3)/ RSS-247 5.4(d) Peak Output Power

6.6.1 Test Procedure

The field strength of the fundamental transmitted frequency was measured inside a semi-anechoic chamber compliant with ANSI C63.4: 2014 in accordance to ANSI C63.10: 2013 clause 11.9.2.2.4.

The EUT was positioned on a test turn-table and rotated through 360° to determine the highest emissions. The measurement antenna was also varied between 1 and 4 metres height. Different orientations of the EUT (x, y and z-axis) and measurement antenna polarisations (vertical and horizontal) were investigated to produce the highest emission EIRP.

All measurements were made at a distance of 3 metres.

6.6.2 Limits

The maximum peak conducted output power at 2400-2483.5 MHz is 1 Watts or 30 dBm.

6.6.3 Results

Table 6-2: Duty Cycle


Freq. [MHz]	Nominal Bandwidth	Single Pulse Time [ms]	Number of Pulses in 100 ms	Duty Cycle (D)	Correction Factor*
2437	22 MHz	0.374	124	46.38%	3.34
2442	80 MHz	0.374	134	50.12%	3.00

Note: Correction factor = $10 * \log(1/D)$

Table 6-3: Maximum peak power


Freq. [MHz]	Nominal Bandwidth	E-Field@ 3 m		Corr. Factor	EIRP (dBm)	Antenna Gain (dBi)	Equivalent Conducted Output Power (dBm) (W)		Limit (dBm)	Results
		dBuV/m	dBm							
2437	22 MHz	95.22	-0.01	3.34	3.33	3	0.33	0.0011	30	Complied
2442	80 MHz	96.24	1.01	3.00	4.01	3	1.01	0.0013	30	Complied

The measured radiated field strength is converted to equivalent conducted output power for checking compliance (KDB 558074 D01 Section 3).

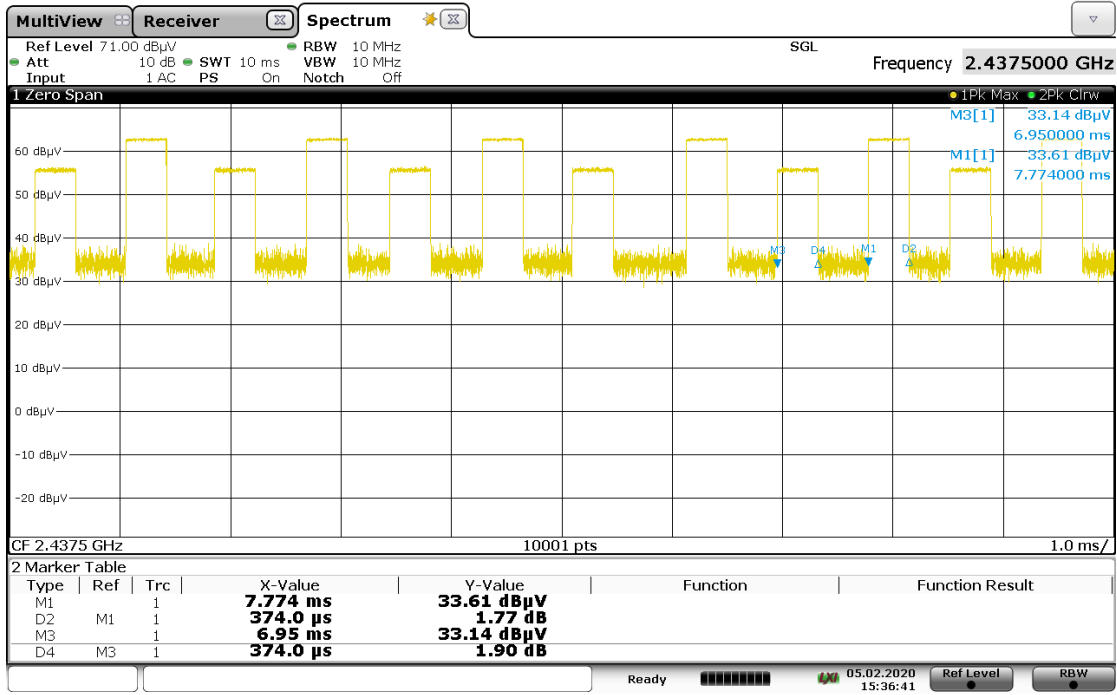


15:36:41 05.02.2020

Graph 6-3: Single Pulse, 22 MHz Bandwidth

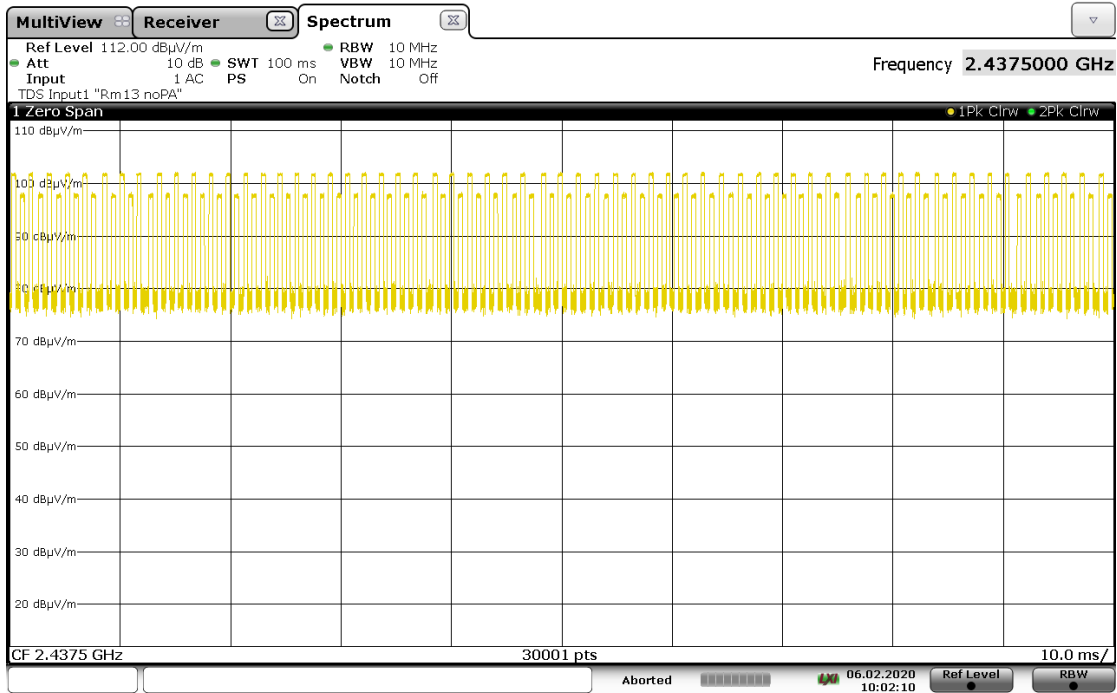


10:02:10 06.02.2020

Graph 6-4: Number of Pulses, 22 MHz Bandwidth

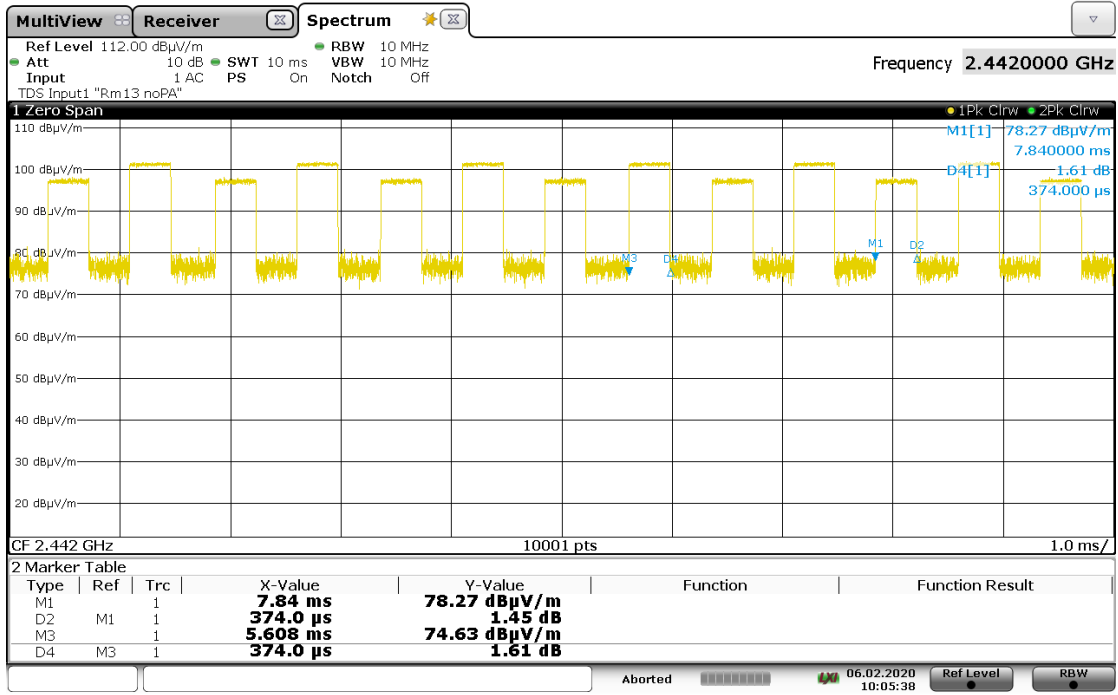


10:05:39 06.02.2020

Graph 6-5: Single Pulse, 80 MHz Bandwidth

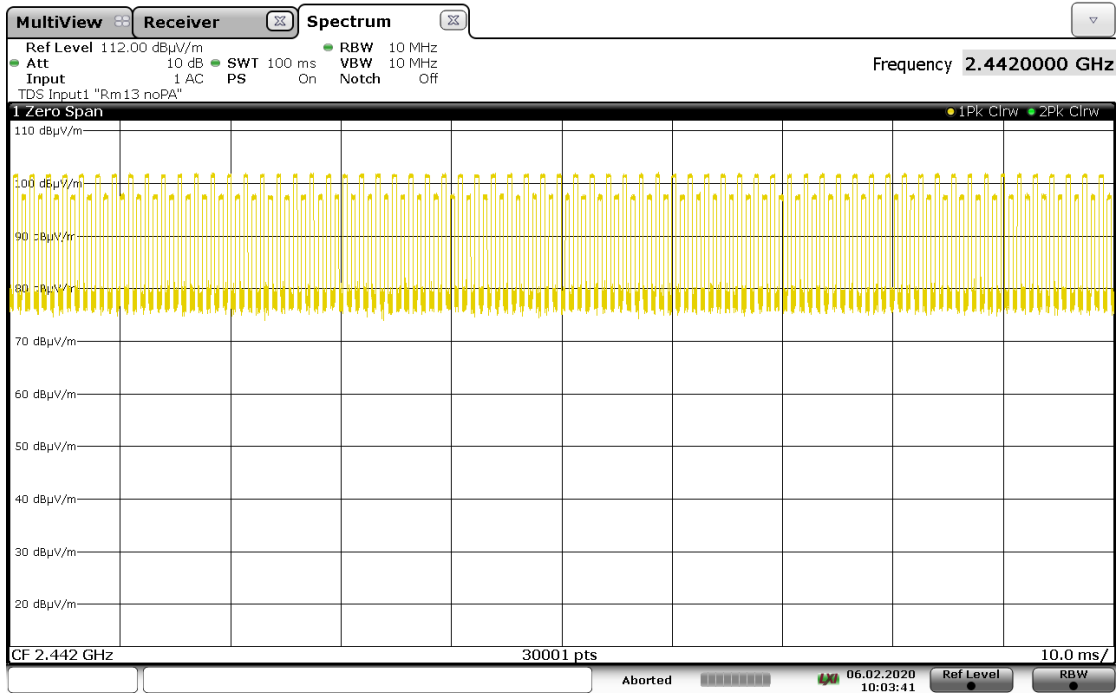

10:03:41 06.02.2020

Graph 6-6: Number of Pulses, 80 MHz Bandwidth

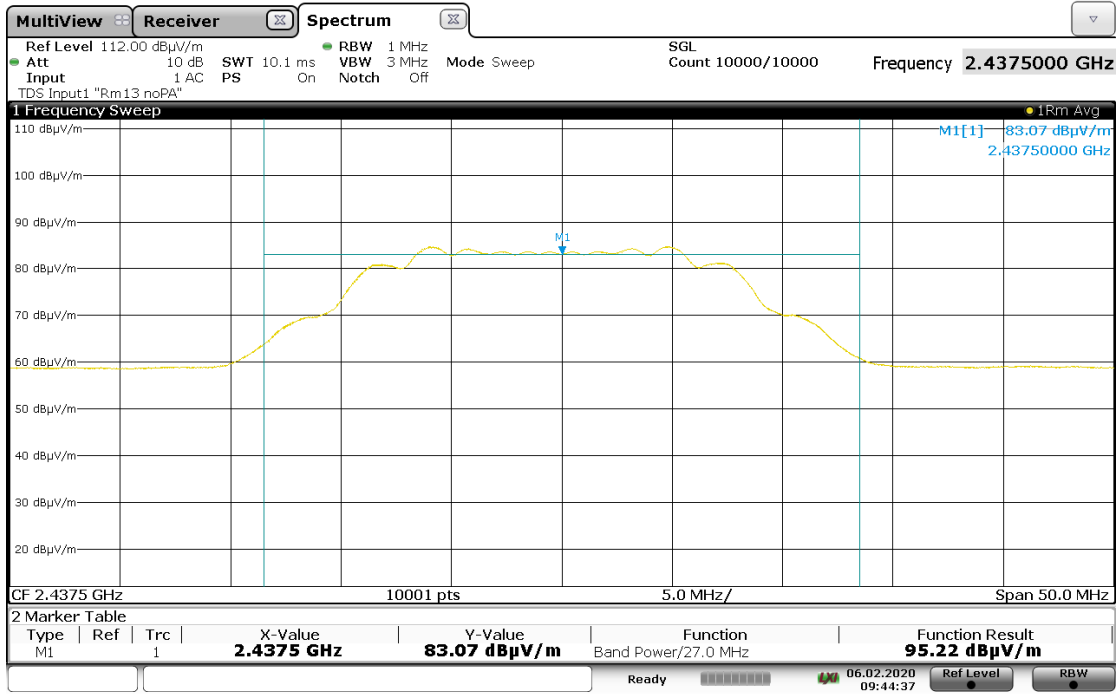

09:44:38 06.02.2020

Graph 6-7: Max EIRP Power, 22 MHz Bandwidth



09:48:48 06.02.2020

Graph 6-8: Max EIRP Power, 80 MHz Bandwidth

6.7 §15.247(d)/ RSS-247 5.5 Out-of-Band/Spurious Emissions

6.7.1 Test procedure

Radiated out-of-band/spurious emissions measurements were performed in a semi-anechoic chamber compliant with ANSI C63.4: 2014. For emissions in non-restricted frequency bands ANSI C63.10-2013 clause 11.11.3 was applied.

The test frequency range was sub-divided into smaller bands with the defined resolution bandwidths to permit reliable display and identification of emissions.

Frequency range [MHz]	Measurement Bandwidth [kHz]	Measurement Distance [m]	Antenna
0.009 to 0.150	0.2	3	0.6 metre loop antenna
0.150 to 30	9	3	
30 to 1000	120	3	Biconilog hybrid
1000 to 18 000	1000	3	Standard gain or broadband horn
18 000 to 40 000	1000	1	

EUT was set at a height of 0.8 m for measurements below 1000 MHz and set at a height of 1.5 m for measurements above 1000 MHz.

The sample was slowly rotated with the spectrum analyser set to Max-Hold. This was performed for at least two antenna heights. When an emission was located, it was positively identified and its maximum level found by rotating the automated turntable and by varying the antenna height. For below 1000 MHz the emissions were measured with a Quasi-Peak detector, and for above 1000 MHz the emissions were measured with Peak and Average detectors.

EUT was investigated on all three axes (x, y, and z) with the loop antenna. Measurements on the worst axis are presented below.

The measurement data for each frequency range was corrected for cable losses, antenna factors and preamplifier gain. This process was performed for both horizontal and vertical polarisations of the measurement antenna.

6.7.2 Evaluation of field strength

Field strengths were calculated automatically by the software using pre-stored calibration data. The method of calculation is shown below:

$$E = V + AF - G + L$$

Where: E = Radiated Field Strength in dB μ V/m.

V = EMI Receiver Voltage in dB μ V/m.

AF = Antenna Factor in dB (stored as a data array).

G = Preamplifier Gain in dB (stored as a data array).

L = Cable loss in dB (stored as a data array of Insertion Loss versus frequency).

6.7.3 Limits

The limit applied is in accordance with the out-of-band/spurious emissions limit defined in §15.247(d)/ RSS-247 5.5.


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

The in-band peak PSD in 100 kHz bandwidth were measured on all channels according to ANSI C63.10-2013 clause 11.11.2. The maximum PSD level was used to establish the limit for


nonrestricted frequency bands. However, the general limits of §15.209 apply for the restricted bands of operation defined in §15.205.

Table 6-4: 100 kHz reference level measurement

Freq. (MHz)	Nominal Bandwidth	Peak at 3 m (dBµV/m)	Established Limit at 3m (dBµV/m)
2437	22 MHz	88.61	68.61
2442	80 MHz	84.80	-

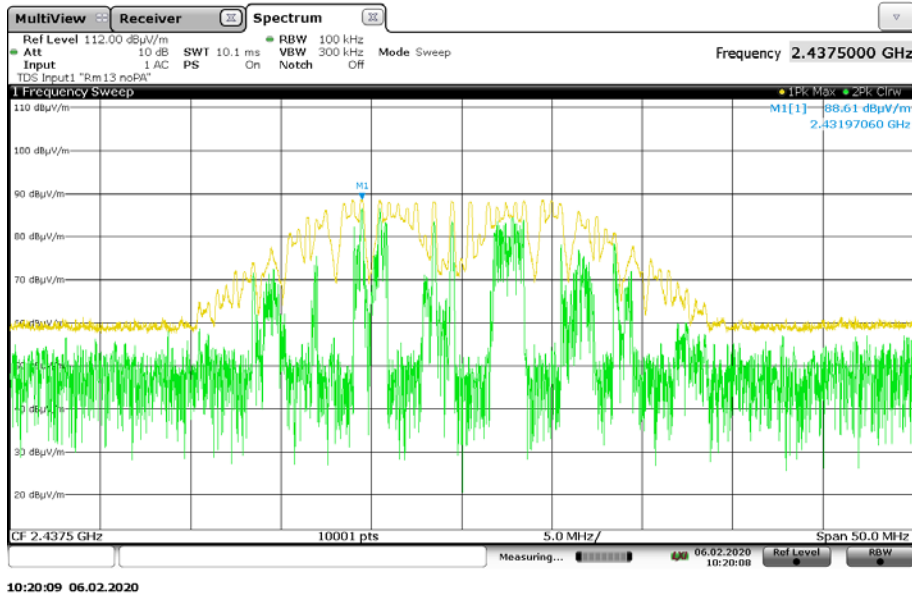


Graph 6-9: 100 kHz bandwidth reference level, 22 MHz Bandwidth

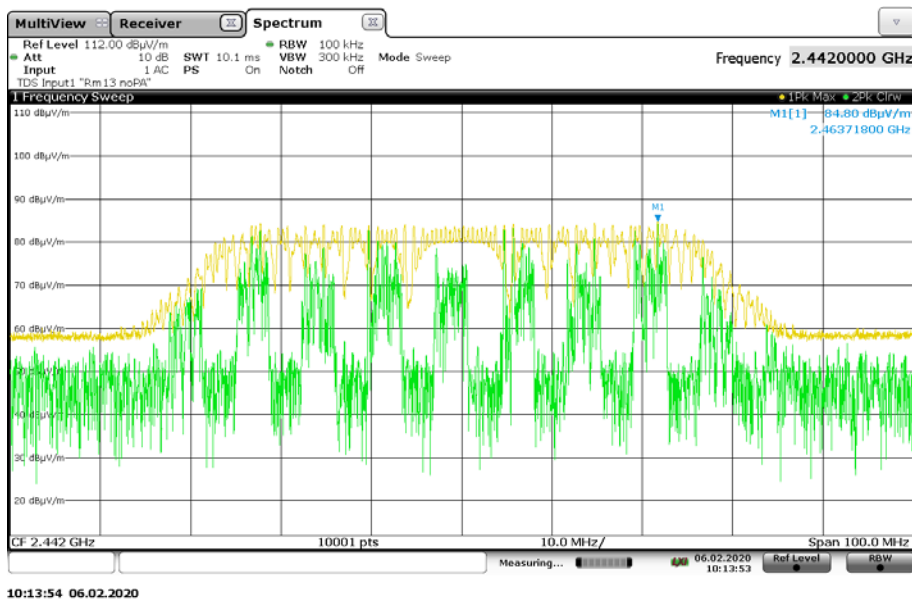

Graph 6-10: 100 kHz bandwidth reference level, 80 MHz Bandwidth


6.7.4 Transmitter Spurious Emissions: 9 kHz to 30 MHz

All emissions measured in the frequency band 9kHz - 30MHz complied with the requirements of the standard.

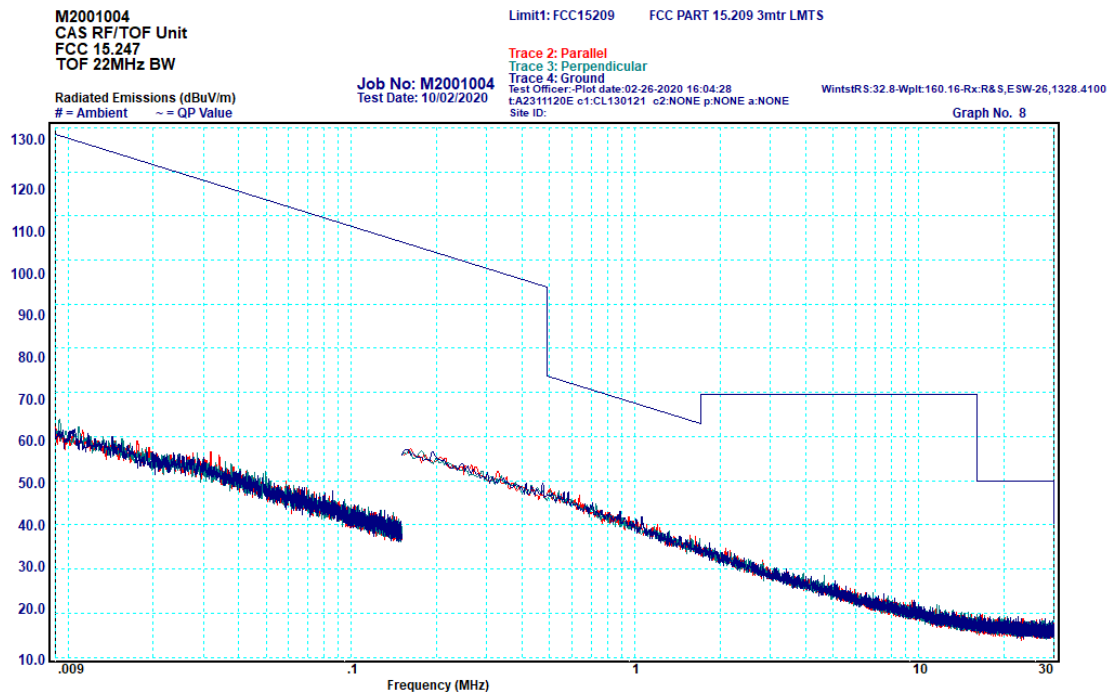

Graph 6-11: Transmitter Spurious Emissions, 9kHz – 30 MHz, 22 MHz Bandwidth

No peaks were measured within 10 dB of the limit.

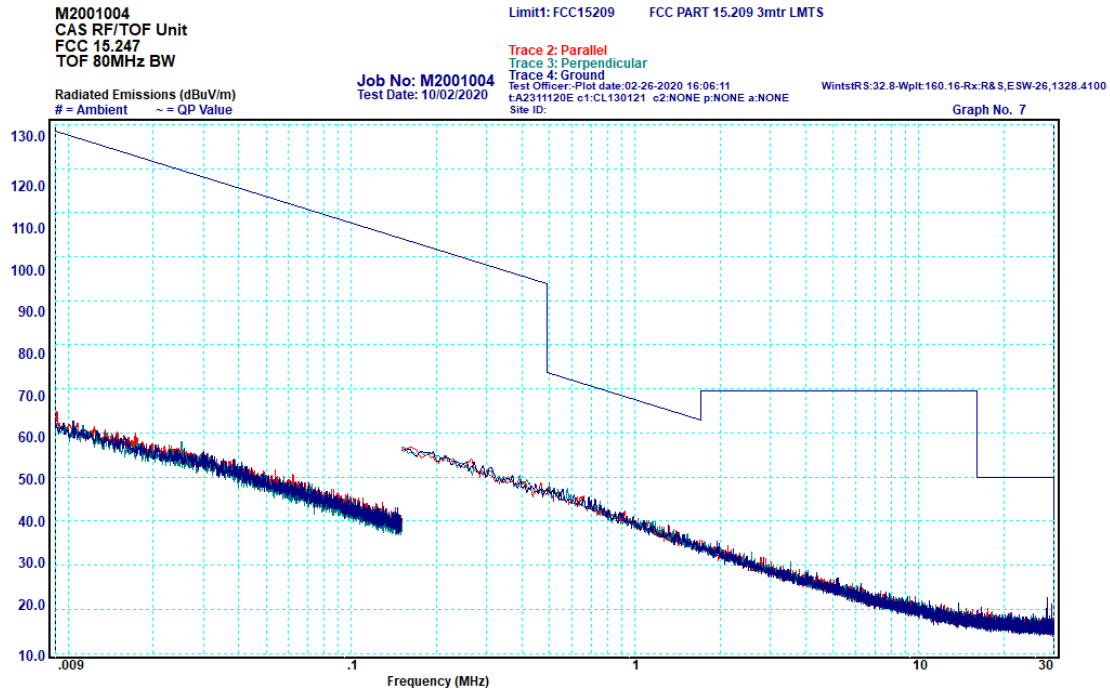


Graph 6-12: Transmitter Spurious Emissions, 9kHz – 30 MHz, 80 MHz Bandwidth

No peaks were measured within 10 dB of the limit.


6.7.5 Transmitter Spurious Emissions: 30 - 1000 MHz

All emissions measured in the frequency band 30 – 1000 MHz complied with the requirements of the standard.

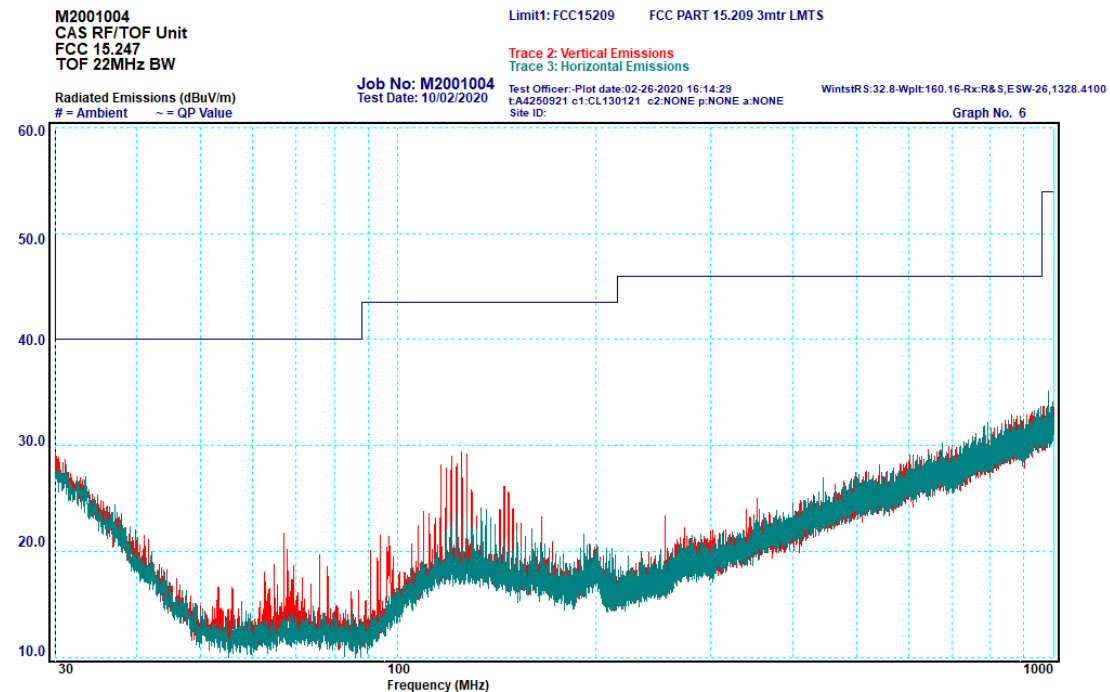

Graph 6-13: Transmitter Spurious Emissions, 30 – 1000 MHz, 22 MHz Bandwidth

No peaks were measured within 10 dB of the limit.

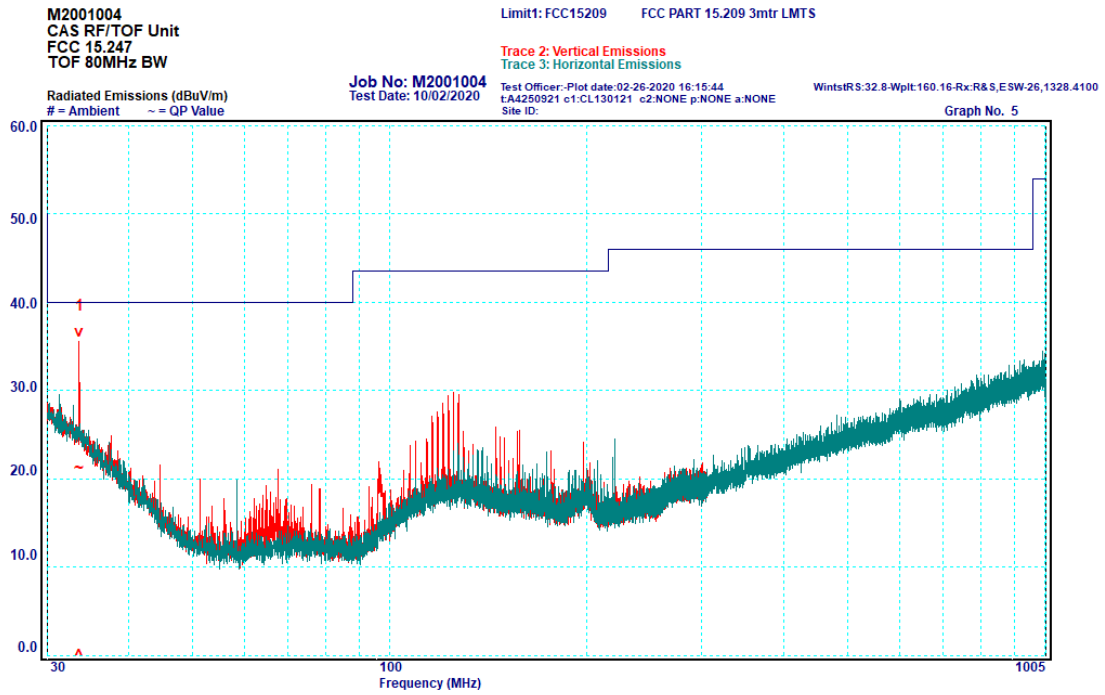

Graph 6-14: Transmitter Spurious Emissions, 30 – 1000 MHz, 80 MHz Bandwidth


Table 6-5: Transmitter Spurious Emissions, 30 – 1000 MHz, 80 MHz Bandwidth

Peak	Frequency [MHz]	Polarisation	Quasi Peak		
			Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
1	33.64	Vertical	21.1	40.0	-18.8

6.7.6 Transmitter Spurious Emissions: 1 - 18 GHz

All emissions measured in the frequency band 1 – 18 GHz complied with the requirements of the standard.

Peak Measurement:

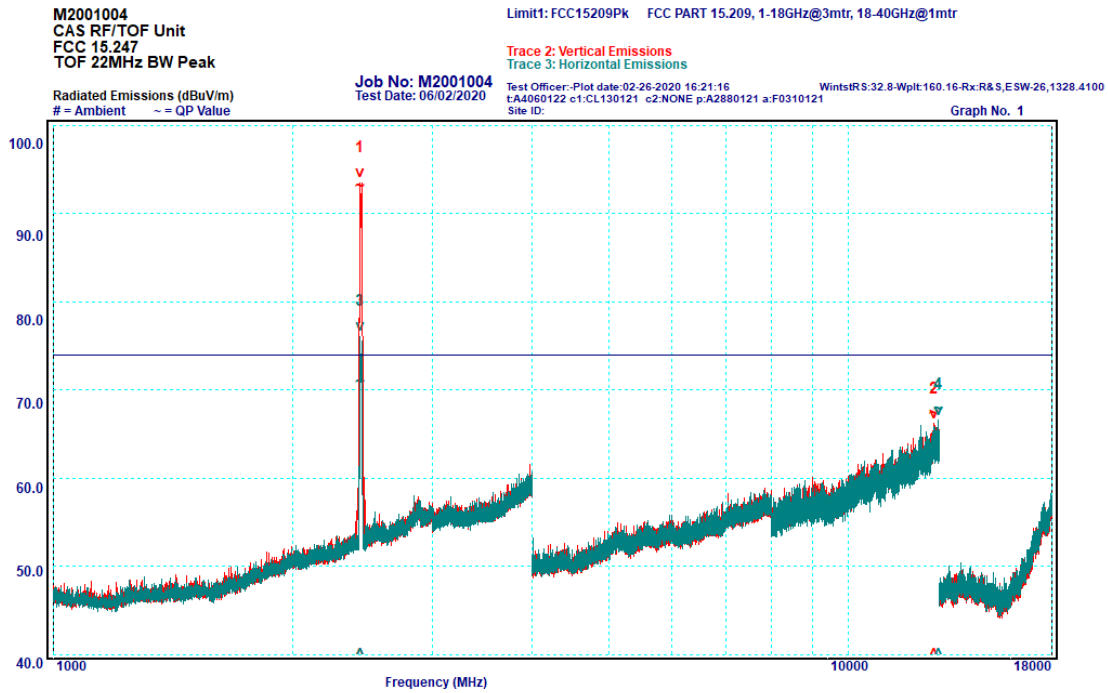

Graph 6-15: Transmitter Spurious Emissions, 1 – 18 GHz, 22 MHz Bandwidth, Peak

Table 6-6: Transmitter Spurious Emissions, 1 – 18 GHz, 22 MHz Bandwidth, Peak

Peak	Frequency [MHz]	Polarisation	Peak		
			Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
1*	2431.46	Vertical	N/A	N/A	N/A
2	12808.22	Vertical	67.3	74	-6.7
3*	2431.46	Horizontal	N/A	N/A	N/A
4	12955.63	Horizontal	67.8	74	-6.2

*Peaks 1 and 3 are the fundamental transmissions and are not subject to the spurious emissions limit of the standard

M2001004
CAS RF/TOF Unit
FCC 15.247
TOF 80MHz BW Peak


Limit1: FCC15209Pk FCC PART 15.209, 1-18GHz@3mtr, 18-40GHz@1mtr

Trace 2: Vertical Emissions
Trace 3: Horizontal Emissions

Job No: M2001004
Test Date: 07/02/2020

Test Officer: Plot date: 02-26-2020 16:32:27 WinstRS:32.8-Wplt:160.16-Rx:R&S,ESW-26,1328.4100
LA4060122 c1:CL130121 c2:NONE p:A2880121 a:F0310121
Site ID: Graph No. 3

Radiated Emissions (dBuV/m)
= Ambient ~ = QP Value

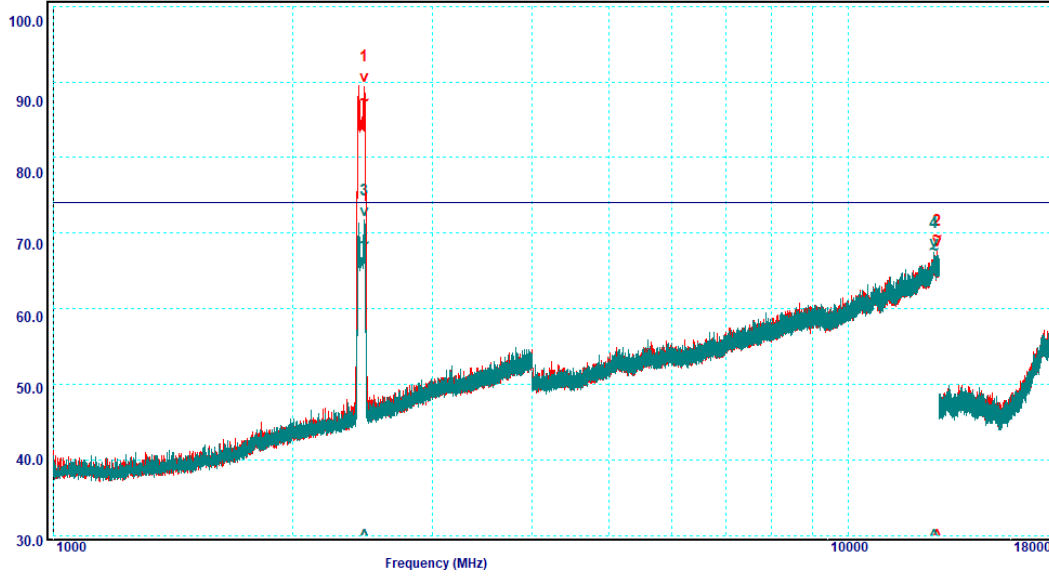

Graph 6-16: Transmitter Spurious Emissions, 1 – 18 GHz, 80 MHz Bandwidth, Peak

Table 6-7: Transmitter Spurious Emissions, 1 – 18 GHz, 80 MHz Bandwidth, Peak

Peak	Frequency [MHz]	Polarisation	Peak		
			Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
1*	2463.79	Vertical	N/A	N/A	N/A
2	12922.23	Vertical	69.4	74	-4.6
3*	2463.87	Horizontal	N/A	N/A	N/A
4	12806.56	Horizontal	67.7	74	-6.3

*Peaks 1 and 3 are the fundamental transmissions and are not subject to the spurious emissions limit of the standard

Average Measurement:

M2001004
CAS RF/TOF Unit
FCC 15.247
TOF 22MHz BW Average

Limit1: FCC15205A FCC PART 15.205, 1-18GHz@3mtr, 18-40GHz@1mtr


Job No: M2001004
Test Date: 06/02/2020

Trace 2: Vertical Emissions
Trace 3: Horizontal Emissions

Test Officer: Plot date: 02-26-2020 16:57:20
LA4060122 c1:CL130121 c2:NONE p:A2880121 a:F0310121
WintRS:32.8-Wpit:160.16-Rx:R&S,ESW-26,1328.4100

Radiated Emissions (dBuV/m)
= Ambient ~ = QP Value

Graph No. 2

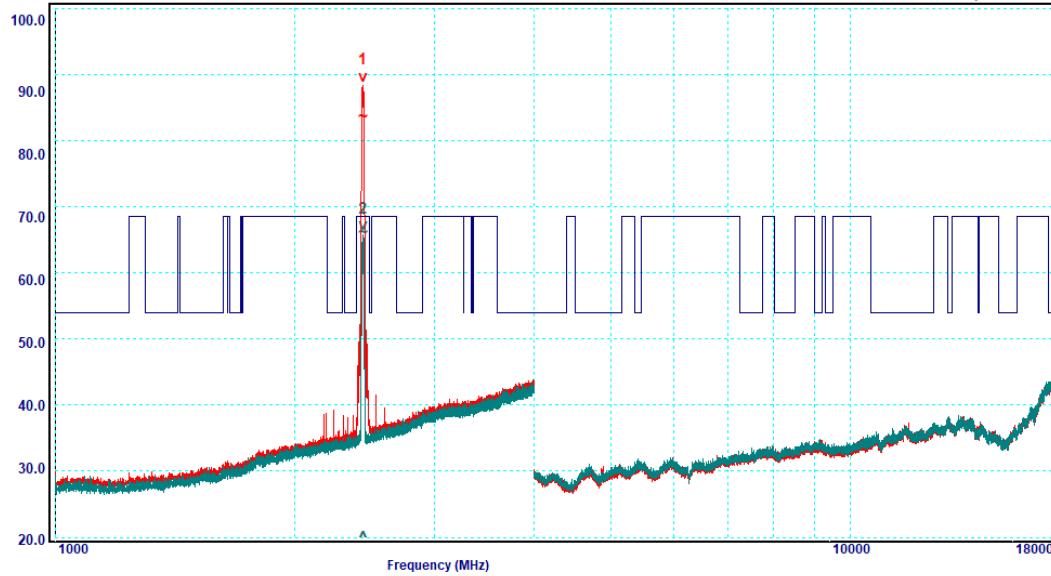

Graph 6-17: Transmitter Spurious Emissions, 1 – 18 GHz, 22 MHz Bandwidth, Average

Table 6-8: Transmitter Spurious Emissions, 1 – 18 GHz, 22 MHz Bandwidth, Average

Peak	Frequency [MHz]	Polarisation	Peak		
			Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
1*	2437.85	Vertical	N/A	N/A	N/A
2*	2437.95	Horizontal	N/A	N/A	N/A

*Peaks 1 and 2 are the fundamental transmissions and are not subject to the spurious emissions limit of the standard

M2001004
 CAS RF/TOF Unit
 FCC 15.247
 TOF 80MHz BW Average


Limit1: FCC15205A FCC PART 15.205, 1-18GHz@3mtr, 18-40GHz@1mtr

Trace 2: Vertical Emissions
 Trace 3: Horizontal Emissions

Job No: M2001004
 Test Date: 07/02/2020

Test Officer: Plot date: 02-26-2020 16:58:59 WinstRS:32.8-Wplt:160.16-Rx:R&S,ESW-26,1328.4100
 LA4060122 c1:CL130121 c2:NONE p:A2880121 a:F0310121
 Site ID: Graph No. 4

Radiated Emissions (dBuV/m)
 # = Ambient ~ = QP Value

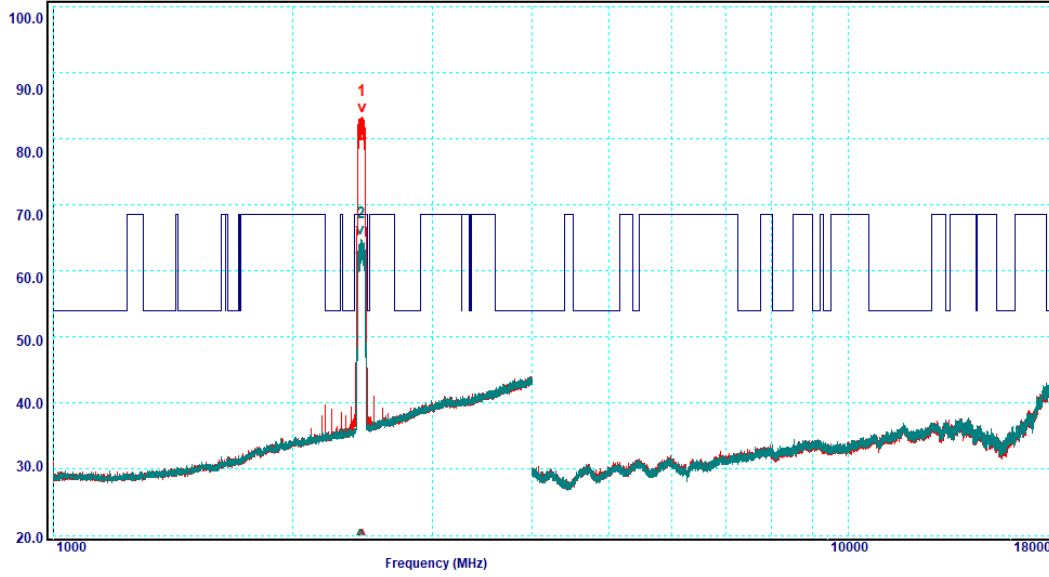

Graph 6-18: Transmitter Spurious Emissions, 1 – 18 GHz, 80 MHz Bandwidth, Average

Table 6-9: Transmitter Spurious Emissions, 1 – 18 GHz, 80 MHz Bandwidth, Average


Peak	Frequency [MHz]	Polarisation	Peak		
			Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]
1*	2442	Vertical	N/A	N/A	N/A
2*	2442	Horizontal	N/A	N/A	N/A

*Peaks 1 and 2 are the fundamental transmissions and are not subject to the spurious emissions limit of the standard

6.7.7 Transmitter Spurious Emissions: 18 – 26 GHz


All emissions measured in the frequency band 18 – 26 GHz complied with the requirements of the standard.

Peak Measurement:

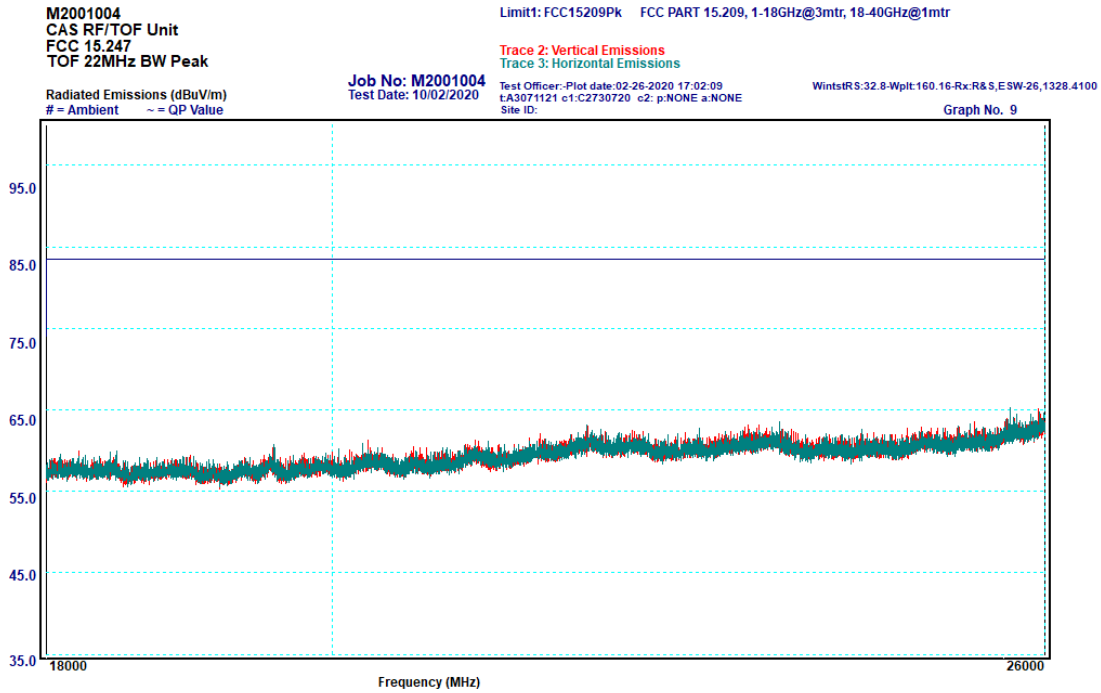

Graph 6-19: Transmitter Spurious Emissions, 18 – 26 GHz, 22 MHz Bandwidth, Peak

No peaks were measured within 10 dB of the limit.

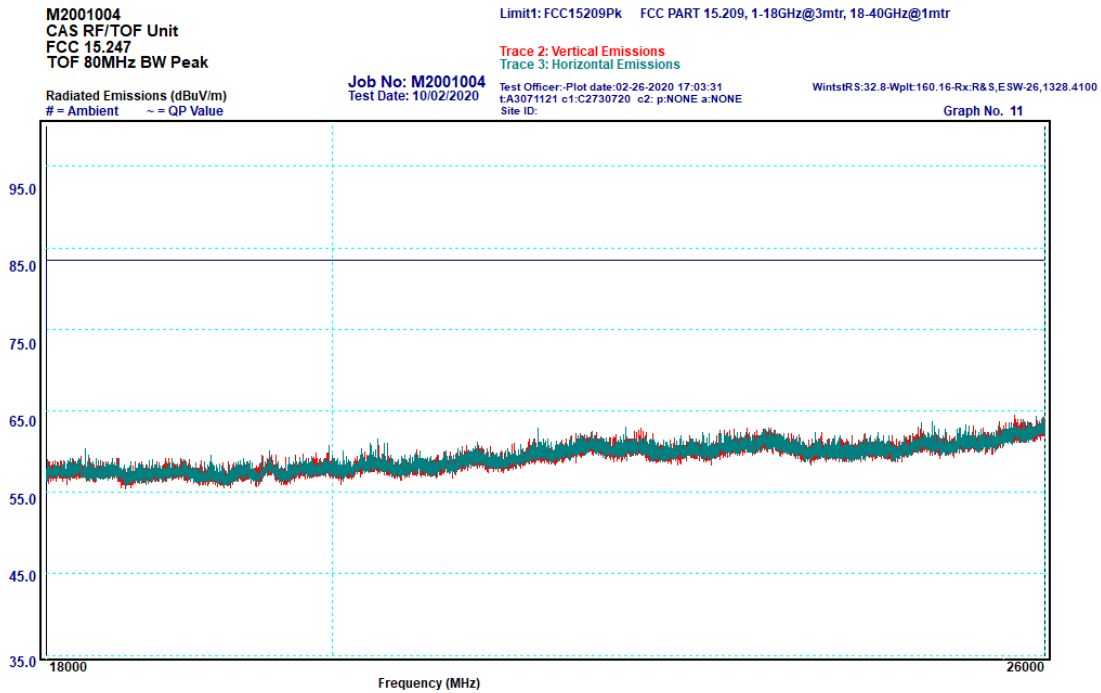

Graph 6-20: Transmitter Spurious Emissions, 18 – 26 GHz, 80 MHz Bandwidth, Peak

No peaks were measured within 10 dB of the limit.

Average Measurement:

M2001004
CAS RF/TOF Unit
FCC 15.247
TOF 22MHz BW Average

Limit1: FCC15205A FCC PART 15.205, 1-18GHz@3mtr, 18-40GHz@1mtr


Job No: M2001004
Test Date: 10/02/2020

Trace 2: Vertical Emissions
Trace 3: Horizontal Emissions
Test Officer: Plot date: 02-26-2020 17:05:48
t:A3071121 c1:C2730720 c2: p:NONE a:NONE
Site ID:

WinstRS:32.8-Wpit:160.16-Rx:R&S,ESW-26,1328.4100

Radiated Emissions (dBuV/m)
= Ambient ~ = QP Value

Graph No. 10

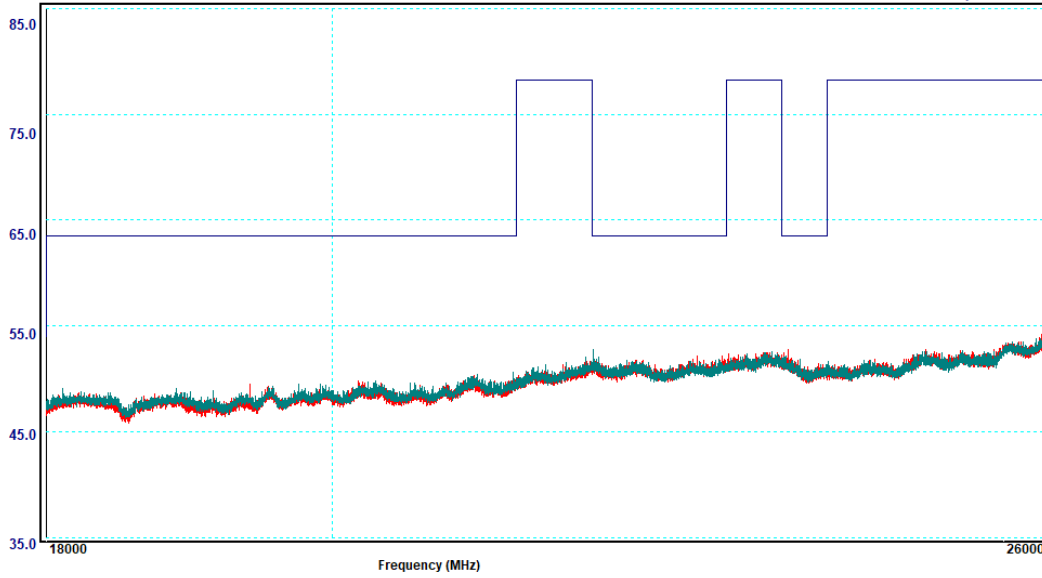

Graph 6-21: Transmitter Spurious Emissions, 18 – 26 GHz, 22 MHz Bandwidth, Average

No peaks were measured within 10 dB of the limit.

M2001004
CAS RF/TOF Unit
FCC 15.247
TOF 80MHz BW Average

Limit1: FCC15205A FCC PART 15.205, 1-18GHz@3mtr, 18-40GHz@1mtr


Job No: M2001004
Test Date: 10/02/2020

Trace 2: Vertical Emissions
Trace 3: Horizontal Emissions
Test Officer: Plot date: 02-26-2020 17:06:44
t:A3071121 c1:C2730720 c2: p:NONE a:NONE
Site ID:

WinstRS:32.8-Wpit:160.16-Rx:R&S,ESW-26,1328.4100

Radiated Emissions (dBuV/m)
= Ambient ~ = QP Value

Graph No. 12

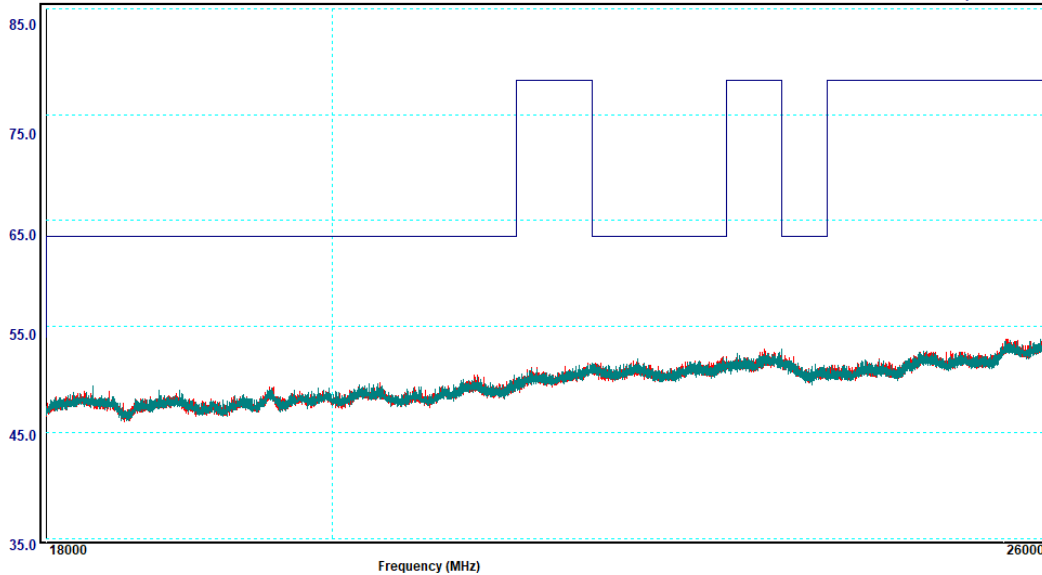


Graph 6-22: Transmitter Spurious Emissions, 18 – 26 GHz, 80 MHz Bandwidth, Average

No peaks were measured within 10 dB of the limit.

6.8 §15.247(d)/ §RSS-247 5.5 Band Edge Emission Measurements


Band-edge measurements were done using radiated in accordance to ANSI C63.10 clause 11.13.1 referring to clause 6.10.4 and 6.10.5. All emissions measured near the lower and higher band edge complied with the requirements of §15.247/ RSS-247 5.0.

22 MHz Nominal Bandwidth:

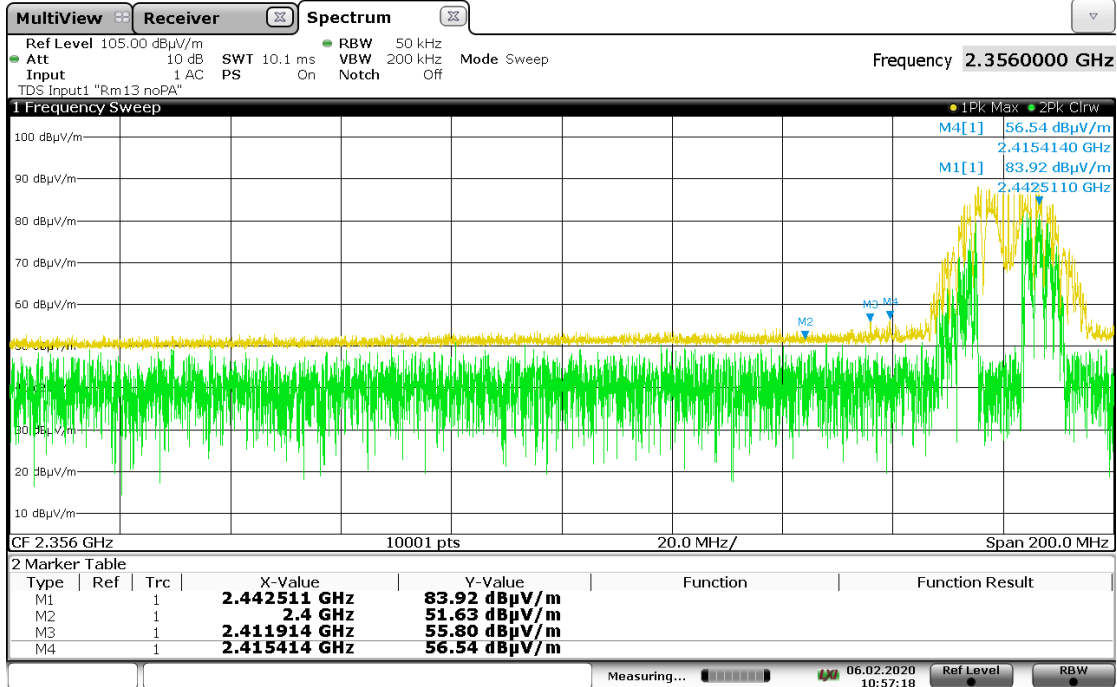


10:57:19 06.02.2020

Graph 6-23: 22 MHz Bandwidth, lower Band edge, Peak

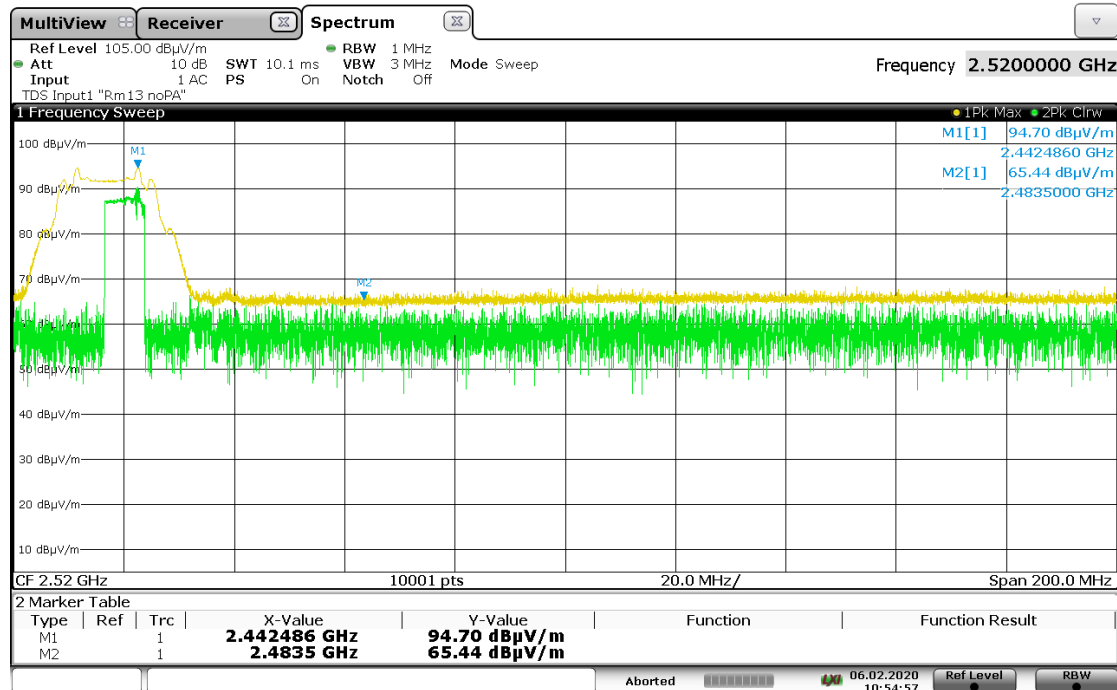

10:54:58 06.02.2020

Graph 6-24: 22 MHz Bandwidth, Upper Band edge, Peak

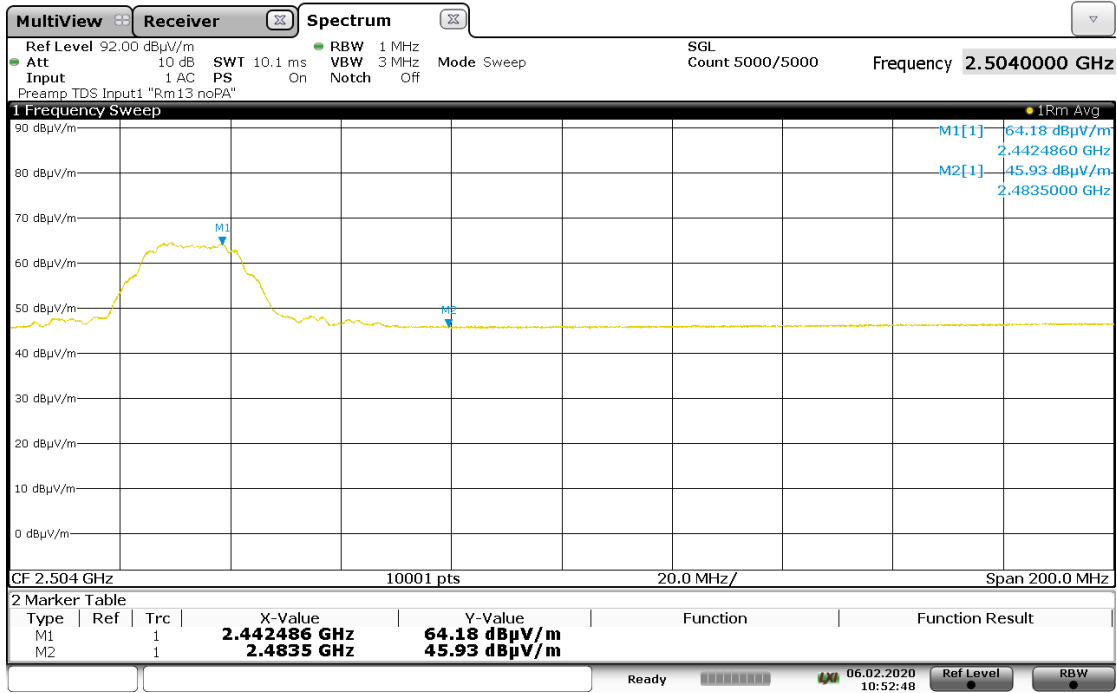


10:52:48 06.02.2020

Graph 6-25: 22 MHz Nominal Bandwidth, Upper Band edge, Average

Table 6-10: 22 MHz Nominal Bandwidth, Band edge


Measurement Type	Freq [MHz]	Measurement [dBµV/m]	Limit [dBµV/m]	Result
Peak	2415.4	56.54	74.0	Complied
Peak	2411.9	55.80	74.0	Complied
Peak	2400	51.63	74.0	Complied
Peak	2483.5	65.44	74.0	Complied
Average	2483.5	45.93	54.0	Complied

80 MHz Nominal Bandwidth:

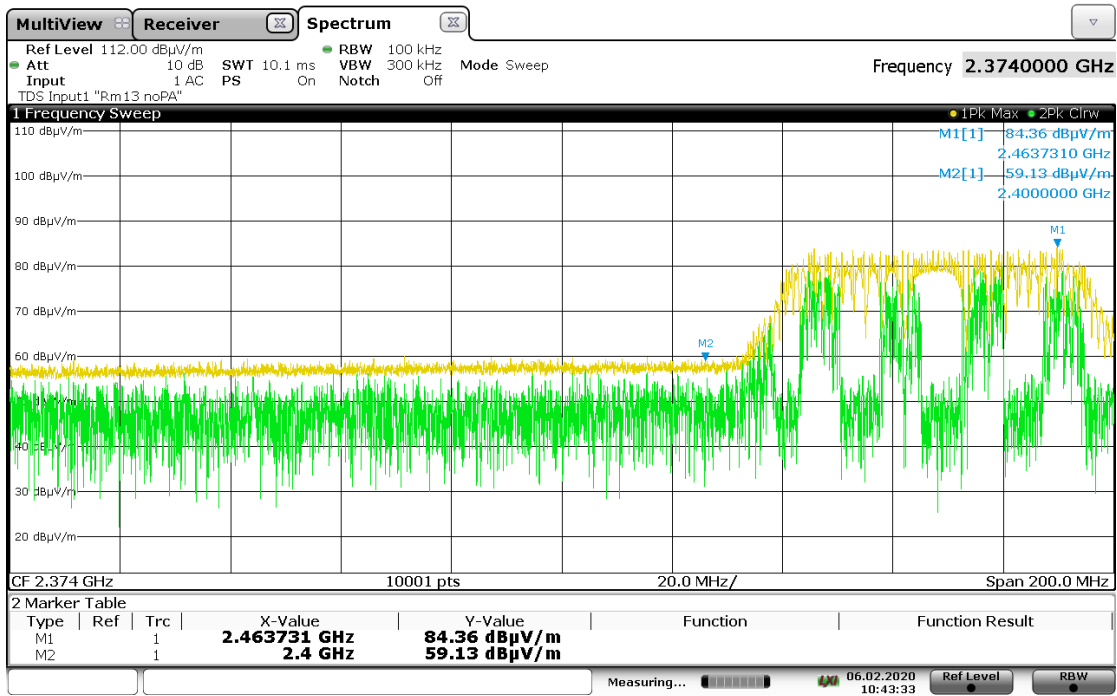


10:43:33 06.02.2020

Graph 6-26: 80 MHz Bandwidth, lower Band edge, Peak

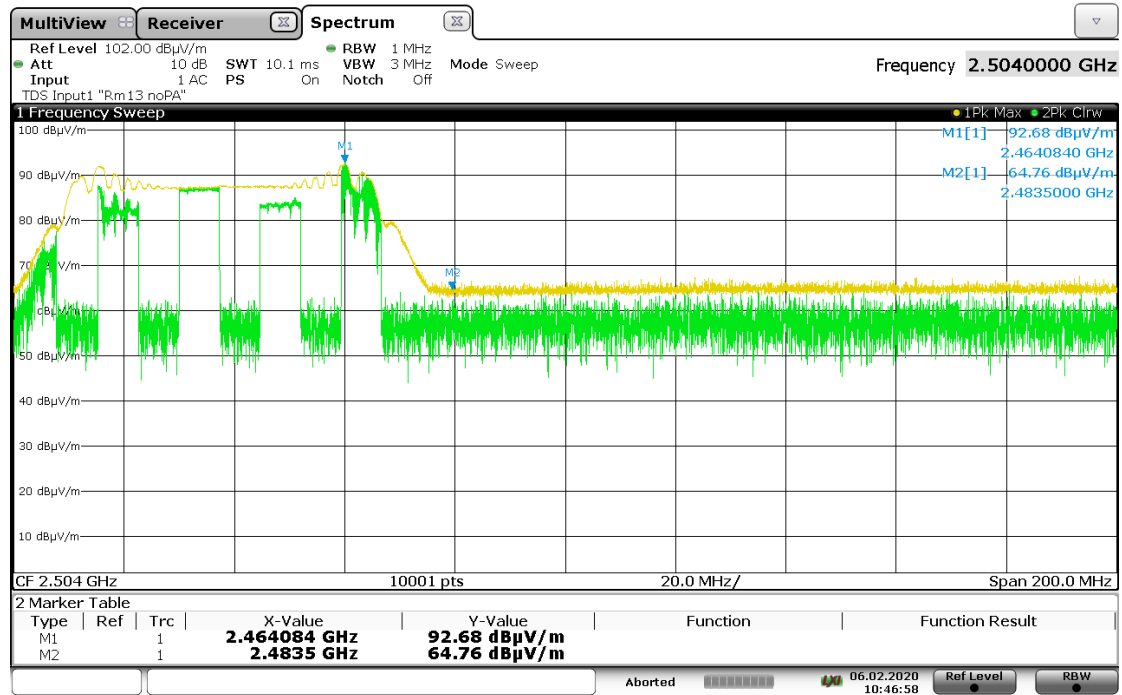

10:46:59 06.02.2020

Graph 6-27: 80 MHz Bandwidth, Upper Band edge, Peak

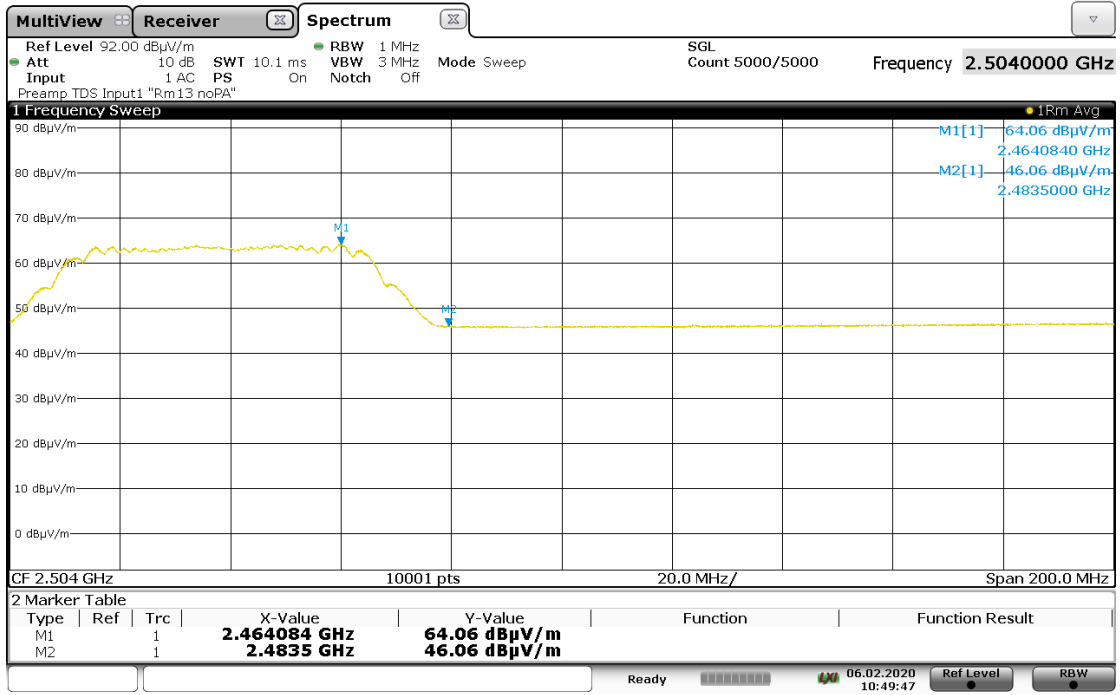

10:49:47 06.02.2020

Graph 6-28: 80 MHz Bandwidth, Upper Band edge, Average

Table 6-11: 80 MHz Bandwidth, Band edge

Measurement Type	Freq [MHz]	Measurement [dBuV/m]	Limit [dBuV/m]	Result
Peak	2400	59.13	74.0	Complied
Peak	2483.5	64.76	74.0	Complied
Average	2483.5	46.06	54.0	Complied

6.9 §15.247(e)/ RSS-247 5.2(b) Power Spectral Density

6.9.1 Test procedure

The tests were performed in accordance with ANSI C63.10: 2013 Clause 11.10.5 Maximum power spectral density level in the fundamental emissions.

Power spectral density measurements were made at 3 metres. The measurement resolution bandwidth was 3 kHz. The orientation of the EUT and the measurement antenna height and polarisation that produced the highest EIRP was used.

Power spectral density measurements were done at radiated method. The measurement resolution bandwidth was 3 kHz.

6.9.2 Limits


The maximum peak conducted power spectral density (PSD) is 8 dBm per 3 kHz.

6.9.3 Results

The measured radiated field strength is converted to equivalent conducted output power spectral density for checking compliance (KDB 558074 D01 Section 3).


Table 6-12: Power spectral density

Freq. [MHz]	Nominal Bandwidth	E-Field@ 3 m		Corr. Factor	EIRP (dBm)	Antenna Gain (dBi)	Equivalent Conducted Output PSD (dBm)	Limit (dBm)	Results
		dBuV/m	dBm						
2437	22 MHz	75.89	-19.34	3.34	-16.00	3	-19.00	8	Complied
2442	80 MHz	72.74	-22.49	3.00	-19.49	3	-22.49	8	Complied

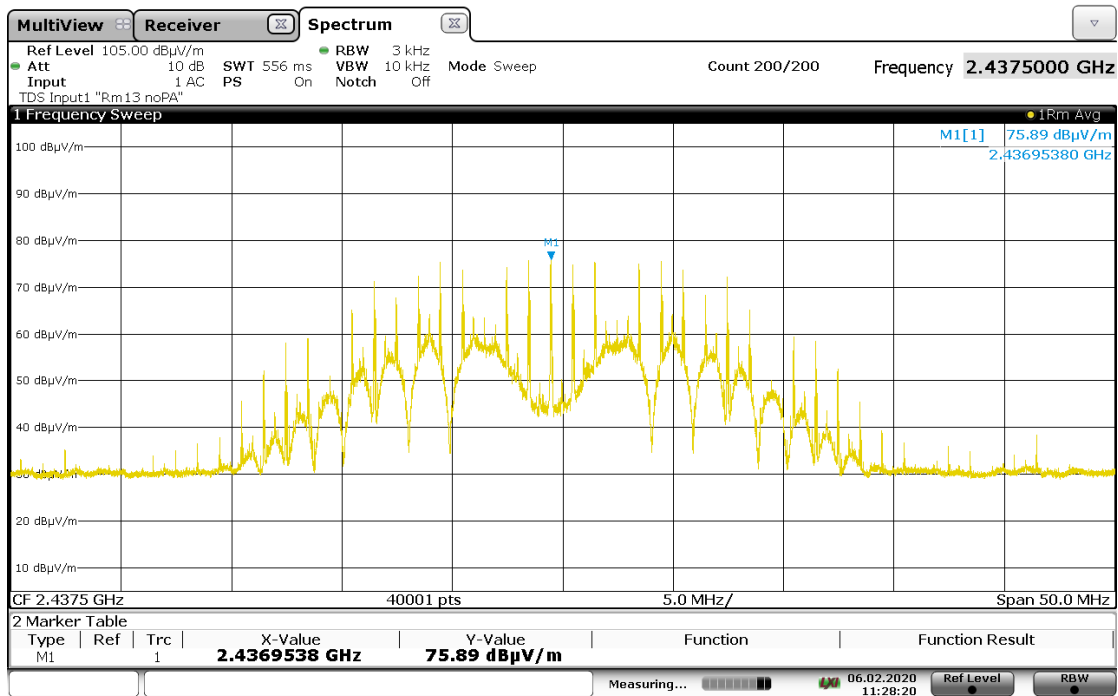

11:28:21 06.02.2020

Graph 6-29: Radiated – Power Spectral Density, 22 MHz Bandwidth

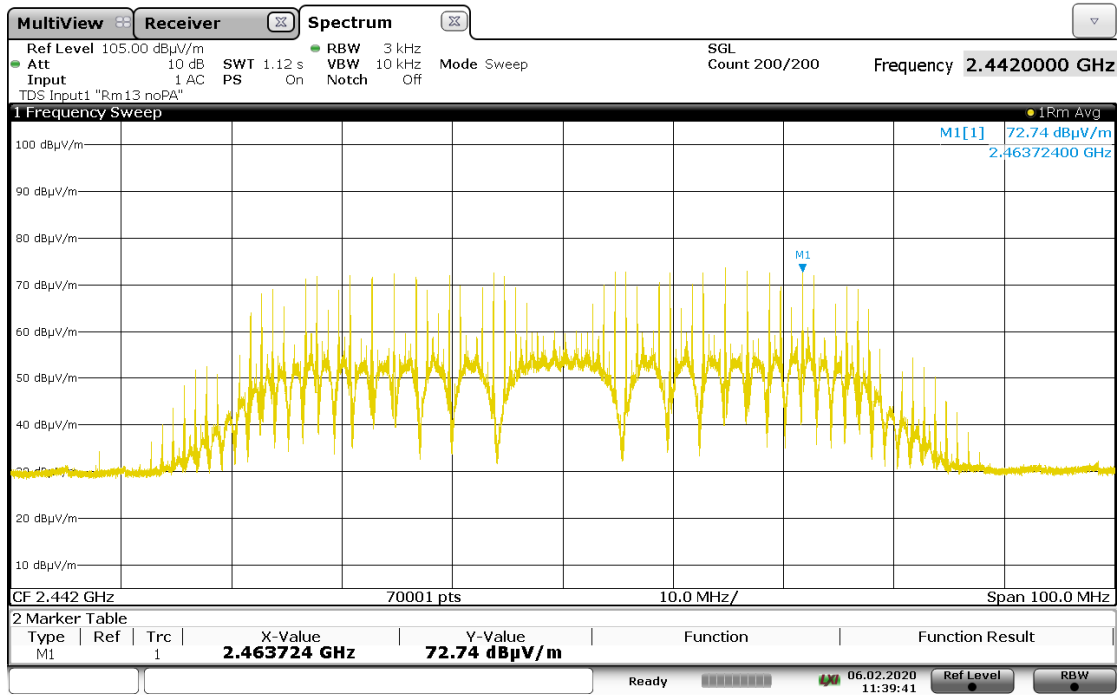

11:39:42 06.02.2020

Graph 6-30: Radiated – Power Spectral Density, 80 MHz Bandwidth

6.10 §15.247(i)/ §RSS-Gen 3.4/§RSS-102 Maximum Permissible Exposure

The EUT complied with the applicable maximum permissible exposure levels. Refer to EMC Technologies report M2001004-4 and M2001004-5

6.11 §15.215/ §RSS-Gen 6.7 Occupied Bandwidth – 99% power

6.11.1 Test procedure

The bandwidth containing 99% power of the transmitted signal was measured using the procedure from ANSI C63.10 section 6.9.


6.11.2 Limits

The 99% power should be contained within the frequency band 2400 – 2483.5 MHz.

6.11.3 Results


Table 6-13: Occupied Bandwidth

Freq. [MHz]	Nominal Bandwidth	99% Bandwidth [MHz]	Low Frequency [MHz]	High Frequency [MHz]	Result
2437	22 MHz	24.7089	2424.658	2449.367	Complied
2442	80 MHz	63.7516	2410.043	2473.794	Complied

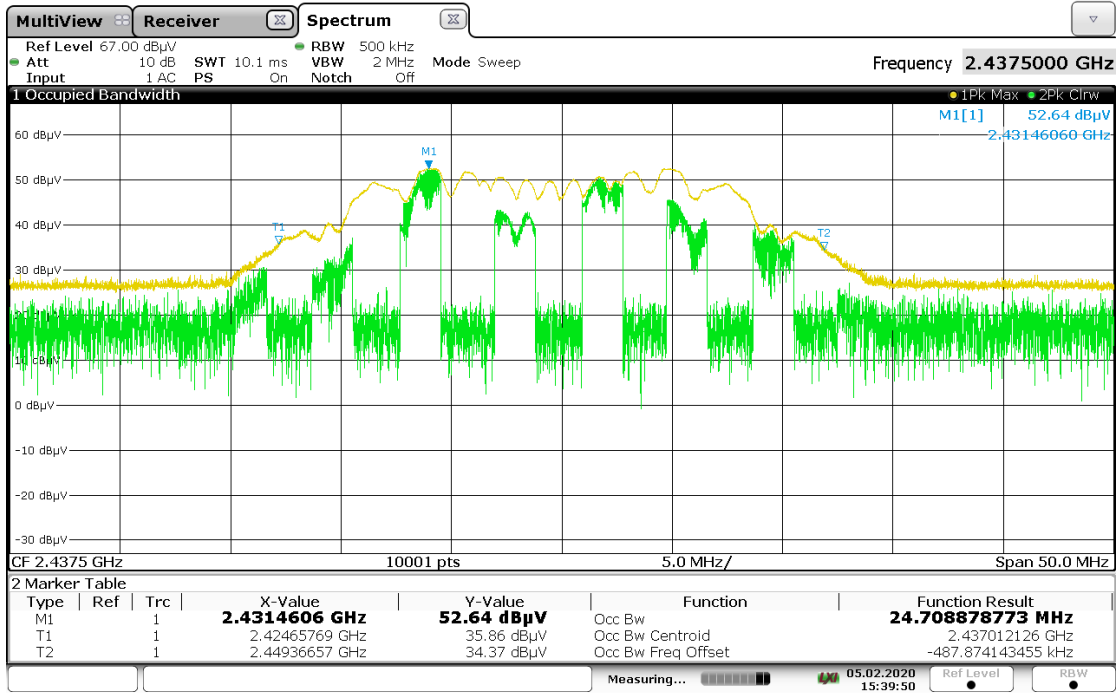

15:39:51 05.02.2020

Graph 6-31: Occupied bandwidth, 22 MHz Bandwidth

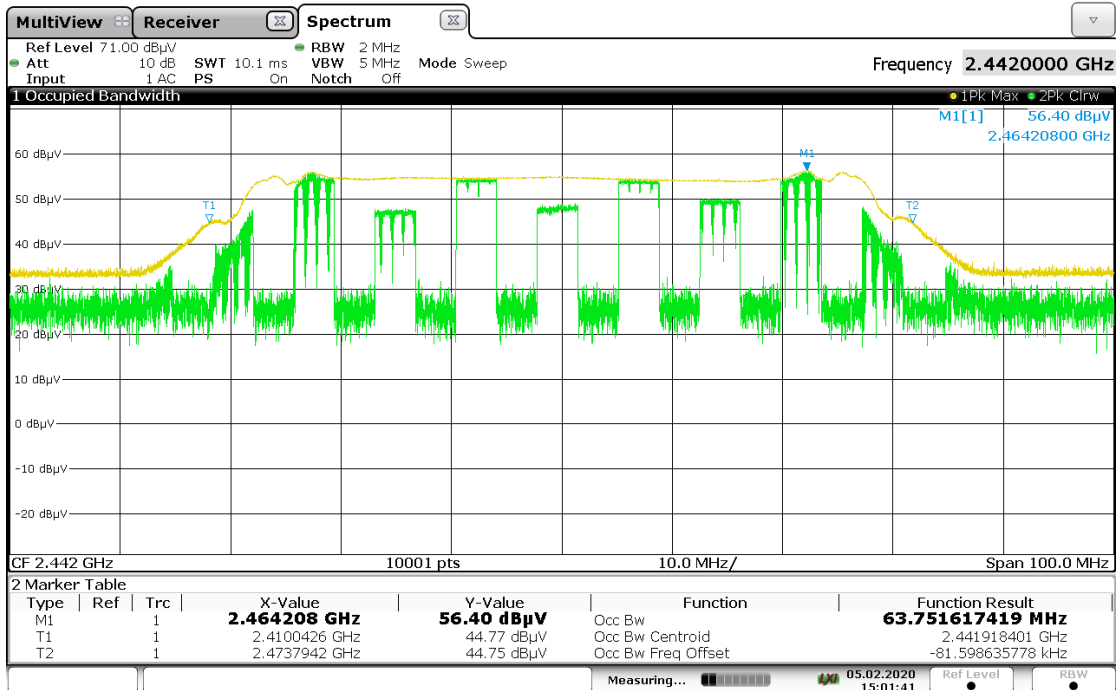

15:01:42 05.02.2020

Graph 6-32: Occupied bandwidth, 80 MHz Bandwidth

END OF REPORT