



# **FCC & ISED CANADA CERTIFICATION TEST REPORT**

**FOR THE**

**DCR008, BLUETOOTH SPEAKER**

**FCC ID: YJ7DCR008**

**IC ID: 9082A-DCR008**

**WLL REPORT # 17918-01 REV 2**

Prepared for:

**Stanley Black & Decker, Inc.  
701 E. Joppa Road  
Towson, Maryland 21286**

Prepared By:

**Washington Laboratories, Ltd.  
4840 Winchester Boulevard. Ste #5  
Frederick, Maryland 21703**



Testing Certificate AT-1448



# FCC & ISED Canada Certification Test Report

for the

Stanley Black & Decker, Inc.

FCC ID: YJ7DCR008

IC ID: 9082A-DCR008

November 17, 2022

WLL Report# 17918-01 Rev 2

Prepared by:

A handwritten signature in blue ink, appearing to read 'Ryan Mascaro', is written over a horizontal line.

Ryan Mascaro  
RF Test Engineer

Reviewed by:

A handwritten signature in blue ink, appearing to read 'Steven D. Koster', is written over a horizontal line.

Steven D. Koster  
President



## Abstract

This report has been prepared on behalf of Stanley Black & Decker, Inc. to support the attached application for a 2.4GHz Bluetooth Transmitter. The test report and application are submitted for a Frequency Hopping Spread Spectrum (FHSS) Transmitter under Part 15.247 of the FCC Rules and under Innovation Science and Economic Development (ISED) Canada RSS-247, Issue 2 (2/2017). This test Report documents the test configuration and test results for the Stanley Black & Decker, Inc., DCR008. The information provided in this report is only applicable to device herein documented, as the EUT.

The radiated emissions portion of the testing was performed in the Free-space Anechoic Chamber Test-site (FACT) 3m Chamber of Washington Laboratories, Ltd., located at 4840 Winchester Boulevard, Suite #5. Frederick, MD 21703. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD.

Washington Laboratories, Ltd. has been accepted by the FCC and approved by ANAB under Testing Certificate AT-1448 as an independent test laboratory. The Washington Laboratories, Ltd. ISED Canada number is 3035A.

The Stanley Black & Decker, Inc., DCR008 complies with the requirements for a FHSS Bluetooth Transmitter under Part 15.247 of the FCC Rules and under Innovation Science and Economic Development (ISED) Canada RSS-247, Issue 2 (2/2017).

Revision History	Description of Change	Date
Rev 0	Initial Release	November 17, 2022
Rev 1	TCB Comments; Dated 2/1/2023	February 6, 2023
Rev 2	TCB Comments; Dated 2/15/2023	February 16, 2023



## Table of Contents

1	Introduction.....	8
1.1	Compliance Statement .....	8
1.2	Test Scope.....	8
1.3	Testing Algorithm.....	8
1.4	Test Location .....	9
1.5	Contract Information.....	9
1.6	Test and Support Personnel .....	9
1.7	Test Dates.....	9
2	Test Results.....	11
2.1	Transmitter Output Power.....	11
2.1.1	Measurement Method and Results.....	11
2.2	Channel Occupied Bandwidth .....	21
2.2.1	Measurement Method and Results.....	21
2.3	Number of Channels Used.....	31
2.3.1	Measurement Method and Results.....	31
2.4	Time of Occupancy (Dwell Time).....	38
2.4.1	Measurement Method and Results.....	38
2.5	Channel Carrier Separation.....	45
2.5.1	Measurement Method and Results.....	45
2.6	Bandedge Compliance (Antenna Port Conducted).....	49
2.6.1	Measurement Method and Results.....	49
2.7	Conducted Spurious Emissions .....	56
2.7.1	Measurement Method and Results.....	56
2.8	General Field Strength Requirements – Radiated Emissions .....	91
2.8.1	Requirements .....	91
2.8.2	Test Procedure Summary.....	91
2.8.3	Radiated Data Reduction and Reporting.....	92
2.8.4	Measurement Method and Results.....	93
2.9	AC Powerline Conducted Emissions .....	121
2.9.1	Requirements .....	121
2.9.2	Test Procedure .....	121
2.9.3	Conducted Data Reduction and Reporting .....	122
2.9.4	Test Data .....	122
3	Equipment Under Test .....	124
3.1	EUT Identification & Description .....	124
3.2	Test Configuration .....	124
3.3	Measurements .....	128
3.3.1	References.....	128
3.4	Measurement Uncertainty.....	128
4	Test Equipment .....	130



## List of Tables

Table 1: Certification Testing Summary and Compliance Results.....	10
Table 2: Transmitter Output Power – Test Results.....	11
Table 3: Channel Occupied Bandwidth – Test Results .....	21
Table 4: Number of Channels Used – Test Results .....	31
Table 5: Time of Occupancy – Test Results.....	38
Table 6: Channel Carrier Separation – Test Results.....	45
Table 7: Bandedge Compliance – Test Results .....	49
Table 8: Radio Fundamental, EUT Axis Evaluation (GFSK, Center Channel) .....	93
Table 9: Radiated Emissions Test Data – 30 MHz to 1000 MHz.....	94
Table 10: Radiated Emissions Test Data – 1 GHz to 25 GHz (GFSK, Low Channel) .....	97
Table 11: Radiated Emissions Test Data – 1 GHz to 25 GHz (GFSK, Center Channel) .....	102
Table 12: Radiated Emissions Test Data – 1 GHz to 25 GHz (GFSK, High Channel).....	107
Table 13: Radiated Emissions Test Data – 1 GHz to 25 GHz ( $\pi/4$ DQPSK, Center Channel) .....	112
Table 14: Radiated Emissions Test Data – 1 GHz to 25 GHz (8DPSK, Center Channel) .....	117
Table 15: AC Power Conducted Emissions Test Data .....	123
Table 16: Radio Device Summary .....	125
Table 17: System Configuration List.....	127
Table 18: Support Equipment .....	127
Table 19: Cable Configuration.....	127
Table 20: Expanded Uncertainty List .....	129
Table 21: Test Equipment List.....	130



## List of Figures

Figure 1: GFSK (1Mbps) – Low Channel, Peak Power Output .....	12
Figure 2: GFSK (1Mbps) – Center Channel, Peak Power Output .....	13
Figure 3: GFSK (1Mbps) – High Channel, Peak Power Output.....	14
Figure 4: $\pi/4$ DQPSK (2Mbps) – Low Channel, Peak Power Output .....	15
Figure 5: $\pi/4$ DQPSK (2Mbps) – Center Channel, Peak Power Output .....	16
Figure 6: $\pi/4$ DQPSK (2Mbps) – High Channel, Peak Power Output.....	17
Figure 7: 8DPSK (3Mbps) – Low Channel, Peak Power Output .....	18
Figure 8: 8DPSK (3Mbps) – Center Channel, Peak Power Output .....	19
Figure 9: 8DPSK (3Mbps) – High Channel, Peak Power Output.....	20
Figure 10: GFSK (1Mbps) – Low Channel, Occupied Bandwidth .....	22
Figure 11: GFSK (1Mbps) – Center Channel, Occupied Bandwidth .....	23
Figure 12: GFSK (1Mbps) – High Channel, Occupied Bandwidth.....	24
Figure 13: $\pi/4$ DQPSK (2Mbps) – Low Channel, Occupied Bandwidth .....	25
Figure 14: $\pi/4$ DQPSK (2Mbps) – Center Channel, Occupied Bandwidth .....	26
Figure 15: $\pi/4$ DQPSK (2Mbps) – High Channel, Occupied Bandwidth.....	27
Figure 16: 8DPSK (3Mbps) – Low Channel, Occupied Bandwidth .....	28
Figure 17: 8DPSK (3Mbps) – Center Channel, Occupied Bandwidth .....	29
Figure 18: 8DPSK (3Mbps) – High Channel, Occupied Bandwidth.....	30
Figure 19: GFSK (1Mbps) – Number of Channels Used, Plot 1 .....	32
Figure 20: GFSK (1Mbps) – Number of Channels Used, Plot 2 .....	33
Figure 21: $\pi/4$ DQPSK (2Mbps) – Number of Channels Used, Plot 1 .....	34
Figure 22: $\pi/4$ DQPSK (2Mbps) – Number of Channels Used, Plot 2 .....	35
Figure 23: 8DPSK (3Mbps) – Number of Channels Used, Plot 1 .....	36
Figure 24: 8DPSK (3Mbps) – Number of Channels Used, Plot 2 .....	37
Figure 25: GFSK Transmitter 5-Second Evaluation (Hopping) .....	39
Figure 26: GFSK Transmitter Evaluation (Hopping) – Single Dwell Time.....	40
Figure 27: $\pi/4$ DQPSK Transmitter 5-Second Evaluation (Hopping).....	41
Figure 28: $\pi/4$ DQPSK Transmitter Evaluation (Hopping) – Single Dwell Time.....	42
Figure 29: 8DPSK Transmitter 5-Second Evaluation (Hopping) .....	43
Figure 30: 8DPSK Transmitter Evaluation (Hopping) – Single Dwell Time.....	44
Figure 31: GFSK (1Mbps) – Channel Separation.....	46
Figure 32: $\pi/4$ DQPSK (2Mbps) – Channel Separation.....	47
Figure 33: 8DPSK (3Mbps) – Channel Separation.....	48
Figure 34: GFSK (1Mbps) – Lower Band Edge.....	50
Figure 35: GFSK (1Mbps) – Upper Band Edge .....	51
Figure 36: $\pi/4$ DQPSK (2Mbps) – Lower Band Edge.....	52
Figure 37: $\pi/4$ DQPSK (2Mbps) – Upper Band Edge .....	53
Figure 38: 8DPSK (3Mbps) – Lower Band Edge.....	54
Figure 39: 8DPSK (3Mbps) – Upper Band Edge .....	55
Figure 40: GFSK (1Mbps) Low Channel, Conducted Spurious – Plot 1 .....	57
Figure 41: GFSK (1Mbps) Low Channel, Conducted Spurious – Plot 2 .....	58



Figure 42: GFSK (1Mbps) Low Channel, Conducted Spurious – Plot 3 ..... 59  
Figure 43: GFSK (1Mbps) Low Channel, Conducted Spurious – Plot 4 ..... 60  
Figure 44: GFSK (1Mbps) Low Channel, Conducted Spurious – Plot 5 ..... 61  
Figure 45: GFSK (1Mbps) Low Channel, Conducted Spurious – Plot 6 ..... 62  
Figure 46: GFSK (1Mbps) Center Channel, Conducted Spurious – Plot 1 ..... 64  
Figure 47: GFSK (1Mbps) Center Channel, Conducted Spurious – Plot 2 ..... 65  
Figure 48: GFSK (1Mbps) Center Channel, Conducted Spurious – Plot 3 ..... 66  
Figure 49: GFSK (1Mbps) Center Channel, Conducted Spurious – Plot 4 ..... 67  
Figure 50: GFSK (1Mbps) Center Channel, Conducted Spurious – Plot 5 ..... 68  
Figure 51: GFSK (1Mbps) Center Channel, Conducted Spurious – Plot 6 ..... 69  
Figure 52: GFSK (1Mbps) High Channel, Conducted Spurious – Plot 1 ..... 71  
Figure 53: GFSK (1Mbps) High Channel, Conducted Spurious – Plot 2 ..... 72  
Figure 54: GFSK (1Mbps) High Channel, Conducted Spurious – Plot 3 ..... 73  
Figure 55: GFSK (1Mbps) High Channel, Conducted Spurious – Plot 4 ..... 74  
Figure 56: GFSK (1Mbps) High Channel, Conducted Spurious – Plot 5 ..... 75  
Figure 57: GFSK (1Mbps) High Channel, Conducted Spurious – Plot 6 ..... 76  
Figure 58:  $\pi/4$ DQPSK (2Mbps) Center Channel, Conducted Spurious – Plot 1 ..... 78  
Figure 59:  $\pi/4$ DQPSK (2Mbps) Center Channel, Conducted Spurious – Plot 2 ..... 79  
Figure 60:  $\pi/4$ DQPSK (2Mbps) Center Channel, Conducted Spurious – Plot 3 ..... 80  
Figure 61:  $\pi/4$ DQPSK (2Mbps) Center Channel, Conducted Spurious – Plot 4 ..... 81  
Figure 62:  $\pi/4$ DQPSK (2Mbps) Center Channel, Conducted Spurious – Plot 5 ..... 82  
Figure 63:  $\pi/4$ DQPSK (2Mbps) Center Channel, Conducted Spurious – Plot 6 ..... 83  
Figure 64: 8DPSK (3Mbps) Center Channel, Conducted Spurious – Plot 1 ..... 85  
Figure 65: 8DPSK (3Mbps) Center Channel, Conducted Spurious – Plot 2 ..... 86  
Figure 66: 8DPSK (3Mbps) Center Channel, Conducted Spurious – Plot 3 ..... 87  
Figure 67: 8DPSK (3Mbps) Center Channel, Conducted Spurious – Plot 4 ..... 88  
Figure 68: 8DPSK (3Mbps) Center Channel, Conducted Spurious – Plot 5 ..... 89  
Figure 69: 8DPSK (3Mbps) Center Channel, Conducted Spurious – Plot 6 ..... 90  
Figure 70: GFSK (1Mbps) Low Channel – 6 GHz to 9 GHz (Corrected Field Strength) ..... 99  
Figure 71: GFSK (1Mbps) Low Channel – 9 GHz to 18 GHz (Corrected Field Strength) ..... 100  
Figure 72: GFSK (1Mbps) Center Channel – 6 GHz to 9 GHz (Corrected Field Strength) ..... 104  
Figure 73: GFSK (1Mbps) Center Channel – 9 GHz to 18 GHz (Corrected Field Strength) ..... 105  
Figure 74: GFSK (1Mbps) High Channel – 6 GHz to 9 GHz (Corrected Field Strength) ..... 109  
Figure 75: GFSK (1Mbps) High Channel – 9 GHz to 18 GHz (Corrected Field Strength) ..... 110  
Figure 76:  $\pi/4$ DQPSK (2Mbps) Center Channel – 6 GHz to 9 GHz (Corrected Field Strength) ..... 114  
Figure 77:  $\pi/4$ DQPSK (2Mbps) Center Channel – 9 GHz to 18 GHz (Corrected Field Strength) ..... 115  
Figure 78: 8DPSK (3Mbps) Center Channel – 6 GHz to 9 GHz (Corrected Field Strength) ..... 119  
Figure 79: 8DPSK (3Mbps) Center Channel – 9 GHz to 18 GHz (Corrected Field Strength) ..... 120  
Figure 80: EUT Sample Diagram – Device Specifications ..... 124  
Figure 81: EUT Block Diagram – Testing Configuration ..... 126



# 1 Introduction

## 1.1 Compliance Statement

The Stanley Black & Decker, Inc., DCR008 complies with the requirements for a FHSS Bluetooth Transmitter under Part 15.247 of the FCC Rules and under Innovation Science and Economic Development (ISED) Canada RSS-247, Issue 2 (2/2017).

## 1.2 Test Scope

Tests for radiated and conducted (at antenna terminal) emissions were performed. All measurements were performed in accordance with C63.10 “ANSI Procedures for Compliance Testing of Unlicensed Wireless Devices”. The measurement equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation. Table 1 provides the series and results of testing for compliance with for a FHSS device; full test results are shown in subsequent report sub-sections.

## 1.3 Testing Algorithm

The DCR008, Bluetooth Speaker was provided to the test laboratory, in two sample configurations: (1) a conducted (at the antenna port) sample and (2) a wireless radiated (PCB trace antenna) sample. The EUT low, center, and high channels were tunable through the support laptop’s interface. Prior to all testing, the transmitter power was adjusted [via software] to the maximum allowable setting within the support software, indicated by a numerical value of “8”. This setting achieved the reported peak transmit output power denoted in Table 2. The EUT was tested in a manner that produced the worst-case emission levels, which are provided in the test results data section(s) of this report.





## 1.4 Test Location

All measurements herein were performed at Washington Laboratories, Ltd. test center in Frederick, MD. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. Washington Laboratories, Ltd. has been accepted by the FCC and approved by ANAB under Testing Certificate AT-1448 as an independent test laboratory. The Washington Laboratories, Ltd. ISED Canada number is 3035A.

## 1.5 Contract Information

Customer:	Stanley Black & Decker, Inc.
Purchase Order Number:	V603822
Quotation Number:	73709

## 1.6 Test and Support Personnel

Washington Laboratories, LTD	Ryan Mascaro
Customer Representative	Cedric Valiente

## 1.7 Test Dates

11/9/2022 – 11/14/2022 & 2/6/2023 (also see Section 4 of this report)



Table 1: Certification Testing Summary and Compliance Results

<b>FCC Rule Part</b>	<b>ISED Canada Rule Part</b>	<b>Test Description</b>	<b>Result</b>
15.247(b)(1)	RSS-247; 5.4(b)	Transmit Output Power	Pass
15.247(a)(1) 2.1049	RSS-247; 5.1(a)	Channel Occupied Bandwidth	Pass
15.247 (a)(1)(iii)	RSS-247; 5.1(d)	Number of Channels Used	Pass
15.247 (a)(1)(iii)	RSS-247; 5.1(d)	Time of Occupancy (Dwell Time)	Pass
15.247(a)(1)	RSS-247; 5.1(b)	Channel Carrier Separation	Pass
15.247(d) DA 00-705	RSS-247; 5.5	Bandedge Compliance (20dB)	Pass
15.247(d)	RSS-247; 5.5	Conducted Spurious Emissions	Pass
15.205(a) 15.209(a)	RSS-Gen; 8.9 RSS-Gen; 8.10	General Field Strength Requirements	Pass
15.205	RSS-Gen; 6.8	Antenna Requirement	Pass †
15.207	RSS-Gen; 8.8	AC Powerline Conducted Emissions	Pass

† the EUT employs a custom PCB trace antenna; designed and manufactured by the Applicant. The EUT does not have an antenna connector.



## 2 Test Results

### 2.1 Transmitter Output Power

For frequency hopping systems operating in the 2400 MHz to 2483.5 MHz band, that employ at least 75 non-overlapping hopping channels, the maximum conducted output power (measured at the antenna port) shall not exceed 30 dBm (1 Watt). For all other frequency hopping systems, inclusive of the EUT, in the 2400 MHz to 2483.5 MHz band the maximum conducted output power (measured at the antenna port) shall not exceed 21 dBm (125 mW). Additionally, ISED Canada requires that the EIRP shall not exceed 4 Watts, except as provided in RSS-247, Section 5.4(e).

#### 2.1.1 Measurement Method and Results

This test was performed as specified in ANSI C63.10 (2013), Section 7.8.5.

The EUT was configured in a fully-modulated mode, with the hopping stopped.

The EUT employs a PCB trace antenna with a maximum gain of -1.5 dBi.

$3.96 + -1.5 = 2.46$  dBm EIRP (calculated), which is far below the 4W limit for Canada.

Table 2: Transmitter Output Power – Test Results

Modulation	Mode (Data Rate)	Frequency (MHz)	Peak Power (dBm)
GFSK	DH5 (1Mbps)	2402 MHz	3.80
		2441 MHz	3.96
		2480 MHz	3.91
$\pi/4$ DQPSK	2DH5 (2Mbps)	2402 MHz	3.76
		2441 MHz	3.85
		2480 MHz	3.76
8DPSK	3DH5 (3Mbps)	2402 MHz	3.76
		2441 MHz	3.76
		2480 MHz	3.77



Figure 1: GFSK (1Mbps) – Low Channel, Peak Power Output

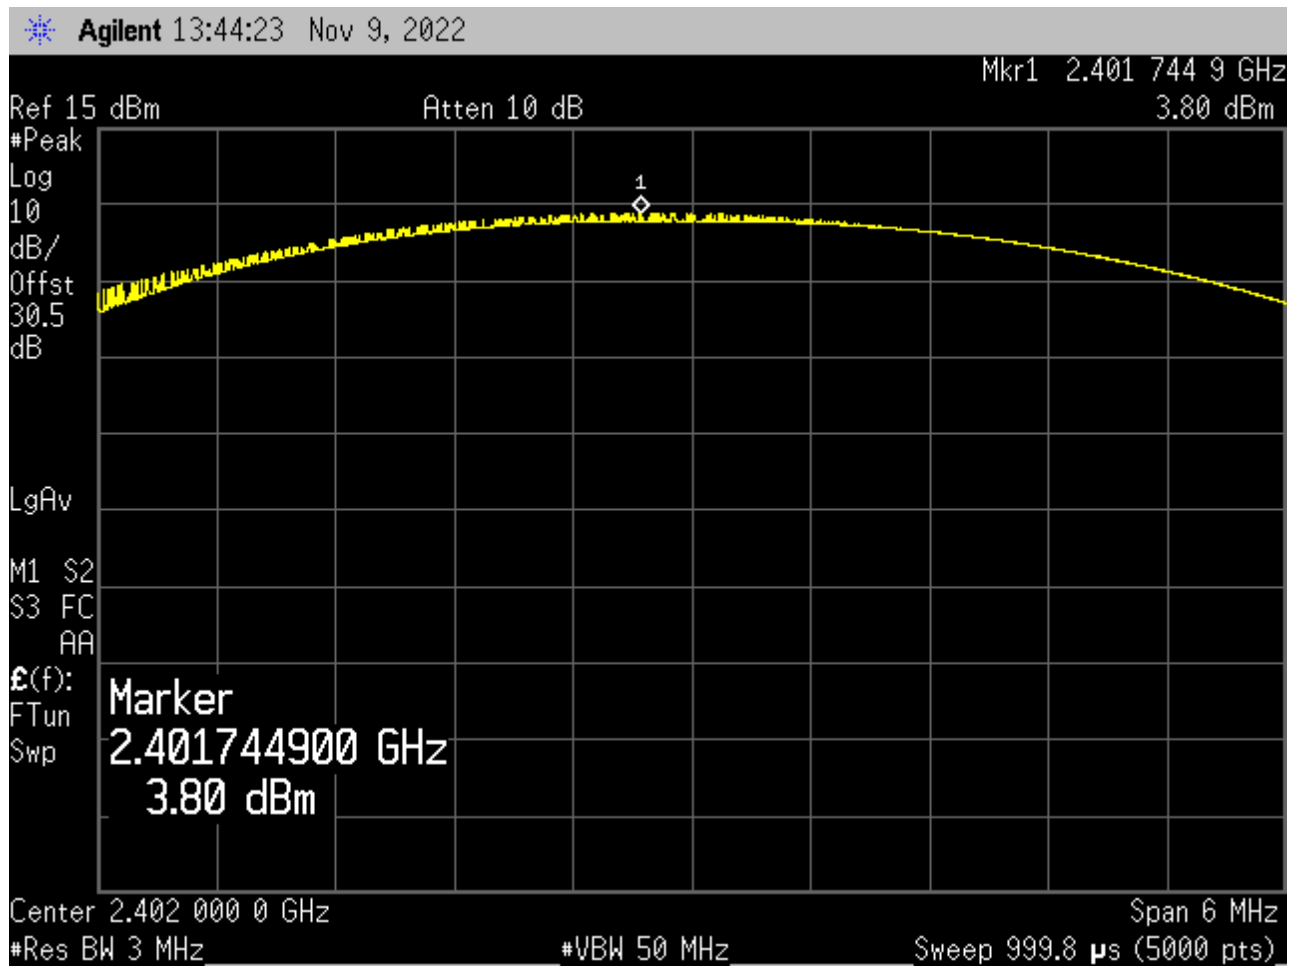




Figure 2: GFSK (1Mbps) – Center Channel, Peak Power Output

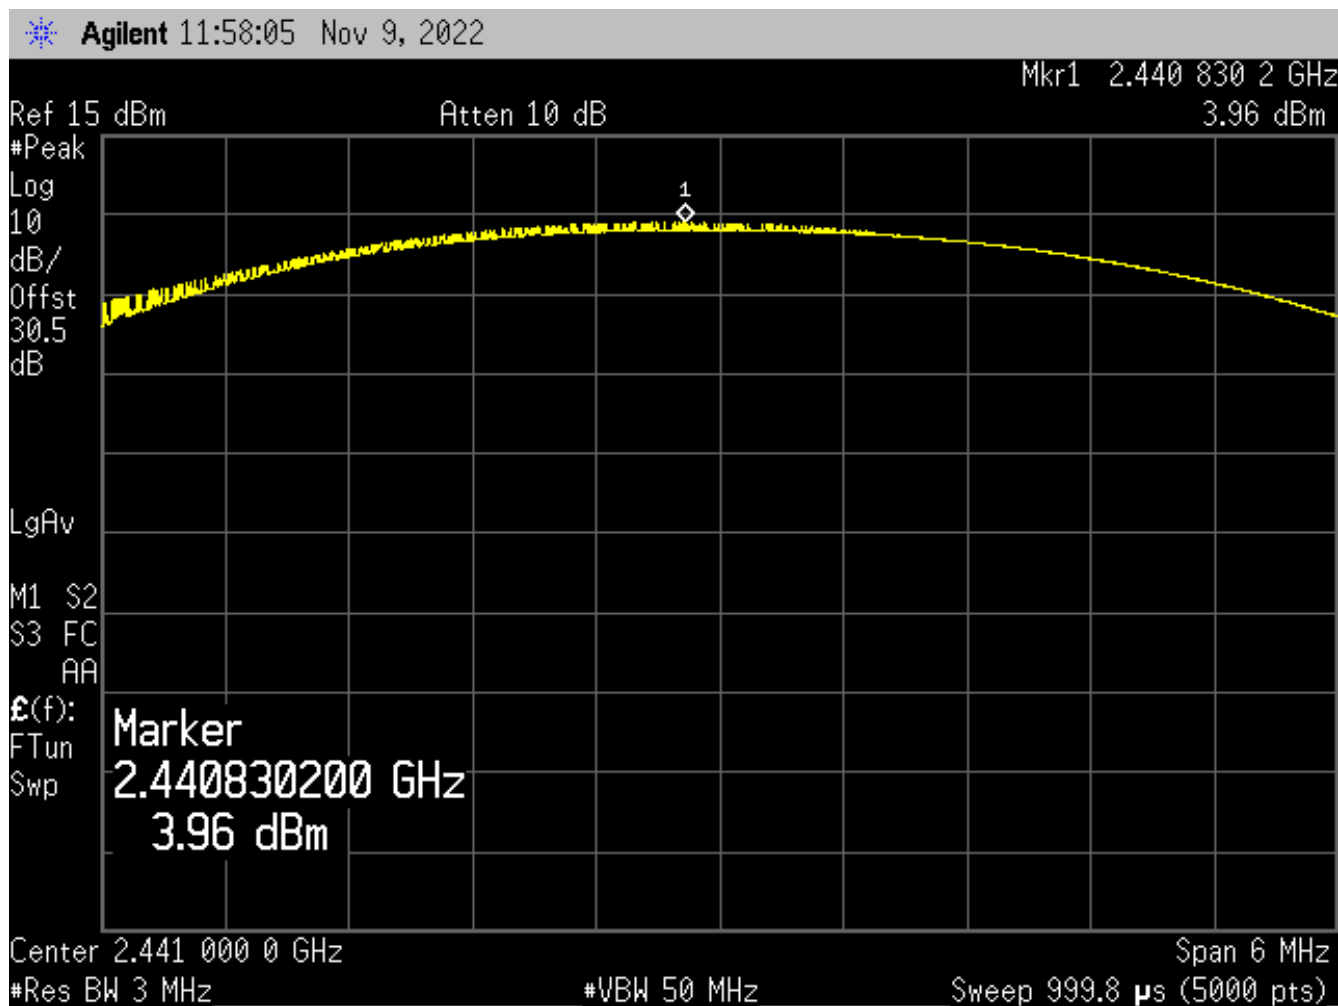




Figure 3: GFSK (1Mbps) – High Channel, Peak Power Output

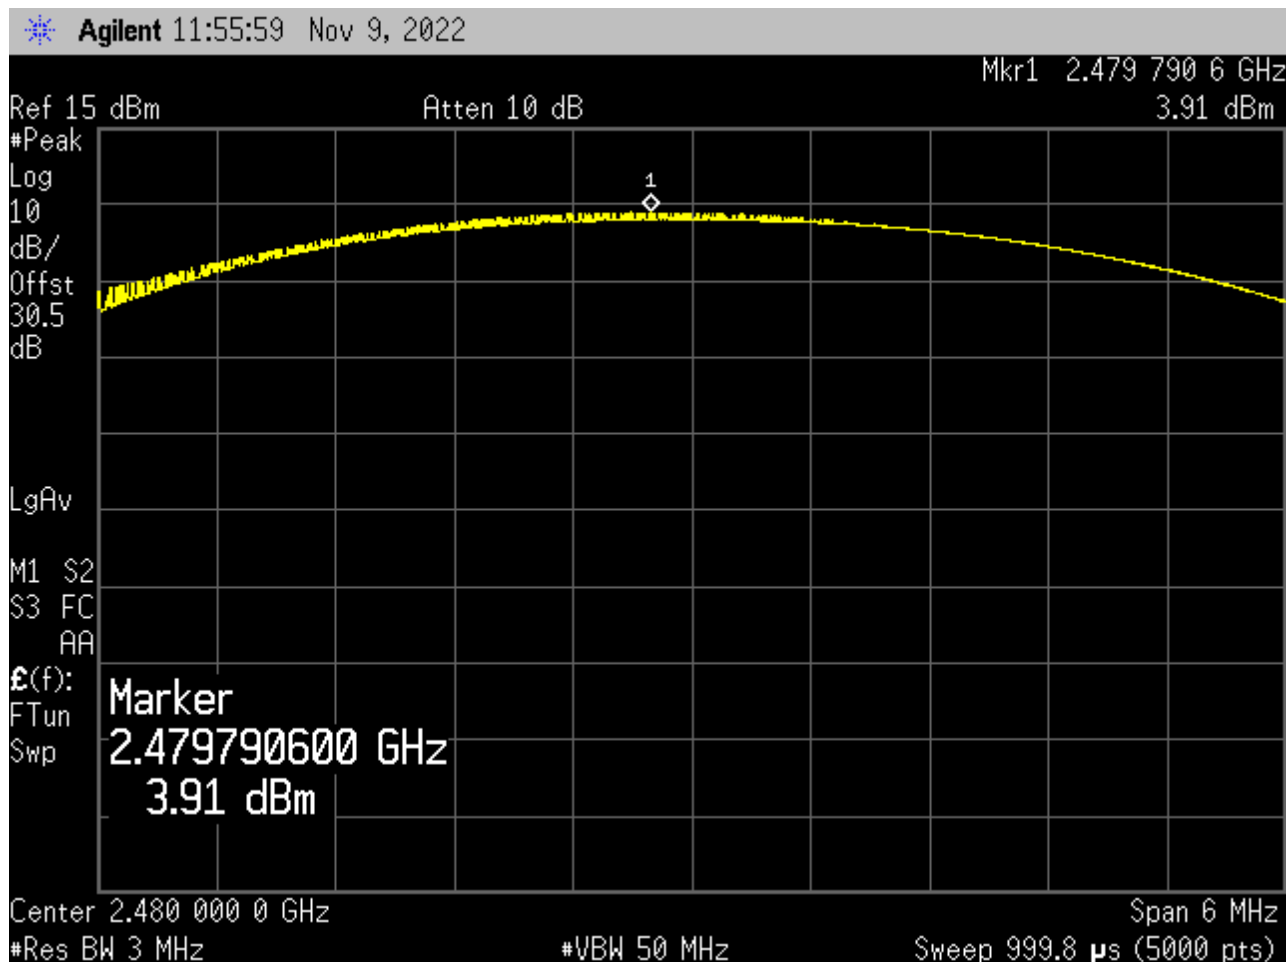




Figure 4:  $\pi/4$ DQPSK (2Mbps) – Low Channel, Peak Power Output

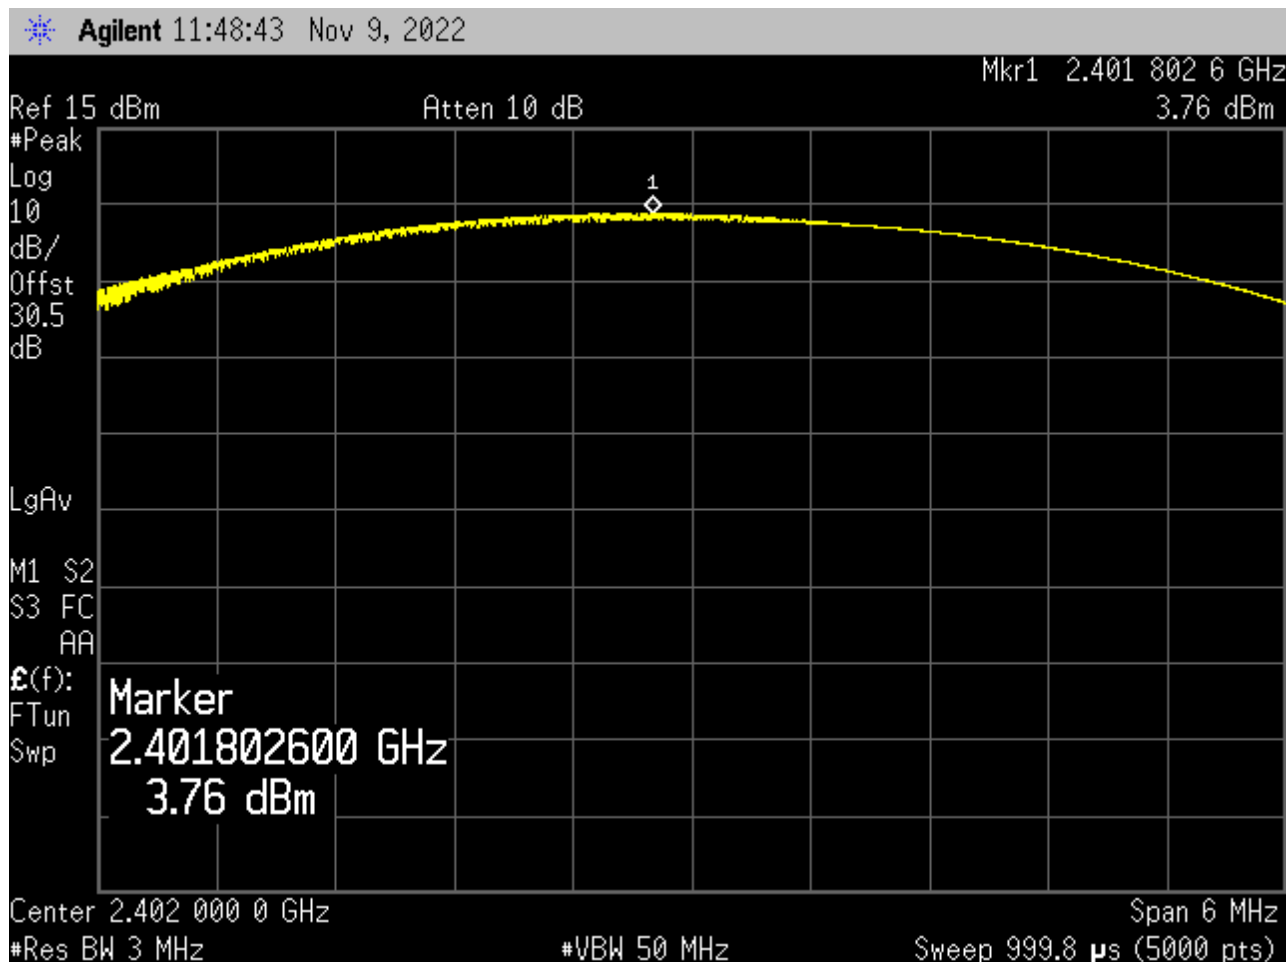




Figure 5:  $\pi/4$ DQPSK (2Mbps) – Center Channel, Peak Power Output

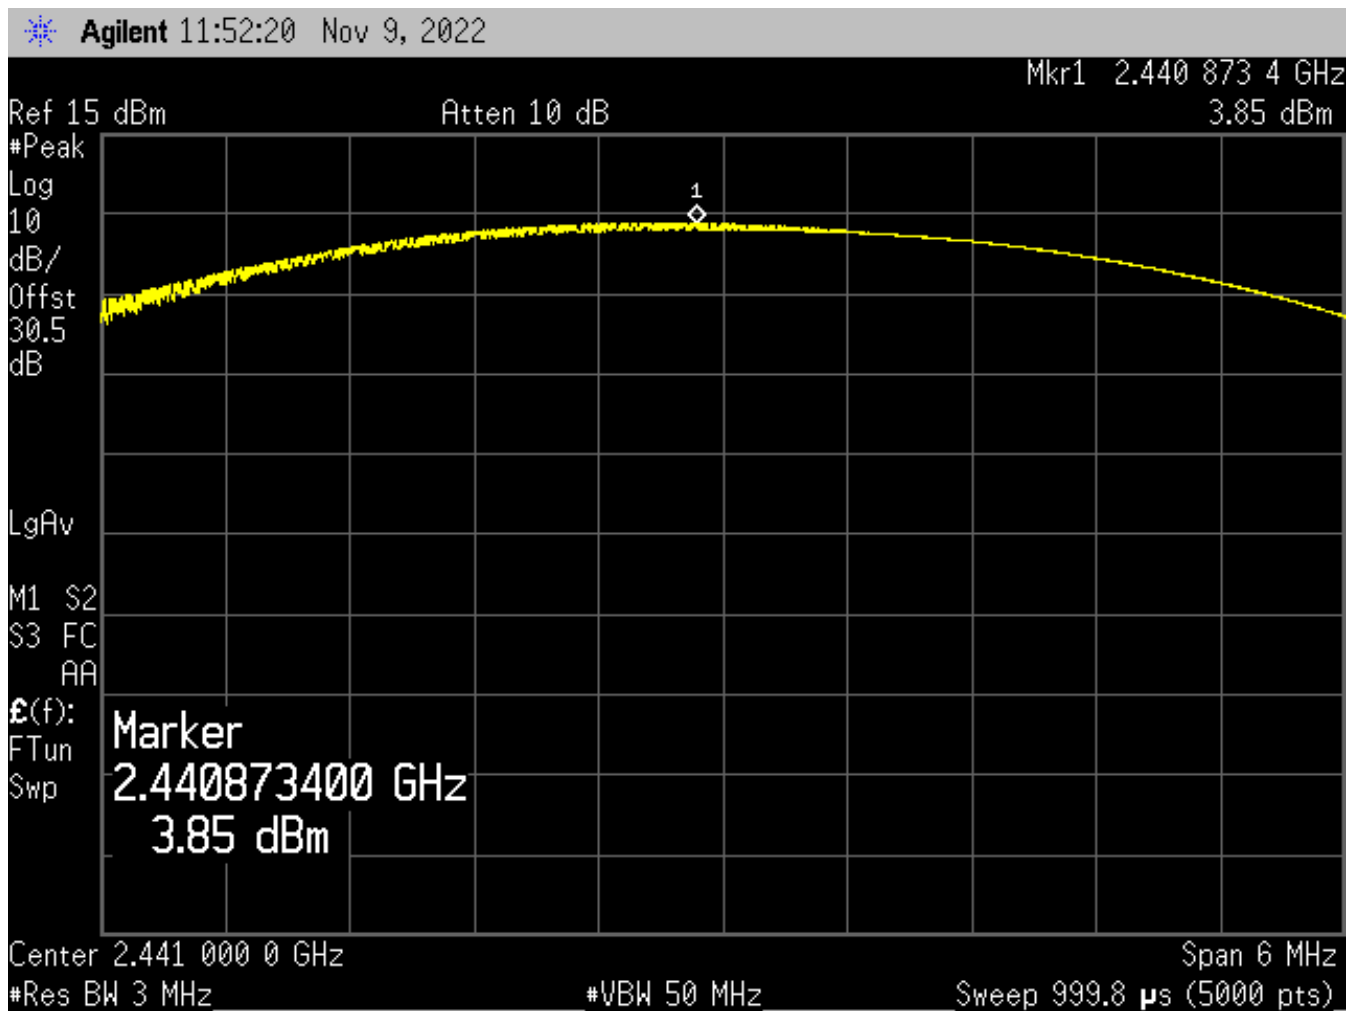






Figure 6:  $\pi/4$ DQPSK (2Mbps) – High Channel, Peak Power Output

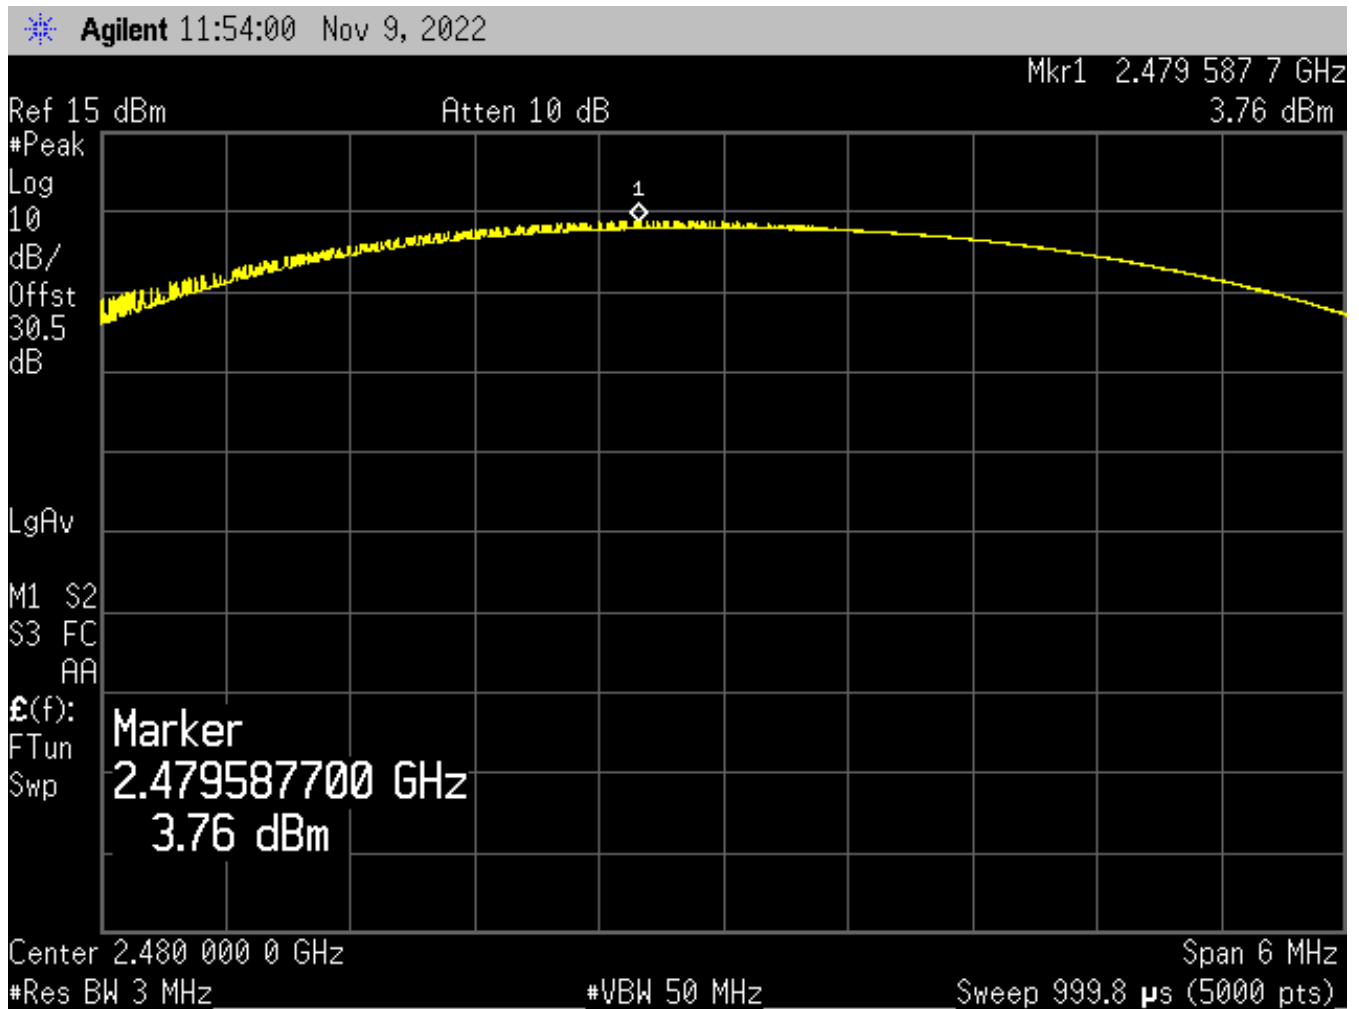




Figure 7: 8DPSK (3Mbps) – Low Channel, Peak Power Output

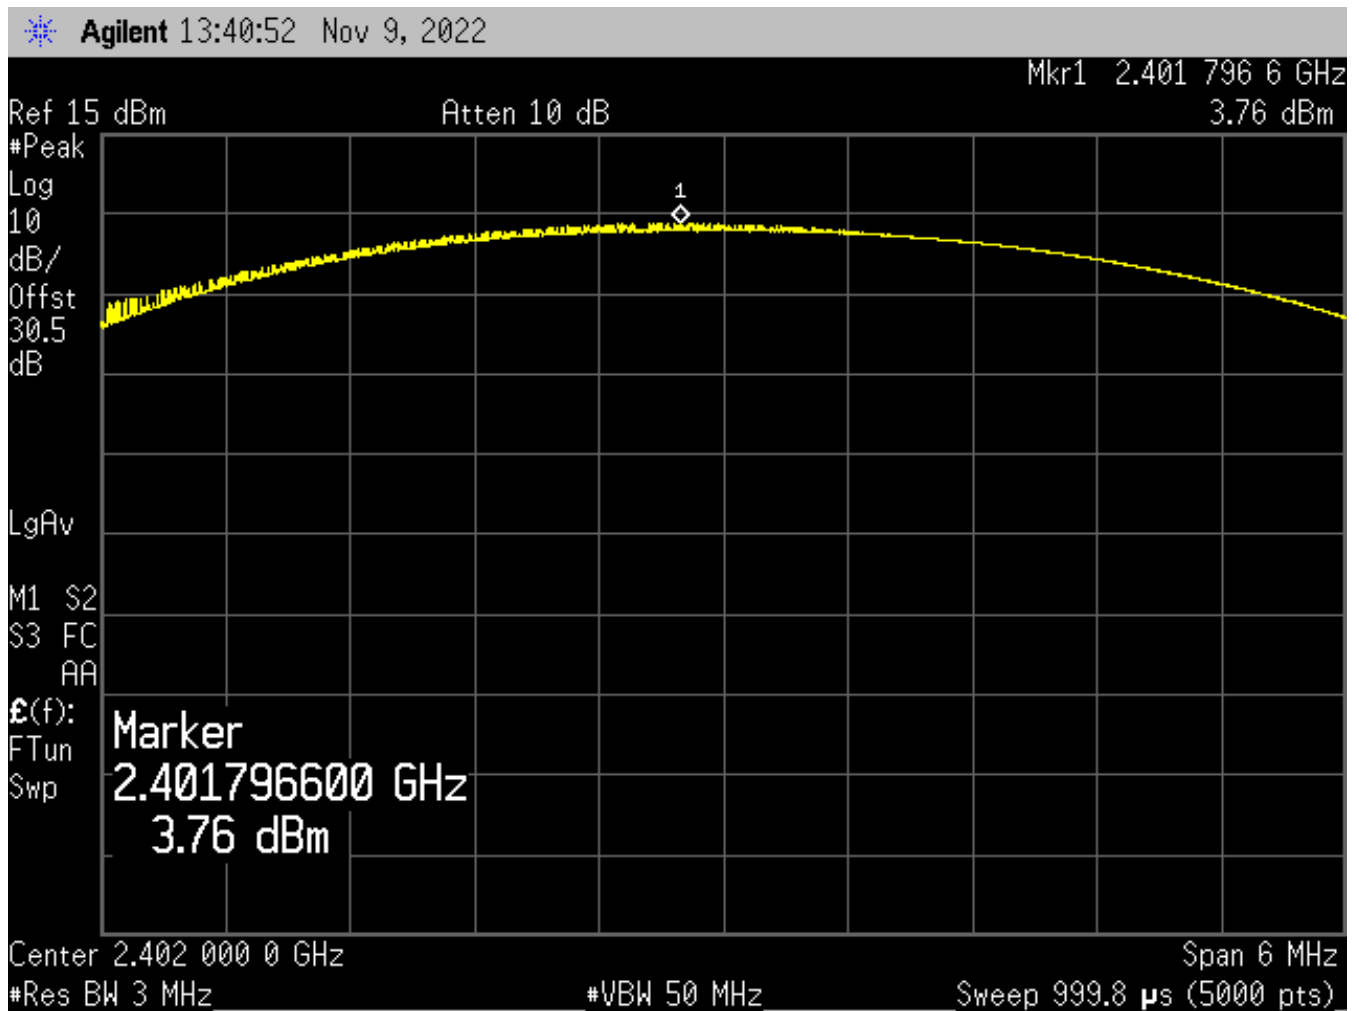




Figure 8: 8DPSK (3Mbps) – Center Channel, Peak Power Output


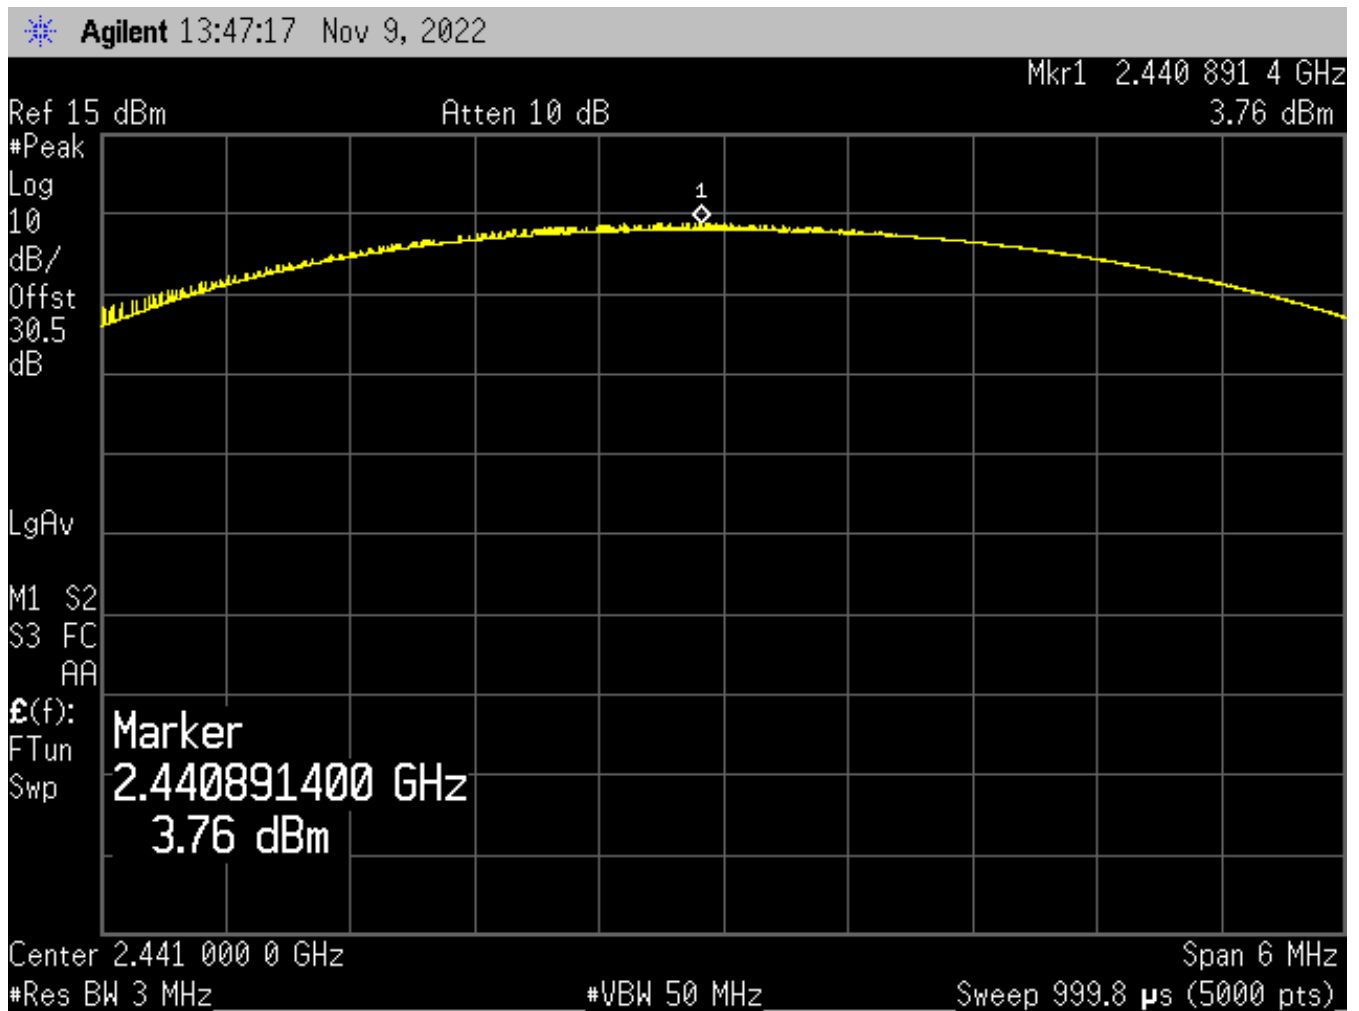




Figure 9: 8DPSK (3Mbps) – High Channel, Peak Power Output



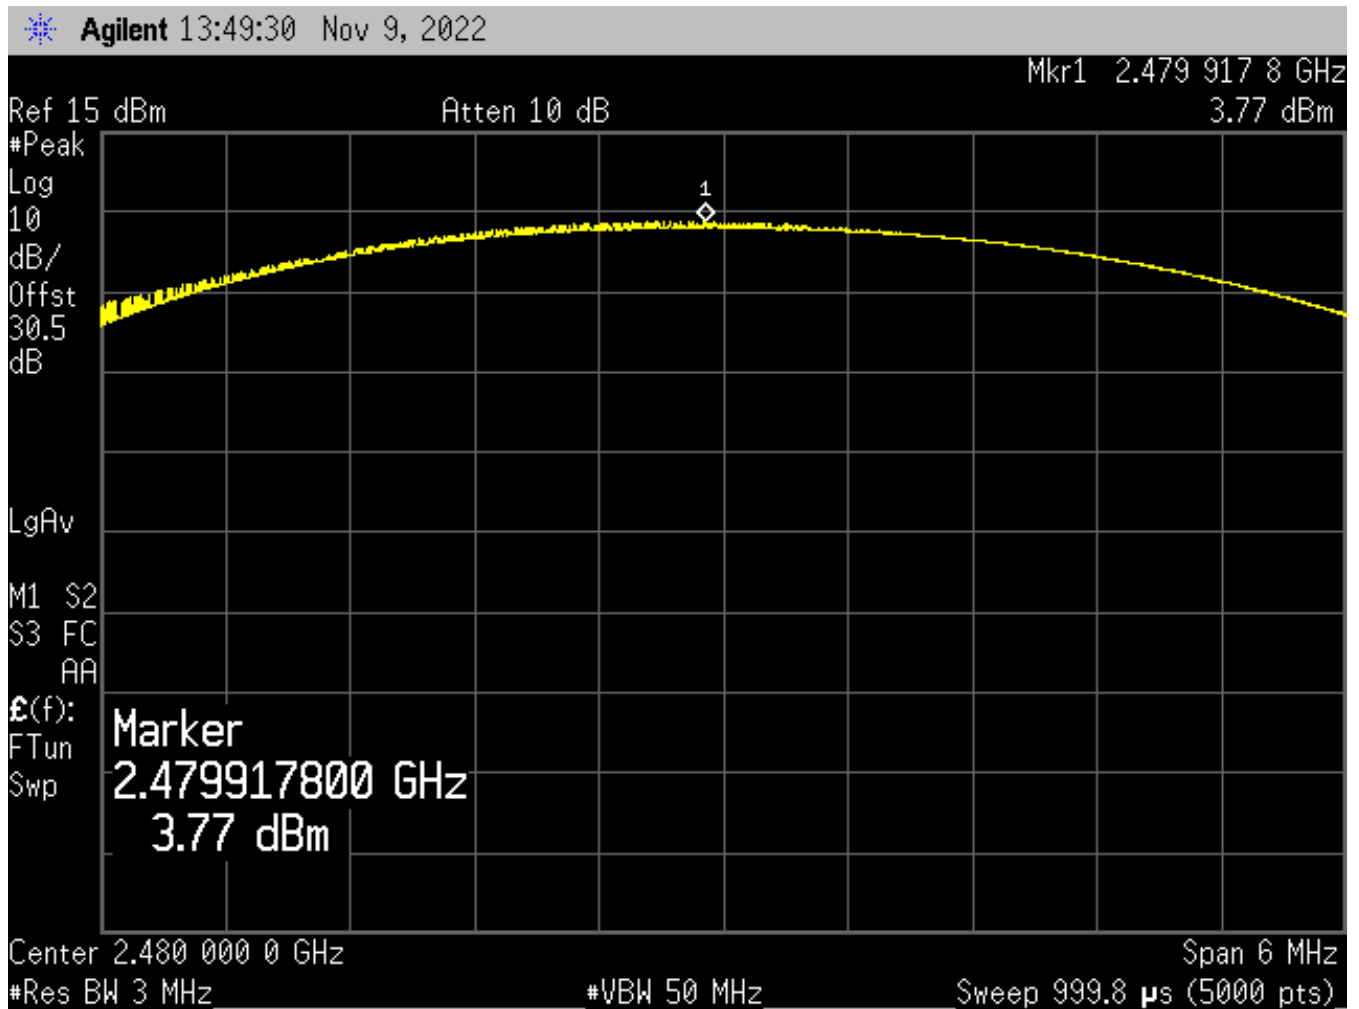

## 2.2 Channel Occupied Bandwidth

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400 MHz to 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

The occupied bandwidth of a frequency hopping channel is the 20dB emission bandwidth, measured with the hopping stopped. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies.

### 2.2.1 Measurement Method and Results

This test was performed as specified in ANSI C63.10 (2013), Section 6.9.2

The EUT was configured in a fully-modulated mode, with the hopping stopped.

Table 3: Channel Occupied Bandwidth – Test Results

Modulation	Mode (Data Rate)	Frequency (MHz)	20dB Bandwidth	99% Bandwidth
GFSK	DH5 (1Mbps)	2402 MHz	861.2 kHz	839.7 kHz
		2441 MHz	862.2 kHz	840.5 kHz
		2480 MHz	862.3 kHz	849.0 kHz
$\pi/4$ DQPSK	2DH5 (2Mbps)	2402 MHz	1.19 MHz	1.12 MHz
		2441 MHz	1.19 MHz	1.12 MHz
		2480 MHz	1.19 MHz	1.12 MHz
8DPSK	3DH5 (3Mbps)	2402 MHz	1.20 MHz	1.13 MHz
		2441 MHz	1.23 MHz	1.13 MHz
		2480 MHz	1.23 MHz	1.13 MHz



Figure 10: GFSK (1Mbps) – Low Channel, Occupied Bandwidth

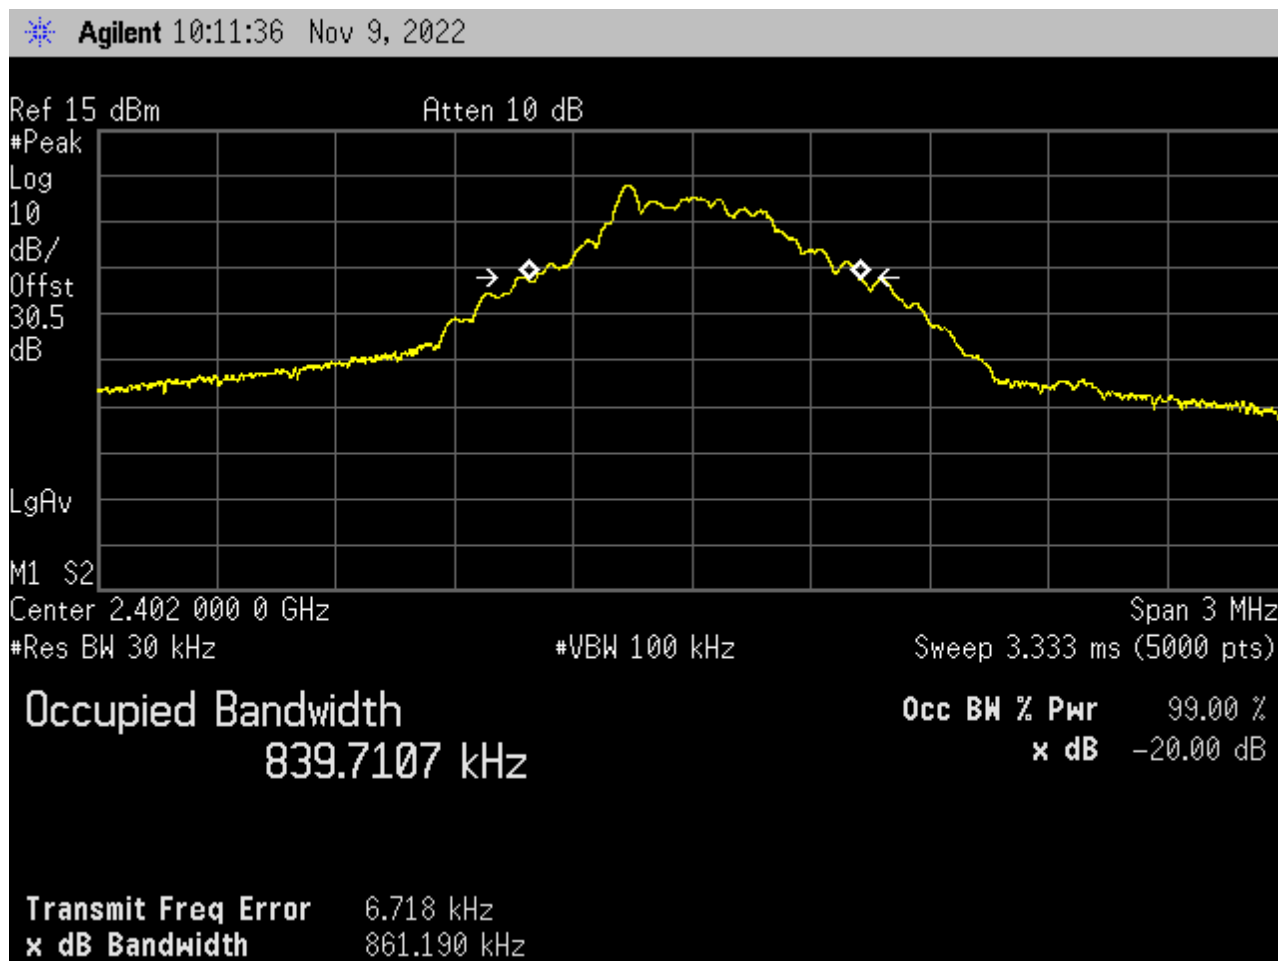




Figure 11: GFSK (1Mbps) – Center Channel, Occupied Bandwidth

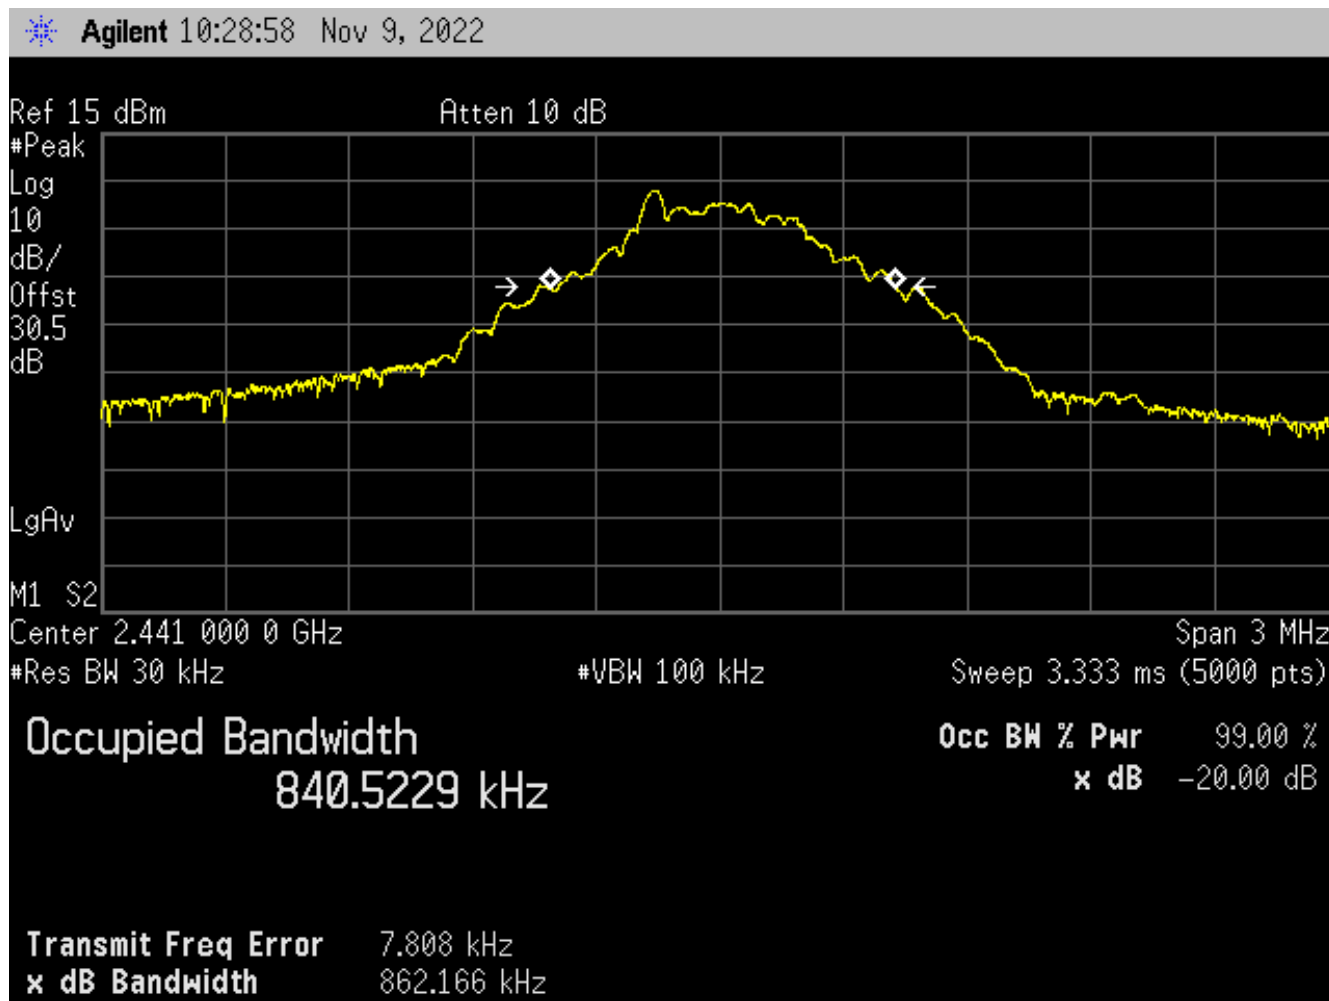




Figure 12: GFSK (1Mbps) – High Channel, Occupied Bandwidth

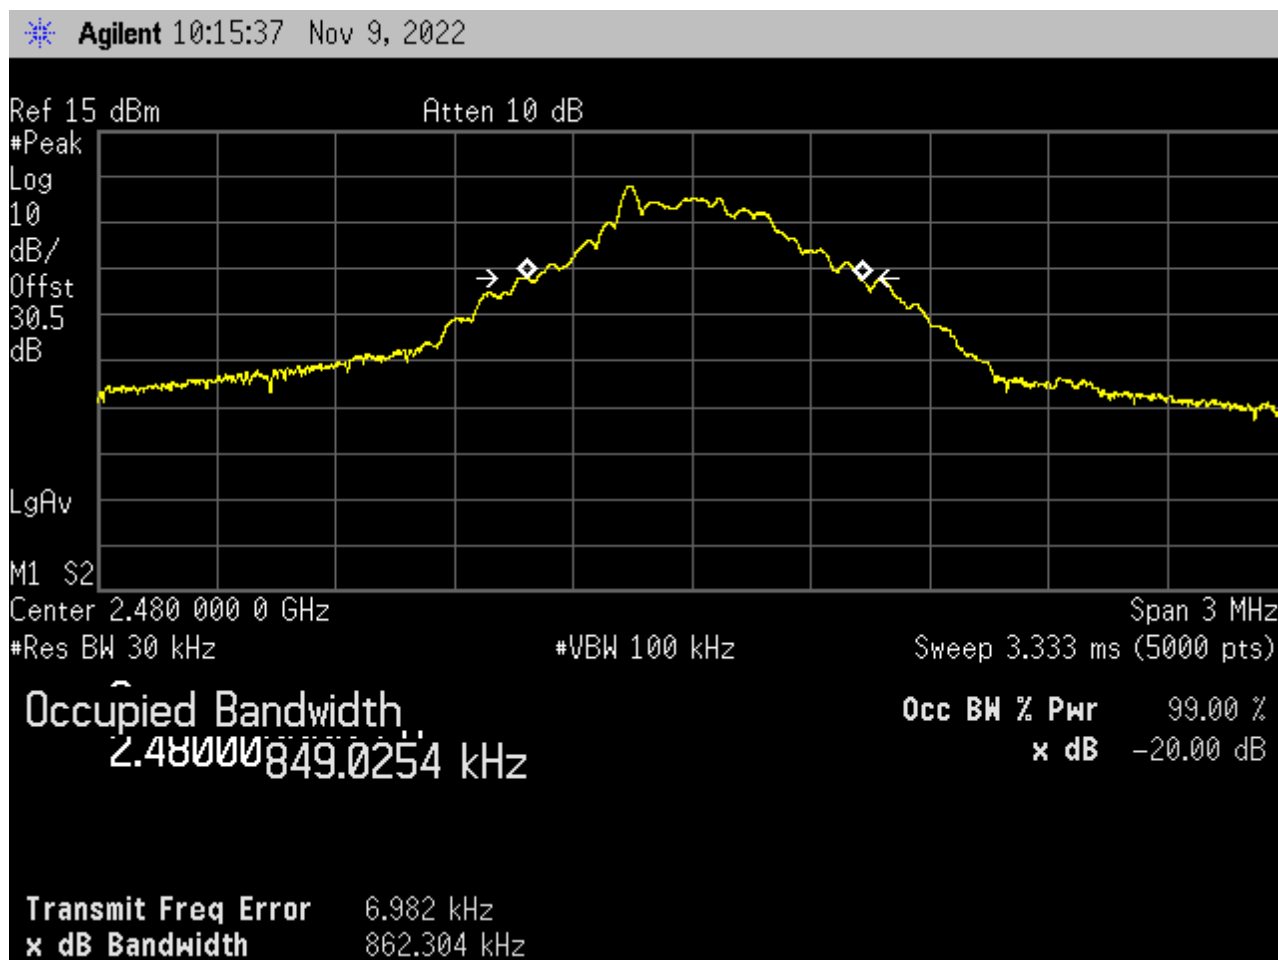






Figure 13:  $\pi/4$ DQPSK (2Mbps) – Low Channel, Occupied Bandwidth

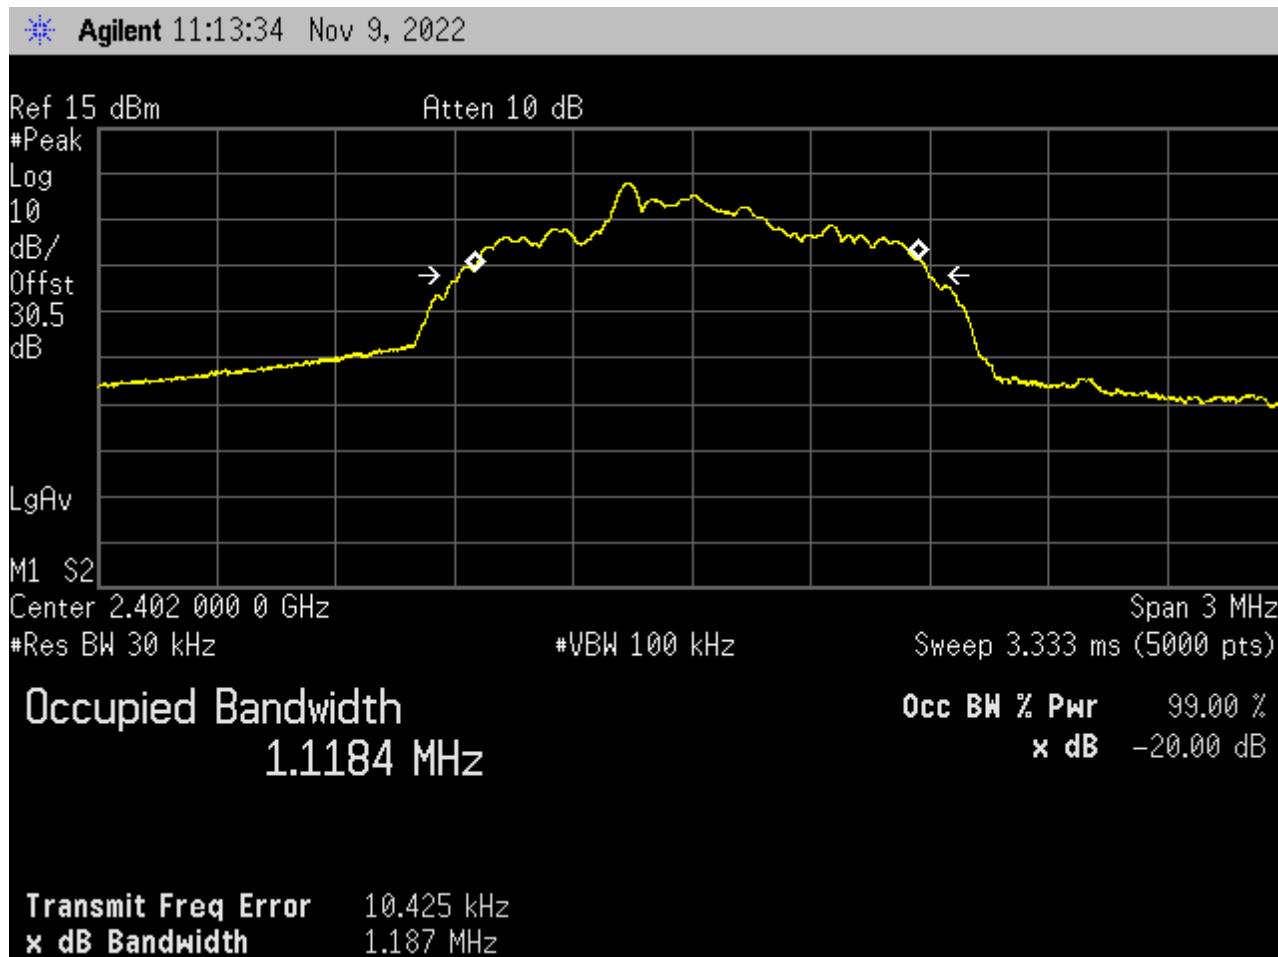




Figure 14:  $\pi/4$ DQPSK (2Mbps) – Center Channel, Occupied Bandwidth

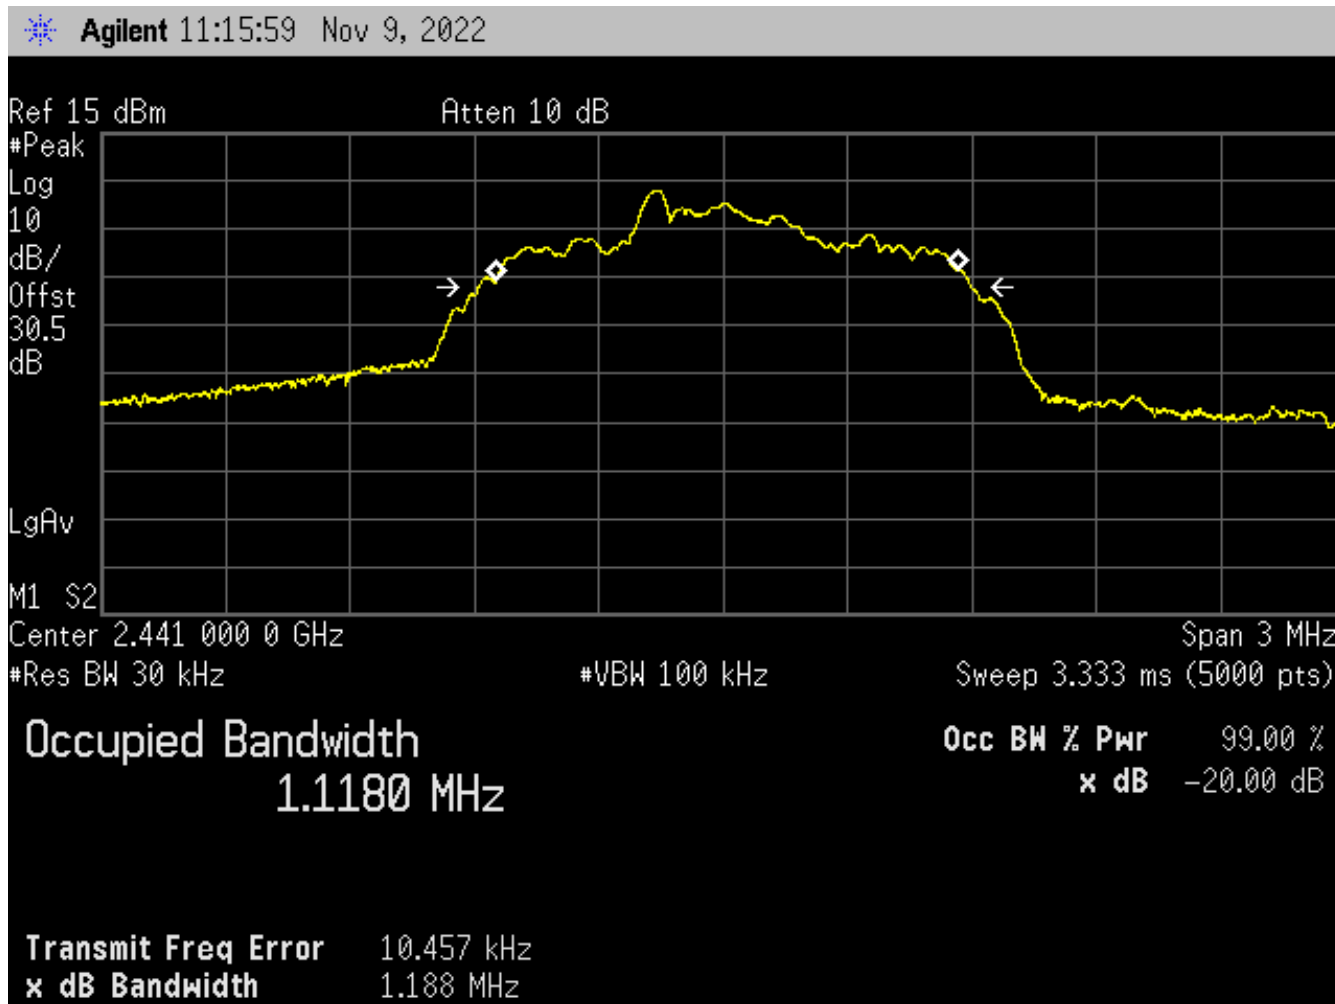




Figure 15:  $\pi/4$ DQPSK (2Mbps) – High Channel, Occupied Bandwidth

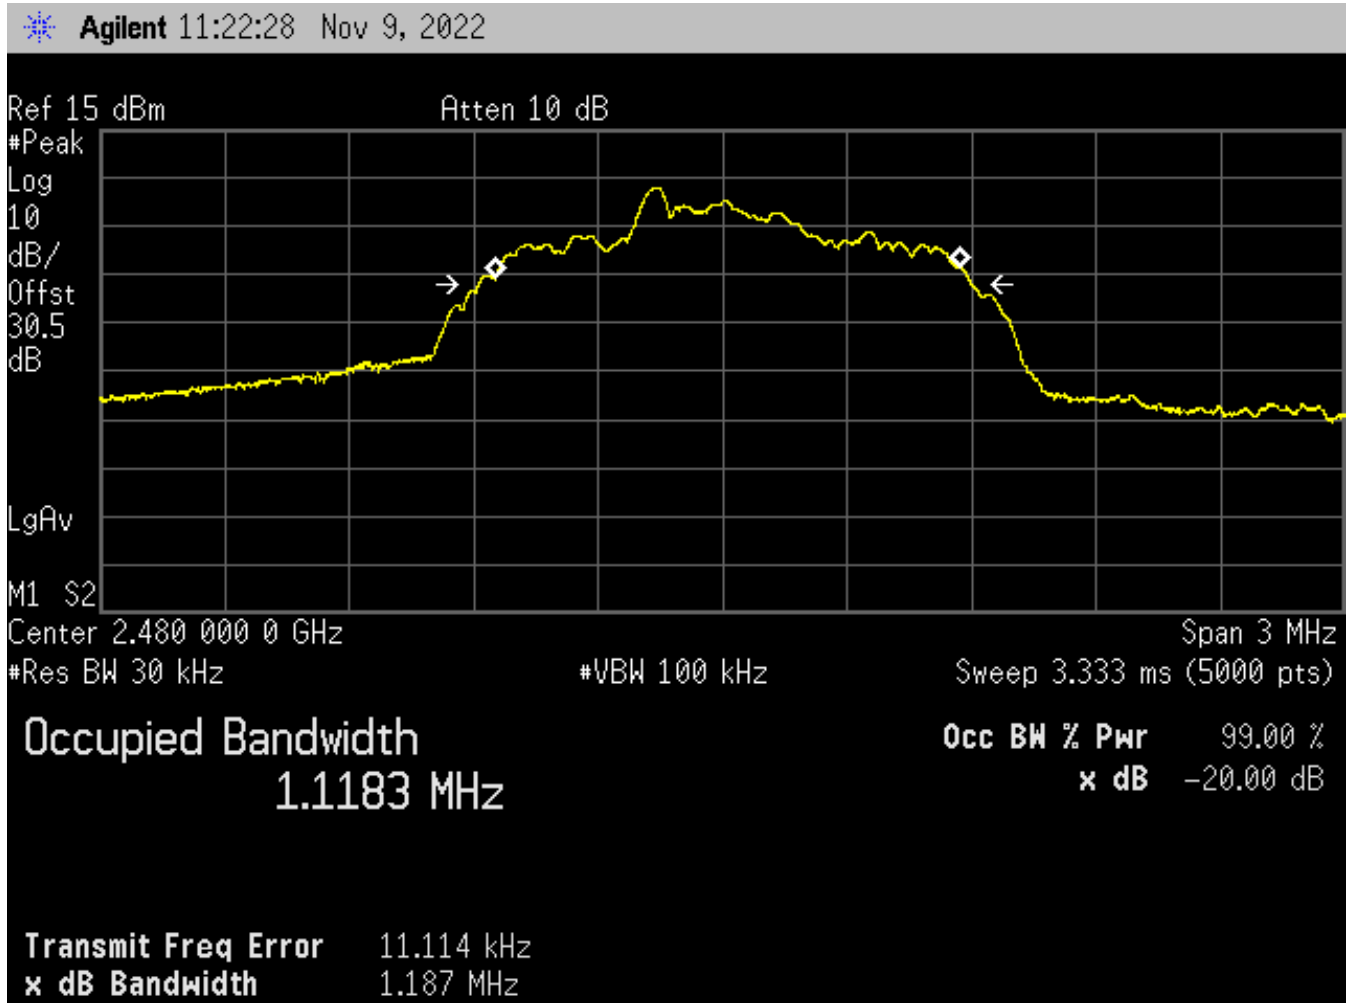




Figure 16: 8DPSK (3Mbps) – Low Channel, Occupied Bandwidth

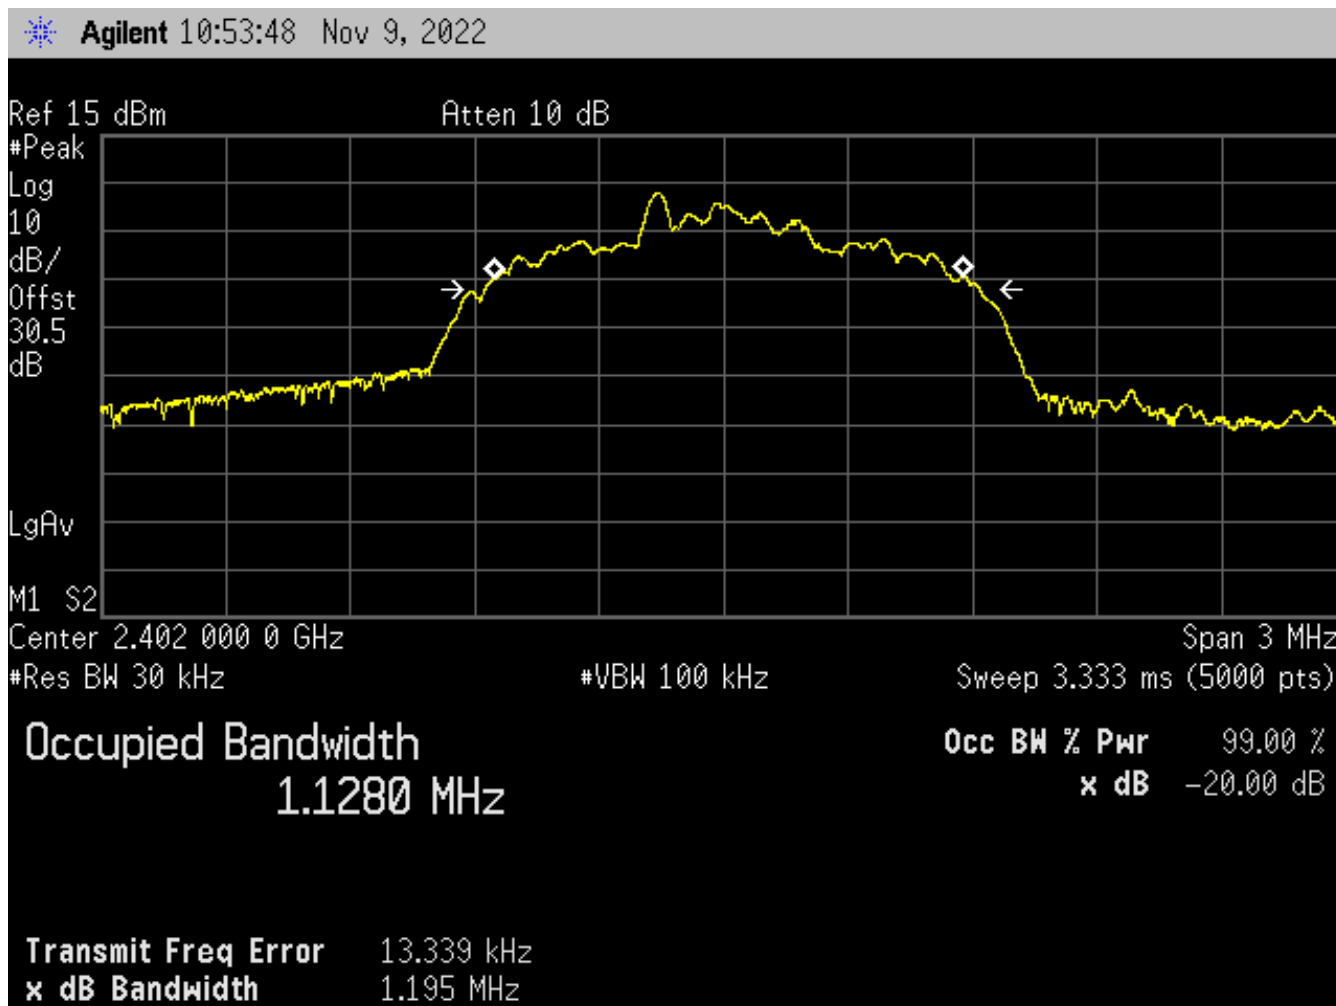




Figure 17: 8DPSK (3Mbps) – Center Channel, Occupied Bandwidth


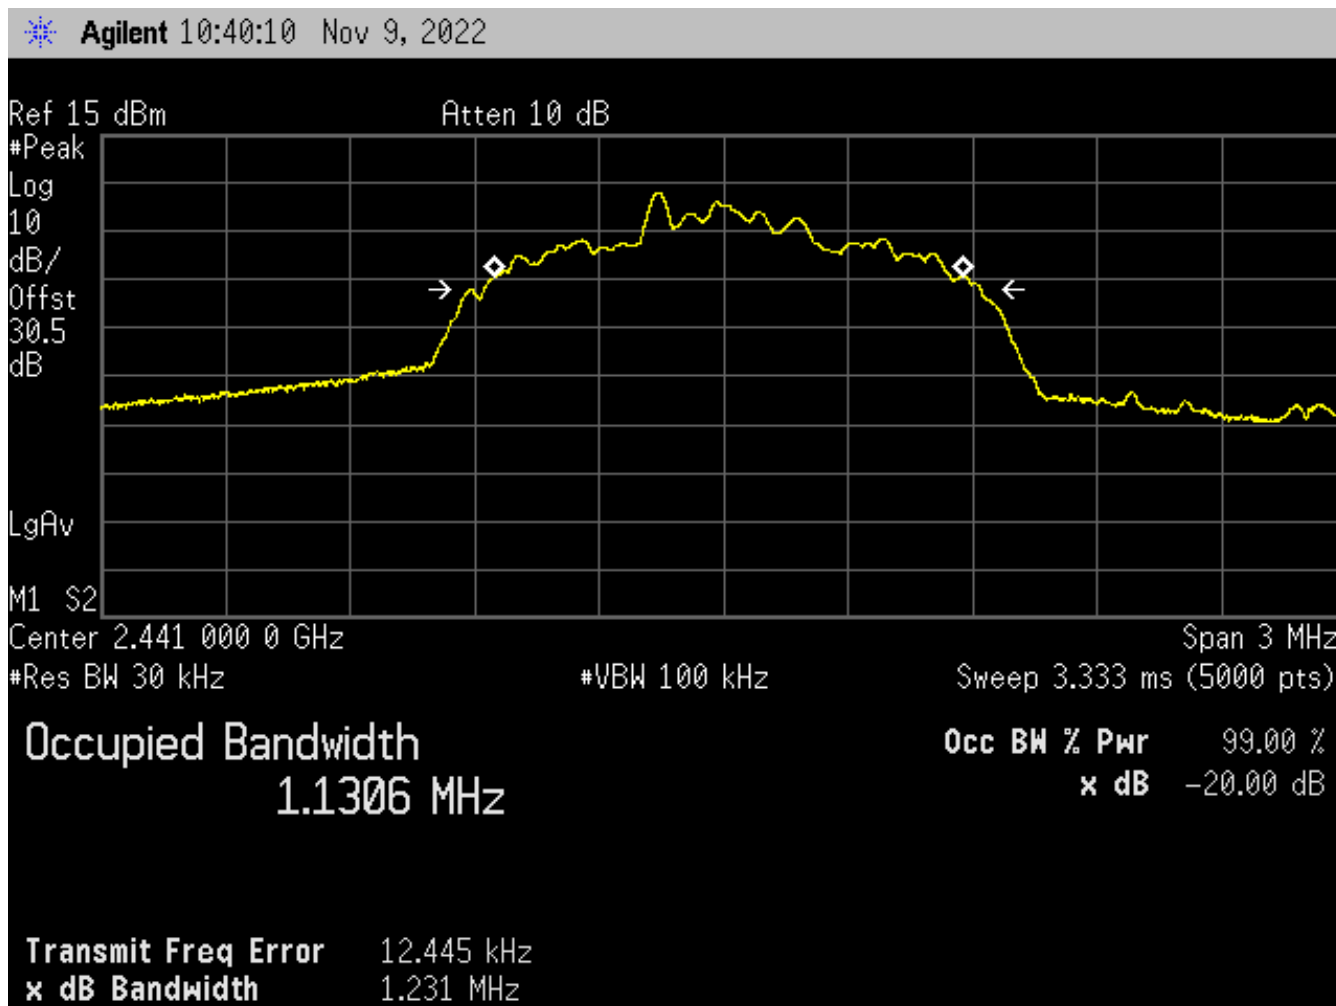




Figure 18: 8DPSK (3Mbps) – High Channel, Occupied Bandwidth



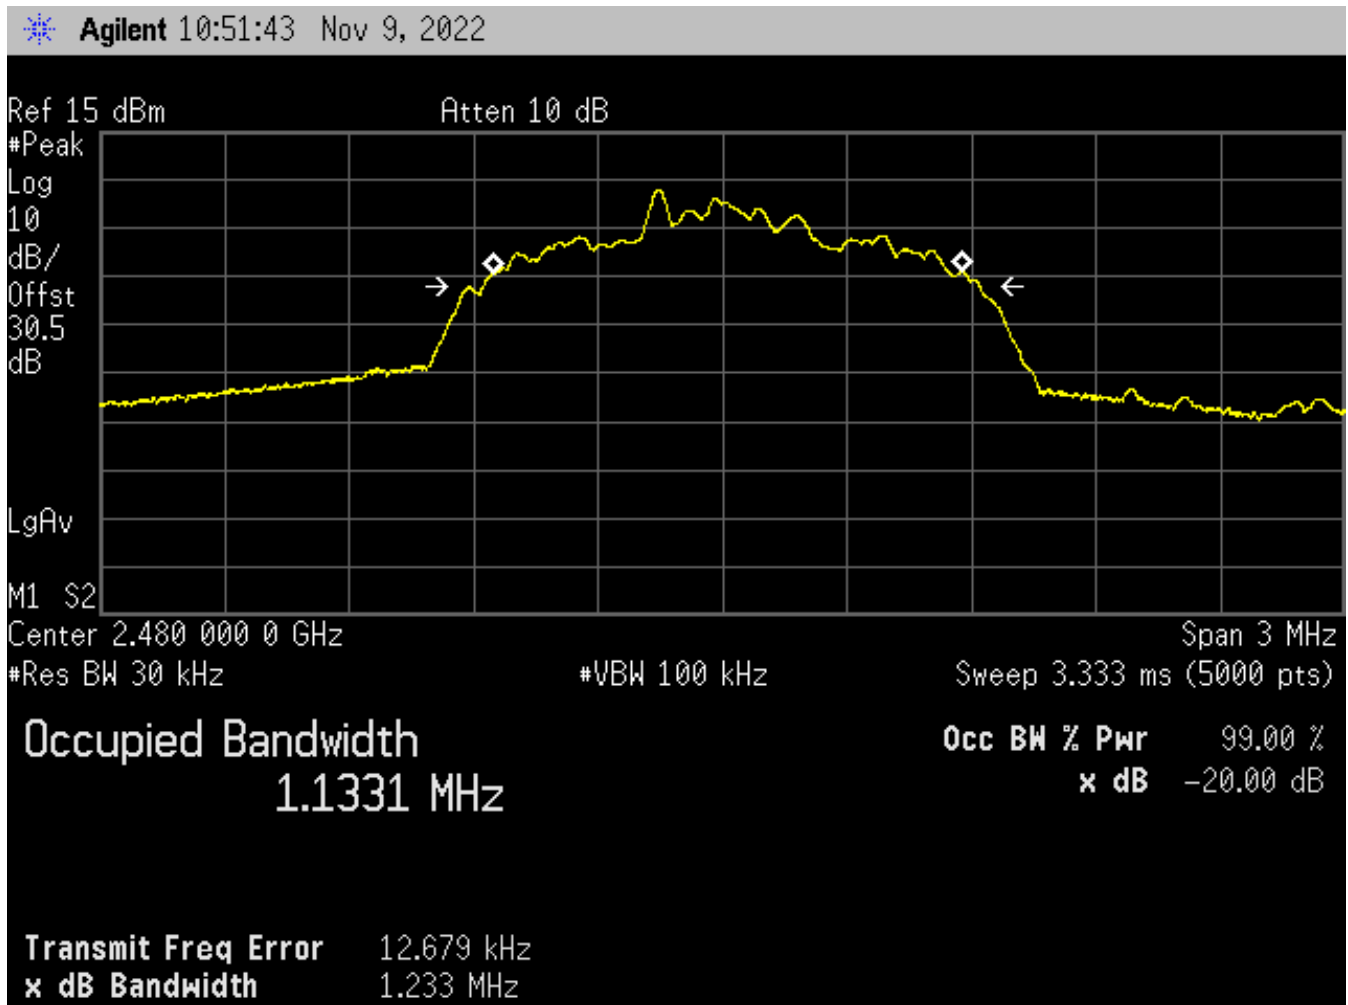

## 2.3 Number of Channels Used

Frequency hopping systems in the 2400 MHz to 2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 400 ms within a period of 400 ms multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 2.3.1 Measurement Method and Results

This test was performed as specified in ANSI C63.10 (2013), Section 7.8.1 and 7.8.3

The EUT was configured in a fully-modulated mode, with the hopping enabled.

Table 4: Number of Channels Used – Test Results

<b>Modulation</b>	<b>Mode (Data Rate)</b>	<b>EUT Channels Used</b>	<b>Requirement</b>
GFSK	DH5 (1Mbps)	79 Channels	15 Channels
$\pi/4$ DQPSK	2DH5 (2Mbps)	79 Channels	15 Channels
8DPSK	3DH5 (3Mbps)	79 Channels	15 Channels



Figure 19: GFSK (1Mbps) – Number of Channels Used, Plot 1

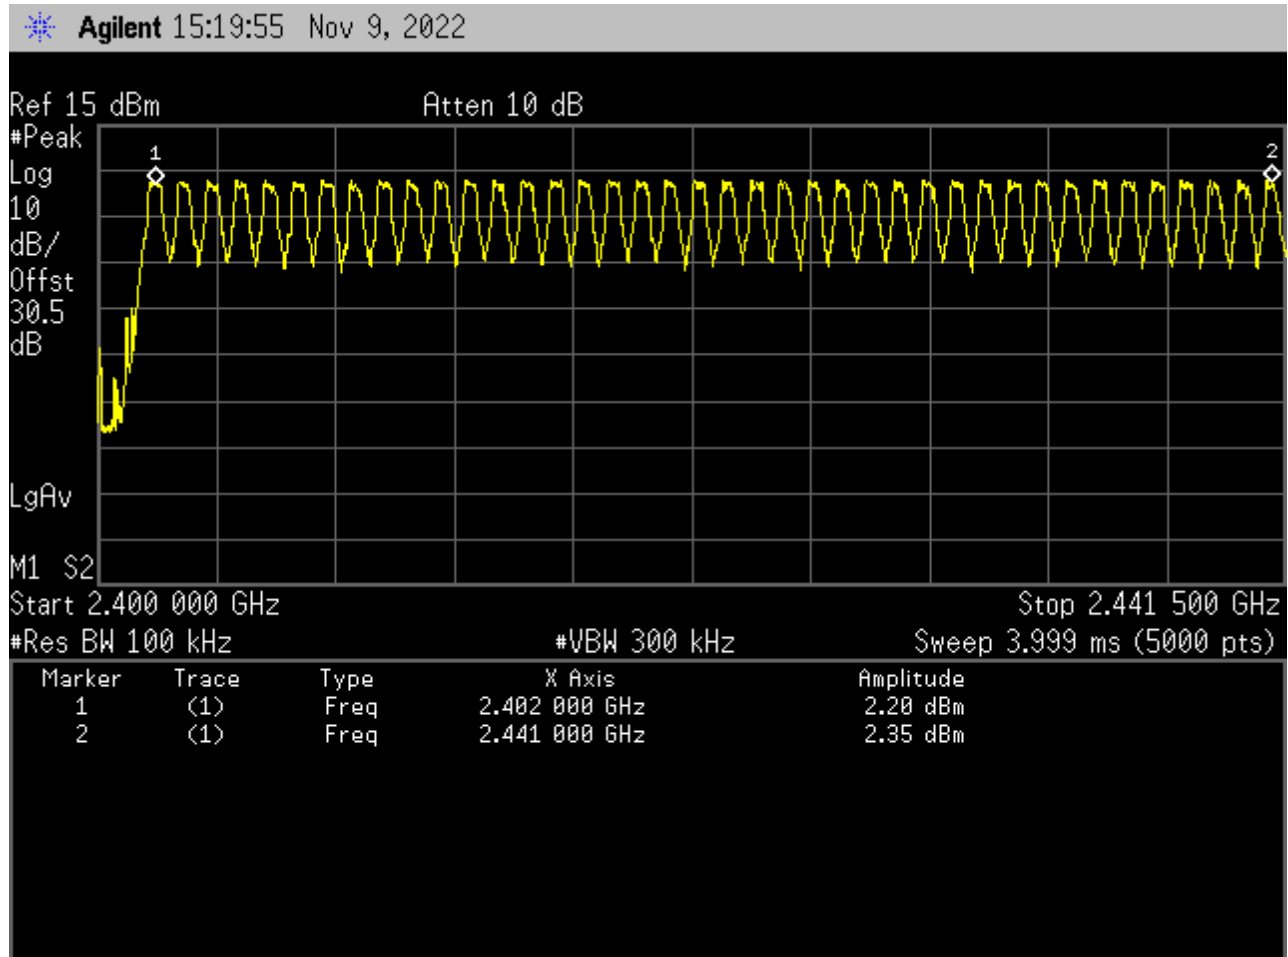






Figure 20: GFSK (1Mbps) – Number of Channels Used, Plot 2

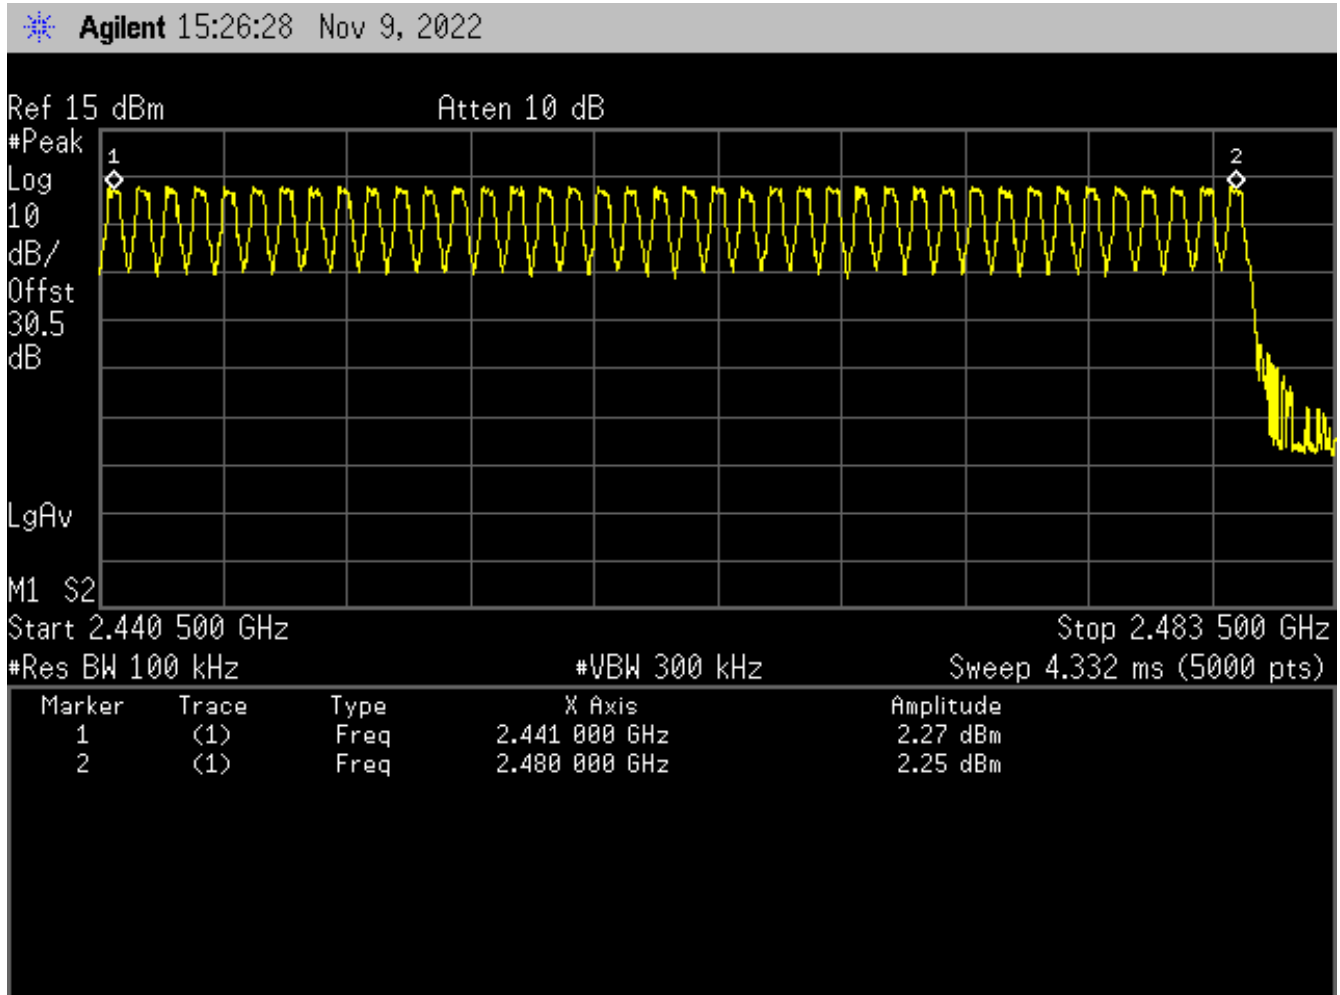




Figure 21:  $\pi/4$ DQPSK (2Mbps) – Number of Channels Used, Plot 1

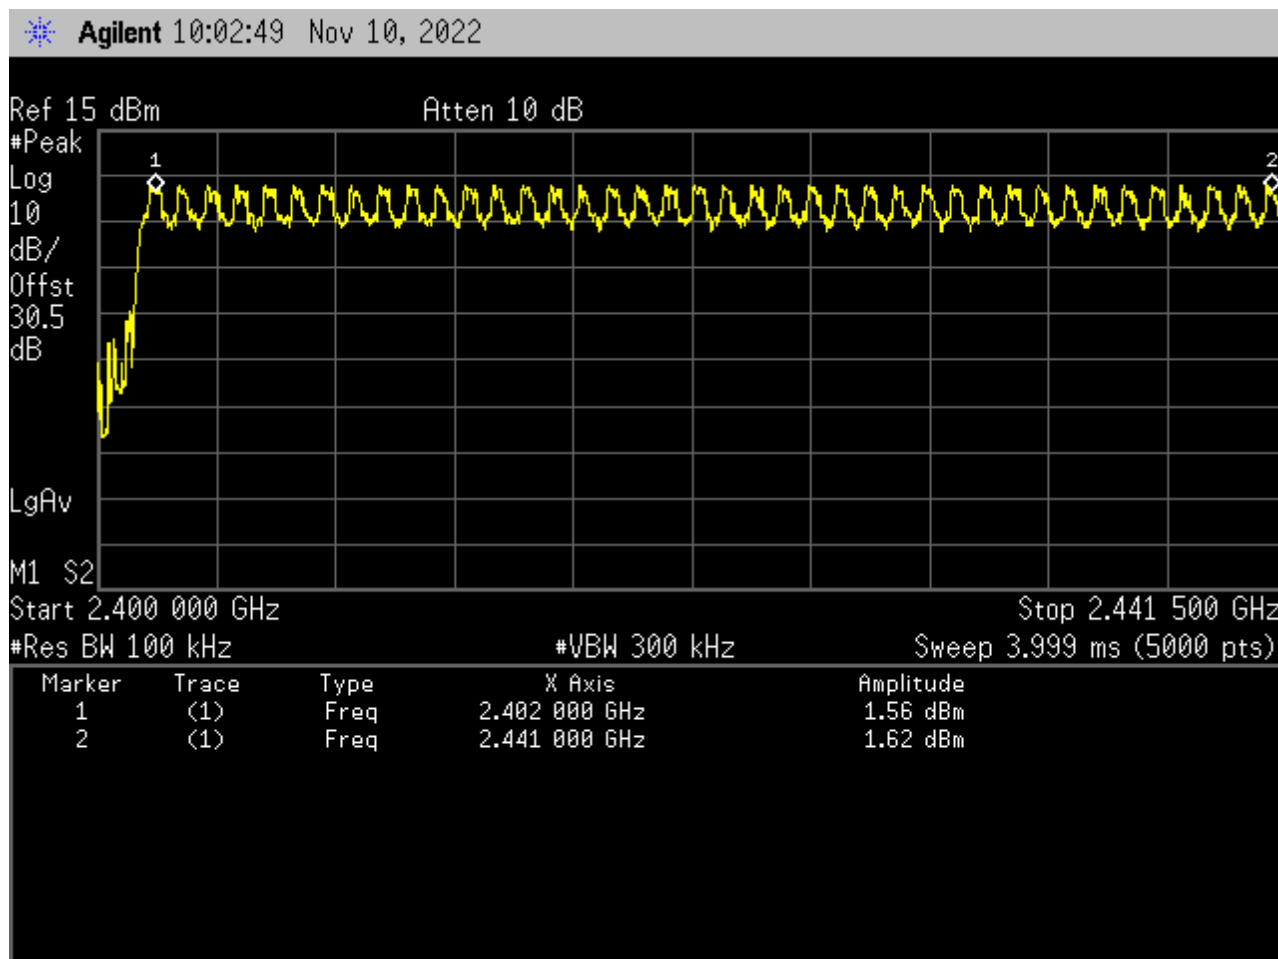




Figure 22:  $\pi/4$ DQPSK (2Mbps) – Number of Channels Used, Plot 2

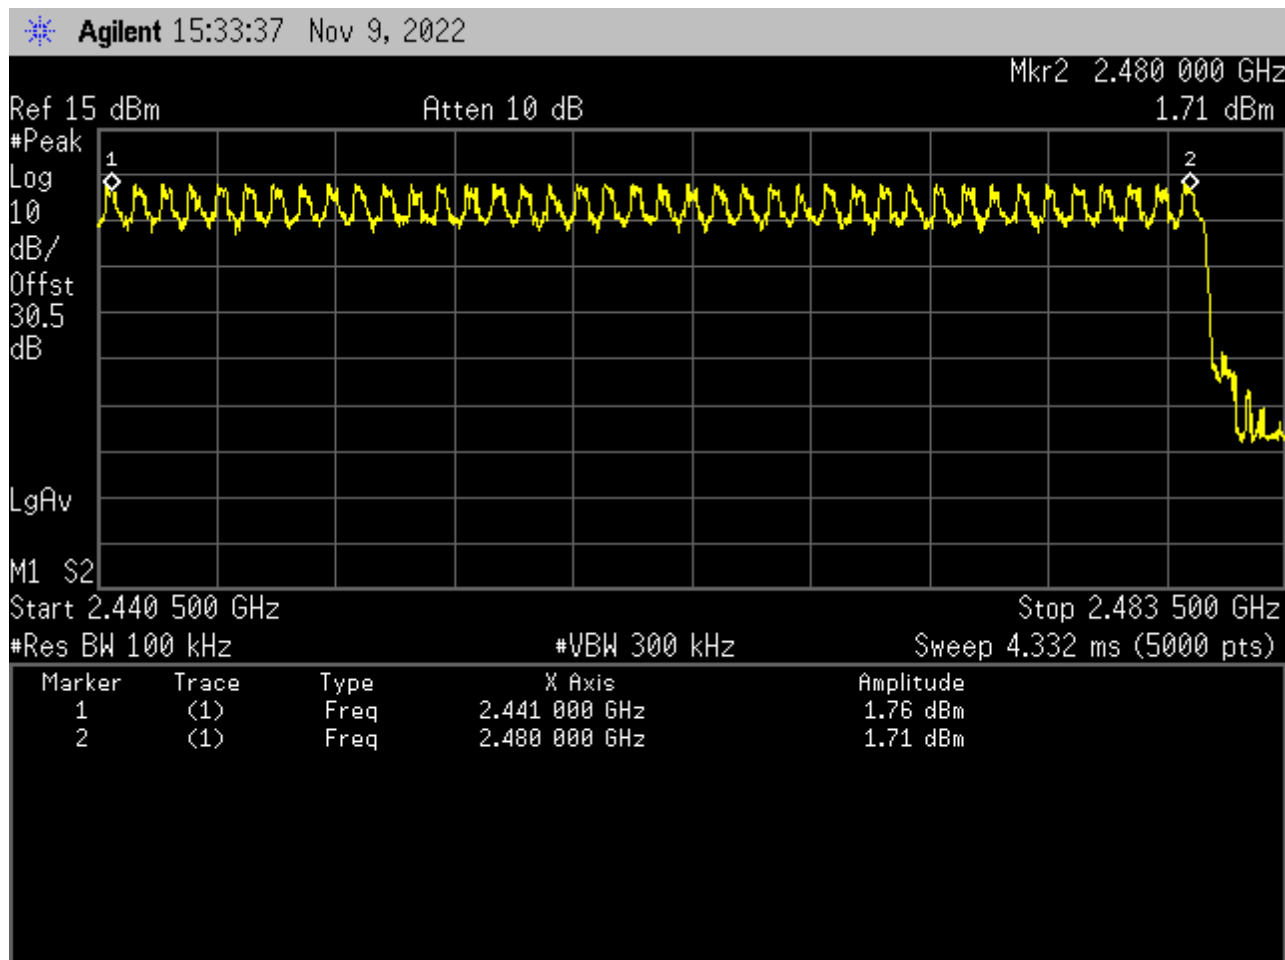




Figure 23: 8DPSK (3Mbps) – Number of Channels Used, Plot 1


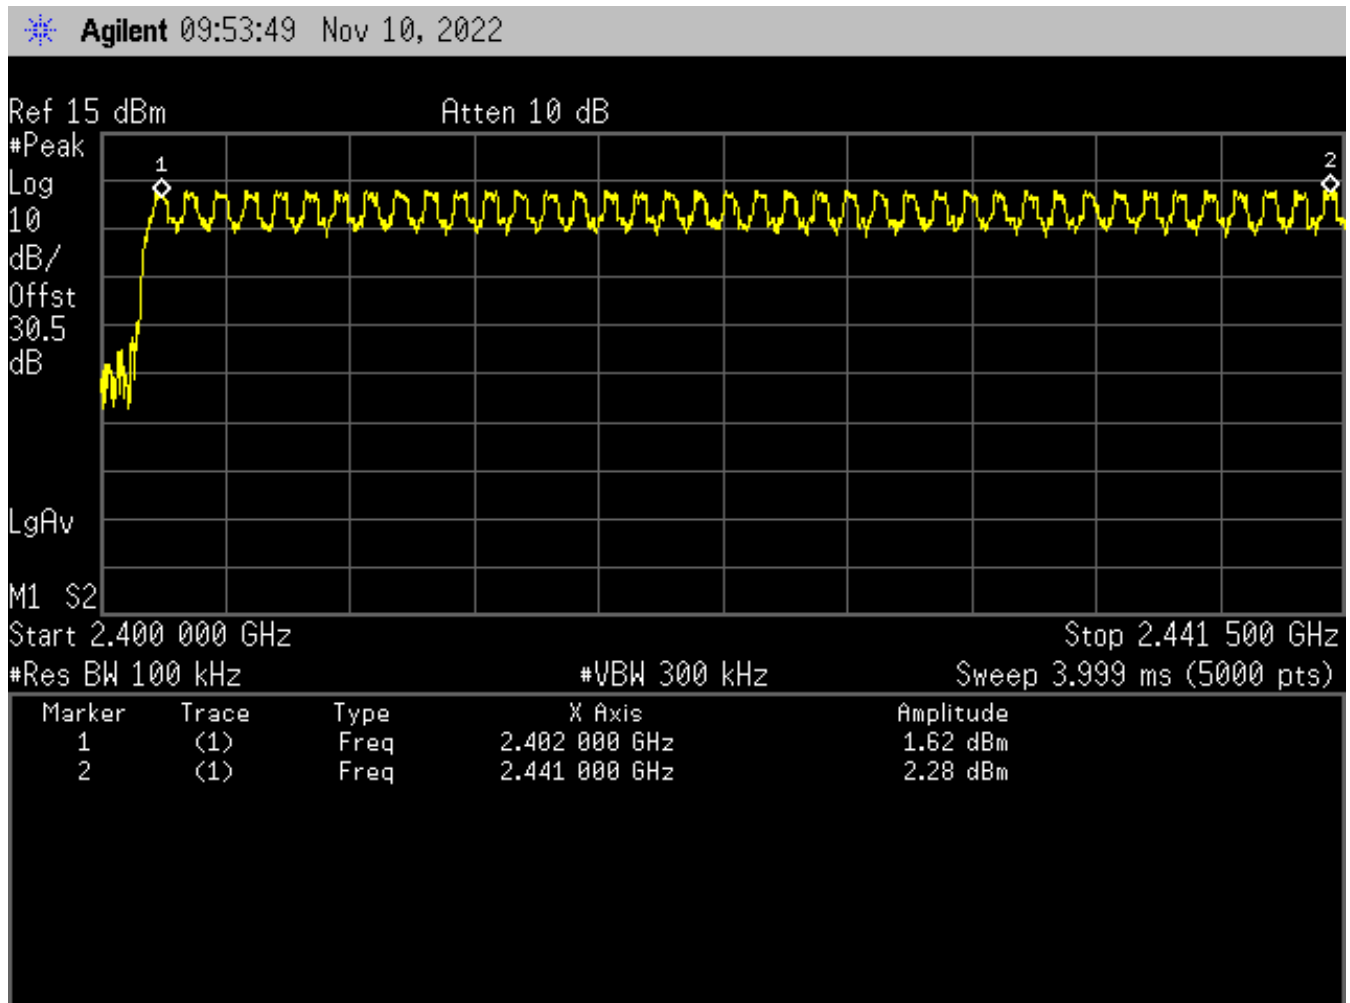




Figure 24: 8DPSK (3Mbps) – Number of Channels Used, Plot 2



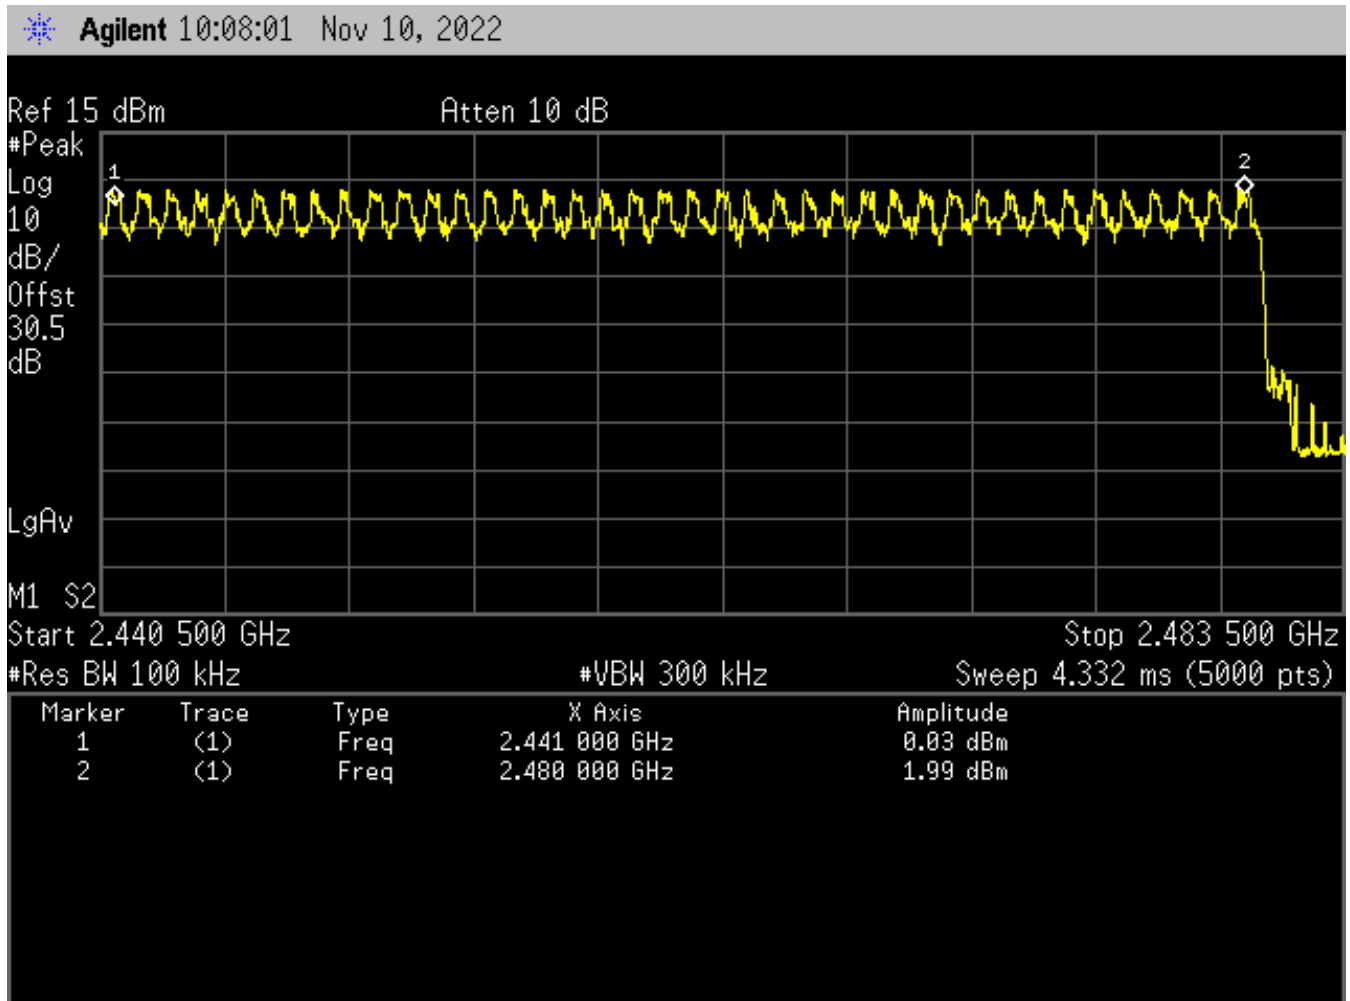

## 2.4 Time of Occupancy (Dwell Time)

Frequency hopping systems in the 2400 MHz to 2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 400 ms within a period of 400 ms multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 2.4.1 Measurement Method and Results

This test was performed as specified in ANSI C63.10 (2013), Section 7.8.4.

The EUT was configured in a fully-modulated mode, with the hopping enabled.

The limits prescribed in this section shall be defined as follows:

$$79_{\text{CHAN}} * 0.4 \text{ second} = 31.6 \text{ second period}$$

$$\text{Time of Occupancy Limit} = 0.4\text{s}/31.6\text{s}$$

A multiplier factor of 6.32 shall be employed to extrapolate the total average time of occupancy of any channel over a 31.6 second period. This factor is based on a 5 second transmitter evaluation.


$$5 * 6.32 = 31.6$$

Table 5: Time of Occupancy – Test Results

Modulation	Transmissions in 5 seconds	Transmissions in 31.6 seconds	Single Transmission Period	EUT Occupancy Dwell	Occupancy Limit
GFSK	14	89	2.91 ms	258.9 ms	400 ms
$\pi/4$ DQPSK	16	101	2.95 ms	297.9 ms	400 ms
8DPSK	16	101	2.95 ms	297.9 ms	400 ms



Figure 25: GFSK Transmitter 5-Second Evaluation (Hopping)

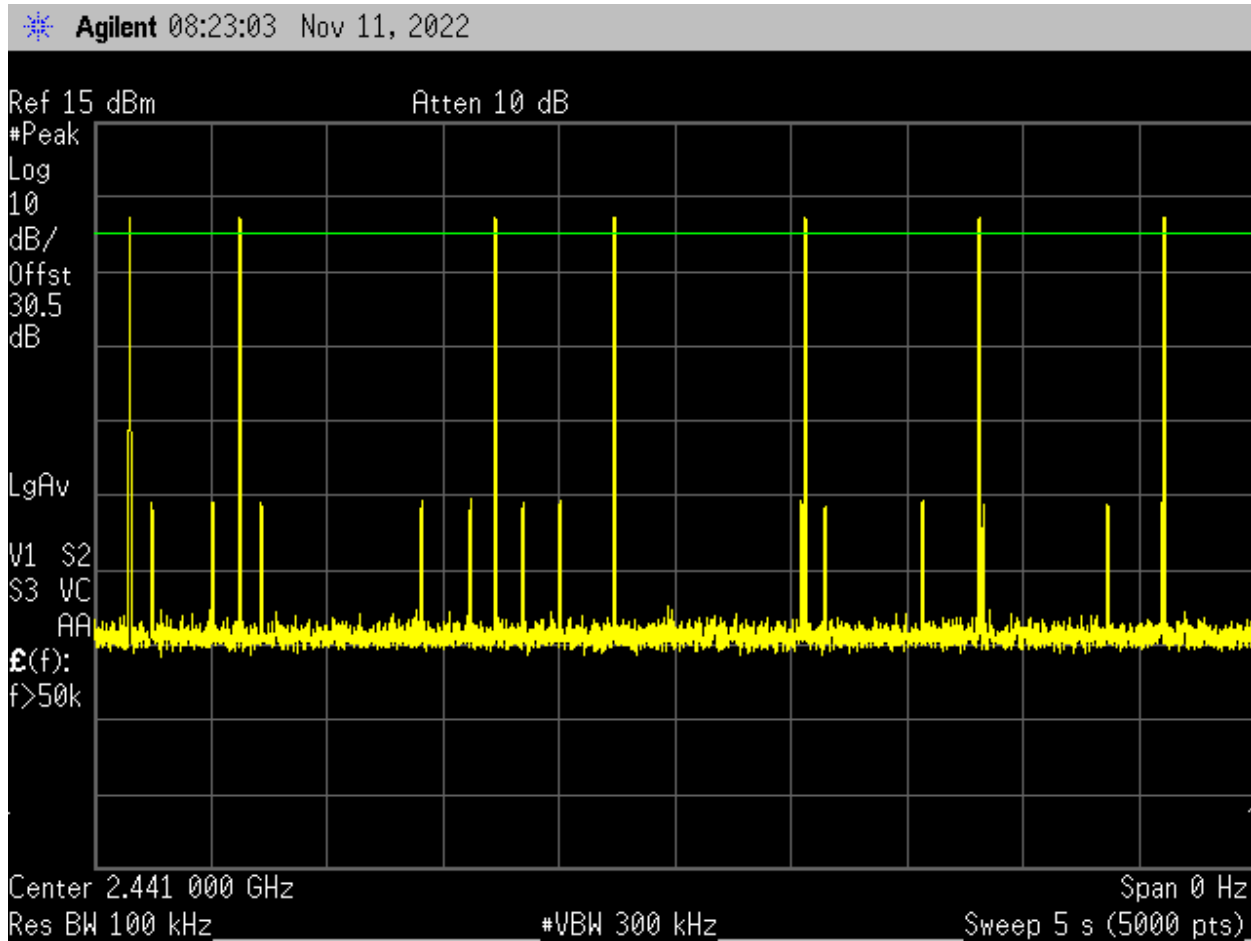

\* in this case, it appears that there may only be seven full-power transmitter hops; however, after further investigation there are actually 14 individual transmitter hops in a given 5-second evaluation period. See next plot for detailed measurement.



Figure 26: GFSK Transmitter Evaluation (Hopping) – Single Dwell Time


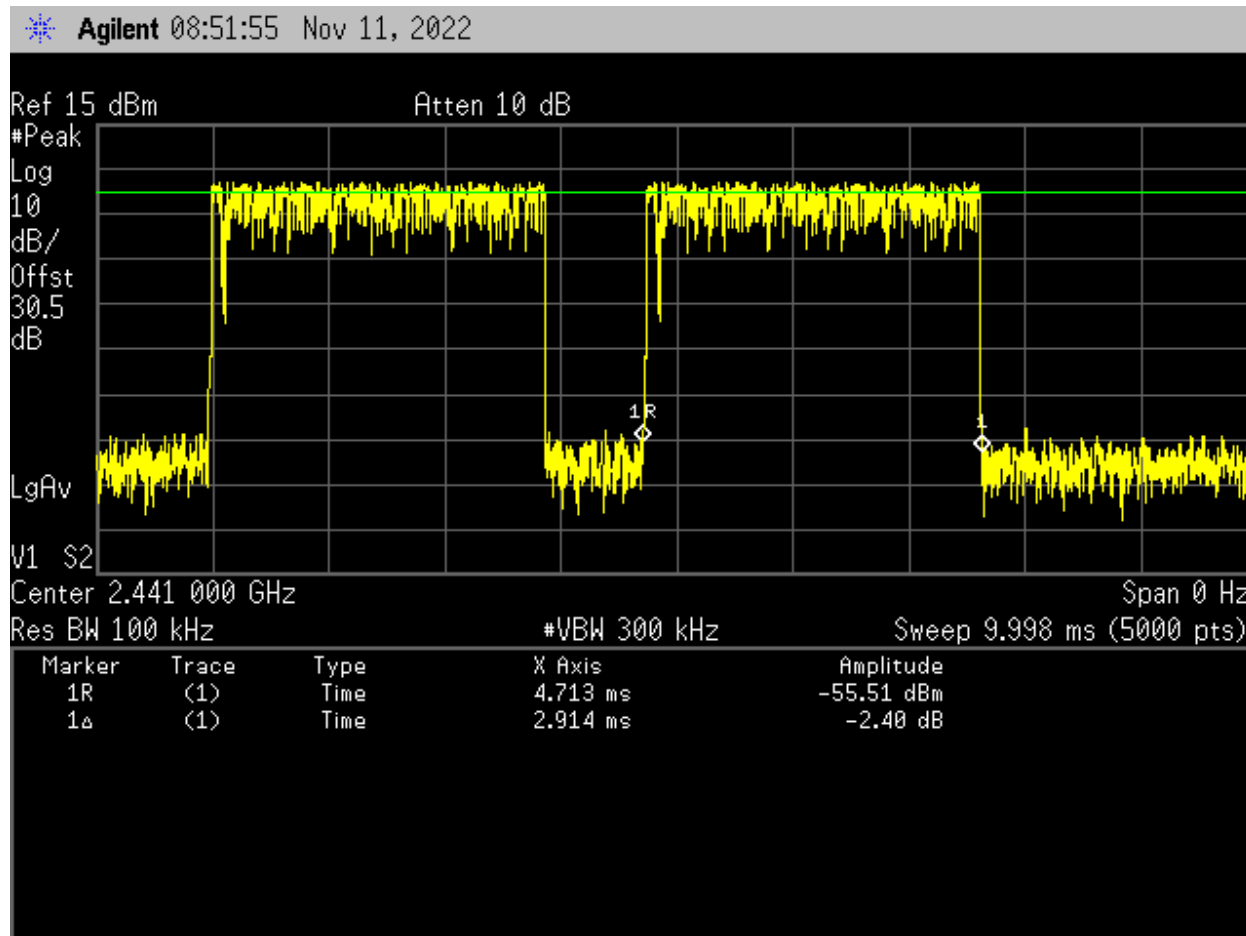






Figure 27:  $\pi/4$ DQPSK Transmitter 5-Second Evaluation (Hopping)

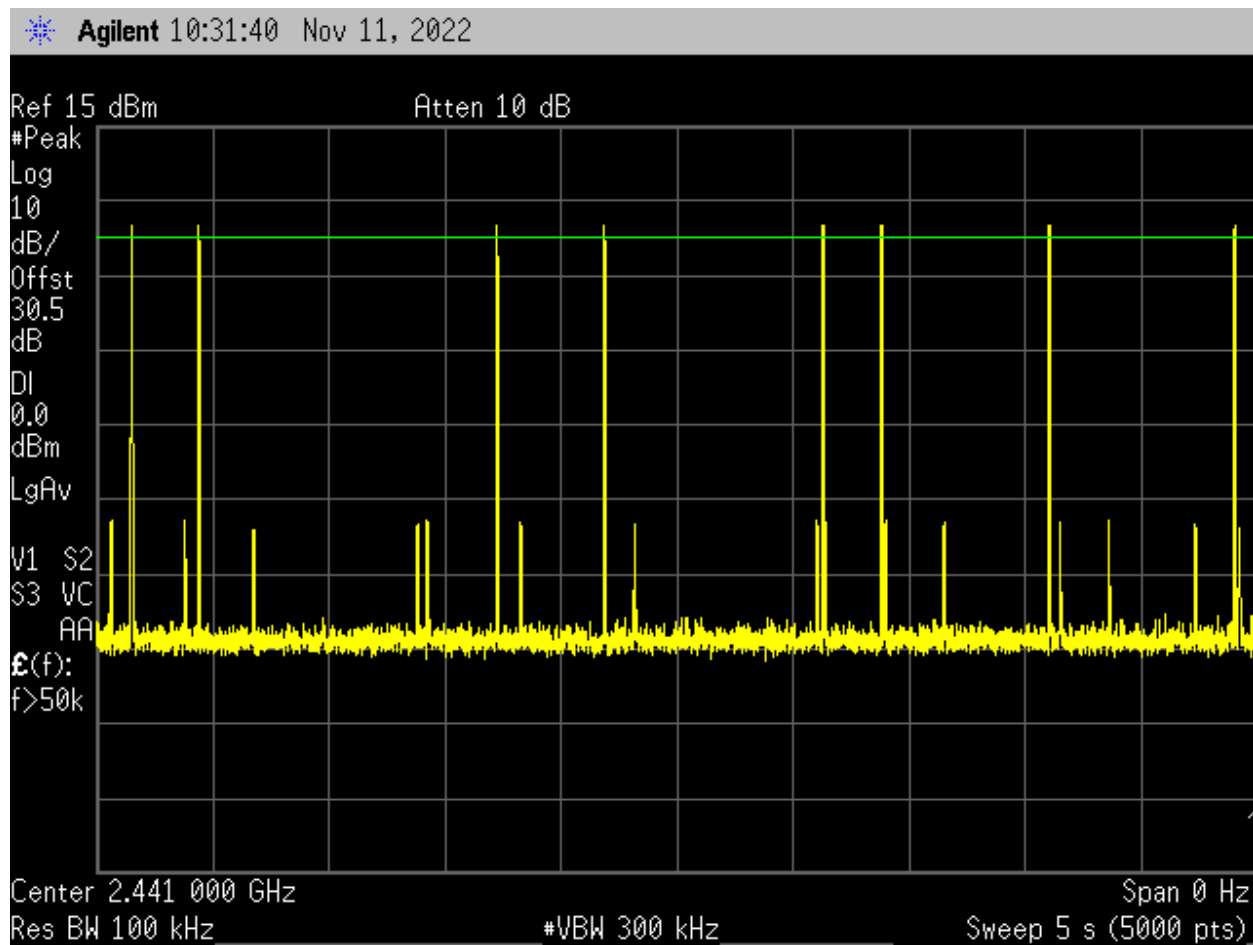

\* in this case, it appears that there may only be eight full-power transmitter hops; however, after further investigation there are actually 16 individual transmitter hops in a given 5-second evaluation period. See next plot for detailed measurement.



Figure 28:  $\pi/4$ DQPSK Transmitter Evaluation (Hopping) – Single Dwell Time


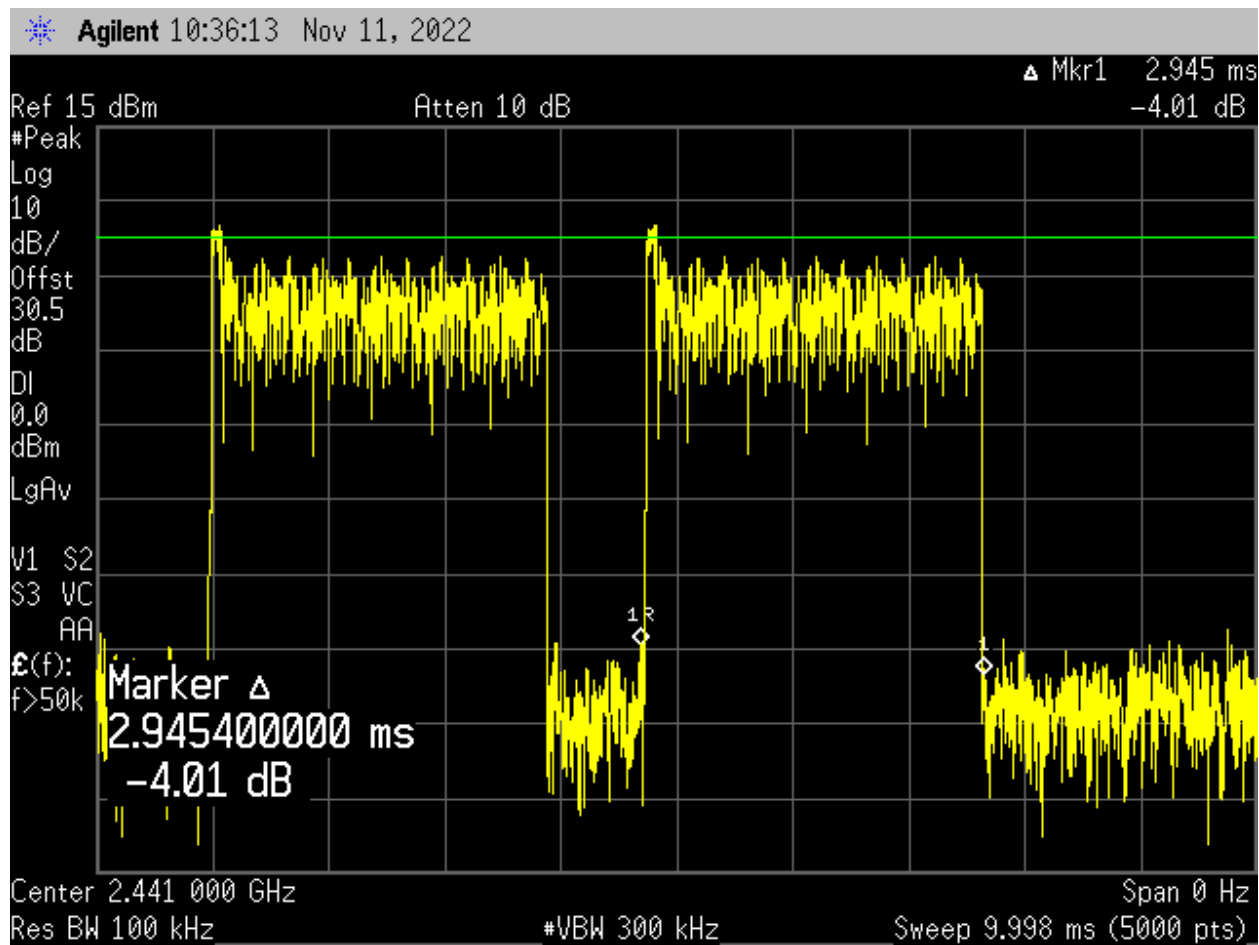





Figure 29: 8DPSK Transmitter 5-Second Evaluation (Hopping)

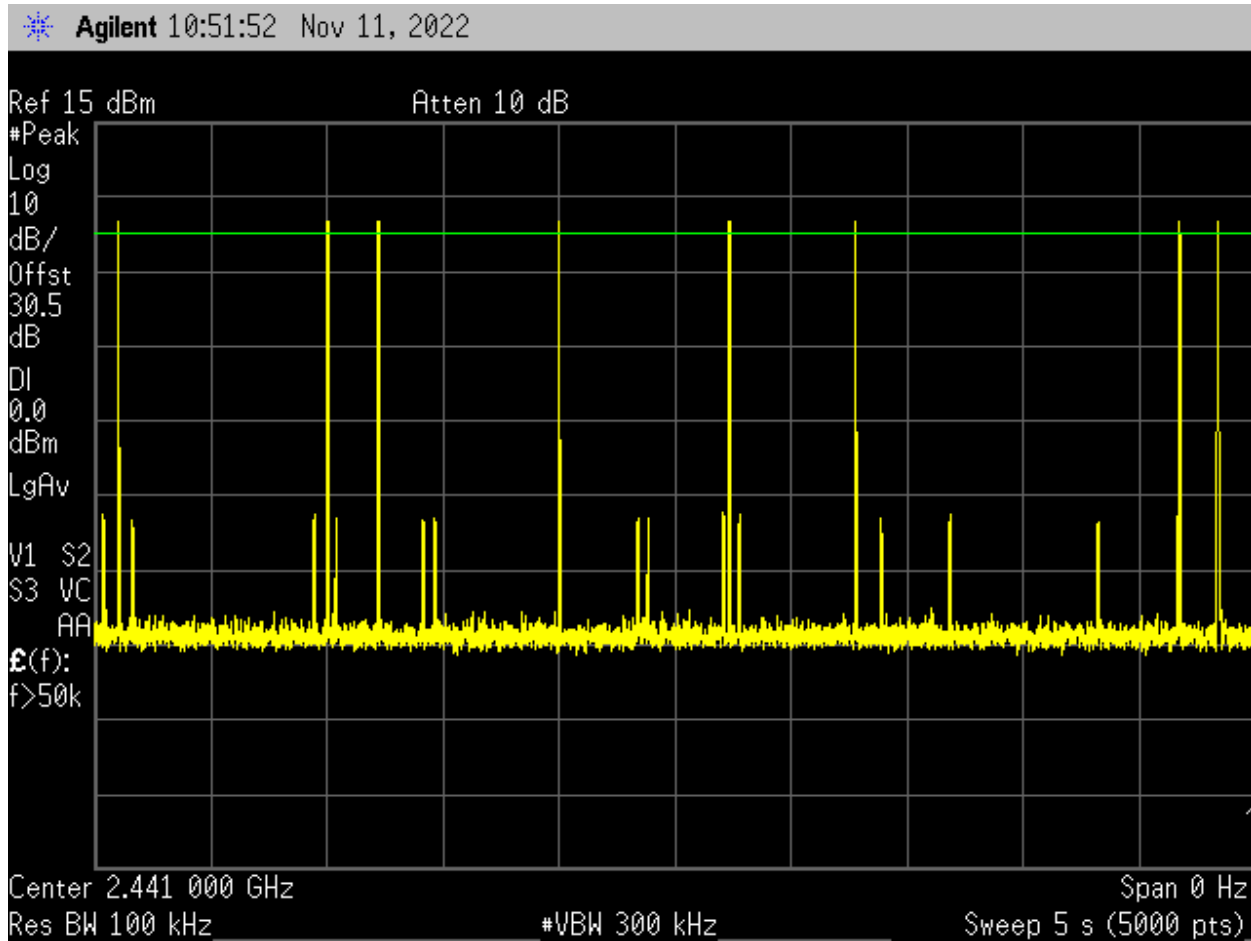

\* in this case, it appears that there may only be eight full-power transmitter hops; however, after further investigation there are actually 16 individual transmitter hops in a given 5-second evaluation period. See next plot for detailed measurement.



Figure 30: 8DPSK Transmitter Evaluation (Hopping) – Single Dwell Time

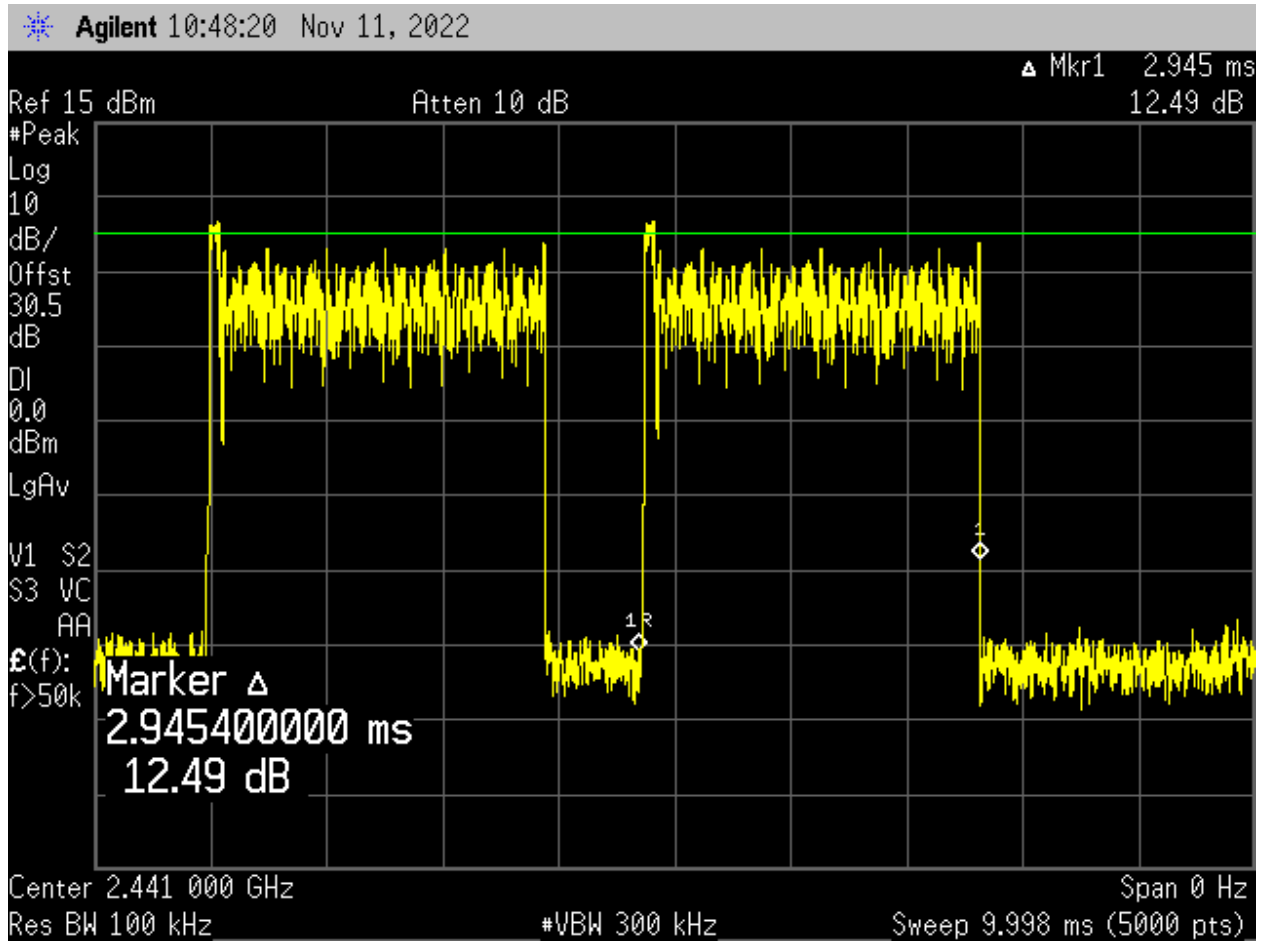



## 2.5 Channel Carrier Separation

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400 MHz to 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. Each frequency must be used equally on the average by each transmitter.

### 2.5.1 Measurement Method and Results

This test was performed as specified in ANSI C63.10 (2013), Section 7.8.2

The EUT was configured in a fully-modulated mode, with the hopping stopped.

The minimum separation requirement is based on two-thirds of the 20 dB bandwidth.

The EUT was evaluated at the low, center, and high channels, and a few other random channels that the transmitter employs. All of the hopping channel carriers are separated by exactly 1.0 MHz, regardless of the modulation mode.

Table 6: Channel Carrier Separation – Test Results

Modulation	Mode (Data Rate)	20dB Bandwidth	Minimum Separation Requirement	EUT Carrier Separation
GFSK	DH5 (1Mbps)	862.2 kHz	574.8 kHz	1.0 MHz
$\pi/4$ DQPSK	2DH5 (2Mbps)	1.19 MHz	793.3 kHz	1.0 MHz
8DPSK	3DH5 (3Mbps)	1.23 MHz	820.0 kHz	1.0 MHz



Figure 31: GFSK (1Mbps) – Channel Separation

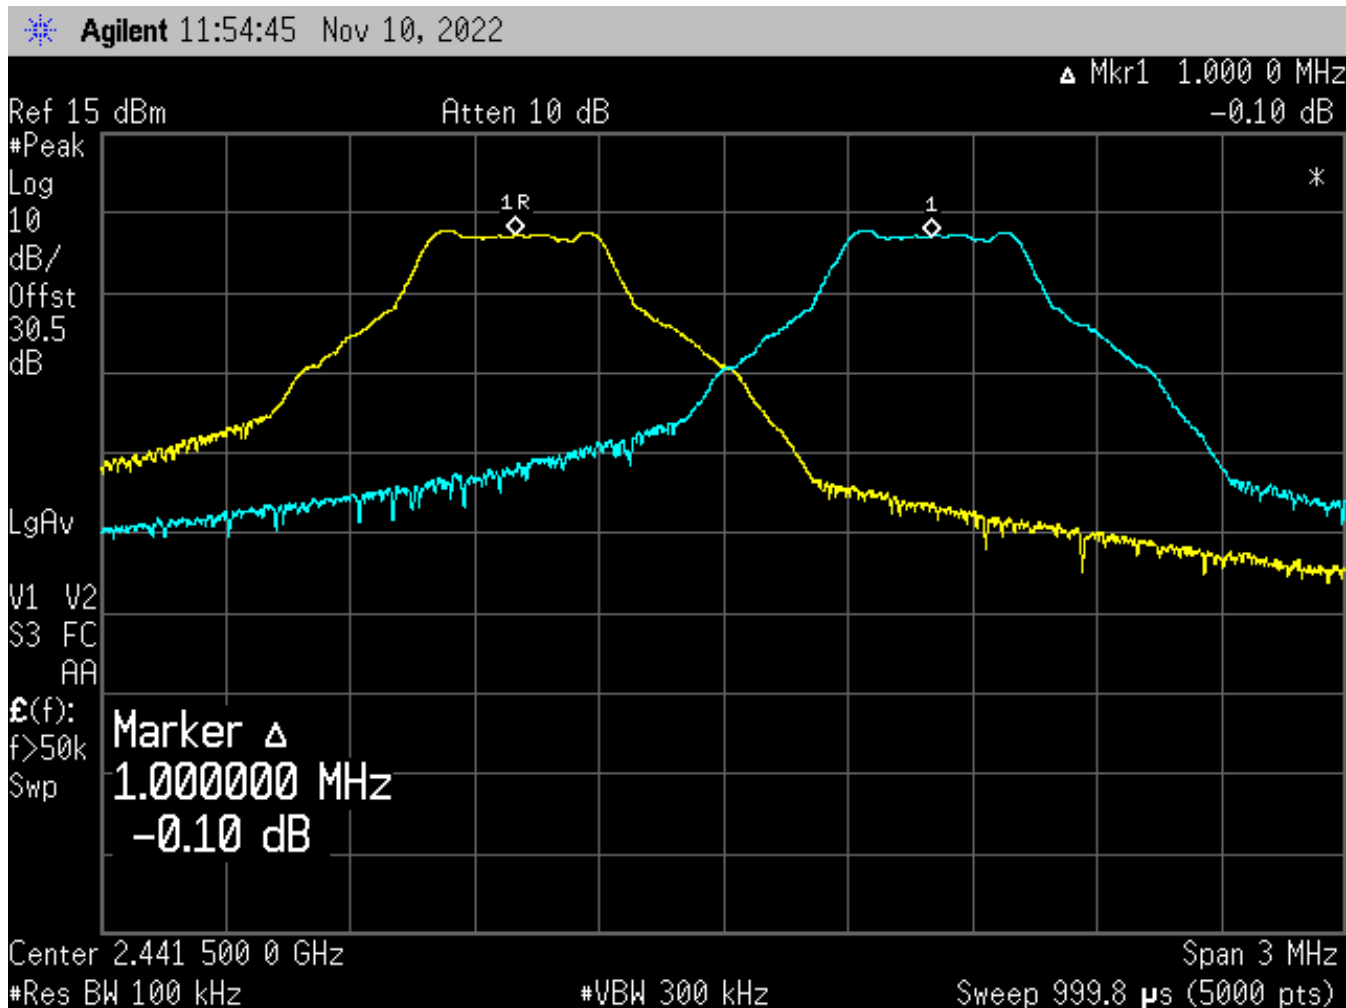




Figure 32:  $\pi/4$ DQPSK (2Mbps) – Channel Separation


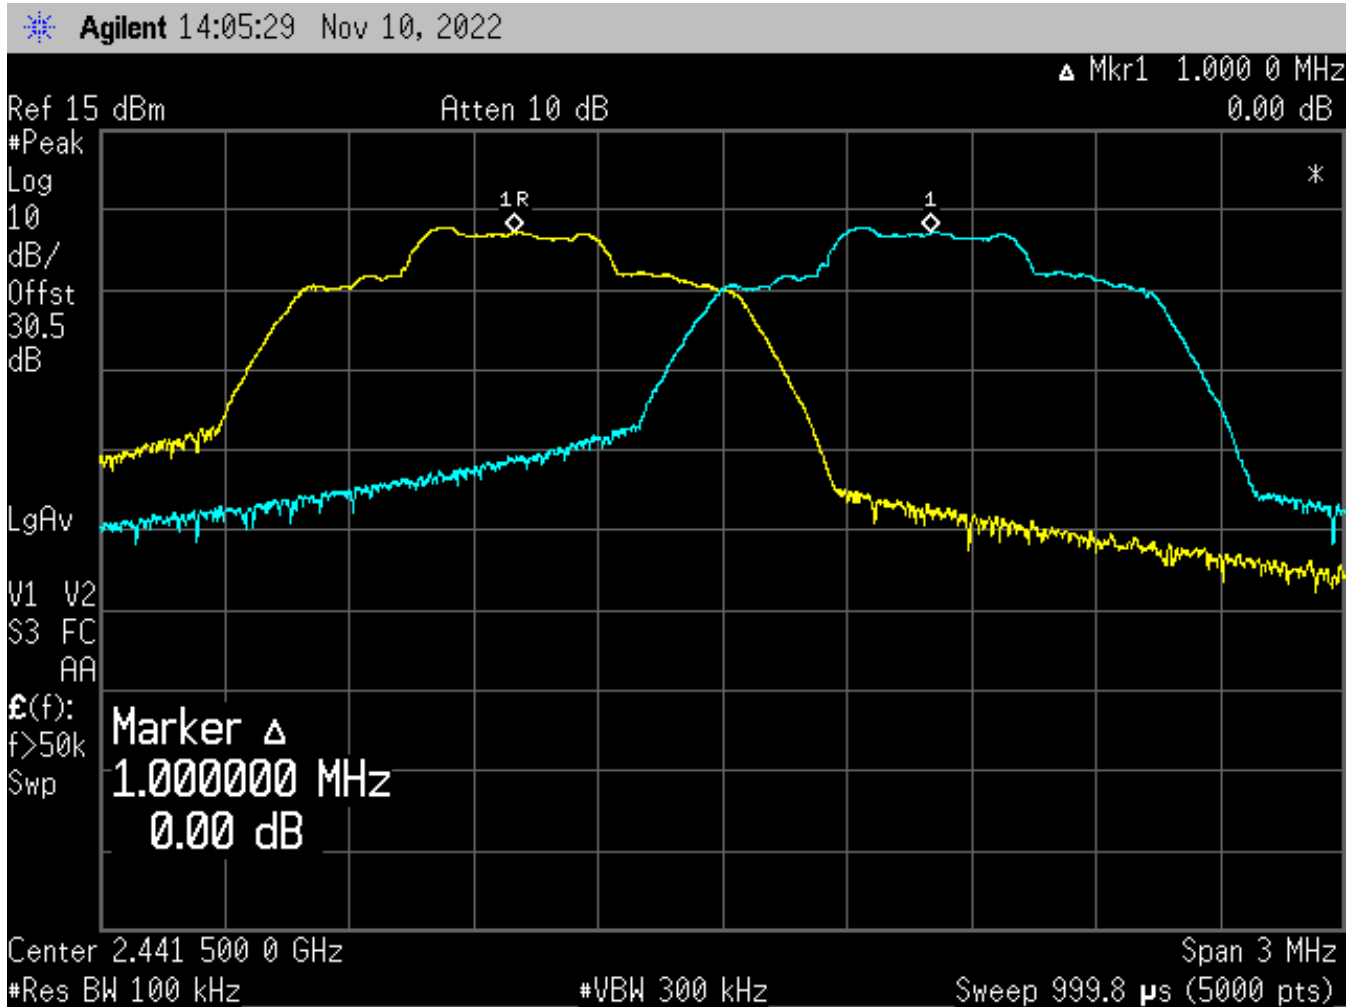




Figure 33: 8DPSK (3Mbps) – Channel Separation





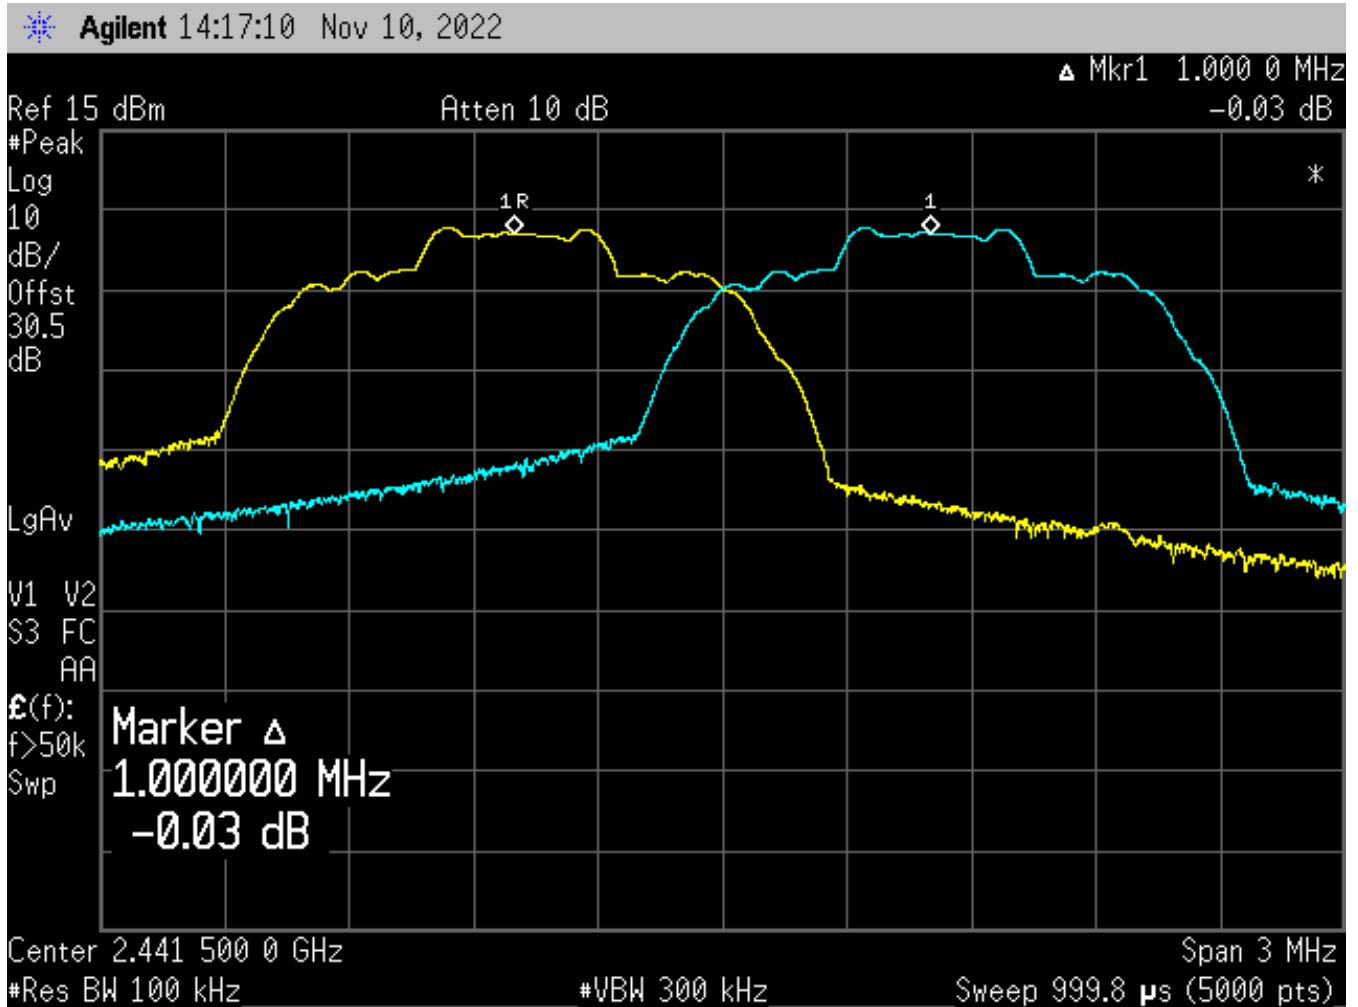

## 2.6 Bandedge Compliance (Antenna Port Conducted)

In any 100 kHz bandwidth, outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### 2.6.1 Measurement Method and Results

This test was performed as specified in ANSI C63.10 (2013), Section 7.8.1 and 7.8.6.

The EUT was configured in a fully-modulated mode, with the hopping enabled.

Table 7: Bandedge Compliance – Test Results

<b>Modulation</b>	<b>Mode (Data Rate)</b>	<b>Low Channel (2402 MHz)</b>	<b>High Channel (2480 MHz)</b>
GFSK	DH5 (1Mbps)	47.61 dB	54.11 dB
$\pi/4$ DQPSK	2DH5 (2Mbps)	48.07 dB	51.46 dB
8DPSK	3DH5 (3Mbps)	49.73 dB	51.54 dB



Figure 34: GFSK (1Mbps) – Lower Band Edge

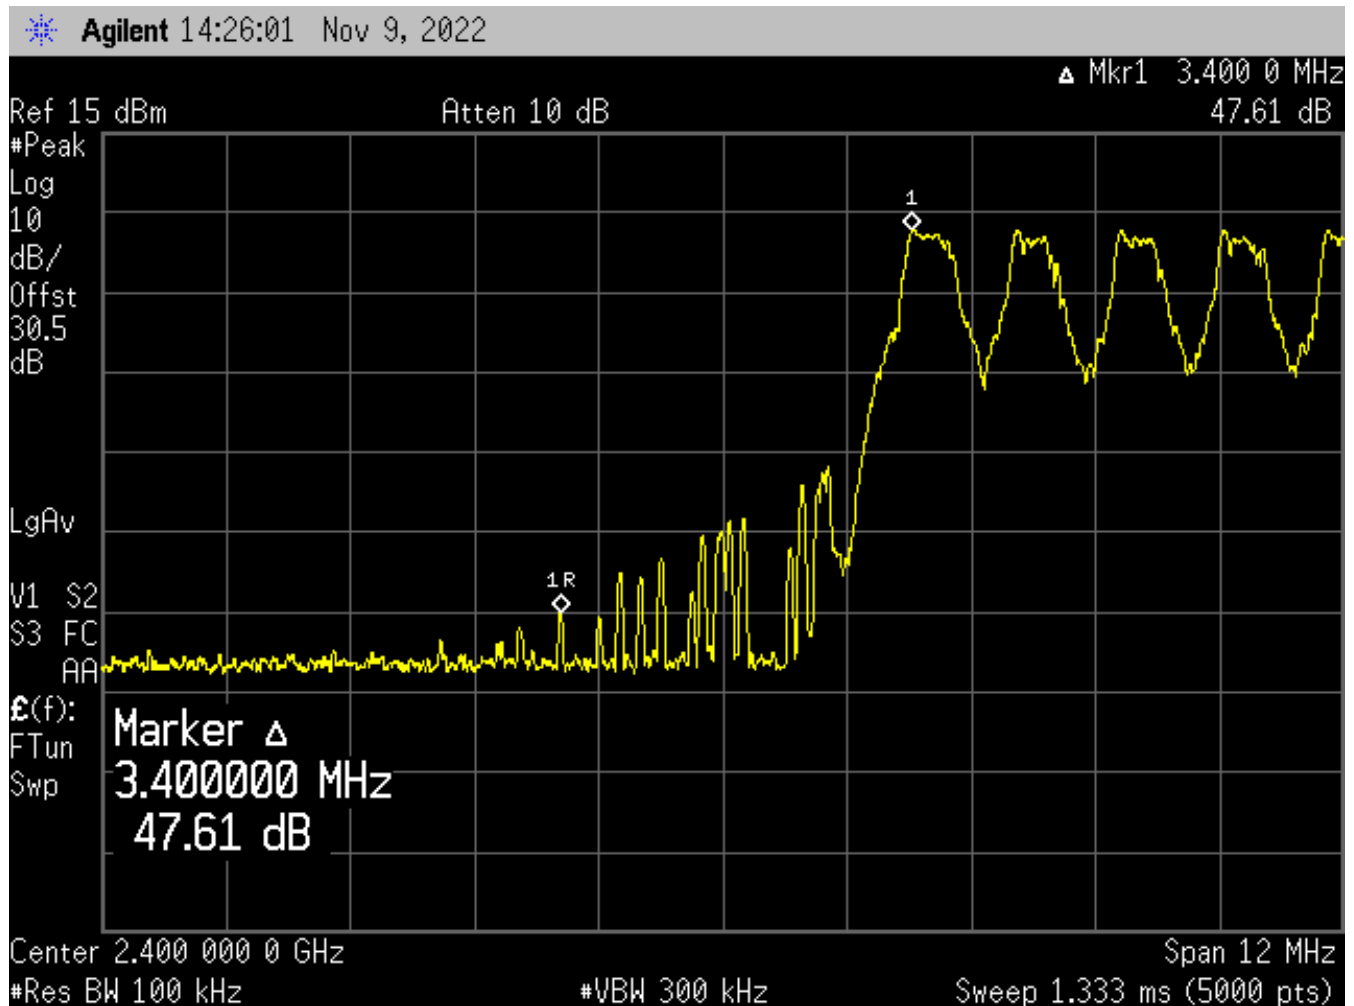




Figure 35: GFSK (1Mbps) – Upper Band Edge

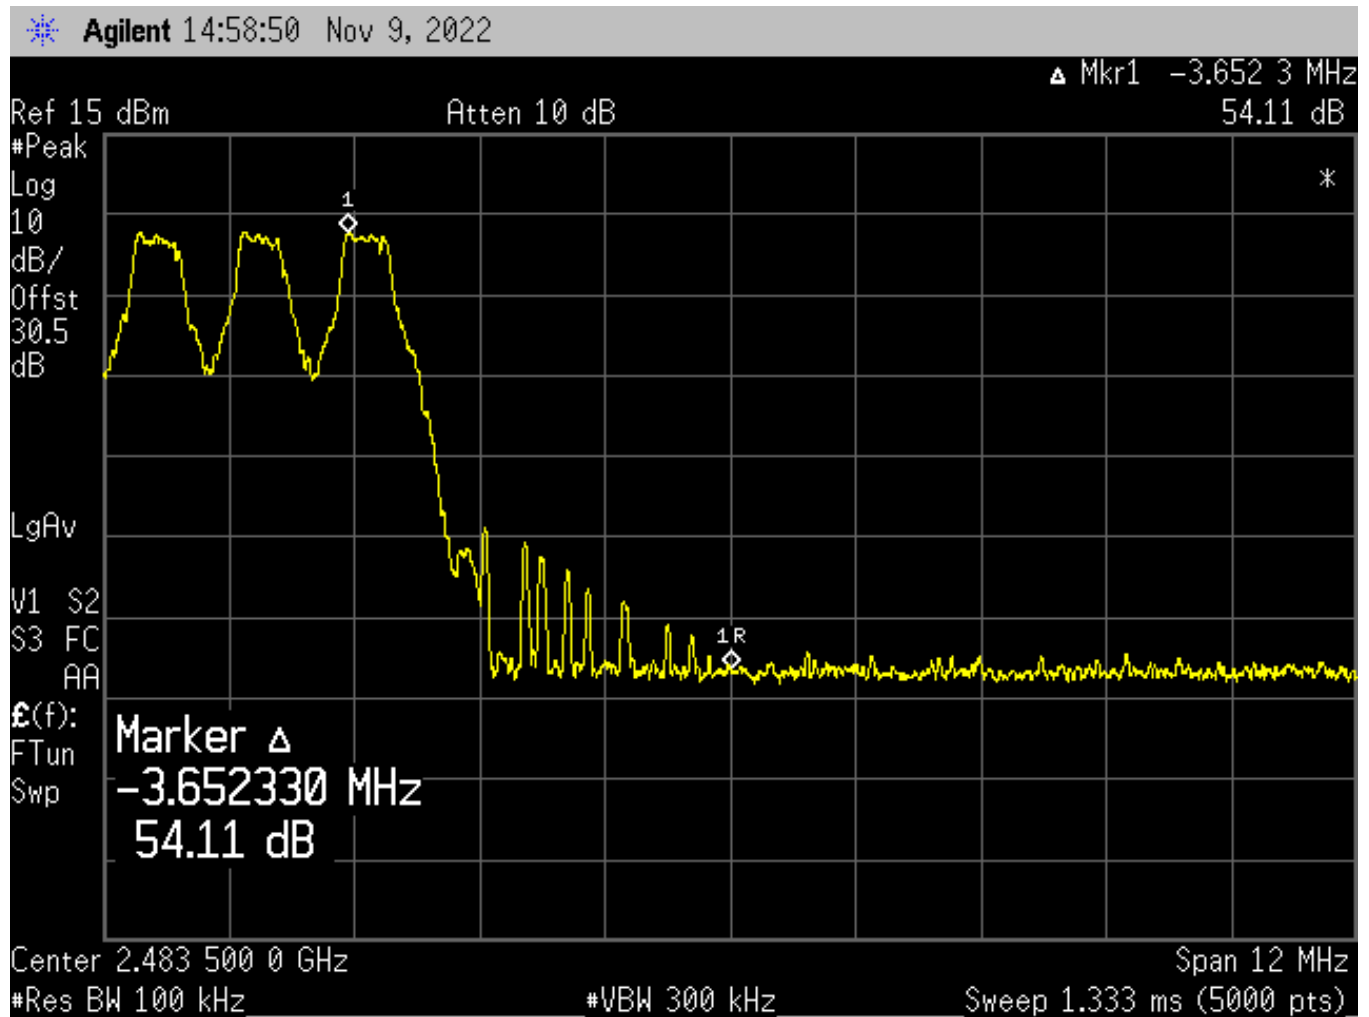




Figure 36:  $\pi/4$ DQPSK (2Mbps) – Lower Band Edge

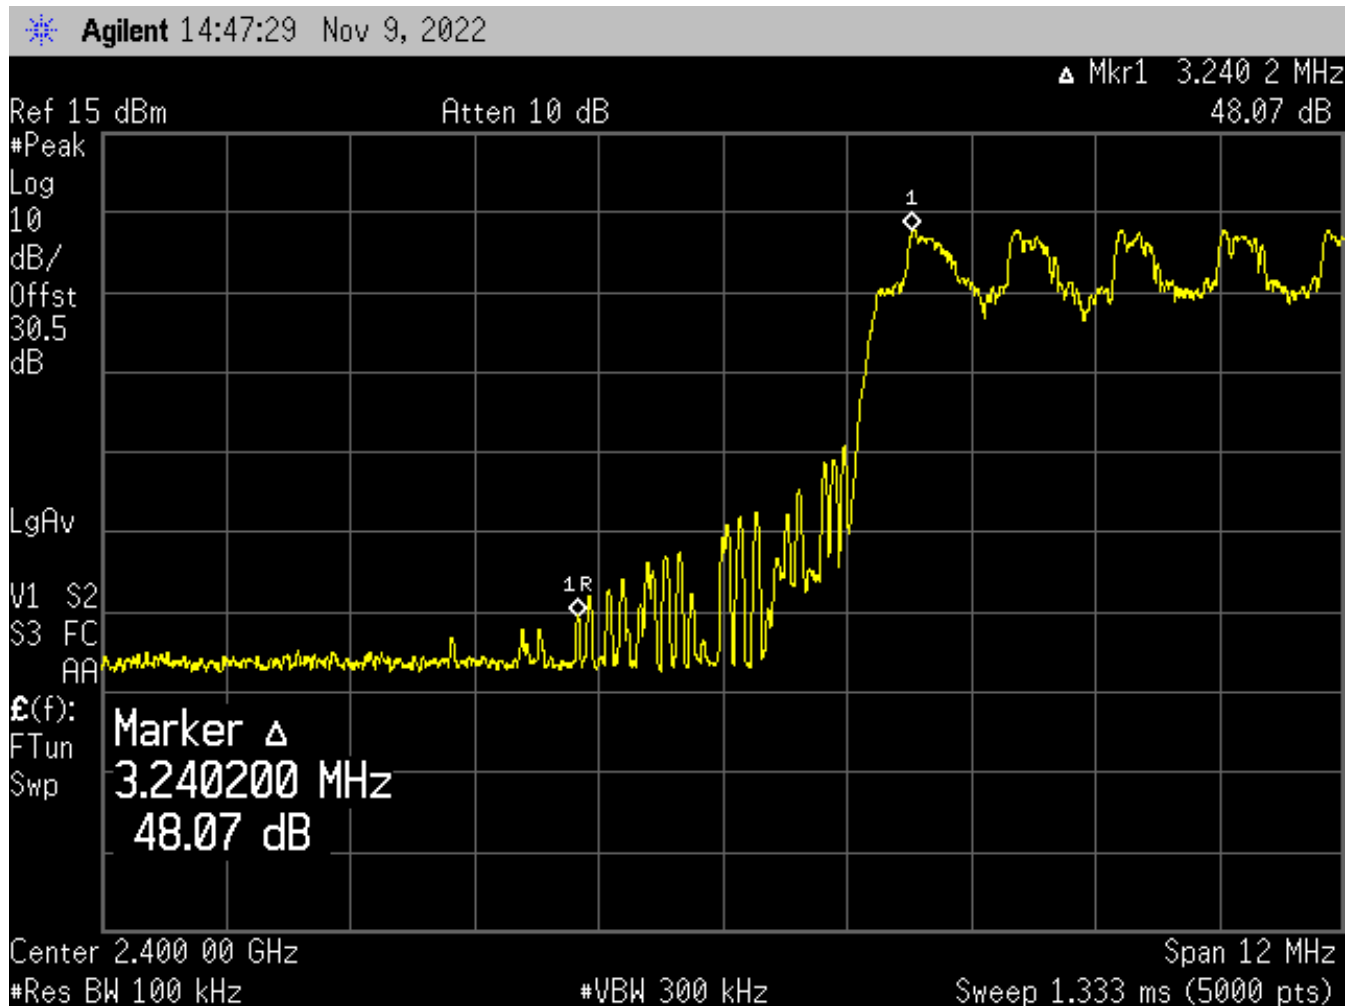




Figure 37:  $\pi/4$ DQPSK (2Mbps) – Upper Band Edge

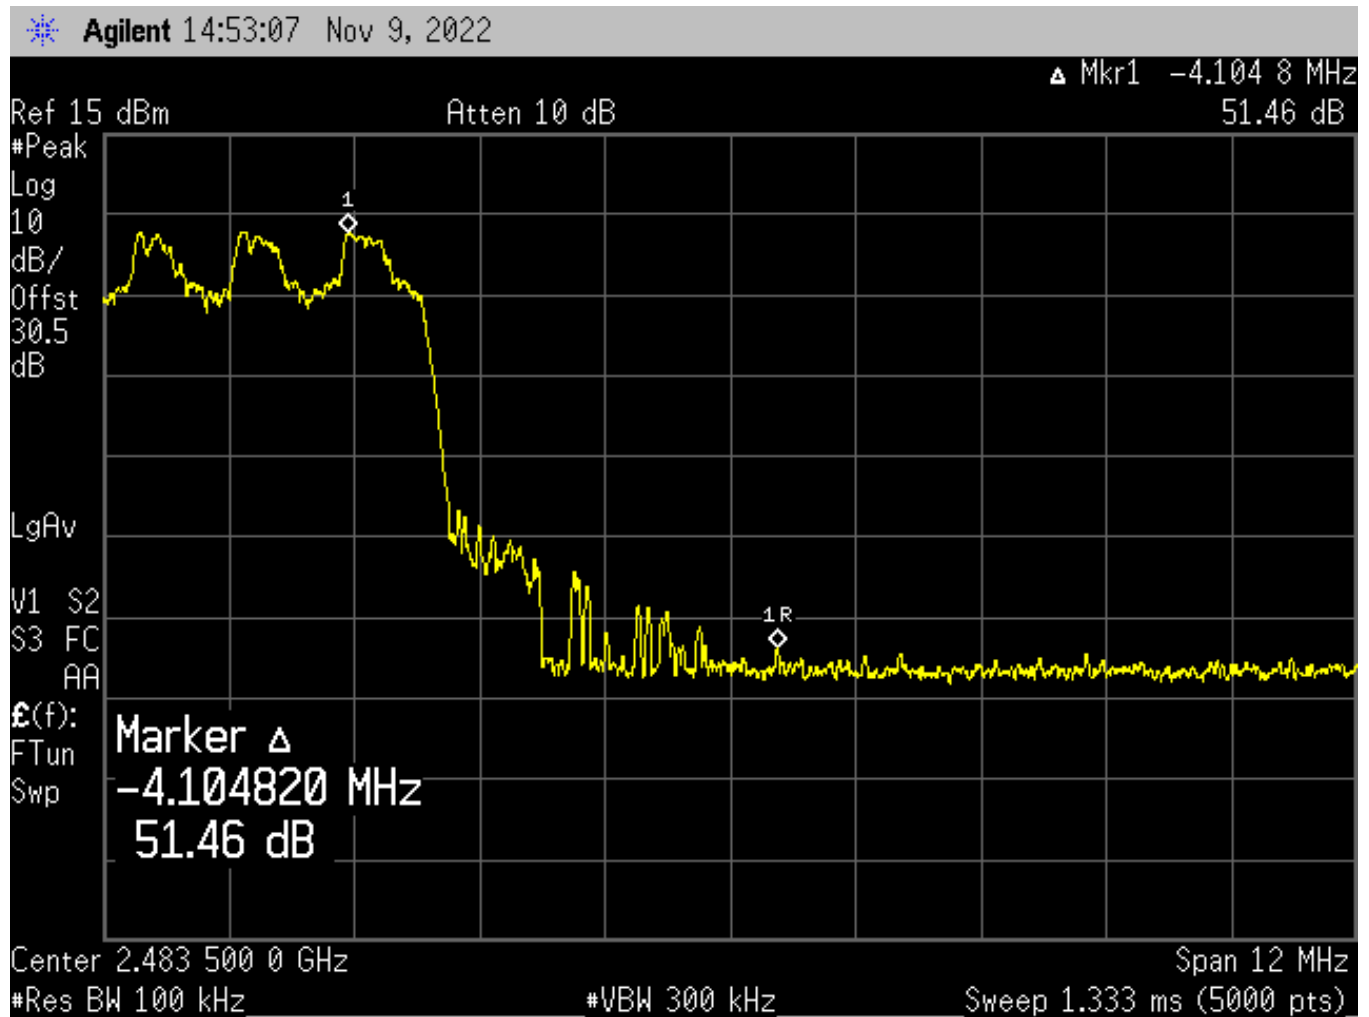




Figure 38: 8DPSK (3Mbps) – Lower Band Edge


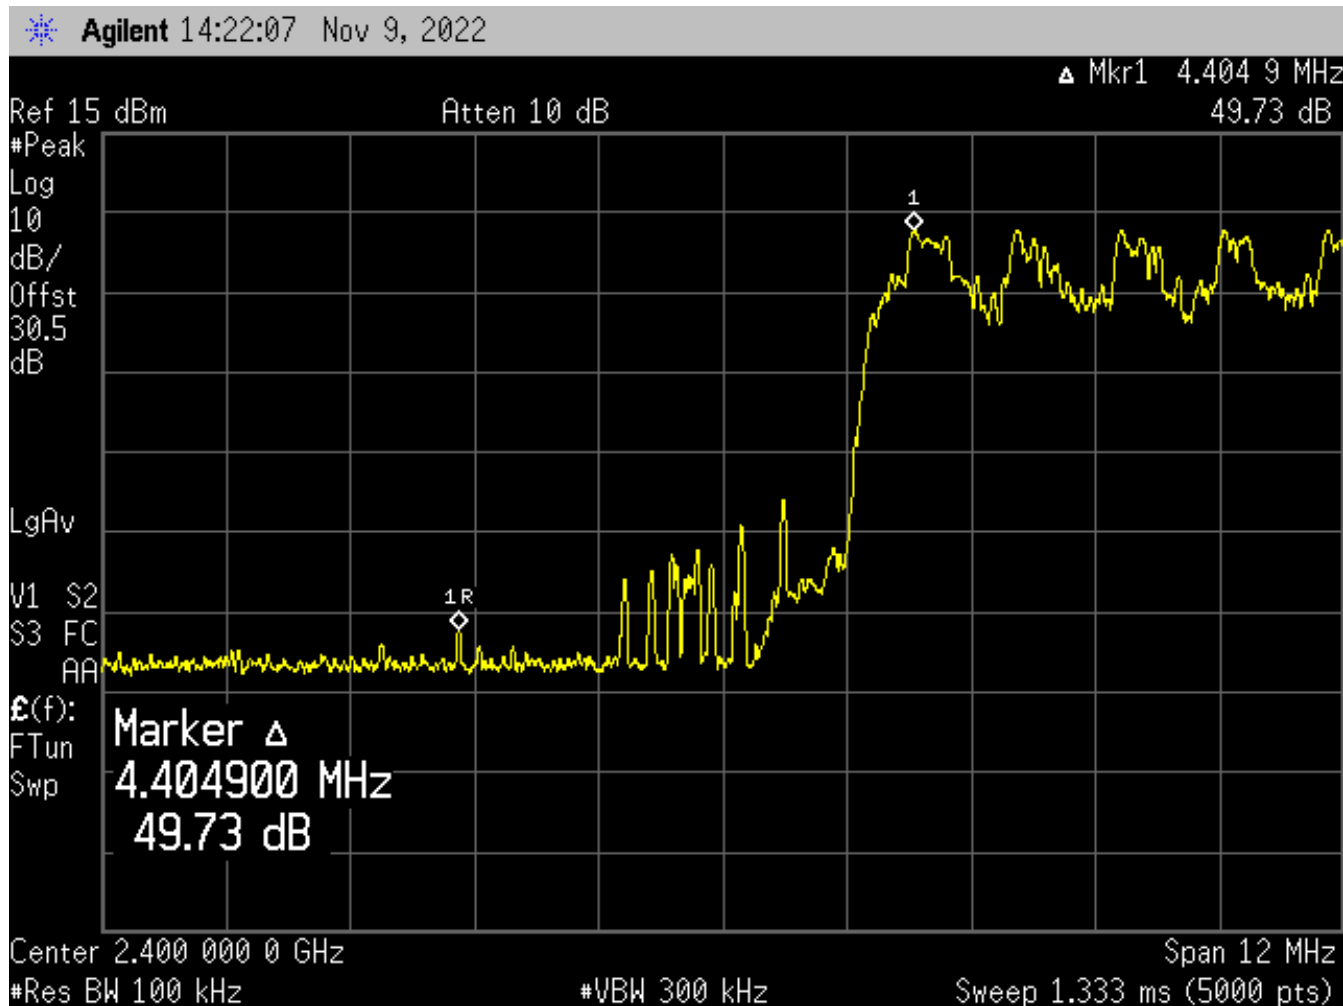




Figure 39: 8DPSK (3Mbps) – Upper Band Edge



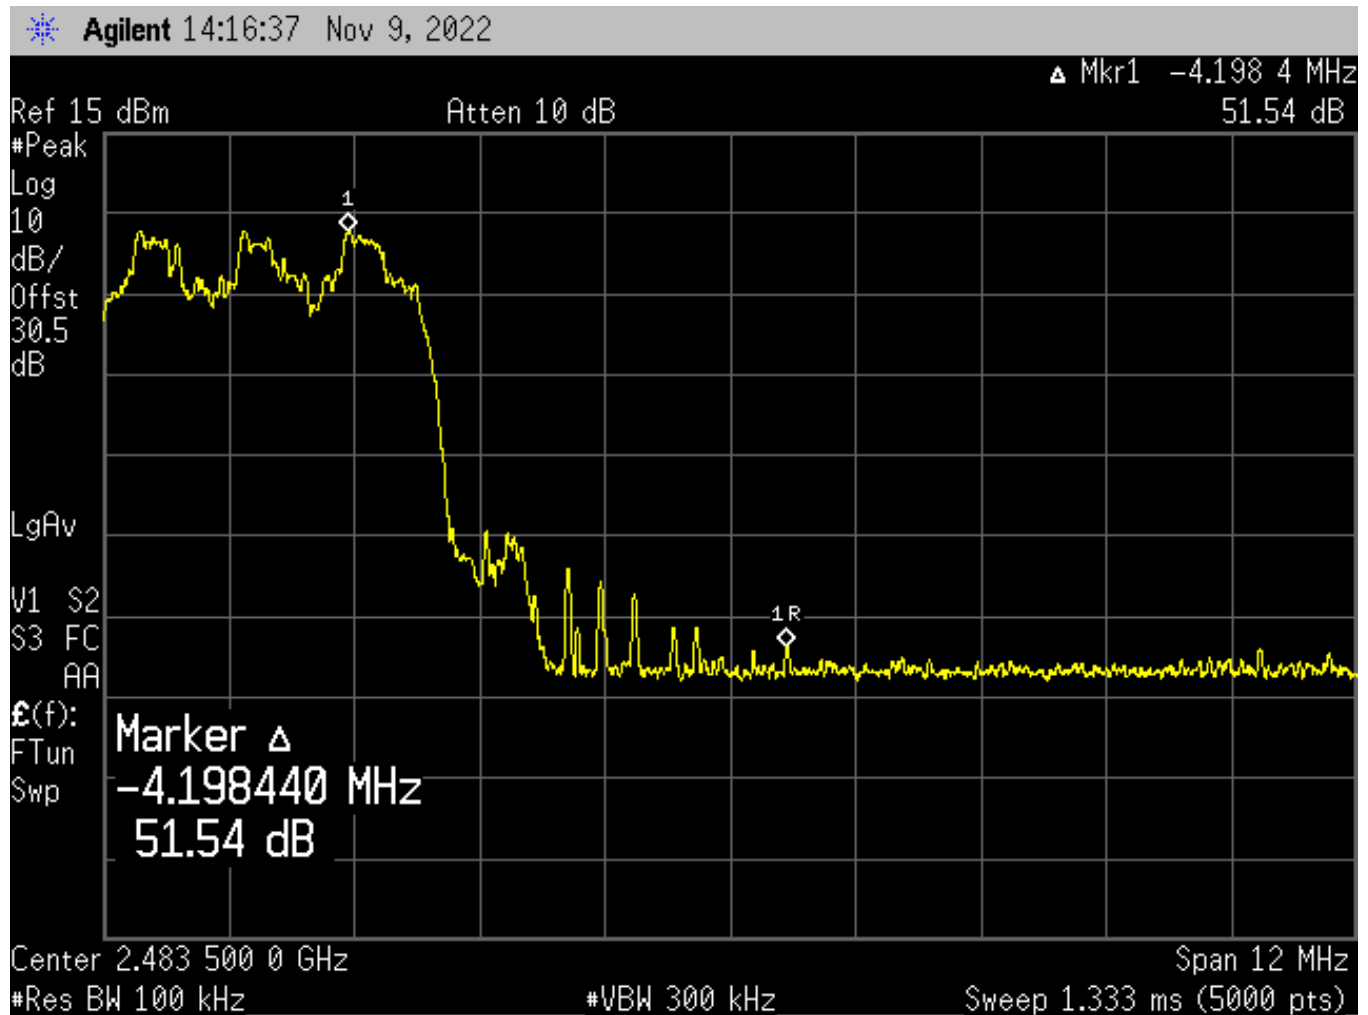

## 2.7 Conducted Spurious Emissions

In any 100 kHz bandwidth, outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### 2.7.1 Measurement Method and Results

This test was performed as specified in ANSI C63.10 (2013), Section 7.8.8 and 11.11.

The EUT was configured in a fully-modulated mode, with the hopping stopped.

The amplitude of the EUT carrier frequency was measured to determine the emissions limit (20 dB below the carrier frequency amplitude). The emissions outside of the allocated frequency band were then scanned from 30 MHz to 25 GHz, to include the 10th harmonic of the fundamental

The reduced testing procedures outlined in ANSI C63.10 (2013), Section 5.6.2 and 5.6.2.2 were also employed. The spurious emission test data correlating to the center channel of all three modulation modes is provided below. The worst-case mode (GFSK) was utilized to provide the spurious emission test data for the low and high channels.

The EUT complies with the requirements for spurious emissions at the antenna port.

The final test data is provided in the following plots.





Figure 40: GFSK (1Mbps) Low Channel, Conducted Spurious – Plot 1

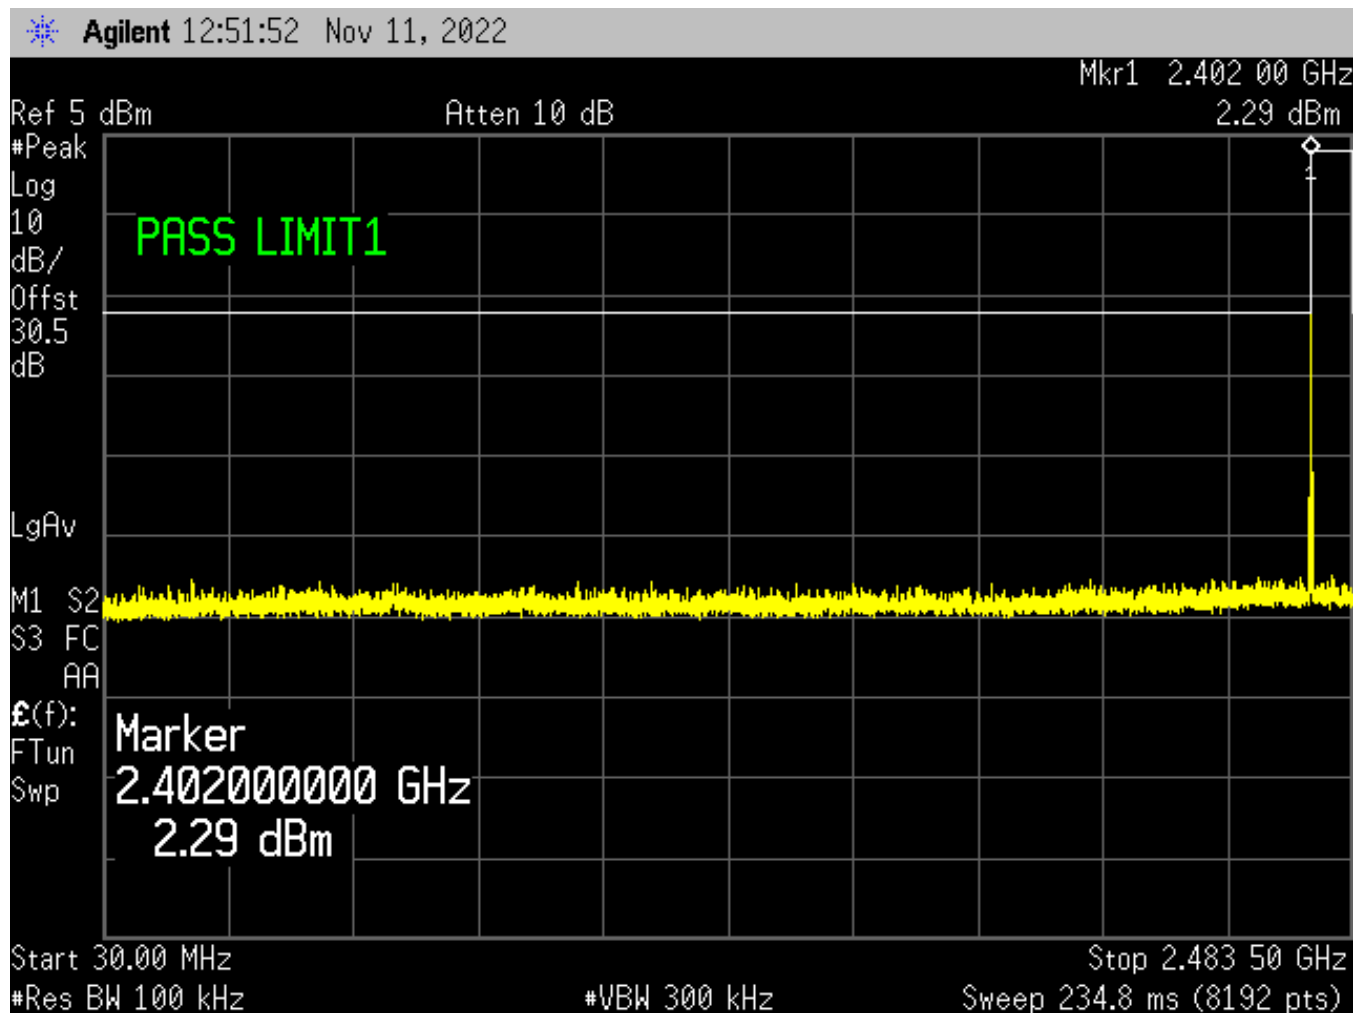




Figure 41: GFSK (1Mbps) Low Channel, Conducted Spurious – Plot 2

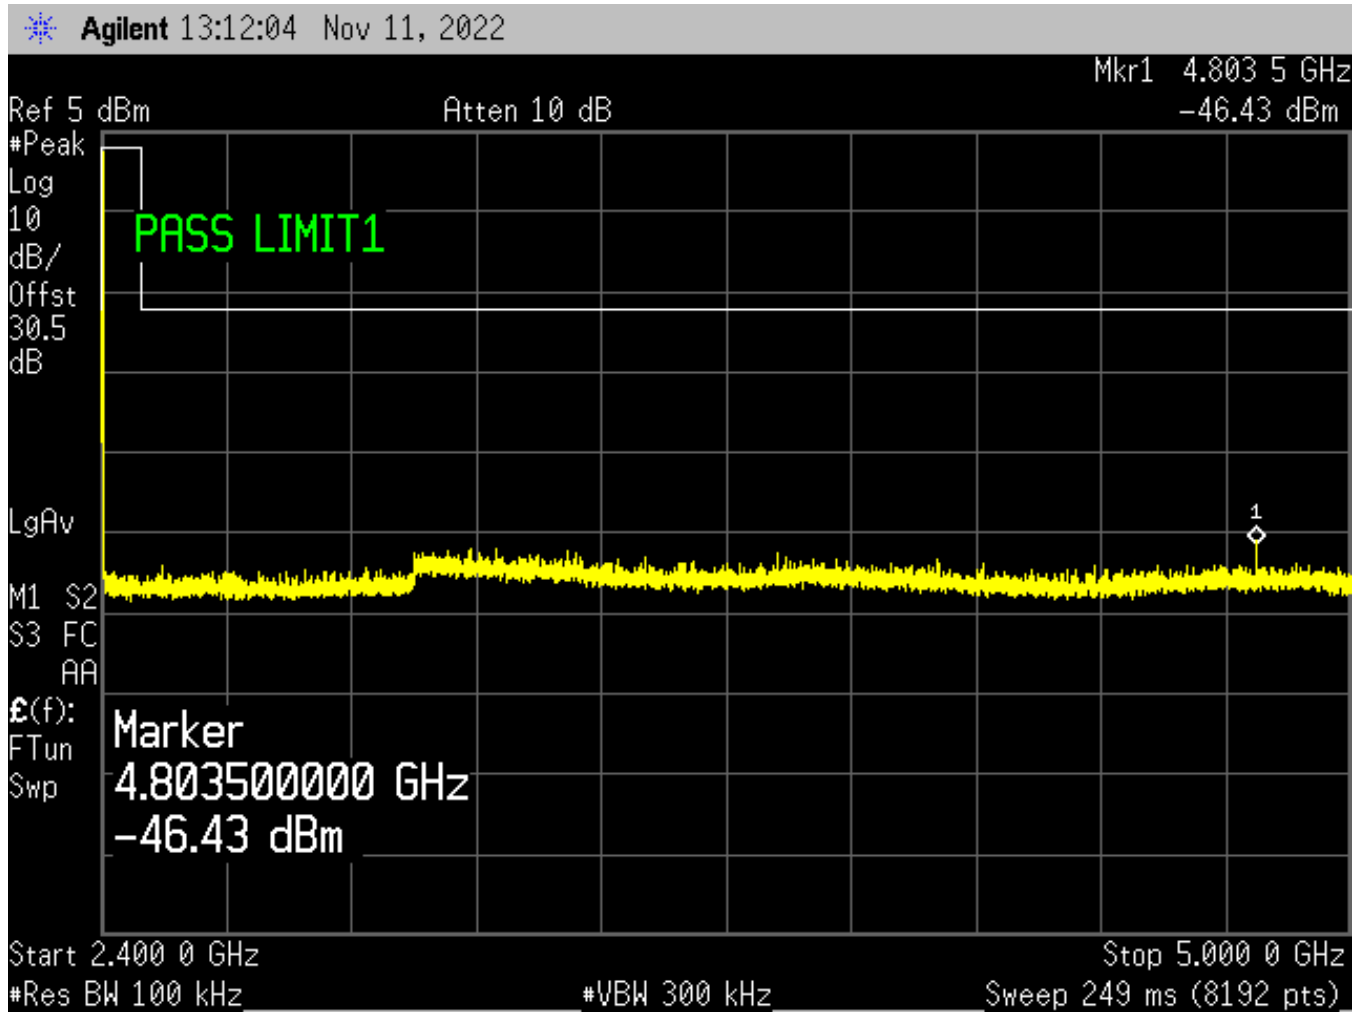




Figure 42: GFSK (1Mbps) Low Channel, Conducted Spurious – Plot 3

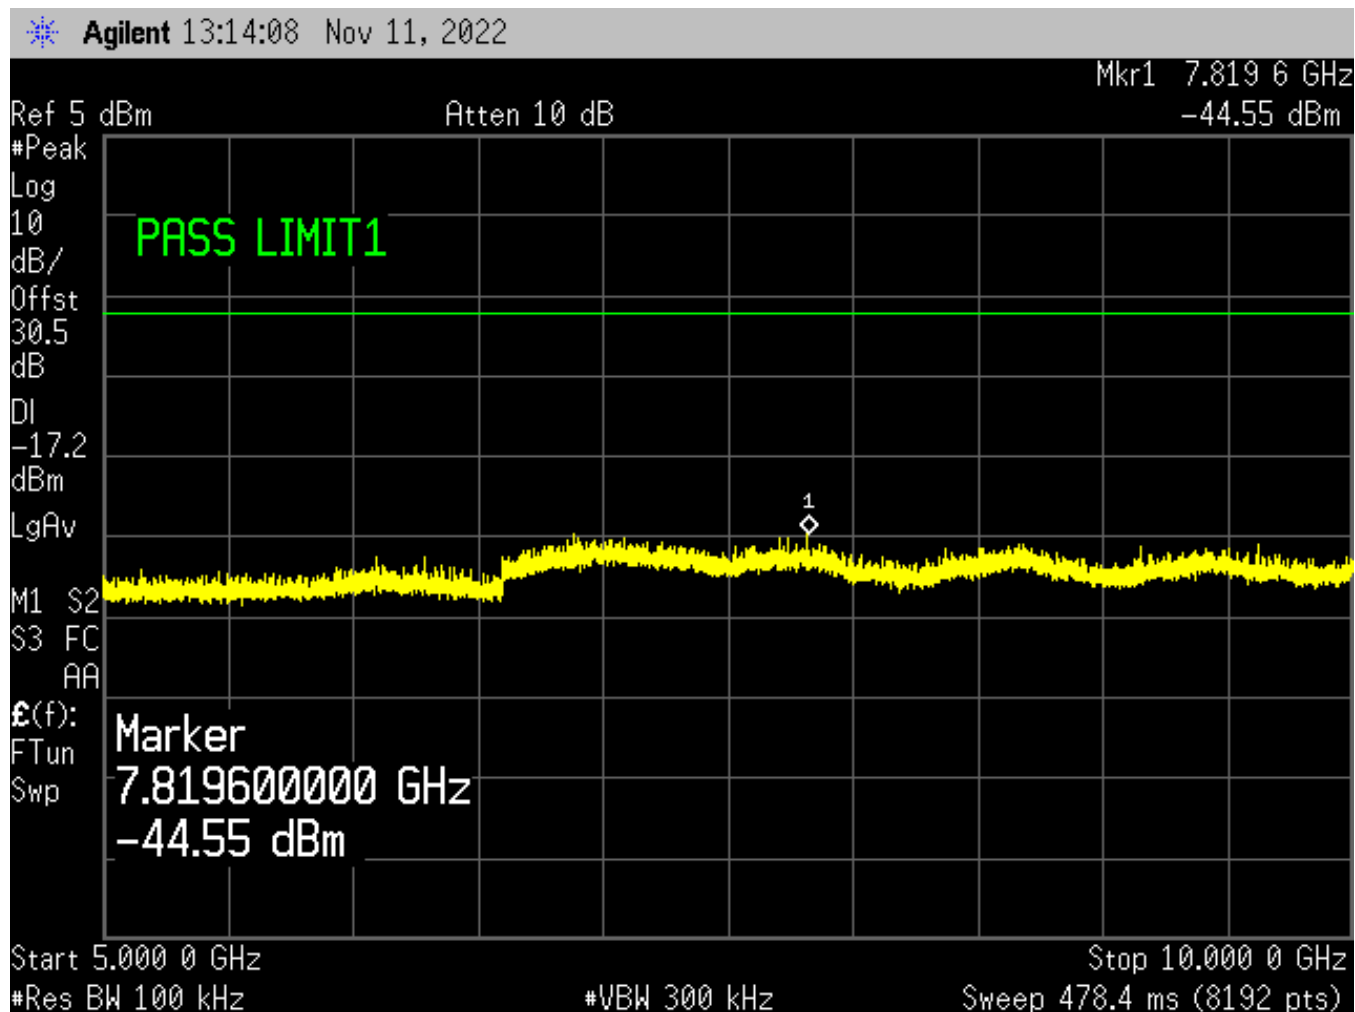




Figure 43: GFSK (1Mbps) Low Channel, Conducted Spurious – Plot 4

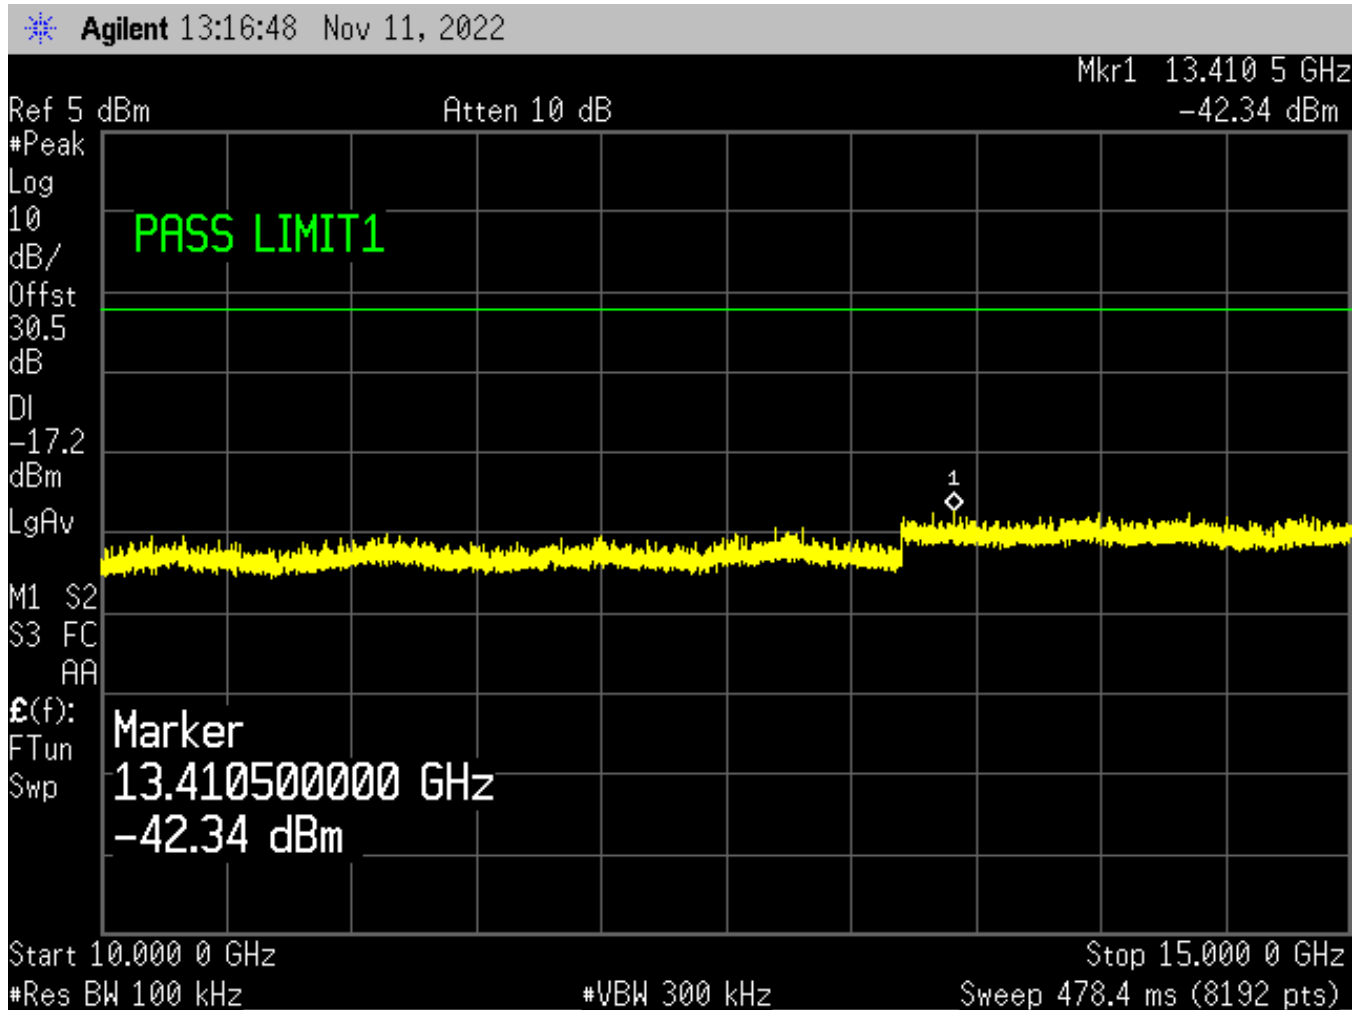




Figure 44: GFSK (1Mbps) Low Channel, Conducted Spurious – Plot 5


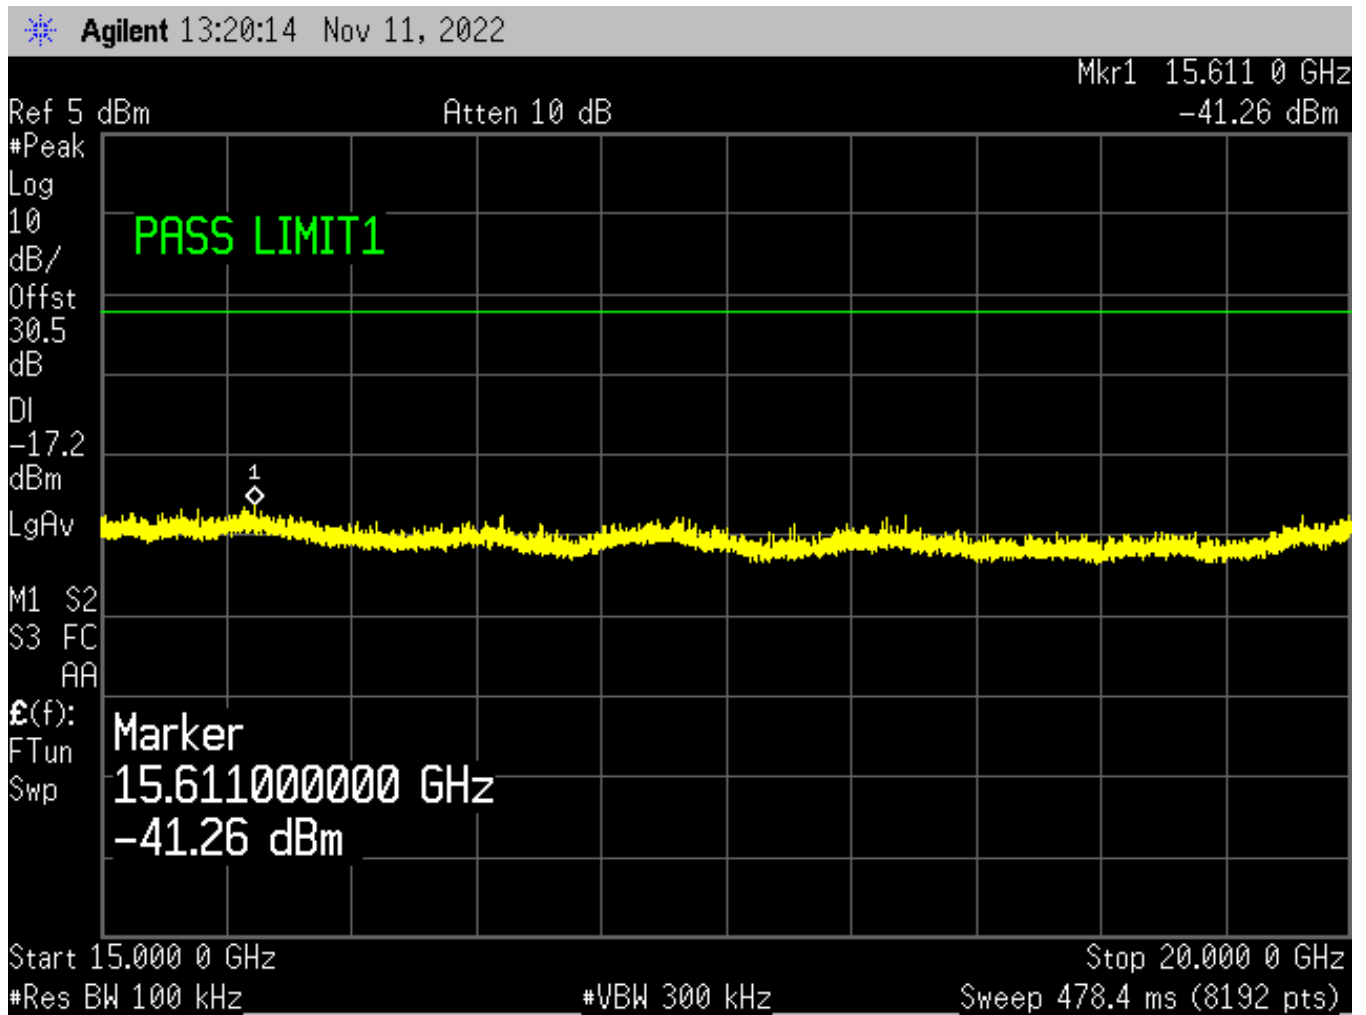




Figure 45: GFSK (1Mbps) Low Channel, Conducted Spurious – Plot 6



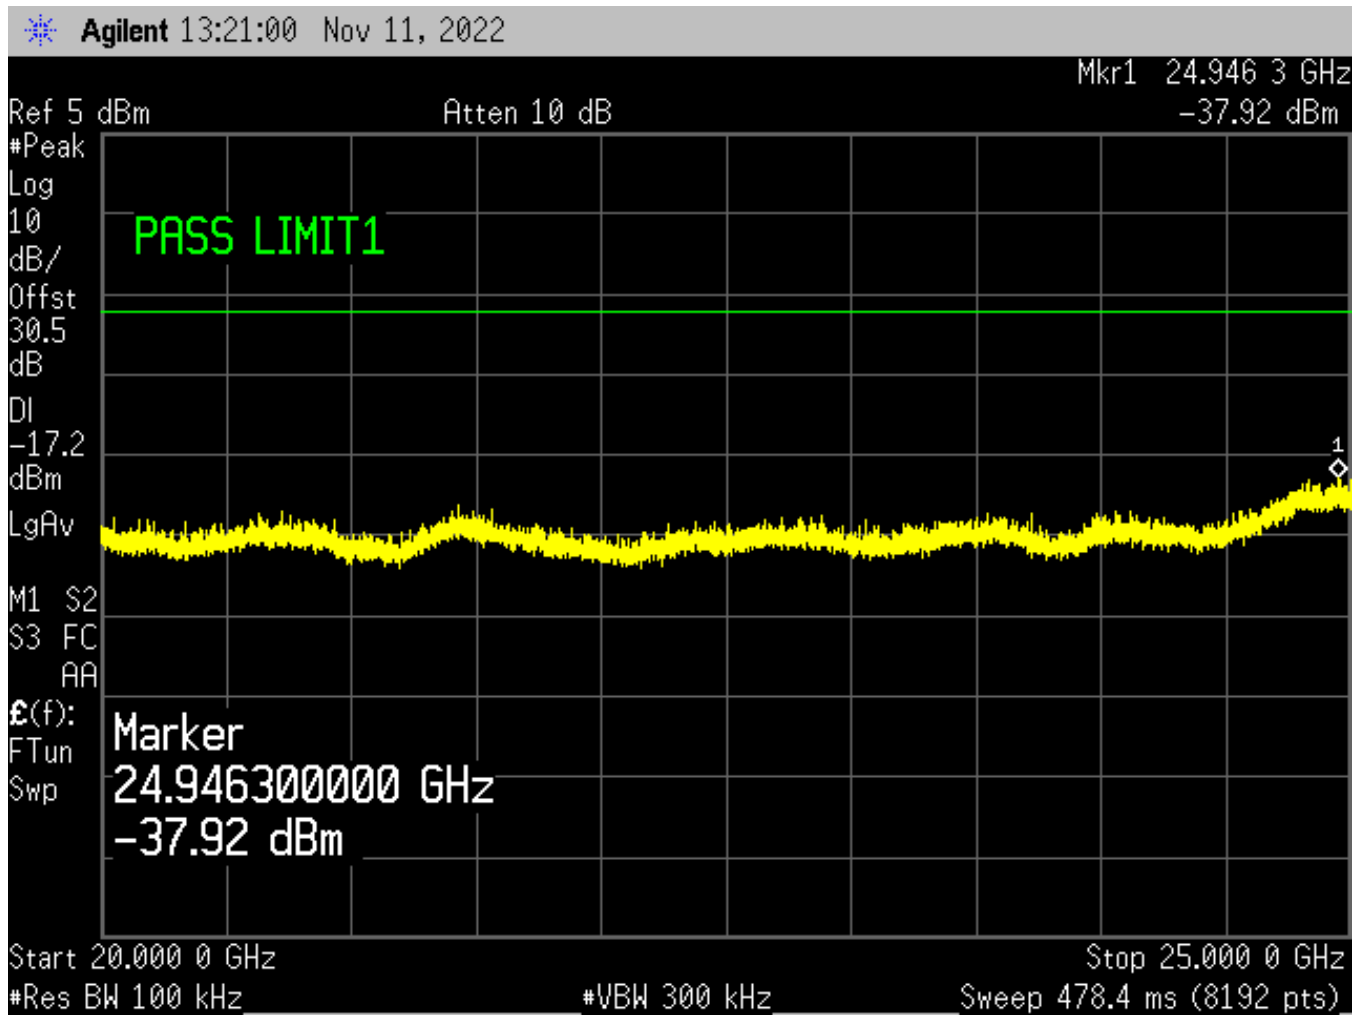

*This Page Intentionally Left Blank*



Figure 46: GFSK (1Mbps) Center Channel, Conducted Spurious – Plot 1

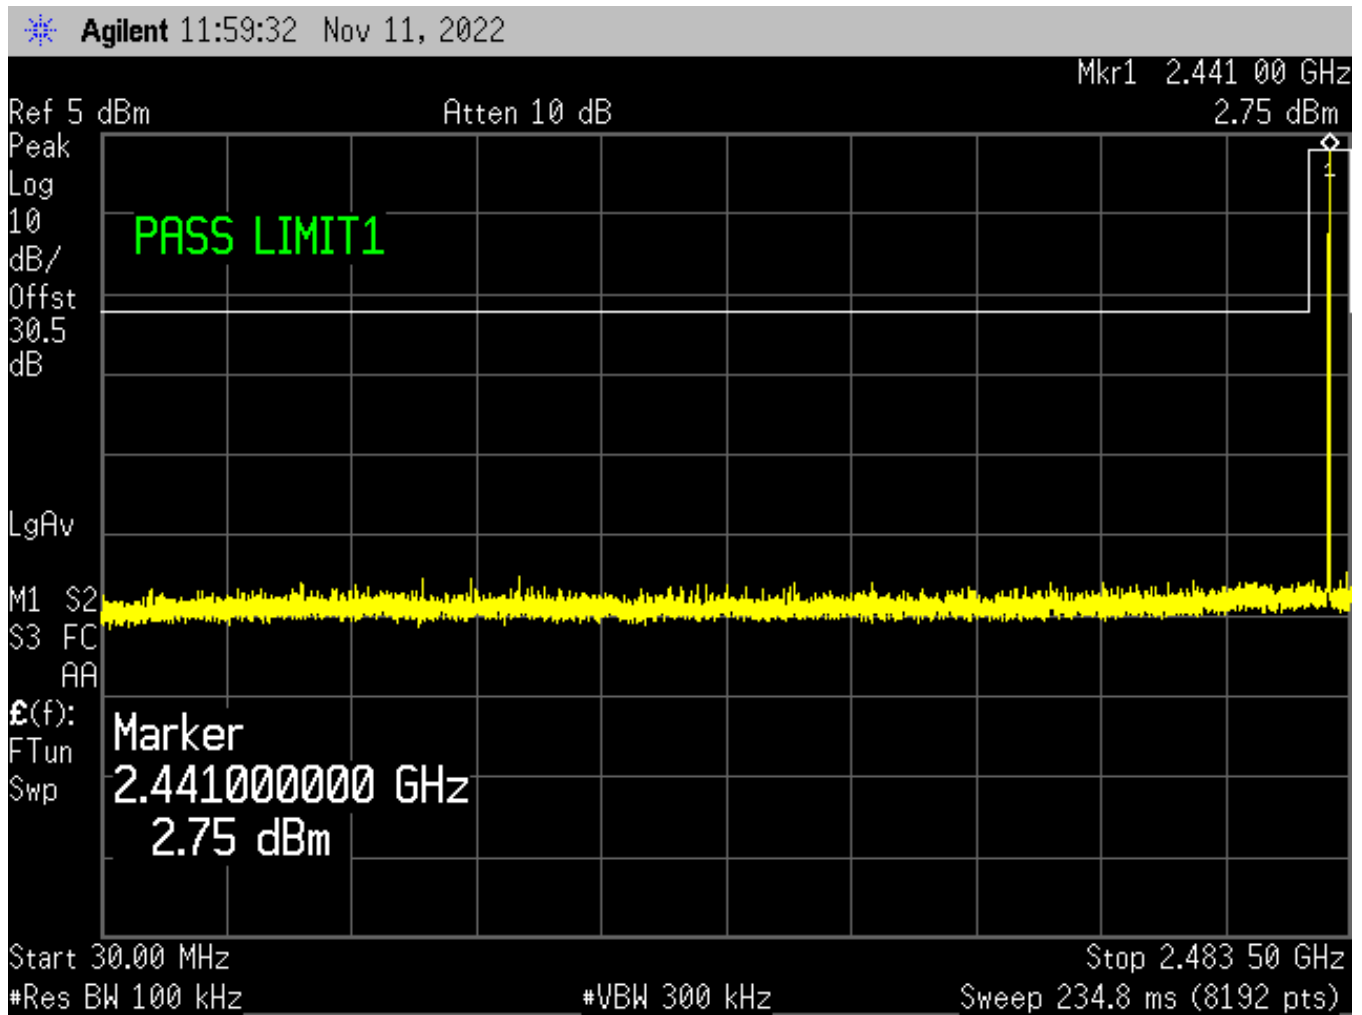






Figure 47: GFSK (1Mbps) Center Channel, Conducted Spurious – Plot 2

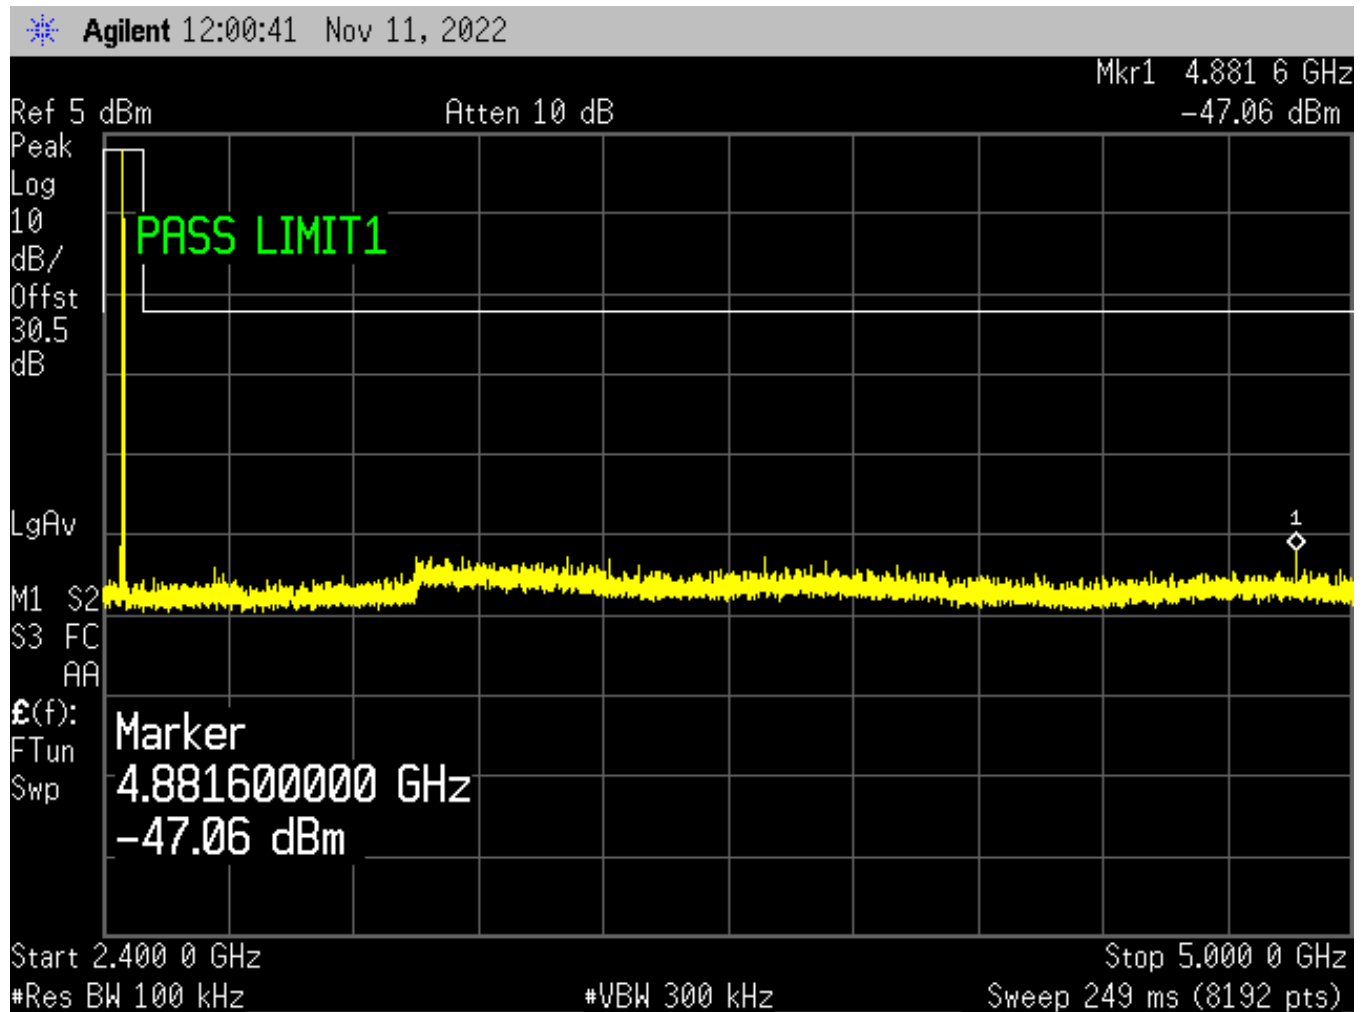




Figure 48: GFSK (1Mbps) Center Channel, Conducted Spurious – Plot 3

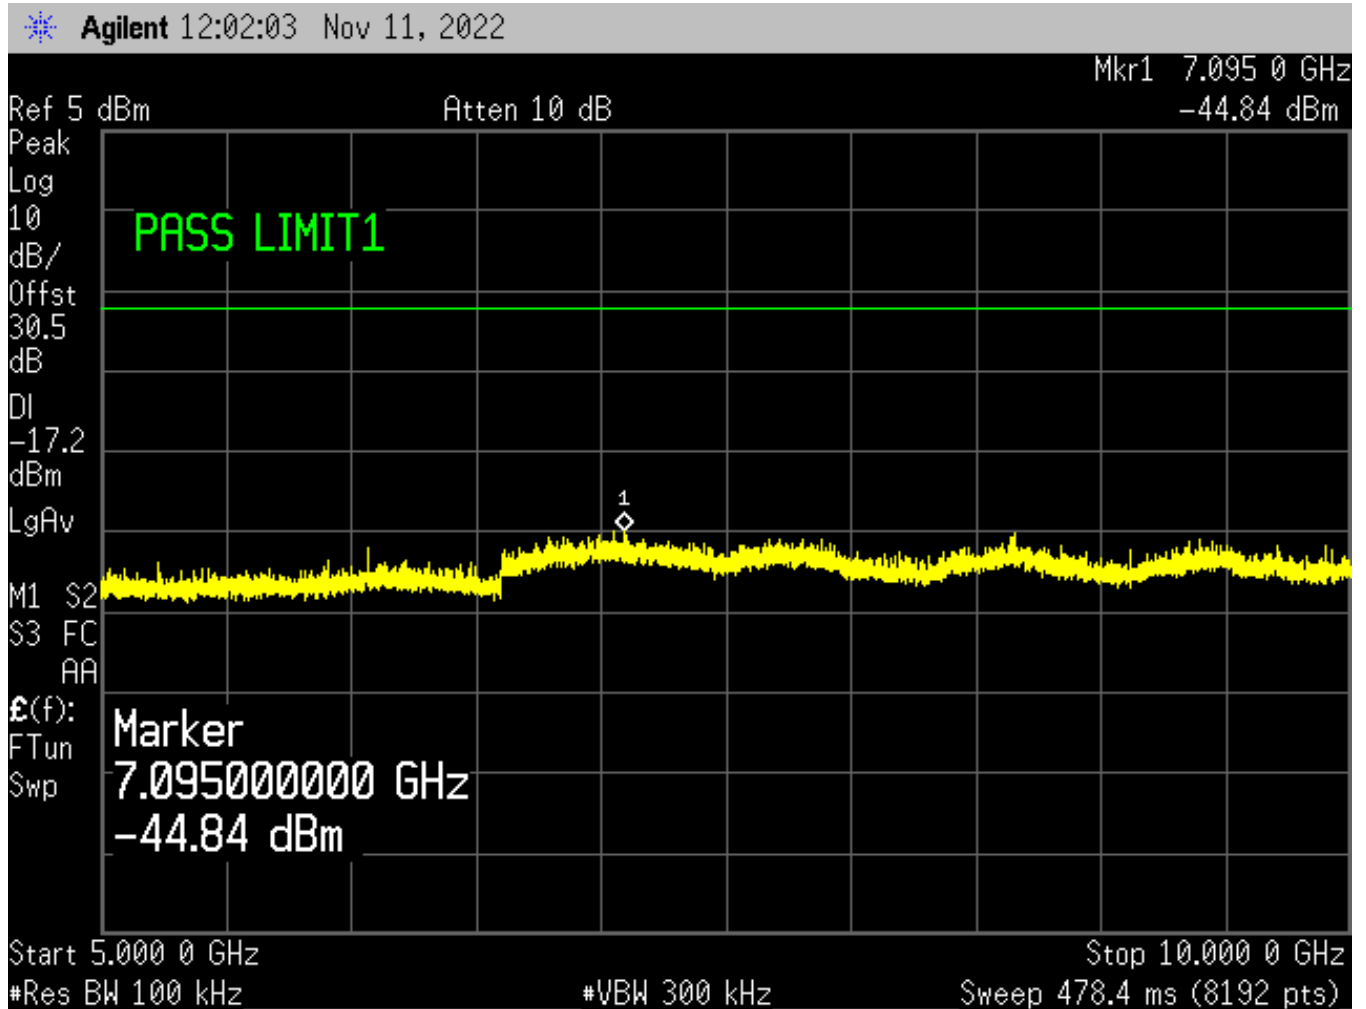




Figure 49: GFSK (1Mbps) Center Channel, Conducted Spurious – Plot 4

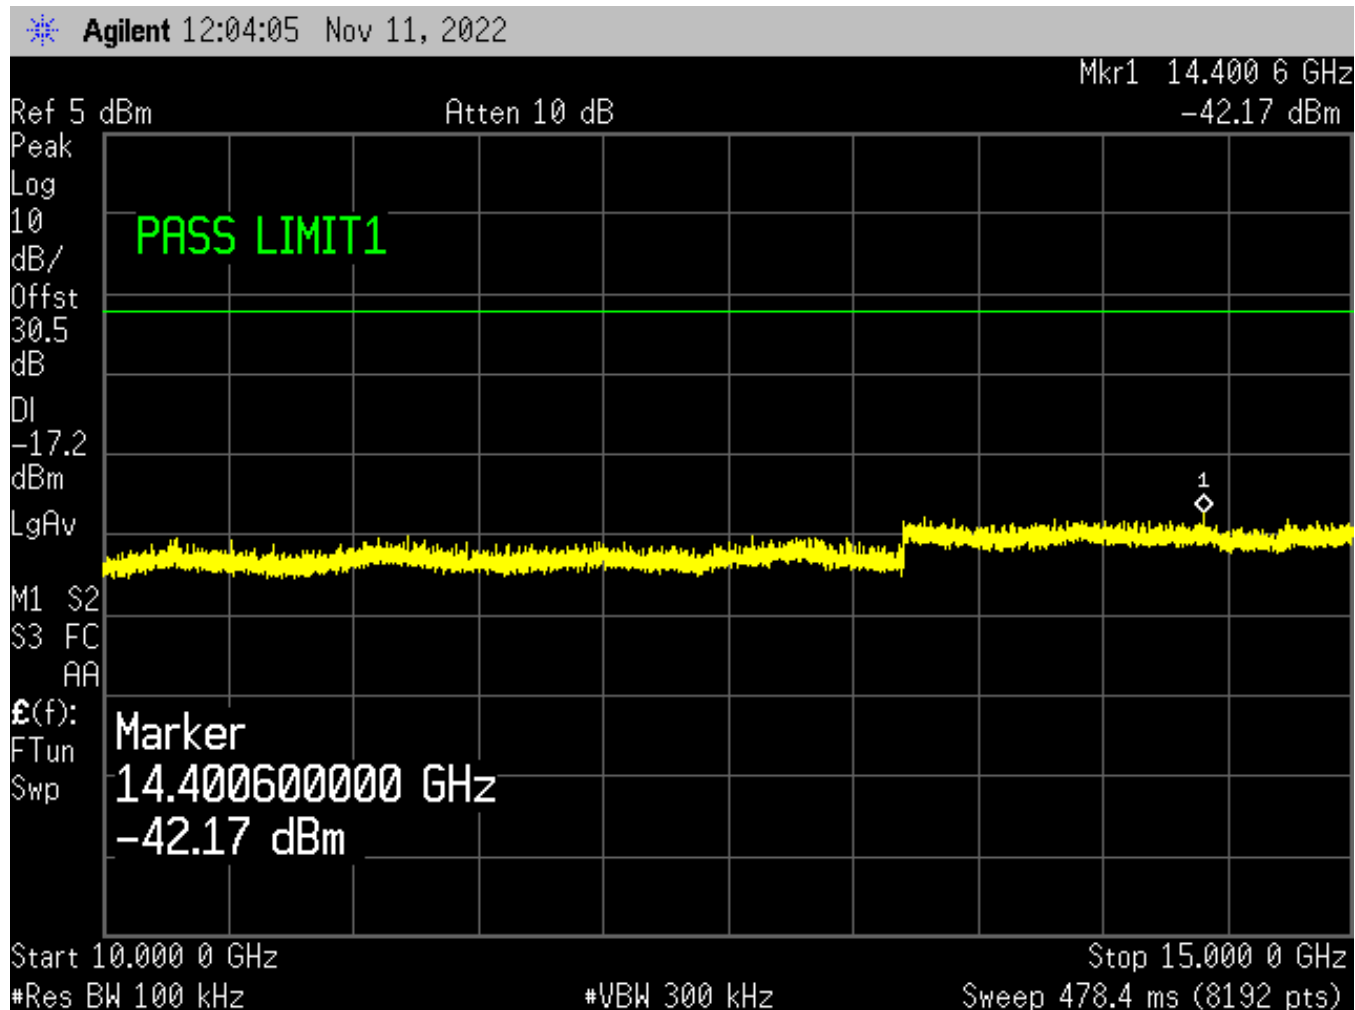




Figure 50: GFSK (1Mbps) Center Channel, Conducted Spurious – Plot 5


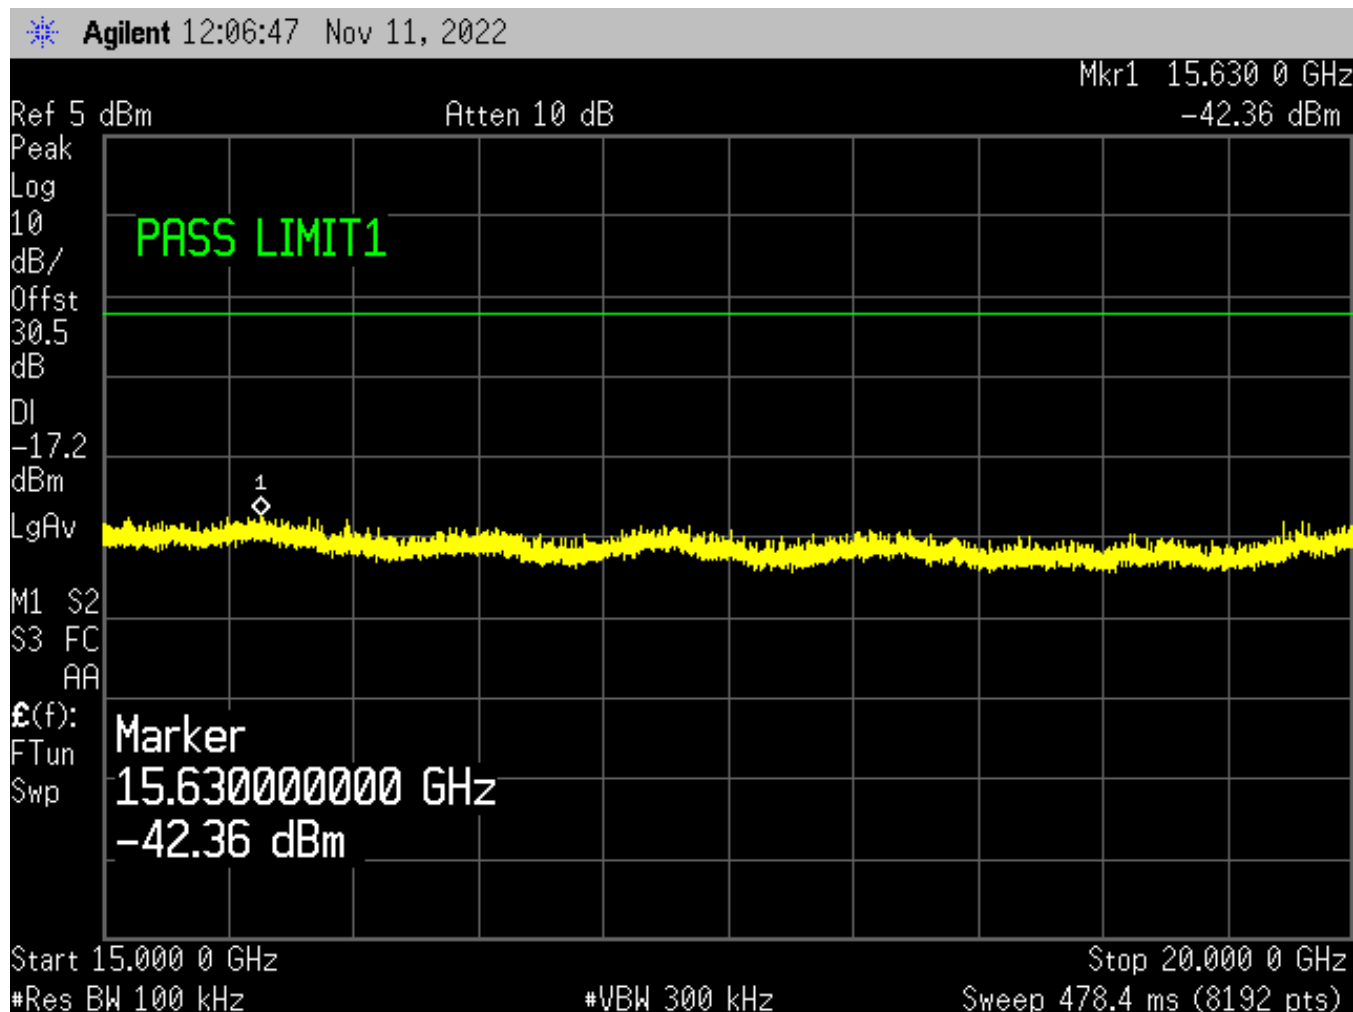




Figure 51: GFSK (1Mbps) Center Channel, Conducted Spurious – Plot 6



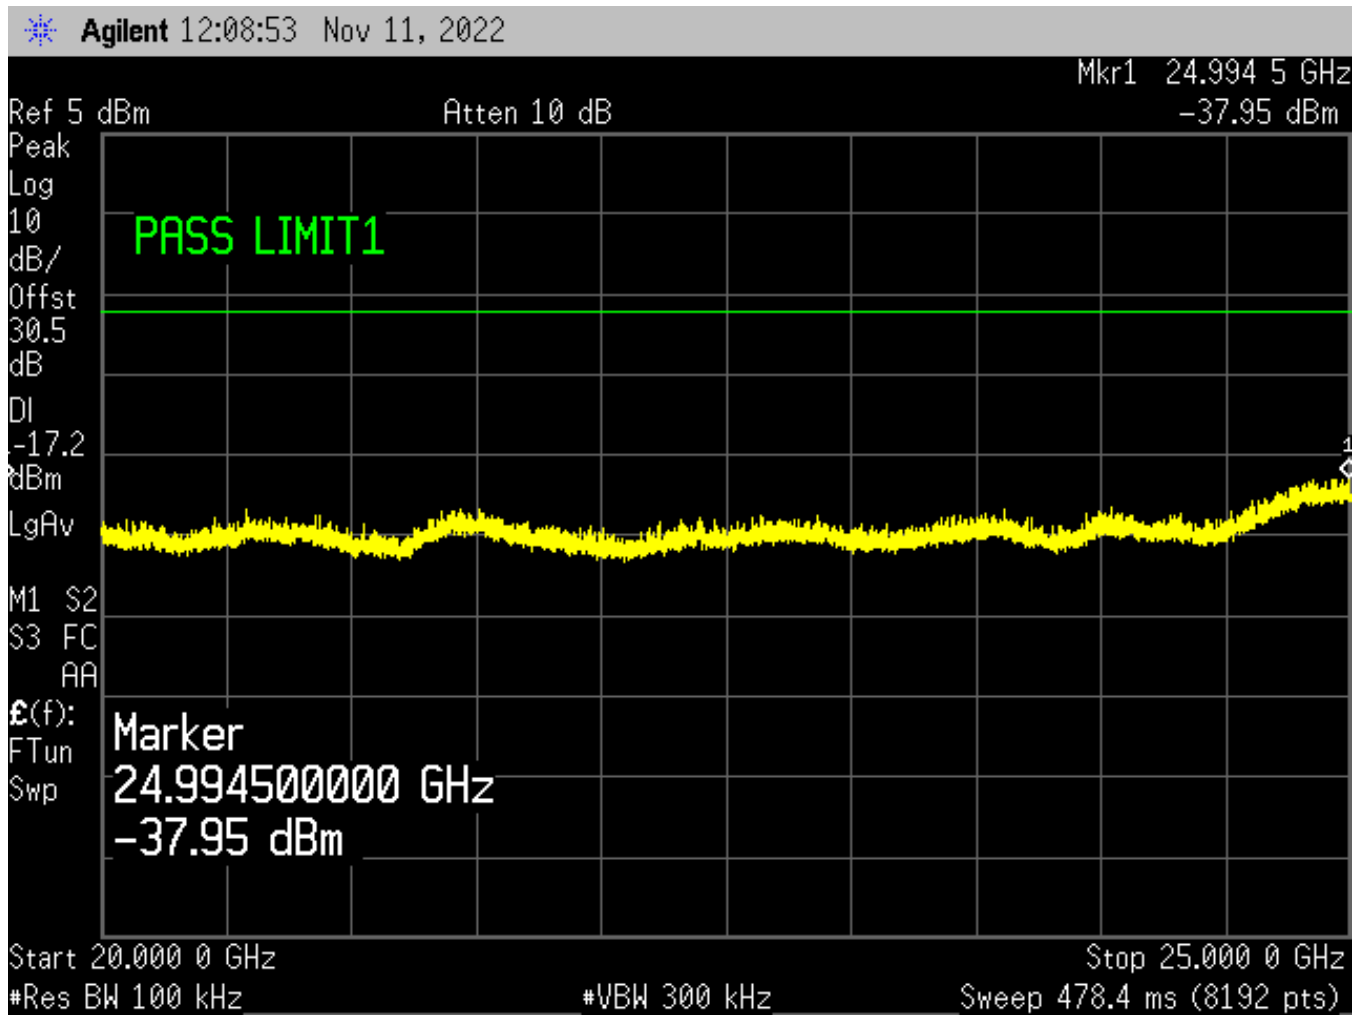

*This Page Intentionally Left Blank*



Figure 52: GFSK (1Mbps) High Channel, Conducted Spurious – Plot 1

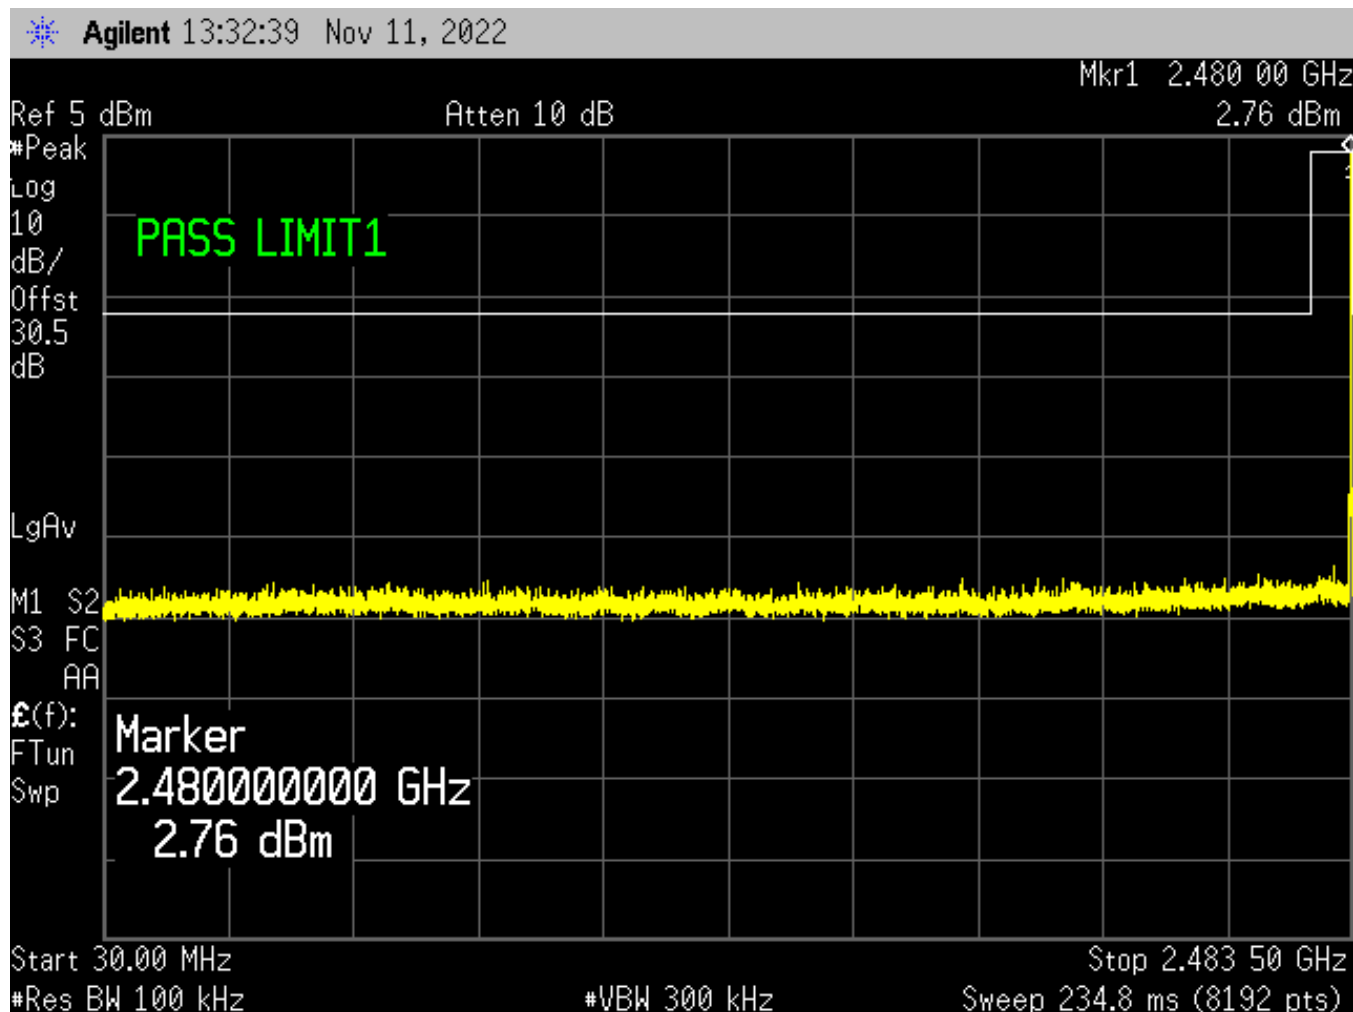




Figure 53: GFSK (1Mbps) High Channel, Conducted Spurious – Plot 2

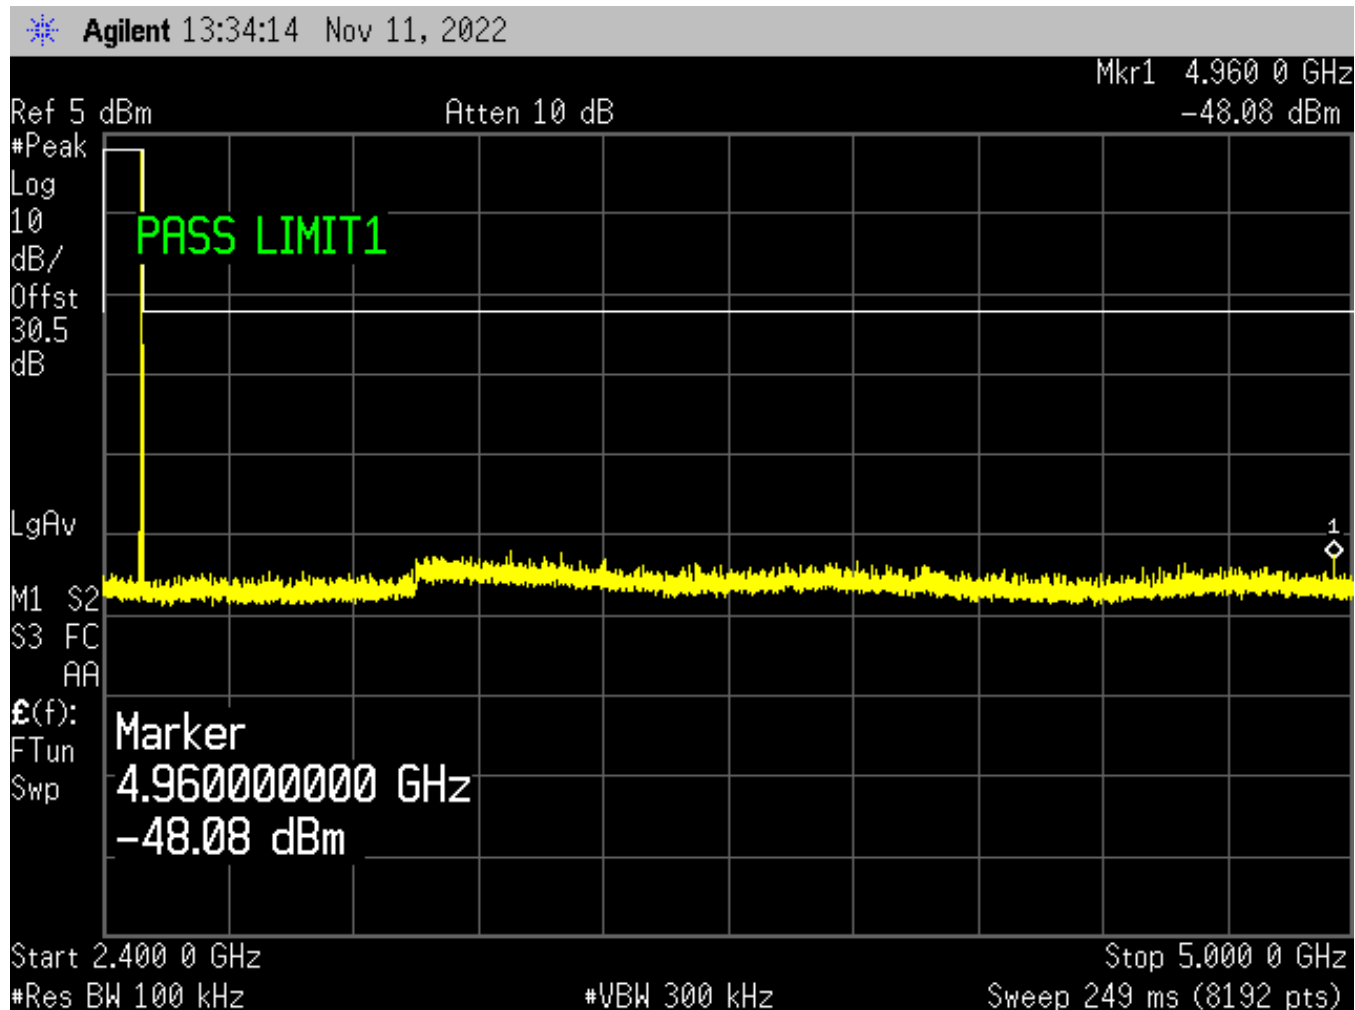






Figure 54: GFSK (1Mbps) High Channel, Conducted Spurious – Plot 3

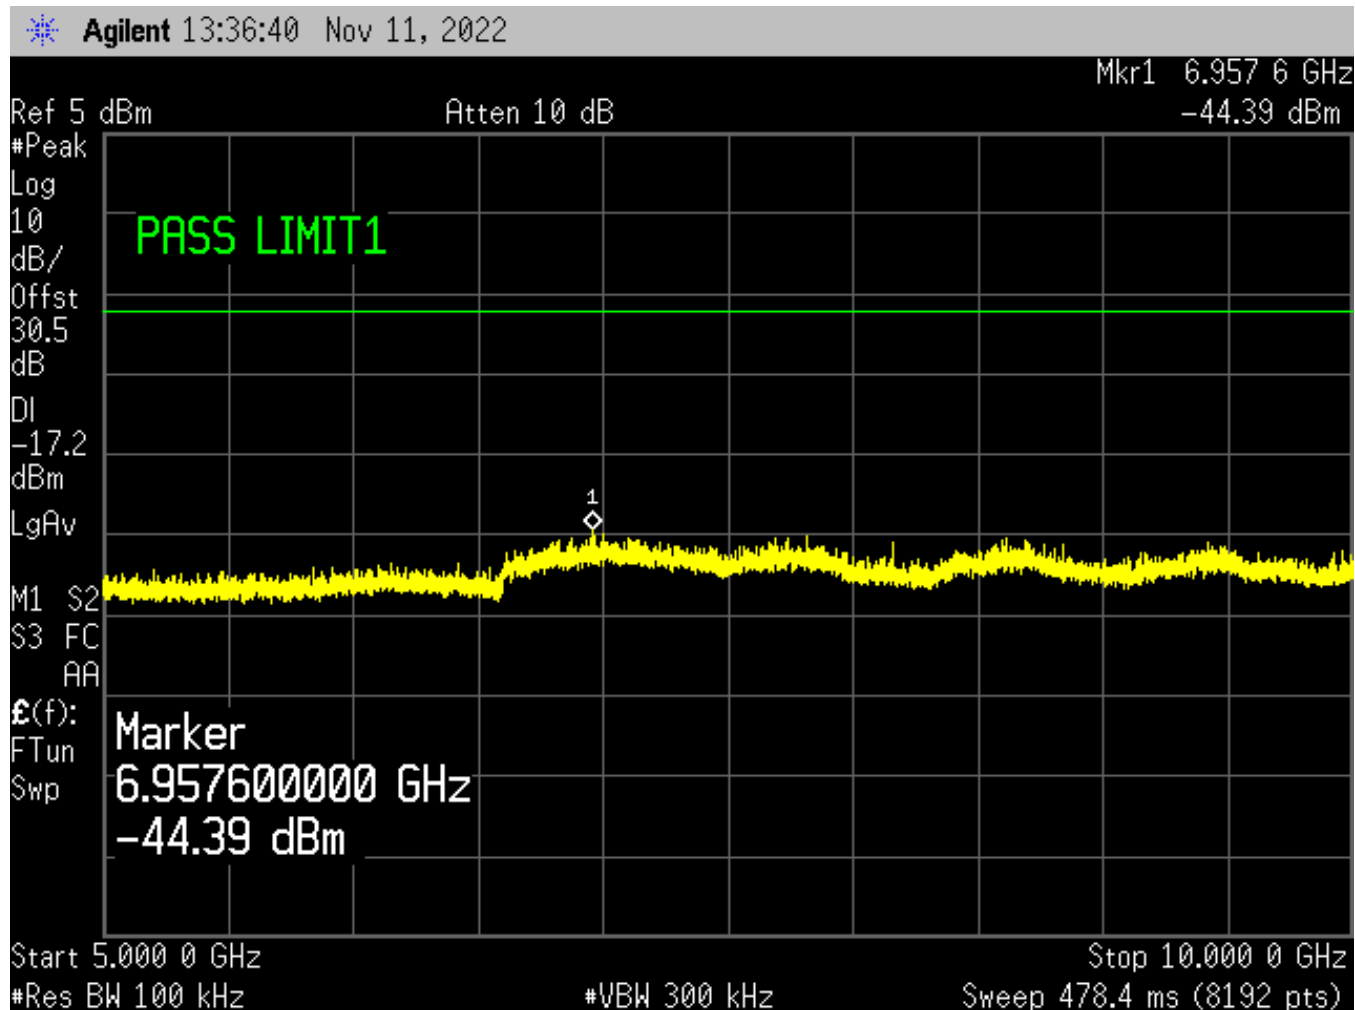




Figure 55: GFSK (1Mbps) High Channel, Conducted Spurious – Plot 4

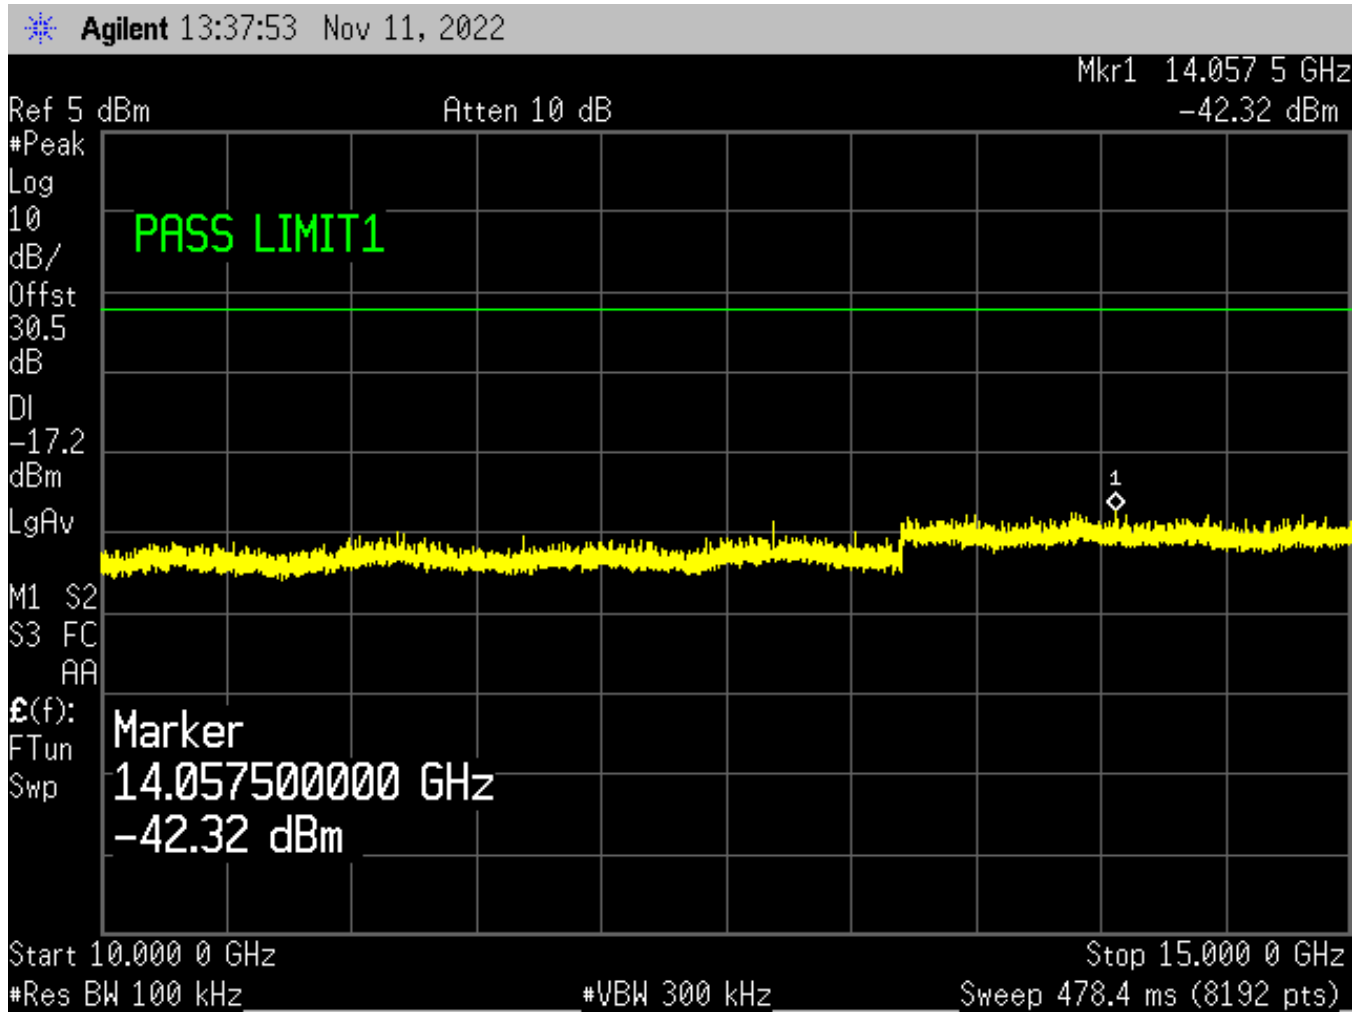




Figure 56: GFSK (1Mbps) High Channel, Conducted Spurious – Plot 5


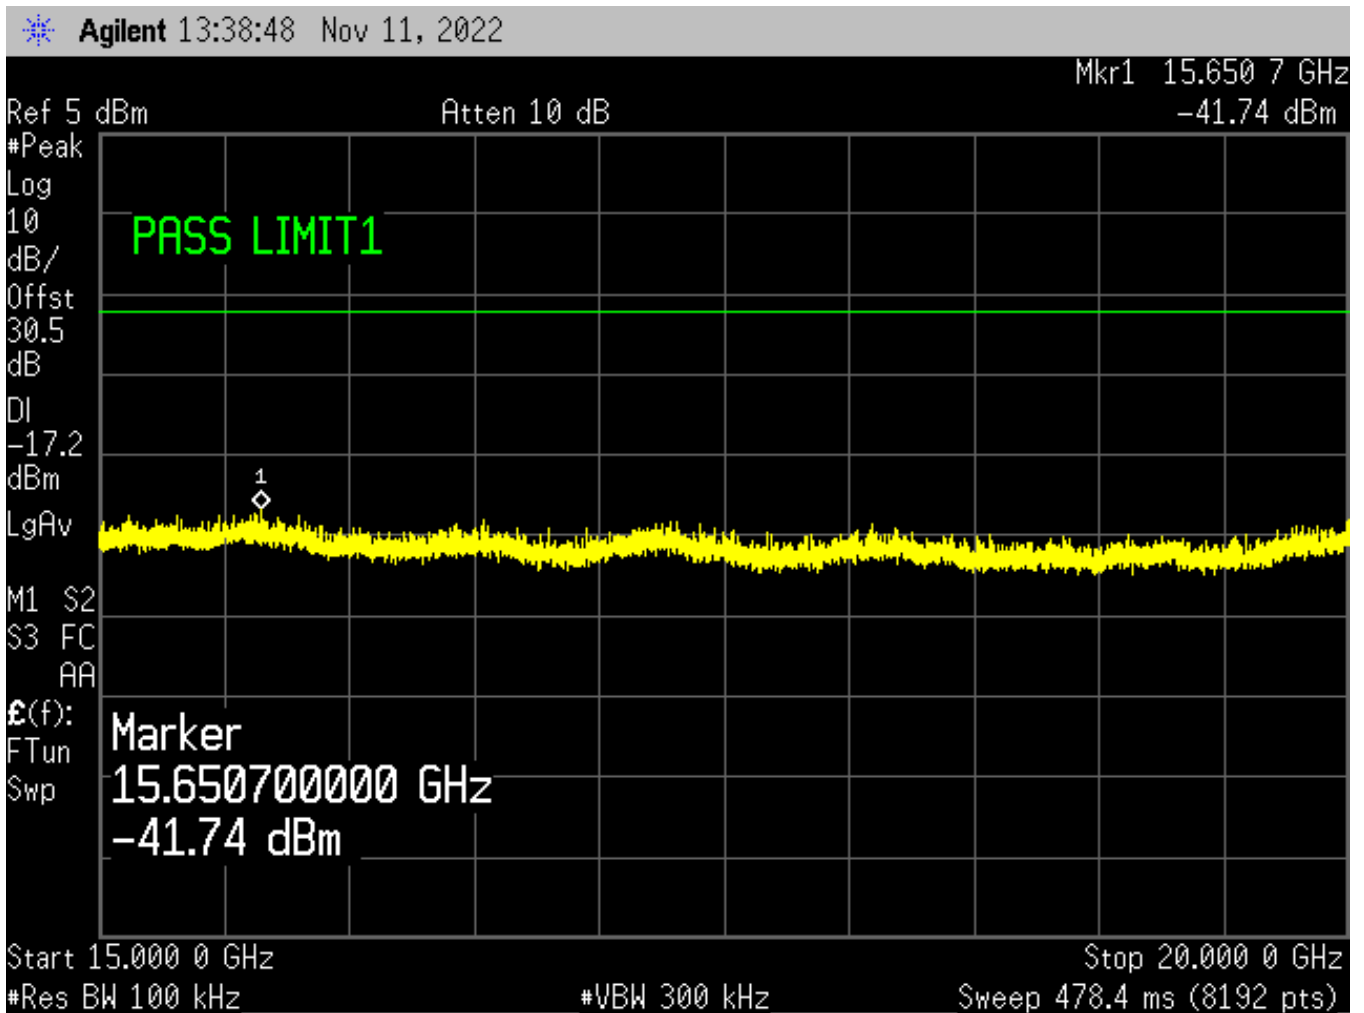




Figure 57: GFSK (1Mbps) High Channel, Conducted Spurious – Plot 6



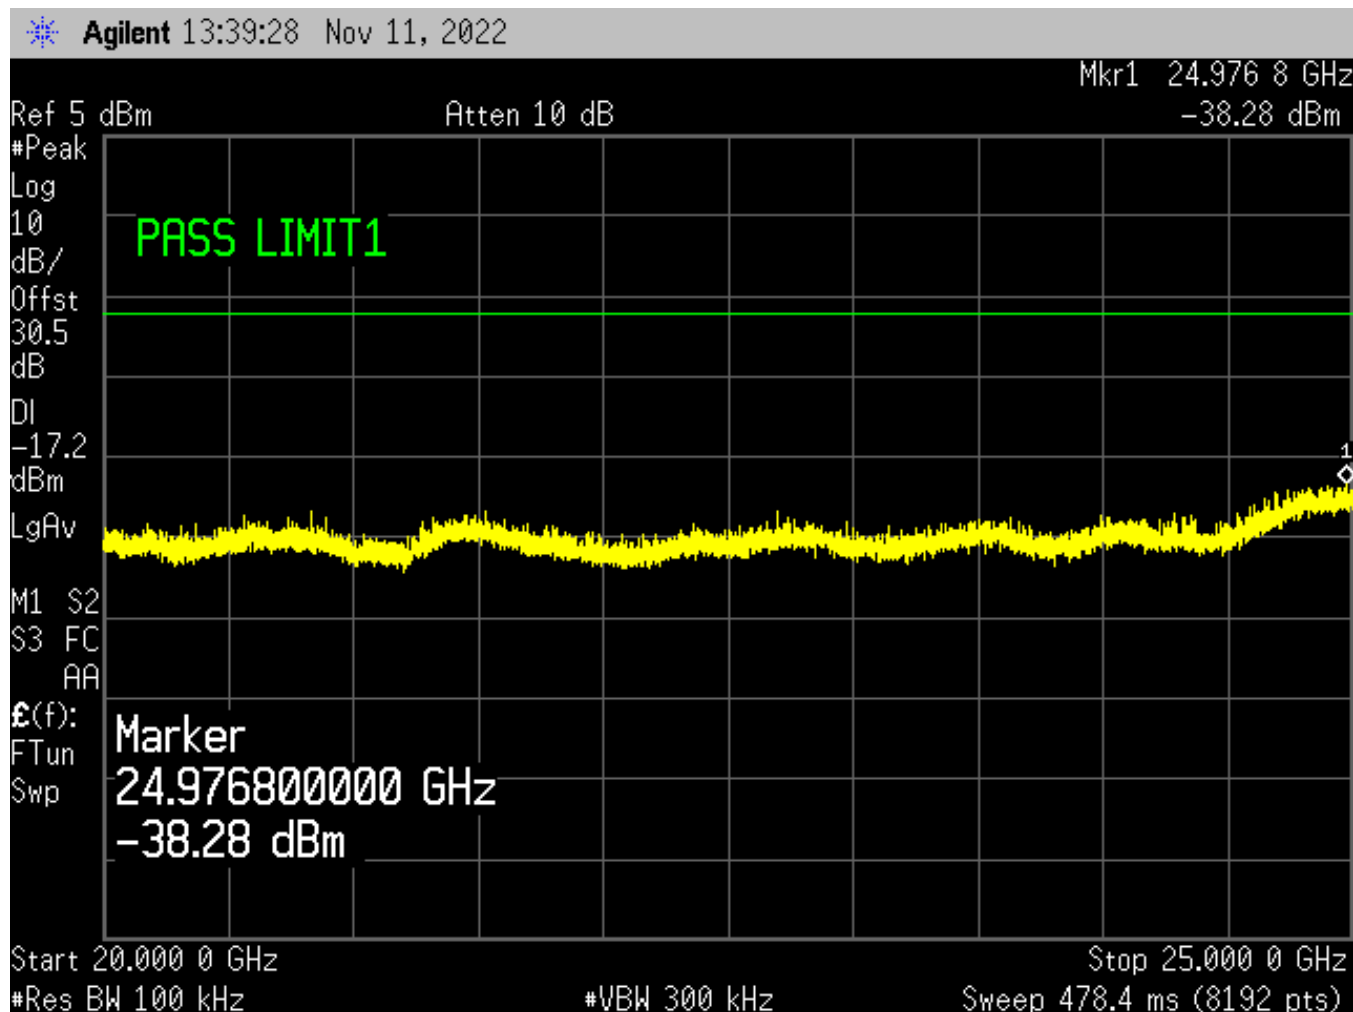

*This Page Intentionally Left Blank*



Figure 58:  $\pi/4$ DQPSK (2Mbps) Center Channel, Conducted Spurious – Plot 1

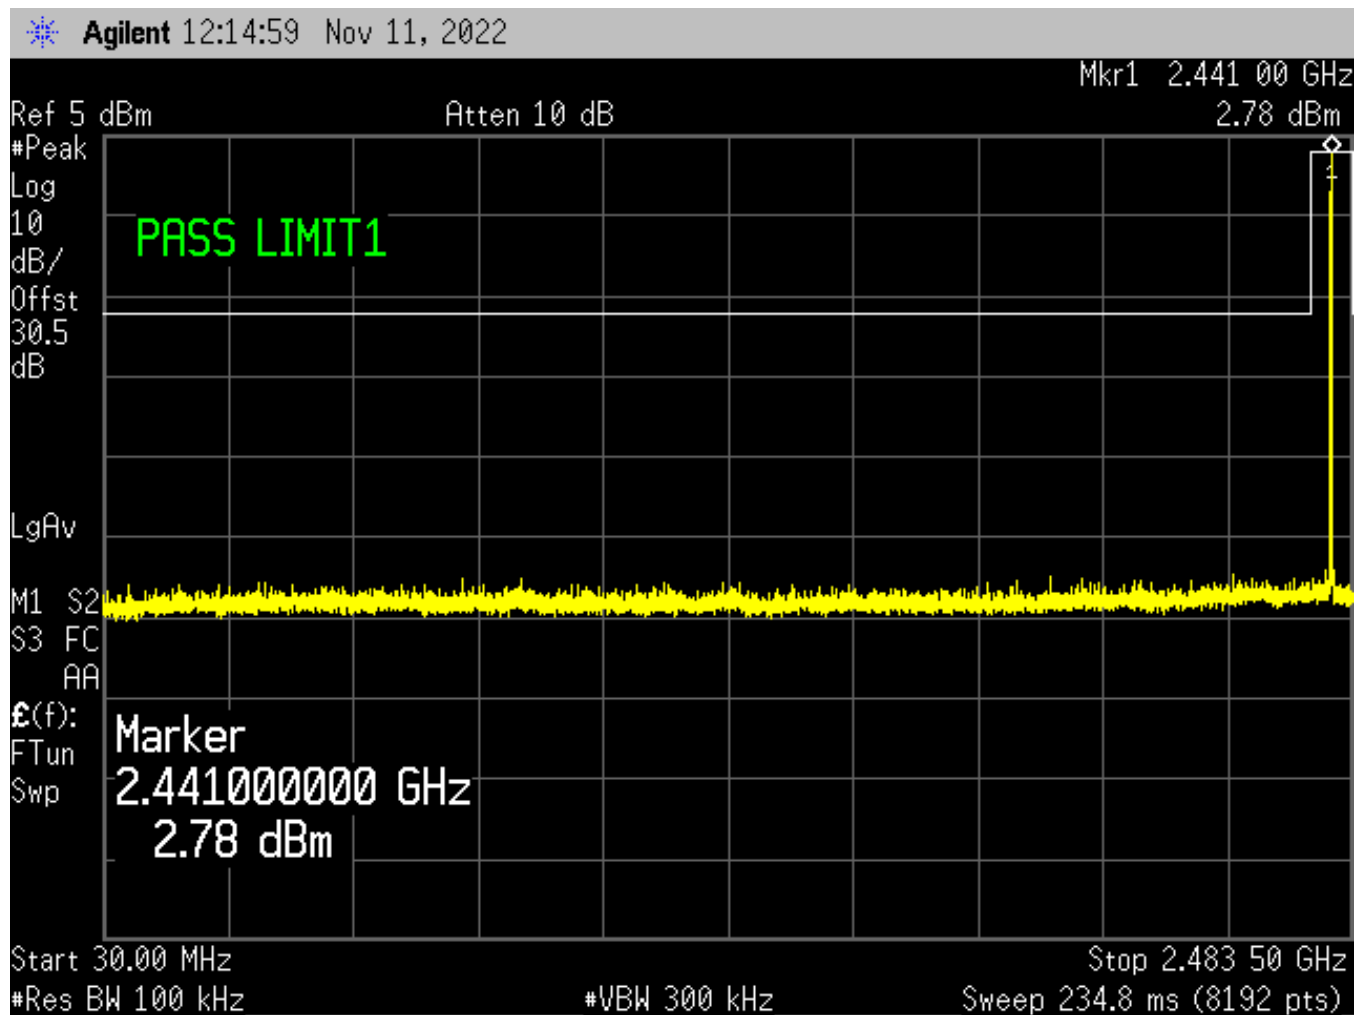




Figure 59:  $\pi/4$ DQPSK (2Mbps) Center Channel, Conducted Spurious – Plot 2

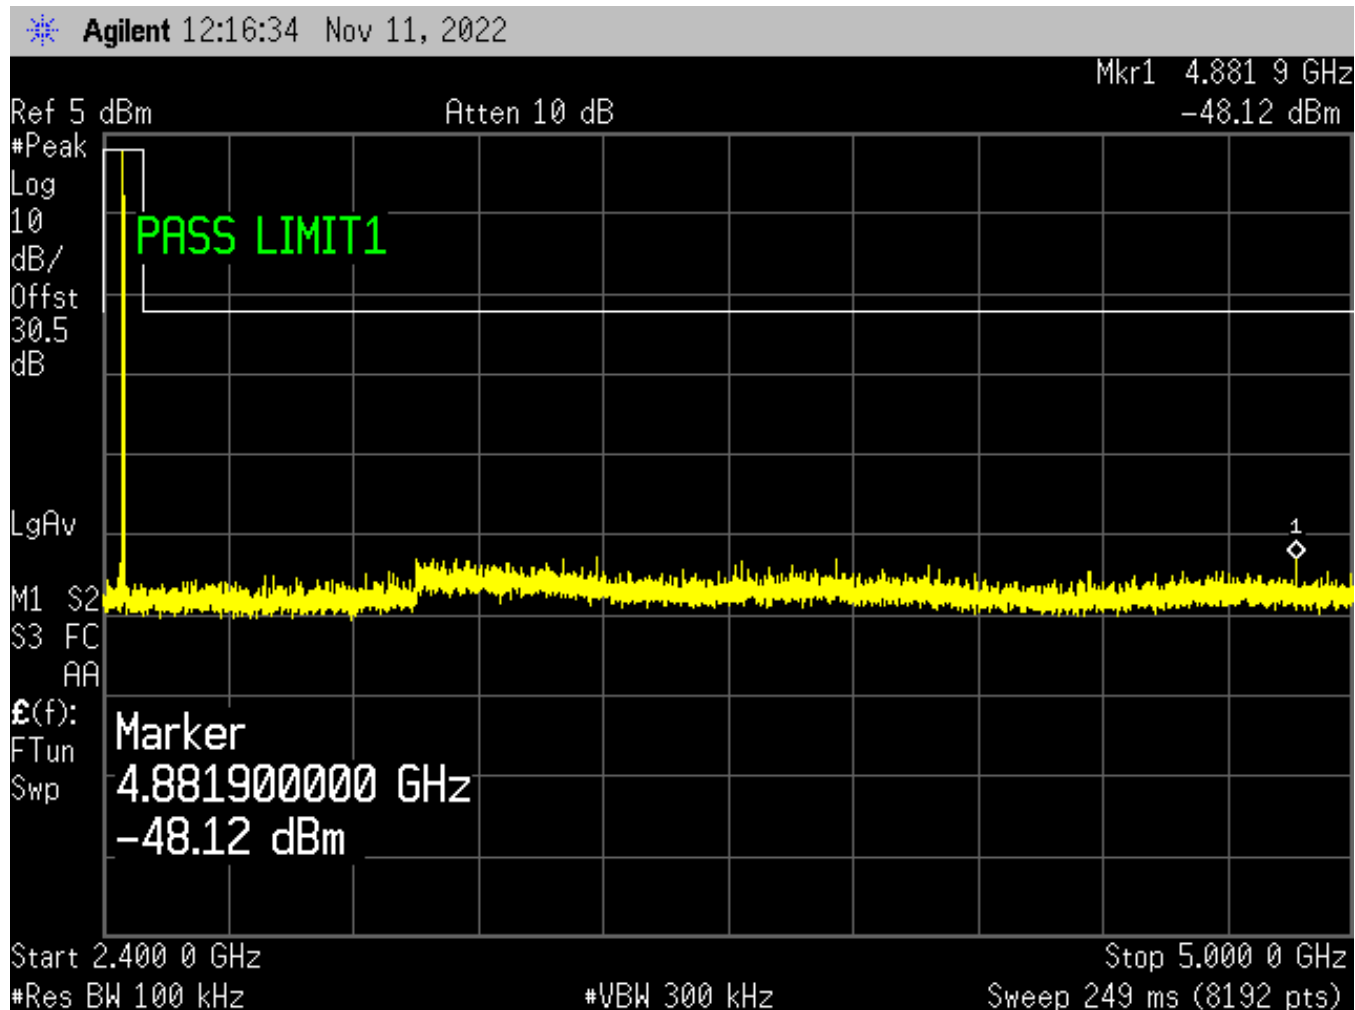




Figure 60:  $\pi/4$ DQPSK (2Mbps) Center Channel, Conducted Spurious – Plot 3

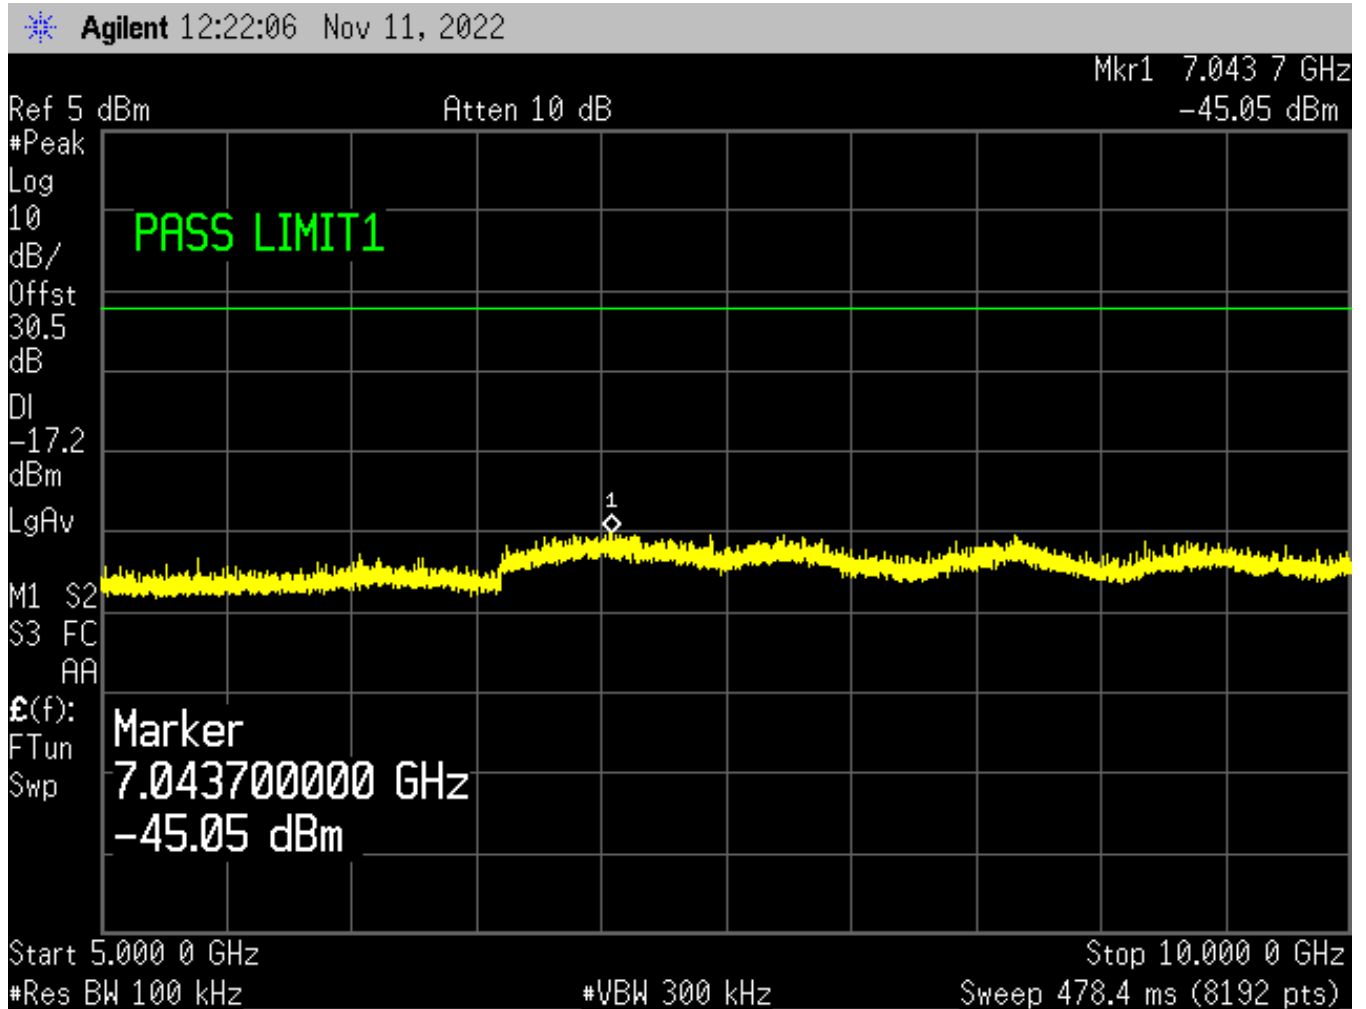






Figure 61:  $\pi/4$ DQPSK (2Mbps) Center Channel, Conducted Spurious – Plot 4

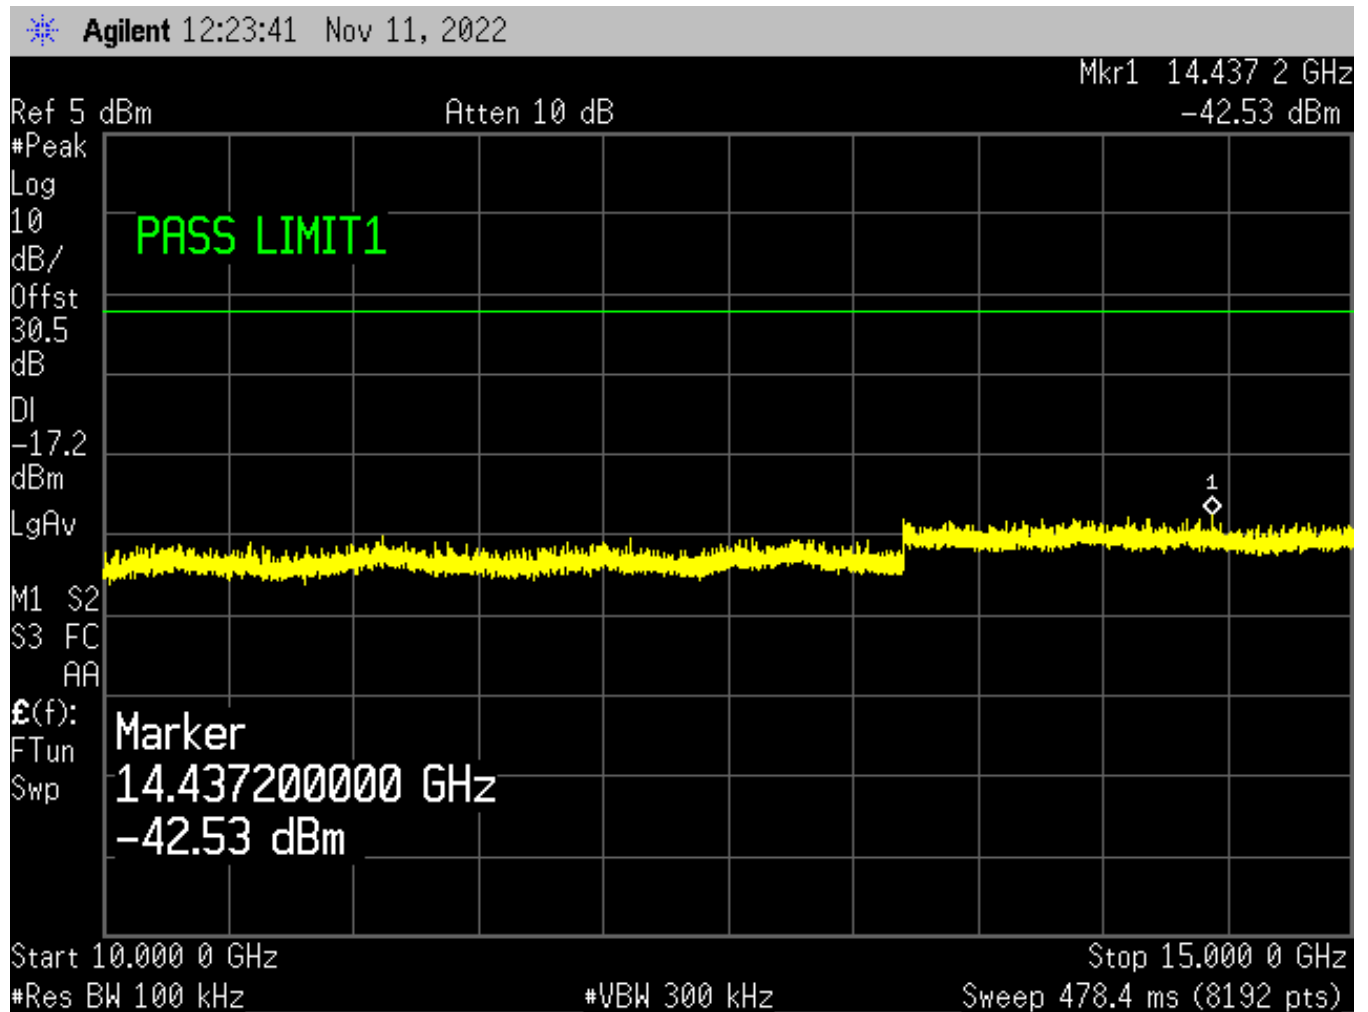




Figure 62:  $\pi/4$ DQPSK (2Mbps) Center Channel, Conducted Spurious – Plot 5


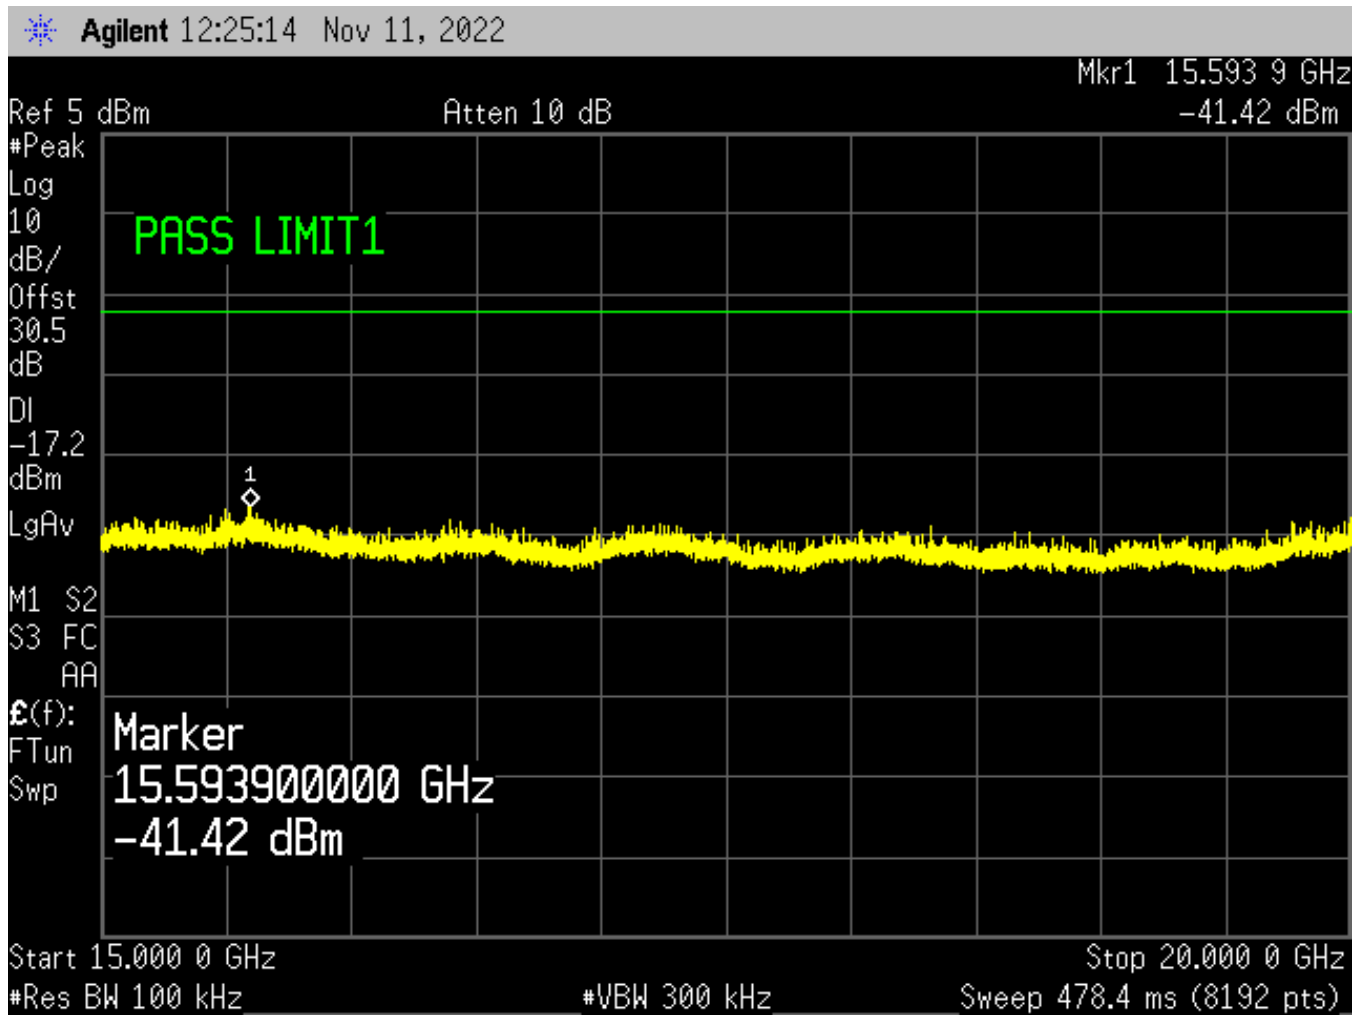




Figure 63:  $\pi/4$ DQPSK (2Mbps) Center Channel, Conducted Spurious – Plot 6



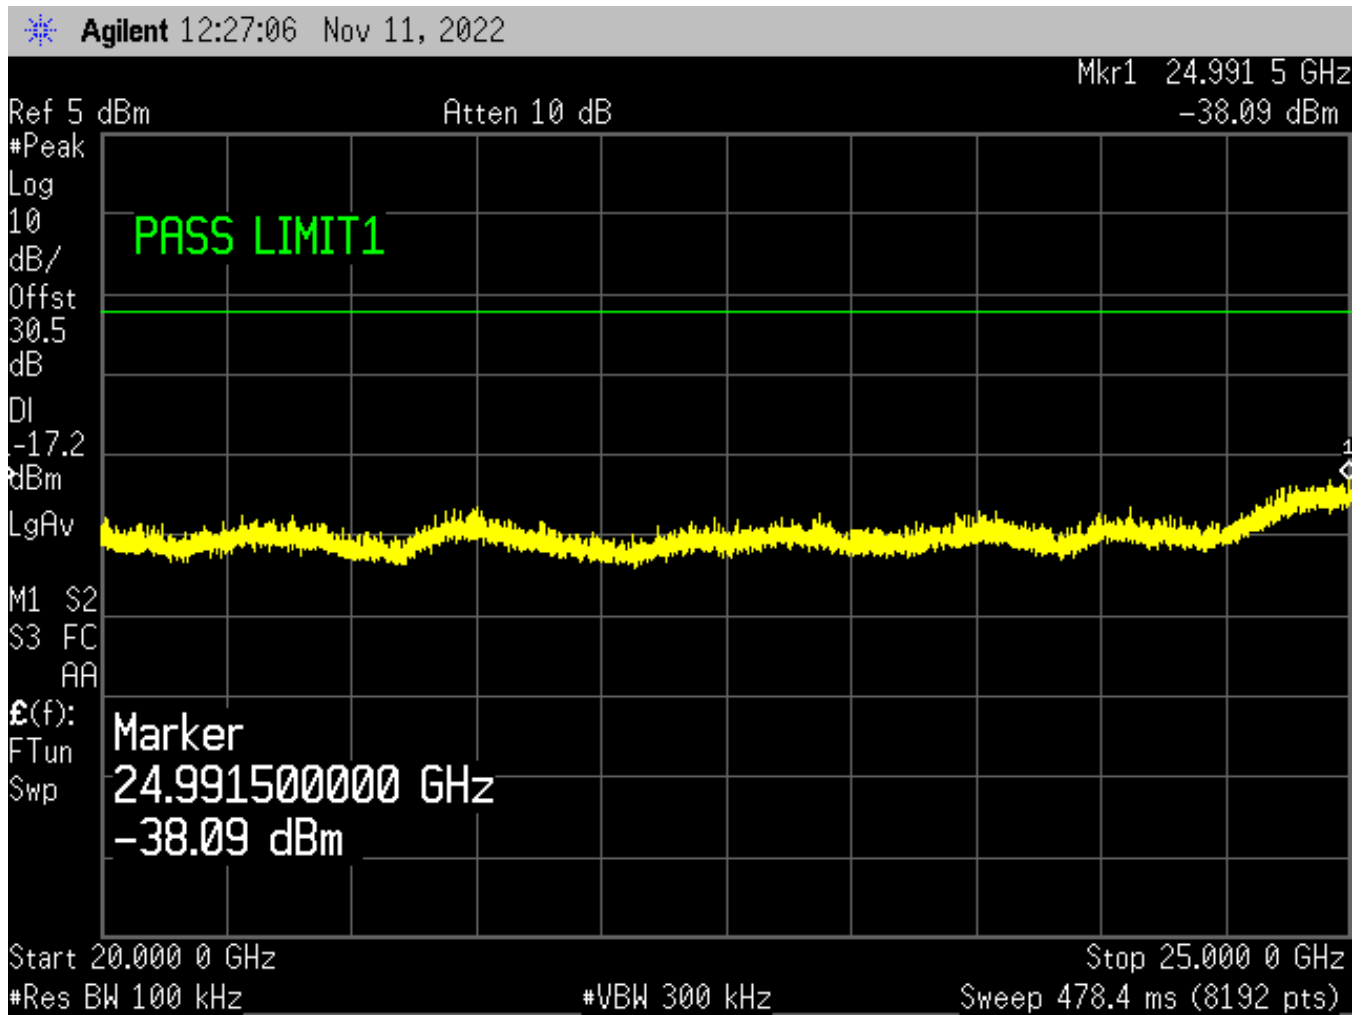

*This Page Intentionally Left Blank*



Figure 64: 8DPSK (3Mbps) Center Channel, Conducted Spurious – Plot 1

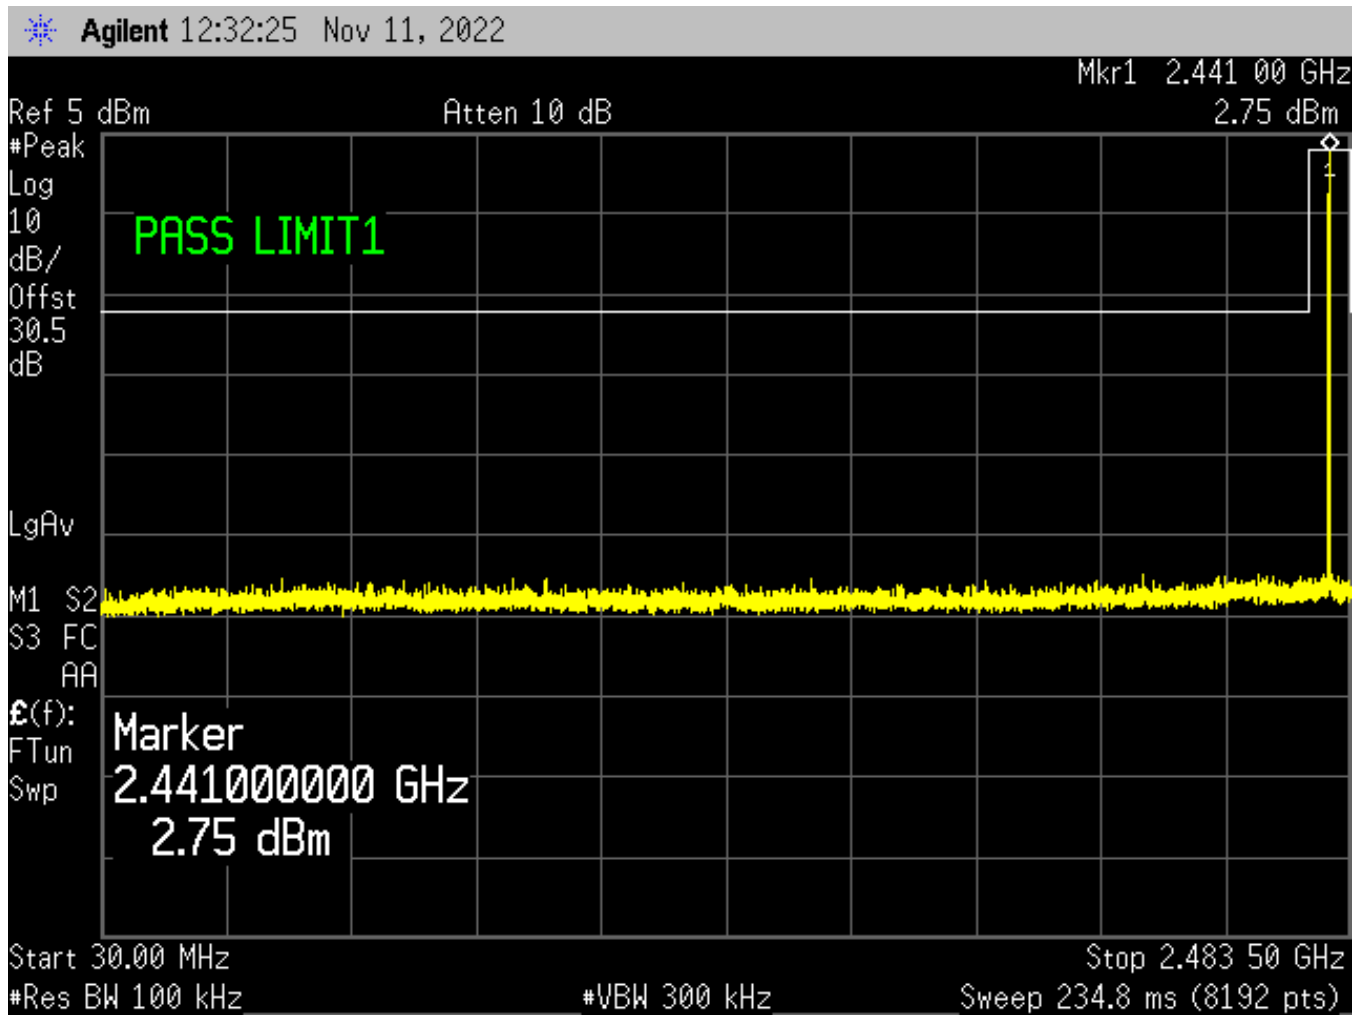




Figure 65: 8DPSK (3Mbps) Center Channel, Conducted Spurious – Plot 2

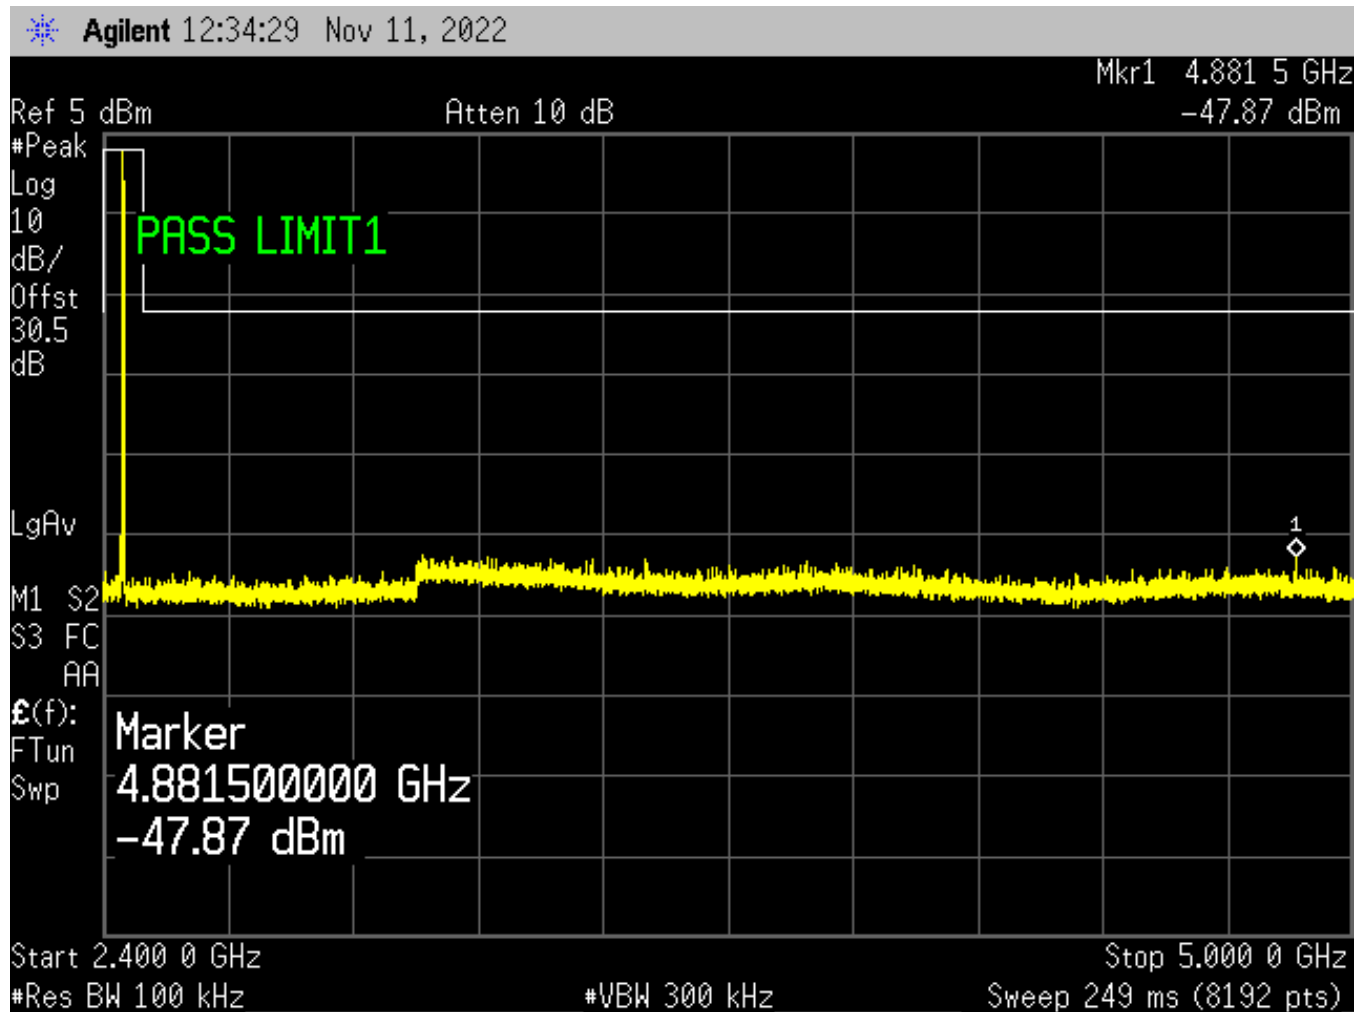




Figure 66: 8DPSK (3Mbps) Center Channel, Conducted Spurious – Plot 3

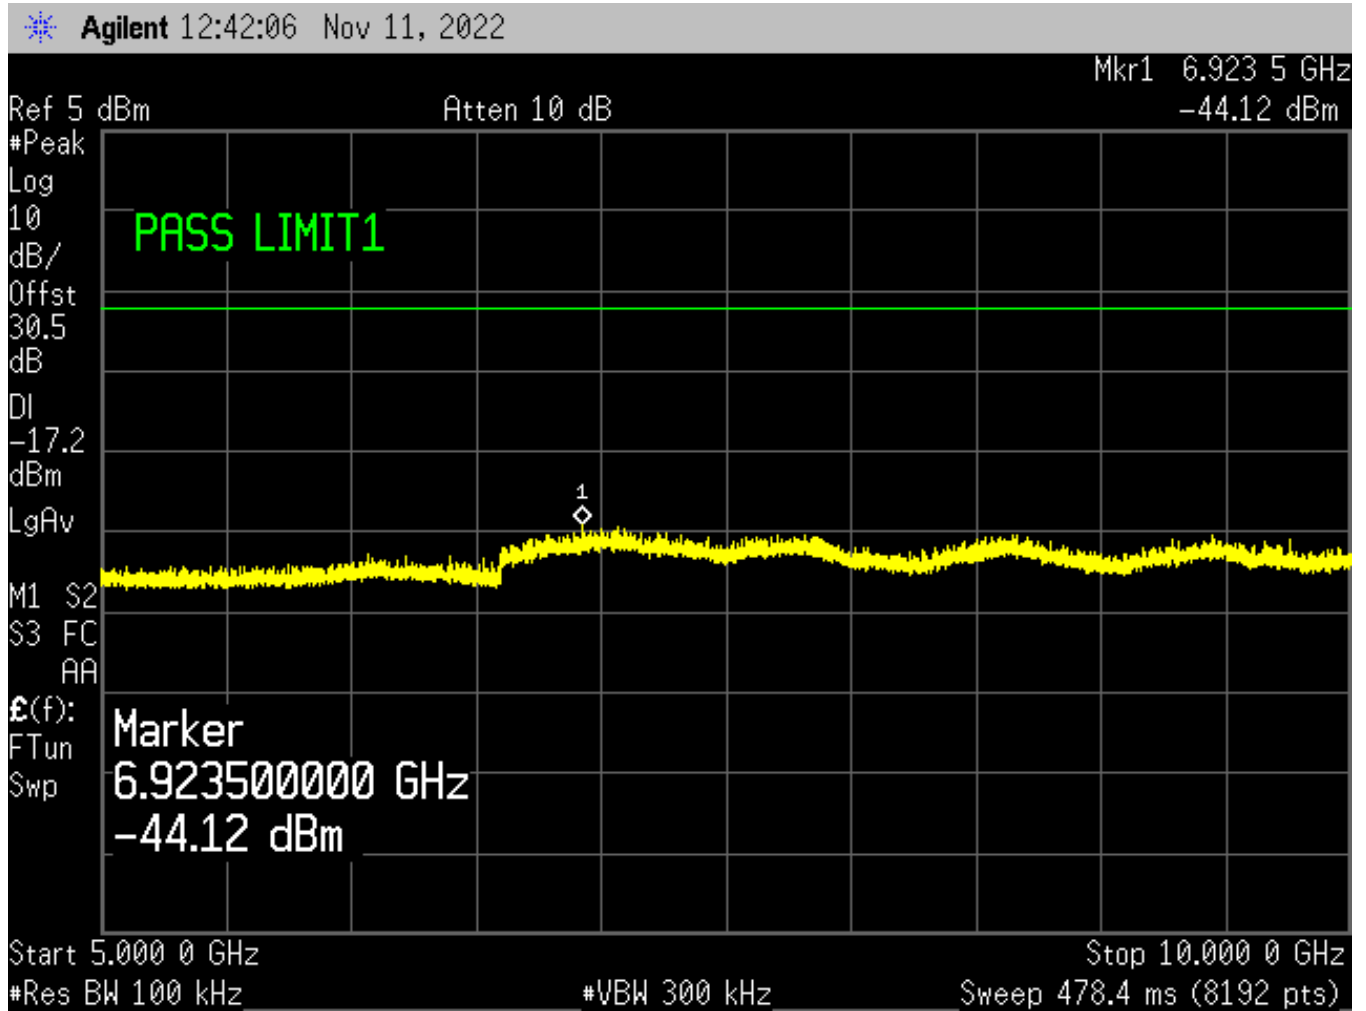




Figure 67: 8DPSK (3Mbps) Center Channel, Conducted Spurious – Plot 4

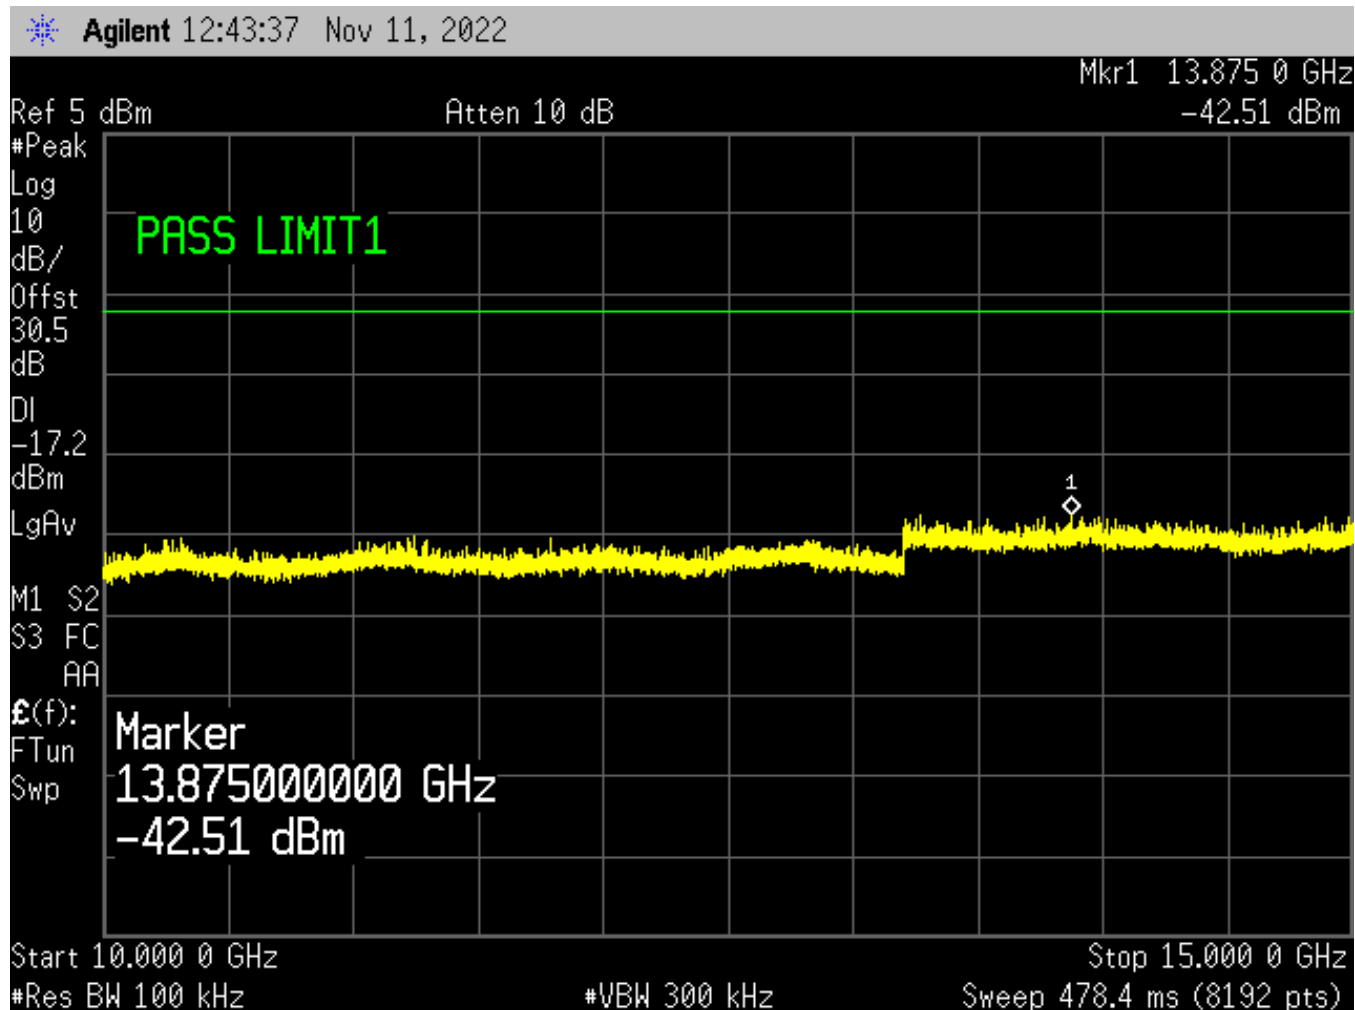






Figure 68: 8DPSK (3Mbps) Center Channel, Conducted Spurious – Plot 5


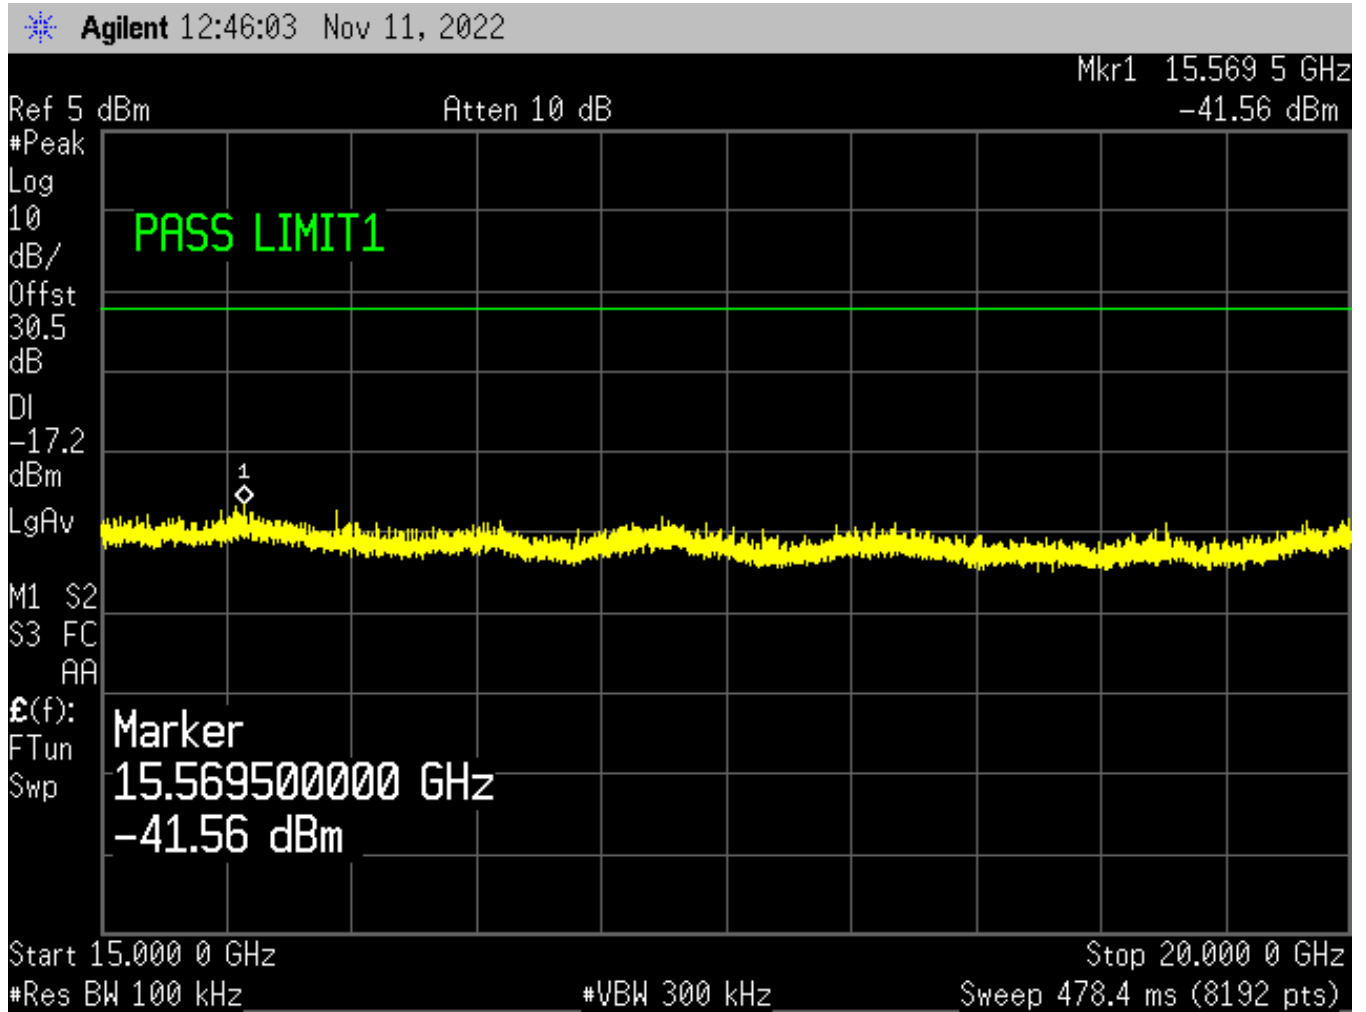




Figure 69: 8DPSK (3Mbps) Center Channel, Conducted Spurious – Plot 6



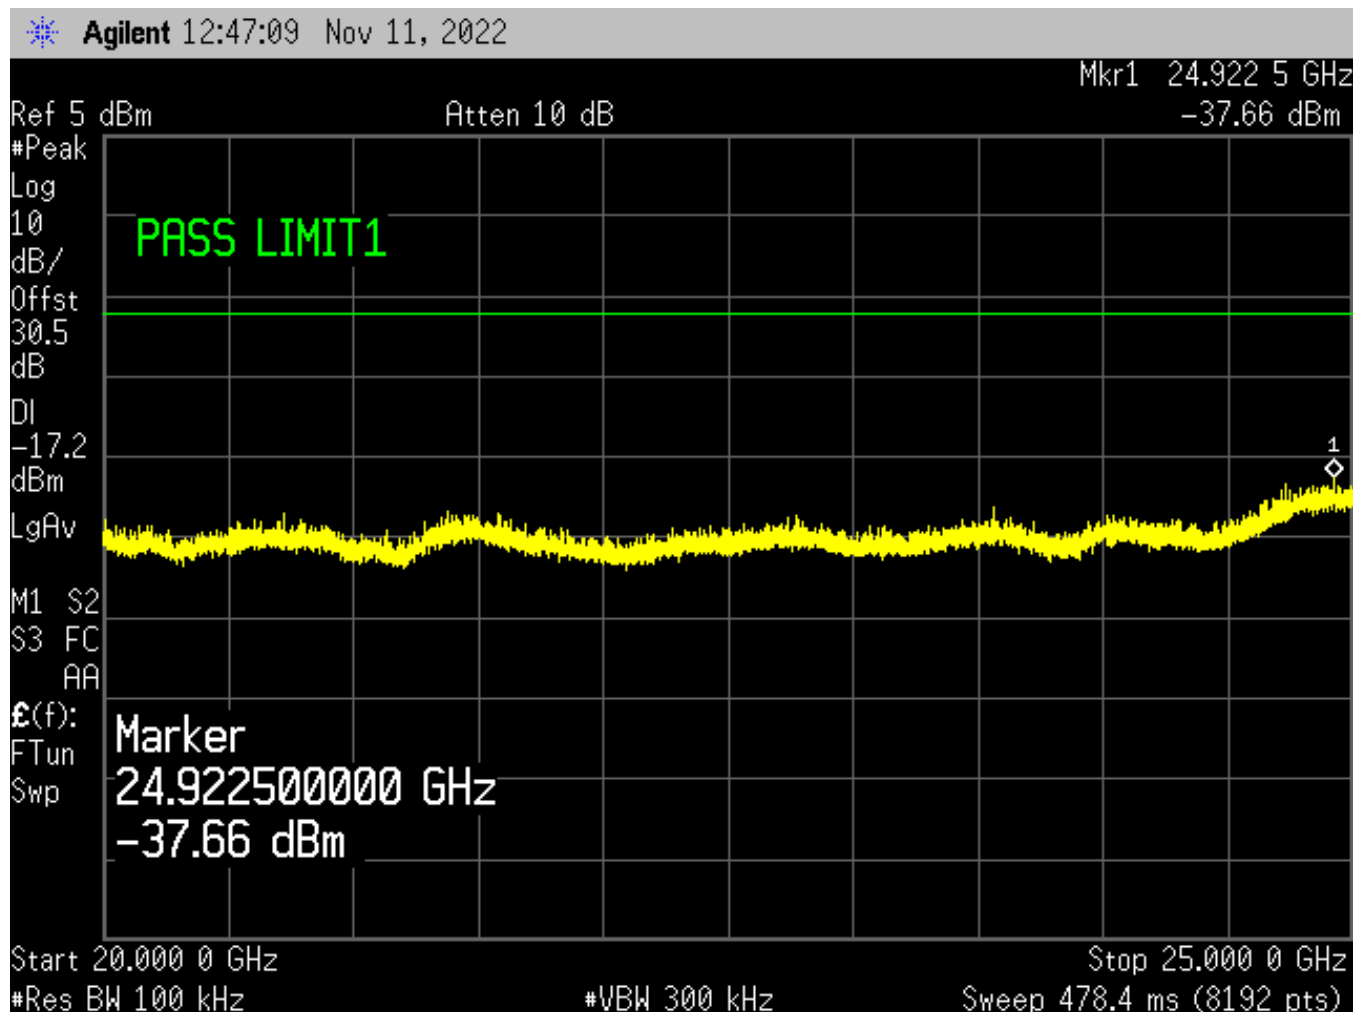

## 2.8 General Field Strength Requirements – Radiated Emissions

### 2.8.1 Requirements

Compliance Standard: FCC Part 15.205 and 15.209

FCC Compliance Limits		
Frequency Range	3m Limit	
30 – 88 MHz	100 $\mu\text{V/m}$ (QP)	
88 – 216 MHz	150 $\mu\text{V/m}$ (QP)	
216 – 960 MHz	200 $\mu\text{V/m}$ (QP)	
> 960 MHz	500 $\mu\text{V/m}$ (AVG)	5000 $\mu\text{V/m}$ (Peak)

### 2.8.2 Test Procedure Summary

The requirements of FCC Part 15, RSS-Gen, and ICES-003 call for the EUT to be placed on a 1m X 1.5m non-conductive motorized turntable at a height of 80cm for radiated testing of frequencies up to 1000 MHz, and a height of 1.5m for testing of frequencies above 1000 MHz. Please note that the radiated emissions measured during this testing, were performed at a distance of 3-meters.

An initial pre-scan of the EUT was performed to identify any emissions that exceed, or come within 6dB of, the applicable limit. This pre-scan was performed with the employment of a spectrum analyzer peak detector function. The highest amplitude (worst-case) emissions noted during the pre-scan were selected for final compliance measurements.

The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Broadband log periodic and double-ridged horn antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The output of the antenna was connected to the input of the spectrum analyzer and the emissions in the frequency range of 30 MHz to 25 GHz were evaluated. The EUT peripherals were placed on the table in accordance with ANSI C63.4. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.



The detector function was set to quasi-peak for measurements below 1 GHz. The measurement bandwidth of the spectrum analyzer system was set to at least 120 kHz, with all post-detector filtering no less than 10 times the measurement bandwidth. For measurements above 1 GHz, both the peak and the average levels are recorded, using a measurement bandwidth of 1 MHz. For average measurements, a video bandwidth setting of 10 Hz was used, in the case of video averaging; otherwise, an EMI AVG detector shall be employed.

To ensure that the support laptop did not interfere with radiated measurements of frequencies above 1GHz, the applicant has completely disabled the WiFi capabilities within the computer’s bios. For measurements of frequencies below 1000 MHz, the laptop and the AC/DC power supply were shielded from the test site via the use of EMF/EMI Faraday Blankets. Overall, the support laptop, and power supply, did not impact the 3m radiated emissions testing due to the shielding effectiveness of these protective materials.

### 2.8.3 Radiated Data Reduction and Reporting

To convert the raw spectrum analyzer radiated data into a form that can be compared with the FCC limits, it is necessary to account for various calibration factors that are supplied with the antenna(s) and other measurement equipment. These factors include the antenna factor ((AF)(in dB/m)), cable loss factors ((CF)(in dB)), and the pre-amplifier gain [if applicable] ((G)(in dB)). These correction values are algebraically added to the raw Spectrum Analyzer Voltage (in dBμV) to obtain the corrected radiated electric field, which shall be the final corrected logarithm amplitude ((Corr. Meas.)(in dBμV/m)). This logarithm amplitude is then compared to the FCC limit, which has been converted to a unit of log in dBμV/m.

Example:

Spectrum Analyzer Voltage:	VdBμV (SA)
Antenna Correction Factor:	AFdB/m
Cable Correction Factor:	CFdB
Pre-Amplifier Gain (if applicable):	GdB
Electric Field:	EdBμV/m = V dBμV (SA) + AFdB/m + CFdB - GdB
To convert from linear units of measure:	dBuV/m = 20LOG(uV/m)
To convert FCC limits, based on D <sub>Measure</sub> :	3m Limit = 10m Limit + 20LOG(10/3)



Environmental Conditions During Radiated Emissions Testing

Ambient Temperature:	20 °C
Relative Humidity:	55 %

**2.8.4 Measurement Method and Results**

The reduced testing procedures outlined in ANSI C63.10 (2013), Section 5.6.2 and 5.6.2.2 were employed. The radiated spurious emission test data correlating to the center channel of all three modulation modes is provided below. The worst-case mode, with regard to peak power output, (GFSK) was utilized to provide the radiated spurious emission test data for the low and high channels.

The EUT was configured in a fully-modulated mode, with the hopping stopped.

The EUT was tested while positioned in the worst-case orientation, based the three-axes orthogonal plane evaluation of the fundamental field strength at 3-meters.

The EUT complies with the requirements this section.

There were no emissions detected in the frequency range of 18 GHz – 25 GHz.

Table 8: Radio Fundamental, EUT Axis Evaluation (GFSK, Center Channel)

Frequency (MHz)	Polarity H/V	SA Level (dBuV)	Corr. Factors (dB)	Corr. Level (dBuV/m)	Corr. Level (uV/m)	Detector	Comments
2441.00	V	109.6	-17.4	92.2	40725.8	Peak	X-Axis
2441.00	V	111.3	-17.4	93.9	49530.2	Peak	Y-Axis
2441.00	V	113.1	-17.4	95.7	60655.5	Peak	Z-Axis
2441.00	H	113.9	-17.4	96.8	69003.3	Peak	X-Axis
2441.00	H	111.0	-17.4	93.6	47793.6	Peak	Y-Axis
2441.00	H	111.9	-17.4	94.5	52950.5	Peak	Z-Axis



Table 9: Radiated Emissions Test Data – 30 MHz to 1000 MHz


Frequency (MHz)	Detector	Corr. Meas. (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Turn Table (deg)	Antenna (cm)
71.982	Peak	27.699	--	--	270	Vert, 150
	QP	24.381	40	-15.619	270	Vert, 150
95.946	Peak	29.420	--	--	180	Vert, 130
	QP	26.715	44	-17.285	180	Vert, 130
167.958	Peak	29.683	--	--	180	Vert, 120
	QP	25.685	44	-18.315	180	Vert, 120
263.874	Peak	33.201	--	--	0	Horiz, 120
	QP	30.526	46	-15.474	0	Horiz, 100
407.777	Peak	31.216	--	--	90	Vert, 100
	QP	25.40	46	-20.600	90	Vert, 100
977.987	Peak	36.357	--	--	0	Horiz, 100
	QP	29.180	54	-24.820	0	Horiz, 100

For measurements of frequencies below 1000 MHz, the EUT was tuned to the center channel (2441 MHz) and set to a fully-modulated mode using GFSK. Changing the modulation type, or carrier center frequency, had no impact on the emissions in the frequency range of 30 MHz to 1000 MHz.


The plots provided on the following page, represent the 3m radiated emissions test data that correlate to the tabular data provided in Table 9. (30 MHz to 1000 MHz).



**Pre-scan and Final Data (Vertical) – Below 1GHz**

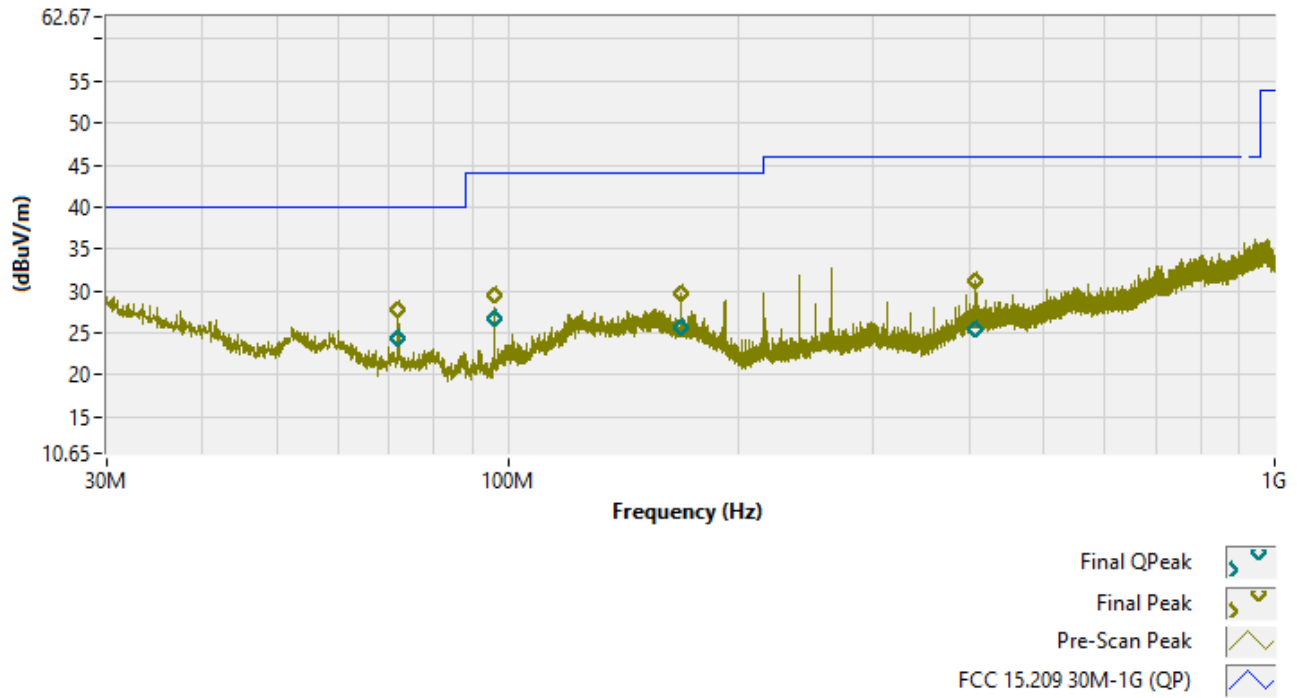

**Pre-scan and Final Data (Horizontal) – Below 1GHz**

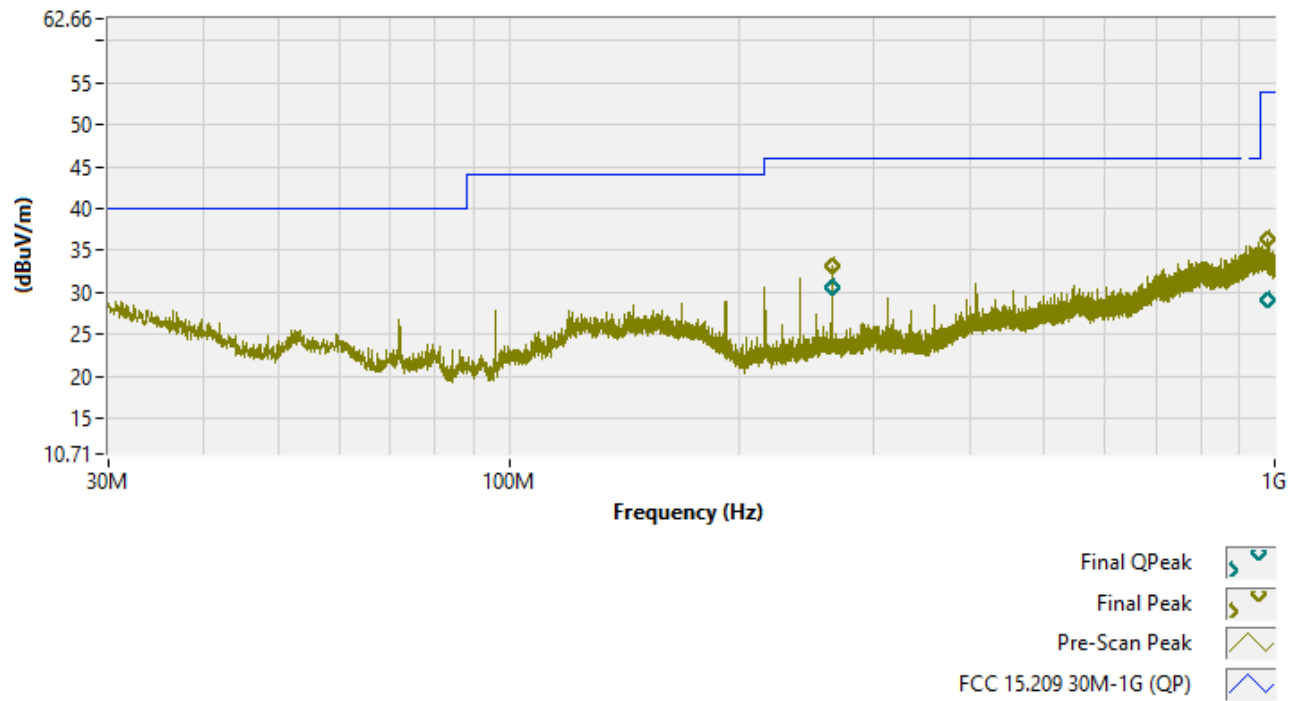



*This Page Intentionally Left Blank*






Table 10: Radiated Emissions Test Data – 1 GHz to 25 GHz (GFSK, Low Channel)

Frequency (GHz)	Detector	Corr. Meas. (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Turn Table (deg)	Antenna (cm)
1.535	Peak	51.580	74	-22.420	180	Vert, 150
	Avg	49.637	54	-4.363	180	Vert, 150
1.535	Peak	52.542	74	-21.458	130	Horiz, 150
	Avg	51.315	54	-2.685	130	Horiz, 150
2.390	Peak	42.734	74	-31.266	130	Horiz, 150
	Avg	29.686	54	-24.314	130	Vert, 150
2.402	Peak	93.313	--	--	130	Horiz, 150
5.219	Peak	57.404	74	-16.596	0	Horiz, 150
	Avg	34.979	54	-19.021	0	Horiz, 150
5.221	Peak	58.679	74	-15.321	0	Vert, 150
	Avg	34.955	54	-19.045	0	Vert, 150
7.256	Peak	49.689	74	-24.311	0	Vert, 150
	Avg	35.122	54	-18.878	0	Vert, 150
10.948	Peak	50.710	74	-23.290	0	Vert, 150
	Avg	36.555	54	-17.445	0	Vert, 150

The plots provided on the following page, represent the 3m radiated emissions test data that correlate to the tabular data provided in Table 10. (GFSK, Low Channel).



Pre-scan and Final Data (Vertical) – GFSK, Low Channel

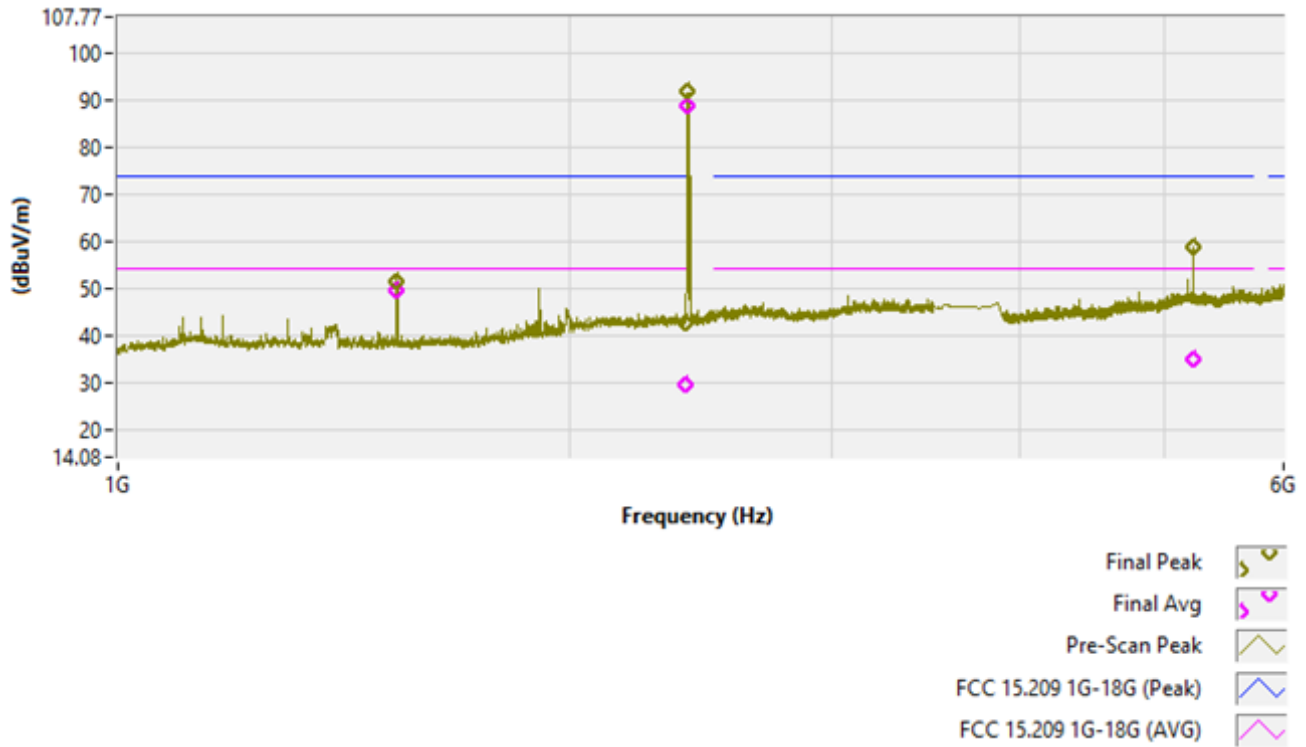

Pre-scan and Final Data (Horizontal) – GFSK, Low Channel

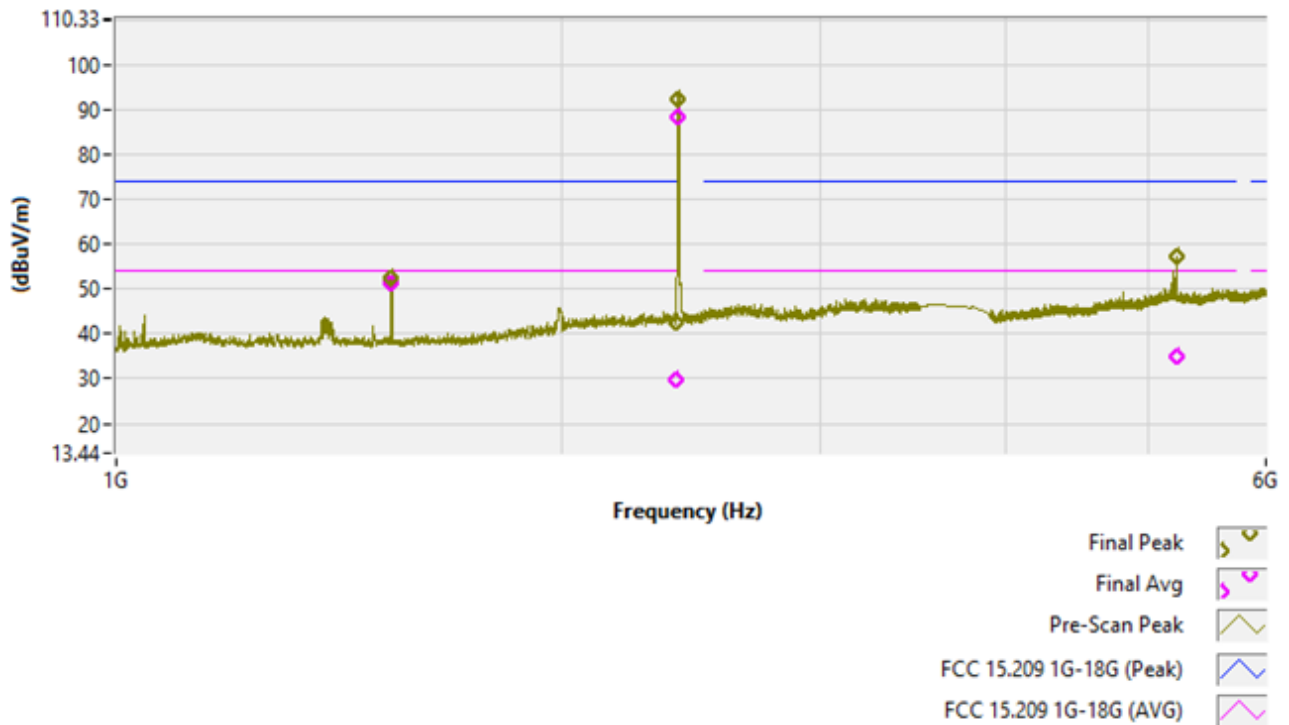




Figure 70: GFSK (1Mbps) Low Channel – 6 GHz to 9 GHz (Corrected Field Strength)


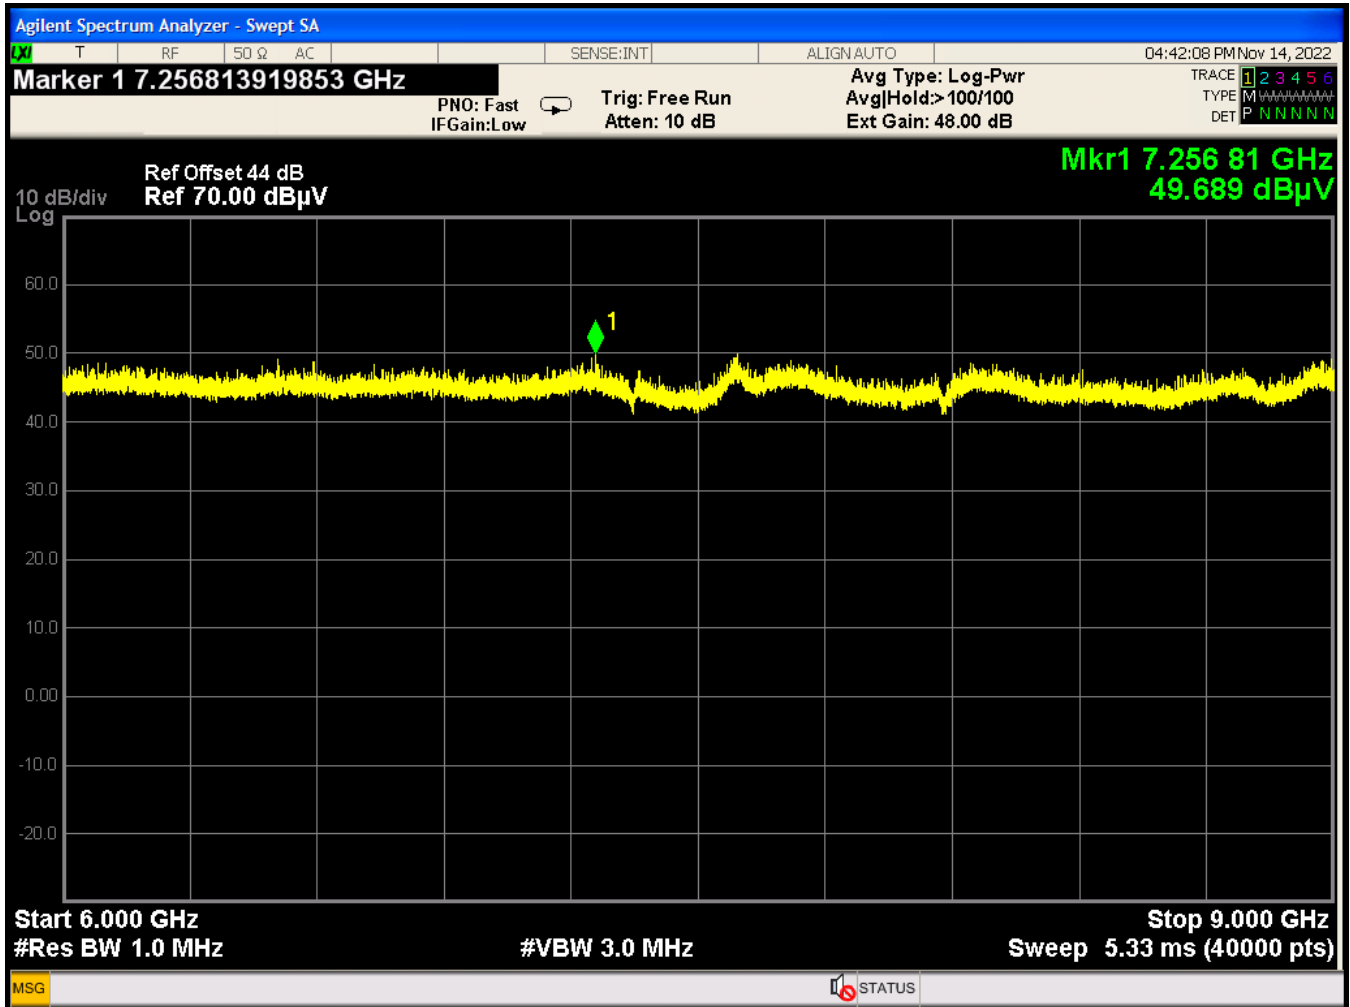




Figure 71: GFSK (1Mbps) Low Channel – 9 GHz to 18 GHz (Corrected Field Strength)



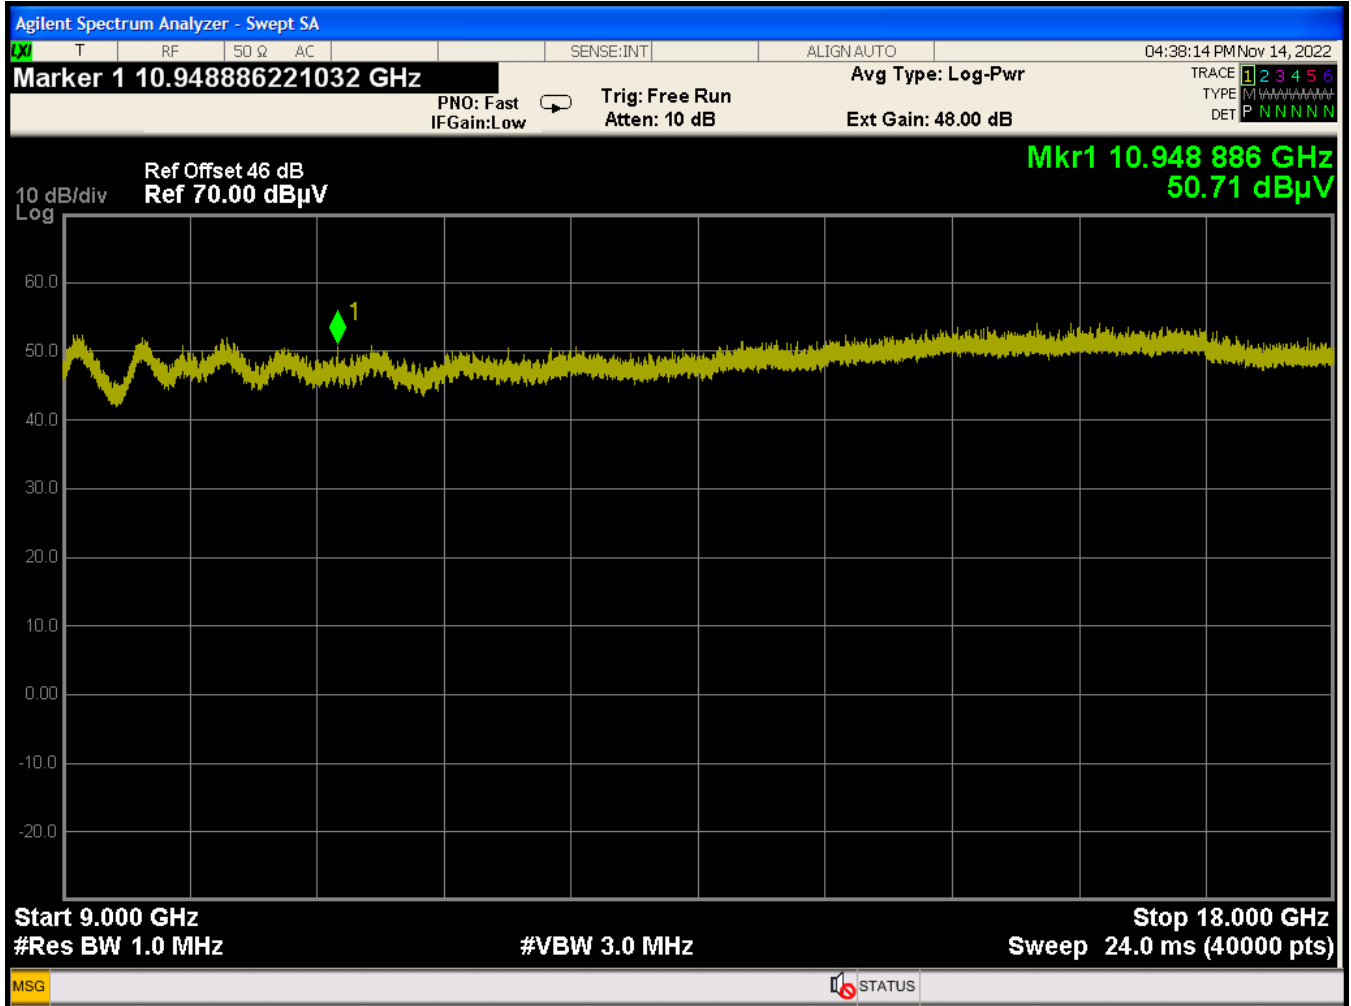

*This Page Intentionally Left Blank*




Table 11: Radiated Emissions Test Data – 1 GHz to 25 GHz (GFSK, Center Channel)

Frequency (GHz)	Detector	Corr. Meas. (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Turn Table (deg)	Antenna (cm)
1.535	Peak	54.022	74	-19.978	180	Horiz, 150
	Avg	51.818	54	-2.182	180	Horiz, 150
1.536	Peak	53.995	74	-20.005	0	Horiz, 150
	Avg	49.607	54	-4.393	0	Horiz, 150
2.441	Peak	94.830	--	--	90	Horiz, 150
5.202	Peak	56.572	74	-17.428	180	Horiz, 150
	Avg	35.652	54	-18.348	180	Vert, 150
5.222	Peak	61.097	74	-12.903	300	Vert, 150
	Avg	35.182	54	-18.818	190	Horiz, 150
5.959	Peak	51.141	74	-22.859	0	Horiz, 150
	Avg	36.177	54	-17.823	0	Vert, 150
7.583	Peak	50.371	74	-23.629	90	Vert, 150
	Avg	35.968	54	-18.032	90	Vert, 150
10.134	Peak	51.760	74	-22.240	180	Horiz, 150
	Avg	37.210	54	-16.790	180	Horiz, 150

The plots provided on the following page, represent the 3m radiated emissions test data that correlate to the tabular data provided in Table 11. (GFSK, Center Channel).



Pre-scan and Final Data (Vertical) – GFSK, Center Channel

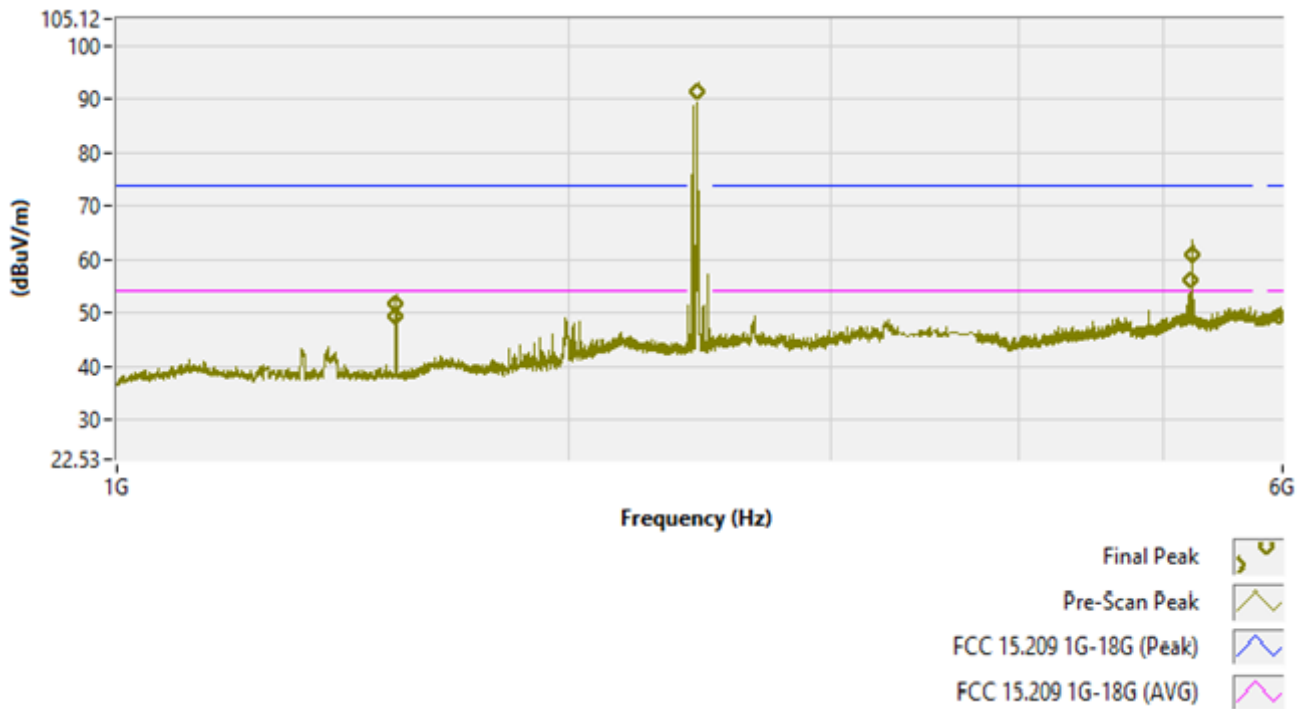

Pre-scan and Final Data (Horizontal) – GFSK, Center Channel

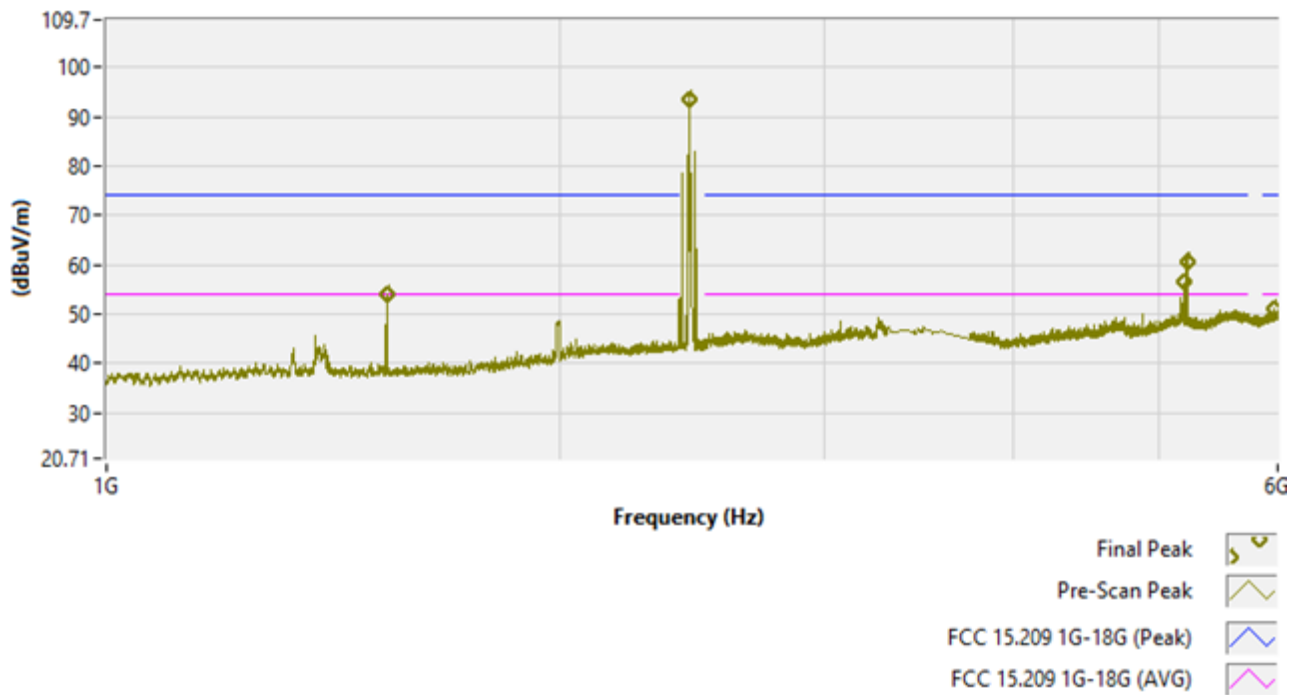




Figure 72: GFSK (1Mbps) Center Channel – 6 GHz to 9 GHz (Corrected Field Strength)


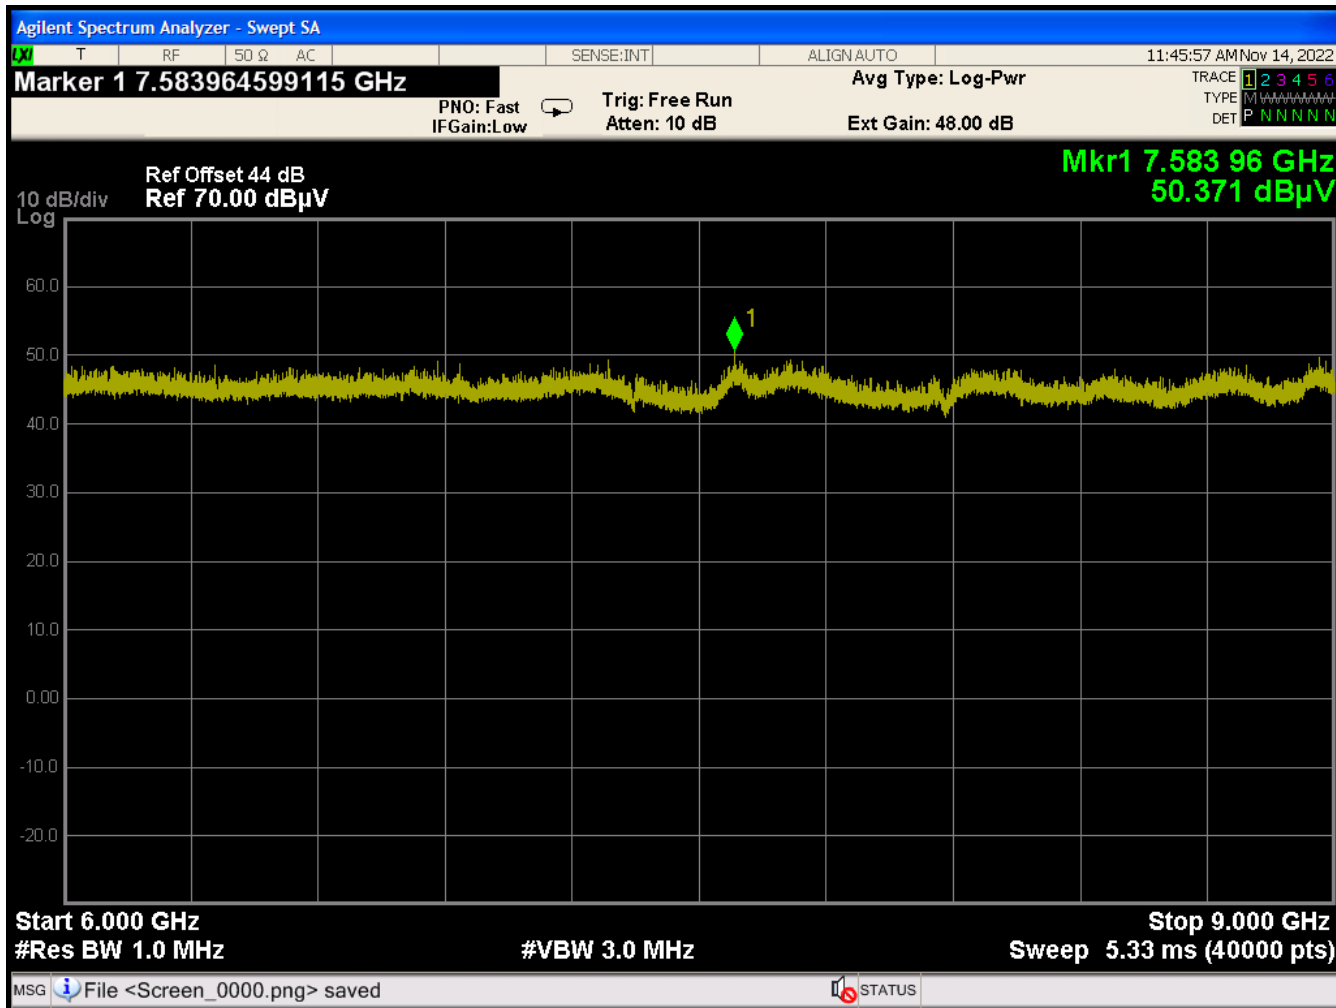






Figure 73: GFSK (1Mbps) Center Channel – 9 GHz to 18 GHz (Corrected Field Strength)



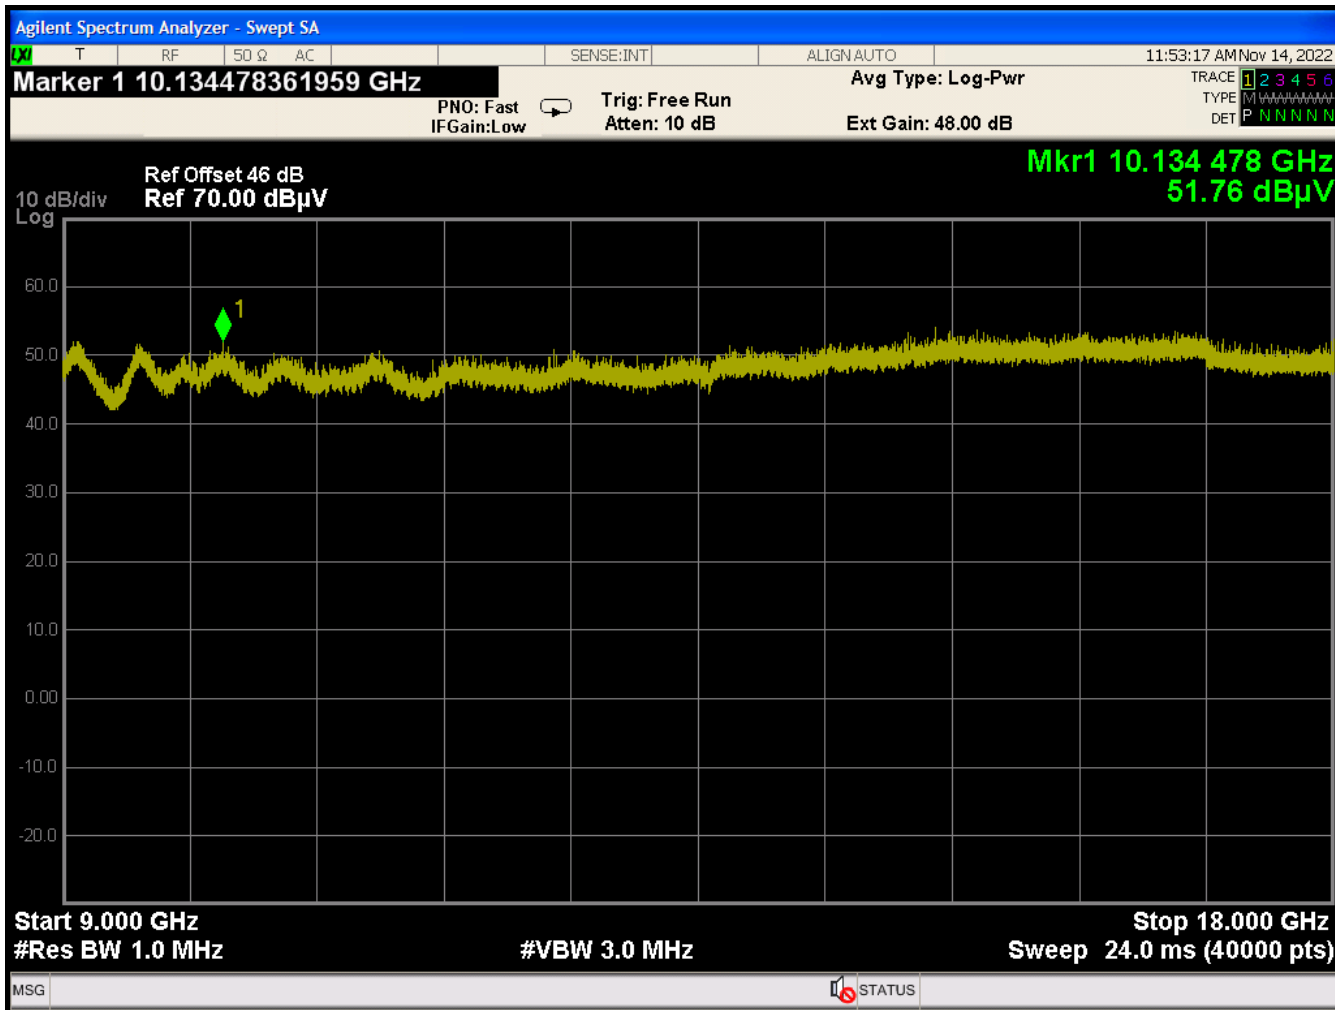

*This Page Intentionally Left Blank*




Table 12: Radiated Emissions Test Data – 1 GHz to 25 GHz (GFSK, High Channel)

Frequency (GHz)	Detector	Corr. Meas. (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Turn Table (deg)	Antenna (cm)
1.535	Peak	52.821	74	-21.179	150	Horiz, 150
	Avg	41.347	54	-12.653	150	Horiz, 150
2.480	Peak	91.572	--	--	150	Horiz, 150
2.4835	Peak	57.59	74	-16.410	150	Vert, 150
	Avg	30.701	54	-23.299	0	Vert, 150
5.220	Peak	57.915	74	-16.085	0	Horiz, 150
	Avg	35.053	54	-18.947	0	Horiz, 150
5.224	Peak	66.477	74	-7.523	0	Vert, 150
	Avg	35.078	54	-18.922	0	Vert, 150
7.725	Peak	49.208	74	-24.792	270	Vert, 150
	Avg	35.662	54	-18.338	270	Vert, 150
16.874	Peak	54.201	74	-19.799	270	Vert, 150
	Avg	38.115	54	-15.885	270	Vert, 150

The plots provided on the following page, represent the 3m radiated emissions test data that correlate to the tabular data provided in Table 12. (GFSK, High Channel).



**Pre-scan and Final Data (Vertical) – GFSK, High Channel**

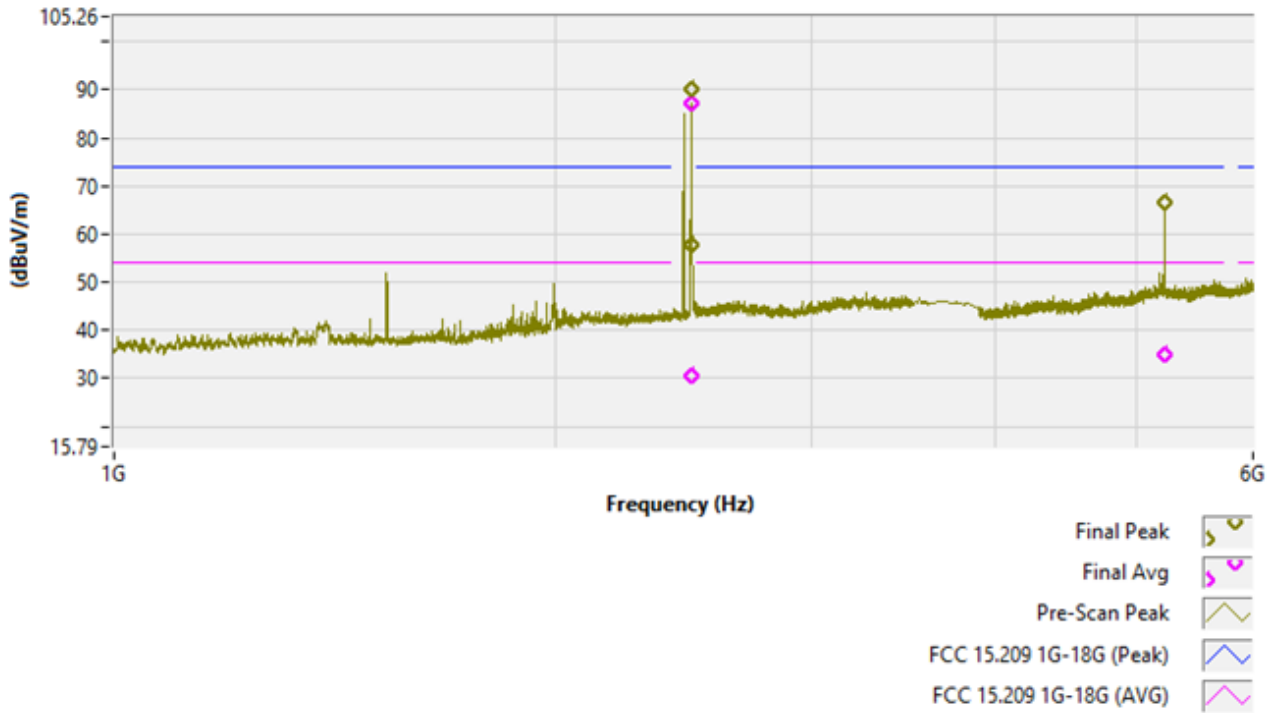

**Pre-scan and Final Data (Horizontal) – GFSK, High Channel**

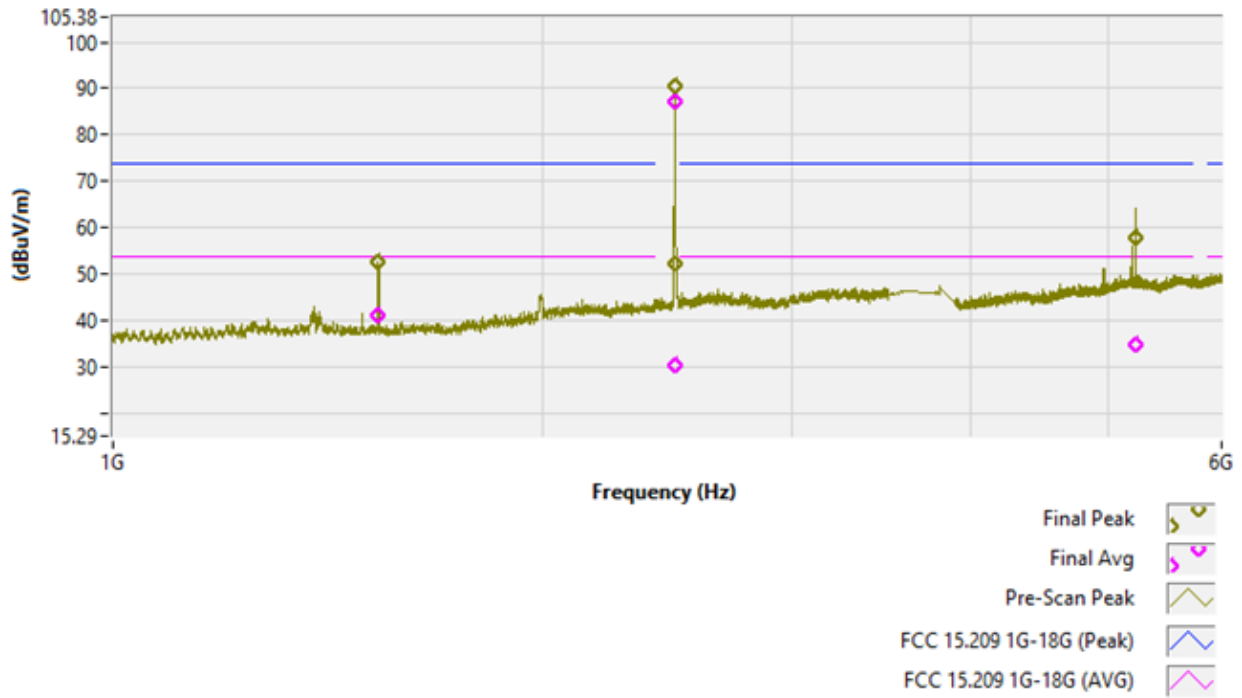




Figure 74: GFSK (1Mbps) High Channel – 6 GHz to 9 GHz (Corrected Field Strength)


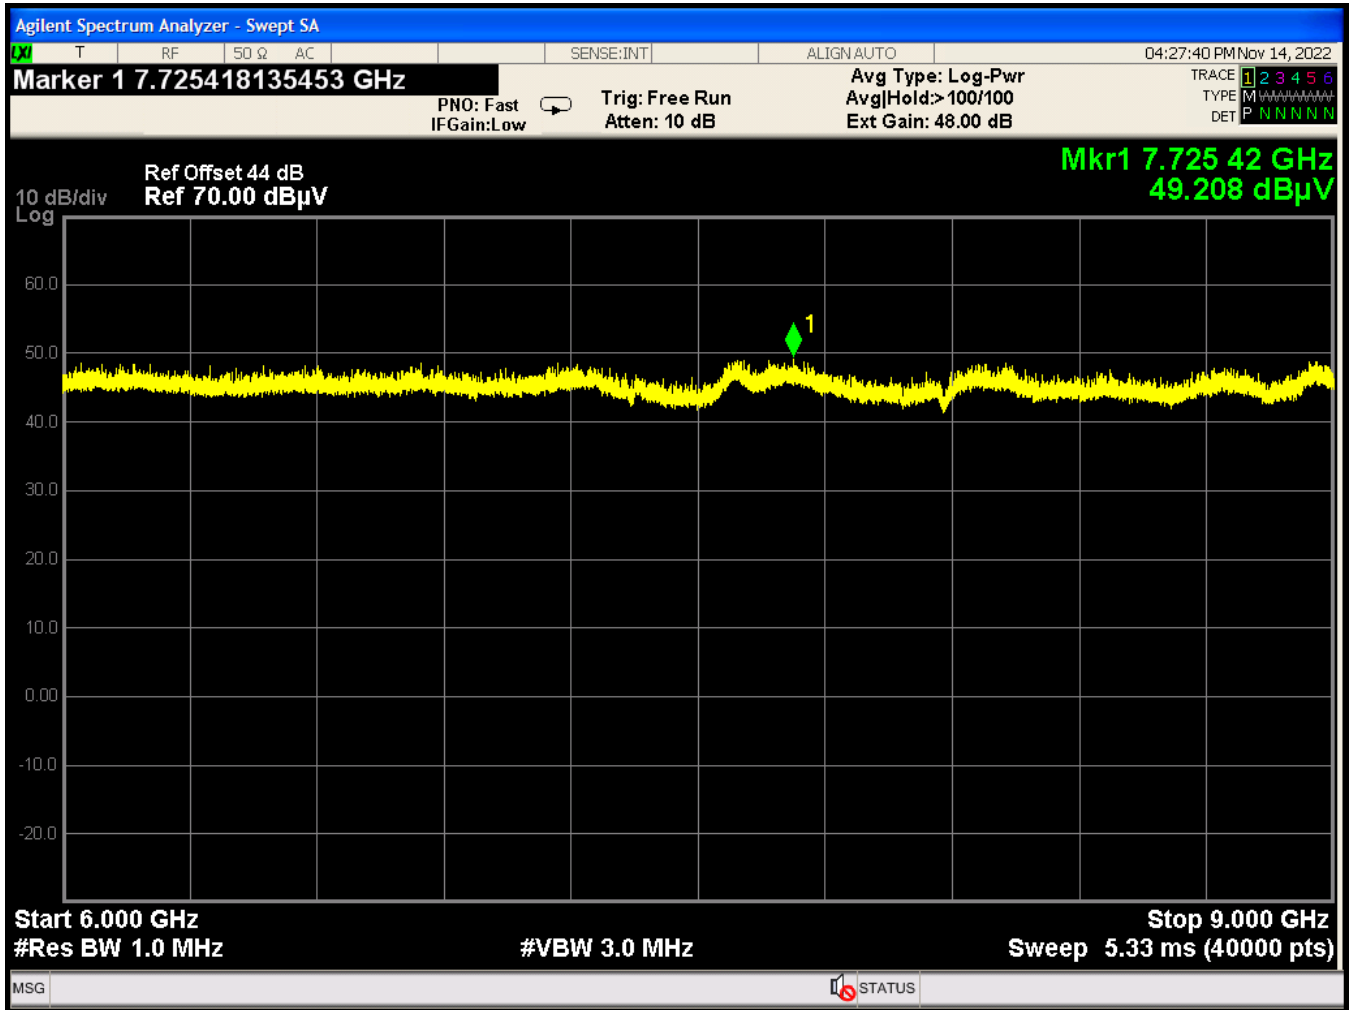




Figure 75: GFSK (1Mbps) High Channel – 9 GHz to 18 GHz (Corrected Field Strength)



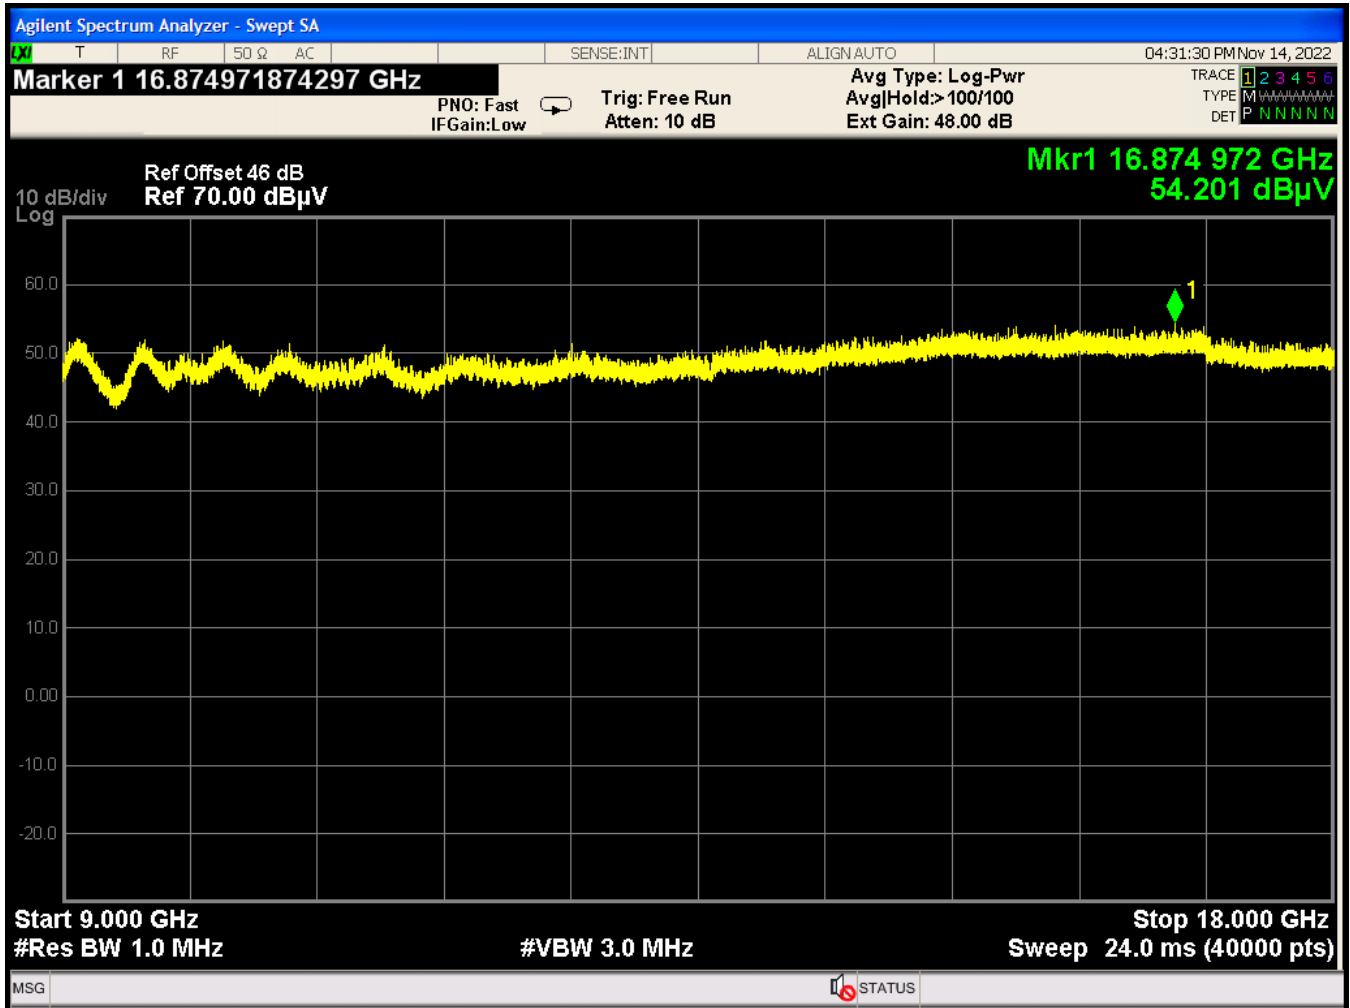

*This Page Intentionally Left Blank*



Table 13: Radiated Emissions Test Data – 1 GHz to 25 GHz ( $\pi/4$ DQPSK, Center Channel)


Frequency (GHz)	Detector	Corr. Meas. (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Turn Table (deg)	Antenna (cm)
1.536	Peak	52.723	74	-21.277	270	Horiz, 150
	Avg	49.939	54	-4.061	270	Horiz, 150
1.990	Peak	49.034	74	-24.966	180	Vert, 150
	Avg	29.086	54	-24.914	180	Vert, 150
2.441	Peak	93.943	--	--	270	Horiz, 150
5.180	Peak	55.405	74	-18.595	270	Vert, 150
	Avg	34.884	54	-19.116	270	Vert, 150
5.214	Peak	59.855	74	-14.145	75	Horiz, 150
	Avg	35.181	54	-18.819	75	Horiz, 150
5.935	Peak	50.877	74	-23.123	0	Vert, 150
	Avg	35.832	54	-18.168	0	Horiz, 150
7.584	Peak	49.868	74	-24.132	0	Vert, 150
	Avg	35.162	54	-18.838	0	Vert, 150
11.267	Peak	51.732	74	-22.268	0	Vert, 150
	Avg	36.999	54	-17.001	0	Vert, 150

The plots provided on the following page, represent the 3m radiated emissions test data that correlate to the tabular data provided in Table 13. ( $\pi/4$ DQPSK, Center Channel)





Pre-scan and Final Data (Vertical) –  $\pi/4$ DQPSK, Center Channel

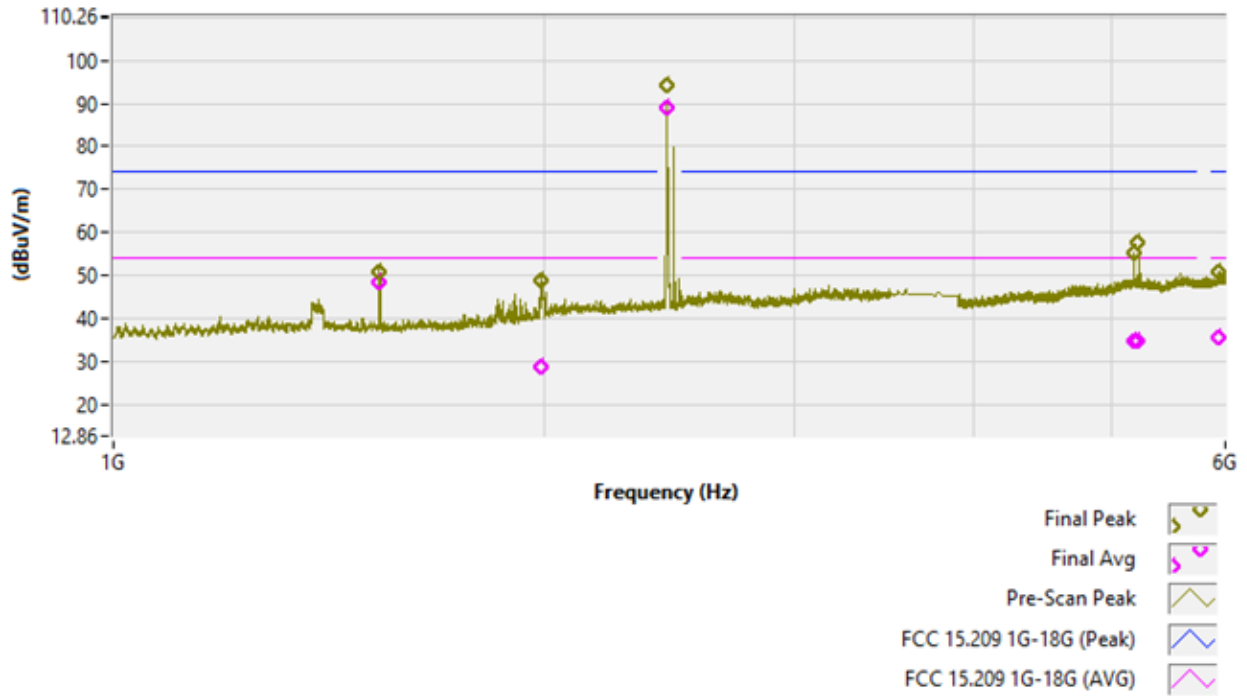

Pre-scan and Final Data (Horizontal) –  $\pi/4$ DQPSK, Center Channel

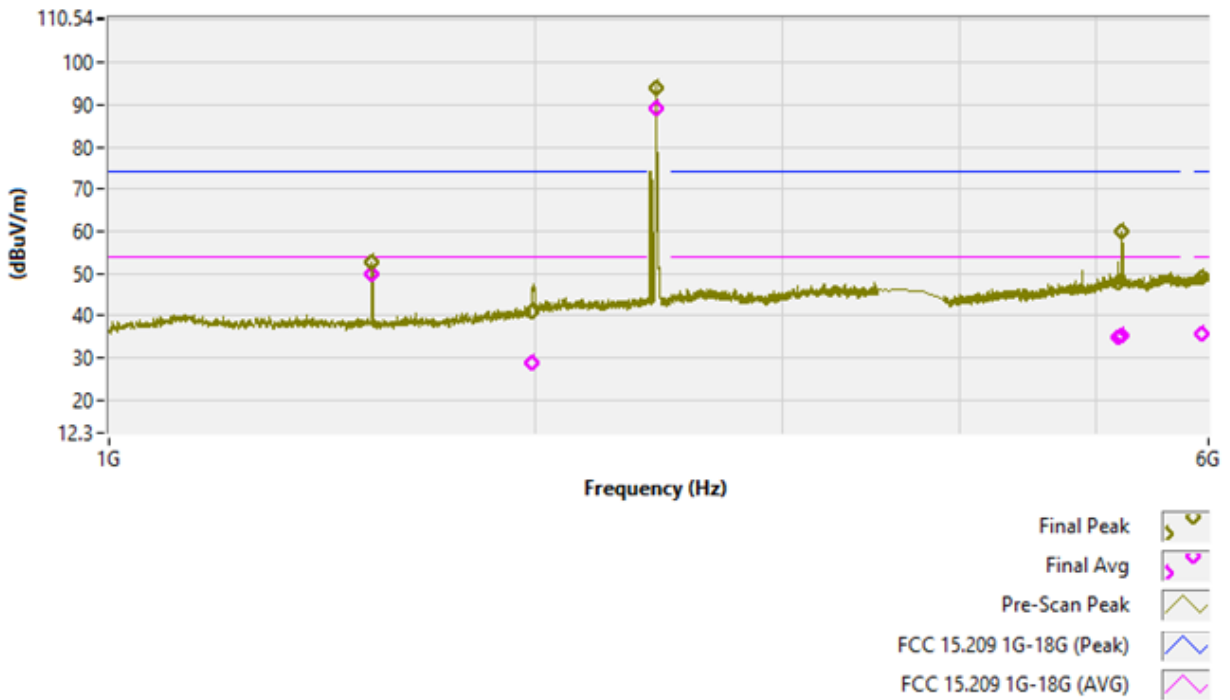




Figure 76:  $\pi/4$ DQPSK (2Mbps) Center Channel – 6 GHz to 9 GHz (Corrected Field Strength)


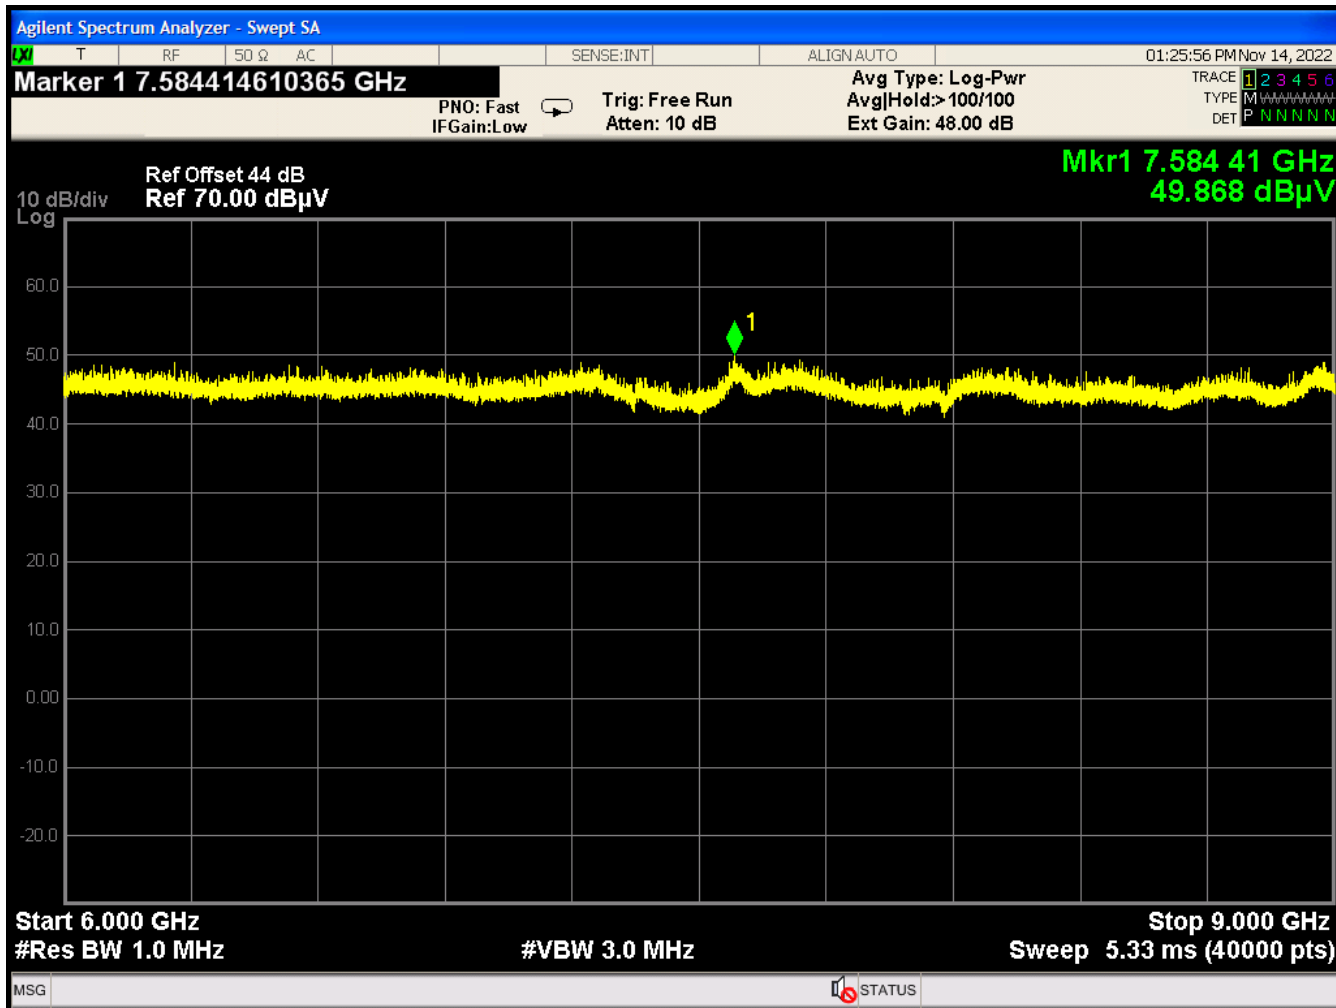




Figure 77:  $\pi/4$ DQPSK (2Mbps) Center Channel – 9 GHz to 18 GHz (Corrected Field Strength)



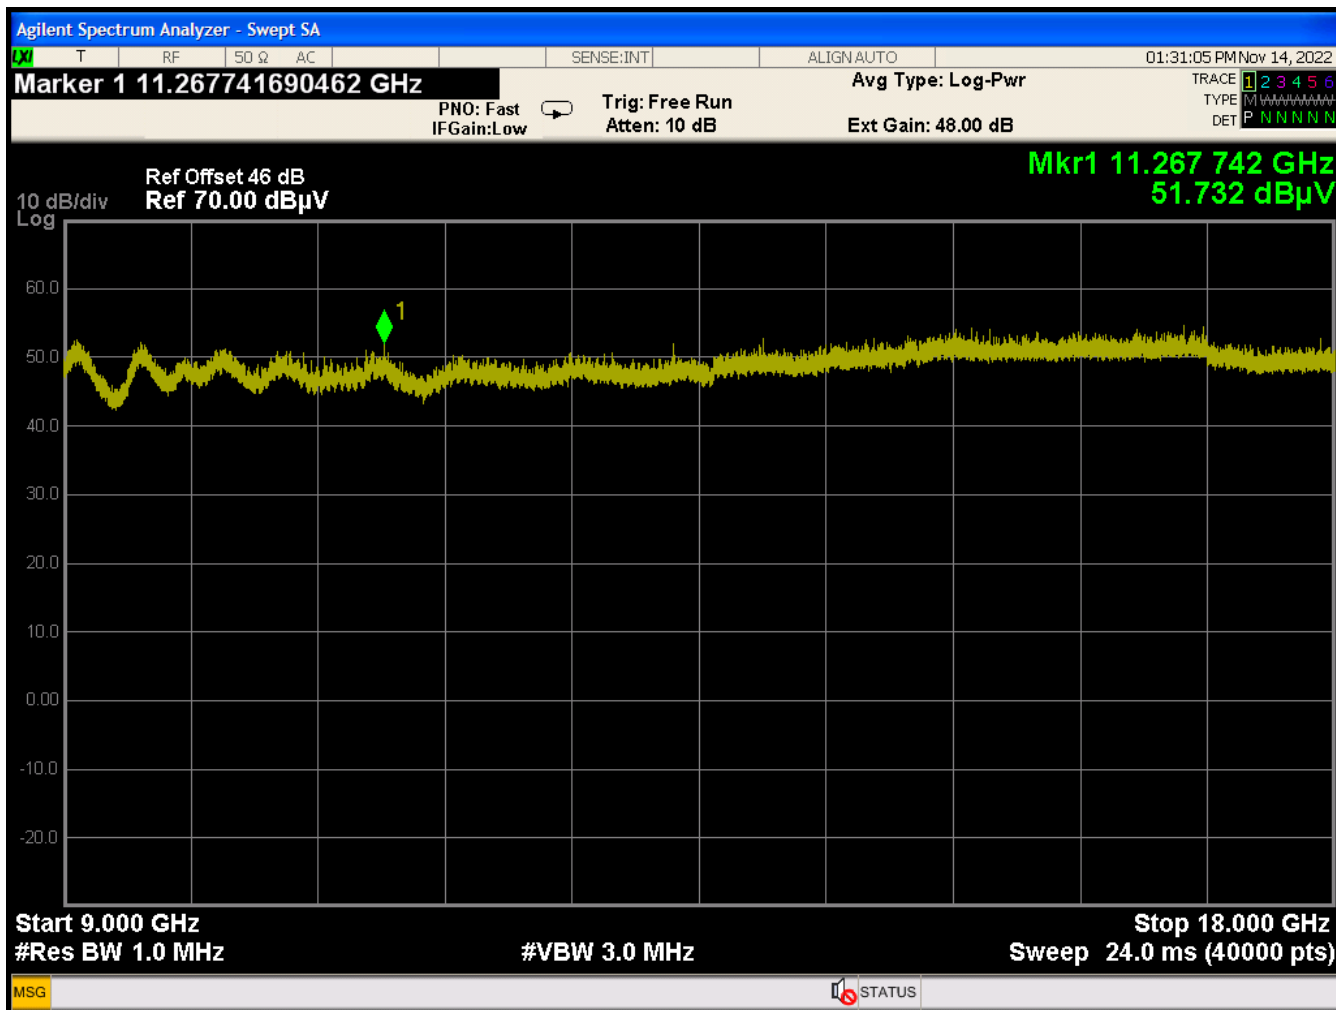

*This Page Intentionally Left Blank*




Table 14: Radiated Emissions Test Data – 1 GHz to 25 GHz (8DPSK, Center Channel)

Frequency (GHz)	Detector	Corr. Meas. (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Turn Table (deg)	Antenna (cm)
1.536	Peak	52.724	74	-21.276	270	Horiz, 150
	Avg	48.37	54	-5.63	270	Horiz, 150
1.950	Peak	42.863	74	-31.137	0	Vert, 150
	Avg	27.225	54	-26.775	0	Vert, 150
2.441	Peak	93.642	--	--	270	Horiz, 150
5.187	Peak	56.578	74	-17.422	180	Vert, 150
	Avg	35.04	54	-18.96	180	Vert, 150
5.221	Peak	58.622	74	-15.378	0	Vert, 150
	Avg	34.997	54	-19.003	0	Horiz, 150
7.597	Peak	50.478	74	-23.522	180	Vert, 150
	Avg	36.122	54	-17.878	180	Vert, 150
15.703	Peak	54.801	74	-19.199	180	Vert, 150
	Avg	38.900	54	-15.100	180	Vert, 150

The plots provided on the following page, represent the 3m radiated emissions test data that correlate to the tabular data provided in Table 14. (8DPSK, Center Channel)



**Pre-scan and Final Data (Vertical) – 8DPSK, Center Channel**

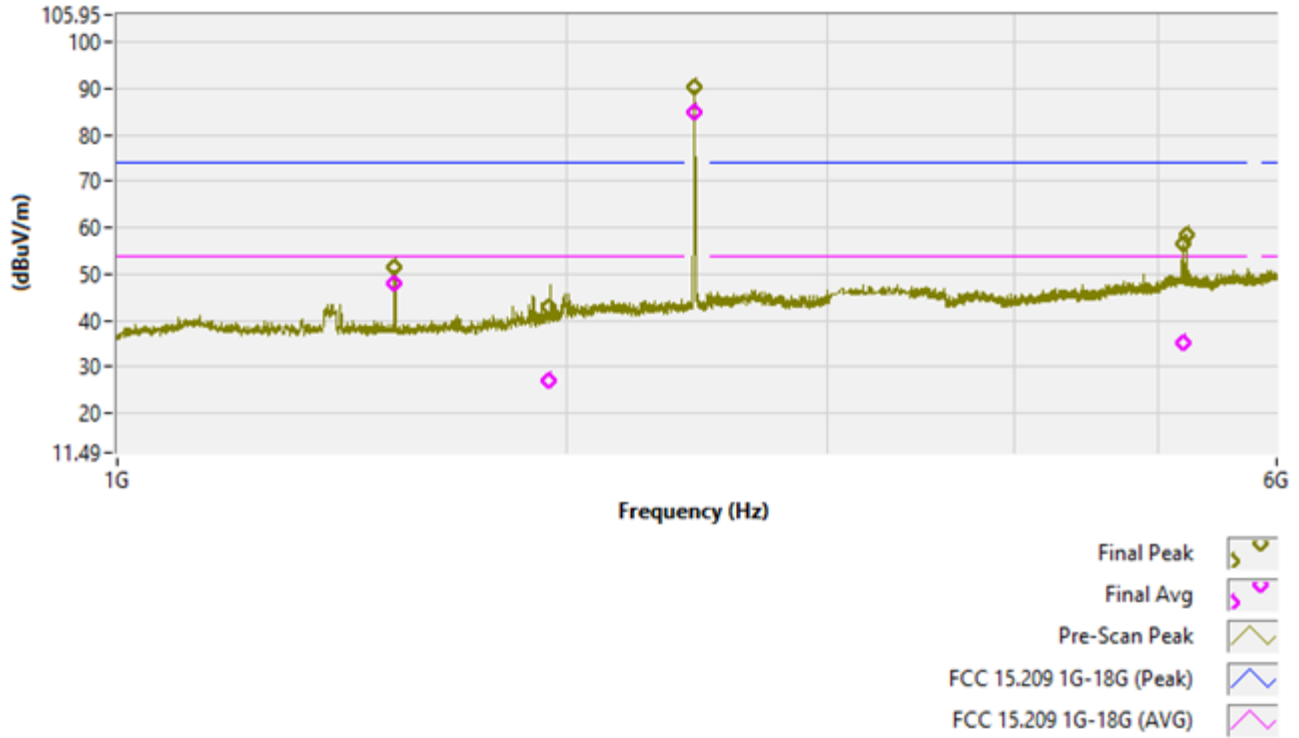

**Pre-scan and Final Data (Horizontal) – 8DPSK, Center Channel**

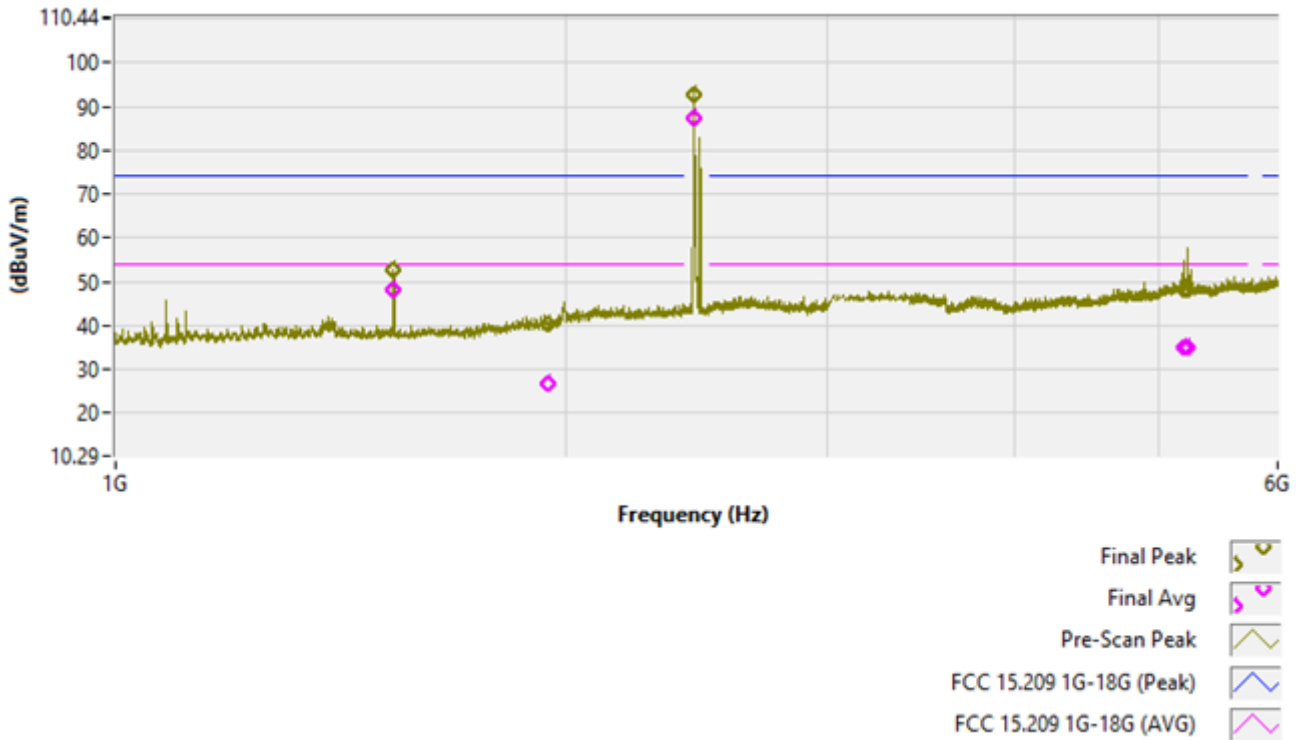




Figure 78: 8DPSK (3Mbps) Center Channel – 6 GHz to 9 GHz (Corrected Field Strength)


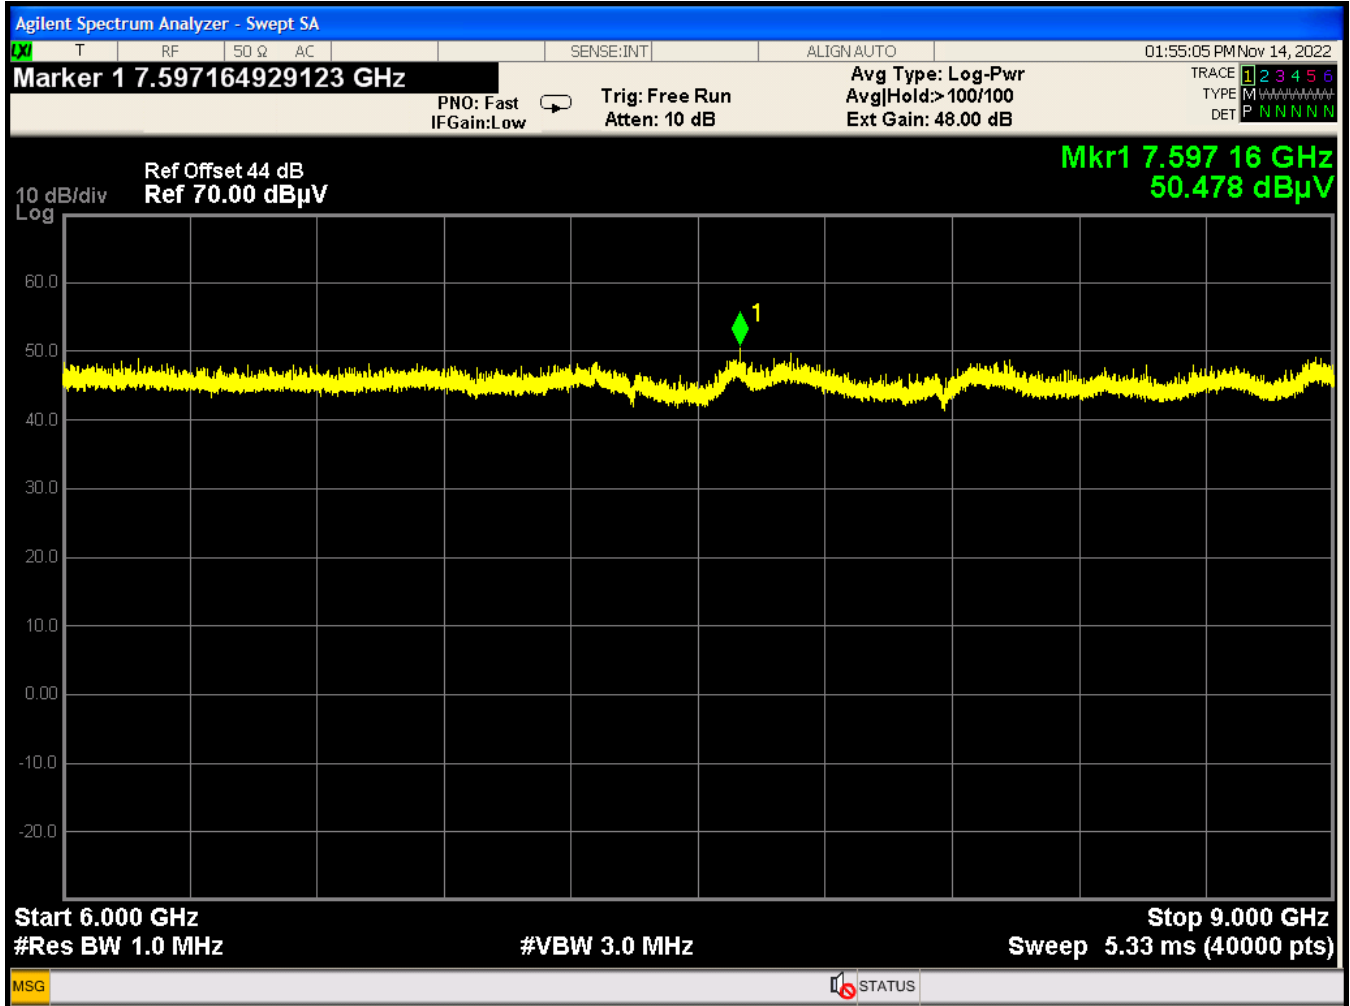




Figure 79: 8DPSK (3Mbps) Center Channel – 9 GHz to 18 GHz (Corrected Field Strength)





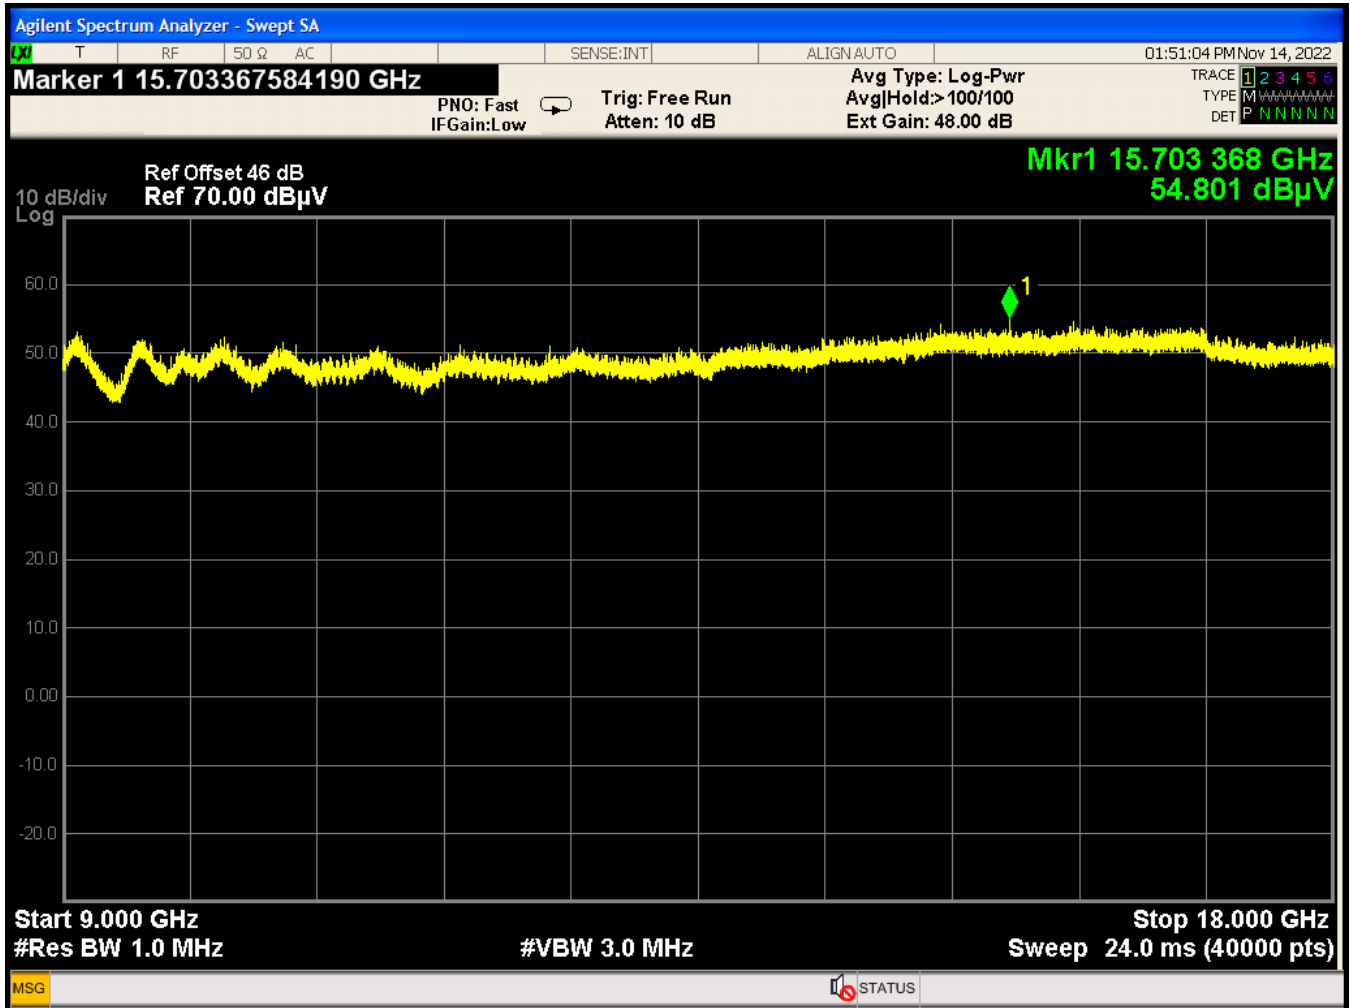

## 2.9 AC Powerline Conducted Emissions

### 2.9.1 Requirements

Compliance Standard: FCC Part 15.207

FCC Compliance Limits				
Frequency Range	Class A Digital Device		Class B Digital Device	
	Quasi-peak	Average	Quasi-peak	Average
0.15 – 0.5 MHz	79 dB $\mu$ V	66 dB $\mu$ V	66 to 56 dB $\mu$ V	56 to 46 dB $\mu$ V
0.5 – 5 MHz	79 dB $\mu$ V	66 dB $\mu$ V	56 dB $\mu$ V	46 dB $\mu$ V
0.5 – 30 MHz	73 dB $\mu$ V	60 dB $\mu$ V	60 dB $\mu$ V	50 dB $\mu$ V

### 2.9.2 Test Procedure

The requirements of FCC Part 15 and ICES-003 call for the EUT to be placed on an 80cm-high 1 X 1.5-meter non-conductive table above a ground plane. Power to the EUT was provided through a Solar Corporation 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network bonded to a 3 X 2-meter ground plane. The LISN has its AC input supplied from a filtered AC power source. Power was supplied to the peripherals through a second LISN. The peripherals were placed on the table in accordance with ANSI C63.4. Power and data cables were moved about to obtain maximum emissions.

The 50  $\Omega$  output of the LISN was connected to the input of the spectrum analyzer and the emissions in the frequency range of 150 kHz to 30 MHz were measured. The detector function was set to quasi-peak, peak, or average as appropriate, and the resolution bandwidth during testing was at least 9 kHz, with all post-detector filtering no less than 10 times the resolution bandwidth. For average measurements, the post-detector filter was set to 10 Hz.

These emissions must meet the limits specified in §15.207 for quasi-peak and average measurements.



Environmental Conditions During Conducted Emissions Testing

Ambient Temperature:	16 °C
Relative Humidity:	44 %

**2.9.3 Conducted Data Reduction and Reporting**

The comparison between the Conducted emissions level and the FCC limit is calculated as shown in the following example:

Spectrum Analyzer Voltage:  $V_{dB\mu V}(raw)$

LISN Correction Factor: LISN dB

Cable Correction Factor: CF dB

Voltage:  $V_{dB\mu V} = V_{dB\mu V}(raw) + LISN\ dB + CF\ dB$

**2.9.4 Test Data**

The EUT complies with the Class B Conducted Emissions requirements.

The Conducted Emissions test data is provided in the table below.

The EUT was coupled to the AC mains network indirectly, through the support laptop.



Table 15: AC Power Conducted Emissions Test Data

NEUTRAL / L1										
Frequency (MHz)	Level QP (dBµV)	Level AVG (dBµV)	Cable Loss (dB)	LISN Corr (dB)	Level QP Corr (dBµV)	Level Avg Corr (dBµV)	Limit QP (dBµV)	Limit AVG (dBµV)	Margin QP (dB)	Margin AVG (dB)
0.188	42.5	27.2	9.9	0.5	53.0	37.7	64.1	54.1	-11.2	-13.5
0.249	34.9	22.6	9.9	0.4	45.3	33.0	61.8	51.8	-16.5	-18.8
0.313	30.5	17.5	9.9	0.4	40.8	27.8	59.9	49.9	-19.1	-22.1
2.116	27.6	17.0	10.1	0.3	38.0	27.4	56.0	46.0	-18.0	-18.6
6.216	22.5	13.0	10.4	0.5	33.5	24.0	60.0	50.0	-26.5	-26.0
10.603	21.0	13.3	10.6	0.7	32.3	24.6	60.0	50.0	-27.7	-25.4
PHASE / L2										
Frequency (MHz)	Level QP (dBµV)	Level AVG (dBµV)	Cable Loss (dB)	LISN Corr (dB)	Level QP Corr (dBµV)	Level Avg Corr (dBµV)	Limit QP (dBµV)	Limit AVG (dBµV)	Margin QP (dB)	Margin AVG (dB)
0.151	41.0	23.4	9.9	0.5	51.4	33.8	65.9	55.9	-14.5	-22.1
0.191	41.2	27.8	9.9	0.4	51.5	38.1	64.0	54.0	-12.5	-15.9
0.307	32.0	21.2	9.9	0.3	42.3	31.5	60.1	50.1	-17.8	-18.6
0.509	28.2	18.0	9.9	0.3	38.4	28.2	56.0	46.0	-17.6	-17.8
1.205	28.3	19.0	9.9	0.3	38.5	29.2	56.0	46.0	-17.5	-16.8
4.030	27.0	15.0	10.3	0.4	37.7	25.7	56.0	46.0	-18.3	-20.3



### 3 Equipment Under Test

#### 3.1 EUT Identification & Description

The Stanley Black & Decker, Inc., DCR008 is a Bluetooth speaker that operates in the 2.4 GHz band.

#### 3.2 Test Configuration

For the purposes of testing, the DCR008 was powered by a +5VDC provided by a USB cable from the support laptop. Table 15 provides further details pertaining to the EUT.

Figure 80: EUT Sample Diagram – Device Specifications

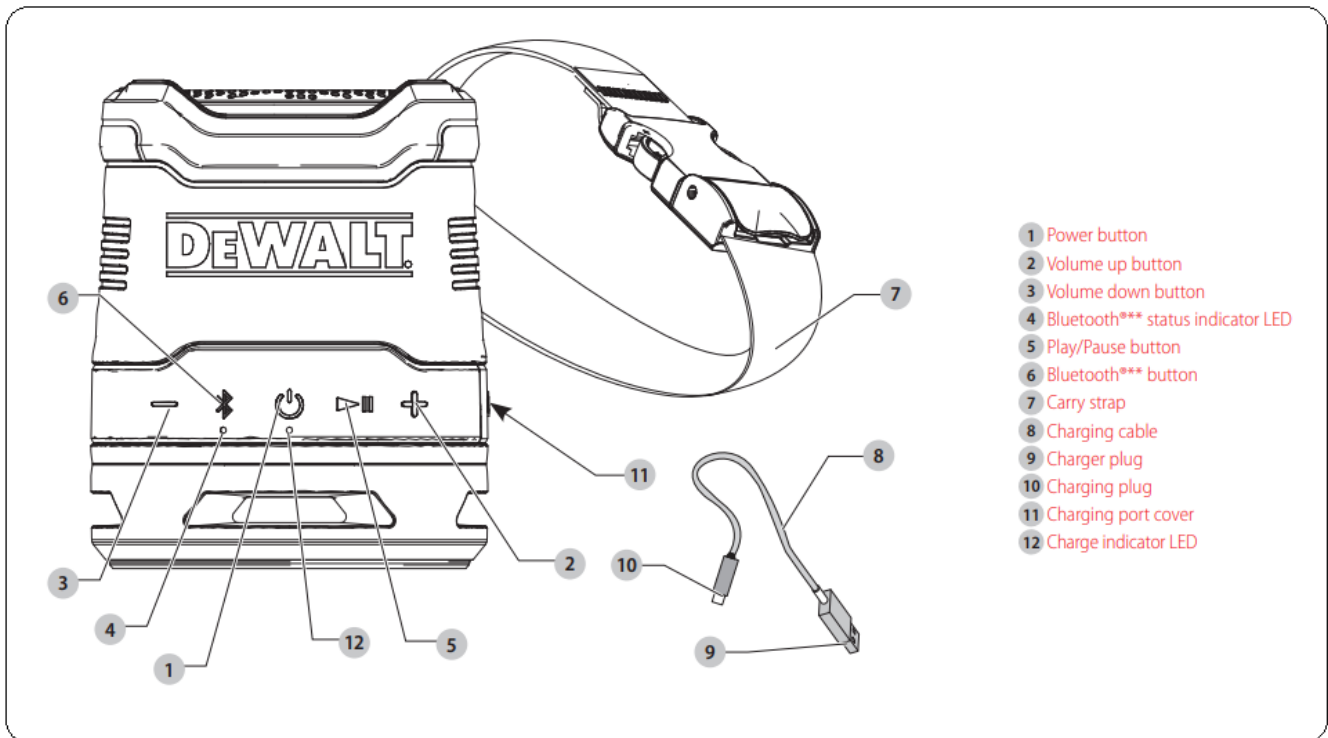




Table 16: Radio Device Summary

Manufacturer and Applicant:	Stanley Black & Decker, Inc.	
FCC ID:	YJ7DCR008	
IC ID:	9082A-DCR008	
HVIN:	DCR008	
Serial Number of Unit Tested:	See Table 16	
FCC Rule Part:	§15.247	
TX Frequency Range:	2402 MHz – 2480 MHz	
Maximum Peak Output Power:	3.96 dBm (2.5 mW)	
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK	
Date Rate:	1Mbps, 2Mbps, 3Mbps	
Number of Channels:	79	
FCC Emission Designator:	1M23F1D (recommended or TCB to correct)	
ISED Emission Designator:	1M13F1D (recommended or TCB to correct)	
Keying:	Automatic	
Type of Information:	BT V5.2 (A2DP, AVRCP, HFP)	
Antenna Manufacturer:	Stanley Black & Decker, Inc.	
Antenna Type:	PCB Trace, “Meander Line” (Peak Gain: -1.5 dBi)	
Antenna Connector:	N/A	
Calculated EIRP:	2.46 dBm (based on declared gain)	
Measured EIRP from F/S:	96.8dBuV/m + 20LOG(3) – 104.7 = 1.64 dBm EIRP	
Interface Cables:	See Table 18	
Software/Firmware:	Normal Operation, No Special Settings	
Pulsed Transmitter:	No	
Duty Cycle:	Hopping Stopped	73% (72.85ms/100ms)
	Hopping Active	74% (297.9ms/400ms)
Power Source & Voltage:	+5VDC from USB (+4.2VDC Final to TX Module)	
ISED – RSS-102, Annex A:	+5.609 W/m <sup>2</sup> @ 5mm	
Highest TX Spurious Emission:	24.922 GHz (Conducted) -37.66 dBm (Peak)	
	1.535 GHz (3m, Radiated); 51.828 dBuV/m (AVG)	



Figure 81: EUT Block Diagram – Testing Configuration

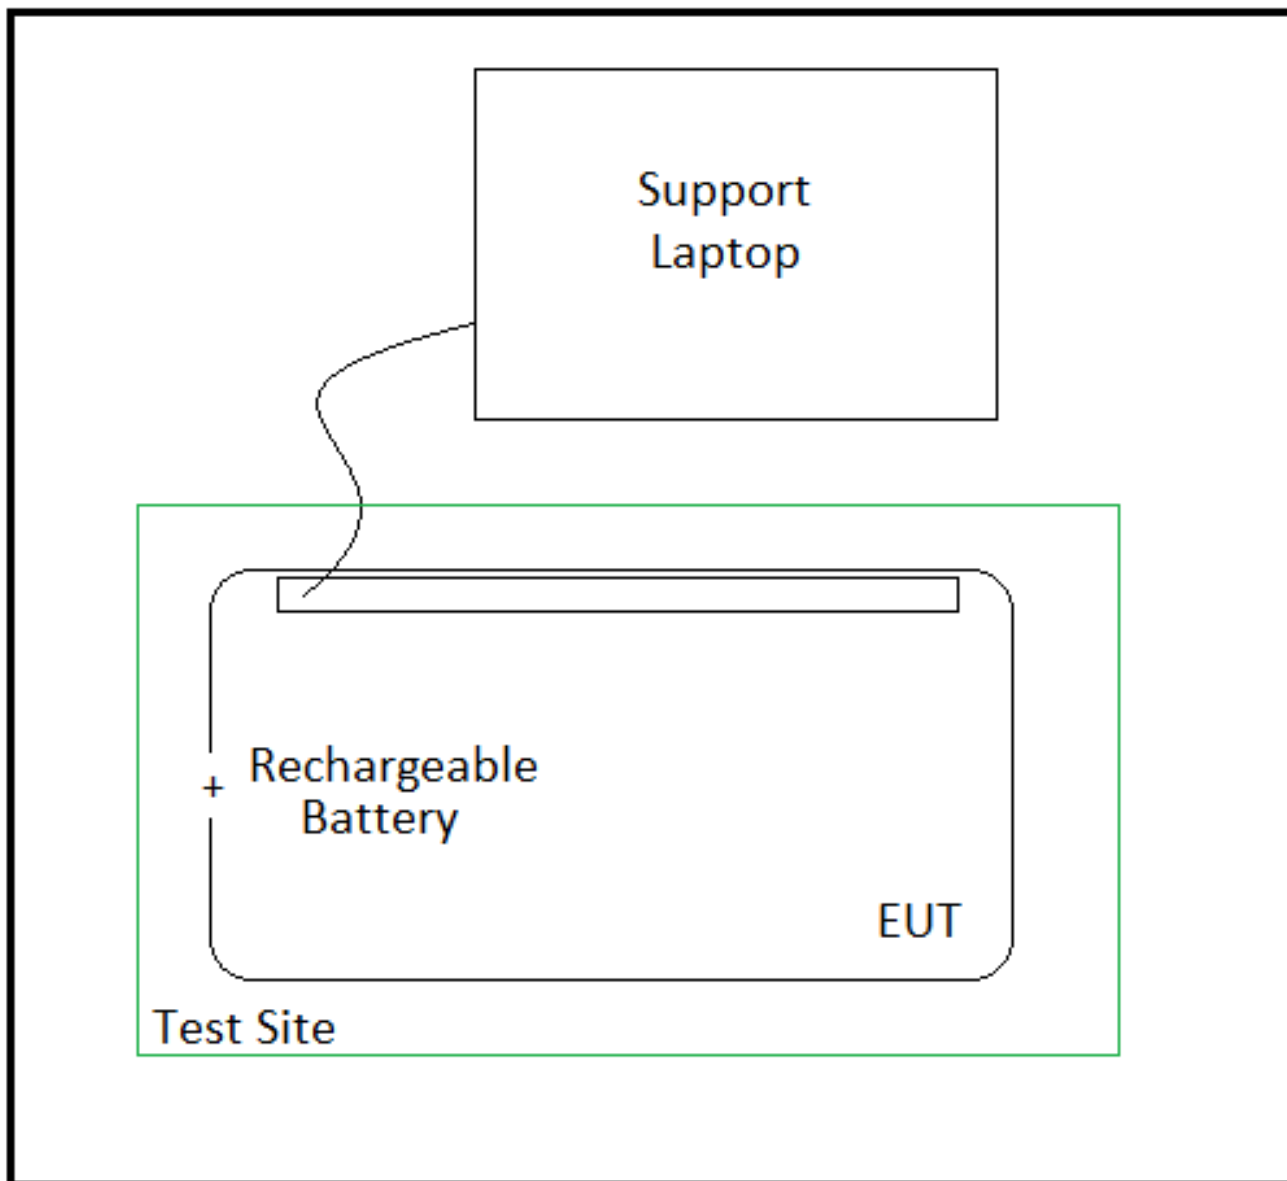




Table 17: System Configuration List

Description	Model (HVIN)	Part Number	Serial Number	Revision
Bluetooth Speaker	DCR008	WB-2833	200	N/A
Bluetooth Speaker	DCR008	WB-2833	168	N/A
Bluetooth Speaker	DCR008	WB-2833	6	N/A

Table 18: Support Equipment

Item	Model/Part Number	Serial Number
Laptop	Support Only to Fix Frequencies	N/A
N/A	N/A	N/A
N/A	N/A	N/A

Table 19: Cable Configuration

Port Identification	Connector Type	Cable Length	Shielded (Y/N)	Termination Point
Charging Port	USB-C	< 3m	No	+5DVC Source



### 3.3 Measurements

#### 3.3.1 References

ANSI C63.2 (1/2016) Specifications for Electromagnetic Noise and Field Strength Instrumentation

ANSI C63.4 (1/2014) American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

ANSI C63.10 (6/2013) American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

#### 3.4 Measurement Uncertainty

All results reported herein relate only to the equipment tested. The basis for uncertainty calculation uses ANSI/NCSL Z540-2-1997 (R2002) with a type B evaluation of the standard uncertainty. Elements contributing to the standard uncertainty are combined using the method described in Equation 1 to arrive at the total standard uncertainty. The standard uncertainty is multiplied by the coverage factor to determine the expanded uncertainty which is generally accepted for use in commercial, industrial, and regulatory applications and when health and safety are concerned (see Equation 2). A coverage factor was selected to yield a 95% confidence in the uncertainty estimation.

Equation 1: Standard Uncertainty

$$u_c = \pm \sqrt{\frac{a^2}{div_a^2} + \frac{b^2}{div_b^2} + \frac{c^2}{div_c^2} + \dots}$$

Where:

- uc = standard uncertainty
- a, b, c,.. = individual uncertainty elements
- Diva, b, c = the individual uncertainty element divisor based on the probability distribution
- Divisor = 1.732 for rectangular distribution
- Divisor = 2 for normal distribution
- Divisor = 1.414 for trapezoid distribution





Equation 2: Expanded Uncertainty

$$U = k u_c$$

Where:

- U = expanded uncertainty
- k = coverage factor
- k ≤ 2 for 95% coverage (ANSI/NCSL Z540-2 Annex G)
- uc = standard uncertainty

The measurement uncertainty complies with the maximum allowed uncertainty from CISPR 16-4-2. Measurement uncertainty is not used to adjust the measurements to determine compliance. The expanded uncertainty values for the various scopes in the WLL accreditation are provided in Table 20 below.

Table 20: Expanded Uncertainty List

Scope	Standard(s)	Expanded Uncertainty
Conducted Emissions	CISPR11, CISPR22, CISPR32, CISPR14, FCC Part 15	± 2.63 dB
Radiated Emissions	CISPR11, CISPR22, CISPR32, CISPR14, FCC Part 15	± 4.55 dB



## 4 Test Equipment

Table 21: Test Equipment List

Test Name: <b>Benchtop RF Emissions</b>		Test Date: 11/9/2022 & 11/10/2022	
<b>Asset #</b>	<b>Manufacturer/Model</b>	<b>Description</b>	<b>Cal. Due</b>
00823	AGILENT, N9010A	EXA SPECTRUM ANALYZER	5/26/2023
00528	AGILENT, E4446A	SPECTRUM ANALYZER	3/25/2023
00897	TELEDYNE, 921-0101	SMA COAXIAL CABLE	12/21/2022

Test Name: <b>Radiated Emissions</b>		Test Date: 11/11/2022 & 11/14/2022	
<b>Asset #</b>	<b>Manufacturer/Model</b>	<b>Description</b>	<b>Cal. Due</b>
00823	AGILENT, N9010A	EXA SPECTRUM ANALYZER	5/26/2023
00644	SUNOL SCIENCES CORP.	BICONALOG ANTENNA	11/14/2024
00626	ARA, DRG-118/A	HORN ANTENNA	8/20/2023
00977	JUNKOSHA, MWX322	ARMORED COAX. CABLE	1/3/2023
00806	MINI-CIRCUITS	SMA COAXIAL CABLE	5/5/2023
00834	ULTIFLEX, UFA 2108	SMA COAXIAL CABLE	12/22/2022
00276	ELECTRO-METRICS	RF PRE-AMPLIFIER	5/5/2023
00066	B&Z (HP), BZ-01002650	PRE-AMPLIFIER	5/5/2023
00742	PENN ENG., WR284	WAVEGUIDE PASS FILTER	Cal. Before Use
00281	ITC. 21A-3A1	WAVEGUIDE PASS FILTER	Cal. Before Use
00721	WEINSCHEL, DS109	TUNABLE ATTENUATOR	Cal. Before Use

Test Name: <b>AC Mains Conducted Emissions</b>		Test Date: 2/6/2023	
<b>Asset #</b>	<b>Manufacturer/Model</b>	<b>Description</b>	<b>Cal. Due</b>
00823	AGILENT, N9010A	EXA SPECTRUM ANALYZER	5/26/2023
00895	HP, 11947A	TRANSIENT LIMITER	2/23/2023
00125	SOLAR, LISN	8028-50-TS-24-BNC	9/14/2023
00126	SOLAR, LISN	8028-50-TS-24-BNC	9/14/2023
00330	WLL, BNC CABLE	CE SITE 1 CABLE	5/6/2023