

FCC PART 15.247
TEST REPORT

For

GUARDIAN SHANGHAI CORP.

368, Min Shen Rd, SongJiang, Shanghai, China

FCC ID: YJF-303RX-MBT

Report Type: Original Report	Product Type: Garage Door Opener
Test Engineer: Matt Yao	<i>Matt Yao</i>
Report Number: RKS160519002-00A	
Report Date: 2016-06-02	
Reviewed By: EMC Manager	Jesse Huang <i>Jesse Huang</i>
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) Chenghu Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION.....	5
EUT EXERCISE SOFTWARE.....	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS.....	5
SUPPORT EQUIPMENT LIST AND DETAILS.....	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP.....	6
SUMMARY OF TEST RESULTS.....	7
FCC§15.247 (i), §1.1310& §2.1091 –MAXIMUM PERMISSIBLE.....	8
EXPOSURE (MPE).....	8
APPLICABLE STANDARD.....	8
MEASUREMENT RESULT.....	8
FCC §15.203 – ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD.....	9
ANTENNA CONNECTOR CONSTRUCTION.....	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS.....	10
APPLICABLE STANDARD.....	10
MEASUREMENT UNCERTAINTY.....	10
EUT SETUP.....	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE.....	11
TEST EQUIPMENT LIST AND DETAILS.....	11
CORRECTED FACTOR & MARGIN CALCULATION.....	11
TEST RESULTS SUMMARY.....	12
TEST DATA.....	12
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	15
APPLICABLE STANDARD.....	15
MEASUREMENT UNCERTAINTY.....	15
EUT SETUP.....	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	16
TEST PROCEDURE.....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST RESULTS SUMMARY.....	17
TEST DATA.....	18
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST.....	23
APPLICABLE STANDARD.....	23

TEST PROCEDURE	23
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST DATA	23
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA	29
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	35
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST DATA	38
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	54
APPLICABLE STANDARD	54
TEST PROCEDURE	54
TEST EQUIPMENT LIST AND DETAILS.....	54
TEST DATA	54
FCC §15.247(d) - BAND EDGES TESTING	60
APPLICABLE STANDARD	60
TEST PROCEDURE	60
TEST EQUIPMENT LIST AND DETAILS.....	60
TEST DATA	60

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The GUARDIAN SHANGHAI CORP.'s product, model number: 2211-M (FCC ID: YJF-303RX-MBT) or the "EUT" in this report was a Garage Door Opener, which was measured approximately: 255mm (L)*255mm (W)*150mm (H), rated input voltage: AC 100-120V.

**All measurement and test data in this report was gathered from production sample serial number: 20160519022*

(Assigned by the BACL. The EUT supplied by the applicant was received on 2016-05-19)

Objective

This test report is prepared on behalf of GUARDIAN SHANGHAI CORP. in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B CRR submissions with FCC ID: YJF-303RX-MBT.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.87 dB for 30MHz-1GHz, and 4.84 dB for above 1GHz, 1.85dB for conducted measurement.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the Chenghu Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China.

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode which was controlled by software.

EUT Exercise Software

Labtool.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Shielding Type	Length (m)	From Port	To
/	/	/	/	/

Block Diagram of Test Setup

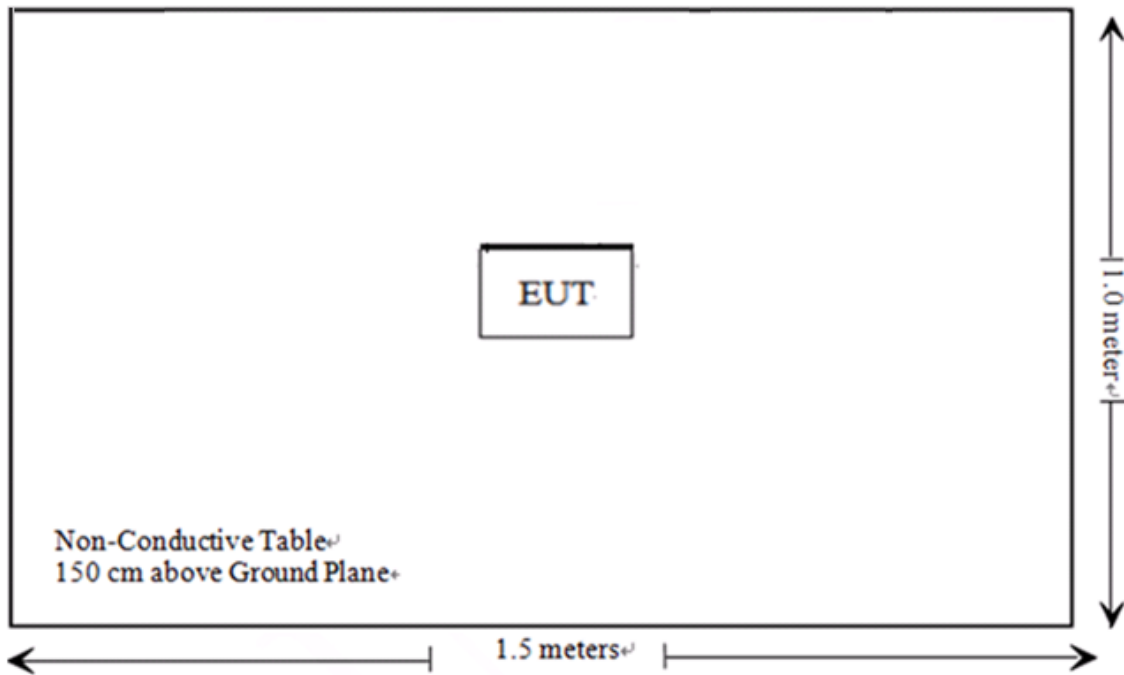

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

FCC§15.247 (i), §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i)and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/		f/1500	30
1500-100,000	/		1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4 \pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Measurement Result

Model	Frequenc y (MHz)	Antenna Gain		Target Power		Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
		(dBi)	(numeric)	(dBm)	(mW)			
BDR (GFSK)	2441	0.0	1	0	1.00	20	0.0002	1.0

Note: The target output power: -1 ± 1 dBm, which declared by the Manufacturer.

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a PCB antenna arrangement for Bluetooth, which the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Kunshan) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Port	Expanded Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup

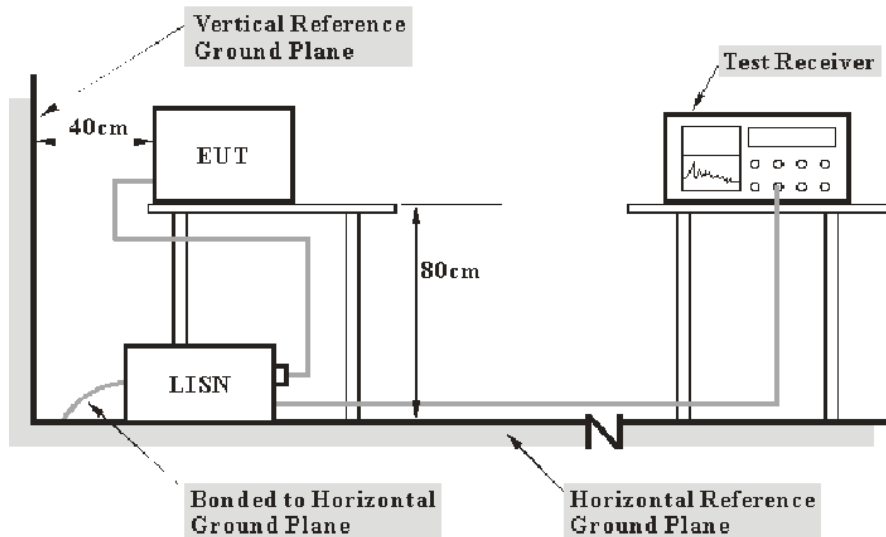

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The EUT was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the EUT was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	934115/007	2015-11-12	2016-11-11
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2015-11-12	2016-11-11
Rohde & Schwarz	LISN	ESH3-Z5	892239/018	2015-06-23	2016-06-22
Rohde & Schwarz	Pulse limiter	ESH3-Z2	879940/0058	2015-06-19	2016-06-18
Rohde & Schwarz	CE Test software	EMC 32	V 09.10.0	--	--
MICRO-COAX	Coaxial line	UFB-293B-1-0480-50X50	97F0173	2015-10-01	2016-10-01

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, the worst margin reading as below:

5.79 dB at 3.194000 MHz in the Line conducted mode

Refer to CISPR16-4-2 and CISPR 16-4-1, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data


Environmental Conditions

Temperature:	27 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-05-27.


EUT operation mode: Transmitting

AC 120V/60 Hz, Line

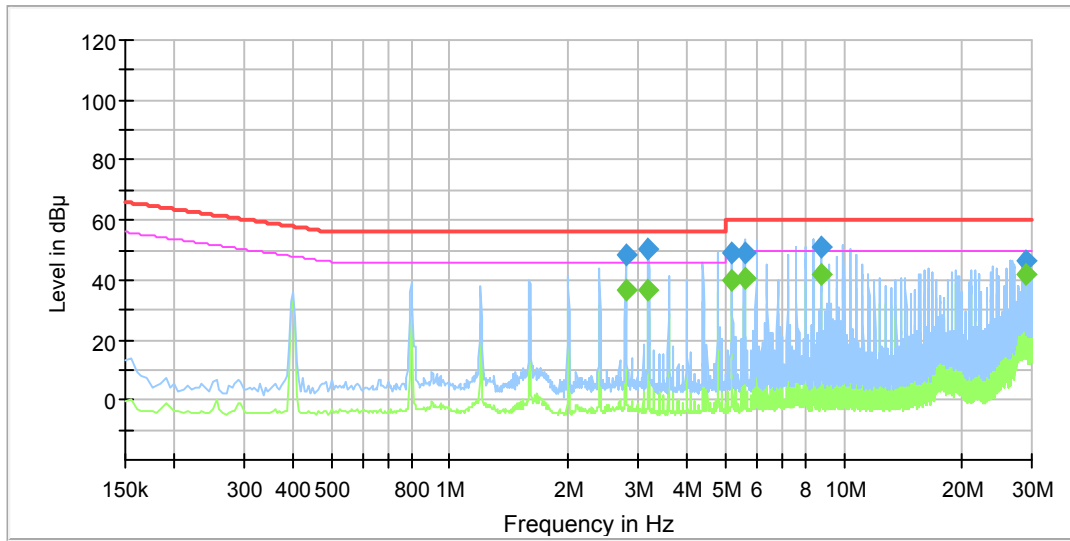

Frequency (MHz)	QuasiPeak (dBµV)	Average (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
2.794000	---	36.77	9.000	L1	11.2	9.23	46.00	Compliance
2.794000	48.47	---	9.000	L1	11.2	7.53	56.00	Compliance
3.194000	---	36.90	9.000	L1	11.3	9.10	46.00	Compliance
3.194000	50.21	---	9.000	L1	11.3	5.79	56.00	Compliance
5.190000	---	39.68	9.000	L1	11.3	10.32	50.00	Compliance
5.190000	49.33	---	9.000	L1	11.3	10.67	60.00	Compliance
5.593000	---	40.50	9.000	L1	11.3	9.50	50.00	Compliance
5.593000	49.24	---	9.000	L1	11.3	10.76	60.00	Compliance
8.785000	---	42.11	9.000	L1	11.4	7.89	50.00	Compliance
8.785000	50.66	---	9.000	L1	11.4	9.34	60.00	Compliance
29.142000	---	41.76	9.000	L1	11.5	8.24	50.00	Compliance
29.142000	46.38	---	9.000	L1	11.5	13.62	60.00	Compliance

AC 120V/60 Hz, Neutral

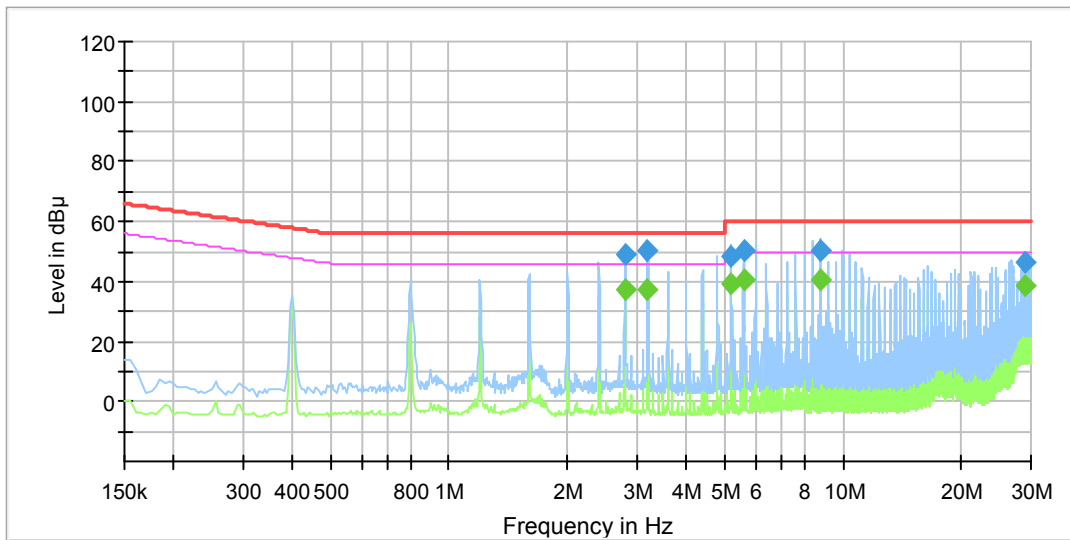

Frequency (MHz)	QuasiPeak (dBµV)	Average (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
2.795000	---	37.02	9.000	N	11.3	8.98	46.00	Compliance
2.795000	48.81	---	9.000	N	11.3	7.19	56.00	Compliance
3.195000	---	37.02	9.000	N	11.3	8.98	46.00	Compliance
3.195000	50.13	---	9.000	N	11.3	5.87	56.00	Compliance
5.194000	---	39.39	9.000	N	11.4	10.61	50.00	Compliance
5.194000	48.22	---	9.000	N	11.4	11.78	60.00	Compliance
5.590000	---	40.77	9.000	N	11.4	9.23	50.00	Compliance
5.590000	50.62	---	9.000	N	11.4	9.38	60.00	Compliance
8.786000	---	40.80	9.000	N	11.4	9.20	50.00	Compliance
8.786000	50.65	---	9.000	N	11.4	9.35	60.00	Compliance
29.152000	---	38.41	9.000	N	11.5	11.59	50.00	Compliance
29.152000	46.24	---	9.000	N	11.5	13.76	60.00	Compliance

Note:

- 1) Corr.=LISN VDF (Voltage Division Factor) + Cable Loss
- 2) Corrected Amplitude = Reading + Corr.
- 3) Margin = Limit –Corrected Amplitude

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard

FCC §15.205; §15.209; §15.247(d)


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on CISPR 16-4-2, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz, and 4.92 dB for above 1GHz. And this uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

Below 1 GHz:

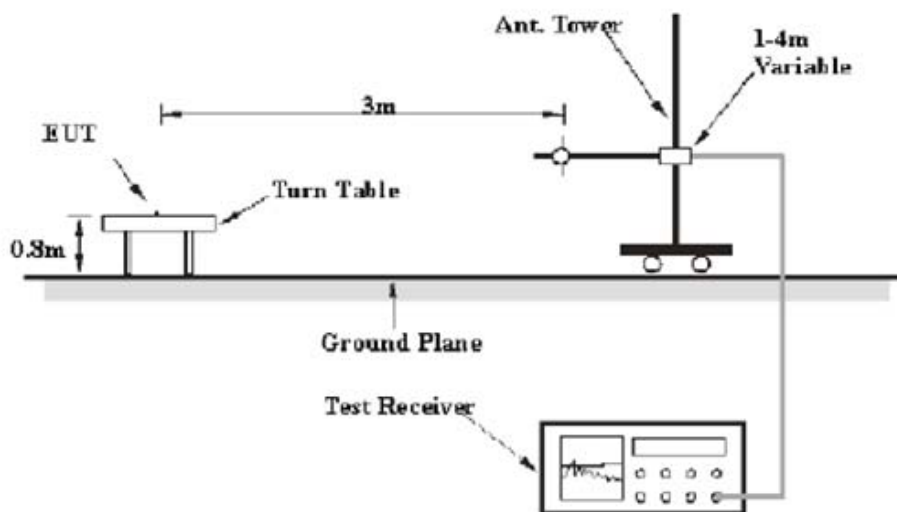

Above 1GHz:

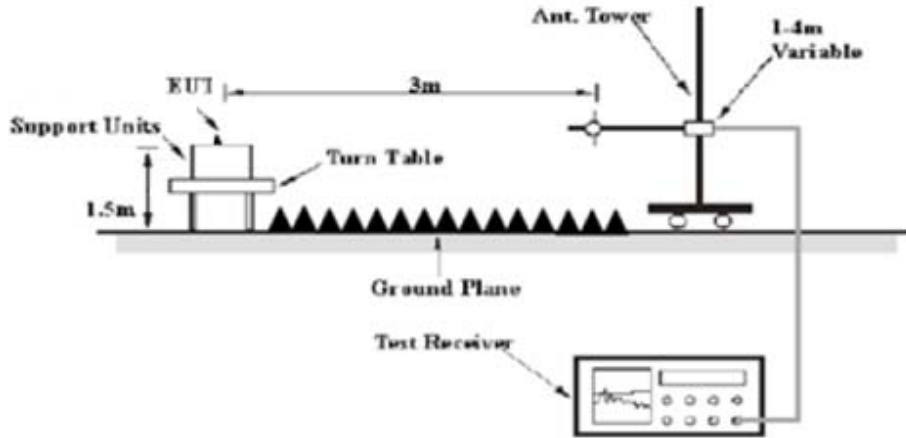

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

The EUT was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sonoma Instrument	Amplifier	330	171377	2015-09-16	2016-09-16
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2015-11-07	2016-11-06
ETS	Horn Antenna	3115	6229	2015-11-07	2016-11-06
EMCO	Horn Antenna	3116	9510-2384	2015-11-07	2016-11-06
Rohde & Schwarz	SIGNAL ANALYZER	FSV40	101116	2015-09-02	2016-09-02
Mini	Pre-amplifier	ZVA-183-S+	857001418	2015-09-16	2016-09-16
DUCOMMUN	Pre-amplifier	ALN-22093530-01	990147	2015-09-16	2016-09-16
champrotek	Chamber	Chamber A	1#	2015-09-17	2016-09-17
R&S	Auto test Software	EMC32	V 09.10.0	-	-
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15
BACL	RF cable	KS-LAB-010	KS-LAB-010	2015-12-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

1.69dB at 30.727500 MHz in the Vertical polarization

Refer to CISPR16-4-2 and CISPR 16-4-1, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(L_m)}$ is less than $+ U_{cispr}$, if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data


Environmental Conditions

Temperature:	27 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-05-20.

EUT operation mode: Transmitting

30MHz-1GHz:

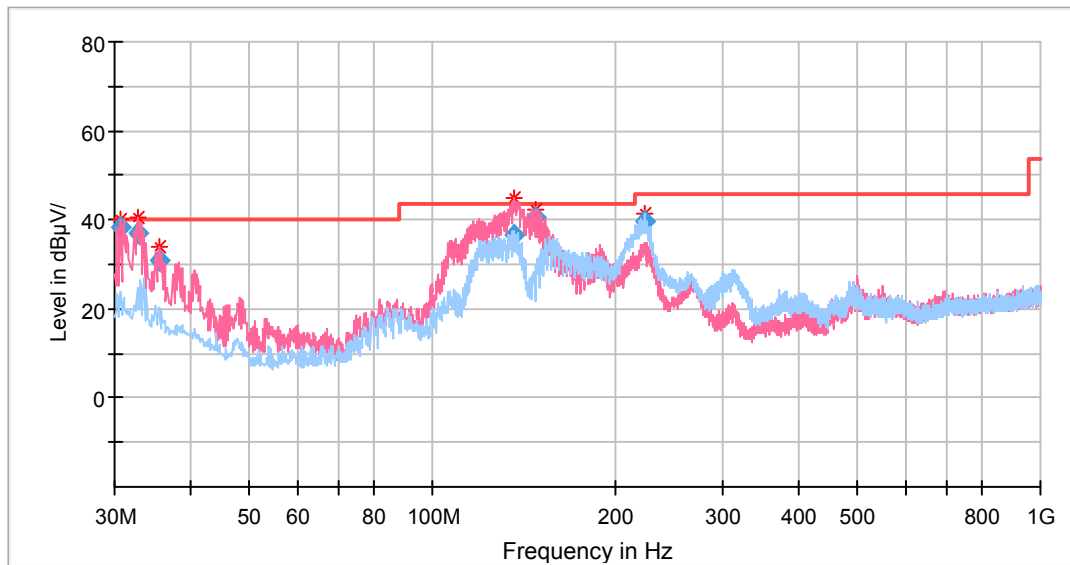

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB µ V/m)	Margin (dB)
30.727500	44.01	QP	255.0	100.0	V	-5.7	38.31	40.00	1.69
32.667500	43.77	QP	188.0	100.0	V	-6.6	37.17	40.00	2.83
35.456250	38.69	QP	151.0	100.0	V	-8.0	30.69	40.00	9.31
136.215000	48.95	QP	231.0	100.0	V	-12.5	36.45	43.50	7.05
148.218750	52.70	QP	151.0	100.0	V	-12.2	40.50	43.50	3.00
223.272500	52.05	QP	124.0	100.0	H	-12.4	39.65	46.00	6.35

1GHz -25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8-DPSK mode, the worst case is EDR Mode ($\pi/4$ -DQPSK))

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247/205/209	
	Reading (dB μ V)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Low Channel (2402 MHz)									
2402	93.45	PK	280.0	150	V	3.0	96.45	/	/
2402	82.77	Ave	280.0	150	V	3.0	85.77	/	/
2402	92.31	PK	150.0	150	H	3.0	95.31	/	/
2402	81.43	Ave	150.0	150	H	3.0	84.43	/	/
2382	20.85	Ave	23.0	150	V	4.9	25.75	54	28.25
2382	34.46	PK	23.0	150	V	4.9	39.36	74	34.64
2390	20.85	Ave	345.0	150	V	4.9	25.75	54	28.25
2390	34.58	PK	345.0	150	V	4.9	39.48	74	34.52
4804	18.68	Ave	66.0	150	V	13.7	32.38	54	21.62
4804	32.14	PK	66.0	150	V	13.7	45.84	74	28.16
6653	22.73	Ave	137.0	200	V	17.8	40.53	54	13.47
6653	36.25	PK	137.0	200	V	17.8	54.05	74	19.95
7206	16.53	Ave	139.0	150	V	20.5	37.03	54	16.97
7206	30.22	PK	139.0	150	V	20.5	50.72	74	23.28

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Middle Channel (2441 MHz)									
2441	94.63	PK	265.0	150	V	2.6	97.23	/	/
2441	83.27	Ave	265.0	150	V	2.6	85.87	/	/
2441	93.53	PK	265.0	150	H	2.6	96.13	/	/
2441	83.07	Ave	265.0	150	H	2.6	85.67	/	/
3076	35.18	PK	206.0	250	V	7.0	42.18	74	31.82
3076	21.71	Ave	206.0	250	V	7.0	28.71	54	25.29
4882	18.75	Ave	265.0	150	V	13.9	32.65	54	21.35
4882	32.49	PK	265.0	150	V	13.9	46.39	74	27.61
6962	21.64	Ave	349.0	200	V	18.9	40.54	54	13.46
6962	35.45	PK	349.0	200	V	18.9	54.35	74	19.65
7323	17.19	Ave	9.0	150	H	20.8	37.99	54	16.01
7323	30.82	PK	9.0	150	H	20.8	51.62	74	22.38
7803	30.50	PK	358.0	150	H	21.5	52.00	74	22.00
7803	17.39	Ave	358.0	150	H	21.5	38.89	54	15.11
High Channel (2480 MHz)									
2480	93.91	PK	187.0	150	V	3.2	97.11	/	/
2480	83.14	Ave	187.0	150	V	3.2	86.34	/	/
2480	93.03	PK	138.0	150	H	3.2	96.23	/	/
2480	82.24	Ave	138.0	150	H	3.2	85.44	/	/
2483.5	62.81	PK	145.0	150	V	5.0	67.81	74	6.19
2483.5	28.91	Ave	145.0	150	V	5.0	33.91	54	20.09
2486	59.98	PK	137.0	150	V	5.0	64.98	74	9.02
2486	25.79	Ave	137.0	150	V	5.0	30.79	54	23.21
4960	31.65	PK	262.0	150	V	14.1	45.75	74	28.25
4960	18.28	Ave	262.0	150	V	14.1	32.38	54	21.62
6625	22.73	Ave	136.0	250	H	17.7	40.43	54	13.57
6625	35.45	PK	136.0	250	H	17.7	53.15	74	20.85
7440	30.93	PK	240.0	150	V	21.2	52.13	74	21.87
7440	17.74	Ave	240.0	150	V	21.2	38.94	54	15.06

Note:


Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


Conducted Spurious Emissions at Antenna Port

Low Channel

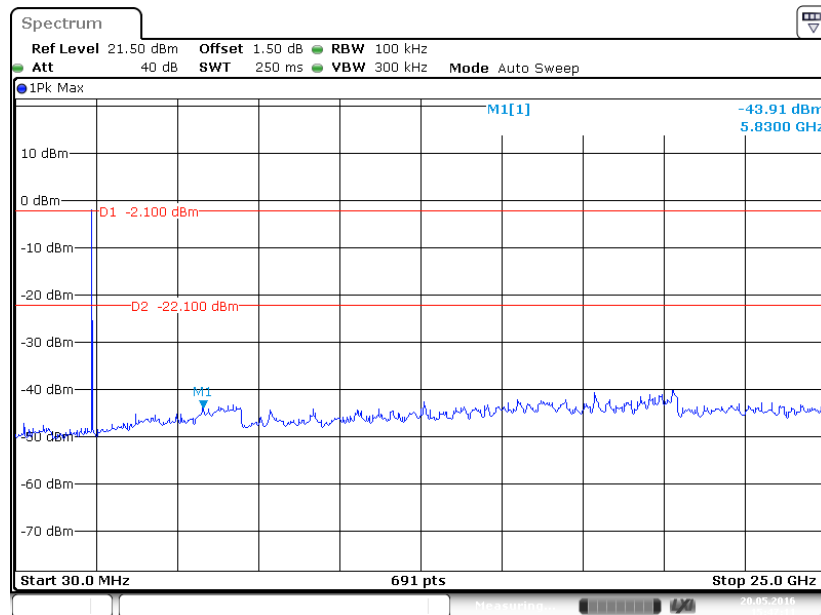


Date: 20 MAY 2016 15:47:11

Middle Channel

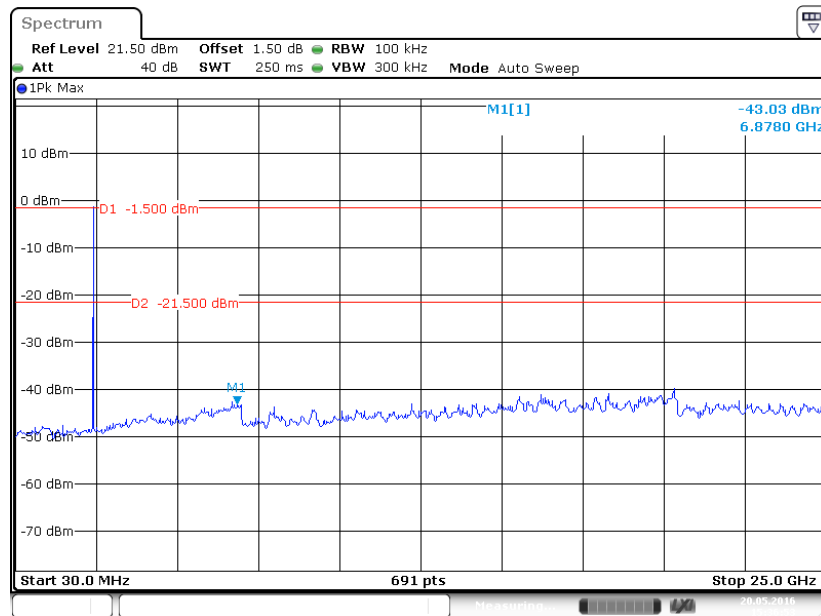

Date: 20 MAY 2016 15:36:53

High Channel

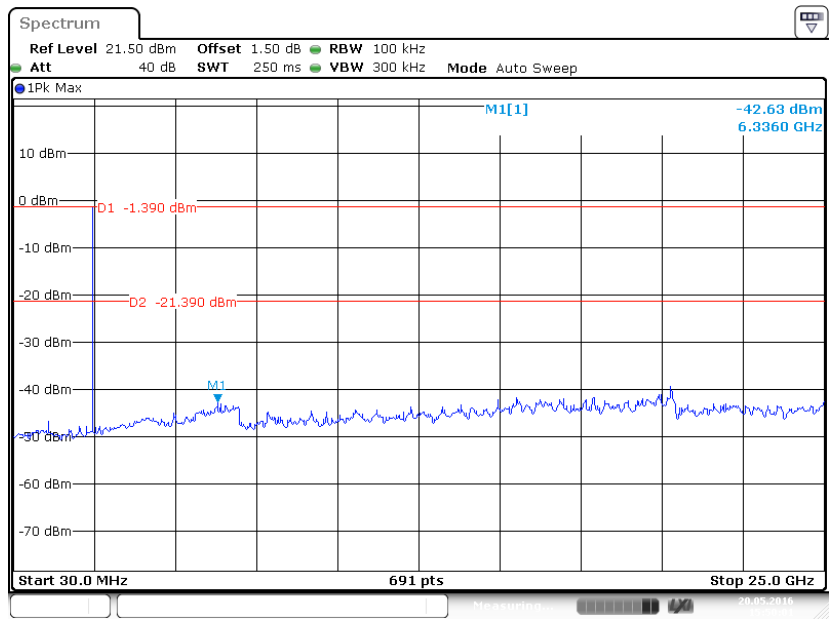

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-06-02.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	≥Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.004	0.655	Pass
	Adjacent	2403			
	Middle	2441	0.998	0.652	Pass
	Adjacent	2442			
	High	2480	1.004	0.657	Pass
	Adjacent	2479			
EDR (π/4-DQPSK)	Low	2402	1.004	0.935	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.933	Pass
	Adjacent	2442			
	High	2480	1.004	0.938	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.004	0.946	Pass
	Adjacent	2403			
	Middle	2441	0.998	0.938	Pass
	Adjacent	2442			
	High	2480	1.004	0.943	Pass
	Adjacent	2479			

Note: Limit = 20 dB bandwidth *2/3


BDR (GFSK): Low Channel

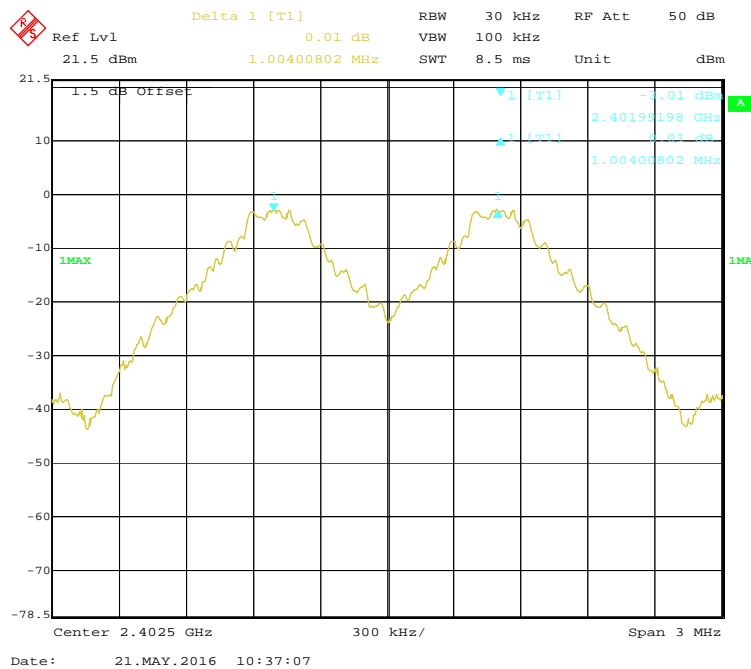


BDR (GFSK): Middle Channel

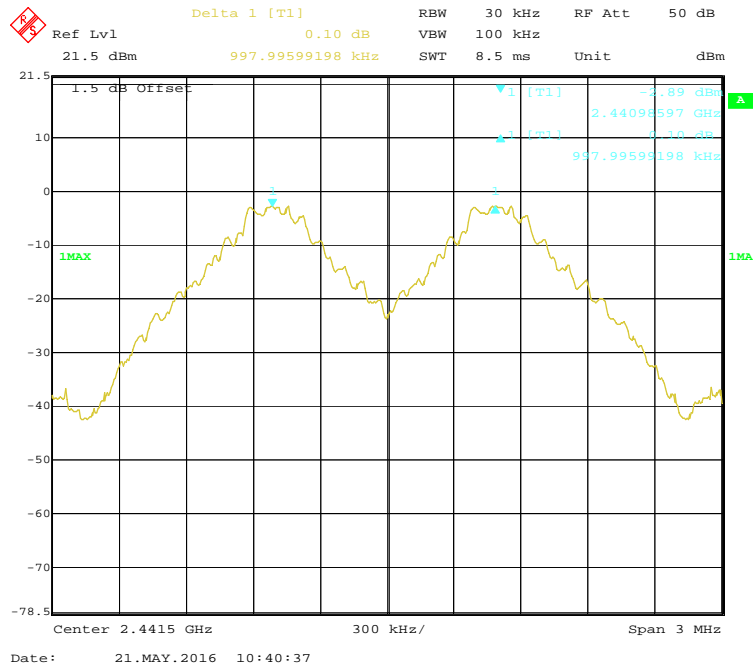


BDR (GFSK): High Channel

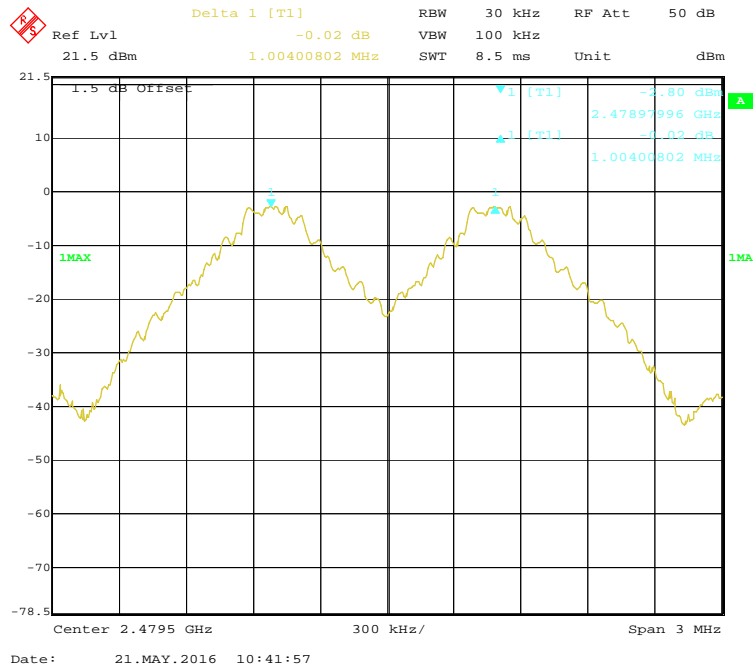


EDR ($\pi/4$ -DQPSK): Low Channel

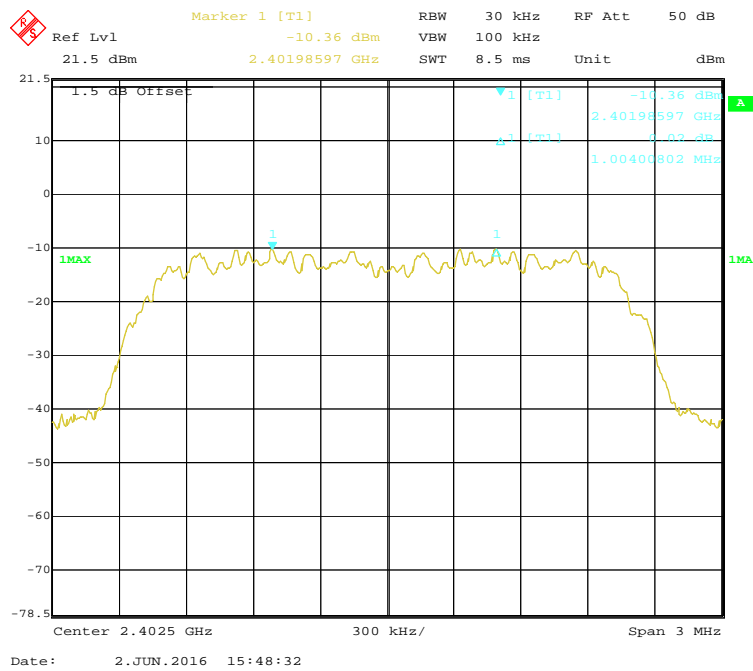


EDR ($\pi/4$ -DQPSK): Middle Channel

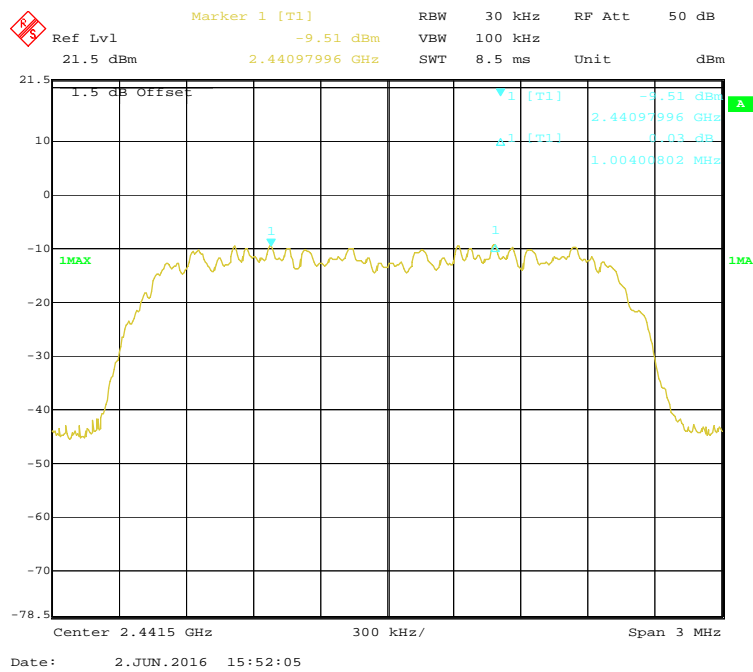


EDR ($\pi/4$ -DQPSK): High Channel

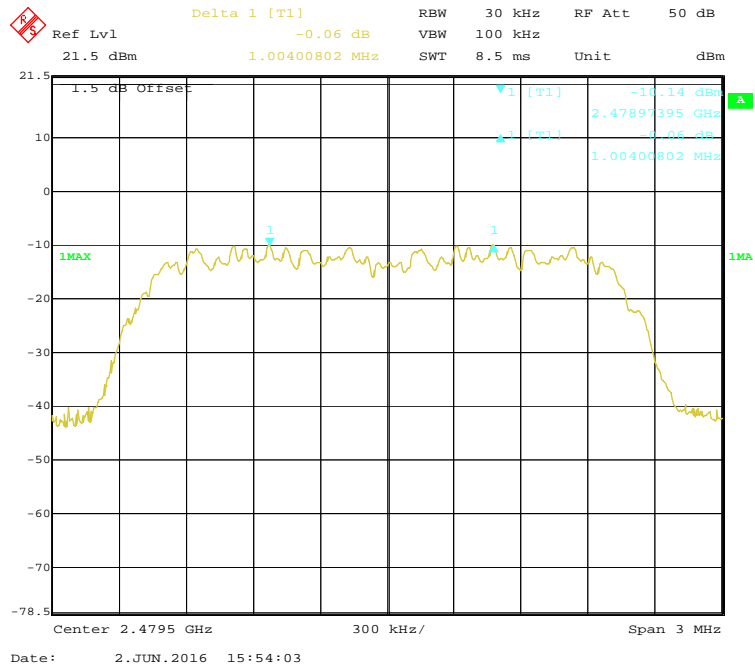


EDR (8DPSK): Low Channel

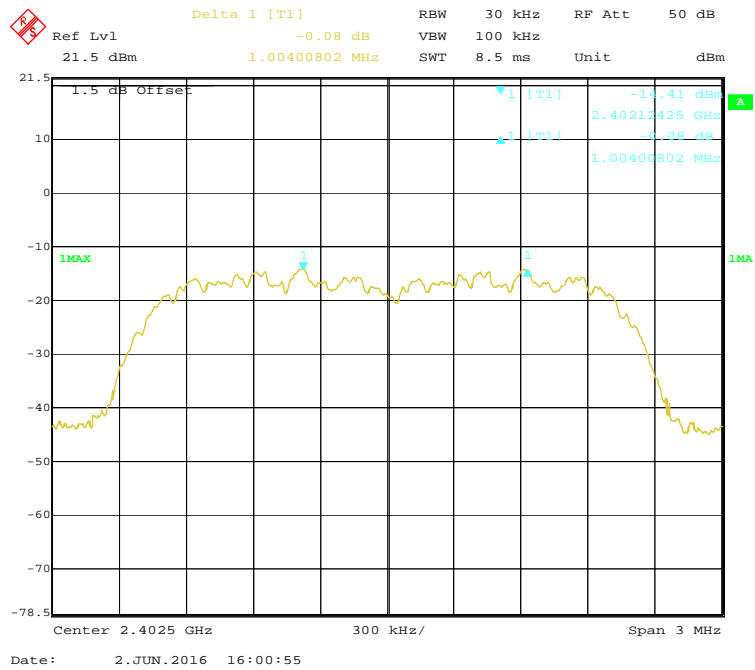

EDR (8DPSK): Middle Channel

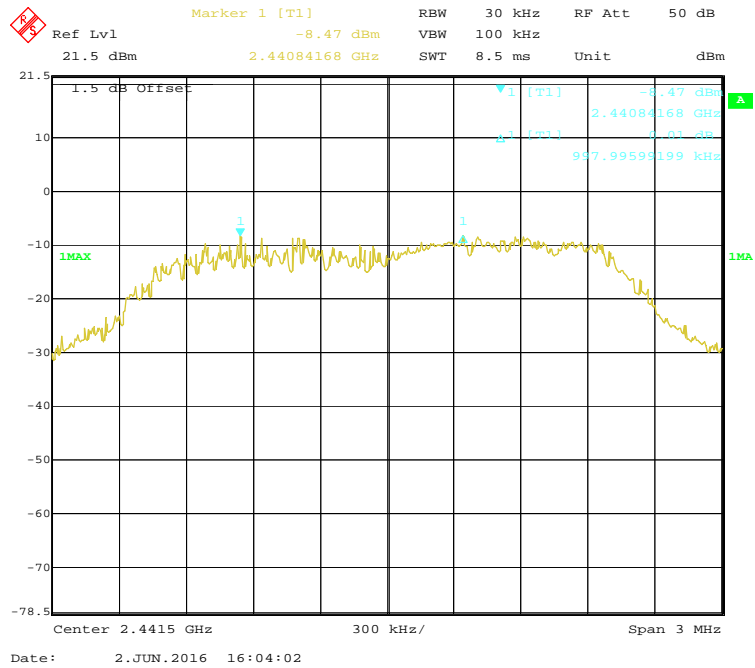

EDR (8DPSK): High Channel

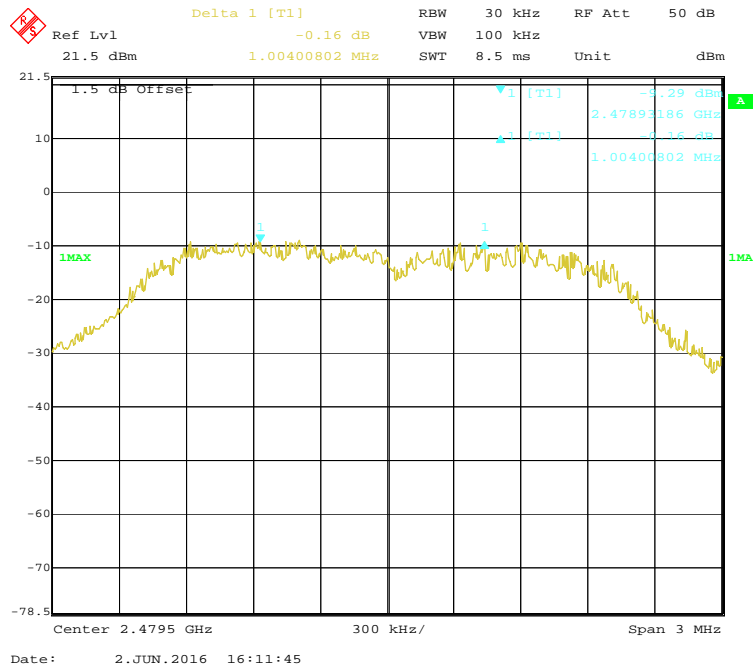

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Matt Yao on 2016-06-02.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.982
	Middle	2441	0.978
	High	2480	0.986
EDR ($\pi/4$-DQPSK)	Low	2402	1.403
	Middle	2441	1.399
	High	2480	1.407
EDR (8DPSK)	Low	2402	1.419
	Middle	2441	1.407
	High	2480	1.415


BDR (GFSK): Low Channel

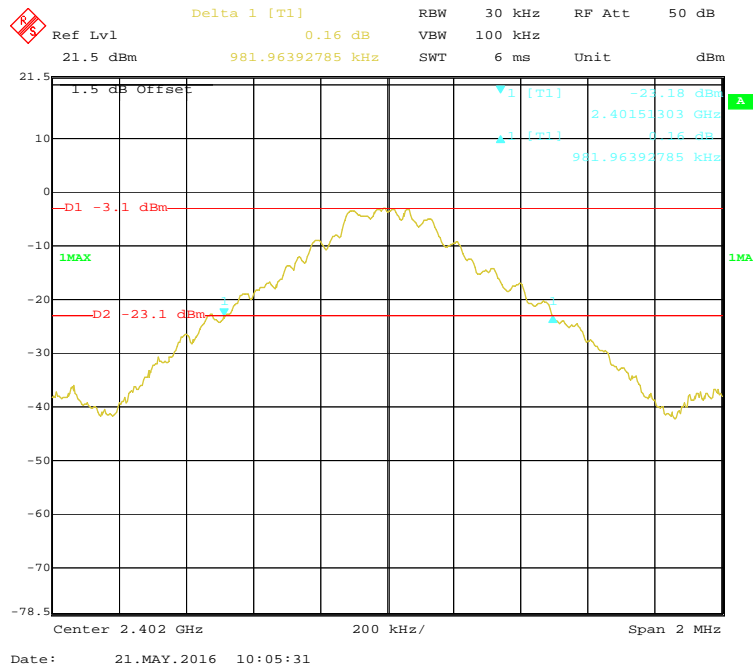


BDR (GFSK): Middle Channel

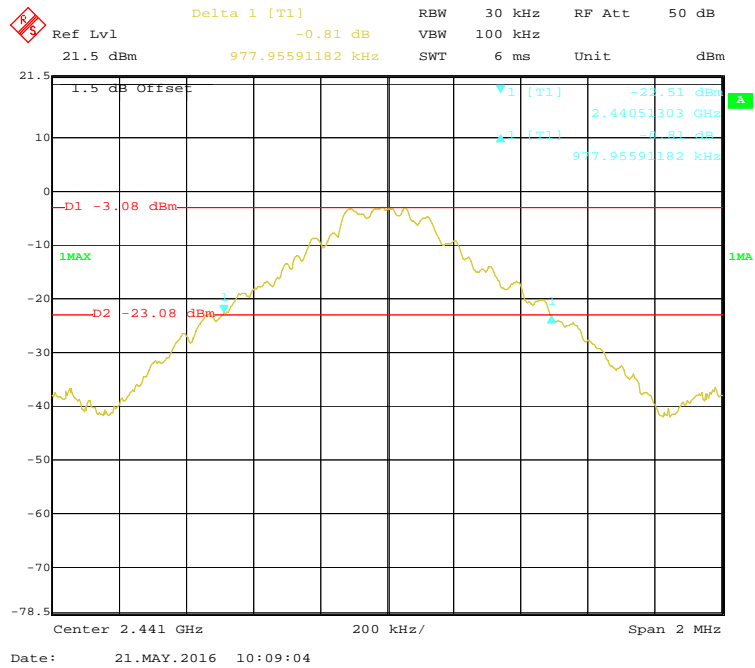


BDR (GFSK): High Channel

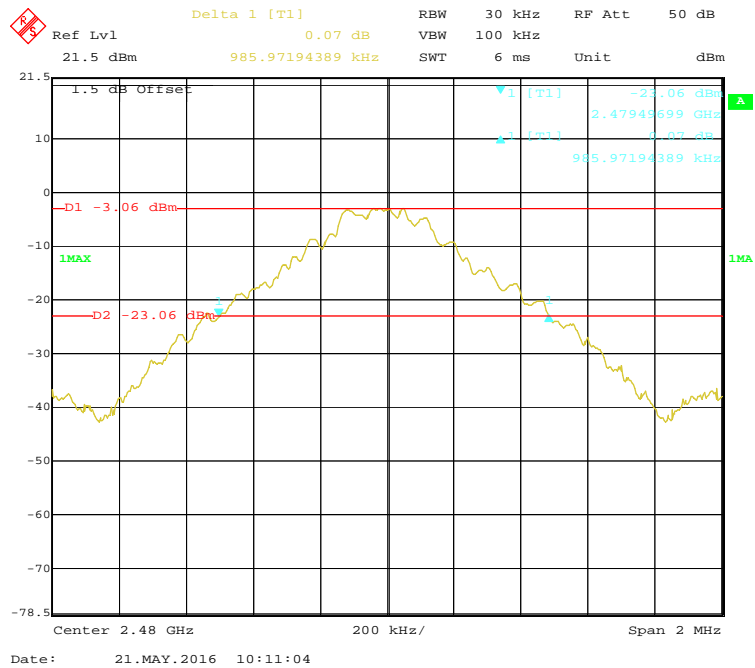


EDR ($\pi/4$ -DQPSK): Low Channel

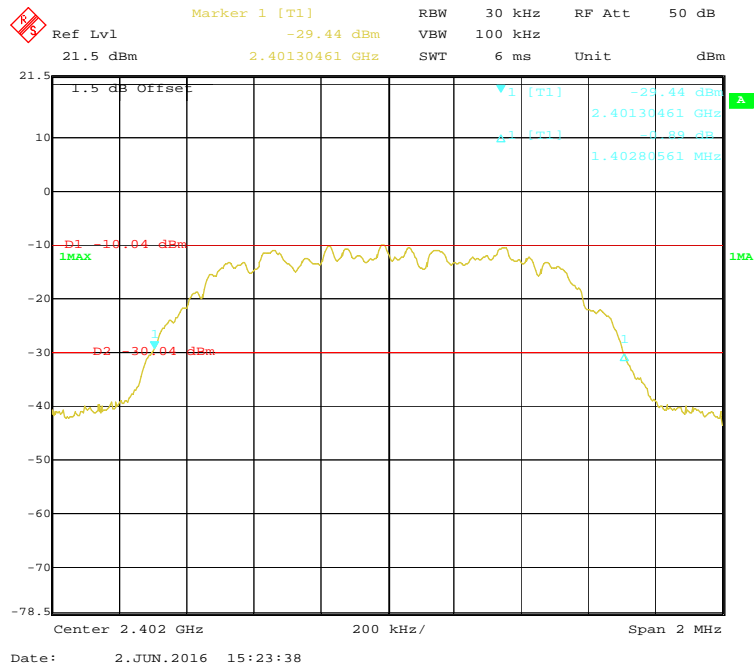


EDR ($\pi/4$ -DQPSK): Middle Channel

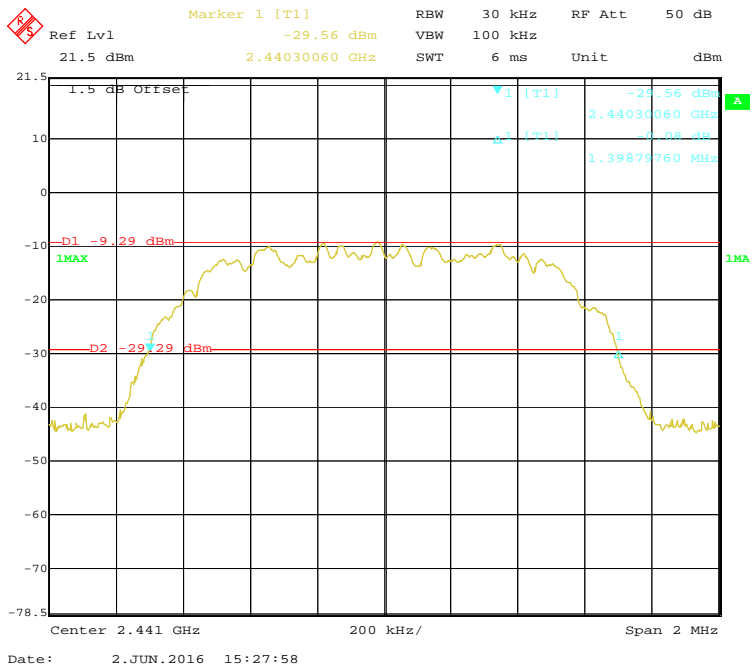


EDR ($\pi/4$ -DQPSK): High Channel

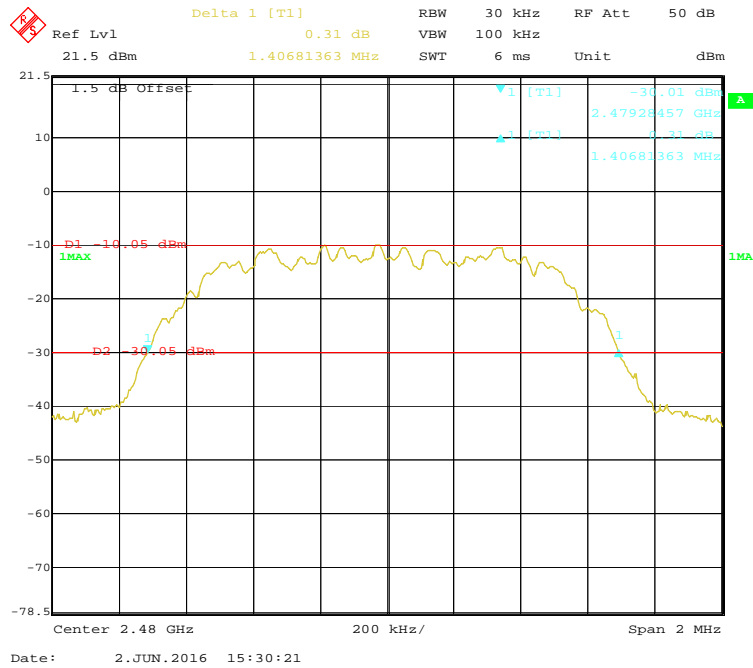


EDR (8DPSK): Low Channel

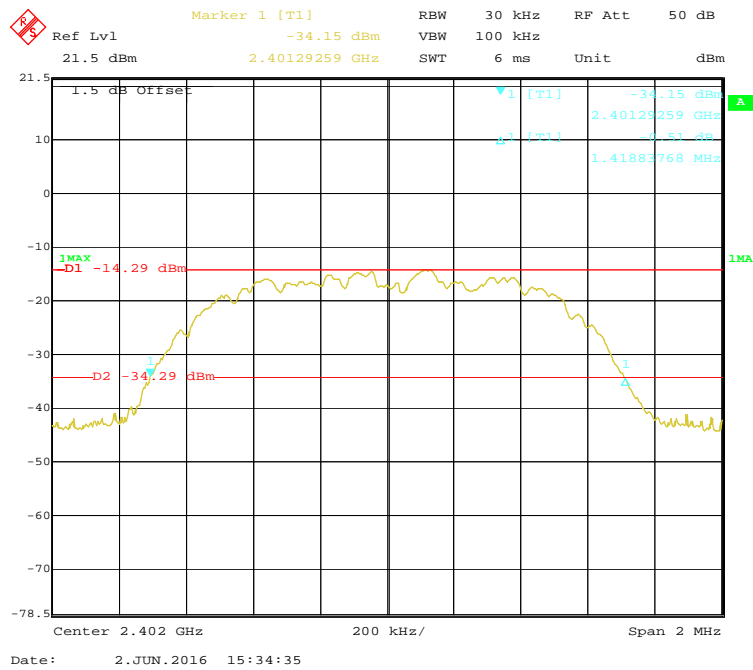

EDR (8DPSK): Middle Channel

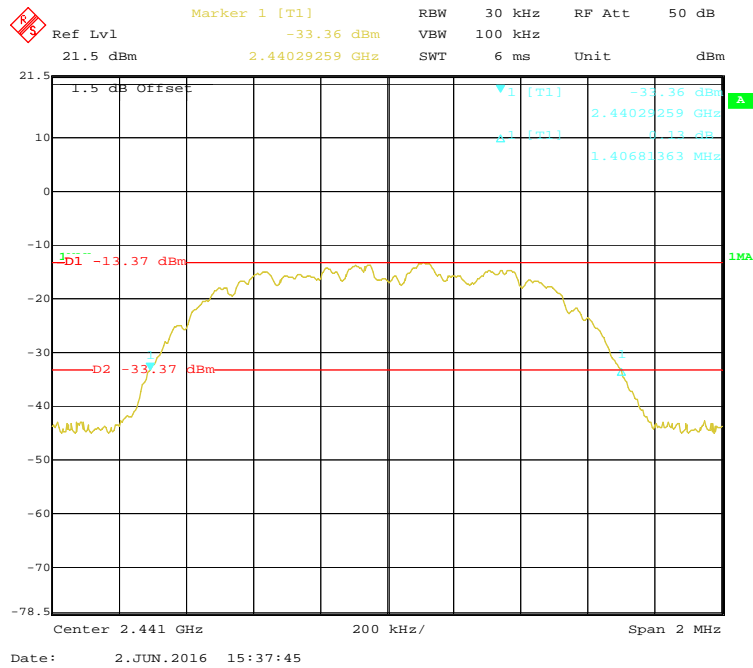

EDR (8DPSK): High Channel

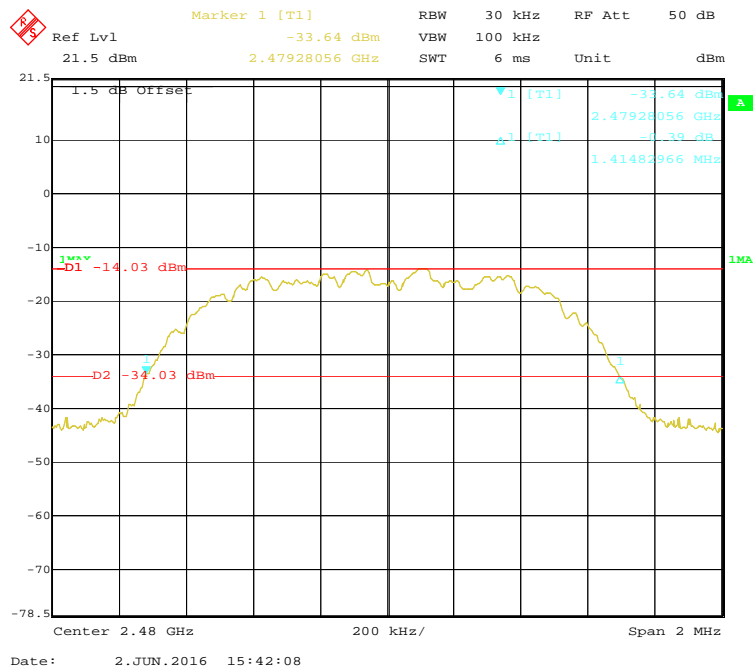

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	SIGNAL ANALYZER	FSV40	101116	2015-09-02	2016-09-02
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa


The testing was performed by Matt Yao on 2016-05-21.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

BDR (GFSK): Number of Hopping Channels

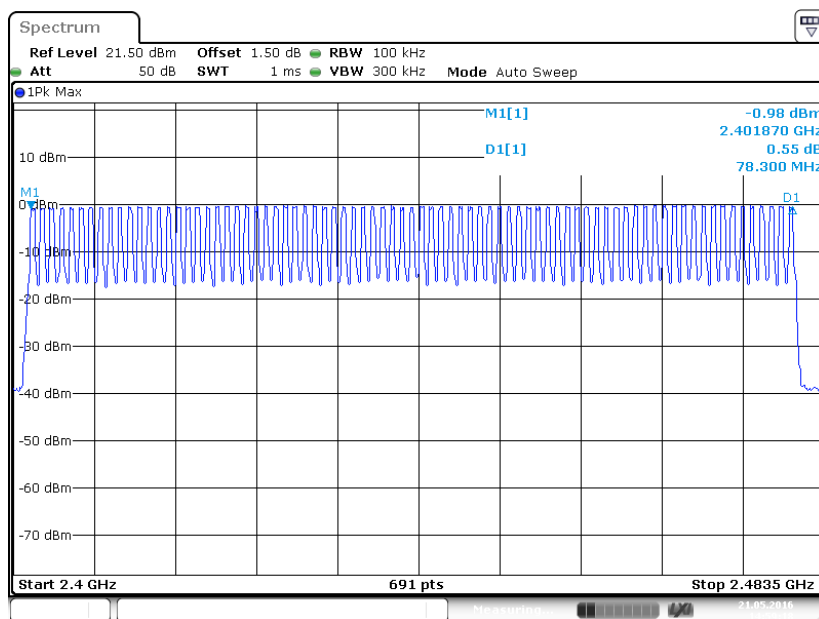


Date: 21 MAY 2016 14:59:19

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

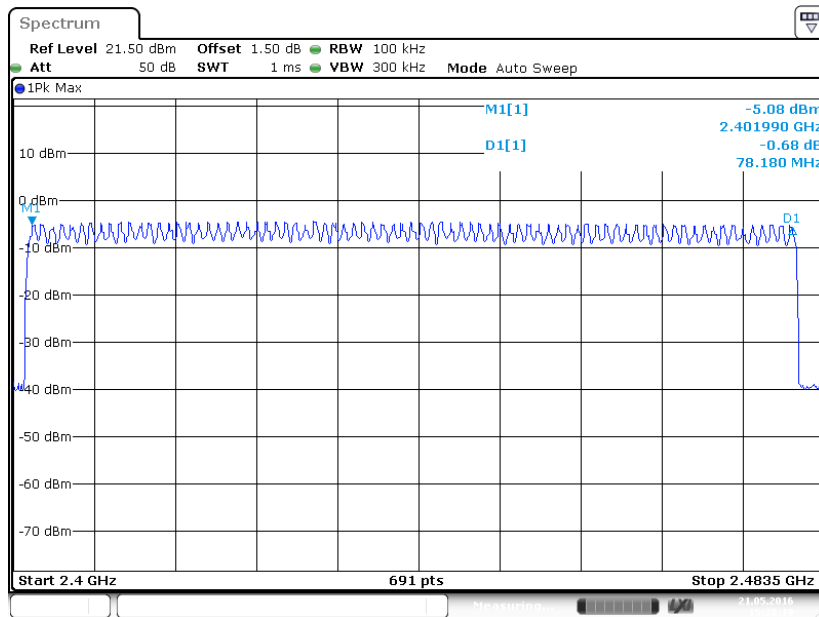

Date: 21 MAY 2016 15:28:20

EDR (8DPSK): Number of Hopping Channels

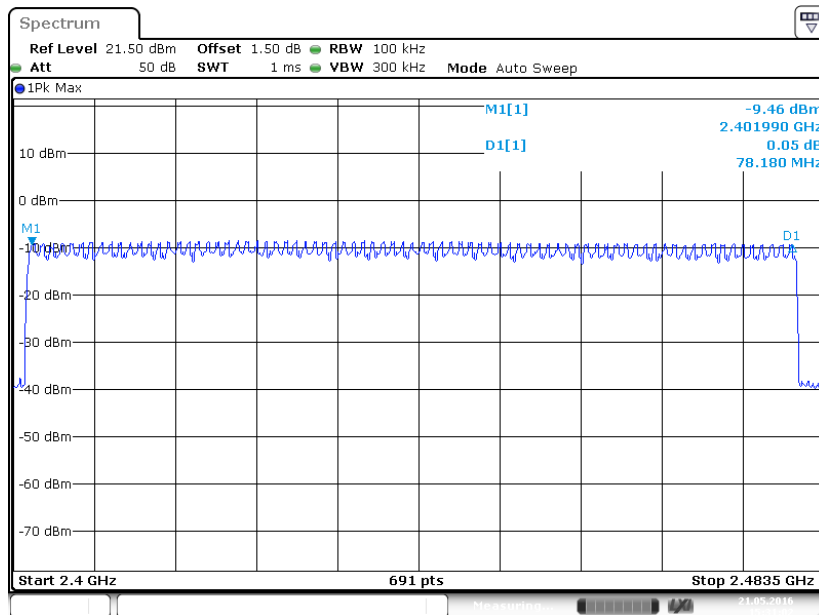

Date: 21 MAY 2016 15:31:02

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	SIGNAL ANALYZER	FSV40	101116	2015-09-02	2016-09-02
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa


The testing was performed by Matt Yao on 2016-05-21.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result	
BDR (GFSK)	DH 1	Low	0.348	0.111	0.4	Pass	
		Middle	0.348	0.111	0.4	Pass	
		High	0.349	0.112	0.4	Pass	
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	DH 3	Low	1.752	0.280	0.4	Pass	
		Middle	1.757	0.281	0.4	Pass	
		High	1.752	0.280	0.4	Pass	
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	DH 5	Low	3.007	0.321	0.4	Pass	
		Middle	3.014	0.321	0.4	Pass	
		High	3.007	0.321	0.4	Pass	
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						
	EDR ($\pi/4$ -DQPSK)	2-DH 1	Low	0.348	0.111	0.4	Pass
Middle			0.348	0.111	0.4	Pass	
High			0.348	0.111	0.4	Pass	
Note: 2-DH1:Dwell time = Pulse time*(1600/2/79)*31.6S							
2-DH 3		Low	1.752	0.280	0.4	Pass	
		Middle	1.752	0.280	0.4	Pass	
		High	1.752	0.280	0.4	Pass	
Note: 2-DH3:Dwell time = Pulse time*(1600/4/79)*31.6S							
2-DH 5		Low	3.007	0.321	0.4	Pass	
		Middle	3.007	0.321	0.4	Pass	
		High	3.014	0.321	0.4	Pass	
Note: 2-DH5:Dwell time = Pulse time*(1600/6/79)*31.6S							
EDR (8DPSK)		3-DH 1	Low	0.418	0.134	0.4	Pass
	Middle		0.418	0.134	0.4	Pass	
	High		0.418	0.134	0.4	Pass	
	Note: 3-DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	3-DH 3	Low	1.752	0.280	0.4	Pass	
		Middle	1.748	0.280	0.4	Pass	
		High	1.752	0.280	0.4	Pass	
	Note: 3-DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	3-DH 5	Low	3.014	0.321	0.4	Pass	
		Middle	3.007	0.321	0.4	Pass	
		High	3.007	0.321	0.4	Pass	
	Note: 3-DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						

BDR (GFSK): Pulse time, Low Channel, DH1

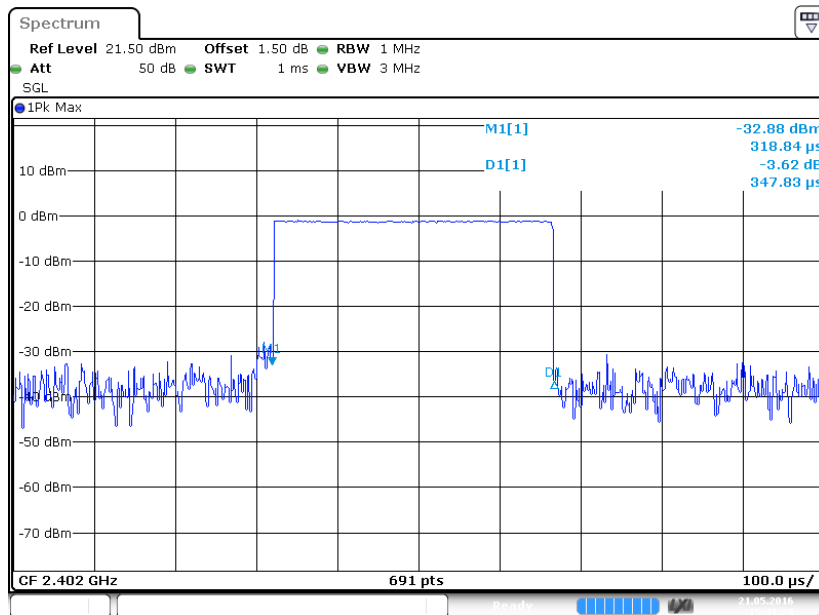


Date: 21 MAY 2016 15:41:21

Pulse time, Middle Channel, DH1

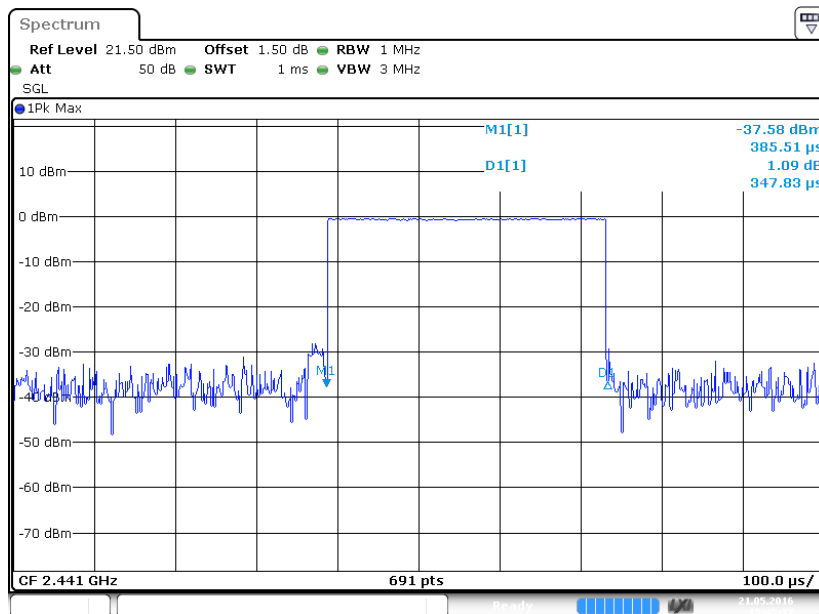


Date: 21 MAY 2016 15:45:37


Pulse time, High Channel, DH1

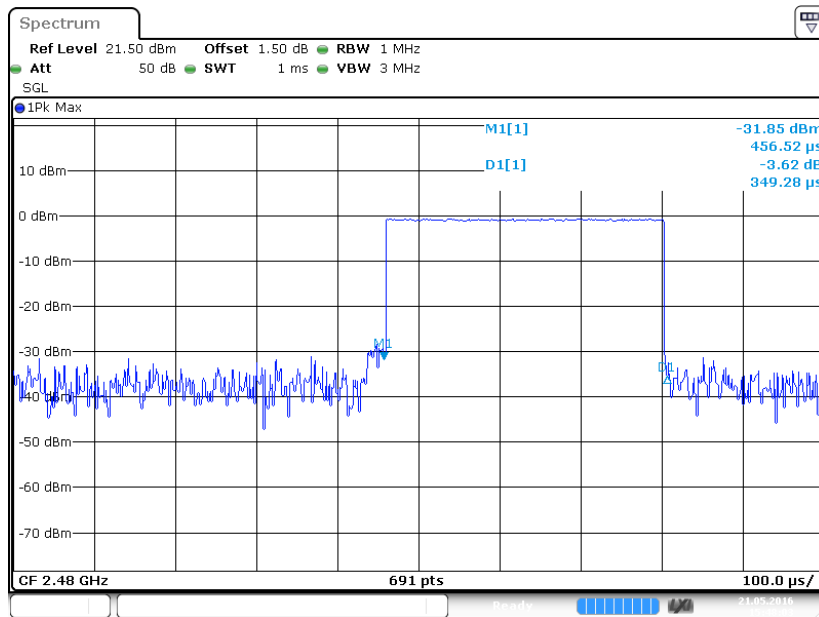


Pulse time, Low Channel, DH3

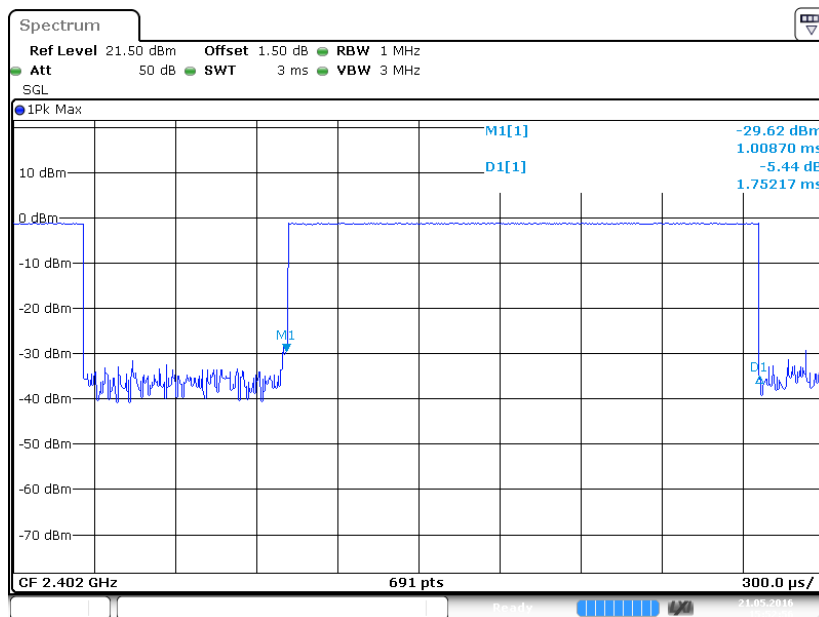


Pulse time, Middle Channel, DH3

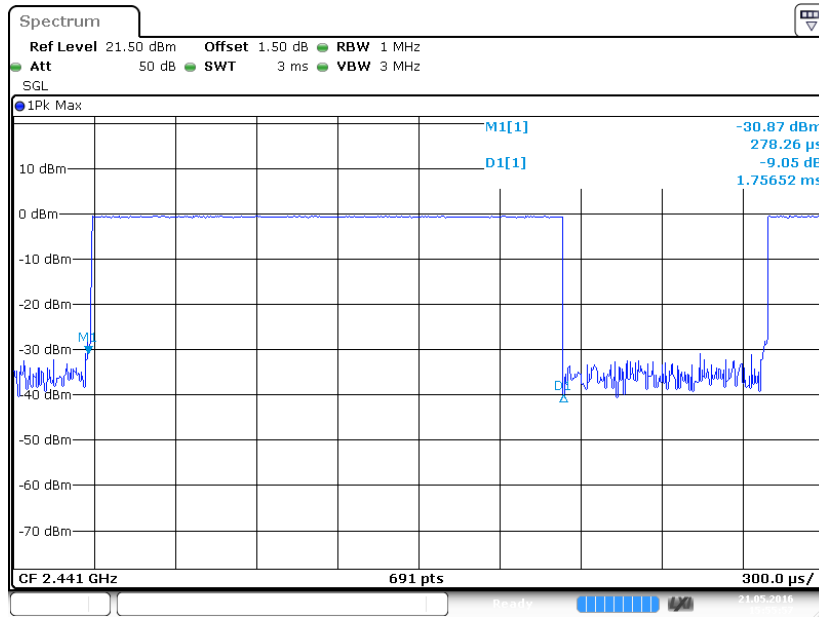

Pulse time, High Channel, DH3

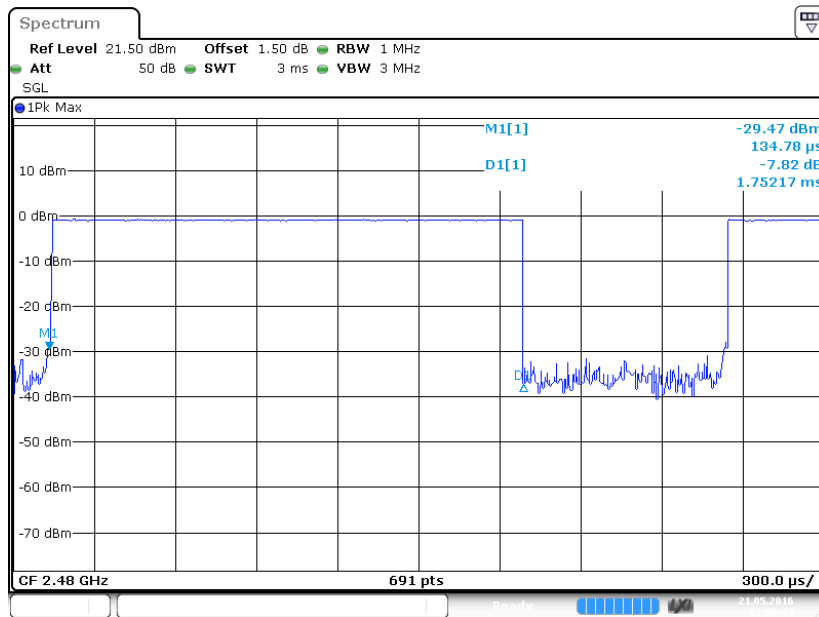


Pulse time, Low Channel, DH5

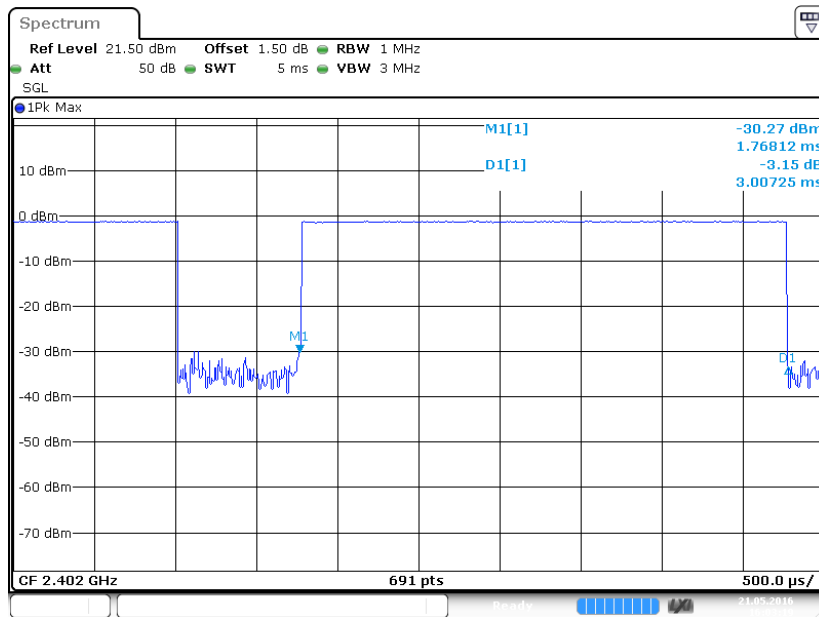


Date: 21 MAY 2016 16:03:19

Pulse time, Middle Channel, DH5

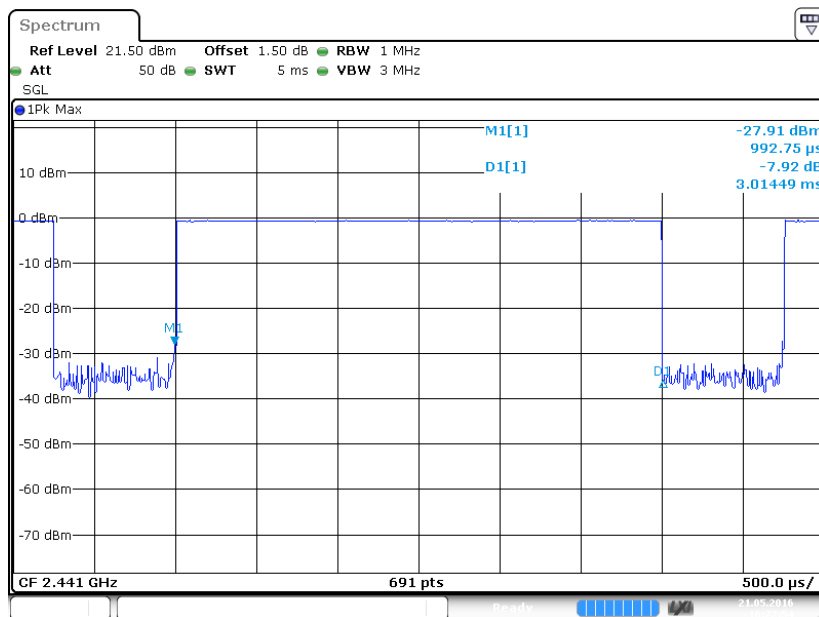


Date: 21 MAY 2016 16:22:55

Pulse time, High Channel, DH5

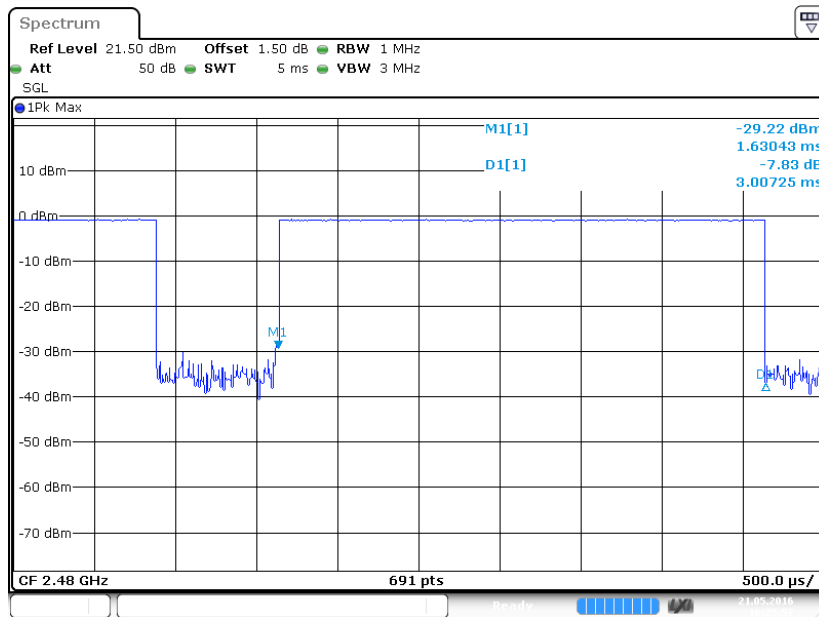


Date: 21 MAY 2016 16:25:57

EDR ($\pi/4$ -DQPSK): Pulse time, Low Channel, 2-DH1

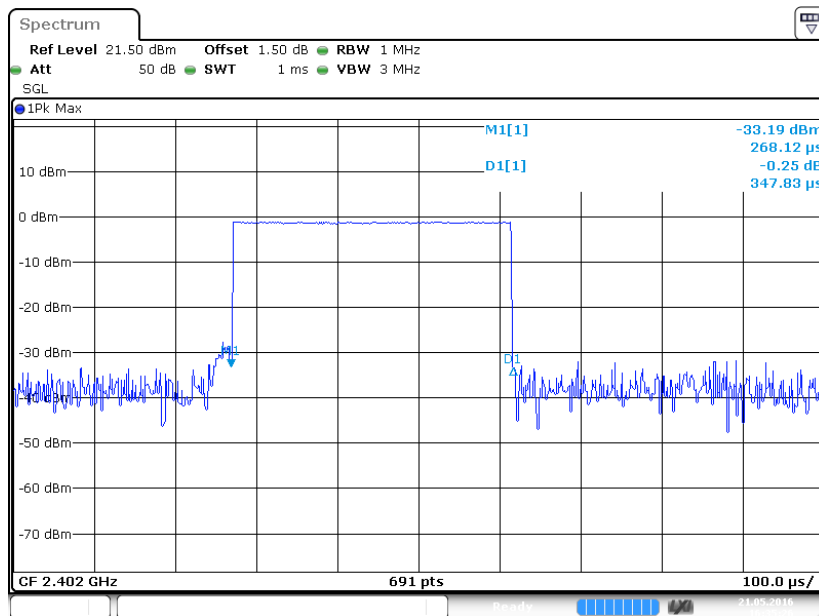


Date: 21 MAY 2016 16:35:26

Pulse time, Middle Channel, 2-DH1

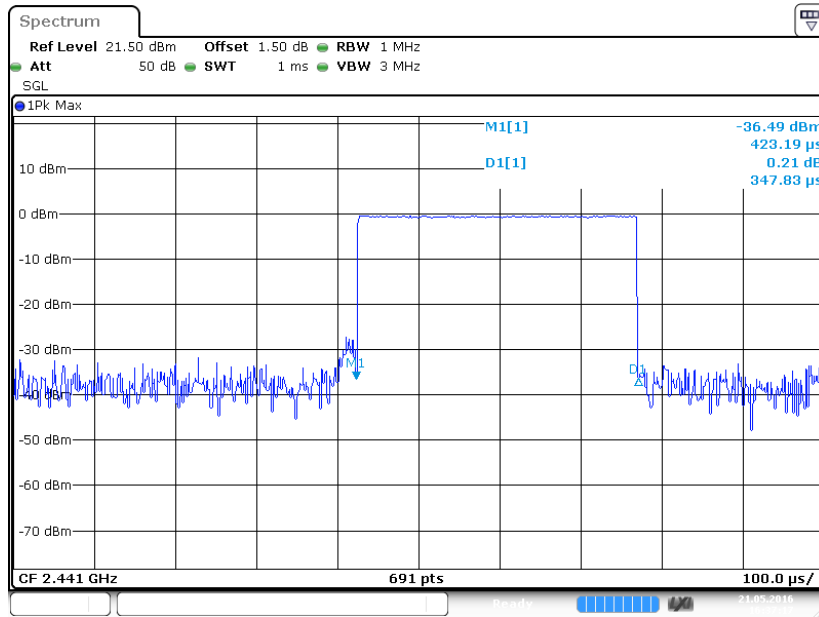


Date: 21 MAY 2016 16:37:18

Pulse time, High Channel, 2-DH1

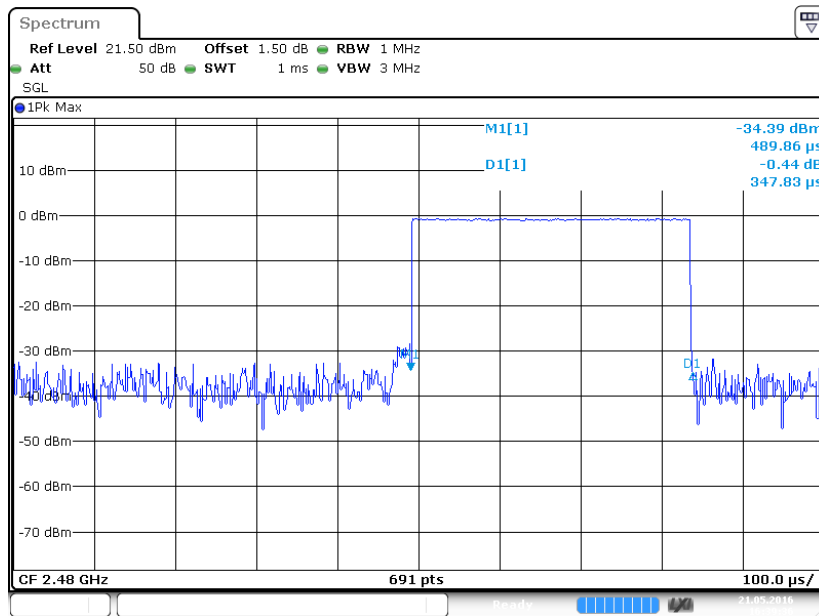


Date: 21 MAY 2016 16:39:36

Pulse time, Low Channel, 2-DH3

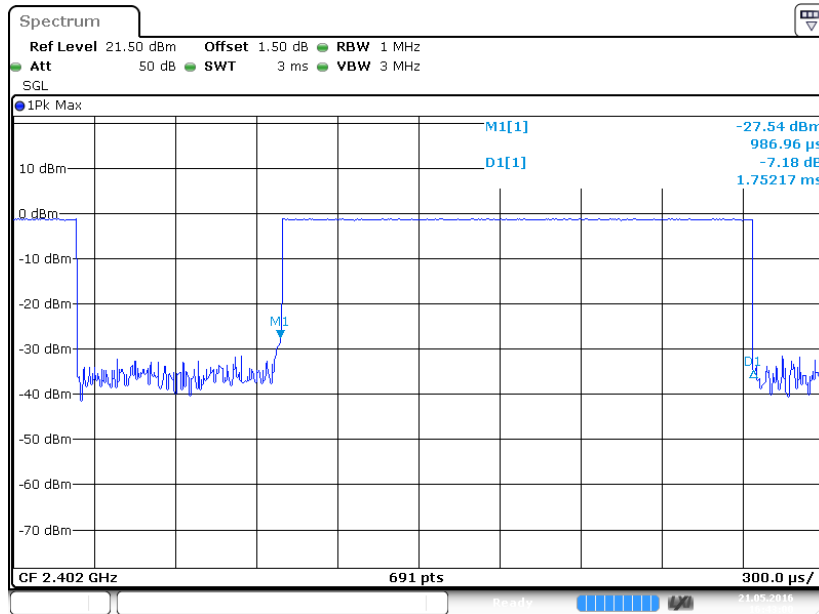


Date: 21 MAY 2016 16:43:00

Pulse time, Middle Channel, 2-DH3

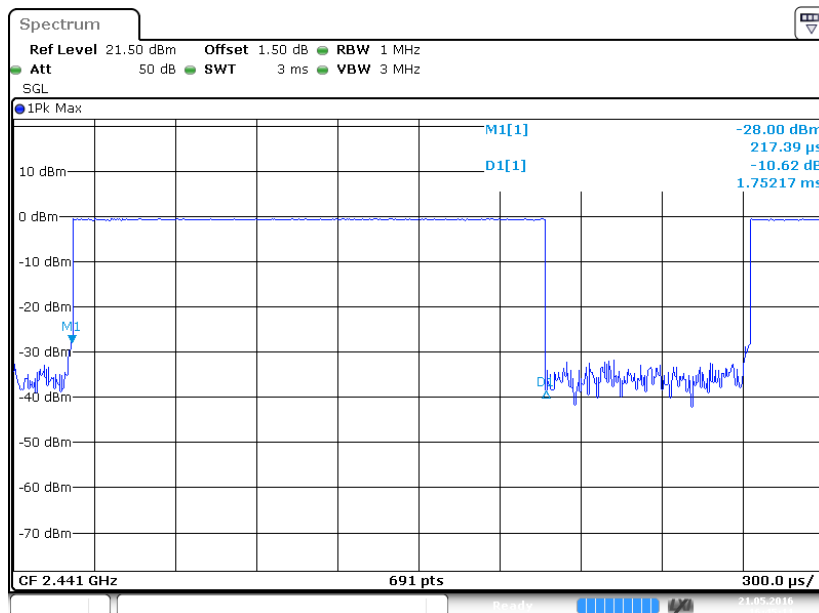


Date: 21 MAY 2016 16:45:11

Pulse time, High Channel, 2-DH3

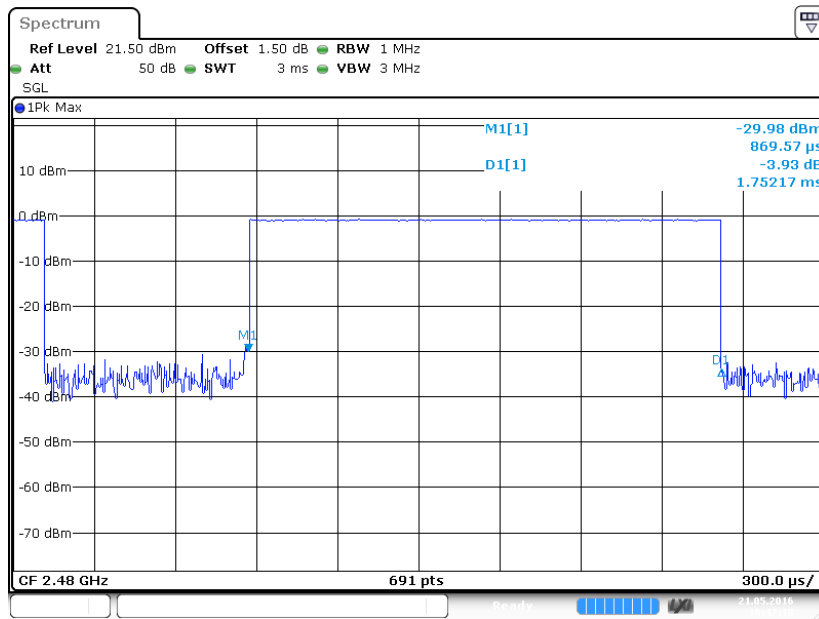


Date: 21 MAY 2016 16:47:18

Pulse time, Low Channel, 2-DH5

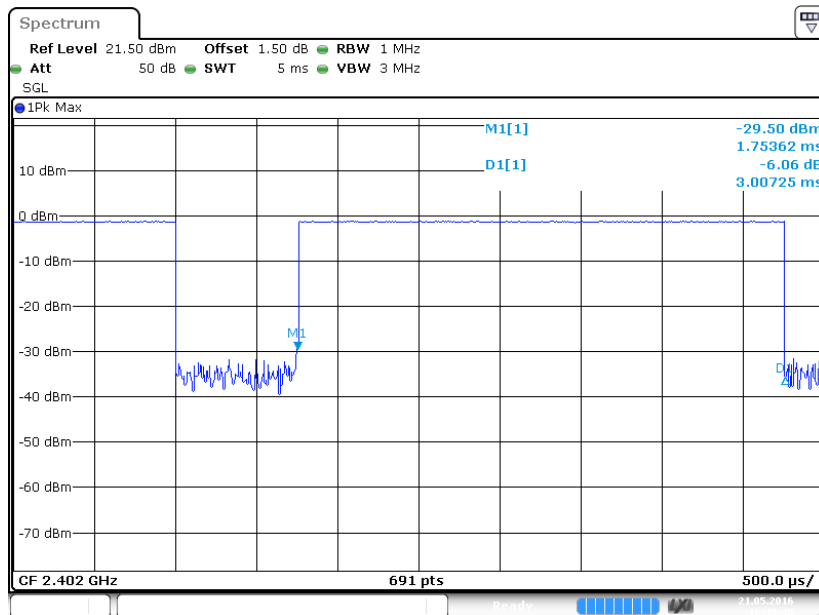


Date: 21 MAY 2016 16:49:46

Pulse time, Middle Channel, 2-DH5

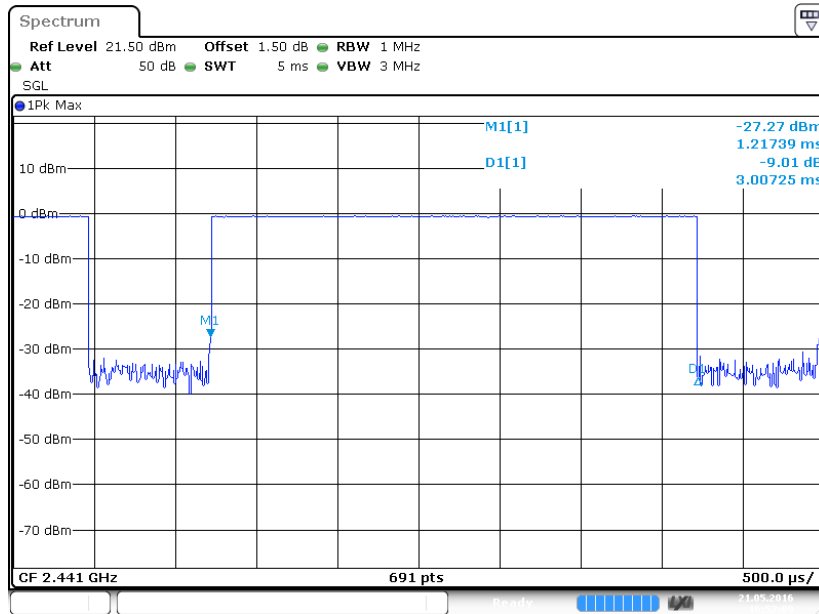


Date: 21 MAY 2016 16:52:09

Pulse time, High Channel, 2-DH5

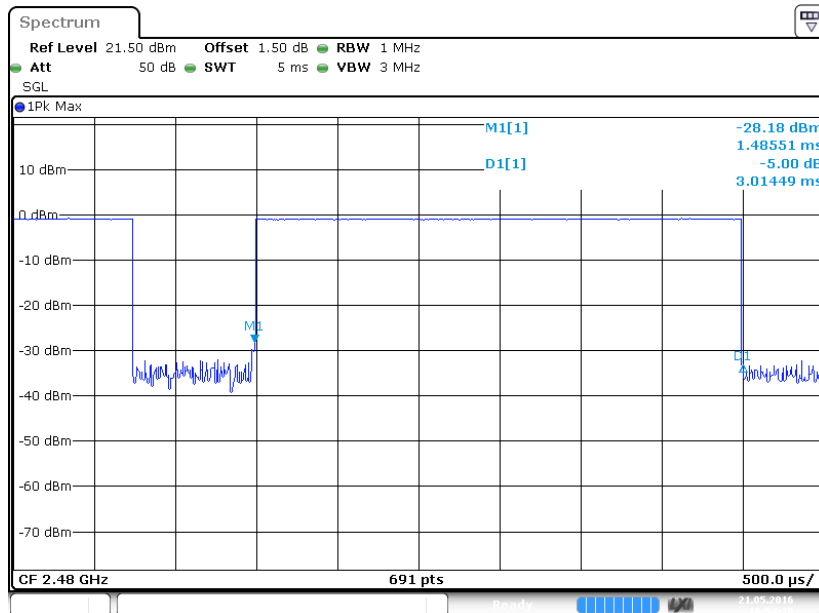


Date: 21 MAY 2016 16:54:26


**EDR (8DPSK):
Pulse time, Low Channel, 3-DH1**

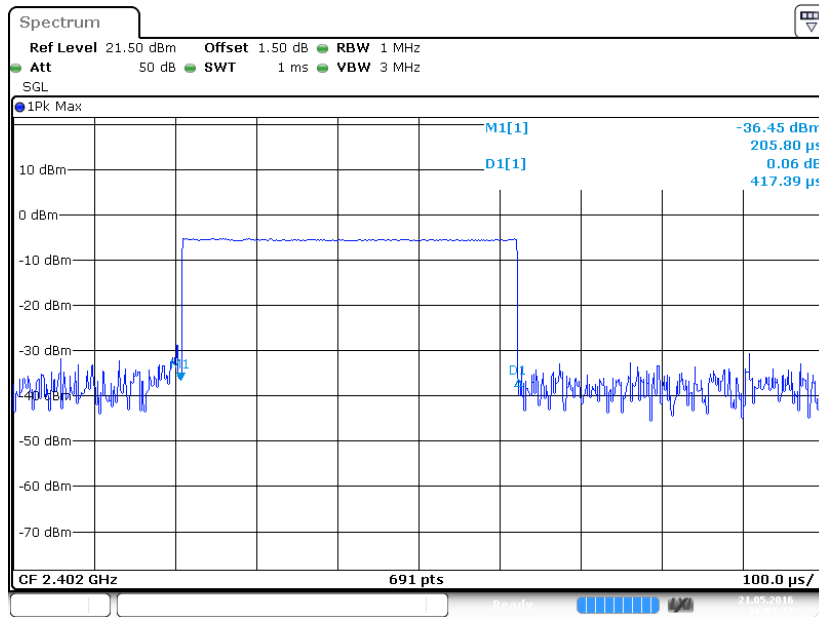

Pulse time, Middle Channel, 3-DH1

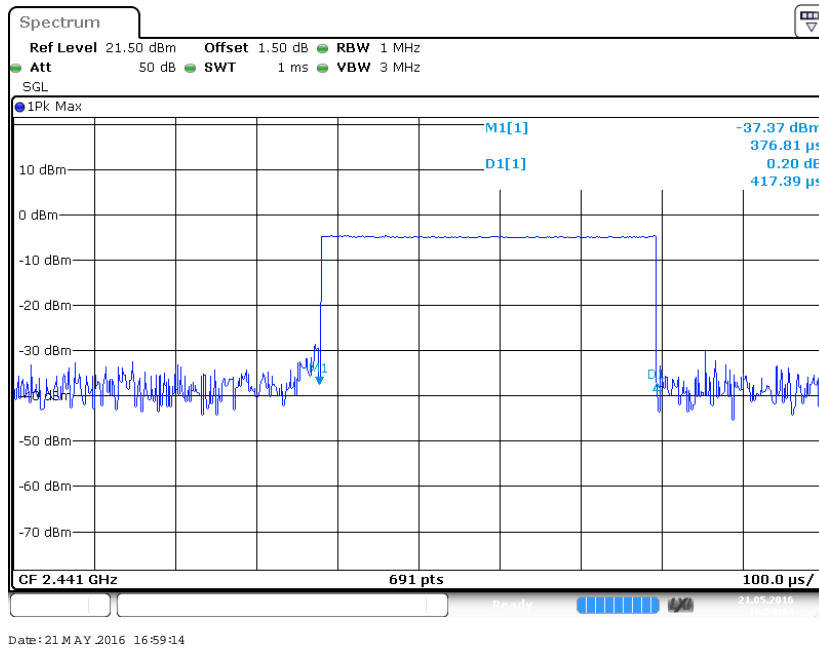


Pulse time, High Channel, 3-DH1

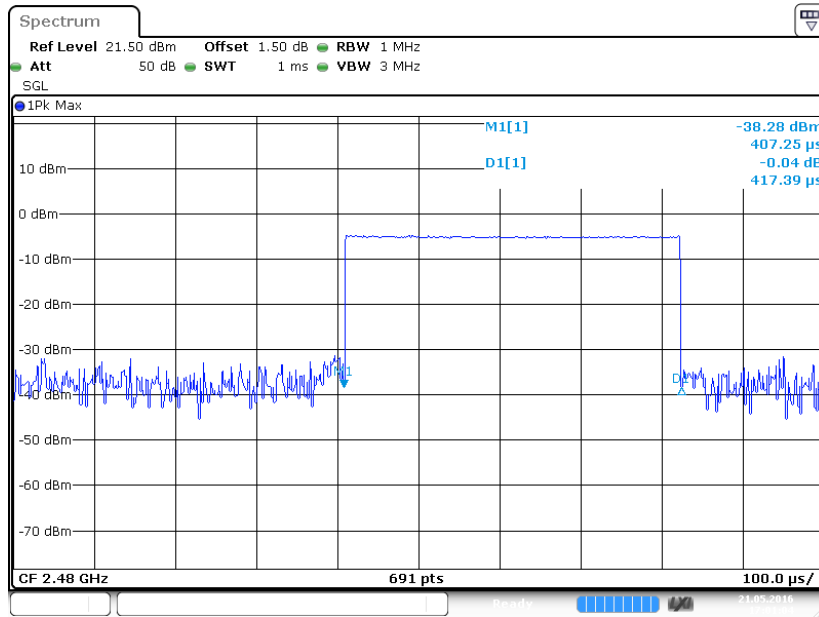


Date: 21 MAY 2016 17:01:05

Pulse time, Low Channel, 3-DH3

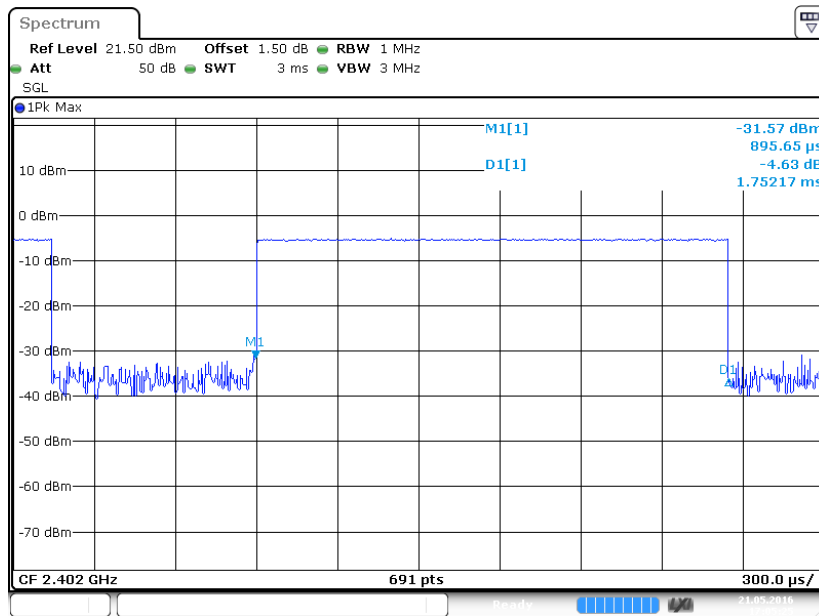


Date: 21 MAY 2016 17:05:25


Pulse time, Middle Channel, 3-DH3

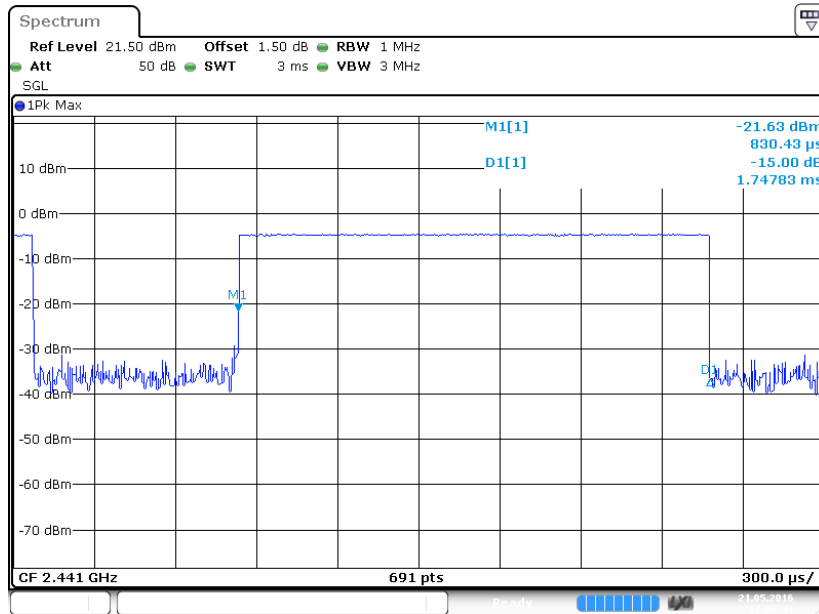

Pulse time, High Channel, 3-DH3

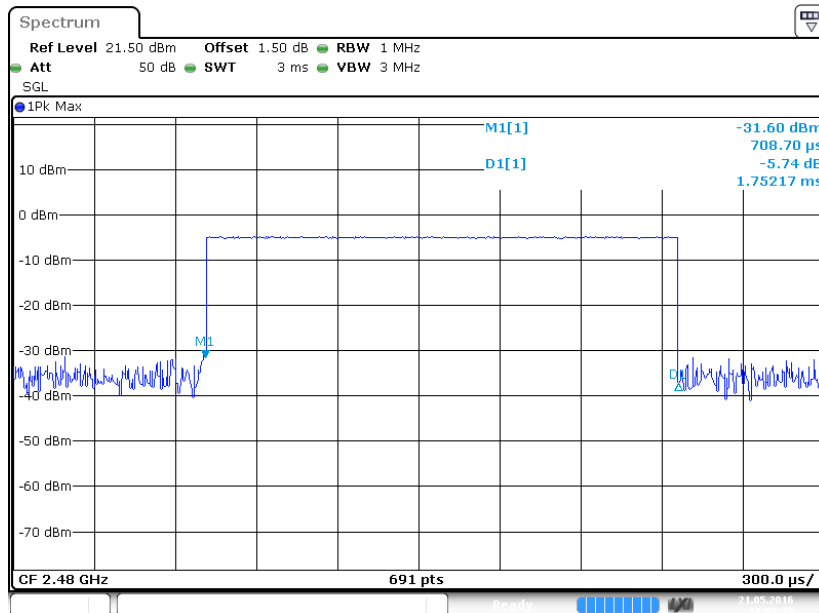


Pulse time, Low Channel, 3-DH5

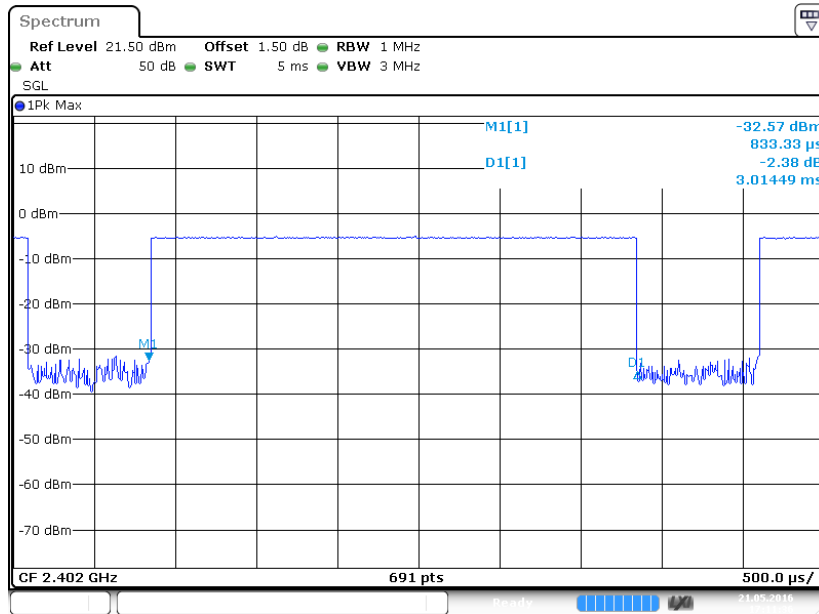


Date: 21 MAY 2016 17:11:36

Pulse time, Middle Channel, 3-DH5

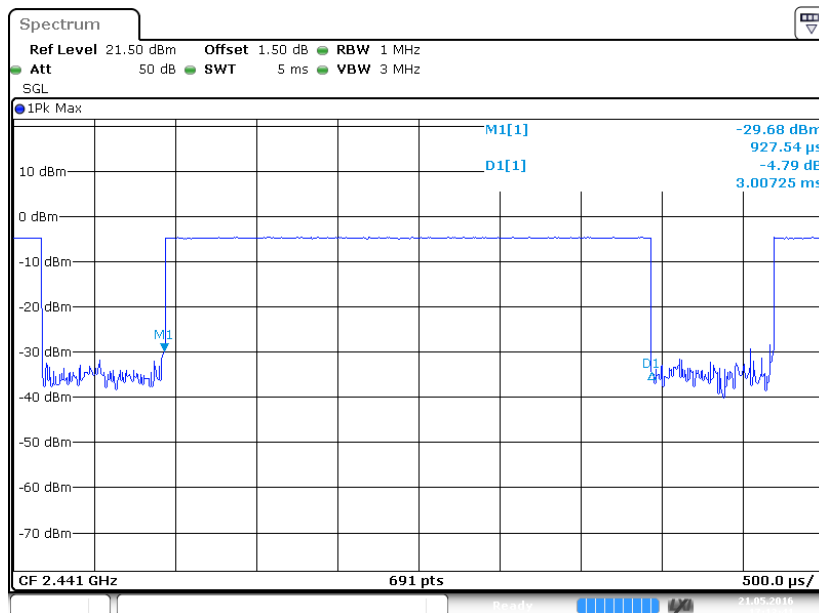

Date: 21 MAY 2016 17:13:41

Pulse time, High Channel, 3-DH5

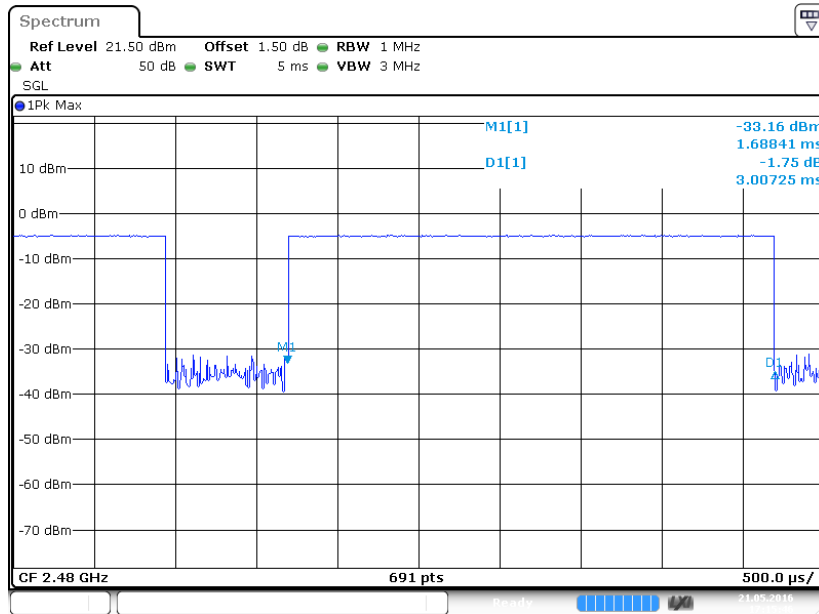

Date: 21 MAY 2016 17:15:47

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa


The testing was performed by Matt Yao on 2016-05-21.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	-0.41	0.910	1000
	Middle	2441	-0.39	0.914	1000
	High	2480	-0.43	0.906	1000
EDR ($\pi/4$ -DQPSK)	Low	2402	-1.28	0.745	1000
	Middle	2441	-1.26	0.748	1000
	High	2480	-1.39	0.726	1000
EDR (8DPSK)	Low	2402	-0.77	0.838	1000
	Middle	2441	-0.60	0.871	1000
	High	2480	-0.75	0.841	1000


BDR (GFSK): Low Channel

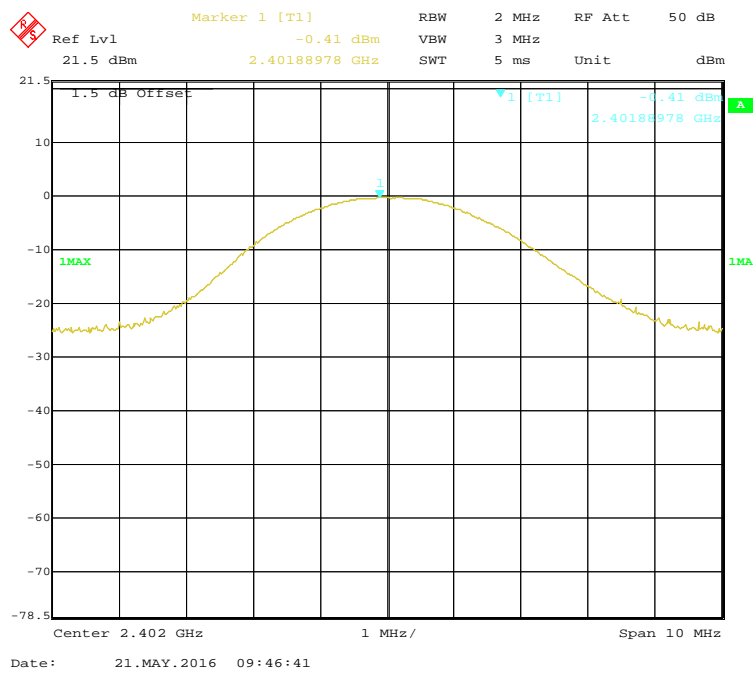


BDR (GFSK): Middle Channel

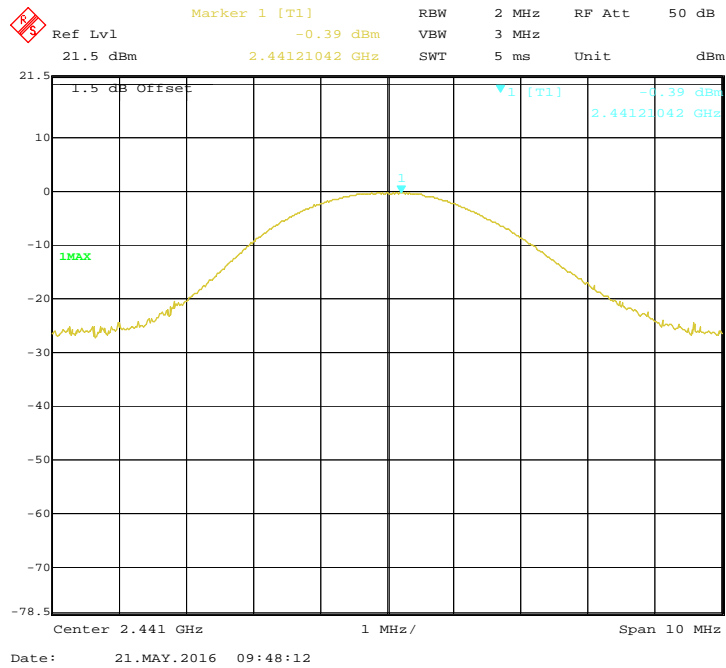


BDR (GFSK): High Channel

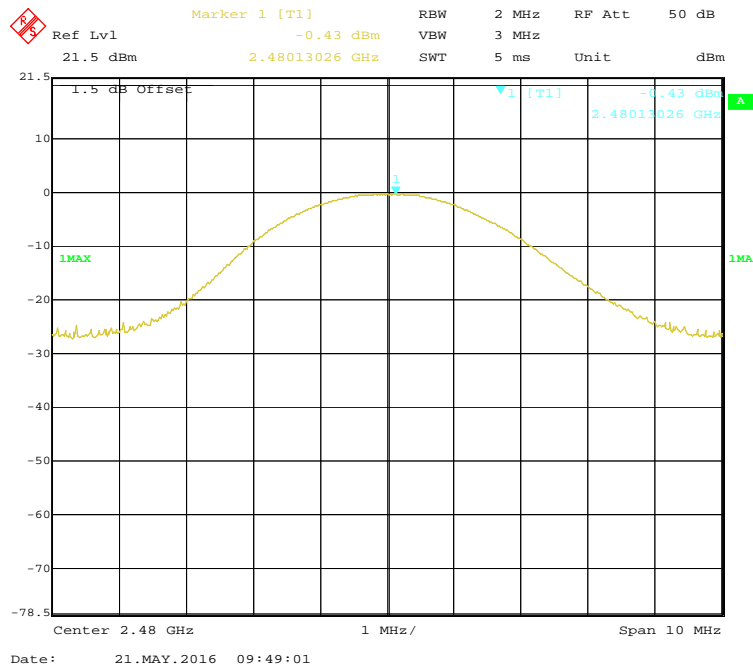


EDR($\pi/4$ -DQPSK): Low Channel

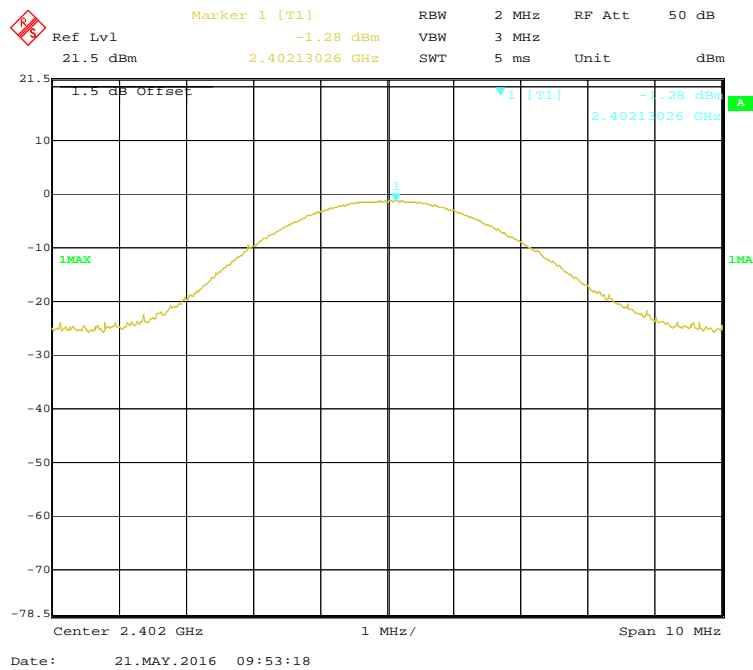


EDR($\pi/4$ -DQPSK): Middle Channel

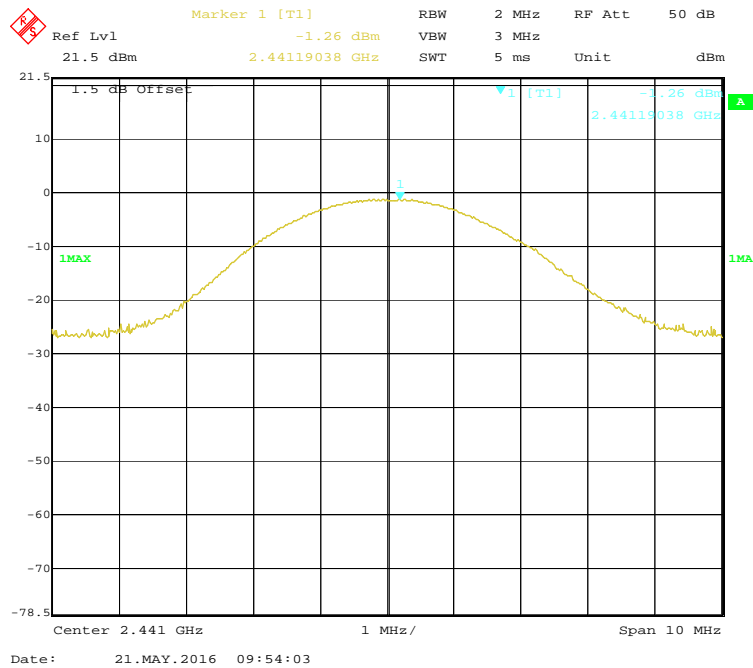

EDR(8DPSK): Middle Channel

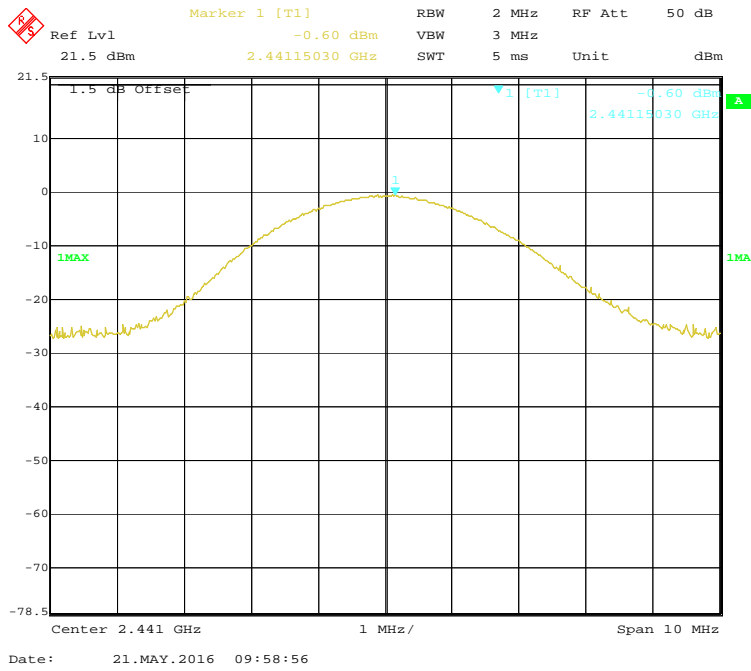

EDR(8DPSK): High Channel

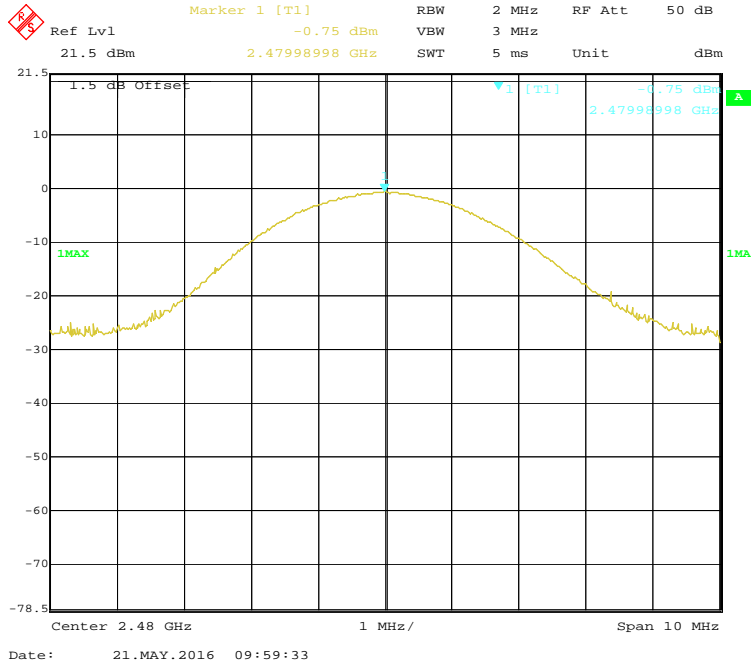

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	SIGNAL ANALYZER	FSV40	101116	2015-09-02	2016-09-02
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-12-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-05-21.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following plots.

BDR (GFSK): Band Edge-Left Side

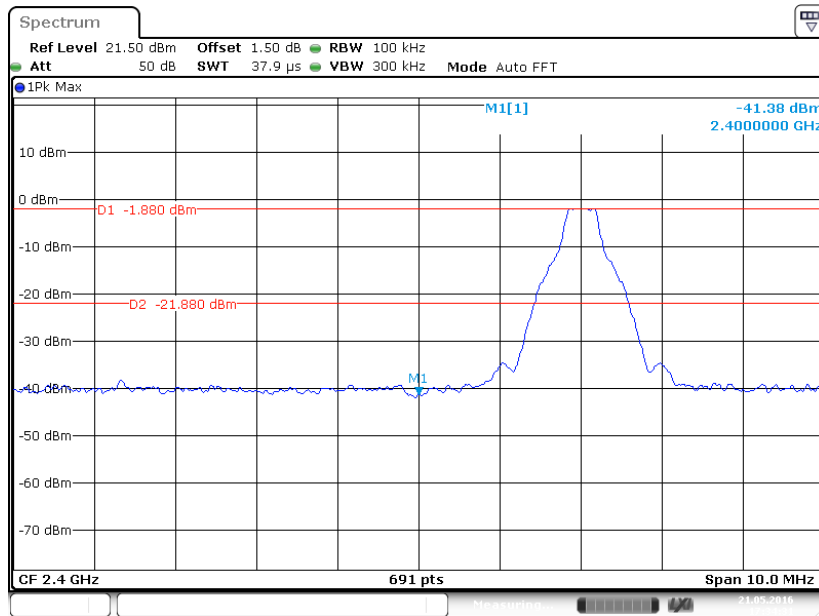


Date: 21 MAY 2016 17:34:31

BDR (GFSK): Band Edge-Right Side

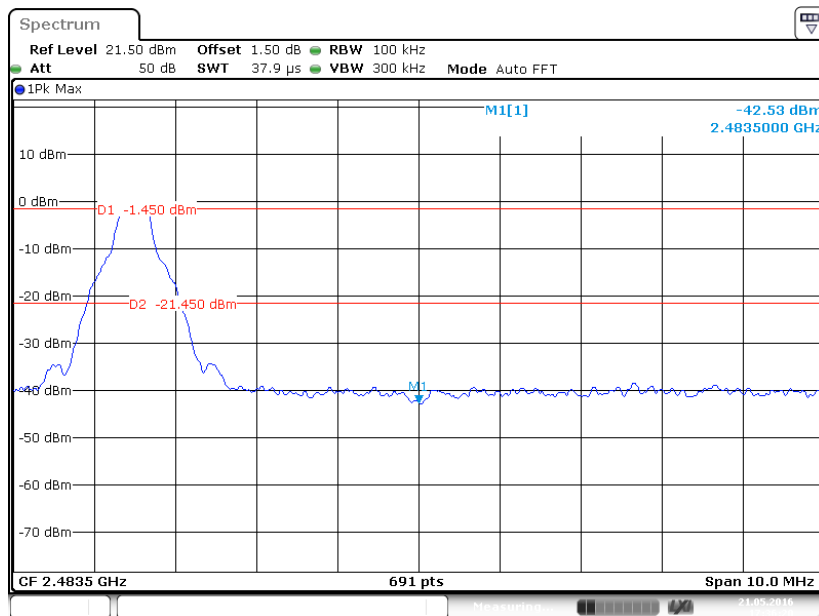


Date: 21 MAY 2016 17:36:20


EDR ($\pi/4$ -DQPSK): Band Edge-Left Side

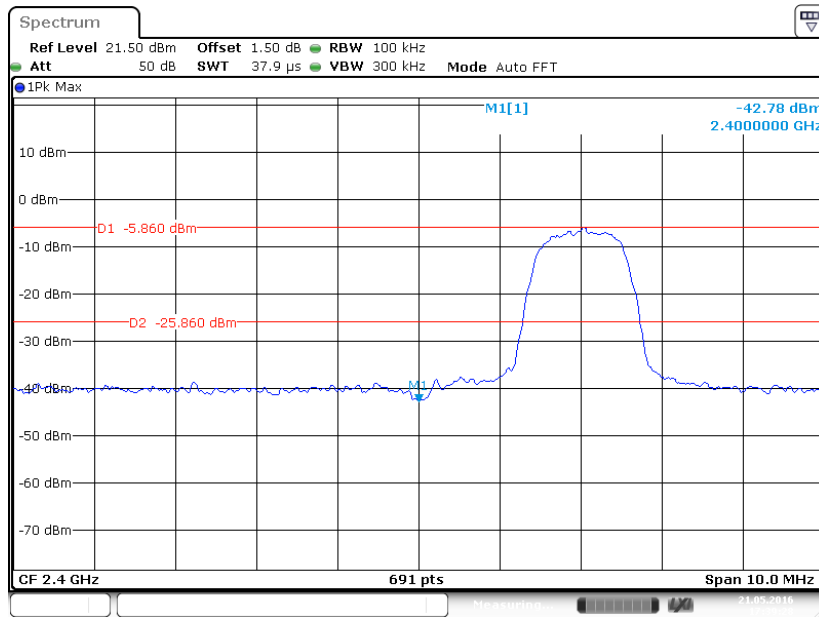


EDR ($\pi/4$ -DQPSK): Band Edge-Right Side

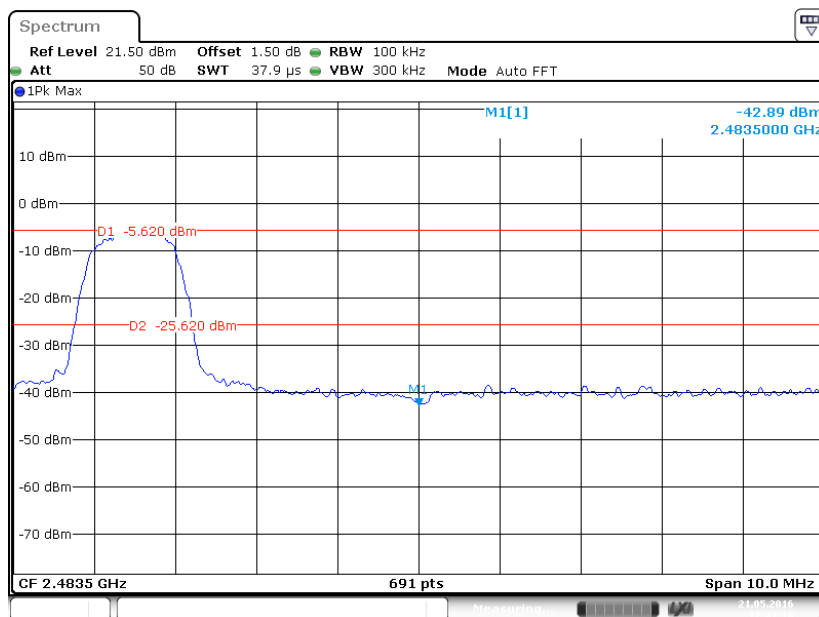

EDR (8DPSK): Band Edge-Left Side

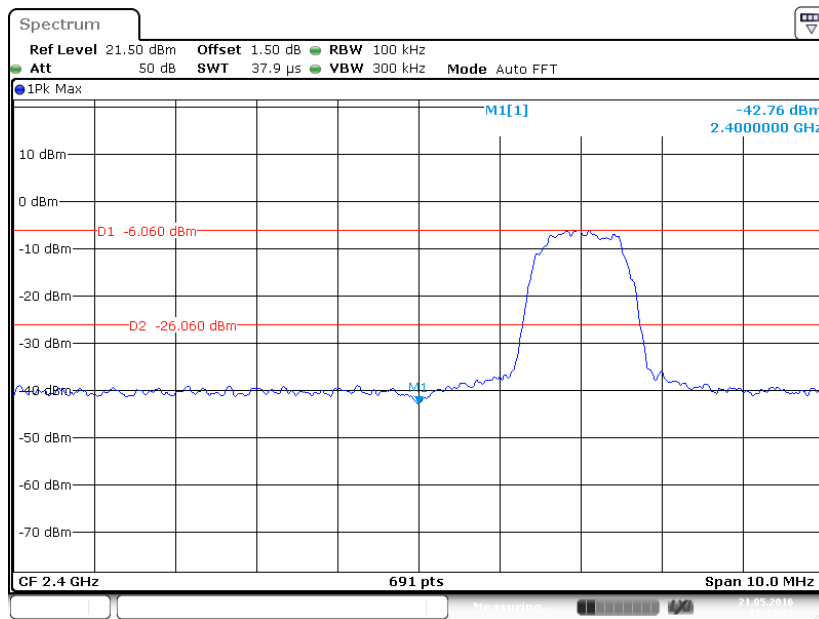

BDR (8DPSK): Band Edge-Right Side

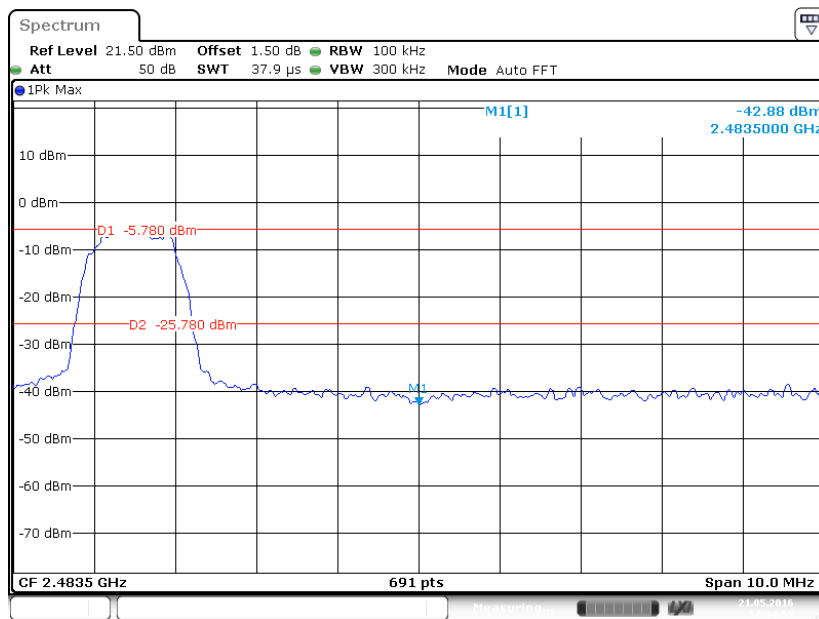

***** END OF REPORT *****