



FCC TEST REPORT

REPORT NO.: GUD-14MY0005VNTY

MODEL NO.: 303RTX-1, 303RTX-2, 303RTX-3

RECEIVED: May. 5, 2014

ISSUED: May. 9, 2014

APPLICANT: Guardian Shanghai Corp.

ADDRESS: 368, Min Shen Rd, SongJiang, Shanghai, China

ISSUED BY: BUREAU VERITAS ADT (Shanghai) Corporation

ADDRESS: 2F, Building C, No.1618, Yishan rd., 201103,
Shanghai, China

This test report consists of 49 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards. This report contains data that were produced under Laboratory ADT (Shanghai) Corporation.





Table of Contents

1	CERTIFICATION	3
2	SUMMARY OF TEST RESULTS	4
2.1	MEASUREMENT UNCERTAINTY	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	6
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	8
3.4	DESCRIPTION OF SUPPORT UNITS	8
4	EMISSION TEST	9
4.1	CONDUCTED EMISSION MEASUREMENT	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2	TEST RESULTS	9
4.2	DEACTIVATION TIME	10
4.2.1	LIMITS OF DEACTIVATION TIME MEASUREMENT	10
4.2.2	TEST INSTRUMENTS	10
4.2.3	TEST PROCEDURES	10
4.2.4	DEVIATION FROM TEST STANDARD	10
4.2.5	TEST SETUP	10
4.2.6	TEST RESULTS	11
4.3	RADIATED EMISSION MEASUREMENT	14
4.3.1	LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.3.2	TEST INSTRUMENTS	16
4.3.3	TEST PROCEDURE	17
4.3.4	DEVIATION FROM TEST STANDARD	17
4.3.5	TEST SETUP	18
4.3.6	EUT OPERATING CONDITIONS	18
4.3.7	TEST RESULTS	19
4.4	20DB OCCUPIED BANDWIDTH MEASUREMENT	34
4.4.1	LIMITS OF BAND EDGES MEASUREMENT	34
4.4.2	TEST INSTRUMENTS	34
4.4.3	TEST PROCEDURES	35
4.4.4	DEVIATION FROM TEST STANDARD	35
4.4.5	TEST SETUP	35
4.4.6	TEST RESULTS	36
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	39
6	PHOTOGRAPHS OF THE EUT	40
7	APPENDIX - INFORMATION ON THE TESTING LABORATORY	49



1 CERTIFICATION

PRODUCT: Remote for Garage Door Opener
MODEL NO.: 303RTX-1, 303RTX-2, 303RTX-3
APPLICANT: Guardian Shanghai Corp.
TESTED: May. 5, 2014~ May. 9, 2014
TEST ITEM: ENGINEERING SAMPLE
STANDARDS: FCC Part 15: 2013,
 Subpart C (Section 15.209 and 15.231),
 ANSI C63.4-2003

We, BUREAU VERITAS ADT (Shanghai) Corporation, declare that the equipment above has been tested in our facility and found compliance with the requirement limits of applicable standards. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate under the standards herein specified.

Alex Du

PREPARED BY : _____, **DATE:** May. 19, 2014
 Alex DU
 Testing Engineer

Joy zhu

TECHNICAL ACCEPTANCE : _____, **DATE:** May. 19, 2014
 Joy Zhu
 Testing Manager

Yzhu

APPROVED BY : _____, **DATE:** May. 19, 2014
 Zhaoqian YU
 Lab Manager



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For model 303RTX-1

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Paragraph	Test Type	Result	Remarks
15.207	Conducted Emission Test	N/A	Please refer to 4.1.2.
15.231(a)	De-activation Time	PASS	Meet the requirement of limit
15.209 15.231(b)	Radiated Emission Test	PASS	Minimum passing margin is -16.21dB at 2727MHz
15.231(c)	20dB Occupied Bandwidth Measurement	PASS	Meet the requirement of limit

For model 303RTX-2

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Paragraph	Test Type	Result	Remarks
15.207	Conducted Emission Test	N/A	Please refer to 4.1.2.
15.231(a)	De-activation Time	PASS	Meet the requirement of limit
15.209 15.231(b)	Radiated Emission Test	PASS	Minimum passing margin is -16.91 dB at 776.9 MHz
15.231(c)	20dB Occupied Bandwidth Measurement	PASS	Meet the requirement of limit

For model 303RTX-3

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Paragraph	Test Type	Result	Remarks
15.207	Conducted Emission Test	N/A	Please refer to 4.1.2.
15.231(a)	De-activation Time	PASS	Meet the requirement of limit
15.209 15.231(b)	Radiated Emission Test	PASS	Minimum passing margin is -16.5 dB at 864.2 MHz
15.231(c)	20dB Occupied Bandwidth Measurement	PASS	Meet the requirement of limit



2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement		Value
Conducted emissions		2.55 dB
Conducted emissions at telecom port		2.60 dB
Radiated emissions	30 MHz ~ 1GHz	3.22 dB
	Above 1GHz	2.89 dB



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Remote for Garage Door Opener
MODEL NO.	303RTX-1, 303RTX-2, 303RTX-3
POWER SUPPLY	12Vdc by battery
MODULATION TYPE	ASK
CARRIER FREQUENCY OF EACH CHANNEL	303MHz
NUMBER OF CHANNEL	1
ANTENNA TYPE	Soldered on PCB
DATA CABLE SUPPLIED	N/A
I/O PORTS	N/A

Special comments:

The 1 to 3-button configurations of RTX are based on the same schematic and identical printed circuit board, the only difference is supplementary components to fulfill 2 and 3 buttons compared to single button configuration.

Functional wise a single button (RTX-1) could access one garage door opener, with 2 and 3 buttons user can access multiple garage door openers for convenience.

NOTE: The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Test Mode	Description
1	Make sure EUT work in the operation mode.

One channel is provided to this EUT:

Channel	Frequency
1	303MHz



TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	De-a T	RE	20dB OBM	
A	-	√	√	√	Continuously transmitting

Where PLC: Power Line Conducted Emission
RE: Radiated Emission

De-a T: De-activation Time
20dB OBM: 20dB Occupied Bandwidth Measurement

Radiated Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, and X.Y.Z. axis.
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Axis
1	1	ASK	X



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a remote switching. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:


FCC Part 15, Subpart C. (15.231)

ANSI C63.4- 2003

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

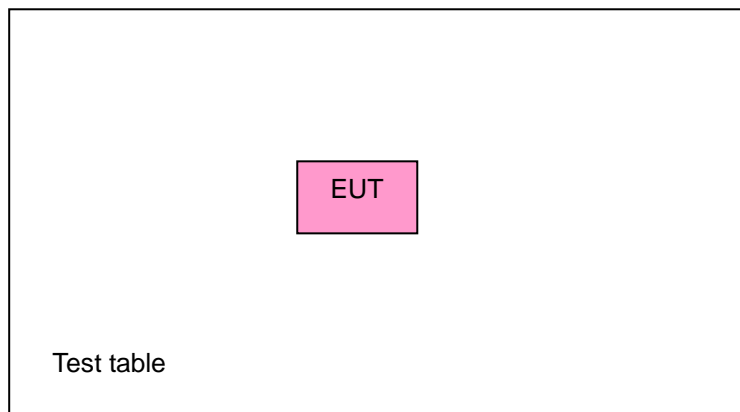

Note: When doing the test, fresh batteries were used.



4 EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- NOTES:** 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST RESULTS

Since the EUT is powered by battery, the report doesn't require for conduct emission test.



4.2 DEACTIVATION TIME

4.2.1 LIMITS OF DEACTIVATION TIME MEASUREMENT

TEST STANDARD:

FCC Part 15: 2011, Subpart C (Section: 15.231(a))

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

4.2.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
Spectrum Analyzer ROHDE & SCHWARZ	FSP	E1S1002	Aug. 15, 2014
BILOG Antenna SCHWARZBECK	VULB9168	E1A1001	Apr. 15, 2015

NOTE: The calibration interval of the above test instruments is 12 months.


4.2.3 TEST PROCEDURES

- 1 The EUT was placed on the turning table.
- 2 The signal was coupled to the spectrum analyzer through an antenna.
- 3 The transmission duration was measured and recorded.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

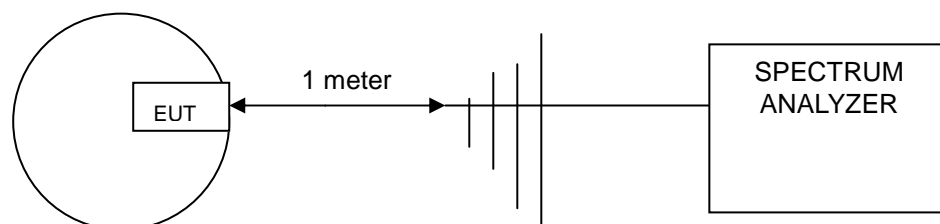




4.2.6 TEST RESULTS

For model 303RTX-1

Frequency (MHz)	Transmission duration (sec)	Maximum limit (sec)	Pass / Fail
303	0.280	5	Pass



RBW 100 kHz Marker 1 [T1]
 *VBW 300 kHz -63.80 dBm
 Ref -30 dBm Att 10 dB SWT 10 s 3.380000 s

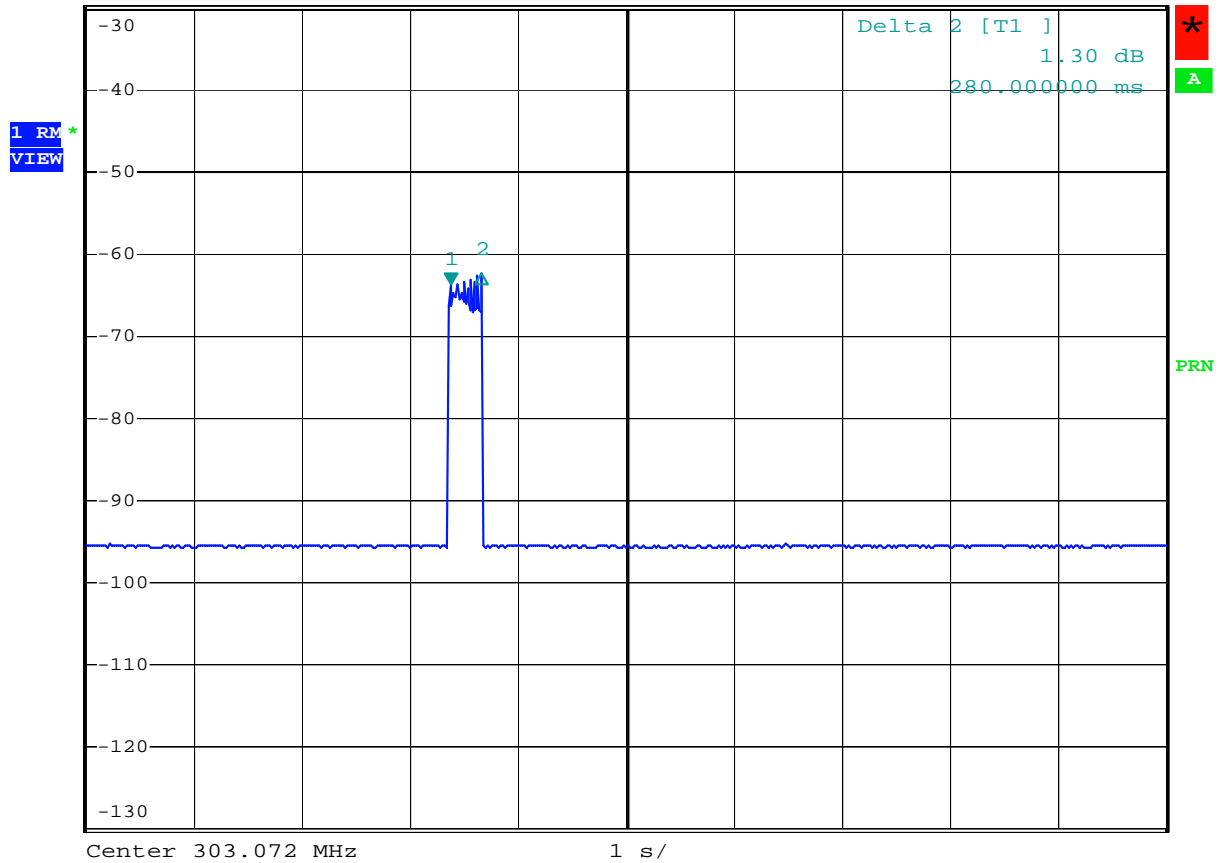


Date: 1.JAN.2000 01:00:38



For model 303RTX-2

Frequency (MHz)	Transmission duration (sec)	Maximum limit (sec)	Pass / Fail
303	0.500	5	Pass

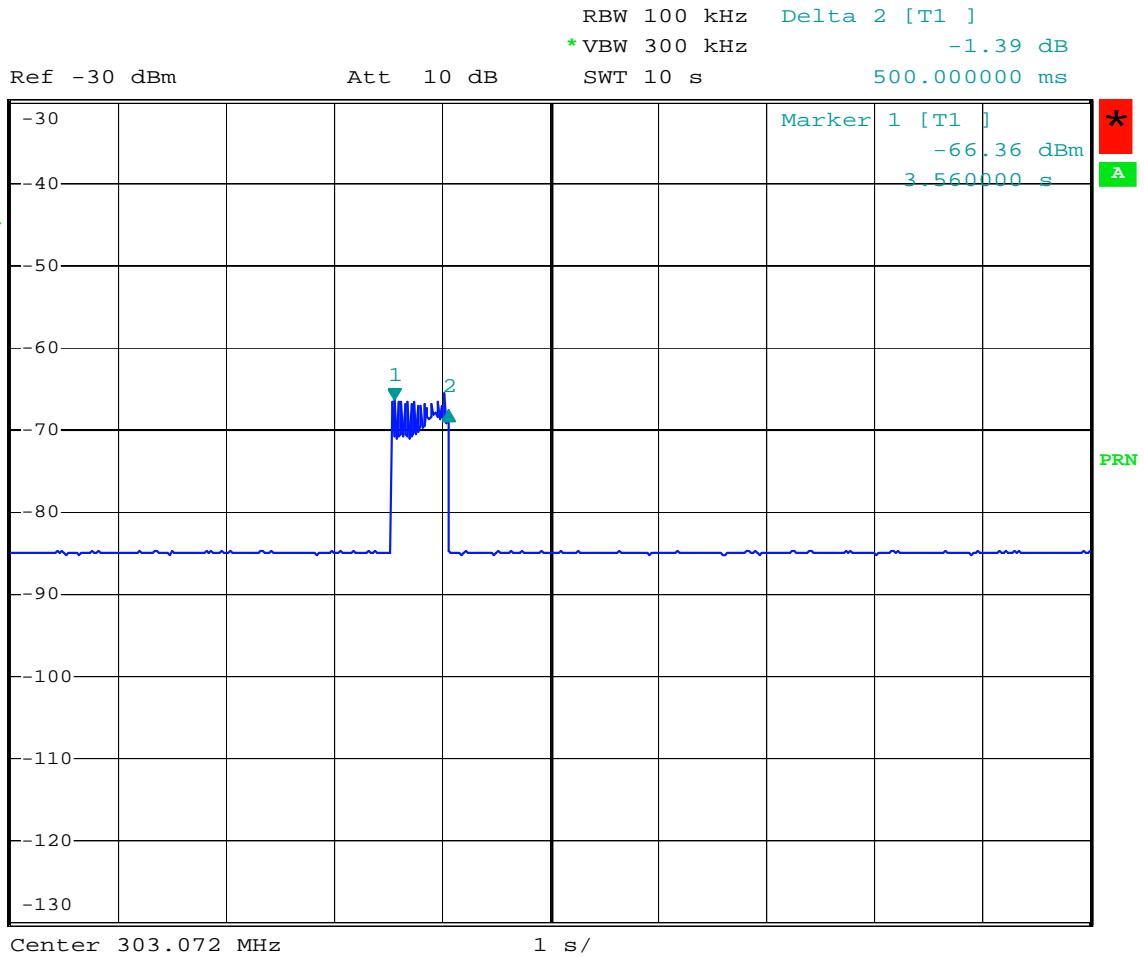

Date: 1.JAN.2000 00:58:51




For model 303RTX-3

Frequency (MHz)	Transmission duration (sec)	Maximum limit (sec)	Pass / Fail
303	0.255	5	Pass



RBW 100 kHz Delta 2 [T1]
 *VBW 300 kHz 0.81 dB
 Ref -30 dBm Att 10 dB SWT 10 s 255.000000 ms

1 RM*
 VIEW

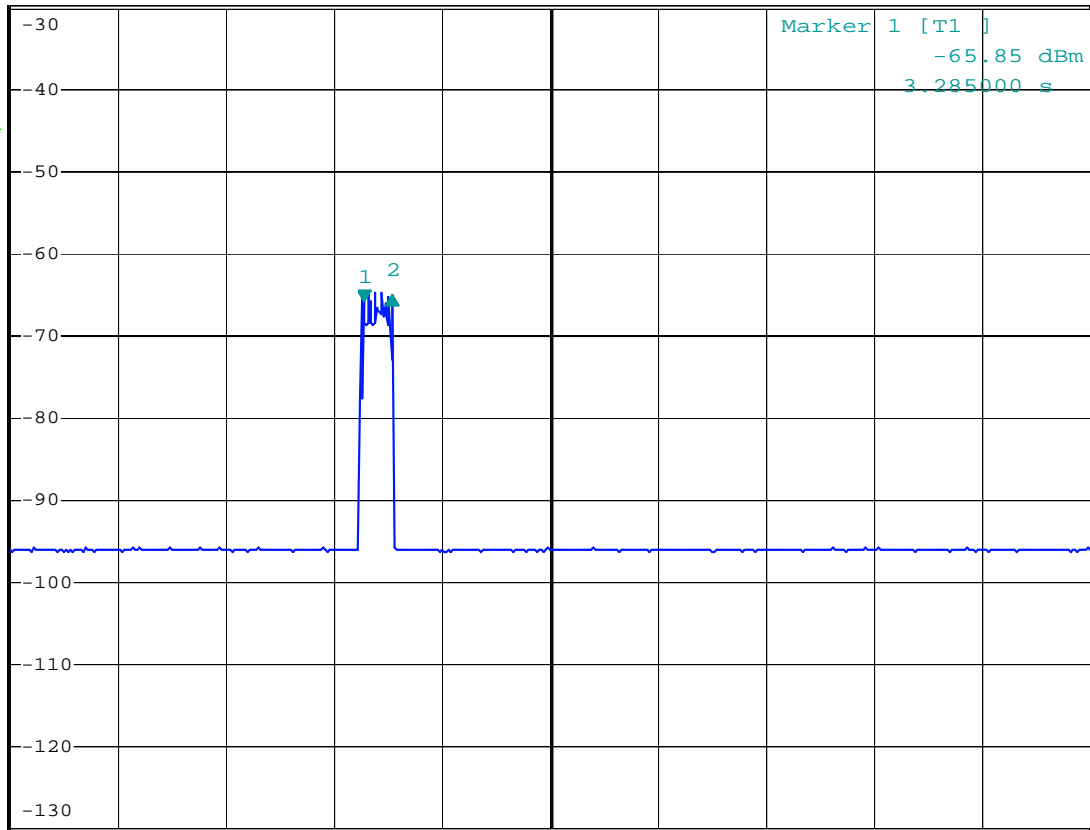

Center 303.042 MHz 1 s/

Date: 1.JAN.2000 07:53:22



4.3 RADIATED EMISSION MEASUREMENT

4.3.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD:

FCC Part 15: 2013, Subpart C (Section: 15.205)

FCC Part 15: 2013, Subpart C (Section: 15.209)

FCC Part 15: 2013, Subpart C (Section: 15.231(b))

According to 15.231 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental		Field Strength of Spurious	
	uV/meter	dBuV/meter	uV/meter	dBuV/meter
40.66 – 40.70	2250	67.04	225	48.04
70 – 130	1250	61.94	125	41.94
130 – 174	1250 to 3750	61.94 to 71.48	125 to 375	41.94 to 51.48
174 – 260	3750	71.48	75	37.50
260 – 470	3750 to 12500	71.48 to 81.94	375 to 1250	51.48 to 61.94
Above 470	12500	81.94	1250	61.94

NOTE:

- (1) Where F is the frequency in MHz, the formula for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = $56.81818(F) - 6136.3636$; for the band 260-470 MHz, uV/m at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.
- (2) The above field strength limits are specified at a distance of 3meters. The tighter limits apply at the band edges.



Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

FREQUENCY RANGE OF RADIATED MEASUREMENT

(For intentional radiators)

If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.



4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	E1R1001	Apr. 15, 2015
BILOG Antenna SCHWARZBECK	VULB9168	E1A1001	Apr. 27, 2015
Preamplifier Agilent	8447D	E1A2001	Apr. 15, 2015
Preamplifier Agilent	8449B	E1A2002	Apr. 15, 2015
Double Ridged Broadband Horn Antenna Schwarzbeck	BBHA 9120D	E1A1002	Sep. 08, 2014
*Spectrum Analyzer Agilent	E4403B	E1S1001	Aug. 14, 2014
*Spectrum Analyzer ROHDE & SCHWARZ	FSP	E1S1002	Aug. 15, 2014
Software ADT	ADT_Radiated_V7.5	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months.
 2. "*" = These equipment are used for the final measurement.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The Spectrum Analyzer (model: FSP) is used only for the measurement of emission frequency above 1GHz if tested.



4.3.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.


NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

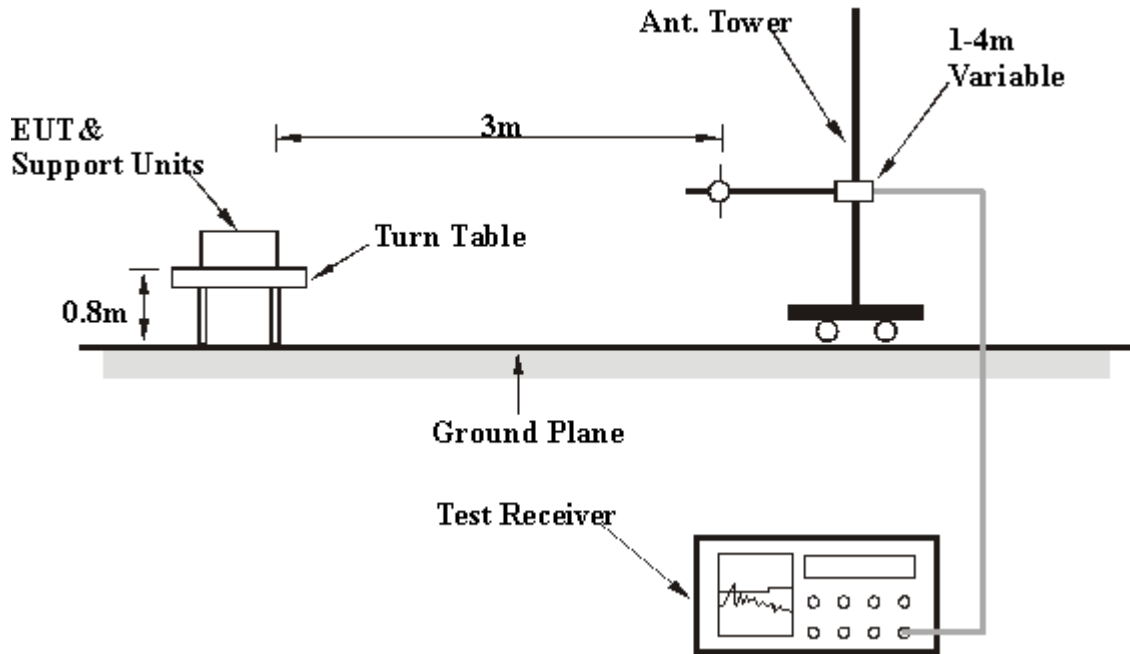

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.



4.3.7 TEST RESULTS

For model 303RTX-1
 Below 1GHz Worst-Case Data

EUT	Remote for Garage Door Opener	MODEL NO.	303RTX-1
CHANNEL	Channel 1	FREQUENCY RANGE	30 ~ 1000 MHz
MODULATION TYPE	ASK	INPUT POWER (SYSTEM)	12Vdc by battery
ENVIRONMENTAL CONDITIONS	23 deg. C, 50% RH, 1000 hPa	DETECTOR FUNCTION	Quasi-Peak/Peak/Average
TESTED BY	Bing YE		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Factor (dB/M)	Reading (dBuV/M)	Emission (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Ant. Height (cm)	Table Angle (Deg.)
1*	304.02PK	14.63	50.35	64.98	94.9	-29.92	--	--
1*	304.02AV	14.63	30.22	57.20	74.9	-17.7	--	--
2	379.20QP	16.7	2.24	18.94	46	-27.06	200	56
3	481.05QP	19.15	1.92	21.07	46	-24.93	200	143
4	573.20QP	21.62	2.43	24.05	46	-21.95	200	199
5	607.15PK	22.64	11.31	33.94	74.9	-40.96	--	--
5	607.15AV	22.64	5.72	26.16	54.9	-28.74	--	--
6	675.05QP	23.57	1.12	24.69	46	-21.31	200	187
7	776.90QP	25.71	1.18	26.89	46	-19.11	200	120
8	859.35QP	26.47	2.12	28.59	46	-17.41	200	248
9	903.00PK	26.40	13.30	39.70	74.9	-35.20	--	--
9	903.00AV	26.40	-2.11	31.92	54.9	-22.98	--	--



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Factor (dB/M)	Reading (dBuV/M)	Emission (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Ant. Height (cm)	Table Angle (Deg.)
1	163.37QP	14.24	2.2	16.44	43.5	-27.06	100	194
2*	304.02PK	14.63	37.53	52.16	94.9	-42.74	--	--
2*	304.02AV	14.63	16.24	44.38	74.9	-30.52	--	--
3	420.43QP	17.76	2.7	20.46	46	-25.54	100	298
4	522.27QP	19.96	2.13	22.09	46	-23.91	100	220
5	607.15PK	22.64	8.1	30.74	74.9	-44.16	--	--
5	607.15AV	22.64	-2.64	22.96	54.9	-31.94	--	--
6	636.25QP	23.04	1.91	24.95	46	-21.05	100	108
7	738.1QP	24.93	2.2	27.13	46	-18.87	100	128
8	847.23QP	26.36	2.68	29.04	46	-16.96	100	146
9	903.00PK	26.4	8.75	35.15	74.9	-39.75	--	--
9	903.00AV	26.40	-2.87	27.37	54.9	-27.53	--	--

- NOTE:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB) = Antenna Factor (dB) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "*" = Fundamental frequency
 6. The average value of fundamental frequency and spurious emission is: Average = Peak value + 20log(Duty cycle)
 Where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log \frac{(0.95 \times 35 + 0.4 \times 19)\text{ms}}{100\text{ms}} = -7.78\text{dB}$$

please see page 22,23 for plotted duty



Above 1GHz Worst-Case Data

EUT	Remote for Garage Door Opener	MODEL NO.	303RTX-1
CHANNEL	Channel 1	FREQUENCY RANGE	1 GHz~3.03 GHz
MODULATION TYPE	ASK	INPUT POWER (SYSTEM)	12Vdc by battery
ENVIRONMENTAL CONDITIONS	23 deg. C, 50% RH, 1000 hPa	DETECTOR FUNCTION	Peak/Average
TESTED BY	Bing YE		

Frequency(MHz)		PK Emission (dBuV/m)	PK limit (dBuV/m)	PK margin (dBuV/m)	AV EMISSION	AV LIMIT	AV MARGIN
1212.00	H	39.94	74	-34.06	32.16	54	-21.84
	V	40.14	74	-33.86	32.36	54	-21.64
1515.00	H	40.41	74	-33.59	32.63	54	-21.37
	V	40.65	74	-33.35	32.87	54	-21.13
1818.00	H	40.23	74	-33.77	32.45	54	-21.55
	V	40.22	74	-33.78	32.44	54	-21.56
2121.00	H	43.29	74	-30.71	35.51	54	-18.49
	V	43.69	74	-30.31	35.91	54	-18.09
2424.00	H	43.26	74	-30.74	35.48	54	-18.52
	V	43.08	74	-30.92	35.30	54	-18.70
2727.00	H	45.57	74	-28.43	37.79	54	-16.21
	V	44.56	74	-29.44	36.78	54	-17.22

- NOTE:** 1. Emission level (dBuV/m) =Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB) = Antenna Factor (dB) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*” = Fundamental frequency
 6. The average value of fundamental frequency and spurious emission is: Average = Peak value + 20log(Duty cycle)


Where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log \frac{(0.95*35+0.4*19)\text{ms}}{100\text{ms}} = -7.78\text{dB}$$

please see page 21,22for plotted duty




25ms-1

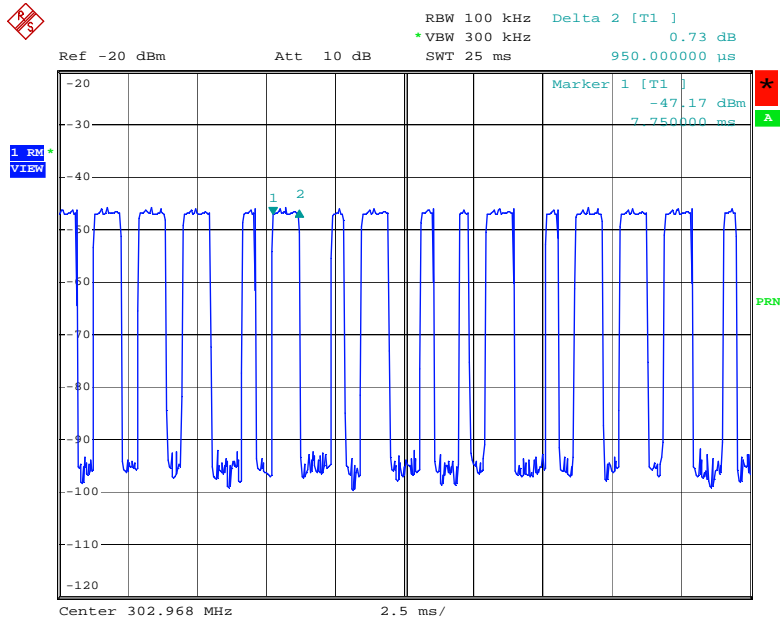

Date: 1.JAN.2000 01:25:39


25ms-2

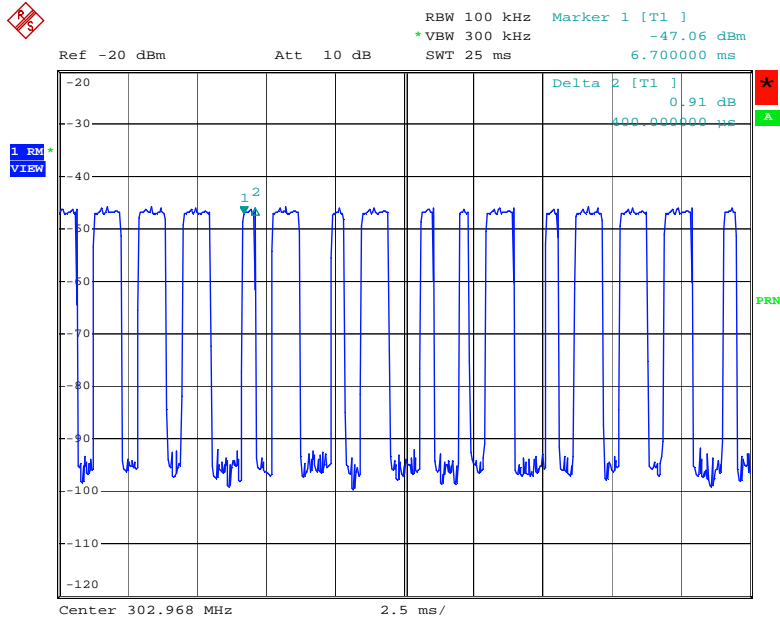

Date: 1.JAN.2000 01:26:27



100ms

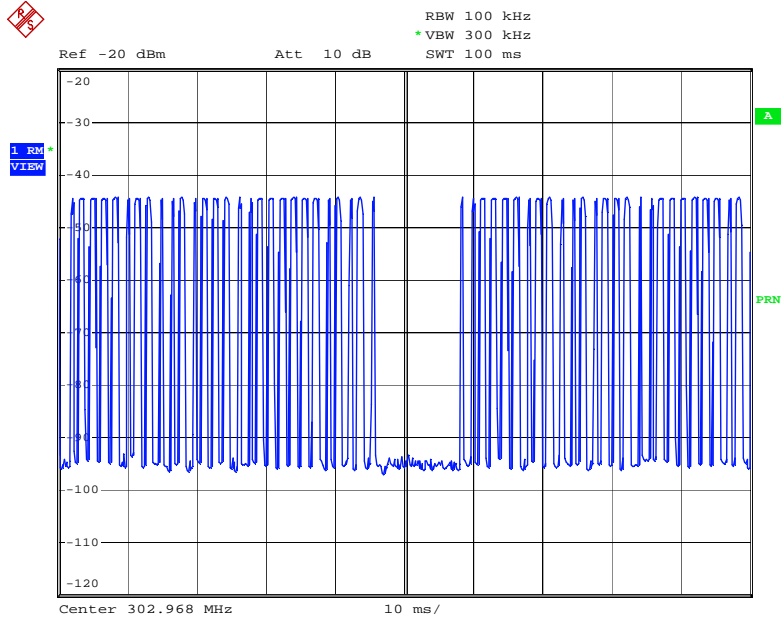

Date: 1.JAN.2000 01:24:22



For model 303RTX-2
Below 1GHz Worst-Case Data

EUT	Remote for Garage Door Opener	MODEL NO.	303RTX-2
CHANNEL	Channel 1	FREQUENCY RANGE	30 ~ 1000 MHz
MODULATION TYPE	ASK	INPUT POWER (SYSTEM)	12Vdc by battery
ENVIRONMENTAL CONDITIONS	23 deg. C, 50% RH, 1000 hPa	DETECTOR FUNCTION	Quasi-Peak/Peak/Average
TESTED BY	Bing YE		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Factor (dB/M)	Reading (dBuV/M)	Emission (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Ant. Height (cm)	Table Angle (Deg.)
1*	304.02PK	14.63	47.32	61.95	94.9	-32.95	--	--
1*	304.02AV	14.63	30.22	52.79	74.9	-22.11	--	--
2	396.18QP	16.98	3.36	20.34	46	-25.66	200	170
3	476.2QP	19.07	1.86	20.93	46	-25.07	200	109
4	558.65QP	21.29	1.79	23.08	46	-22.92	200	199
5	607.15PK	22.64	17.57	40.21	74.9	-34.69	--	--
5	607.15AV	22.64	5.72	31.05	54.9	-23.85	--	--
6	694.45QP	23.95	2.79	26.74	46	-19.26	200	130
7	776.9QP	25.71	3.38	29.09	46	-16.91	200	225
8	837.52QP	26.44	1.91	28.35	46	-17.65	200	104
9	903.00PK	26.73	16.56	43.29	74.9	-31.61	--	--
9	903.00AV	26.40	-2.11	34.13	54.9	-20.77	--	--



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Factor (dB/M)	Reading (dBuV/M)	Emission (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Ant. Height (cm)	Table Angle (Deg.)
1*	304.02PK	14.63	30.09	44.72	94.9	-50.18	--	--
1*	304.02AV	14.63	16.24	35.56	74.9	-39.34	--	--
2	352.52QP	15.86	2.67	18.53	46	-27.47	100	278
3	430.12QP	18.11	2.84	20.95	46	-25.05	100	36
4	536.83QP	20.53	2.28	22.81	46	-23.19	100	209
5	607.15PK	22.64	14.40	37.04	74.9	-37.86	--	--
5	607.15AV	22.64	-2.64	27.88	54.9	-27.02	--	--
6	677.48QP	23.62	1.43	25.05	46	-20.95	100	0
7	733.25QP	24.88	1.82	26.7	46	-19.3	100	147
8	837.52QP	26.44	2.08	28.52	46	-17.48	100	142
9	903.00PK	26.73	9.02	35.75	74.9	-39.15	--	--
9	903.00AV	26.40	-2.87	26.59	54.9	-28.31	--	--

- NOTE:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB) = Antenna Factor (dB) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "*" = Fundamental frequency
 6. The average value of fundamental frequency and spurious emission is: Average = Peak value + 20log(Duty cycle)
 Where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log \frac{(0.46*31+0.98*21)\text{ms}}{100\text{ms}} = -9.16\text{dB}$$

please see page 27,28 for plotted duty



Above 1GHz Worst-Case Data

EUT	Remote for Garage Door Opener	MODEL NO.	303RTX-2
CHANNEL	Channel 1	FREQUENCY RANGE	1 GHz~3.03 GHz
MODULATION TYPE	ASK	INPUT POWER (SYSTEM)	12Vdc by battery
ENVIRONMENTAL CONDITIONS	23 deg. C, 50% RH, 1000 hPa	DETECTOR FUNCTION	Peak/Average
TESTED BY	Bing YE		

Frequency(MHz)		PK Emission (dBuV/m)	PK limit (dBuV/m)	PK margin (dBuV/m)	AV EMISSION	AV LIMIT	AV MARGIN
1212.00	H	39.69	74	-34.31	30.53	54	-23.47
	V	39.22	74	-34.78	30.06	54	-23.94
1515.00	H	40.52	74	-33.48	31.36	54	-22.64
	V	40.13	74	-33.87	30.97	54	-23.03
1818.00	H	40.53	74	-33.47	31.37	54	-22.63
	V	39.95	74	-34.05	30.79	54	-23.21
2121.00	H	43.98	74	-30.02	34.82	54	-19.18
	V	43.19	74	-30.81	34.03	54	-19.97
2424.00	H	43.12	74	-30.88	33.96	54	-20.04
	V	42.95	74	-31.05	33.79	54	-20.21
2727.00	H	44.7	74	-29.30	35.54	54	-18.46
	V	43.82	74	-30.18	34.66	54	-19.34

- NOTE:** 1. Emission level (dBuV/m) =Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB) = Antenna Factor (dB) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*” = Fundamental frequency
 6. The average value of fundamental frequency and spurious emission is: Average = Peak value + 20log(Duty cycle)


Where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log \frac{(0.46*31+0.98*21)\text{ms}}{100\text{ms}} = -9.16\text{dB}$$


please see page 26,27 for plotted duty



10ms-1

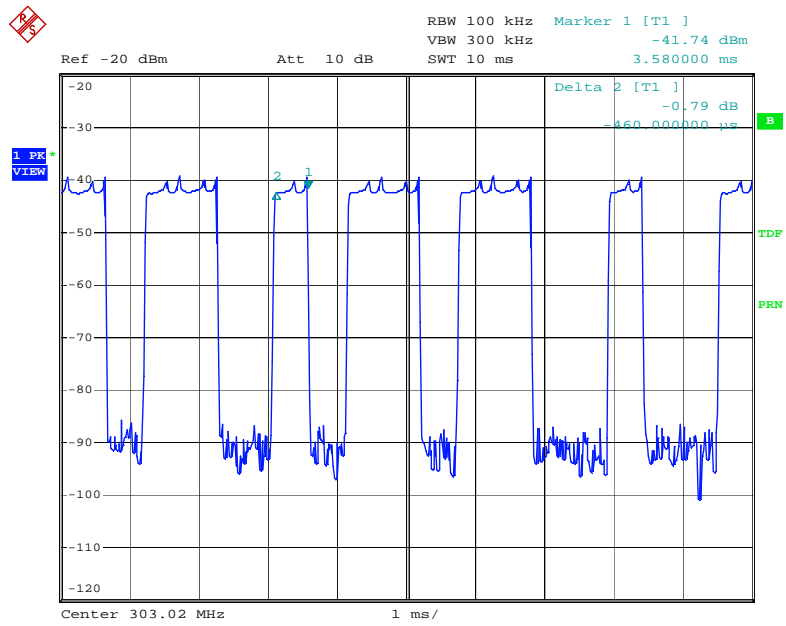


10ms-2

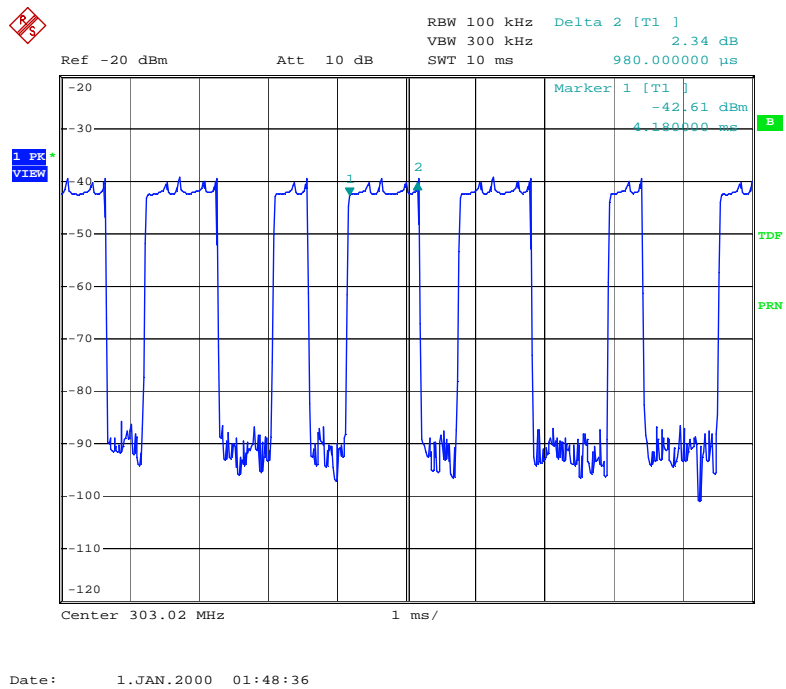



100ms

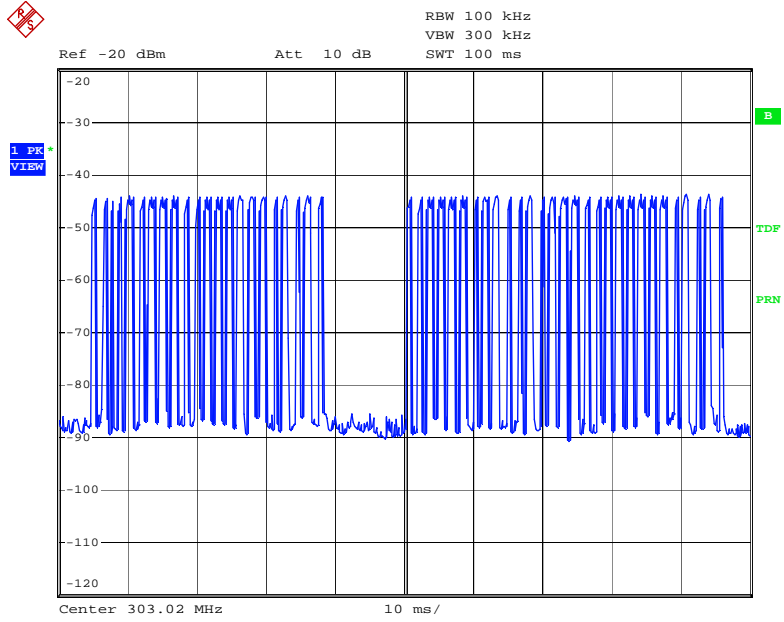

Date: 1.JAN.2000 01:46:29



For model 303RTX-3
 Below 1GHz Worst-Case Data

EUT	Remote for Garage Door Opener	MODEL NO.	303RTX-3
CHANNEL	Channel 1	FREQUENCY RANGE	30 ~ 1000 MHz
MODULATION TYPE	ASK	INPUT POWER (SYSTEM)	12Vdc by battery
ENVIRONMENTAL CONDITIONS	23 deg. C, 50% RH, 1000 hPa	DETECTOR FUNCTION	Quasi-Peak/Peak/Average
TESTED BY	Bing YE		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Factor (dB/M)	Reading (dBuV/M)	Emission (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Ant. Height (cm)	Table Angle (Deg.)
1	170.65QP	14.11	3.13	17.24	43.5	-26.26	200	98
2*	304.02PK	14.63	47.22	61.85	94.9	-33.05	--	--
2*	304.02AV	14.63	31.39	51.7	74.9	-23.2	--	--
3	405.87QP	17.25	3.55	20.8	46	-25.2	200	108
4	502.87QP	19.52	3.27	22.79	46	-23.21	200	199
5	607.15PK	22.64	22.97	45.60	74.9	-29.3	--	--
5	607.15AV	22.64	10.77	35.45	54.9	-19.45	--	--
6	638.67QP	23.06	2.03	25.09	46	-20.91	200	147
7	728.4QP	24.83	1.98	26.81	46	-19.19	200	103
8	839.95QP	26.42	2.06	28.48	46	-17.52	200	245
9	907.85PK	26.73	18.00	44.73	74.9	-30.17	--	--
9	907.85AV	26.40	-2.11	34.58	54.9	-20.32	--	--



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Factor (dB/M)	Reading (dBuV/M)	Emission (dBuV/M)	Limit (dBuV/M)	Margin (dB)	Ant. Height (cm)	Table Angle (Deg.)
1*	304.02PK	14.63	31.39	46.02	94.9	-48.88	--	--
1*	304.02AV	14.63	16.24	35.87	74.9	-39.03	--	--
2	384.05QP	16.78	2.63	19.41	46	-26.59	100	287
3	473.77QP	19.04	2.54	21.58	46	-24.42	100	249
4	578.05QP	21.76	2.84	24.6	46	-21.4	100	120
5	607.15PK	22.64	10.77	33.41	74.9	-41.49	--	--
5	607.15AV	22.64	-2.64	23.26	54.9	-31.64	--	--
6	677.48QP	23.62	1.24	24.86	46	-21.14	100	154
7	738.1QP	24.93	2.66	27.59	46	-18.41	100	215
8	864.2QP	26.53	2.97	29.5	46	-16.5	100	45
9	907.85PK	26.73	9.19	35.92	74.9	-38.98	--	--
9	907.85AV	26.40	-2.87	25.77	54.9	-29.13	--	--

- NOTE:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB) = Antenna Factor (dB) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "*" = Fundamental frequency
 6. The average value of fundamental frequency and spurious emission is: Average = Peak value + 20log(Duty cycle)
 Where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log \frac{(0.9 \times 21 + 0.42 \times 42)\text{ms}}{100\text{ms}} = -10.15\text{dB}$$

please see page 32,33 for plotted duty



Above 1GHz Worst-Case Data

EUT	Remote for Garage Door Opener	MODEL NO.	303RTX-3
CHANNEL	Channel 1	FREQUENCY RANGE	1 GHz~3.03 GHz
MODULATION TYPE	ASK	INPUT POWER (SYSTEM)	12Vdc by battery
ENVIRONMENTAL CONDITIONS	23 deg. C, 50% RH, 1000 hPa	DETECTOR FUNCTION	Peak/Average
TESTED BY	Bing YE		

Frequency(MHz)		PK Emission (dBuV/m)	PK limit (dBuV/m)	PK margin (dBuV/m)	AV EMISSION	AV LIMIT	AV MARGIN
1212.00	H	42.34	74	-31.66	32.19	54	-21.81
	V	39.71	74	-34.29	29.56	54	-24.44
1515.00	H	41.66	74	-32.34	31.51	54	-22.49
	V	41.1	74	-32.90	30.95	54	-23.05
1818.00	H	40.56	74	-33.44	30.41	54	-23.59
	V	41.62	74	-32.38	31.47	54	-22.53
2121.00	H	44.24	74	-29.76	34.09	54	-19.91
	V	43.88	74	-30.12	33.73	54	-20.27
2424.00	H	44.34	74	-29.66	34.19	54	-19.81
	V	43.56	74	-30.44	33.41	54	-20.59
2727.00	H	45.29	74	-28.71	35.14	54	-18.86
	V	44.68	74	-29.32	34.53	54	-19.47

- NOTE:** 1. Emission level (dBuV/m) =Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB) = Antenna Factor (dB) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*” = Fundamental frequency
 6. The average value of fundamental frequency and spurious emission is: Average = Peak value + 20log(Duty cycle)


Where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log \frac{(0.9*21+0.42*42)\text{ms}}{100\text{ms}} = -10.15\text{dB}$$

please see page 32,33 for plotted duty




20ms-1

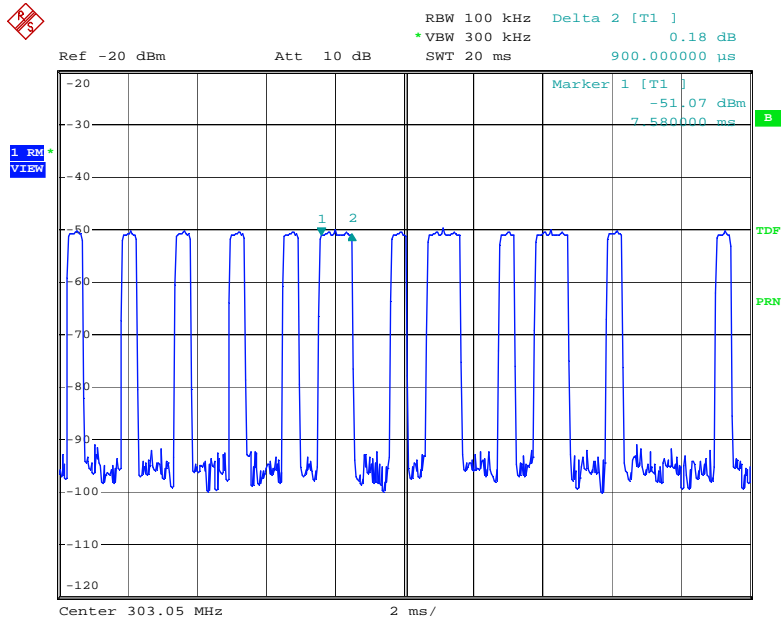

Date: 1.JAN.2000 00:57:18


20ms-2

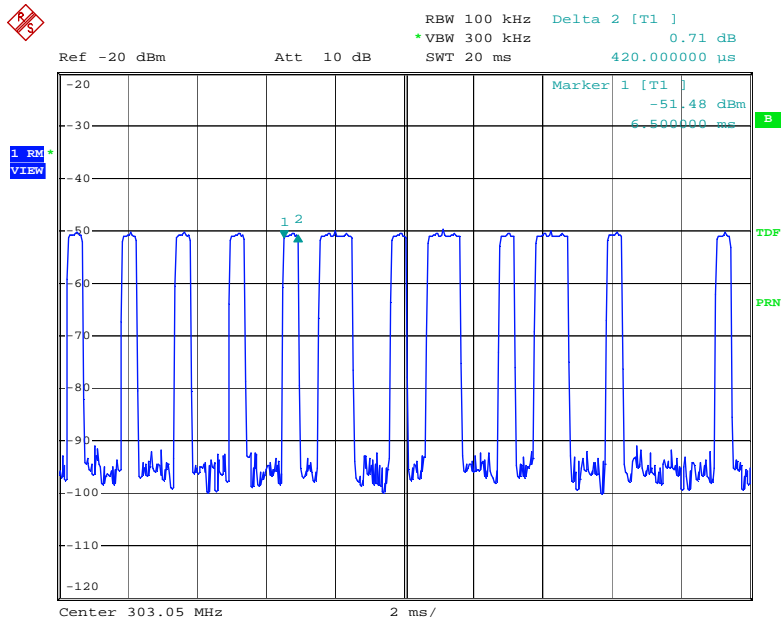

Date: 1.JAN.2000 00:58:04



100ms

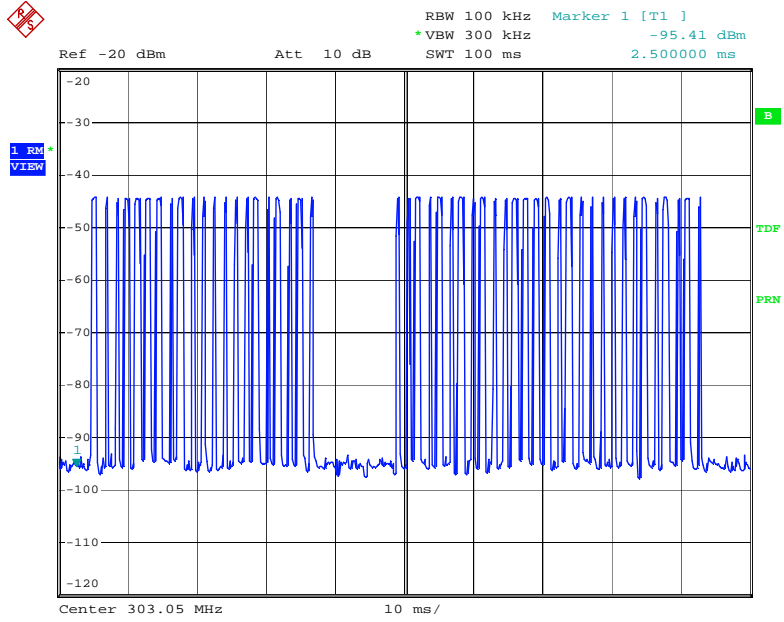

Date: 1.JAN.2000 00:55:53



4.4 20DB OCCUPIED BANDWIDTH MEASUREMENT

4.4.1 LIMITS OF BAND EDGES MEASUREMENT

TEST STANDARD:

FCC Part 15: 2011, Subpart C (Section: 15.231(C))

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for device operating above 70 MHz and below 900 MHz.

Fundamental Frequency (MHz)	Limit of 20 dB Bandwidth(kHz)
303	757.50

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SIGNAL ANALYZER Rohde & Schwarz	FSP	E1S1002	Aug. 15, 2014
BILOG Antenna SCHWARZBECK	VULB9168	E1A1001	Apr. 27, 2015

NOTE: The calibration interval of the above test instruments is 12 months.




4.4.3 TEST PROCEDURES

1. The EUT was placed on the turning table.
2. The signal was coupled to the spectrum analyzer through an antenna.
3. Set the resolution bandwidth to 100 kHz and video bandwidth to 300 kHz then select Peak function to scan the channel frequency.
4. The 20dB bandwidth was measured and recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

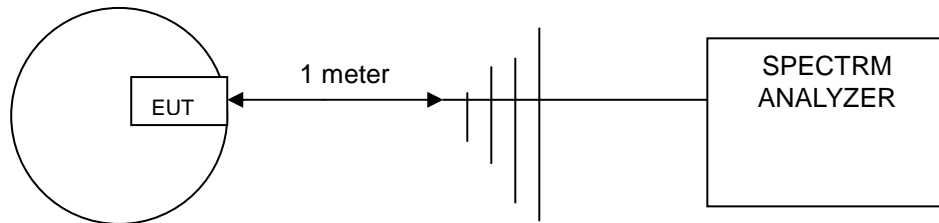




4.4.6 TEST RESULTS

For model 303RTX-1

Frequency (MHz)	20 dB bandwidth (kHz)	Maximum limit (kHz)	Pass / Fail
303	258	757.50	Pass

The plot of test result is attached as below.

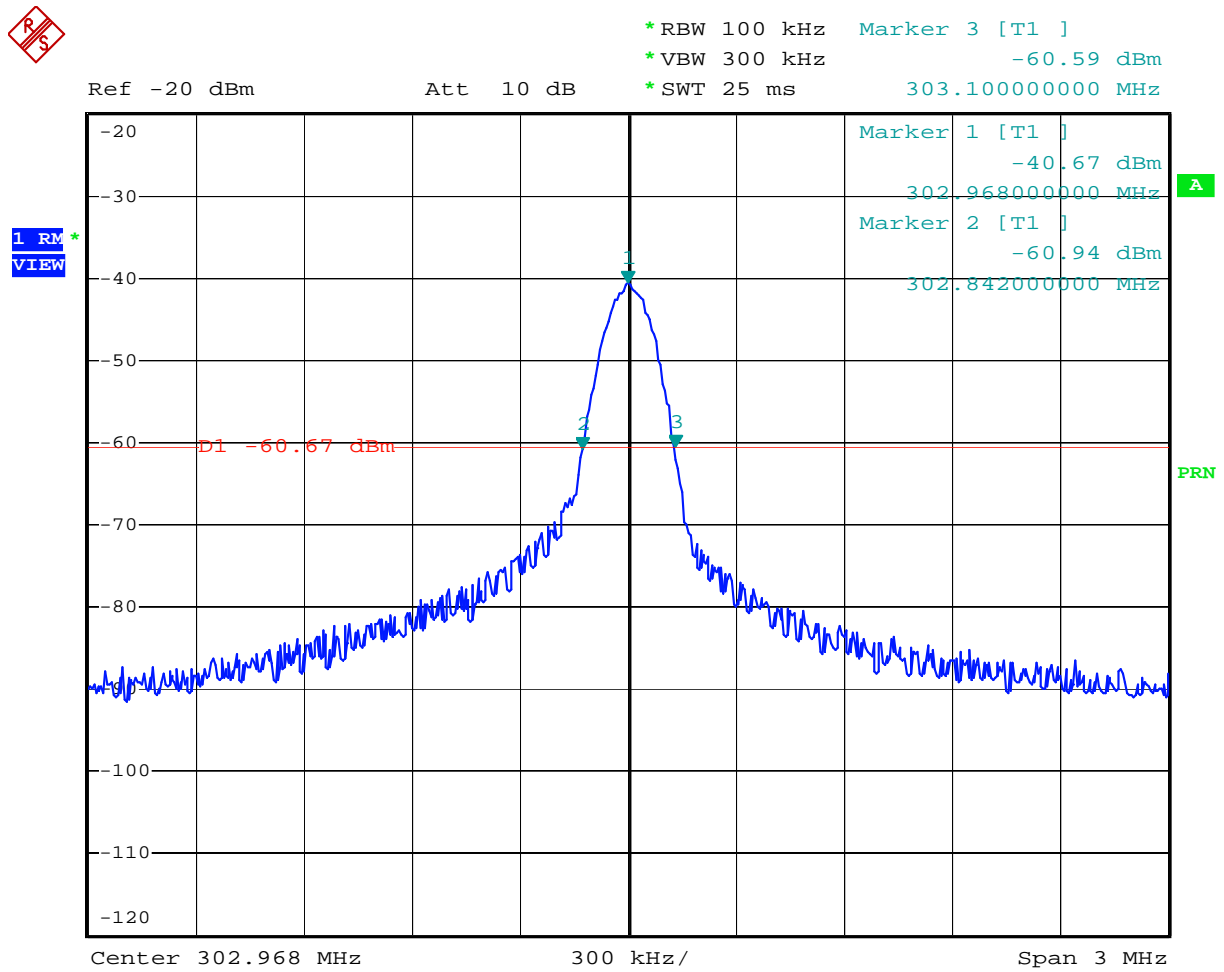

Date: 1.JAN.2000 01:23:08

Note:


20 dB bandwidth=(Maker 3 - Maker 2)= 303.100MHz-302.842MHz=258 KHz



For model 303RTX-2

Frequency (MHz)	20 dB bandwidth (kHz)	Maximum limit (kHz)	Pass / Fail
303	368	757.50	Pass

The plot of test result is attached as below.

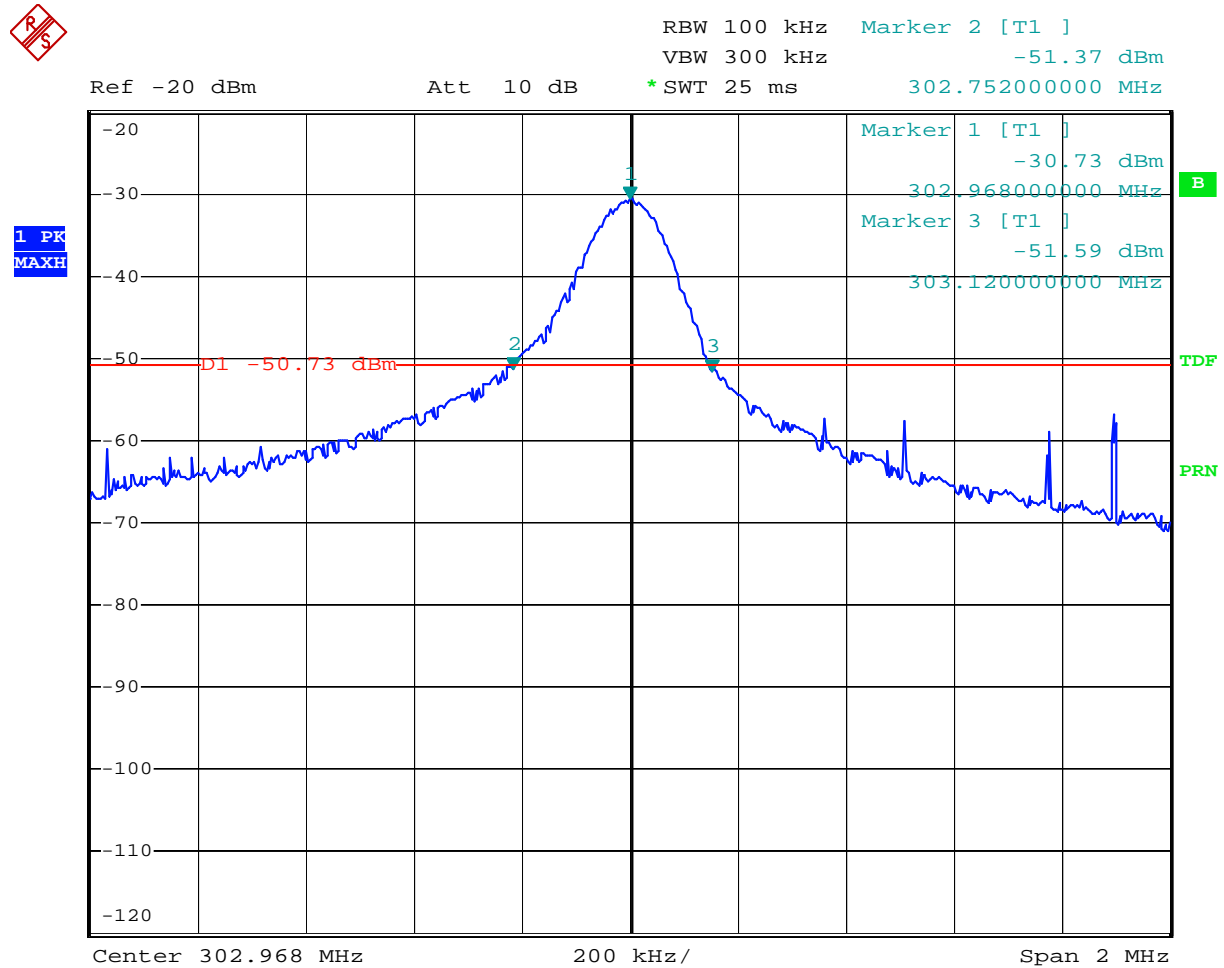

Date: 1.JAN.2000 01:57:27

Note:


20 dB bandwidth=(Maker 3 - Maker 2)= 303.120MHz-302.752MHz=368 KHz



For model 303RTX-3

Frequency (MHz)	20 dB bandwidth (kHz)	Maximum limit (kHz)	Pass / Fail
303	306	757.50	Pass

The plot of test result is attached as below.

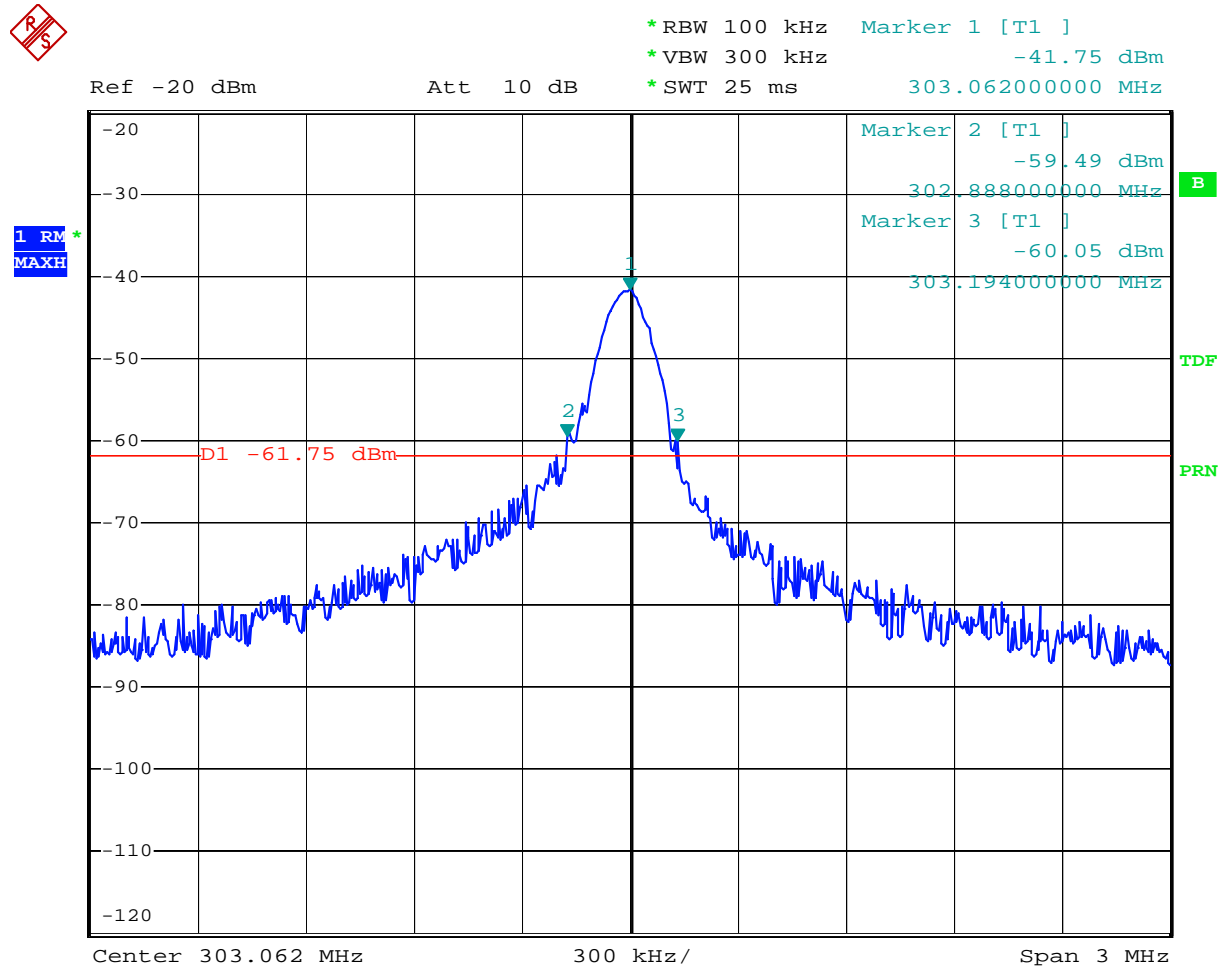


Date: 1.JAN.2000 01:05:31

Note:

20 dB bandwidth=(Maker 3 - Maker 2)= 303.194MHz-302.888MHz=306 KHz





5 PHOTOGRAPHS OF THE TEST CONFIGURATION

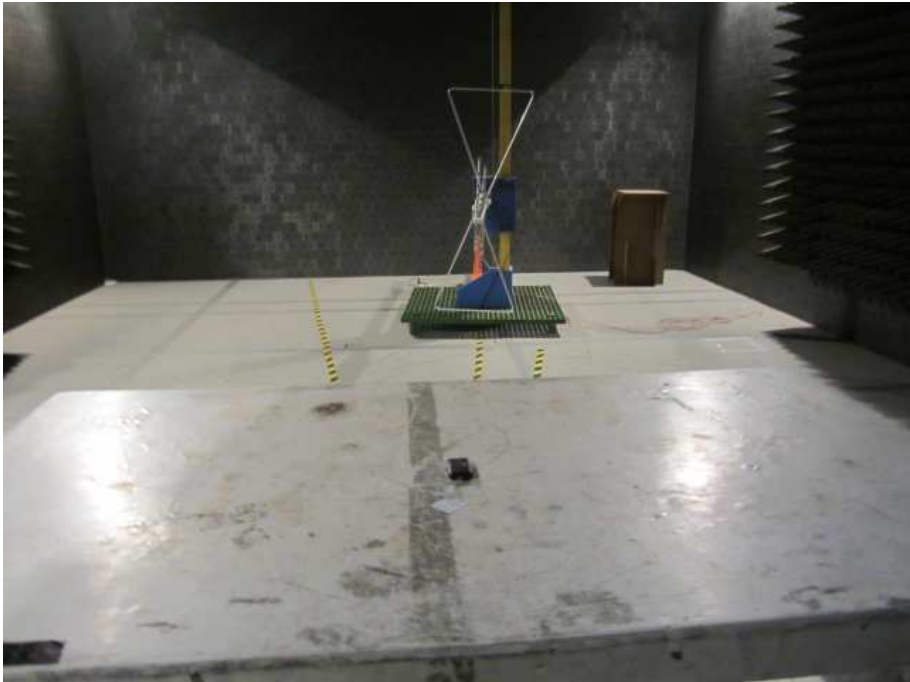

6 PHOTOGRAPHS OF THE EUT

For model 303RTX-1



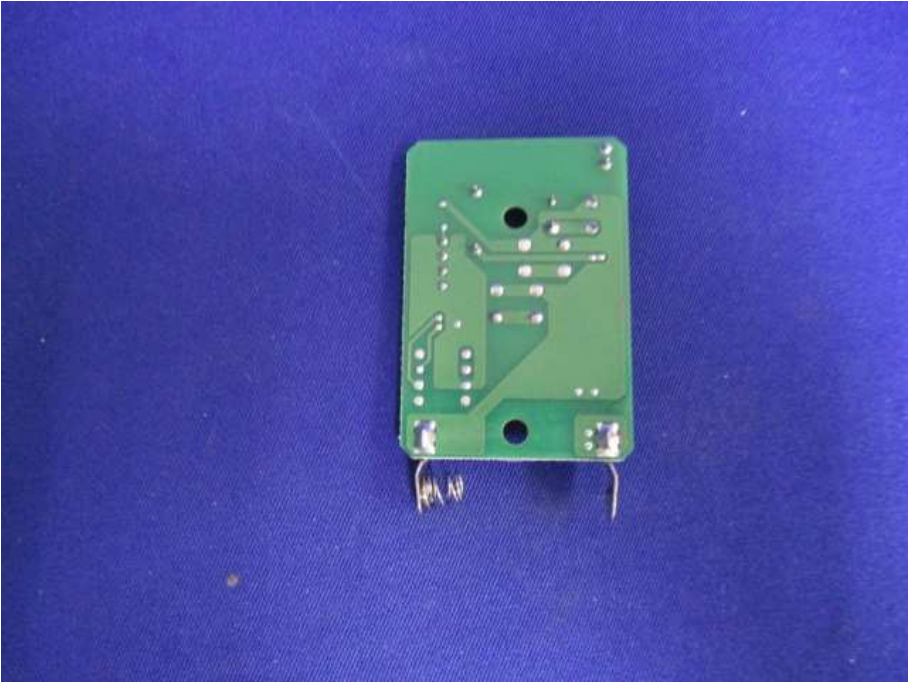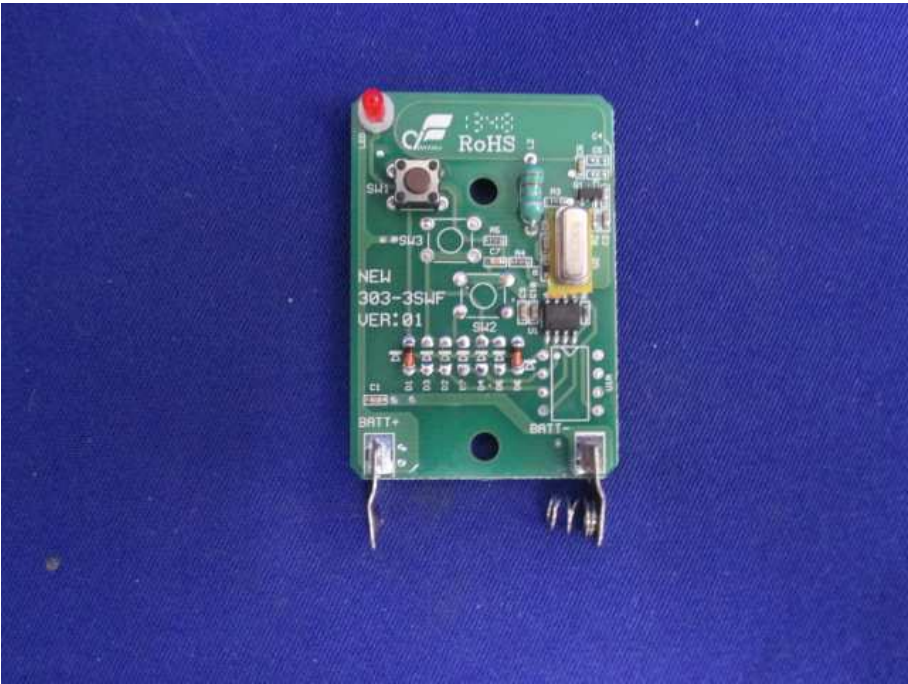




NOTE: The red line is antenna position.



For model 303RTX-2



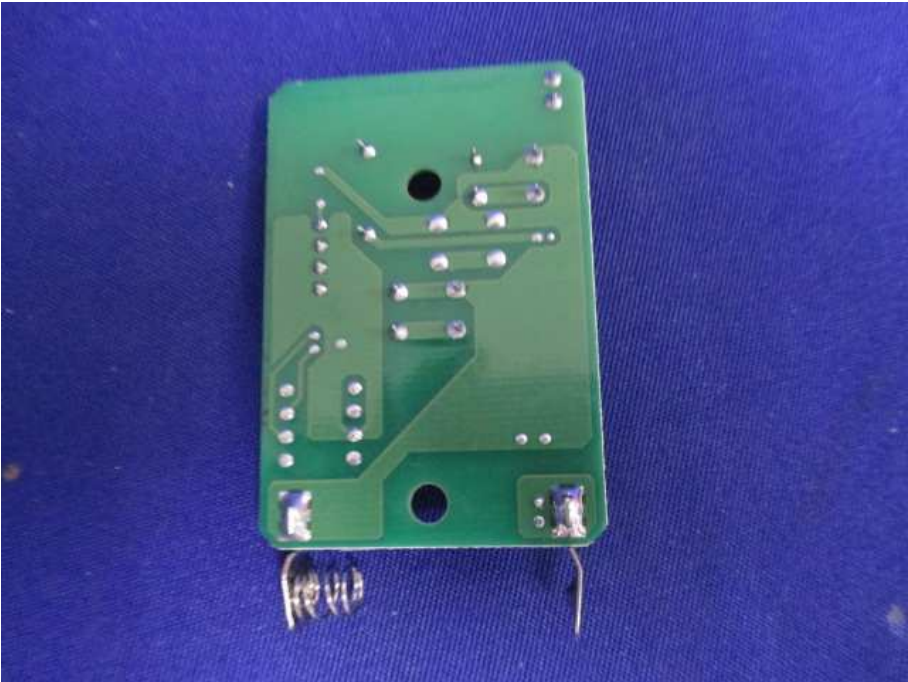





NOTE: The red line is antenna position.


FCC ID: YJF303RTX-D



For model 303RTX-3



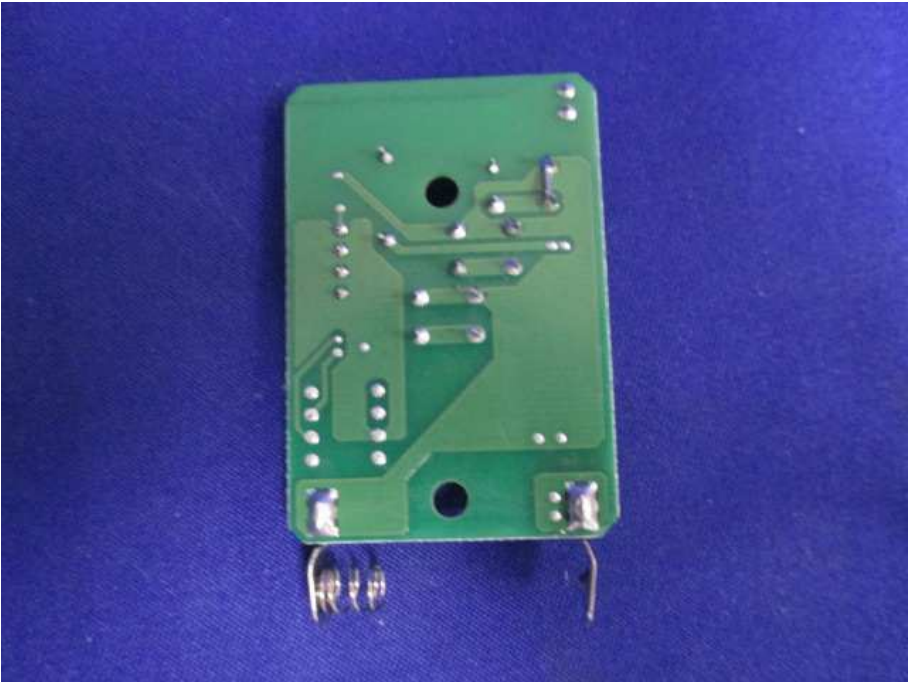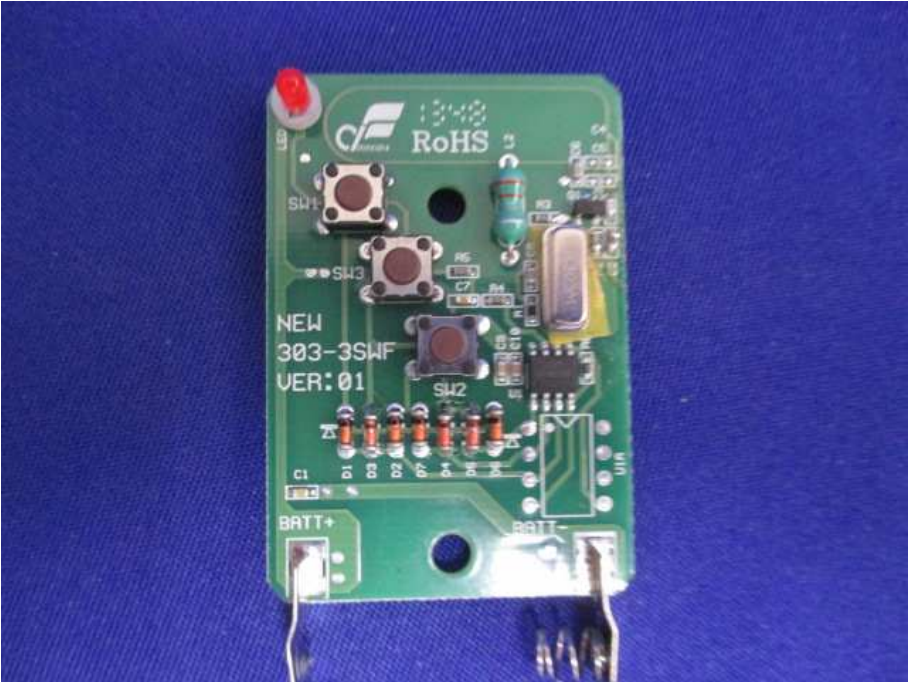

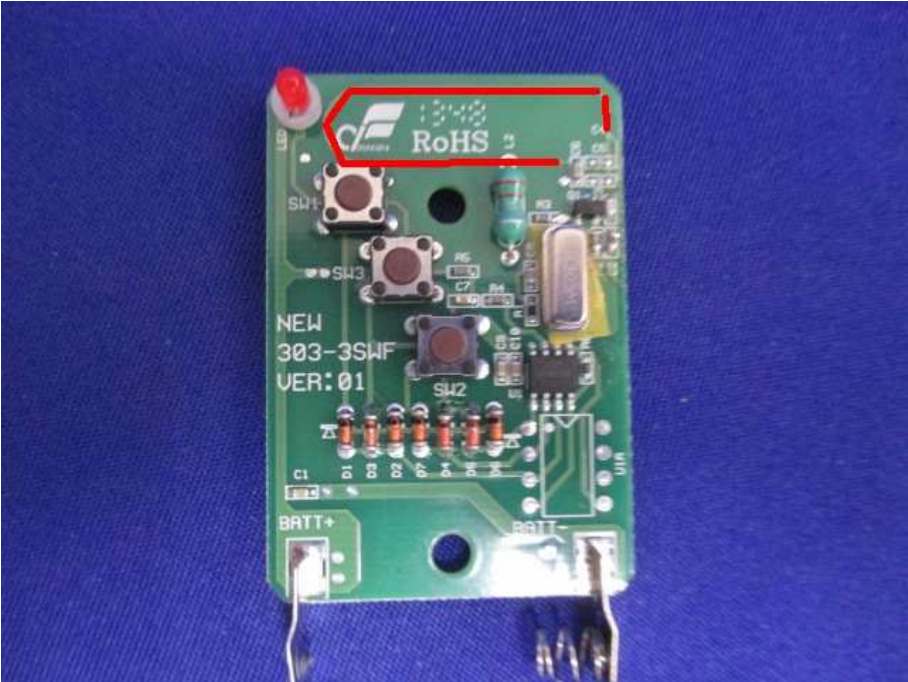

NOTE: The red line is antenna position.



7 APPENDIX - INFORMATION ON THE TESTING LABORATORY

We, BUREAU VERITAS ADT (Shanghai) Corporation, were founded in 2004 to provide our best service in EMC, Radio and Vehicle consultation. Our laboratories are accredited by the following accreditation bodies according to ISO/IEC 17025 (2005) .

USA	A2LA Certificate No.: 2343.01
China	CNAS Certificate No.: L2810

Copies of accreditation certificates could be inquired from our office. If you have any comments, please feel free to contact us at the following:

EMC / RF / Vehicle Lab:

Tel: +86 21 6465 9091

Fax: +86 21 6465 9092

Email: bvadtshmail@cn.bureauveritas.com

--- END ---