

# TEST REPORT

Report No.: BCTC2307826006-2E

---

Applicant: Superior communications .

---

Product Name: PowerLab 10W Wireless Charger with 4ft micro  
USB Cable

---

Model/Type  
reference: 10411PL

---

Tested Date: 2023-07-18 to 2023-07-26

---

Issued Date: 2023-07-26

---

**Shenzhen BCTC Testing Co., Ltd.**



# FCC ID: YJW-10411PL

Product Name: PowerLab 10W Wireless Charger with 4ft micro USB Cable  
Trademark: PL  
Model/Type reference: 10411PL  
Prepared For: Superior communications .  
Address: 5027 Irwindale Ave.Suite Irwindale Ave California, United States 91706  
Manufacturer: Superior communications .  
Address: 5027 Irwindale Ave.Suite Irwindale Ave California, United States 91706  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: 2023-07-18  
Sample tested Date: 2023-07-18 to 2023-07-26  
Issue Date: 2023-07-26  
Report No.: BCTC2307826006-2E  
Test Standards: FCC CFR 47 part1, 1.1307(b), 1.1310  
Test Results: PASS

Tested by:



Lei Chen/Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.




## Table Of Content

Test Report Declaration	Page
1. Version .....	4
2. Product Information .....	5
2.1 Product Information .....	5
2.2 Support Equipment .....	5
2.3 Test Mode .....	5
3. Test Facility And Test Instrument Used .....	6
3.1 Test Facility .....	6
3.2 Test Instrument Used .....	6
4. Method Of Measurement .....	7
4.1 Applicable Standard .....	7
4.2 Block Diagram Of Test Setup .....	7
4.3 Limit .....	8
4.4 Test procedure .....	8
4.5 Equipment Approval Considerations .....	9
4.6 E and H field Strength .....	10
5. Photographs Of Test Set-Up .....	11

(Note: N/A Means Not Applicable)


TC  
3C  
PPR  
測

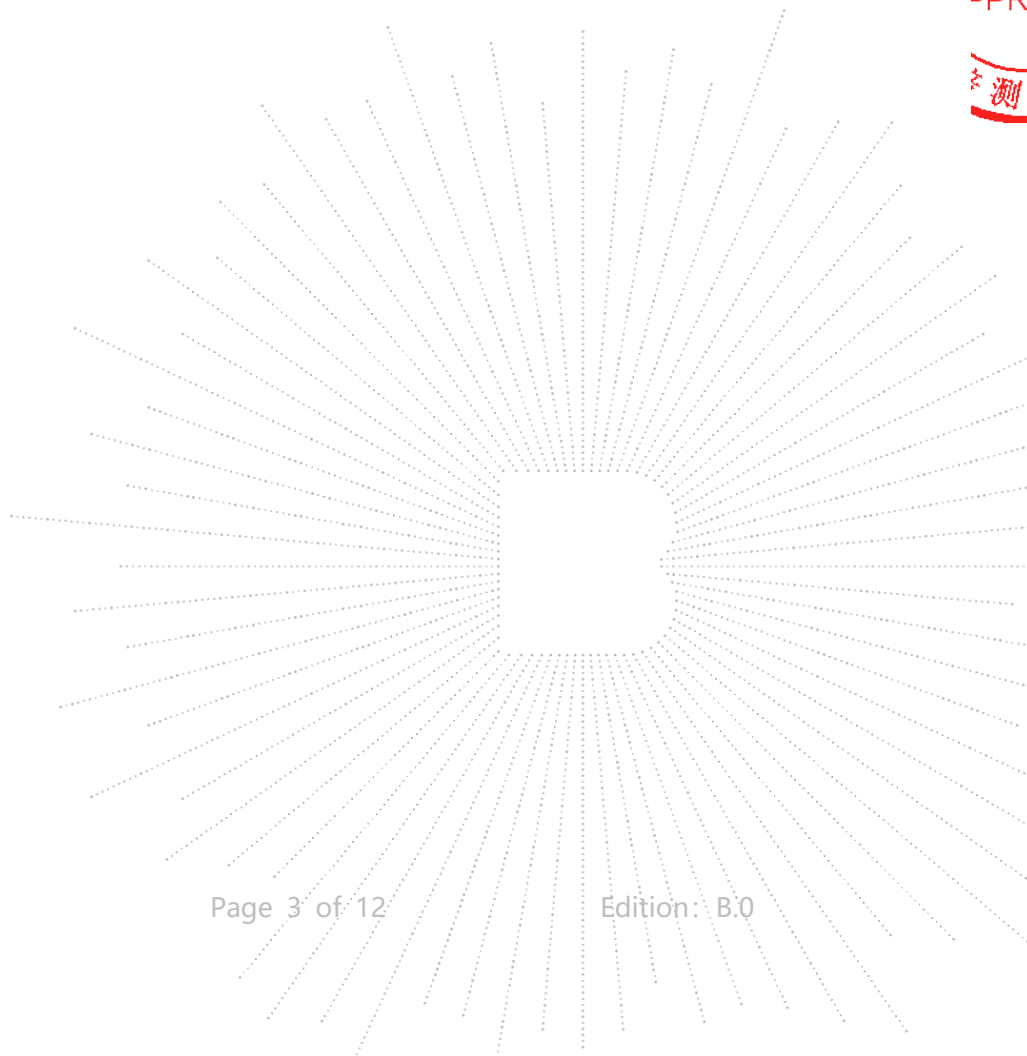

**1. Version**

Report No.	Issue Date	Description	Approved
BCTC2307826006-2E	2023-07-26	Original	Valid

TEC  
TC  
OVB  
檢

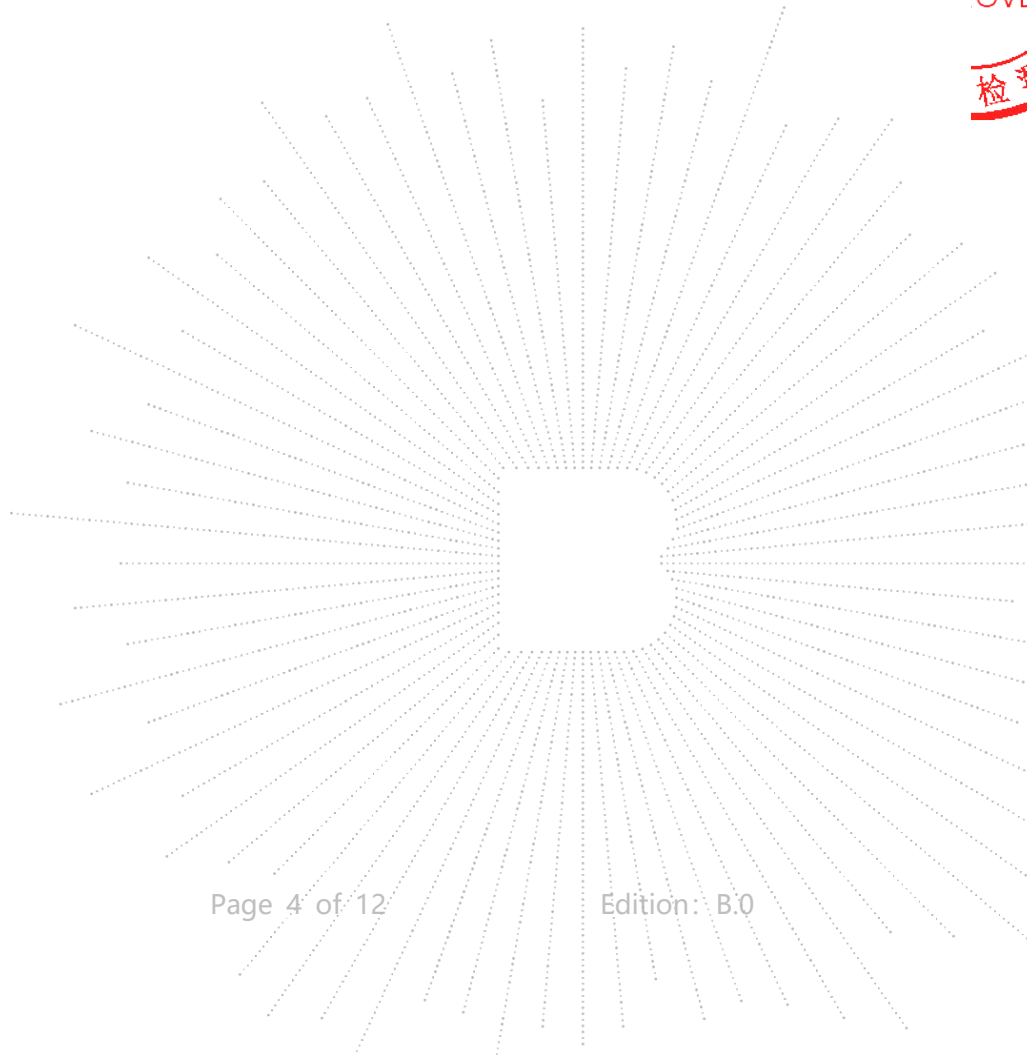

## 2. Product Information

### 2.1 Product Information

Model/Type reference: 10411PL  
 Model differences: N/A  
 Hardware Version: N/A  
 Software Version: N/A  
 Operation Frequency: 115kHz-205kHz  
 Modulation type: ASK  
 Antenna installation: Coil antenna  
 Ratings: Input: DC 5V/1.65A, 9V/1.75A  
           Wireless charging output: 5W/7.5W/10W

### 2.2 Support Equipment

Device Type	Brand	Model	Series No.	Note
PowerLab 10W Wireless Charger with 4ft micro USB Cable	PL	10411PL	N/A	EUT
Dummy load	N/A	DL01	N/A	Auxiliary

#### Notes:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 2.3 Test Mode

Mode 1	Wireless charging 5W
Mode 2	Wireless charging 7.5W
Mode 3	Wireless charging 10W

### 3. Test Facility And Test Instrument Used

#### 3.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

FCC Designation Number: CN1212

ISED Registered No.: 23583

ISED CAB identifier: CN0017

#### 3.2 Test Instrument Used

EMF Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Electromagnet -ic radiation tester	Wavecontrol	SMP160	19SN0980	May 15, 2023	May 14, 2024
Electromagnet -ic field probe	Wavecontrol	WP400-3	20WP120082	Sept. 08, 2022	Sept. 07, 2023
843 Chamber	ETS	843	84301	Aug. 27, 2020	Aug. 26, 2023
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

BCTC CO., LTD.


## 4. Method Of Measurement

### 4.1 Applicable Standard


According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v03: RF Exposure Wireless Charging Apps v02.

### 4.2 Block Diagram Of Test Setup

A:

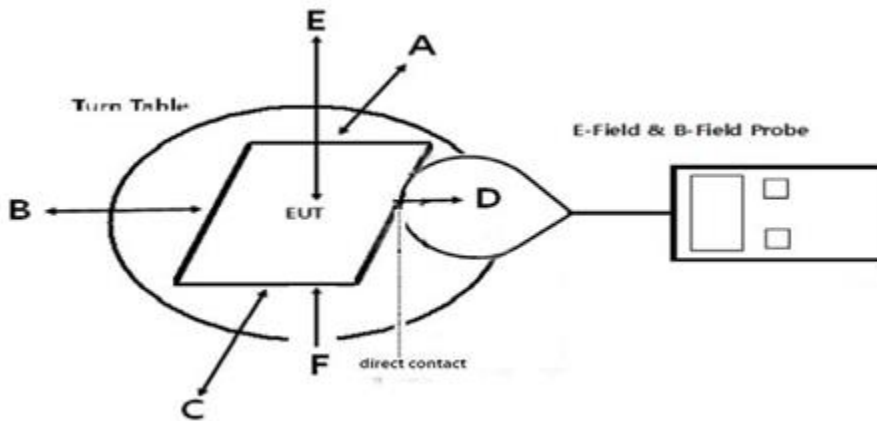

B:

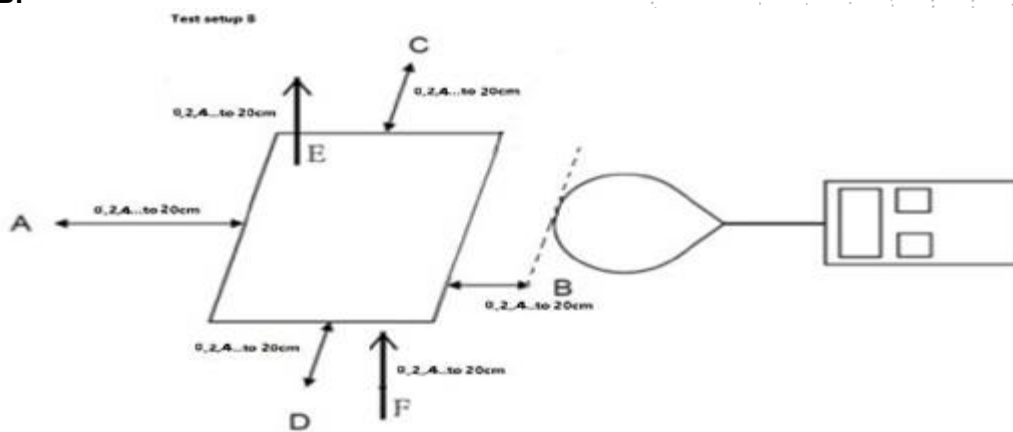

### 4.3 Limit

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

### 4.4 Test procedure

- a) The RF exposure test was performed in anechoic chamber.
- b) The measurement probe was placed at 0 cm surrounding the device for test setup A; and the measurement Probe was placed from 0 cm to 20 cm, in 2 cm maximum increment measured from the edge of the device For the test setup B.
- c) The highest emission level was recorded and compared with limit as soon as measurement of eachd) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- d) The EUT was measured according to the dictates of KDB680106 D01v03r01
- f) Remark: The EUT's test position A, B, C, D, E and F is valid for the E and H field measurements.



#### 4.5 Equipment Approval Considerations

The EUT does comply with item 5(b) of KDB 680106 D01v03

1) Power transfer frequency is less than 1MHz

Yes, the device operate in the frequency range from 115-205KHz

2) Output power from each primary coil is less than or equal to 15 watts.

Yes, the maximum output power of the primary coil is 10W.

3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that able to detect and allow coupling onlybetween individual pair of coils.

Yes, the transfer system includes only single primary coils.

4) Client device is inserted in or placed directly in contact with the transmitter.

Yes, client device is placed directly in contact with the transmitter.

5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

Yes, the EUT is a mophie device charging mat.

6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, the EUT field strength levels are 10% x MPE limit.

TC  
3C  
PPR  
測

#### 4.6 E and H field Strength

Worst Case Operating Mode: Mode 3

E-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position Top	10% Limits Test (V/m)	Limits Test (V/m)
1%	0.115-0.205	0.078	0.073	0.064	0.076	0.079	0.075	61.4	614
50%	0.115-0.205	0.075	0.061	0.072	0.078	0.075	0.067	61.4	614
99%	0.115-0.205	0.067	0.075	0.068	0.064	0.065	0.065	61.4	614

H-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

Battery level	Frequency Range (MHz)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position Top(uT)	10% Limits Test (uT)	Limits Test (uT)
1%	0.115-0.205	0.067	0.078	0.077	0.062	0.066	0.068	0.204	2.038
50%	0.115-0.205	0.061	0.075	0.065	0.070	0.068	0.072	0.204	2.038
99%	0.115-0.205	0.078	0.074	0.070	0.061	0.074	0.068	0.204	2.038



Battery level	Frequency Range (MHz)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position Top(A/m)	10% Limits Test (A/m)	Limits Test (A/m)
1%	0.115-0.205	0.054	0.062	0.062	0.049	0.053	0.054	0.163	1.630
50%	0.115-0.205	0.049	0.060	0.052	0.056	0.054	0.058	0.163	1.630
99%	0.115-0.205	0.063	0.059	0.056	0.049	0.059	0.054	0.163	1.630

Note: A/m = uT ÷ 1.25

TEST  
 TO  
 OVER  
 検査

**5. Photographs Of Test Set-Up**

15CM

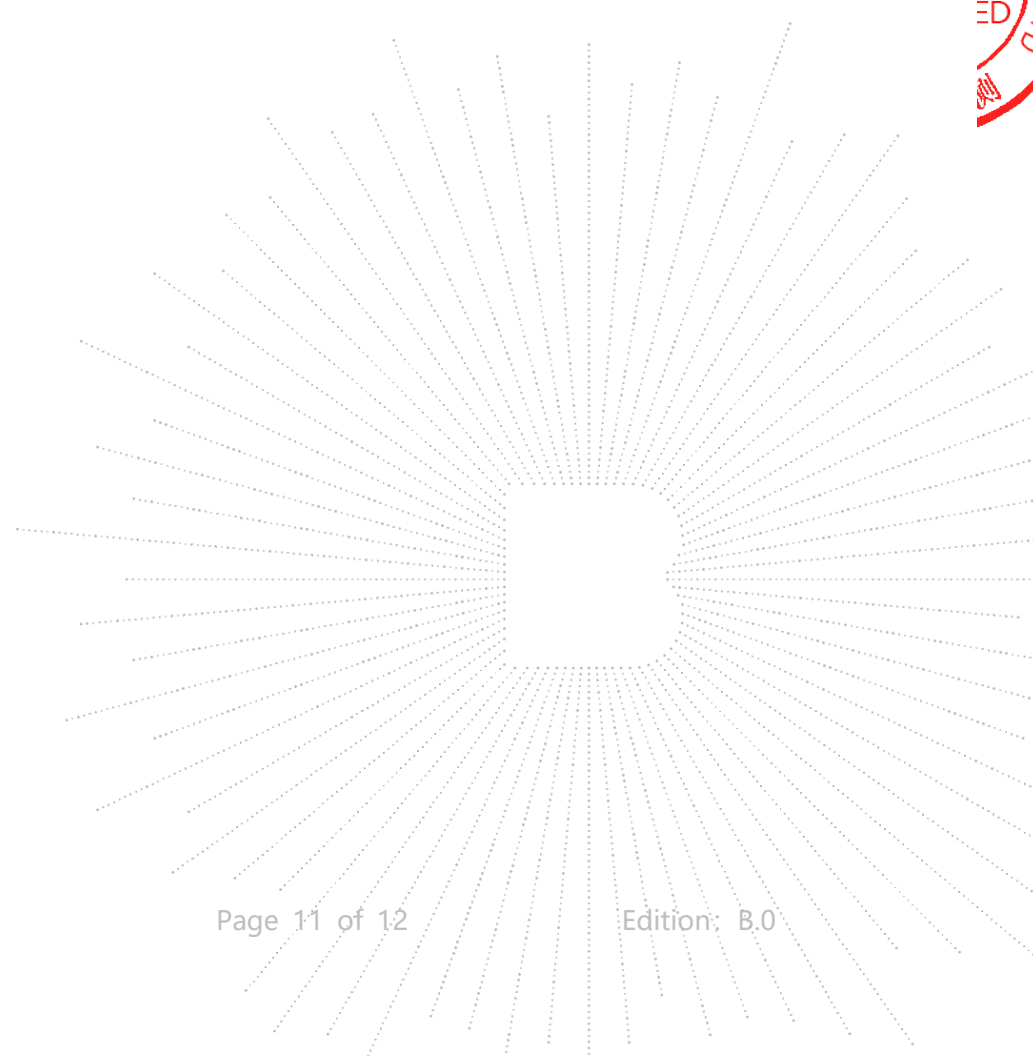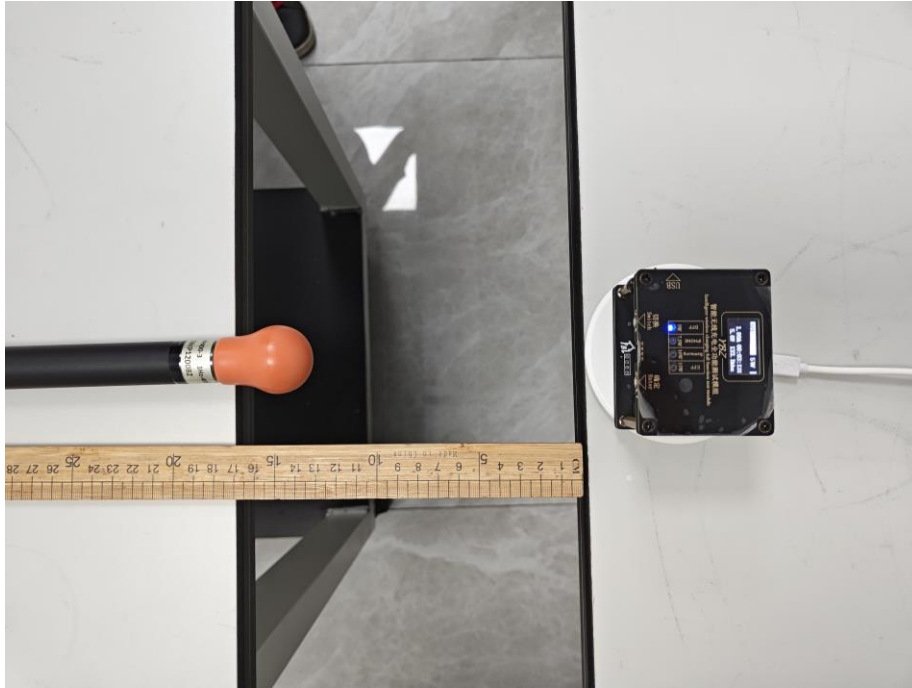

**STATEMENT**

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

**Address:**

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

**\*\*\*\*\* END \*\*\*\*\***