

# Shanghai Feixun Communication Co., Ltd.

## Wireless router

Main Model: FIR302E

Serial Model: N/A

July 14, 2014




Report No.: 14050049-FCC-R1

(This report supersedes none)



Modifications made to the product : None

This Test Report is Issued Under the Authority of:

		
Amos Xia Compliance Engineer	Alex Liu Technical Manager	

This test report may be reproduced in full only.  
Test result presented in this test report is applicable to the representative sample only.

# RF Test Report

To: FCC Part 15.247: 2013, ANSI C63.4: 2009

SIEMIC, INC.  
Accessing global markets



## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to [testing](#) and [certification](#), SIEMIC provides initial design reviews and [compliance management](#) through out a project. Our extensive experience with [China](#), [Asia Pacific](#), [North America](#), [European](#), and [international](#) compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the [global markets](#).

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC , RF/Wireless , Telecom
Canada	EMC, RF/Wireless , Telecom
Taiwan	EMC, RF, Telecom , Safety
Hong Kong	RF/Wireless ,Telecom
Australia	EMC, RF, Telecom , Safety
Korea	EMI, EMS, RF , Telecom, Safety
Japan	EMI, RF/Wireless, Telecom
Singapore	EMC , RF , Telecom
Europe	EMC, RF, Telecom , Safety



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless router  
Main Model: FIR302E  
Serial Model: N/A  
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 14050049-FCC-R1  
Issue Date: July 14, 2014  
Page: 3 of 42  
[www.siemic.com.cn](http://www.siemic.com.cn)

This page has been left blank intentionally.

# CONTENTS

<b>1</b>	<b>EXECUTIVE SUMMARY &amp; EUT INFORMATION .....</b>	<b>5</b>
<b>2</b>	<b>TECHNICAL DETAILS .....</b>	<b>6</b>
<b>3</b>	<b>MODIFICATION.....</b>	<b>7</b>
<b>4</b>	<b>TEST SUMMARY.....</b>	<b>8</b>
<b>5</b>	<b>MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....</b>	<b>9</b>
	<b>ANNEX A. TEST INSTRUMENT.....</b>	<b>27</b>
	<b>ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS .....</b>	<b>28</b>
	<b>ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....</b>	<b>37</b>
	<b>ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST .....</b>	<b>41</b>
	<b>ANNEX E. DECLARATION OF SIMILARITY .....</b>	<b>42</b>

# 1 EXECUTIVE SUMMARY & EUT INFORMATION

The purpose of this test programme was to demonstrate compliance of the Shanghai Feixun Communication Co., Ltd., Wireless router and model: FIR302E against the current Stipulated Standards. The Wireless router has demonstrated compliance with the FCC Part 15.247: 2013, ANSI C63.4: 2009.

## EUT Information

<b>EUT Description</b>	<b>Wireless router</b>
<b>Main Model</b>	<b>FIR302E</b>
<b>Serial Model</b>	<b>N/A</b>
<b>Antenna Gain</b>	<b>WIFI Antenna 1: 5 dBi(Transmitter) WIFI Antenna 2: 5 dBi(Transmitter)</b>
<b>Input Power</b>	<b>Adapter 1: Model: RD1200500-C55-8MG Input: AC 100-240V 250mA Output: DC 12V 0.5A Adapter 2: Model: PSAA06A-120 Input: AC 100-240V 0.2A Output: DC 12V 500mA</b>
<b>Classification Per Stipulated Test Standard</b>	<b>FCC Part 15.247: 2013, ANSI C63.4: 2009</b>

Revision Number	Model	Report Number	Description of Revision	Date of Revision
0	FIR302B	14050026-FCC-R1	Original Report	June 16, 2014
1	FIR302E	14050049-FCC-R1	Amended Report	July 14, 2014

Note: This is the amended report application (14050049-FCC-R1) of the device, the original submission (14050026-FCC-R1) was granted on June 16, 2014. The difference between the original device and the current one was as following the detail information:

**The difference of these two models is different Appearance Size and Antenna Color.**

## 2 TECHNICAL DETAILS

<b>Purpose</b>	<b>Compliance testing of Wireless router with stipulated standard</b>
<b>Applicant / Client</b>	<b>Shanghai Feixun Communication Co., Ltd. No.3666,Sixian Rd.,Songjiang District,Shanghai,P.R.China</b>
<b>Manufacturer</b>	<b>Shanghai Feixun Communication Co., Ltd. No.3666,Sixian Rd.,Songjiang District,Shanghai,P.R.China</b>
<b>Laboratory performing the tests</b>	<b>SIEMIC (Nanjing-China) Laboratories NO.2-1,Longcang Dadao, Yuhua Economic Development Zone, Nanjing, China Tel: +86(25)86730128/86730129 Fax: +86(25)86730127 Email: China@siemic.com.cn</b>
<b>Test report reference number</b>	<b>14050049-FCC-R1</b>
<b>Date EUT received</b>	<b>July 04, 2014</b>
<b>Standard applied</b>	<b>FCC Part 15.247: 2013, ANSI C63.4: 2009</b>
<b>Dates of test (from – to)</b>	<b>July 09, 2014</b>
<b>No of Units :</b>	<b>#1</b>
<b>Equipment Category :</b>	<b>Spread Spectrum System/Device</b>
<b>Trade Name :</b>	<b>PHICOMM</b>
<b>RF Operating Frequency (ies)</b>	<b>WIFI: 802.11b/g/n(20M): 2412-2462 MHz 802.11n(40M): 2422-2452 MHz</b>
<b>Number of Channels</b>	<b>802.11b/g/n(20M): 11CH 802.11n(40M): 7CH</b>
<b>Modulation</b>	<b>802.11b/g/n: CCK/OFDM</b>
<b>Port</b>	<b>Power Port, LAN*4 Port, WAN Port</b>
<b>FCC ID :</b>	<b>YJYFIR300</b>



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless router  
Main Model: FIR302E  
Serial Model: N/A  
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 14050049-FCC-R1  
Issue Date: July 14, 2014  
Page: 7 of 42  
[www.siemic.com.cn](http://www.siemic.com.cn)

### **3 MODIFICATION**

**N/A**

## 4 TEST SUMMARY

The product was tested in accordance with the following specifications.  
 All testing has been performed according to below product classification:

### Test Results Summary

FCC Rules	Description of Test	Result
§15.247 (i), §2.1091	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.247 (a)(2)	DTS (6 dB&20 dB) CHANNEL BANDWIDTH	Compliance
§15.247(b)(3)	Conducted Maximum Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands	Compliance
§15.207 (a),	AC Power Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands	Compliance



## **5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS**

### **5.1 §15.247 (i) and §2.1091 – RF Exposure**

The EUT is a Mobile device, thus requires RF exposure evaluation;  
please refer to SIEMIC RF Exposure Report: 14050049-FCC-H1.

## **5.2 §15.203 - ANTENNA REQUIREMENT**

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

**The antenna is up to ANTENNA REQUIREMENT.**

**Result:** Compliance.

### 5.3 §15.247(a) (2) –DTS (6 dB&20 dB) CHANNEL BANDWIDTH

1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.

2. Environmental Conditions	Temperature	N/A
	Relative Humidity	N/A
	Atmospheric Pressure	N/A

3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ±1.5dB.

4. Test date : N/A

Tested By : Amos Xia

**Requirement(s):** The minimum 6 dB bandwidth of a DTS transmission shall be at least 500 kHz. Within this document, this bandwidth is referred to as the DTS bandwidth. The procedures provided herein for measuring the maximum peak conducted output power assume the use of the DTS bandwidth.

**Procedures:**

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Test Result: Please refer to Report 14050026-FCC-R1.**

## **5.4 §15.247(b) (3) - Conducted Maximum Output Power**

1. **Conducted Measurement**  
 EUT was set for low, mid, high channel with modulated mode and highest RF output power.  
 The spectrum analyzer was connected to the antenna terminal.
2. **Conducted Emissions Measurement Uncertainty**  
 All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5\text{dB}$ .
3. **Environmental Conditions**

Temperature	N/A
Relative Humidity	N/A
Atmospheric Pressure	N/A
4. Test date : N/A  
 Tested By : Amos Xia

**Standard Requirement:** One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

**Procedures:**

**RBW  $\geq$  DTS bandwidth:**

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

1. Set the RBW  $\geq$  DTS bandwidth.
2. Set VBW  $\geq 3$  RBW.
3. Set span  $\geq 3 \times$  RBW
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

**Test Result: Please refer to Report 14050026-FCC-R1.**

## **5.5 §15.247(e) - Power Spectral Density**

1. **Conducted Measurement**  
EUT was set for low, mid, high channel with modulated mode and highest RF output power.  
The spectrum analyzer was connected to the antenna terminal.
2. **Environmental Conditions**

Temperature	N/A
Relative Humidity	N/A
Atmospheric Pressure	N/A
3. **Conducted Emissions Measurement Uncertainty**  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ±1.5dB.
4. Test date : N/A  
Tested By : Amos Xia

### **Requirement(s):**

A conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the DTS bandwidth is specified during any time interval of continuous transmission. By rule, the same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e., if maximum peak conducted output power was measured then the peak PSD procedure shall be used and if maximum conducted output power was measured then the average PSD procedure shall be used).

If the average PSD is measured with a power averaging (RMS) detector or a sample detector, then the spectrum analyzer must be capable of utilizing a number of measurement points in each sweep that is greater than or equal to twice the span/RBW in order to ensure bin-to-bin spacing of  $\leq RBW/2$  so that narrowband signals are not lost between frequency bins.

### **Procedures:**

This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW  $\geq 3$  kHz.
4. Set the VBW  $\geq 3 \times$  RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

**Test Result: Please refer to Report 14050026-FCC-R1.**

## 5.6 §15.247(d) –Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))
- |                          |                      |     |
|--------------------------|----------------------|-----|
| Environmental Conditions | Temperature          | N/A |
|                          | Relative Humidity    | N/A |
|                          | Atmospheric Pressure | N/A |
- Test date : N/A  
Tested By : Amos Xia

### **Standard Requirement:**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Procedures: (Radiated Method Only)**

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below:
  - The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.
  - The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
  - The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth for Average detection (AV) as below at frequency above 1GHz.

1 kHz (Duty cycle < 98%)       10 Hz (Duty cycle > 98%)
- Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- Repeat above procedures until all measured frequencies were complete.

**Note:**

For Hopping device, should test hopping mode and CW Tx mode separately. For hopping mode, find out the worst points outside the frequency band firstly, then set the worst points as the center frequency, use above average 3 (c) spectrum analyzer set, find out the final worst average value separately.

**Test Result: Please refer to Report 14050026-FCC-R1.**

## **5.7 §15.207 (a) - AC Power Line Conducted Emissions**

Requirement:

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

\*Decreases with the logarithm of the frequency.


### **Procedures:**

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is  $\pm 3.5$ dB.
4. Environmental Conditions

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
5. Test date: July 09, 2014  
Tested By : Amos Xia



<b>Test Mode:</b>	<b>Transmitting Mode(Adapter: RD1200500-C55-8MG)</b>
-------------------	--

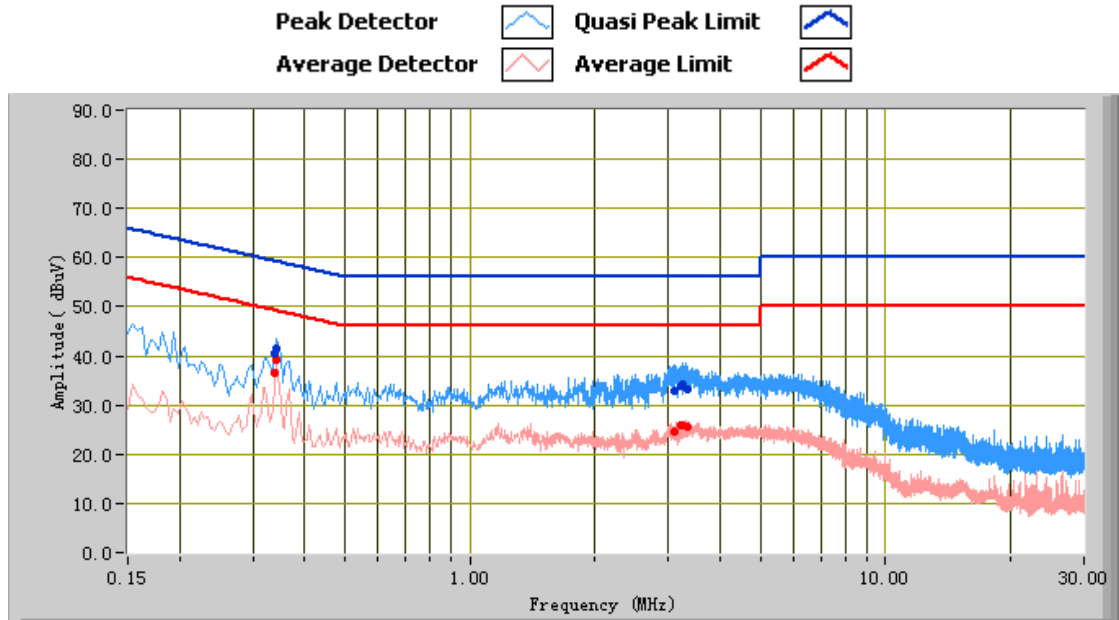


**Test Data**

**Phase Line Plot at 120Vac, 60Hz**

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Factors (dB)
0.34	41.68	59.16	-17.48	39.33	49.16	-9.83	11.32
3.26	34.20	56.00	-21.80	25.98	46.00	-20.02	10.88
3.11	32.72	56.00	-23.28	24.74	46.00	-21.26	10.88
3.21	33.95	56.00	-22.05	25.74	46.00	-20.26	10.88
0.34	40.57	59.25	-18.68	36.56	49.25	-12.69	11.32
3.34	33.22	56.00	-22.78	25.60	46.00	-20.40	10.88

<b>Test Mode:</b>	<b>Transmitting Mode(Adapter: RD1200500-C55-8MG)</b>
-------------------	--

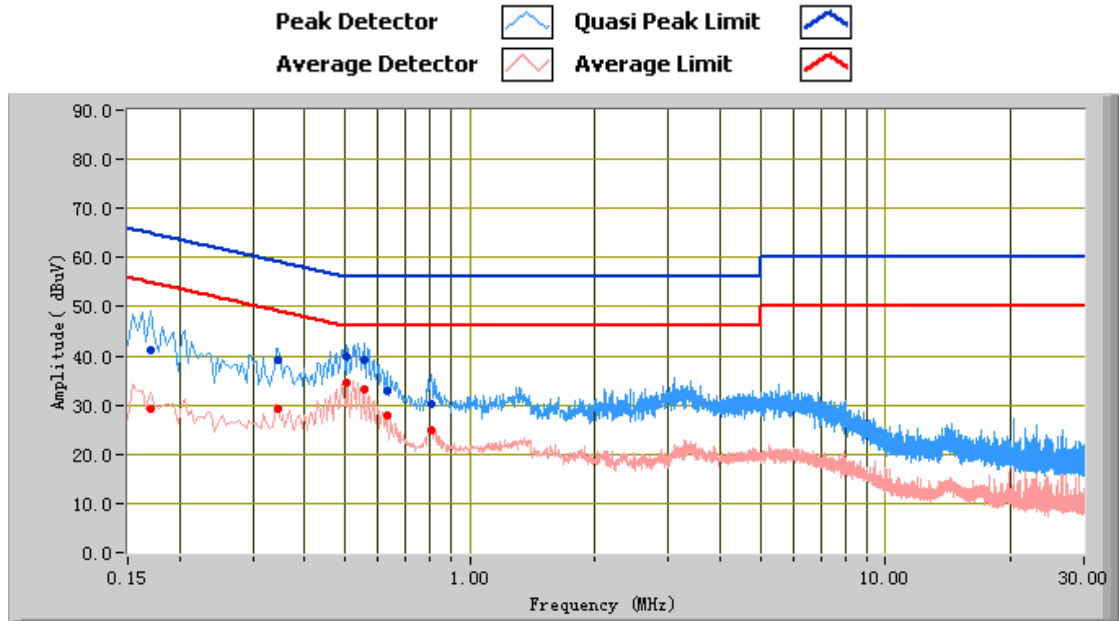


**Test Data**

**Phase Neutral Plot at 120Vac, 60Hz**

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Factors (dB)
0.55	39.24	56.00	-16.76	33.36	46.00	-12.64	11.02
0.51	39.84	56.00	-16.16	34.53	46.00	-11.47	11.05
0.17	41.24	64.96	-23.72	29.36	54.96	-25.60	11.93
0.35	39.15	59.06	-19.91	29.38	49.06	-19.68	11.30
0.63	32.94	56.00	-23.06	27.88	46.00	-18.12	10.97
0.81	30.14	56.00	-25.86	24.93	46.00	-21.07	10.84

<b>Test Mode:</b>	<b>Transmitting Mode(Adapter: PSAA06A-120)</b>
-------------------	--

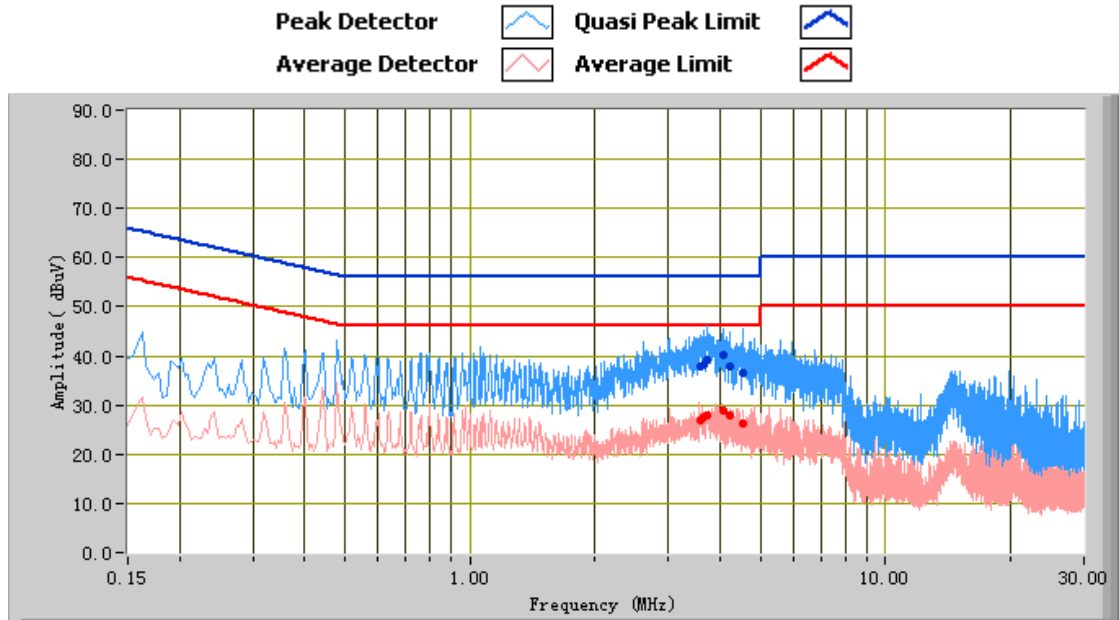


**Test Data**

**Phase Line Plot at 120Vac, 60Hz**

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Factors (dB)
3.72	39.24	56.00	-16.76	27.90	46.00	-18.10	10.89
4.53	36.45	56.00	-19.55	26.09	46.00	-19.91	10.89
4.06	40.03	56.00	-15.97	28.88	46.00	-17.12	10.89
3.65	38.19	56.00	-17.81	27.44	46.00	-18.56	10.89
4.20	37.83	56.00	-18.17	27.77	46.00	-18.23	10.89
3.57	37.79	56.00	-18.21	26.85	46.00	-19.15	10.88

<b>Test Mode:</b>	<b>Transmitting Mode(Adapter: PSAA06A-120)</b>
-------------------	--

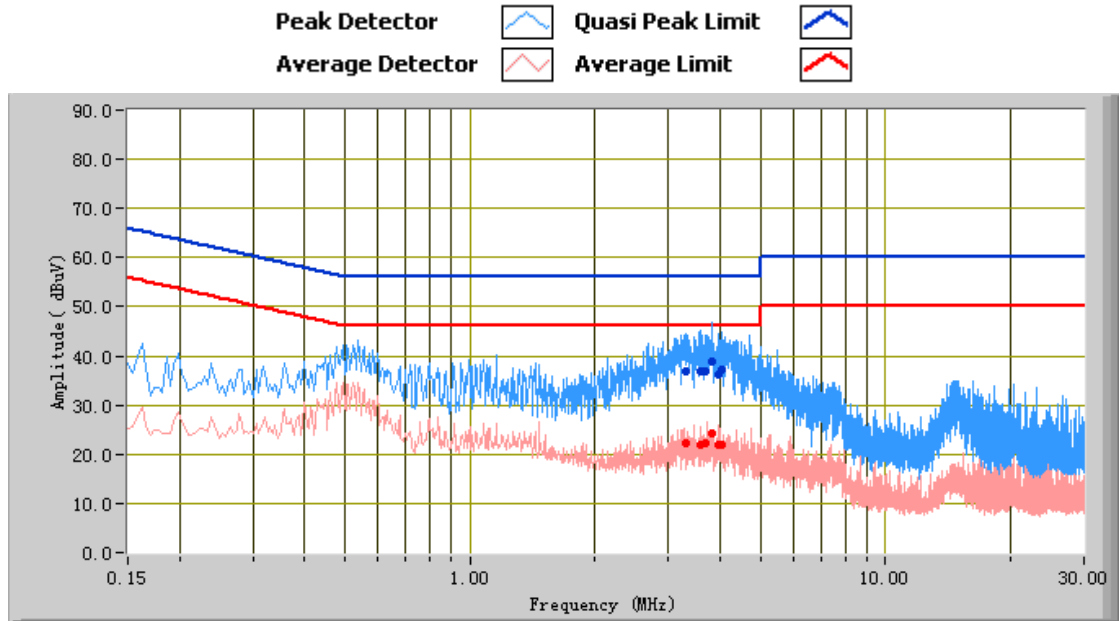

**Test Data**

**Phase Neutral Plot at 120Vac, 60Hz**

Frequency (MHz)	Quasi Peak (dBµV)	Limit (dBµV)	Margin (dB)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Factors (dB)
3.83	38.99	56.00	-17.01	24.11	46.00	-21.89	10.94
3.59	37.02	56.00	-18.98	21.90	46.00	-24.10	10.94
4.04	37.06	56.00	-18.94	21.79	46.00	-24.21	10.94
3.31	36.76	56.00	-19.24	22.32	46.00	-23.68	10.93
3.96	36.15	56.00	-19.85	22.00	46.00	-24.00	10.94
3.67	36.80	56.00	-19.20	22.14	46.00	-23.86	10.94

## **5.8 §15.209, §15.205 & §15.247(d) - Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands**

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 1GHz & 1GHz above ( 3m & 10m) is +/-6dB.
4. Environmental Conditions
 

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
5. Test date : July 09, 2014  
Tested By : Amos Xia

### **Requirement:**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Procedures:**

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
  - a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
  - b. The EUT was then rotated to the direction that gave the maximum emission.
  - c. Finally, the antenna height was adjusted to the height that gave the maximum emission.
3. A Quasi-peak measurement was then made for that frequency point for below 1GHz test, PK and AV for above 1GHz emission test.
  - a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.
  - b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
  - c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth for Average detection (AV) as below at frequency above 1GHz.



1 kHz (Duty cycle < 98%)       10 Hz (Duty cycle > 98%)


4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.

**Test Result: Pass**

<b>Test Mode:</b>	<b>Transmitting Mode(Adapter: RD1200500-C55-8MG)</b>
-------------------	--

**(Below 1GHz)**

Peak Detector   
 Quasi Peak Limit 

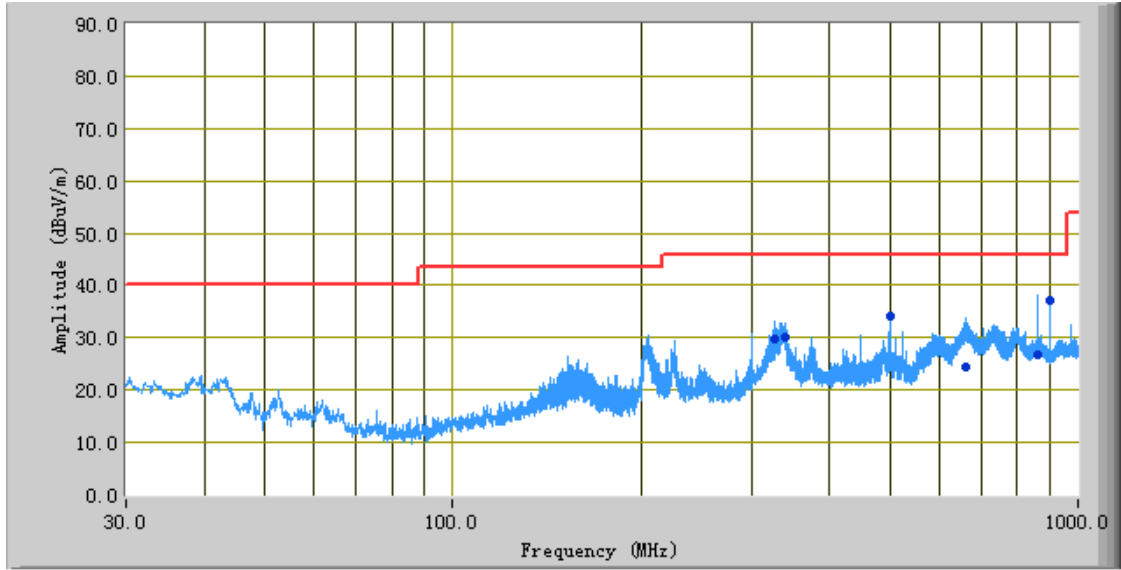



**Test Data**


**Vertical & Horizontal Polarity Plot @3m**

Frequency (MHz)	Quasi Peak (dBµV/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dBµV/m)	Margin (dB)
862.51	26.84	215.00	H	311.00	-18.06	46.00	-19.16
500.03	34.25	230.00	V	100.00	-28.70	46.00	-11.75
660.62	24.56	249.00	V	99.00	-20.82	46.00	-21.44
900.01	37.01	178.00	H	175.00	-18.77	46.00	-8.99
326.26	29.74	200.00	V	146.00	-28.86	46.00	-16.26
339.60	30.18	223.00	V	148.00	-28.47	46.00	-15.82

**Test Mode:**      **Transmitting Mode (Adapter: PSAA06A-120)**

**(Below 1GHz)**

Peak Detector   
 Quasi Peak Limit 

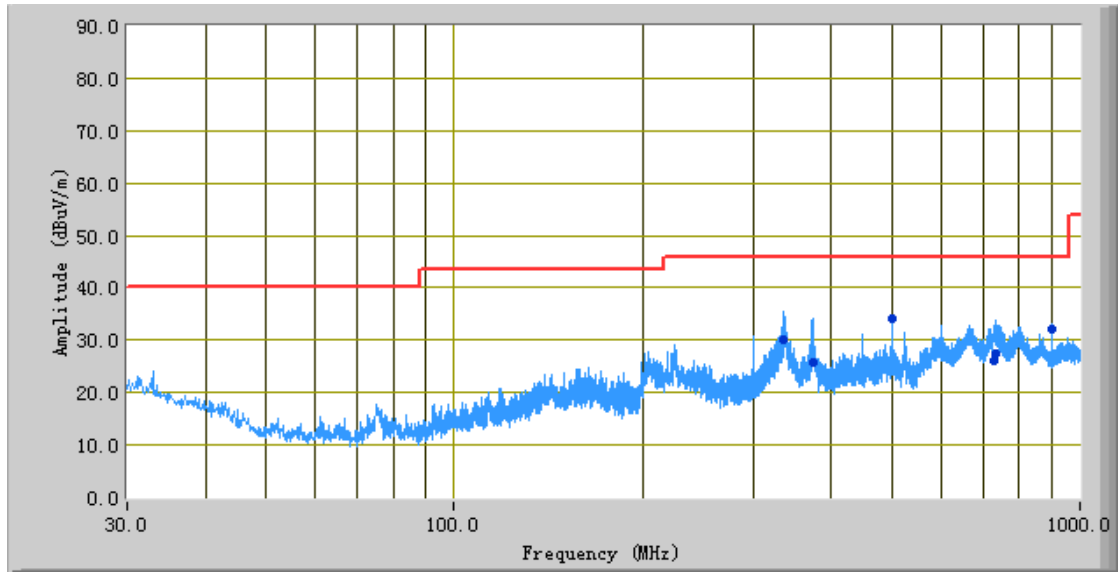

**Test Data**

**Vertical & Horizontal Polarity Plot @3m**

Frequency (MHz)	Quasi Peak (dBµV/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dBµV/m)	Margin (dB)
336.80	29.99	271.00	V	174.00	-28.55	46.00	-16.01
500.00	34.23	236.00	V	107.00	-28.70	46.00	-11.77
375.04	25.77	214.00	V	147.00	-28.33	46.00	-20.23
735.96	27.38	32.00	V	185.00	-19.28	46.00	-18.62
900.00	32.27	4.00	H	207.00	-18.77	46.00	-13.73
727.78	26.20	83.00	V	204.00	-19.38	46.00	-19.80



**Above 1 GHz (Adapter: RD1200500-C55-8MG):**

*Test Mode: Transmitting*

**Note: Other modes were verified, only the result of worst case basic rate mode was presented.**

**Mode: 802.11b**  
Low Channel (2412 MHz)

Frequency (MHz)	Substituted level (dBµV/m)	Detector (PK/AV)	Direction (degree)	Height (cm)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4823.51	71.55	AV	325	150	V	32.5	2.83	55	51.88	54	-2.12
4823.51	70.56	AV	156	253	H	32.3	2.83	55	50.69	54	-3.31
4823.51	88.02	PK	59	150	V	32.5	2.83	55	68.35	74	-5.65
4823.51	85.23	PK	258	214	H	32.3	2.83	55	65.36	74	-8.64
3510.26	60.23	AV	311	140	V	30.3	2.66	55	38.19	54	-15.81
3510.26	55.23	AV	258	223	H	30.2	2.66	55	33.09	54	-20.91
3510.26	69.11	PK	199	140	V	30.3	2.66	55	47.07	74	-26.93
3510.26	68.02	PK	225	236	H	30.2	2.66	55	45.88	74	-28.12

Middle Channel (2437 MHz)

Frequency (MHz)	Substituted level (dBµV/m)	Detector (PK/AV)	Direction (degree)	Height (cm)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4873.19	64.05	AV	311	120	V	32.5	2.83	55	44.38	54	-9.62
4873.19	65.22	AV	258	120	H	32.3	2.83	55	45.35	54	-8.65
4873.19	75.02	PK	311	120	V	32.5	2.83	55	55.35	74	-18.65
4873.19	71.55	PK	258	120	H	32.3	2.83	55	51.68	74	-22.32
3881.02	50.03	AV	199	100	V	30.3	2.66	55	27.99	54	-26.01
3881.02	49.26	AV	225	130	H	30.2	2.66	55	27.12	54	-26.88
3881.02	55.23	PK	199	100	V	30.3	2.66	55	33.19	74	-40.81
3881.02	59.26	PK	225	130	H	30.2	2.66	55	37.12	74	-36.88

High Channel (2462 MHz)

Frequency (MHz)	Substituted level (dBµV/m)	Detector (PK/AV)	Direction (degree)	Height (cm)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4924.36	60.29	AV	156	201	V	32.5	2.83	55	40.62	54	-13.38
4924.36	63.89	AV	23	215	H	32.3	2.83	55	44.02	54	-9.98
4924.36	75.99	PK	15	156	V	32.5	2.83	55	56.32	74	-17.68
4924.36	78.97	PK	151	235	H	32.3	2.83	55	59.1	74	-14.9
2051.56	50.2	AV	45	198	V	26.9	2.34	55	24.44	54	-29.56
2051.56	49.65	AV	205	251	H	26.6	2.34	55	23.59	54	-30.41
2051.56	56.98	PK	262	154	V	26.9	2.34	55	31.22	74	-42.78
2051.56	55.78	PK	36	122	H	26.6	2.34	55	29.72	74	-44.28

**Above 1 GHz (Adapter: PSAA06A-120):**

*Test Mode: Transmitting*

**Note: Other modes were verified, only the result of worst case basic rate mode was presented.**

**Mode: 802.11b**  
Low Channel (2412 MHz)

Frequency (MHz)	Substituted level (dBµV/m)	Detector (PK/AV)	Direction (degree)	Height (cm)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4823.51	64.89	AV	154	102	V	32.5	2.83	55	45.22	54	-8.78
4823.51	62.59	AV	12	251	H	32.3	2.83	55	42.72	54	-11.28
4823.51	77.15	PK	125	201	V	32.5	2.83	55	57.48	74	-16.52
4823.51	80.19	PK	202	165	H	32.3	2.83	55	60.32	74	-13.68
2015.72	50.15	AV	26	154	V	26.9	2.34	55	24.39	54	-29.61
2015.72	56.56	AV	45	202	H	26.6	2.34	55	30.5	54	-23.5
2015.72	63.33	PK	35	168	V	26.9	2.34	55	37.57	74	-36.43
2015.72	66.18	PK	321	252	H	26.6	2.34	55	40.12	74	-33.88

Middle Channel (2437 MHz)

Frequency (MHz)	Substituted level (dBµV/m)	Detector (PK/AV)	Direction (degree)	Height (cm)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4873.48	67.21	AV	151	102	V	32.5	2.83	55	47.54	54	-6.46
4873.48	65.19	AV	262	151	H	32.3	2.83	55	45.32	54	-8.68
4873.48	80.15	PK	2	232	V	32.5	2.83	55	60.48	74	-13.52
4873.48	79.98	PK	23	256	H	32.3	2.83	55	60.11	74	-13.89
2051.56	56.88	AV	203	154	V	26.9	2.34	55	31.12	54	-22.88
2051.56	52.99	AV	4	252	H	26.6	2.34	55	26.93	54	-27.07
2051.56	70.56	PK	15	265	V	26.9	2.34	55	44.8	74	-29.2
2051.56	69.05	PK	156	189	H	26.6	2.34	55	42.99	74	-31.01

High Channel (2462 MHz)

Frequency (MHz)	Substituted level (dBµV/m)	Detector (PK/AV)	Direction (degree)	Height (cm)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4923.88	69.56	AV	56	121	V	32.5	2.83	55	49.89	54	-4.11
4923.88	67.89	AV	221	202	H	32.3	2.83	55	48.02	54	-5.98
4923.88	79.05	PK	154	165	V	32.5	2.83	55	59.38	74	-14.62
4923.88	80.15	PK	262	236	H	32.3	2.83	55	60.28	74	-13.72
1987.05	60.26	AV	265	255	V	25	1.84	55	32.1	54	-21.9
1987.05	58.15	AV	202	159	H	25.2	1.84	55	30.19	54	-23.81
1987.05	62.01	PK	145	202	V	25	1.84	55	33.85	74	-40.15
1987.05	64.05	PK	255	150	H	25.2	1.84	55	36.09	74	-37.91

## Annex A. TEST INSTRUMENT

### Annex A.i. TEST INSTRUMENTATION

Instrument	Model	Serial #	Calibration Date	Calibration Due Date
<b>AC Line Conducted Emissions</b>				
R&S EMI Test Receiver	ESPI3	101216	09/27/2013	09/26/2014
V-LISN	ESH3-Z5	838979/005	09/27/2013	09/26/2014
Com-Power Transient Limiter	LIT-153	531021	09/27/2013	09/26/2014
Universal Radio Communication Tester	CMU200	104031	09/27/2013	09/26/2014
A- INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120092	10/09/2013	10/08/2014
SIEMIC Labview Conducted Emissions software	V1.0	N/A	N/A	N/A
<b>RF conducted test</b>				
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	CFG038	10/25/2013	10/24/2014
Power Splitter	1#	1#	02/02/2014	02/01/2015
Temperature/Humidity Chamber	1007H	N/A	01/07/2014	01/06/2015
DC Power Supply	E3640A	MY40004013	03/22/2014	03/21/2015
<b>Radiated Emissions</b>				
Hp Spectrum Analyzer	8563E	3821A09023	09/27/2013	09/26/2014
R&S EMI Receiver	ESPI3	101216	09/27/2013	09/26/2014
Antenna (30MHz~6GHz)	JB6	A121411	04/15/2014	04/14/2015
EMCO Horn Antenna (1 ~18GHz)	3115	N/A	10/09/2013	10/08/2014
A- INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120092	10/09/2013	10/08/2014
Horn Antenna (18~40GHz)	AH-840	101013	04/22/2014	04/22/2015
Microwave Pre-Amp (18~40GHz)	PA-840	181250	05/29/2014	05/28/2015
Hp Agilent Pre-Amplifier	8447F	1937A01160	10/27/2013	10/26/2014
MITEQ Pre-Amplifier (0.1 ~ 18GHz)	AMF-7D-00101800-30-10P	1451709	10/27/2013	10/26/2014
Universal Radio Communication Tester	CMU200	104031	09/27/2013	09/26/2014

**Annex B. EUT AND TEST SETUP PHOTOGRAPHS**

**Annex B.i. Photograph : EUT External Photo**



All Packages – Front View




EUT - Front View



EUT - Rear View



EUT – Top View

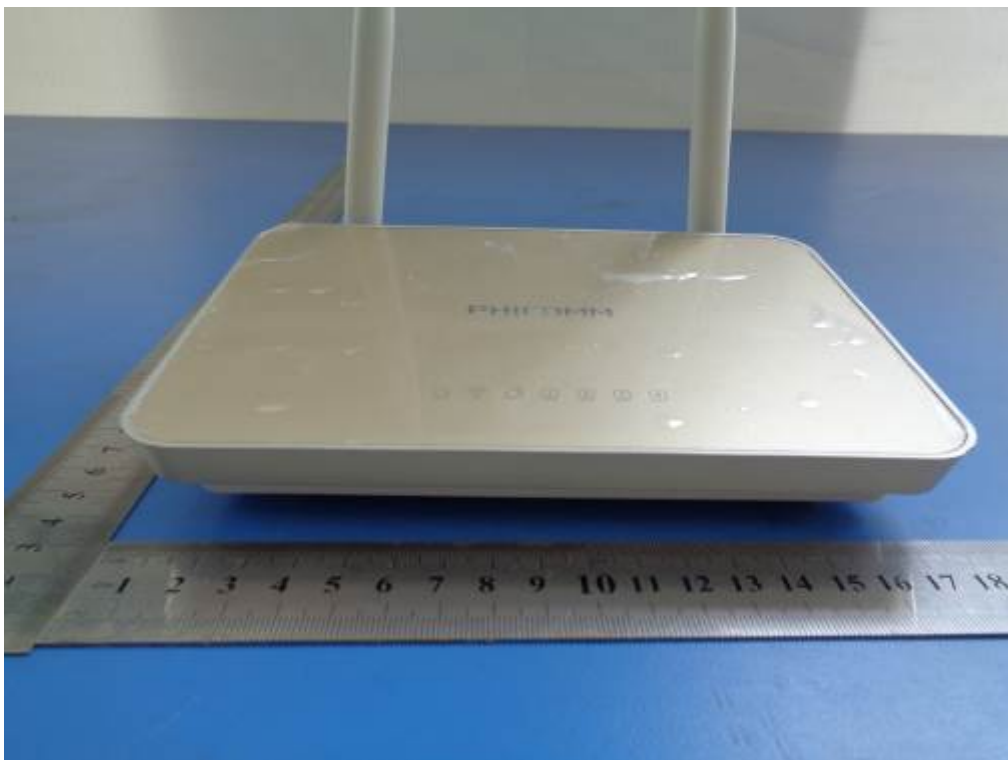

EUT – Bottom View



**SIEMIC, Inc.**

Accessing global markets

Title: RF Test Report for Wireless router

Main Model: FIR302E

Serial Model: N/A

To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.:

14050049-FCC-R1


Issue Date:

July 14, 2014

Page:

31 of 42

[www.siemic.com.cn](http://www.siemic.com.cn)

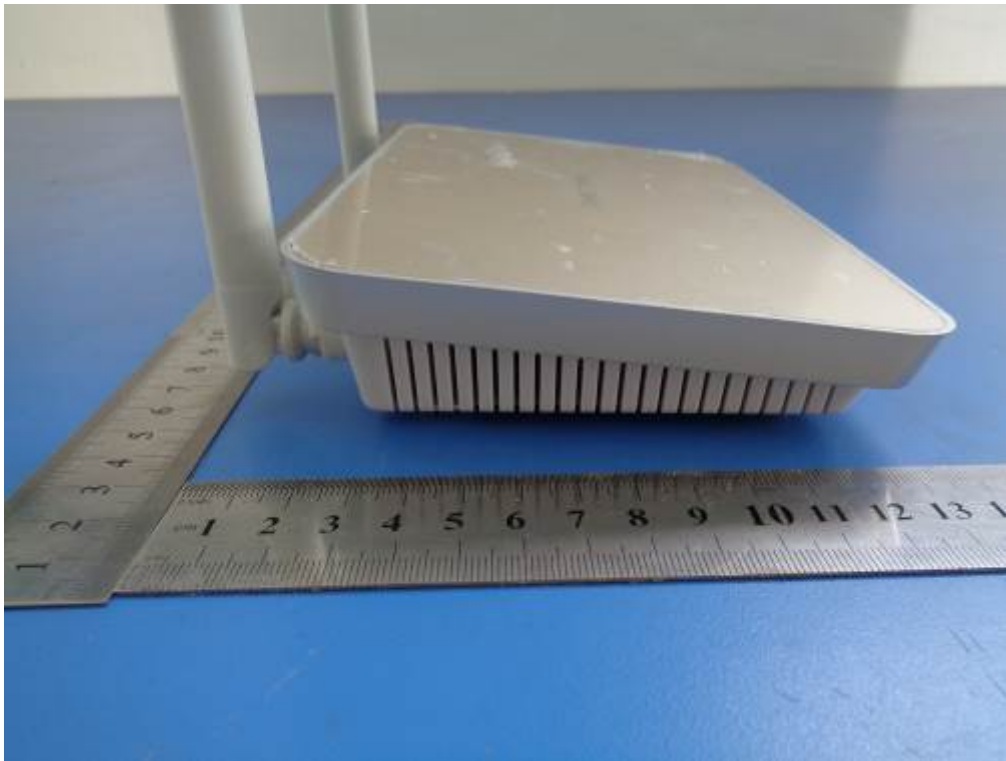


EUT – Left View




EUT – Right View

**Annex B.ii. Photograph 2: EUT Internal Photo**

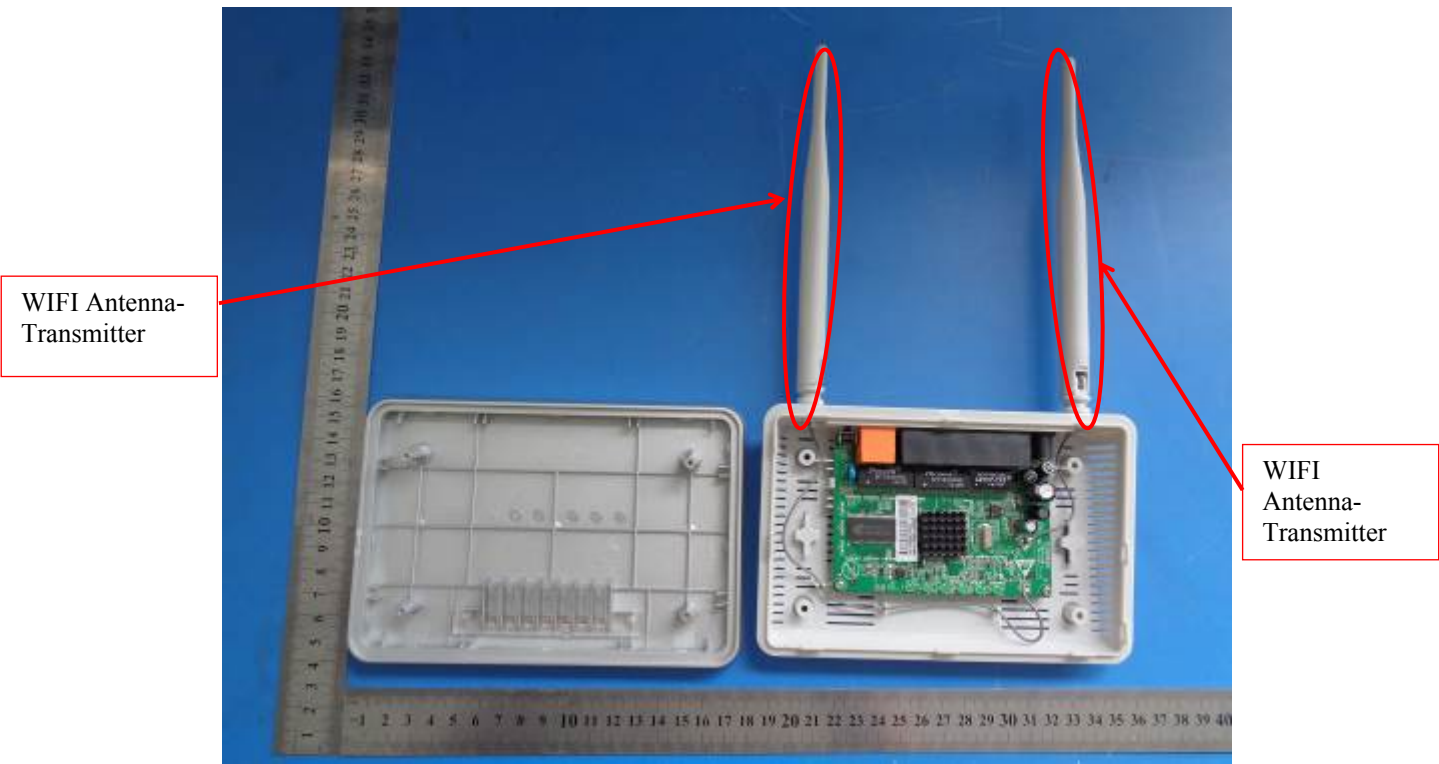

EUT – Uncover Front View 1

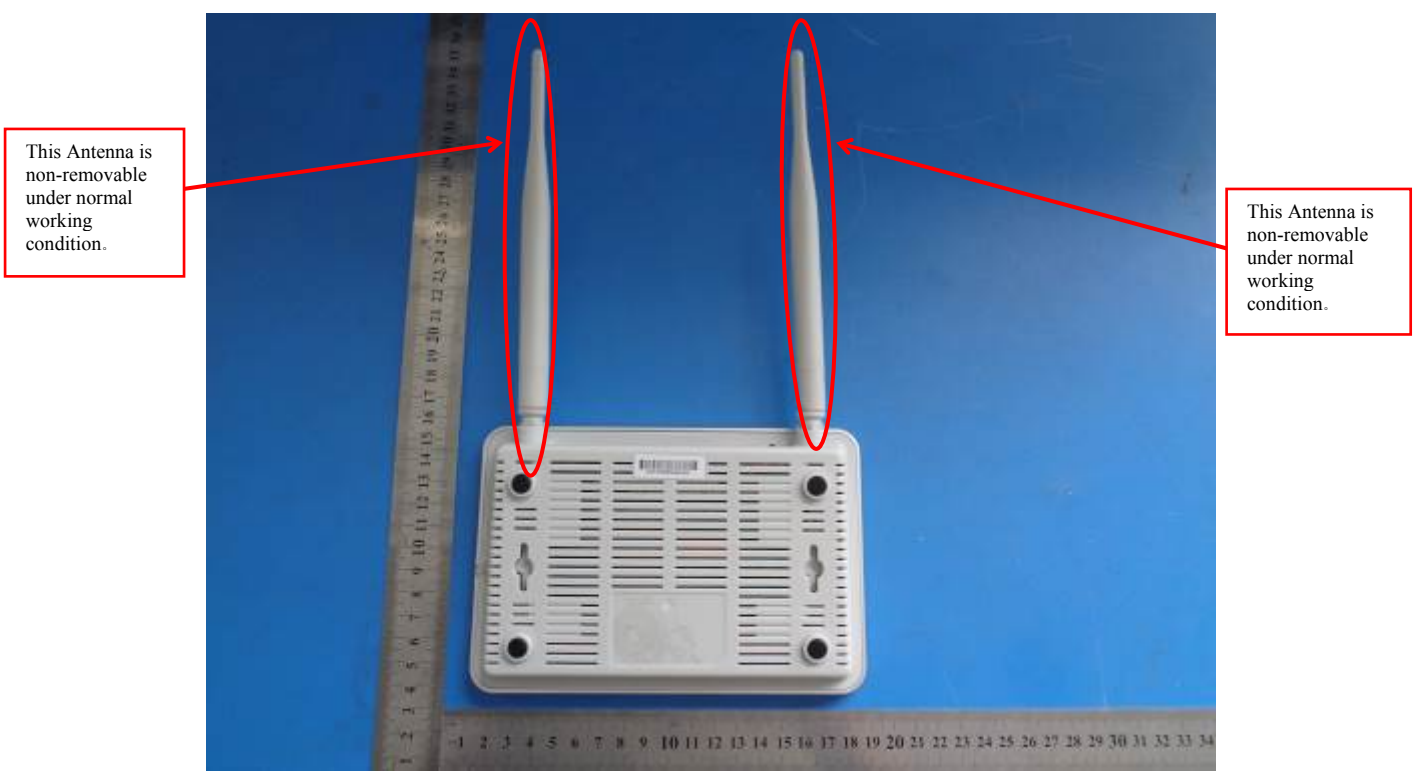


EUT – Uncover Front View 2






EUT – PCB Front View

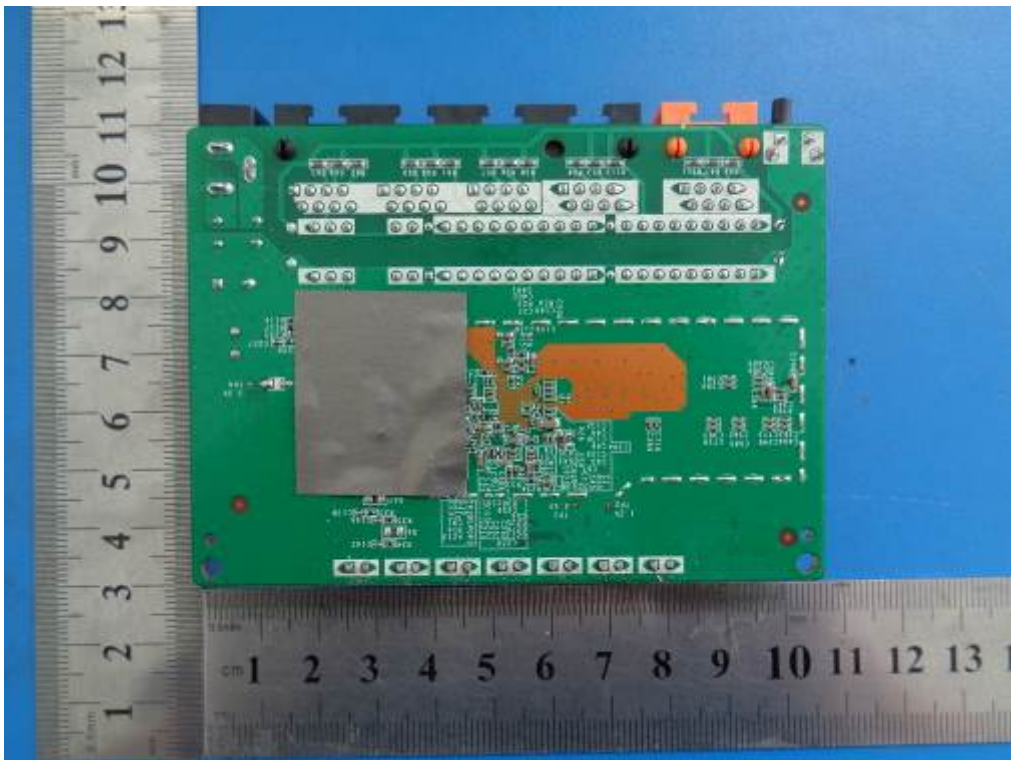

EUT – PCB Rear View

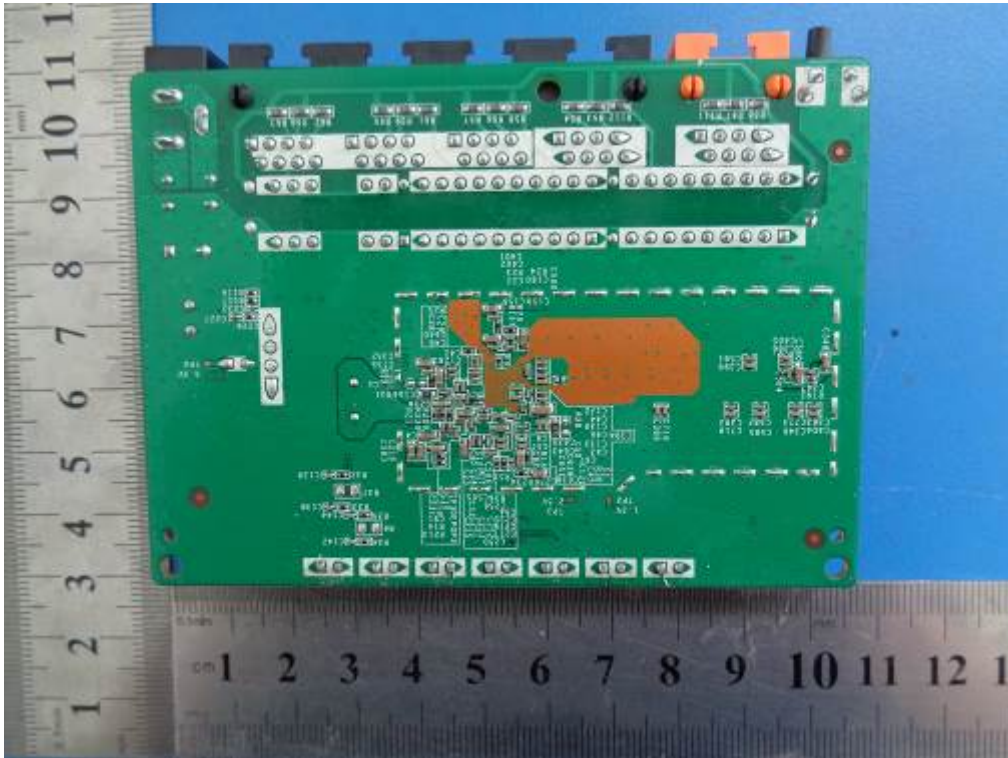

EUT – PCB Rear View(without shielding)



**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless router  
Main Model: FIR302E  
Serial Model: N/A  
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 14050049-FCC-R1  
Issue Date: July 14, 2014  
Page: 35 of 42  
www.siemic.com.cn

**Annex B.iii. Photograph 3: Test Setup Photo**




Conducted Emissions Test Setup – Front View



Conducted Emissions Test Setup – Side View



Radiated Spurious Emissions Test Setup Below 1GHz - Front View

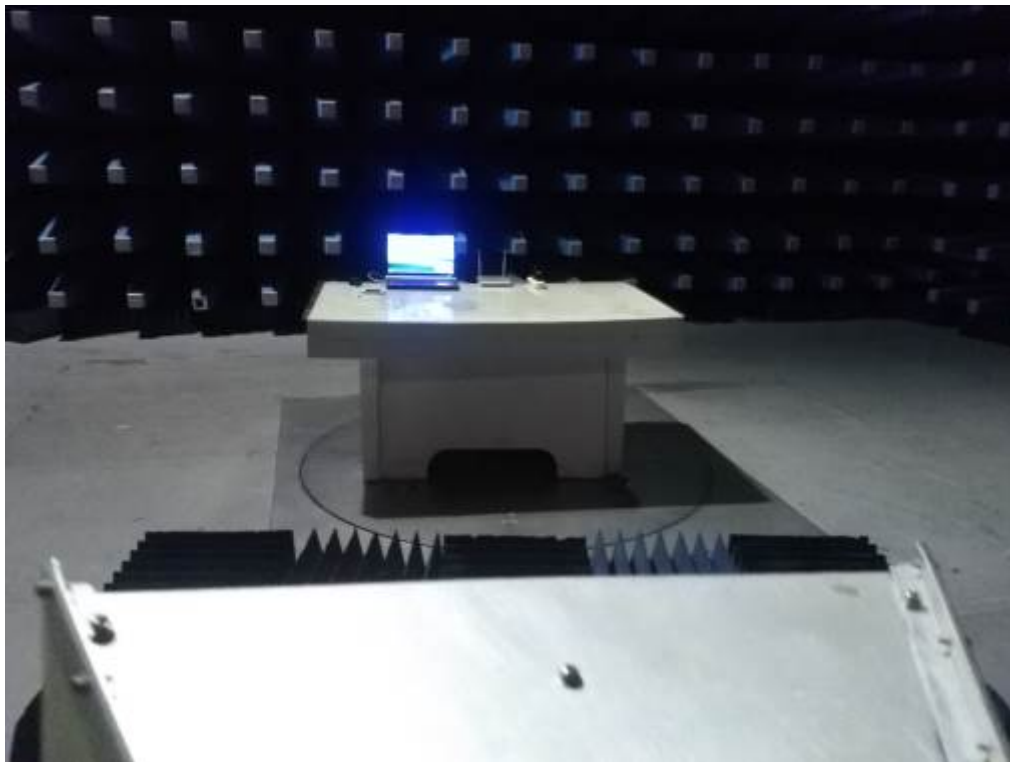

Radiated Spurious Emissions Test Setup Above 1GHz - Front View

**Annex C. TEST SETUP AND SUPPORTING EQUIPMENT**

**EUT TEST CONDITIONS**

**Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION**

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description (Including Brand Name)	Model	Calibration Date	Calibration Due Date
Gateway	Laptop	MS2288 & LXWHF02013951C3CA 92200	N/A	N/A




**SIEMIC, INC.**

Accessing global markets


Title: RF Test Report for Wireless router  
Main Model: FIR302E  
Serial Model: N/A  
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 14050049-FCC-R1  
Issue Date: July 14, 2014  
Page: 38 of 42  
www.siemic.com.cn

## Block Configuration Diagram for Conducted Emissions

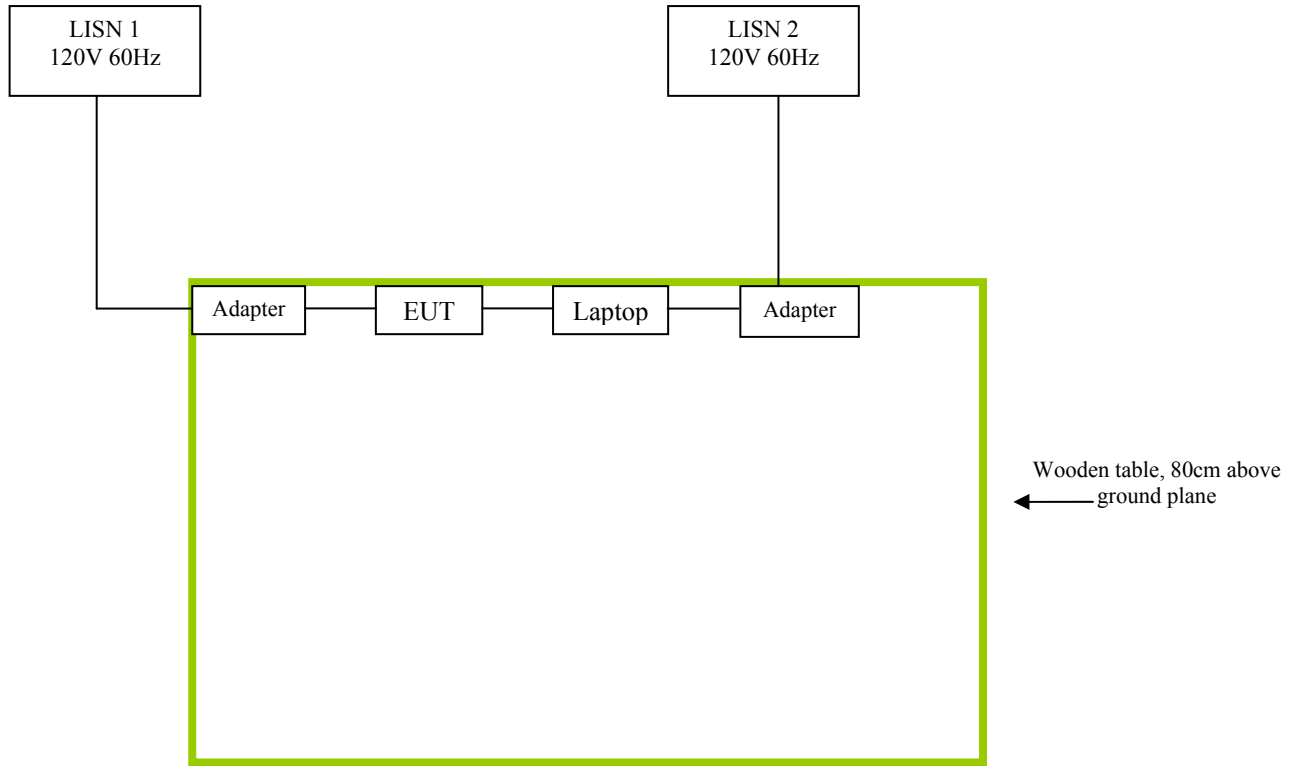

### Block Configuration Diagram for Radiated Emission

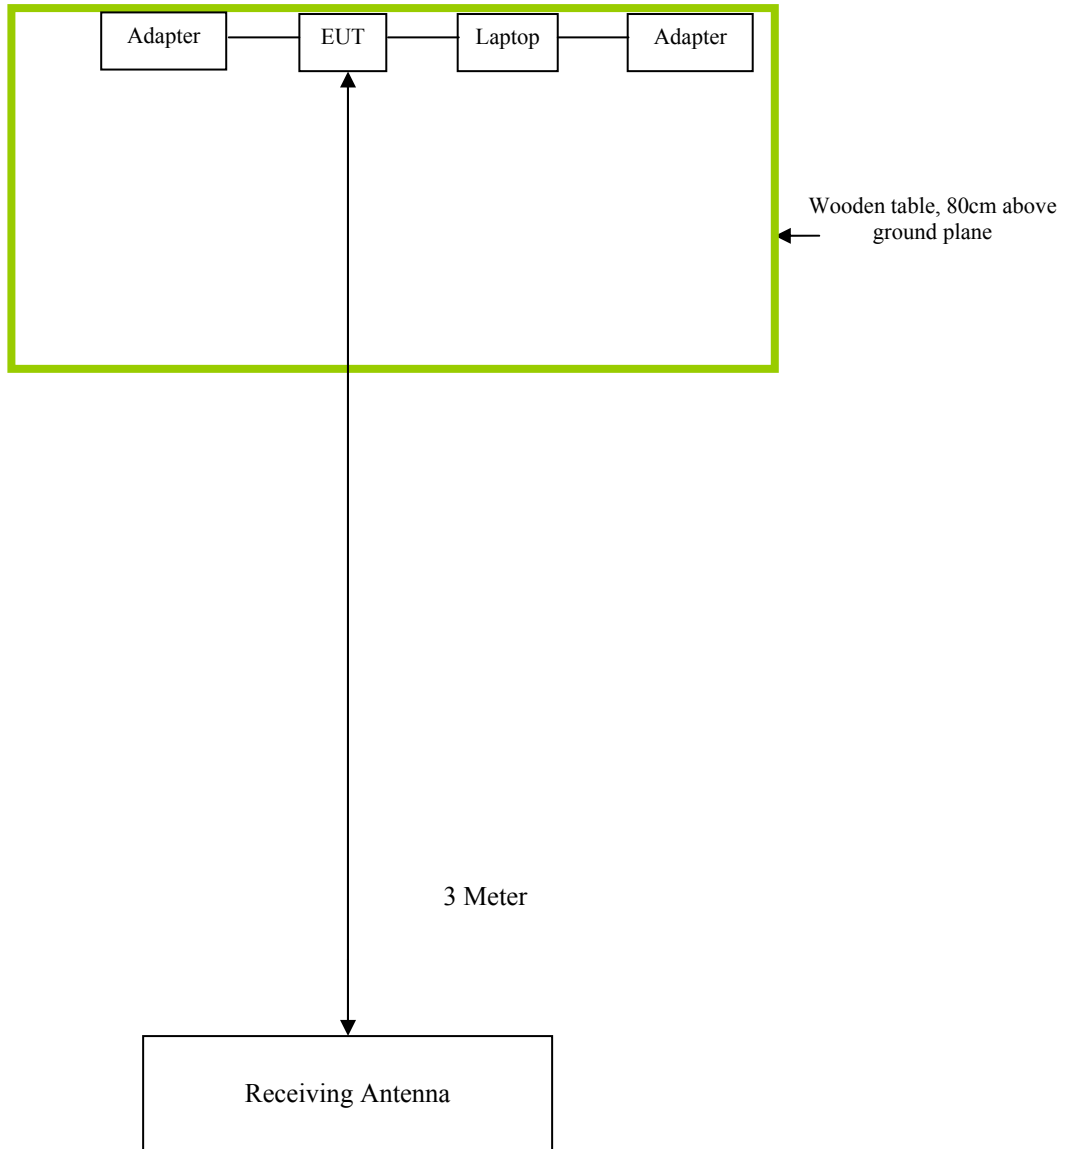

**Annex C.ii. EUT OPERATING CONDITIONS**

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
<b>Emissions Testing</b>	The EUT was continuously transmitting to stimulate the worst case.





**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for Wireless router  
Main Model: FIR302E  
Serial Model: N/A  
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 14050049-FCC-R1  
Issue Date: July 14, 2014  
Page: 41 of 42  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **Annex D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST**

**Please see attachment**



**SIEMIC, Inc.**

Accessing global markets

Title: RF Test Report for Wireless router  
Main Model: FIR302E  
Serial Model: N/A  
To: FCC Part 15.247: 2013, ANSI C63.4: 2009

Report No.: 14050049-FCC-R1  
Issue Date: July 14, 2014  
Page: 42 of 42  
www.siemic.com.cn

## **Annex E. DECLARATION OF SIMILARITY**

(Shanghai Feixun Communication CO.,Ltd.)

---

To SIEMIC Inc  
775 Montague Expressway Milpitas, CA 95035

### **Statement**

We, Shanghai Feixun Communication Co., Ltd. apply a class II permissive change certification for the below models.

Product Name: Wireless router

Model number: FIR302E

FCC ID: YJYFIR300

We hereby state that these models are identical in interior structure, electrical circuits and PCB layout; Only the appearance size and Antenna Color is different.

Your assistance on this matter is highly appreciated.

Sincerely,

Name: Emmy. Xiong

Title: Certification Engineer

Signature: