

September 7, 2021

Trimble Jena GmbH
Carl-Zeiss-Promenade 10
Jena 07743, Germany

Dear Eyk Taege,

Enclosed is the Wireless test report for compliance testing of the Trimble Jena GmbH, Trimble Comm Board Hurricane (V0013E), as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15 Subpart C for Intentional Radiators and Industry Canada RSS-247.

Thank you for using the services of Eurofins Electrical and Electronic Testing NA, Inc. Please contact me if you have any questions regarding these results or if Eurofins E&E can be of further service to you.

Sincerely,



Documentation Department
Eurofins Electrical and Electronic Testing NA, Inc.

Reference: WIR113635-FCC15.247-RSS247-BT-BLE Rev 2



Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins Electrical and Electronic Testing NA, Inc. While use of the A2LA logo in this report reflects Eurofins Electrical and Electronic Testing NA, Inc. accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.

Eurofins Electrical and Electronic Testing NA, Inc. is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

Electromagnetic Compatibility Criteria Test Report

for the

**Trimble Jena GmbH
Trimble Comm Board Hurricane (V0013E)**

Tested under
the FCC Certification Rules
contained in
15.247 Subpart C for Intentional Radiators
and
Industry Canada Standards
RSS-247

Report: WIR113635-FCC15.407-RSS247-BT-BLE Rev 2

September 7, 2021

Prepared For:

**Trimble Jena GmbH
Carl-Zeiss-Promenade 10
Jena 07743, Germany**

Prepared By:
Eurofins Electrical and Electronic Testing NA, Inc.
3162 Belick St.
Santa Clara, CA 95054

Electromagnetic Compatibility Criteria Test Report

for the


Trimble Jena GmbH
Trimble Comm Board Hurricane (V0013E)

Tested under
the FCC Certification Rules
contained in
15.247 Subpart C for Intentional Radiators
and
Industry Canada Standards
RSS-247



Arsalan Hasan
Project Engineer, Electromagnetic Compatibility Lab

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.247 under normal use and maintenance.



Eleazar Zuniga,
Director, Wireless Laboratory

Report Status Sheet

Revision	Report Date	Reason for Revision
∅	August 2, 2021	Initial Issue
1	August 29, 2021	TCB Review Updates
2	September 7, 2021	TCB Review Updates

Table of Contents

I.	Executive Summary	1
A.	Purpose of Test	1
B.	Executive Summary	1
II.	Equipment Configuration	3
A.	Overview.....	3
B.	References.....	4
C.	Test Site	4
D.	Measurement Uncertainty	5
E.	Description of Test Sample.....	5
F.	Modifications	9
a)	Modifications to EUT.....	9
b)	Modifications to Test Standard.....	9
G.	Disposition of EUT	9
III.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	9
	§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge.....	10
IV.	Test Equipment	20

Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Trimble Jena GmbH, Trimble Comm Board Hurricane (V0013E), with the requirements of Part 15, §15.247 and RSS-247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the Trimble Comm Board Hurricane (V0013E). Trimble Jena GmbH should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Trimble Comm Board Hurricane (V0013E), has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247 and RSS-247, in accordance with Trimble Jena GmbH, purchase order number PO20210214. All tests were conducted using measurement procedure ANSI C63.10-2013.

FCC Reference 47 CFR Part 15.247	Description	Compliance
Title 47 of the CFR, Part 15 §15.203	Antenna Requirement	Data valid from original filing of FCC ID: YK5-73350046
Title 47 of the CFR, Part 15 §15.207(a)	Conducted Emission Limits	Not Applicable
Title 47 of the CFR, Part 15 §15.247(a)(1)	20 dB Occupied Bandwidth	Data valid from original filing of FCC ID: YK5-73350046
Title 47 of the CFR, Part 15 §15.247(a)(1)	Average Time of Occupancy (Dwell Time)	Data valid from original filing of FCC ID: YK5-73350046
Title 47 of the CFR, Part 15 §15.247(a)(1)	Number of RF Channels	Data valid from original filing of FCC ID: YK5-73350046
Title 47 of the CFR, Part 15 §15.247(a)(1)	RF Channel Separation	Data valid from original filing of FCC ID: YK5-73350046
Title 47 of the CFR, Part 15 §15.247(b)	Peak Power Output	Data valid from original filing of FCC ID: YK5-73350046
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	Radiated Spurious Emissions	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	Spurious Conducted Emissions	Data valid from original filing of FCC ID: YK5-73350046

Executive Summary of WIR Part 15.247 Compliance Testing

IC Reference RSS-247 Issue 2, 2017; RSS-GEN Issue 4: 2014	Description	Compliance
RSS-GEN(8.8)	Conducted Emission Limits	Not Applicable - EUT is DC powered device.
RSS-GEN(6.6) & RSS-247 (5.1)	20 dB Occupied Bandwidth	Data valid from original filing of IC: 9288A-73350046
	99% Occupied Bandwidth	Data valid from original filing of IC: 9288A-73350046
RSS-247 (5.1)	Average Time of Occupancy (Dwell Time)	Data valid from original filing of IC: 9288A-73350046
RSS-247 (5.1)	Number of RF Channels	Data valid from original filing of IC: 9288A-73350046
RSS-247 (5.1)	RF Channel Separation	Data valid from original filing of IC: 9288A-73350046
RSS-247(5.4)	Peak Power Output	Data valid from original filing of IC: 9288A-73350046
RSS-GEN (6.13), (8.9), & (8.10)	Radiated Spurious Emissions	Compliant
RSS-247(5.5)	Spurious Conducted Emissions	Data valid from original filing of IC: 9288A-73350046t
RSS-GEN(7.4)	Receiver Emissions - Conducted	Data valid from original filing of IC: 9288A-73350046

Executive Summary of WIR RSS-247 Compliance Testing

Equipment Configuration

A. Overview

Eurofins Electrical and Electronic Testing NA, Inc. was contracted by Trimble Jena GmbH to perform testing on the Trimble Comm Board Hurricane (V0013E), under purchase order number PO20210214.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of Trimble Jena GmbH, Trimble Comm Board Hurricane (V0013E).

The results obtained relate only to the item(s) tested.

Model(s) Tested:	Trimble Comm Board Hurricane (V0013E)
Model(s) Covered:	Trimble Comm Board Hurricane (V0013E)
EUT Specifications:	Primary Power: 5 VDC FCC ID: YK5-73350046 IC: 9288A-73350046 Type of Modulations: GFSK, $\pi/4$ DQPSK, 8DPSK Equipment Code: DTS, DSS EUT Frequency Ranges: 2402 to 2480 MHz
Analysis:	The results obtained relate only to the item(s) tested.
Environmental Test Conditions:	Temperature: 15-35° C Relative Humidity: 30-60% Barometric Pressure: 860-1060 mbar
Type of Filing:	CIIPC
Evaluated by:	Arsalan Hasan
Report Date(s):	September 7, 2021

EUT Summary Table

B. References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
RSS-247	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices
ANSI C63.4:2014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2017	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
KDB 558074 v04	Guidance For Performing Compliance Measurements On Digital Transmission Systems (DTS) Operating Under Section 15.247
RSS-247, Issue 2, February 2017	Low-power Licence-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment
RSS-GEN, Issue 4, Nov. 2014	General Requirements and Information for the Certification of Radio Apparatus
ICES-003, Issue 6 April 2016	Information Technology Equipment (ITE) — Limits and methods of measurement
RSS-102, Issue 5, March 2015	Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
ANSI C63.4:2014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories

References

C. Test Site

All testing was performed at Eurofins Electrical and Electronic Testing NA, Inc., 3162 Belick St., Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 5 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at Eurofins Electrical and Electronic Testing NA, Inc.

Eurofins Electrical and Electronics Testing NA, Inc. is an ISO/IEC 17025 accredited site by A2LA, California #0591.02.

D. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
Radiated Emissions, (30 MHz – 1 GHz)	± 3.24	2	95%
Radiated Emissions, (1 GHz – 18 GHz)	± 3.92	2	95%
Conducted Emission Voltage	± 2.44	2	95%
RF Power Conducted Spurious Emissions	± 2.25 dB	2	95%
RF Power Radiated Emissions	± 3.01 dB	2	95%

Uncertainty Calculations Summary

E. Description of Test Sample

Name of EUT/Model:	Trimble Comm Board Hurricane (V0013E)
Description of EUT and its intended use:	The Trimble Comm Board Hurricane (V0013E) is an 802.11a/b/g/n/ac 2.4 GHz and 5 GHz dual-band Wi-Fi and Bluetooth module that acts as a communication controller/bridge for use with a long-range wireless scanner. The core chipset is a Qualcomm QCA9378-7 and a Qualcomm CSR8811.
Selected Operation Mode(s):	<p>A factory test mode for both WLAN and Bluetooth will be provided for radio-level testing, and instructions on how to operate the device in its normal mode will be provided for WLAN DFS testing.</p> <p>The factory test mode allows the operator to put the radio into a transmit-only or receive-only mode to aid in performing their measurements. The settings provided by the operator are the same as those used in normal operation, so any emissions will match those expected during normal operation – with the exception that normal mode will have a lower duty cycle. Once configured, the device will continue to operate in the specified manner until the operator disables the EUT.</p> <p>The normal operating mode for Wi-Fi allows a video to be streamed to simulate real-world traffic. During this simulation, other parameters (such as the EUT's ability to respond to radar waveforms) may be validated. As the video has a fixed length, extended testing will require the video to be restarted every 12 minutes.</p>
Rationale for the selection of the Operation Mode(s):	<p>This frequency of highest disturbance is expected to be emitted by the 2.4 GHz WLAN transmitter – HT20, MCS0 centered on 2437 MHz. This frequency produces the highest transmitter output power. Unintentional emissions caused by the transmitter will be subject to relevant regulatory limits and should not cause disturbances to other devices.</p>

Monitoring Method(s):	In factory testing mode, both the WLAN and BT radios maintain communication with the host software and will display an error if the EUT stops working. During a transmit-only test, the output of the transmitter can be measured to confirm operational status.
Emissions Class Declaration:	Class B (residential)
Configuration(s):	<p>The RP-SMA pigtails and antennas shall be connected to the primary antenna ports of the EUT. The ribbon cable and USB adapter shall be connected to the EUT. The host system, simulated by a laptop, and a DC power supply capable of supplying 2 A shall be connected to the USB adapter.</p> <p>Tests which require conducted measurements to be made shall be performed by removing the antennas and cabling onto the RP-SMA pigtails.</p>
EUT Power Requirement	
Voltage:	5V
AC or DC:	DC
Voltage Frequency:	N/A
Number of Phases:	N/A
Current:	2A
Physical Description	
EUT Arrangement:	Table top
System with Multiple Chassis?	No
Size (HxWxD - inches):	2x4x0.2 inches
Weight (lbs):	< 1 lbs
Highest Internal Frequency (MHz):	48 MHz
Other Info	
EUT Software (internal to EUT):	Firmware is provided by the host system.
Support Software (used by support PC to exercise EUT):	Qualcomm Radio Control Toolkit (QRCT) application for Wi-Fi test, and BlueTest for Bluetooth test.
Firmware:	Firmware is provided by the host system.
Transmitter Parameters	
Description of your unit:	Hybrid (DSSS and FHSS)
Modulation Type:	GFSK, pi/4 DQPSK, 8 DPSK, CCK, OFDM
Number of Channels:	47 (inc. 2.4 GHz and 5 GHz)
Frequency range (MHz):	2400 – 2483.5, 5150 – 5350, 5470 – 5835
Antenna Type:	Dual-band, Omni
Antenna Gain (dB):	2.4 GHz 3 dBi, 5 GHz 5 dBi
PMN:	--
HVIN:	V0013E

FVIN:	--
HMN:	--
Data Rates:	1 Mbps – 54 Mbps, MCS0 – MCS7
Expected Power Level:	~ 10 – 30 dBm EIRP i.e. close to regulatory limit depending on modulation and channel
Number of Antenna:	2
Number of Intentional Transmitters:	1
Number of Certified Intentional Transmitter Modules:	1 - the EUT is already a certified module.

Equipment Configuration


Ref.ID	Slot#	Name/Description	Model Number	Part Number	Serial Number	Rev. #
1	--	Hurricane Communications Module	V0013E	--	--	--
2	--	RP-SMA pigtauls (x2)	Glyn INTCABLE58	--	--	--

Ports and Cabling

Ref. Id	Port Name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
1	Antenna port 0	RP-SMA pigtail	--	0.15	0.5	Yes	--
2	Antenna port 1	RP-SMA pigtail	--	0.15	0.5	Yes	--
3	Antenna port 3	Unused	--	--	--	--	--
4	Ribbon connector	FFC ribbon	--	--	--	--	--
5	USB micro B connector	Unused	1	0.2	0.5	Yes	--

Support Equipment

Ref.ID	Name/Description	Manufacturer	Model Number	Customer Supplied Calibration Data
4	Linux Laptop	Dell		Yes. fakeboar_fcc.bin and fakeboar_etsi.bin
5	Windows Laptop	Dell		
6	USB data cable	Unknown		NA
7	Banana to jack power cable	Virscent		NA
8	USB adapter	Virscent	V0006A	NA
9	FFC ribbon cable	Molex	0982670211	NA

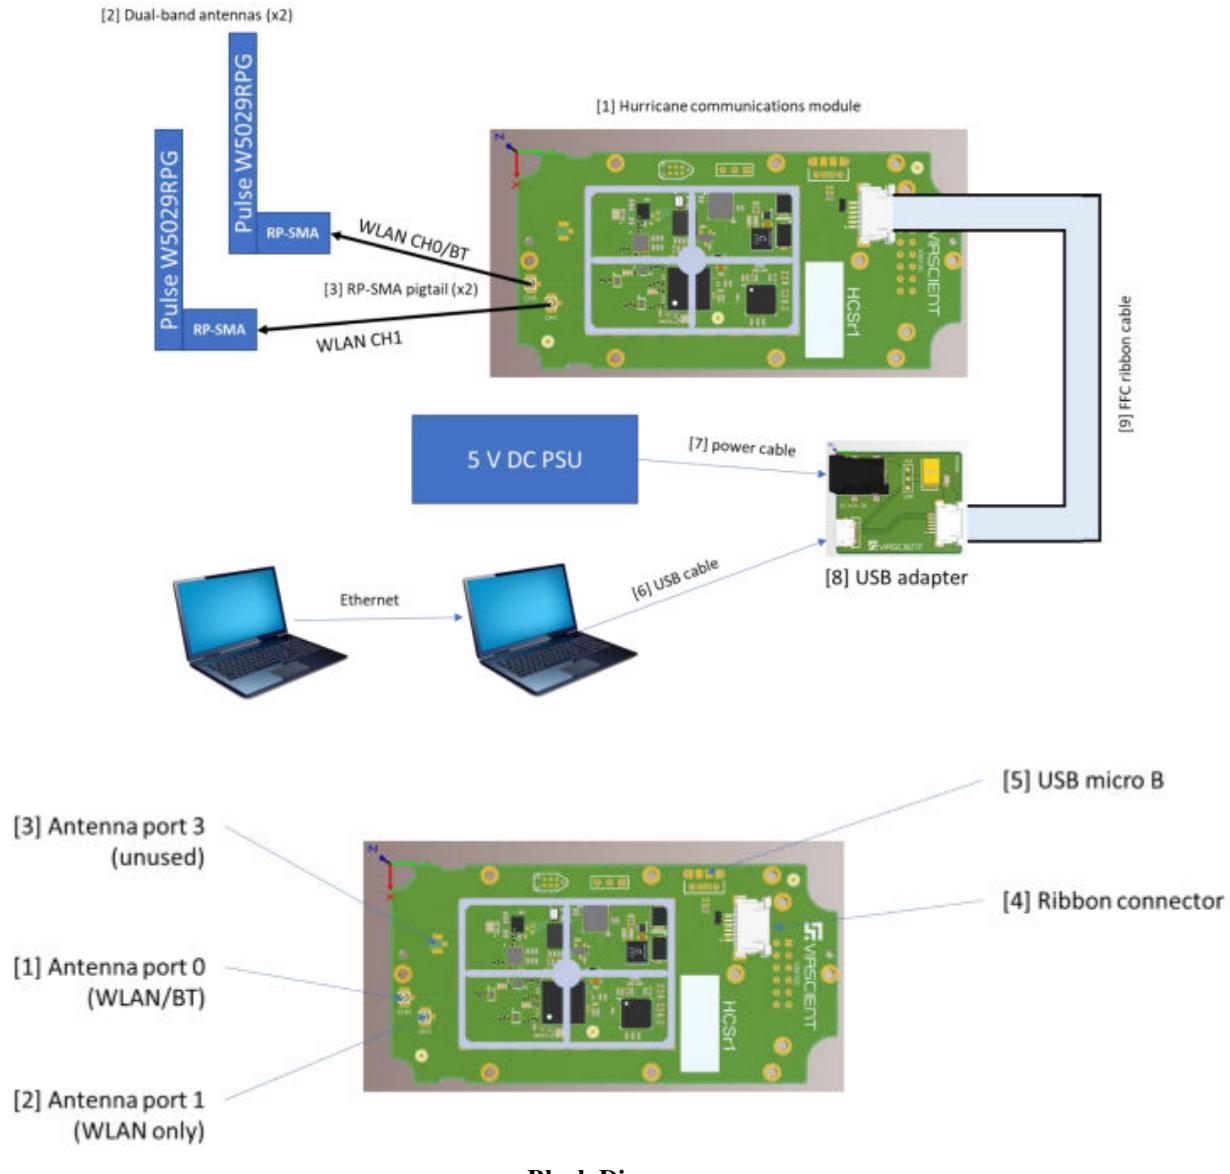

F. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

G. Disposition of EUT

The test sample including all support equipment (if any), submitted to the Electromagnetic Compatibility Lab for testing was returned to Trimble Jena GmbH upon completion of testing.

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.209 Radiated Spurious Emissions Requirements

Test Requirements: §15.247(d); §15.205: Emissions outside the frequency band.

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	(²)

Restricted Bands of Operation

¹ Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

² Above 38.6

RSS-GEN (6.13), (8.9), & (8.10) Radiated Spurious Emissions Requirements

Test Requirements: **RSS-GEN (6.13):** The measurement method shall be described in the test report. When the applicable unwanted emissions limits are defined in relative terms, the same parameter, peak power or average power, used for the transmitter's output power measurement shall also be used for the unwanted emission measurements.

In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:

(a) If the equipment operates below 10 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

(b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

Particular attention should be paid to harmonics and sub-harmonics of the carrier frequency, as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value need not be reported.

When limits are expressed in absolute terms, compliance with the emission limits below 1000 MHz shall be demonstrated using a CISPR quasi-peak detector and the related measurement bandwidth. As an alternative to CISPR quasi-peak measurement, compliance with the emission limits can be demonstrated using measuring equipment employing a peak detector function properly adjusted for factors such as pulse desensitization as required, with an equal or greater measurement bandwidth relative to the applicable CISPR quasi-peak bandwidth.

Above 1000 MHz, compliance with the emission limits shall be demonstrated using an average detector with a minimum resolution bandwidth of 1 MHz.

Test Requirement(s): **§ 15.209 (a):** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in **Error! Reference source not found.**

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dB μ V) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)

RSS-GEN (8.9): Except when the requirements applicable to a given device state otherwise, emissions from license-exempt transmitters shall comply with the field strength limits shown in the table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.


General Field Strength Limits for License-Exempt Transmitters at Frequencies Above 30 MHz	
Frequency (MHz)	Field Strength (μ V/m at 3 meters)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960*	500

*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse


desensitization to ensure the peak emission is less than 20 dB above the average limit.

Test Procedures:

The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line. Only noise floor was measured above 18 GHz.

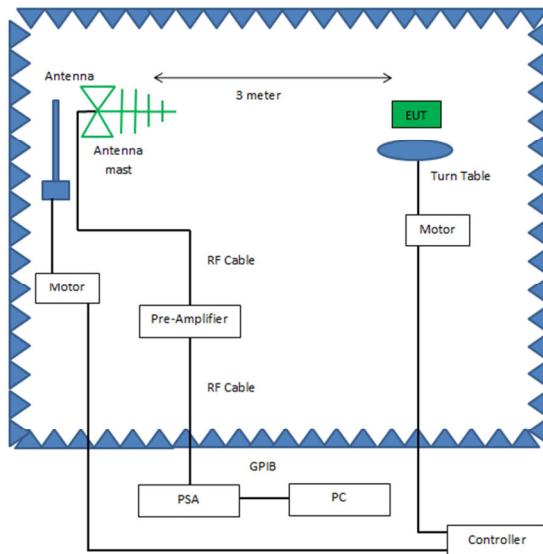

Radiated Emissions, Below 1GHz, Test Setup

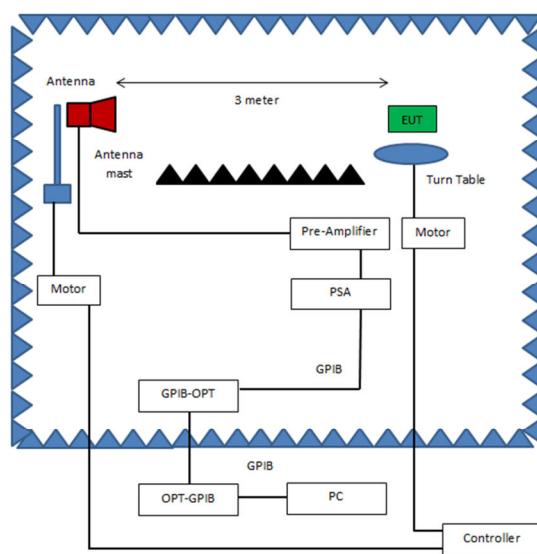

Radiated Emissions, Above 1GHz, Test Setup

Test Results:

The EUT was tested is **compliant** with § 15.209 Radiated Spurious Emissions Requirements and Band Edge.


Test Engineer:

Arsalan Hasan


Test Date:

07/25/2021


Test Data

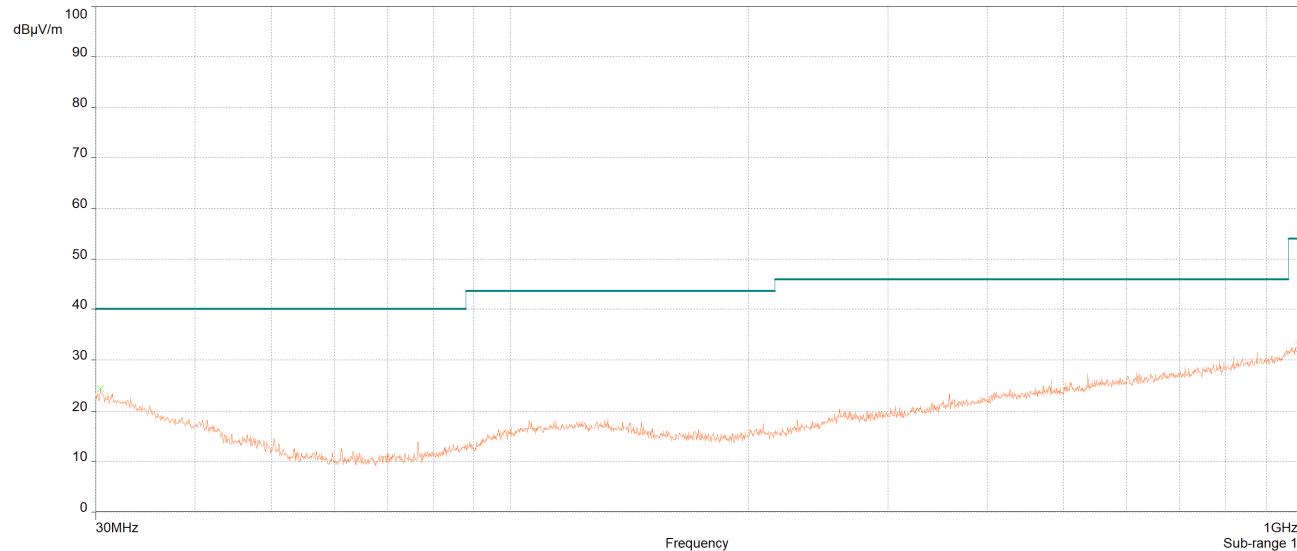


Radiated Spurious Emissions, 30MHz-1GHz, (Worst Case Pol)

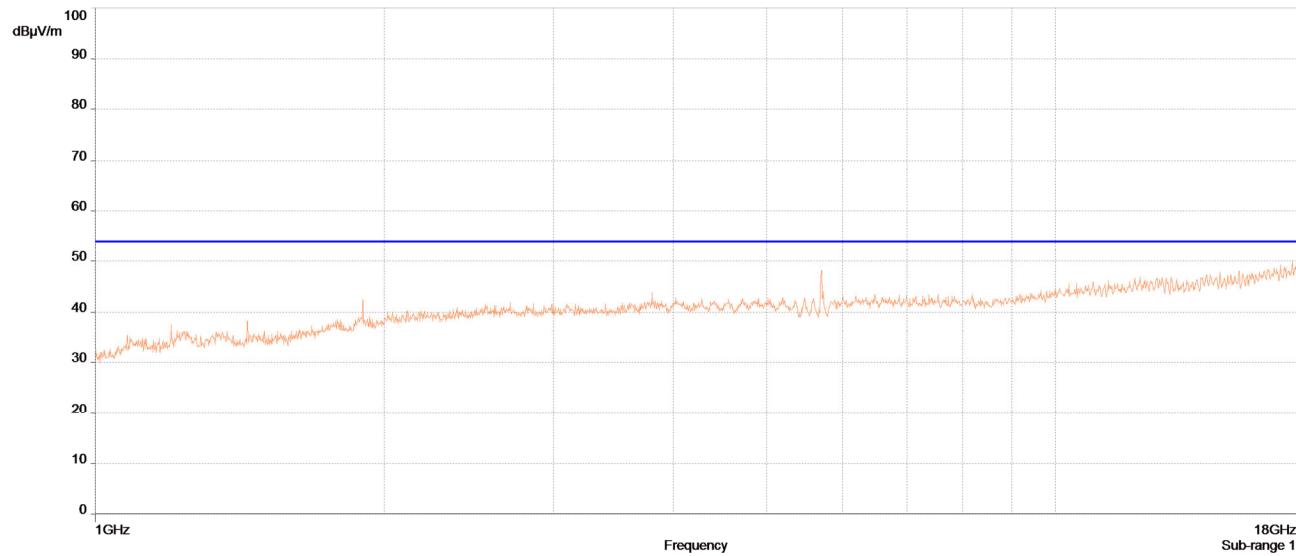


Radiated Spurious Emissions, 1GHz -18 GHz, BLE High Channel, Average (Worst Case Pol)

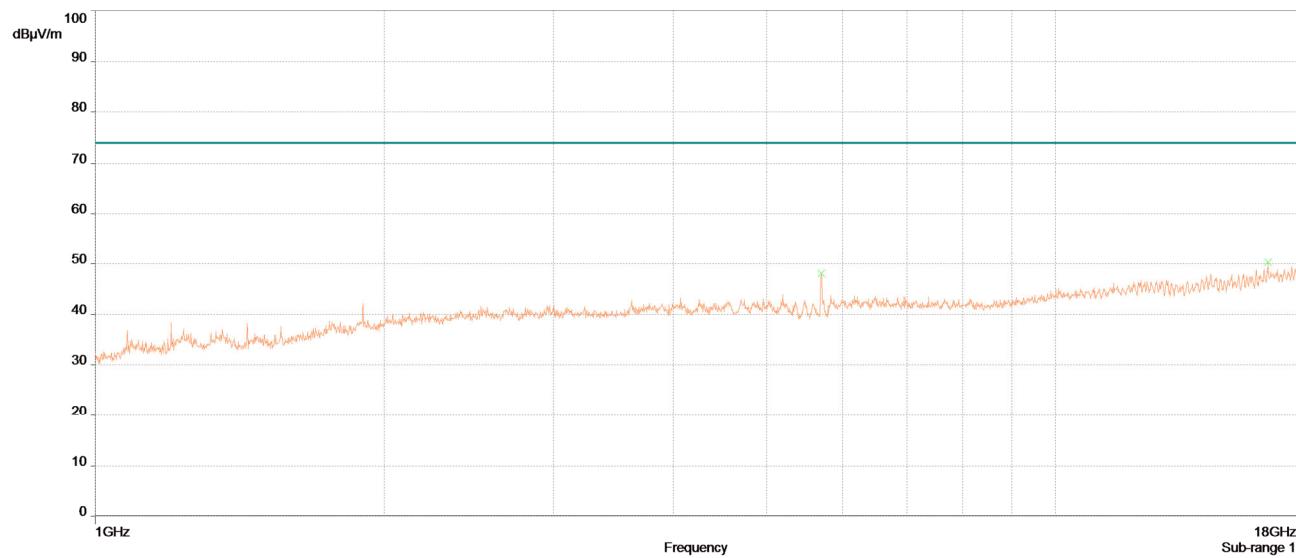


Radiated Spurious Emissions, 1GHz -18 GHz, BLE High Channel, Peak (Worst Case Pol)

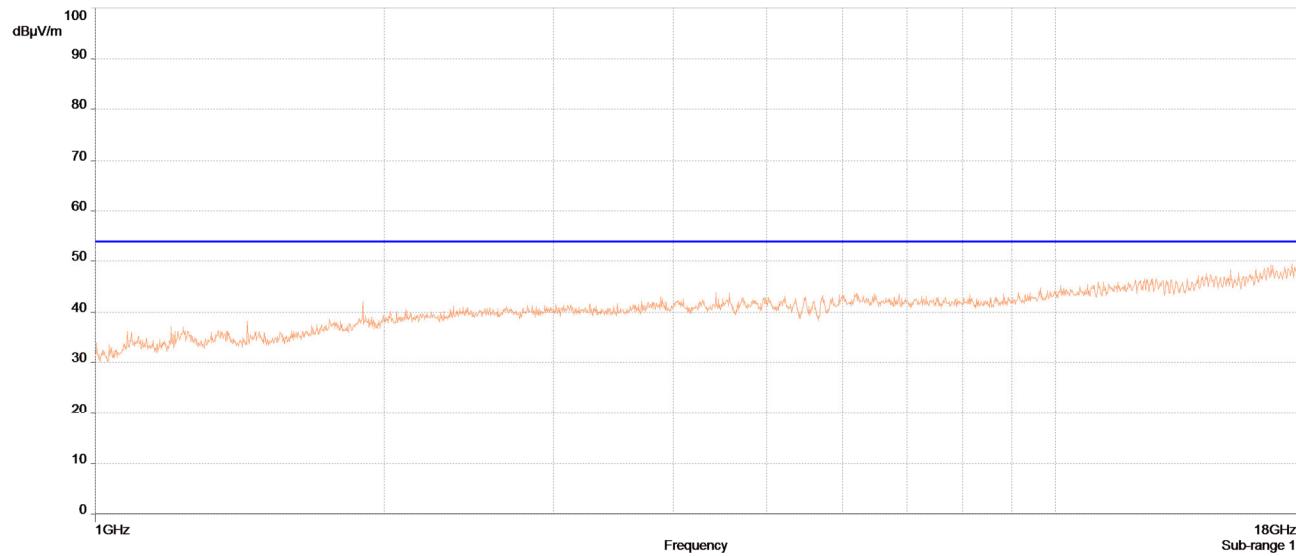


Radiated Spurious Emissions, 1GHz -18 GHz, BLE Low Channel, Average (Worst Case Pol)

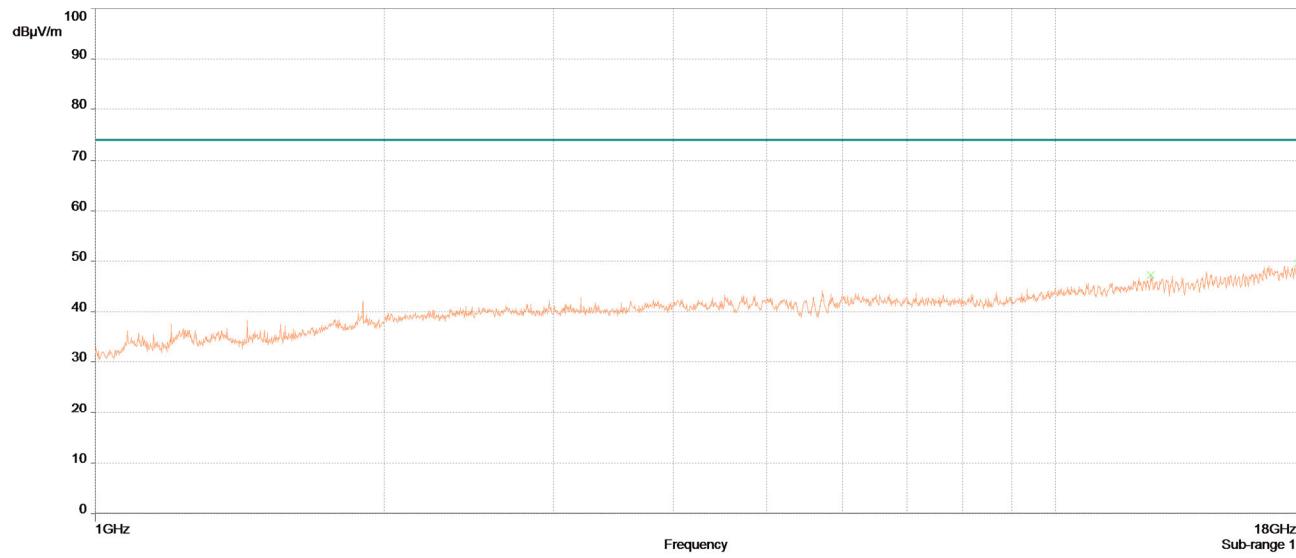


Radiated Spurious Emissions, 1GHz -18 GHz, BLE Low Channel, Peak (Worst Case Pol)

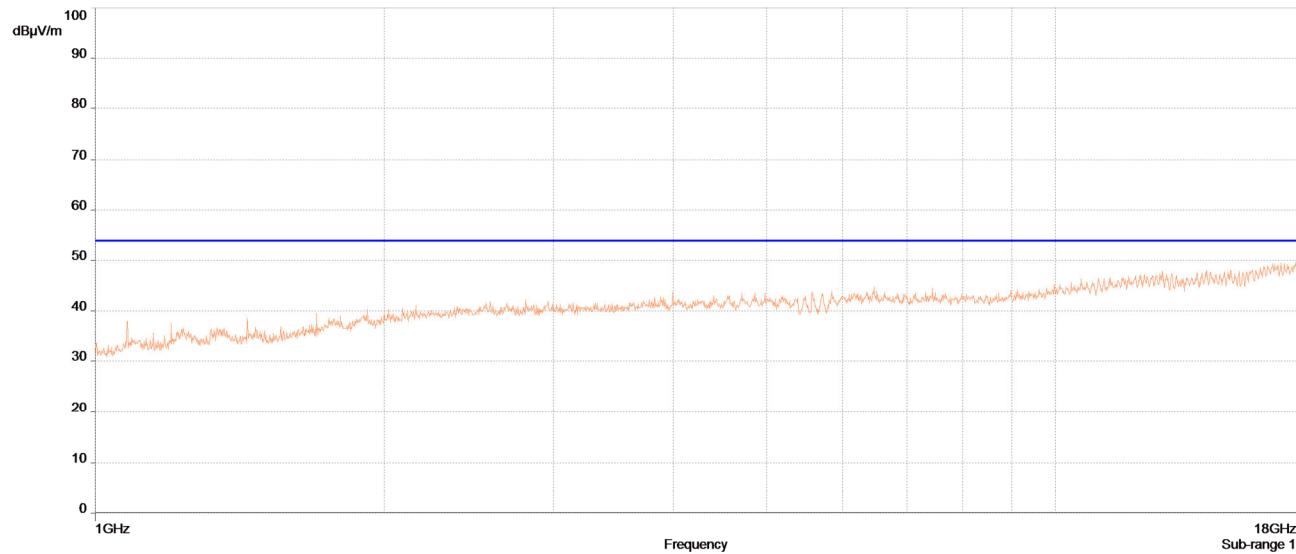


Radiated Spurious Emissions, 1GHz -18 GHz, BLE Mid Channel, Average (Worst Case Pol)

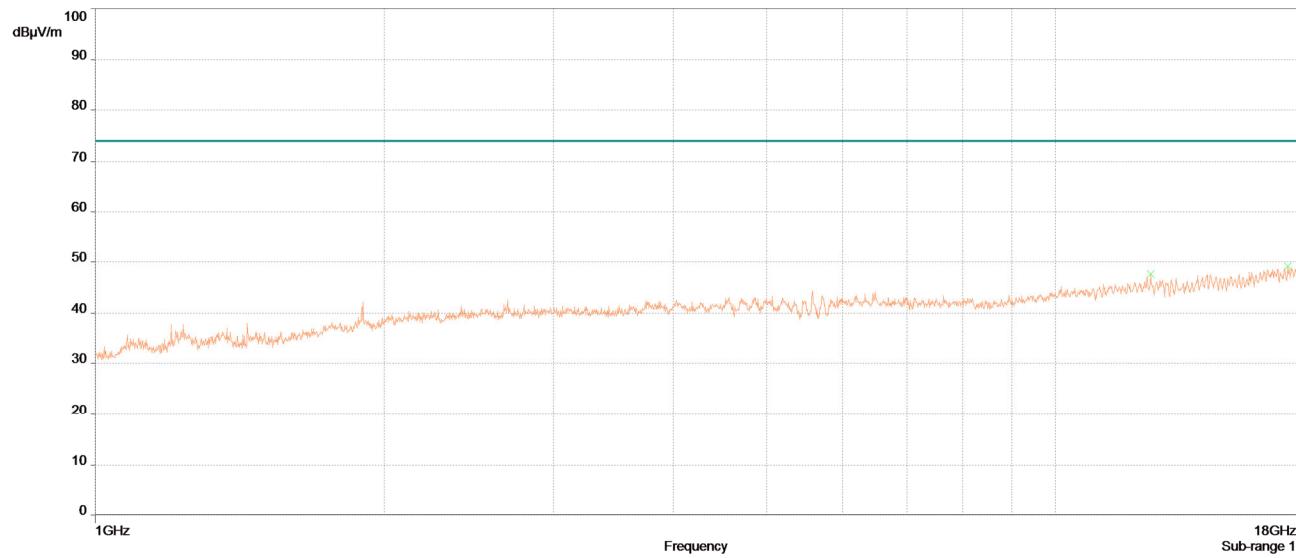


Radiated Spurious Emissions, 1GHz -18 GHz, BLE Mid Channel, Peak (Worst Case Pol)

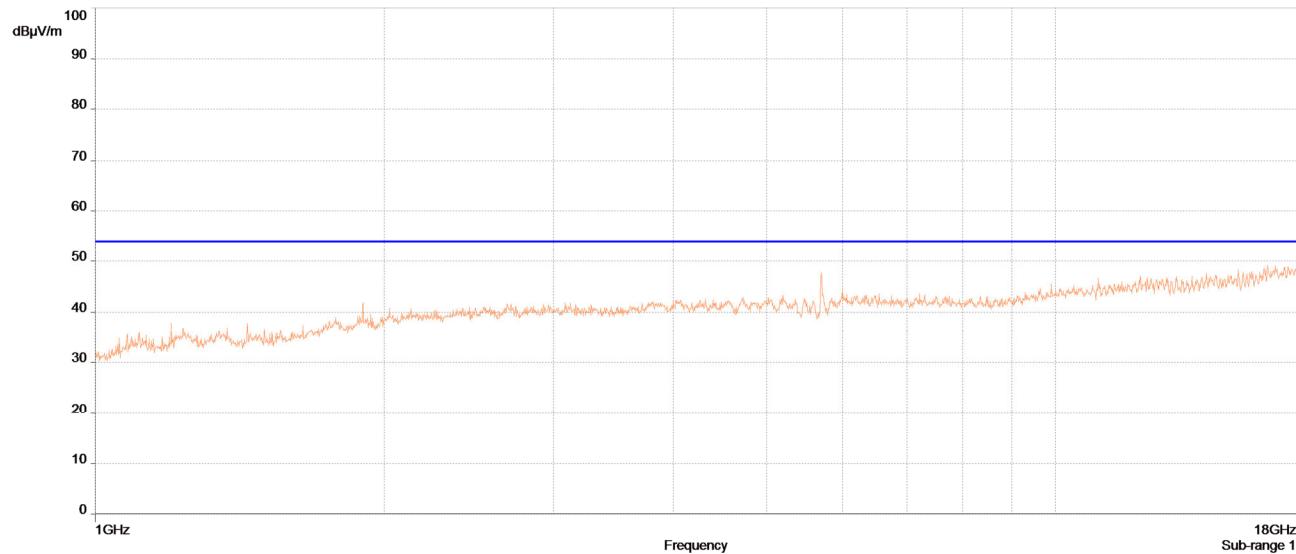


Radiated Spurious Emissions, 1GHz -18 GHz, BT High Channel, Average (Worst Case Pol)

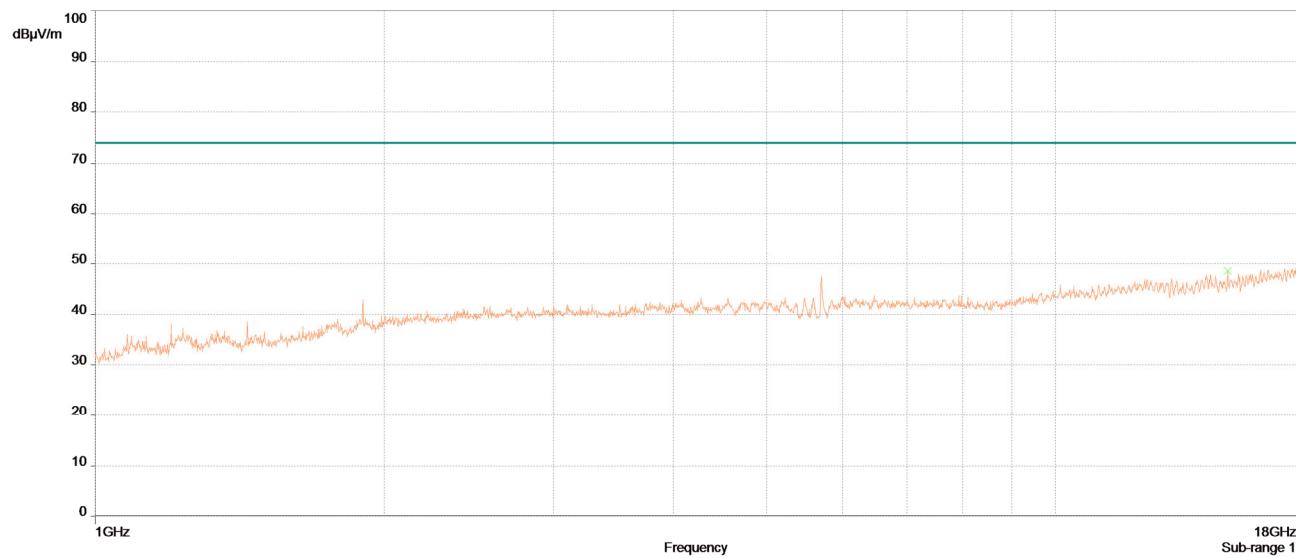


Radiated Spurious Emissions, 1GHz -18 GHz, BT High Channel, Peak (Worst Case Pol)

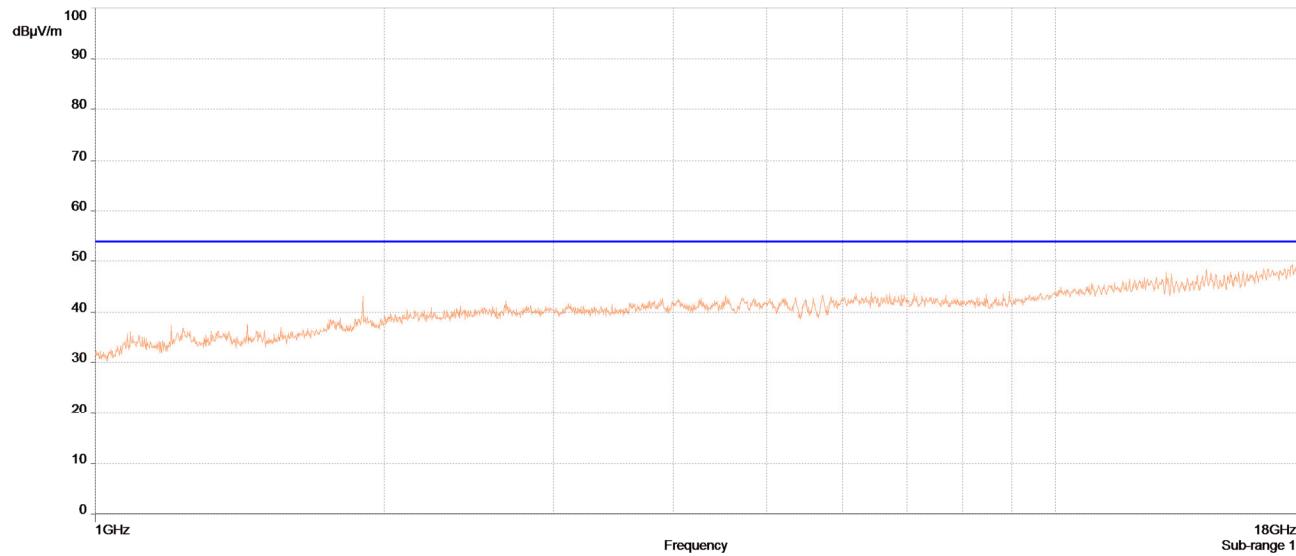


Radiated Spurious Emissions, 1GHz -18 GHz, BT Low Channel, Average (Worst Case Pol)

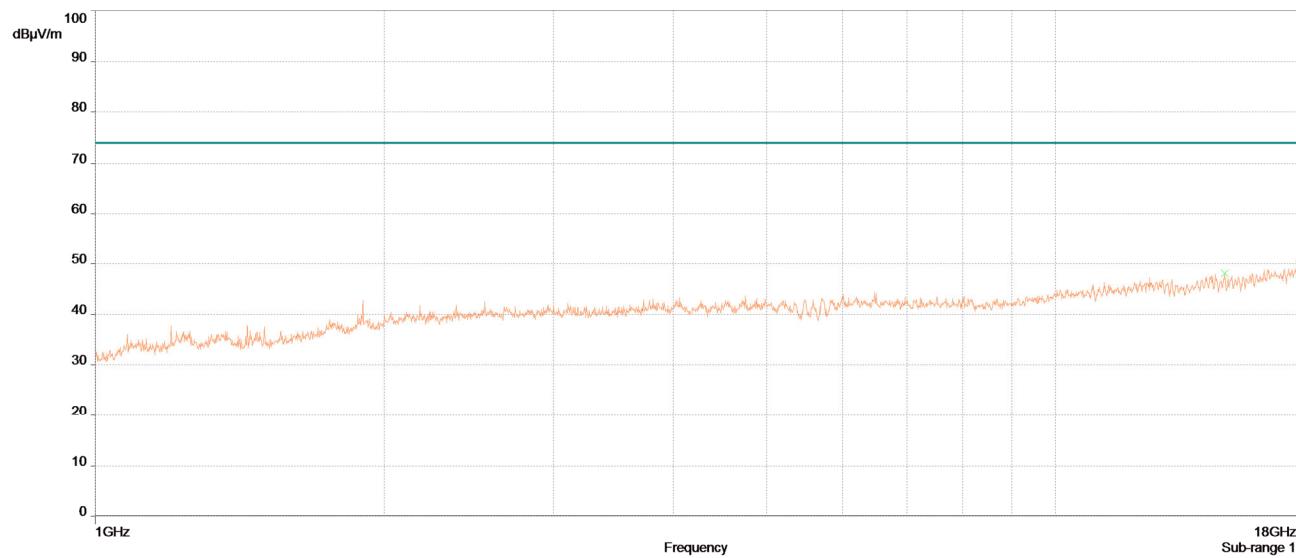


Radiated Spurious Emissions, 1GHz -18 GHz, BT Low Channel, Peak (Worst Case Pol)

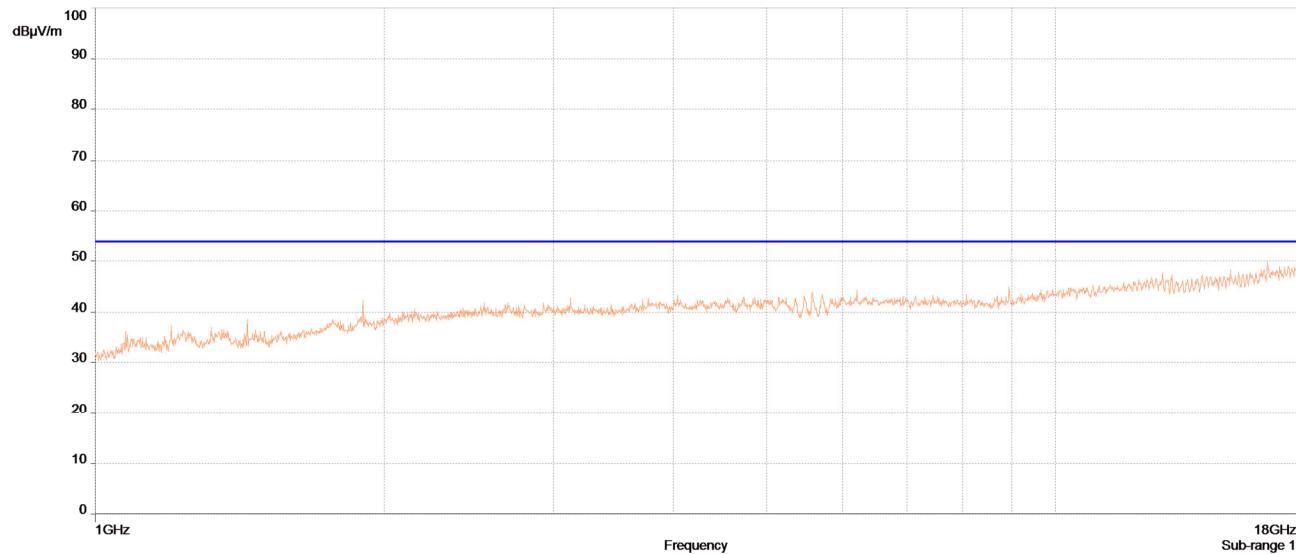


Radiated Spurious Emissions, 1GHz -18 GHz, BT Mid Channel, Average (Worst Case Pol)

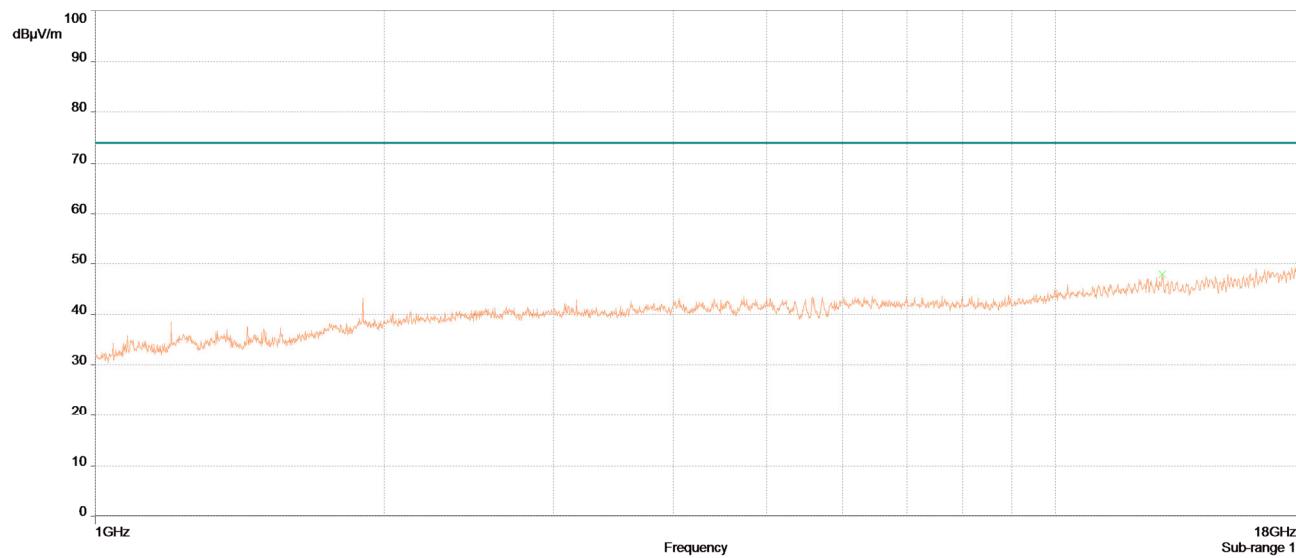


Radiated Spurious Emissions, 1GHz -18 GHz, BT Mid Channel, Peak (Worst Case Pol)

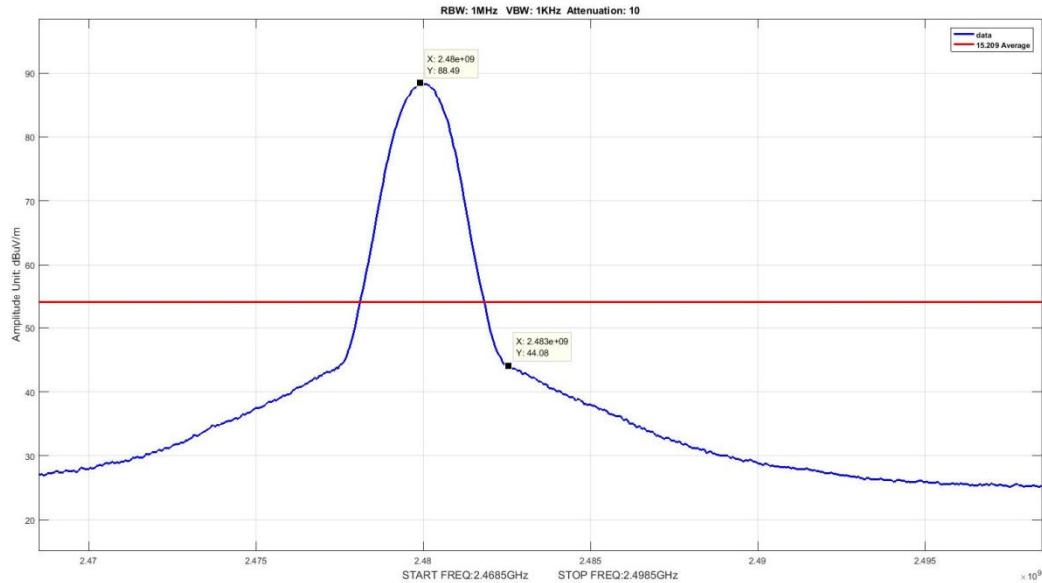


Radiated Emissions, BT BLE, Radiated Band Edge, High Average

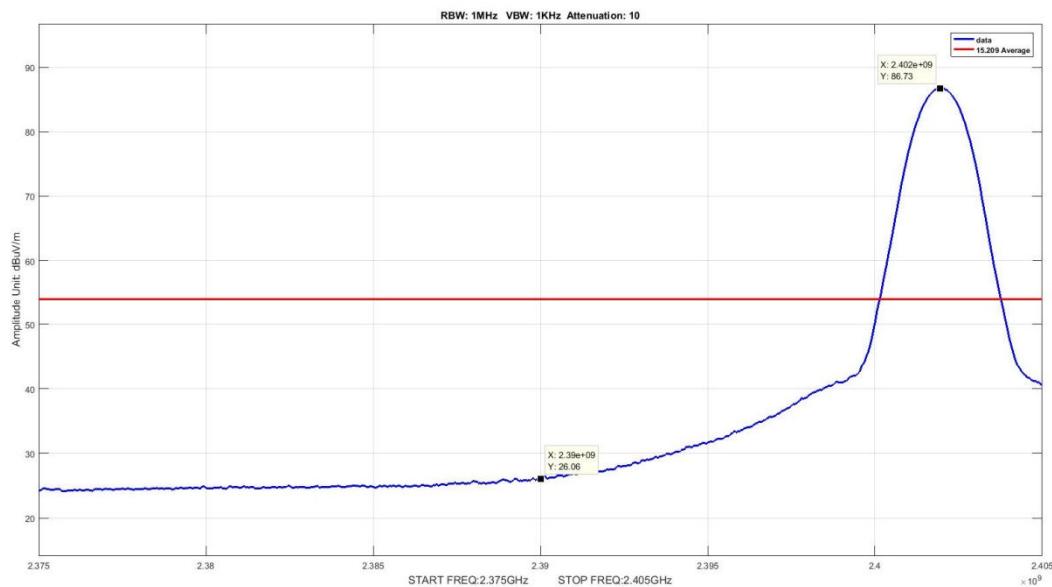

Radiated Emissions, BT BLE, Radiated Band Edge, Low Average

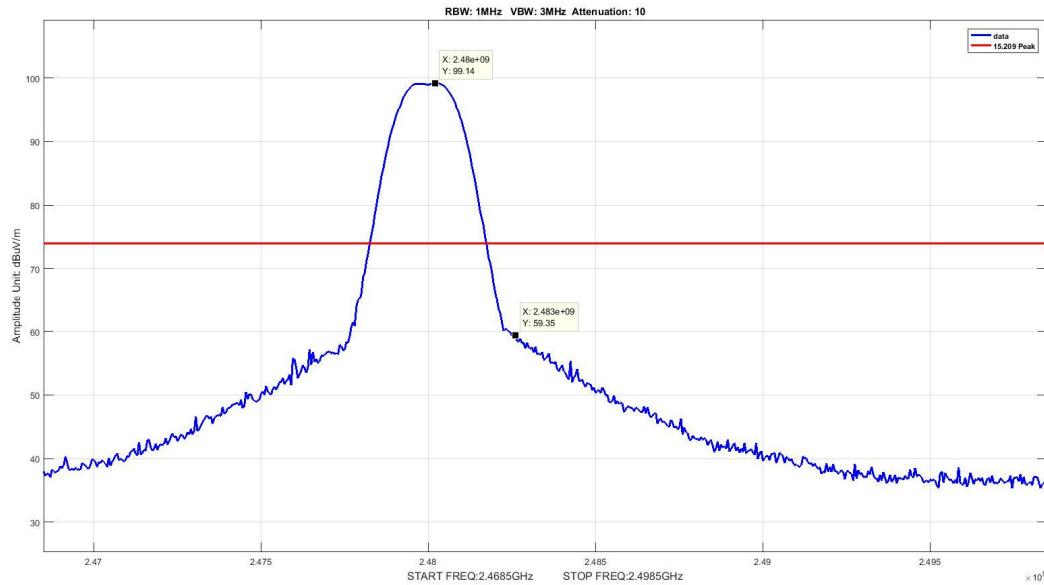

Radiated Emissions, BT BLE, Radiated Band Edge, High Peak

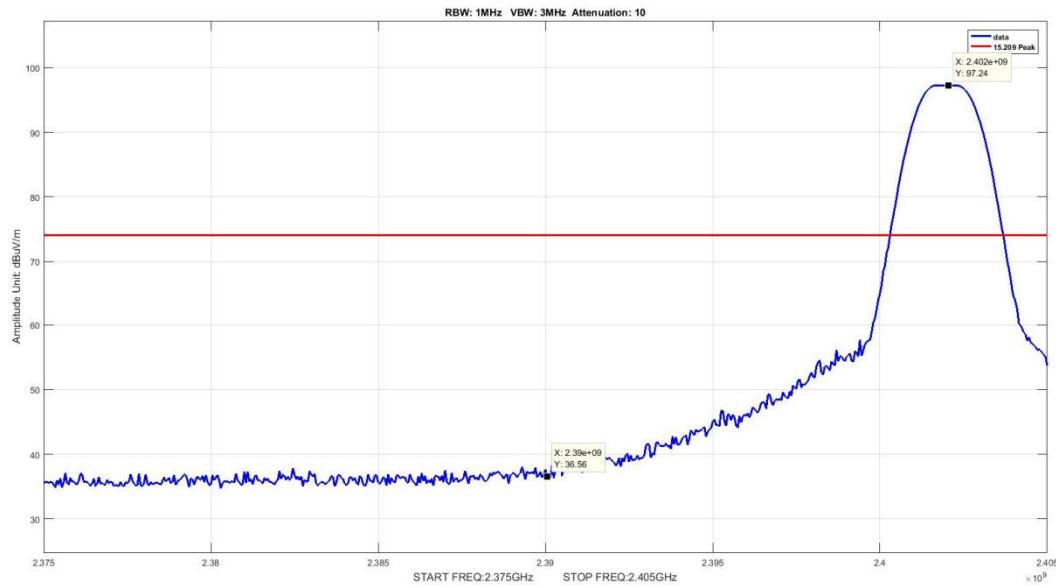

Radiated Emissions, BT BLE, Radiated Band Edge, Low Peak

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2399	Turntable/Mast Controller	Sunol Sciences	SC99V	See Note ¹	
1S2600	Bilog Antenna	Teseq	CBL6112D	03/19/2021	03/19/2022
1S3826	Drg Horn Antenna	Ets-Lindgren	3117	12/03/2020	12/03/2022
1S2003	Pxa Signal Analyzer	Keysight	N9030B	09/15/2020	09/15/2021
1S2587	Pre Amplifier	Aml Communications	AML0126L3801	See Note ¹	
1S2653	Amplifier	Sonoma Instrument	310 N	See Note ¹	
1S2486	5 Meter Chamber	Panashield - Ets	5M	See Note ²	

Note 1: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.
 Note 2: Latest NSA and VSWR data available upon request.

Radiated Spurious Emissions, Test Equipment List

End of Report