

Loudspeaker Terminals
Impedance 4-8 ohms

+ Right - - Left +

A

A

B

B

+ Right - - Left +

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.



Designed & Engineered in Great Britain
Assembled in China

AXR100
Stereo Receiver

Cambridge Audio is a brand of
Audio Partnership Plc
Registered office:
Gallery Court, Hankey Place
London SE1 4BB, United Kingdom



MET Complies with
UL 60065
E112915 CSA C22.2 No. 60065

Apparätet må tilkoples jordet stikkontakt. Apparaten skall anslutas till jordat uttag. Apparätets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord. Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan.

Caution
Serial Number Label Removed

Mains Voltage Selector Switch
115/220-230V - 50/60Hz

<0.5W
STANDBY



CAUTION
Risk of electric shock.
Do not open.


AVIS
Risque de choc électrique.
Ne pas ouvrir.

ACHTUNG
Vorm Öffnen des Gerätes.
Netzstecker ziehen.



Power AC ~

Max Power Consumption: 550W
Model: AXR100 IC:9095A-AXR031
CAN ICES-3 (B)/NMB-3 (B) FCC ID:YKBAXR-031

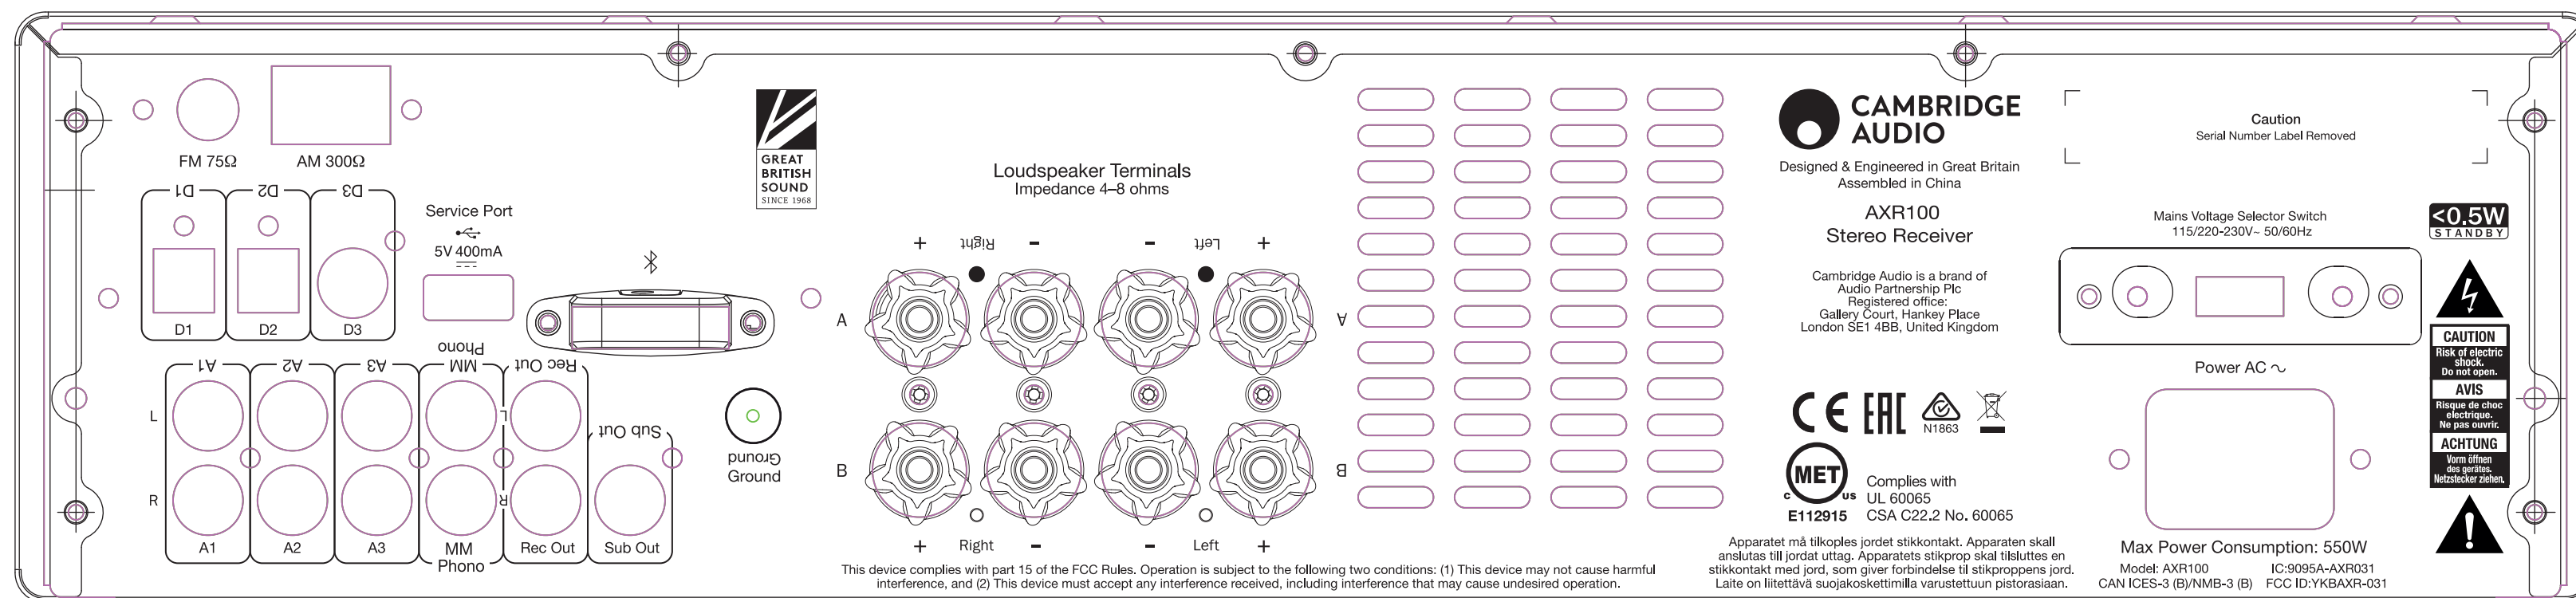

Loudspeaker Terminals
Impedance 4-8 ohms

+ Right - - Left +

A

A

B

B

+ Right - - Left +

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.



Designed & Engineered in Great Britain
Assembled in China

AXR100
Stereo Receiver

Cambridge Audio is a brand of
Audio Partnership Plc
Registered office:
Gallery Court, Hankey Place
London SE1 4BB, United Kingdom



MET Complies with
UL 60065
E112915 CSA C22.2 No. 60065

Apparätet må tilkoples jordet stikkontakt. Apparaten skall anslutas till jordat uttag. Apparätets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord. Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan.

Caution
Serial Number Label Removed

Mains Voltage Selector Switch
115/220-230V - 50/60Hz

<0.5W
STANDBY



CAUTION
Risk of electric shock.
Do not open.

AVIS
Risque de choc électrique.
Ne pas ouvrir.

ACHTUNG
Vorm Öffnen des Gerätes.
Netzstecker ziehen.




Power AC ~

Max Power Consumption: 550W
Model: AXR100 IC:9095A-AXR031
CAN ICES-3 (B)/NMB-3 (B) FCC ID:YKBAXR-031

Stick this serial number sticker on rear panel.



Barcode 39

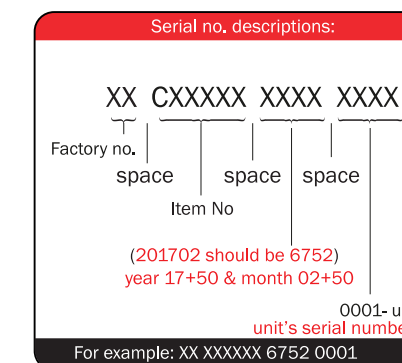

Artwork to print: Print Pantone 428C on black panel

Sheet N/A	Drawing title CA0872 REAR PANEL ARTWORK	Revision & date A. 05.07.18 - Original B. 17.08.18 - added BT and USB service port. C. 27.08.18 - modified the rear panel D. 13.11.18 - Updated to MET logo and Consumption 550w E. 28.11.18 - IC ID and FCC are id upside down F. 11.12.18 - Removed class 2 and added class 1 nordic text. G. 13.12.18 - Updated IC ID and FCC ID.	
Drawn RFB/ivan		Signed off	Drawing no. AP36354/G
Scale 1:1			

Label located here

