

**9.7 RADIATED SPURIOUS EMISSION**

**9.7.1 Applicable Standard**

According to FCC Part 15.247(d) and 15.209 and DA 00-705

**9.7.2 Conformance Limit**

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).  
According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)( dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10\*lg(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

**9.7.3 Test Configuration**

Test according to clause 7.2 radio frequency test setup 2

**9.7.4 Test Procedure**

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW ≥ RBW for peak measurement

VBW = 10Hz for Average measurement

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from 20log(dwell time/100 ms), in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

**9.7.5 Test Results**

■ Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	24 °C	Test Date:	June 11, 2015
Humidity:	53 %	Test By:	KING KONG
Test mode:	TX Mode		


Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =40log(Specific distance/ test distance)( dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor



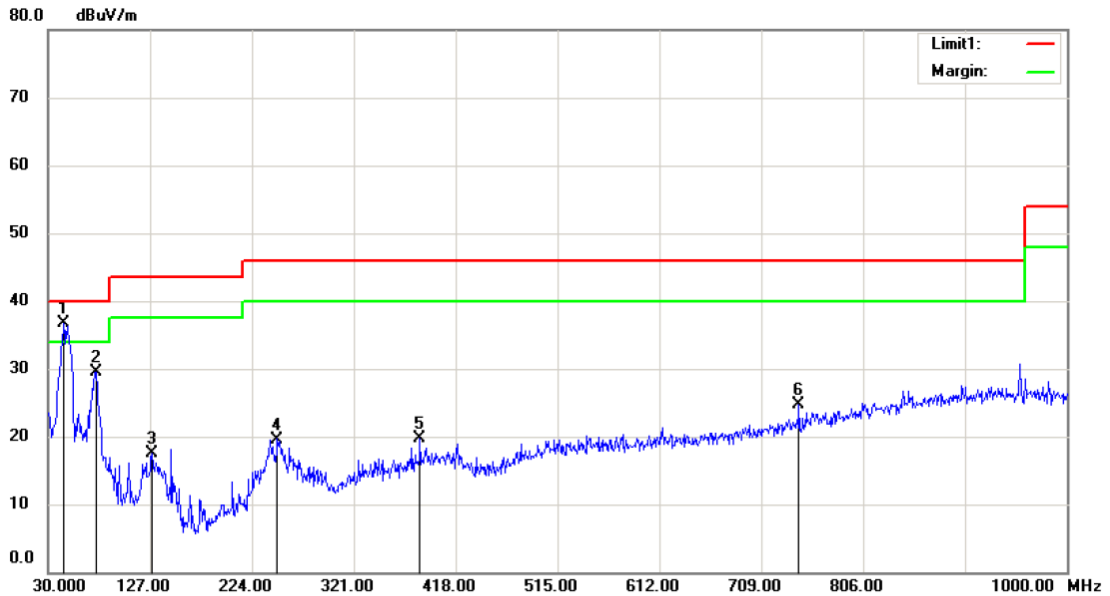


Site 3m Chamber #2      Polarization: *Vertical*      Temperature: 24 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 53 %  
 Mode:GFSK TX CH0  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	44.5500	49.33	-12.53	36.80	40.00	-3.20			QP	
2		75.5900	49.46	-20.02	29.44	40.00	-10.56			QP	
3		128.9400	34.89	-17.47	17.42	43.50	-26.08			QP	
4		248.2500	32.95	-13.35	19.60	46.00	-26.40			QP	
5		384.0500	28.62	-8.96	19.66	46.00	-26.34			QP	
6		744.8900	27.69	-2.90	24.79	46.00	-21.21			QP	

\*:Maximum data    x:Over limit    !:over margin

Operator: CSL

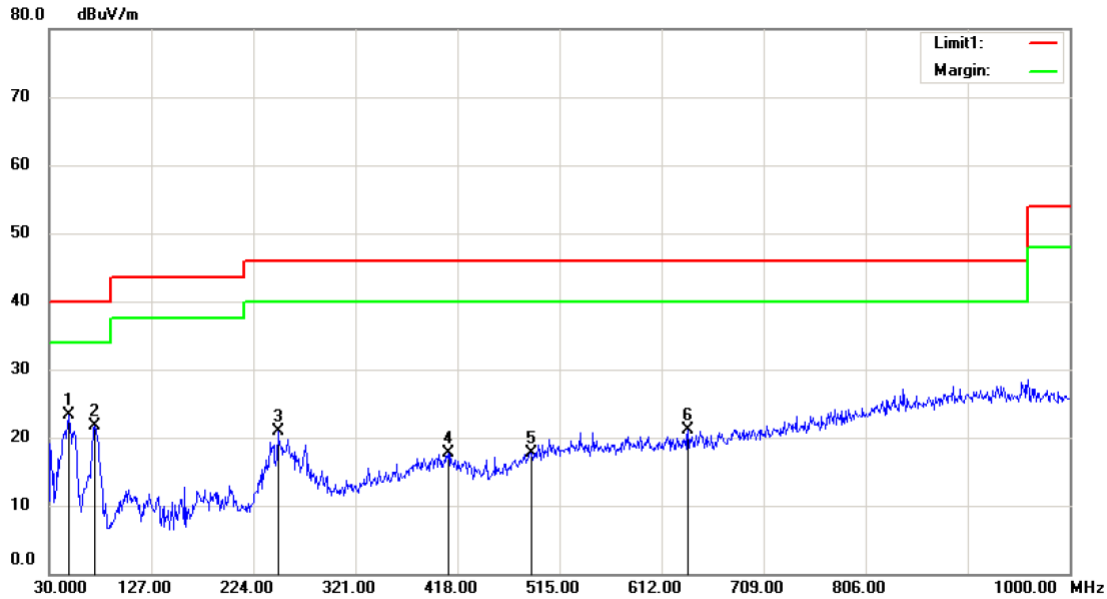


Site 3m Chamber #2 Polarization: *Horizontal* Temperature: 24 C  
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %  
 Mode:GFSK TX CH39  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	48.4300	36.54	-13.33	23.21	40.00	-16.79	QP	
2		73.6500	41.41	-19.75	21.66	40.00	-18.34	QP	
3		247.2800	34.28	-13.39	20.89	46.00	-25.11	QP	
4		409.2700	26.12	-8.51	17.61	46.00	-28.39	QP	
5		488.8100	25.26	-7.51	17.75	46.00	-28.25	QP	
6		637.2200	26.32	-5.16	21.16	46.00	-24.84	QP	

\*:Maximum data x:Over limit !:over margin

Operator: CSL



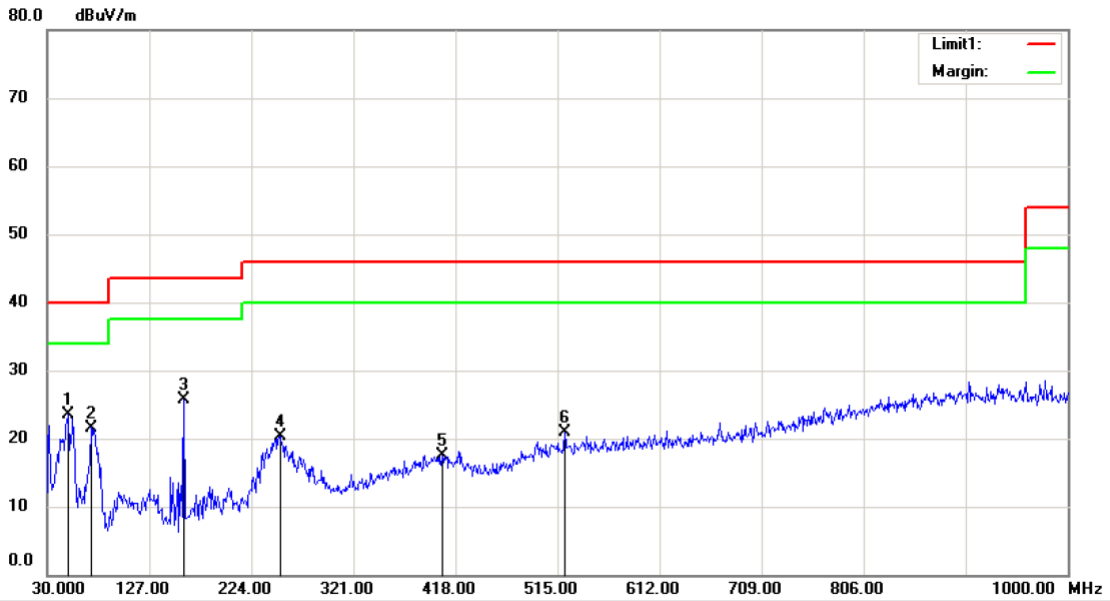


Site 3m Chamber #2      Polarization: *Horizontal*      Temperature: 24 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 53 %  
 Mode:GFSK TX CH78  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	50.3700	39.44	-15.95	23.49	40.00	-16.51	QP	
2		71.7100	40.93	-19.33	21.60	40.00	-18.40	QP	
3		159.9800	44.39	-18.75	25.64	43.50	-17.86	QP	
4		251.1600	33.53	-13.23	20.30	46.00	-25.70	QP	
5		405.3900	25.94	-8.36	17.58	46.00	-28.42	QP	
6		521.7900	27.49	-6.55	20.94	46.00	-25.06	QP	

\*:Maximum data    x:Over limit    !:over margin

Operator: CSL

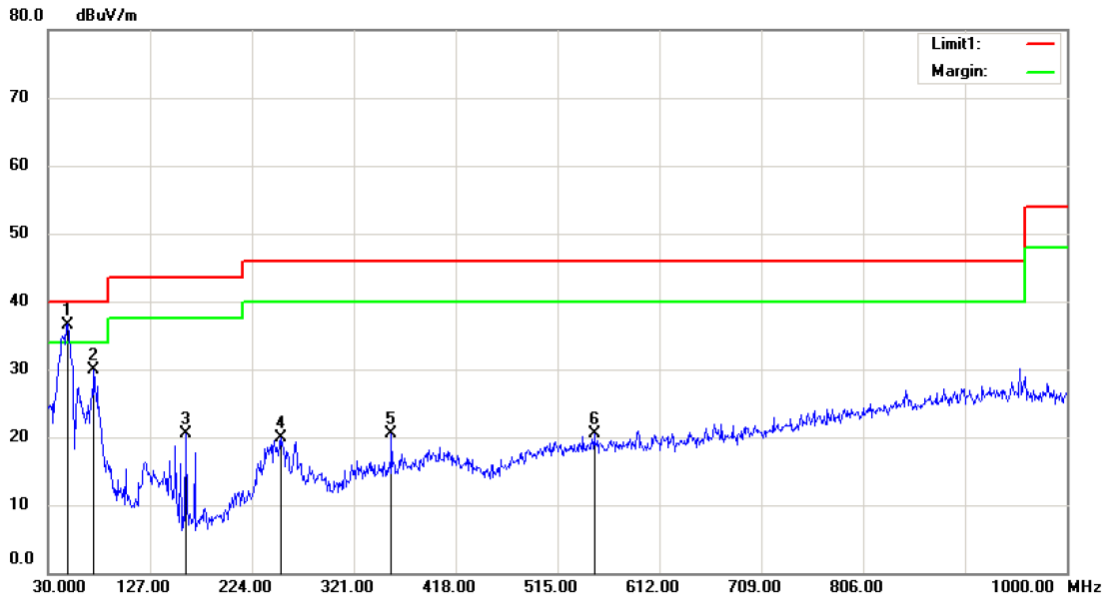

Site 3m Chamber #2  
 Limit: (RE)FCC PART 15 CLASS B  
 Mode:GFSK TX CH78  
 Note:

Polarization: *Vertical*  
 Power: AC 120V/60Hz

Temperature: 24 C  
 Humidity: 53 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	48.4300	49.93	-13.33	36.60	40.00	-3.40	QP			
2		73.6500	49.68	-19.75	29.93	40.00	-10.07	QP			
3		160.9500	39.33	-18.80	20.53	43.50	-22.97	QP			
4		251.1600	33.22	-13.23	19.99	46.00	-26.01	QP			
5		356.8900	30.85	-10.35	20.50	46.00	-25.50	QP			
6		549.9200	26.77	-6.25	20.52	46.00	-25.48	QP			

\*:Maximum data    x:Over limit    !:over margin

Operator: CSL






■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All the modulation modes were tested, the data of the worst mode are described in the following table

Test Model	Spurious Emission in Restricted Band 2310-2390MHz																																		
	Bluetooth v2.0 /v2.1/v3.0																																		
	Channel 0: 2402MHz	GFSK																																	
Site: 3m Chamber #3      Polarization: <i>Horizontal</i> Temperature: 24 C Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 53 % Mode:GFSK TX CH0 Note:																																			
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq. MHz</th> <th>Reading Level dBuV</th> <th>Correct Factor dB</th> <th>Measure- ment dBuV/m</th> <th>Limit dBuV/m</th> <th>Over dB</th> <th>Antenna Height cm</th> <th>Table Degree</th> <th>Comment</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>2387.840</td> <td>63.17</td> <td>-23.95</td> <td>39.22</td> <td>74.00</td> <td>-34.78</td> <td>peak</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>*</td> <td>2387.840</td> <td>50.49</td> <td>-23.95</td> <td>26.54</td> <td>54.00</td> <td>-27.46</td> <td>AVG</td> <td></td> <td></td> </tr> </tbody> </table>			No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment	1		2387.840	63.17	-23.95	39.22	74.00	-34.78	peak			2	*	2387.840	50.49	-23.95	26.54	54.00	-27.46	AVG		
No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment																									
1		2387.840	63.17	-23.95	39.22	74.00	-34.78	peak																											
2	*	2387.840	50.49	-23.95	26.54	54.00	-27.46	AVG																											
*:Maximum data    x:Over limit    !:over margin      Operator: KK																																			



Test Model	Spurious Emission in Restricted Band 2310-2390MHz	
	Bluetooth v2.0 /v2.1/v3.0	
	Channel 0: 2402MHz	GFSK

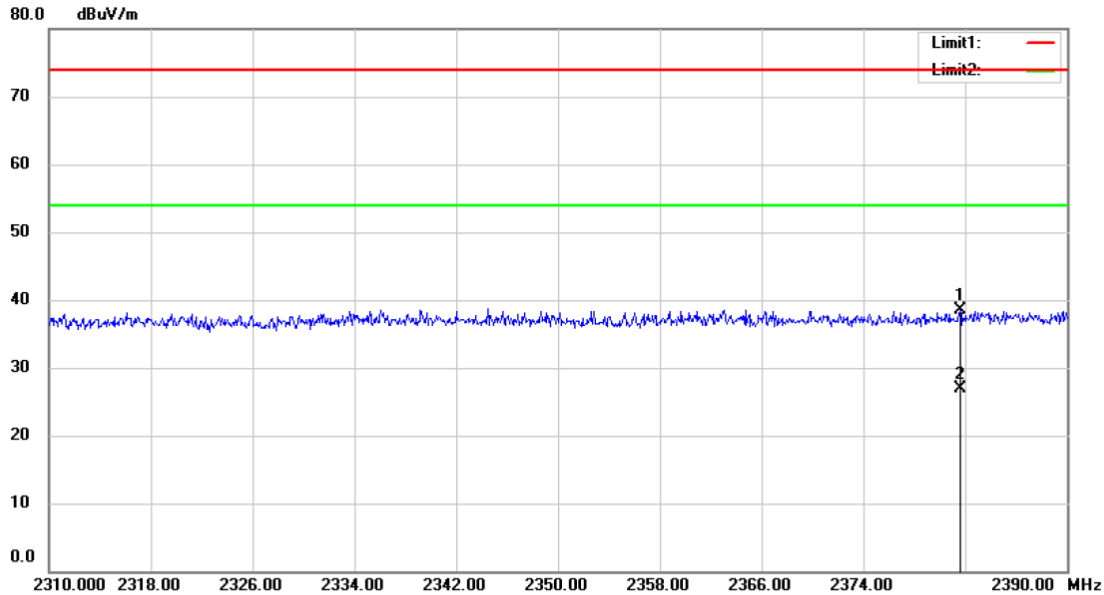

Site 3m Chamber #3      Polarization: *Vertical*      Temperature: 24 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 53 %  
 Mode:GFSK TX CH0


Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2381.600	62.42	-23.99	38.43	74.00	-35.57			peak
2	*	2381.600	50.83	-23.99	26.84	54.00	-27.16			AVG


\*:Maximum data    x:Over limit    !:over margin


Operator: KK



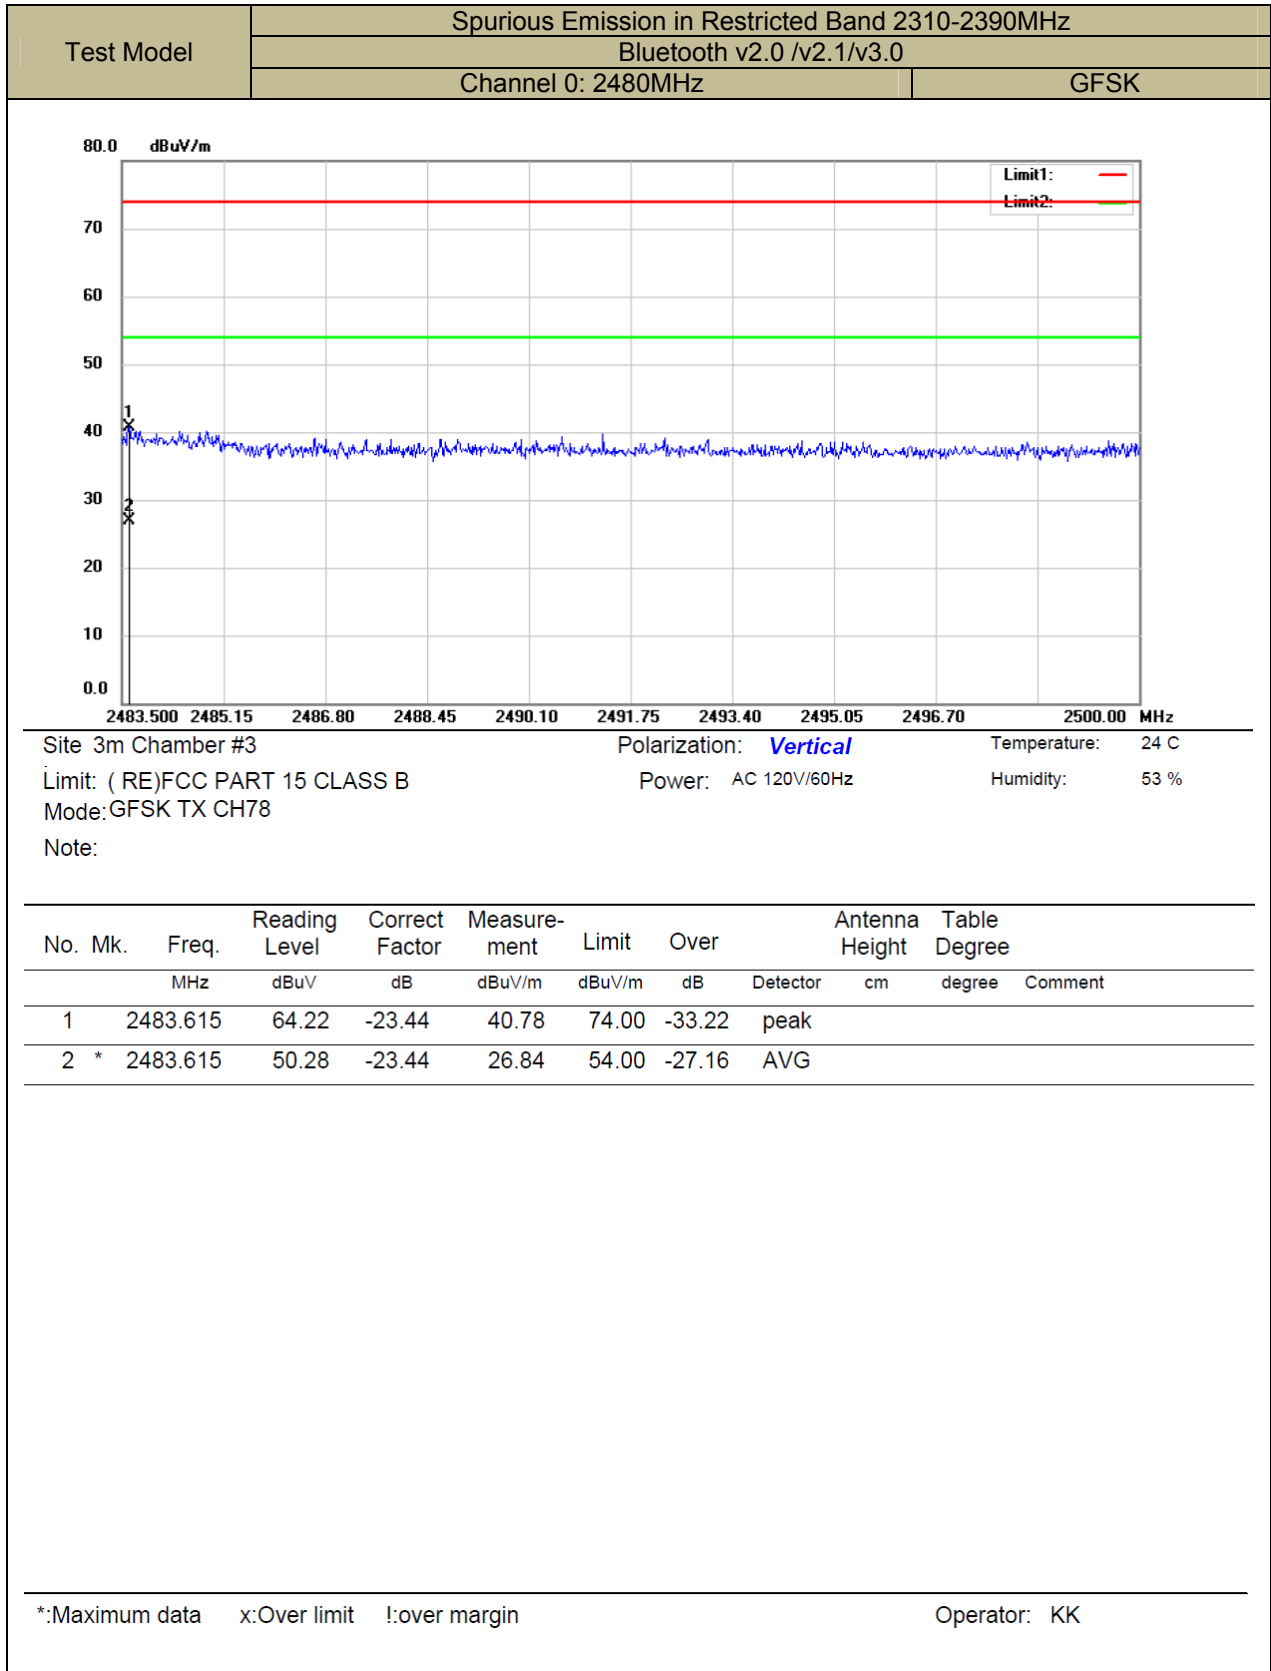


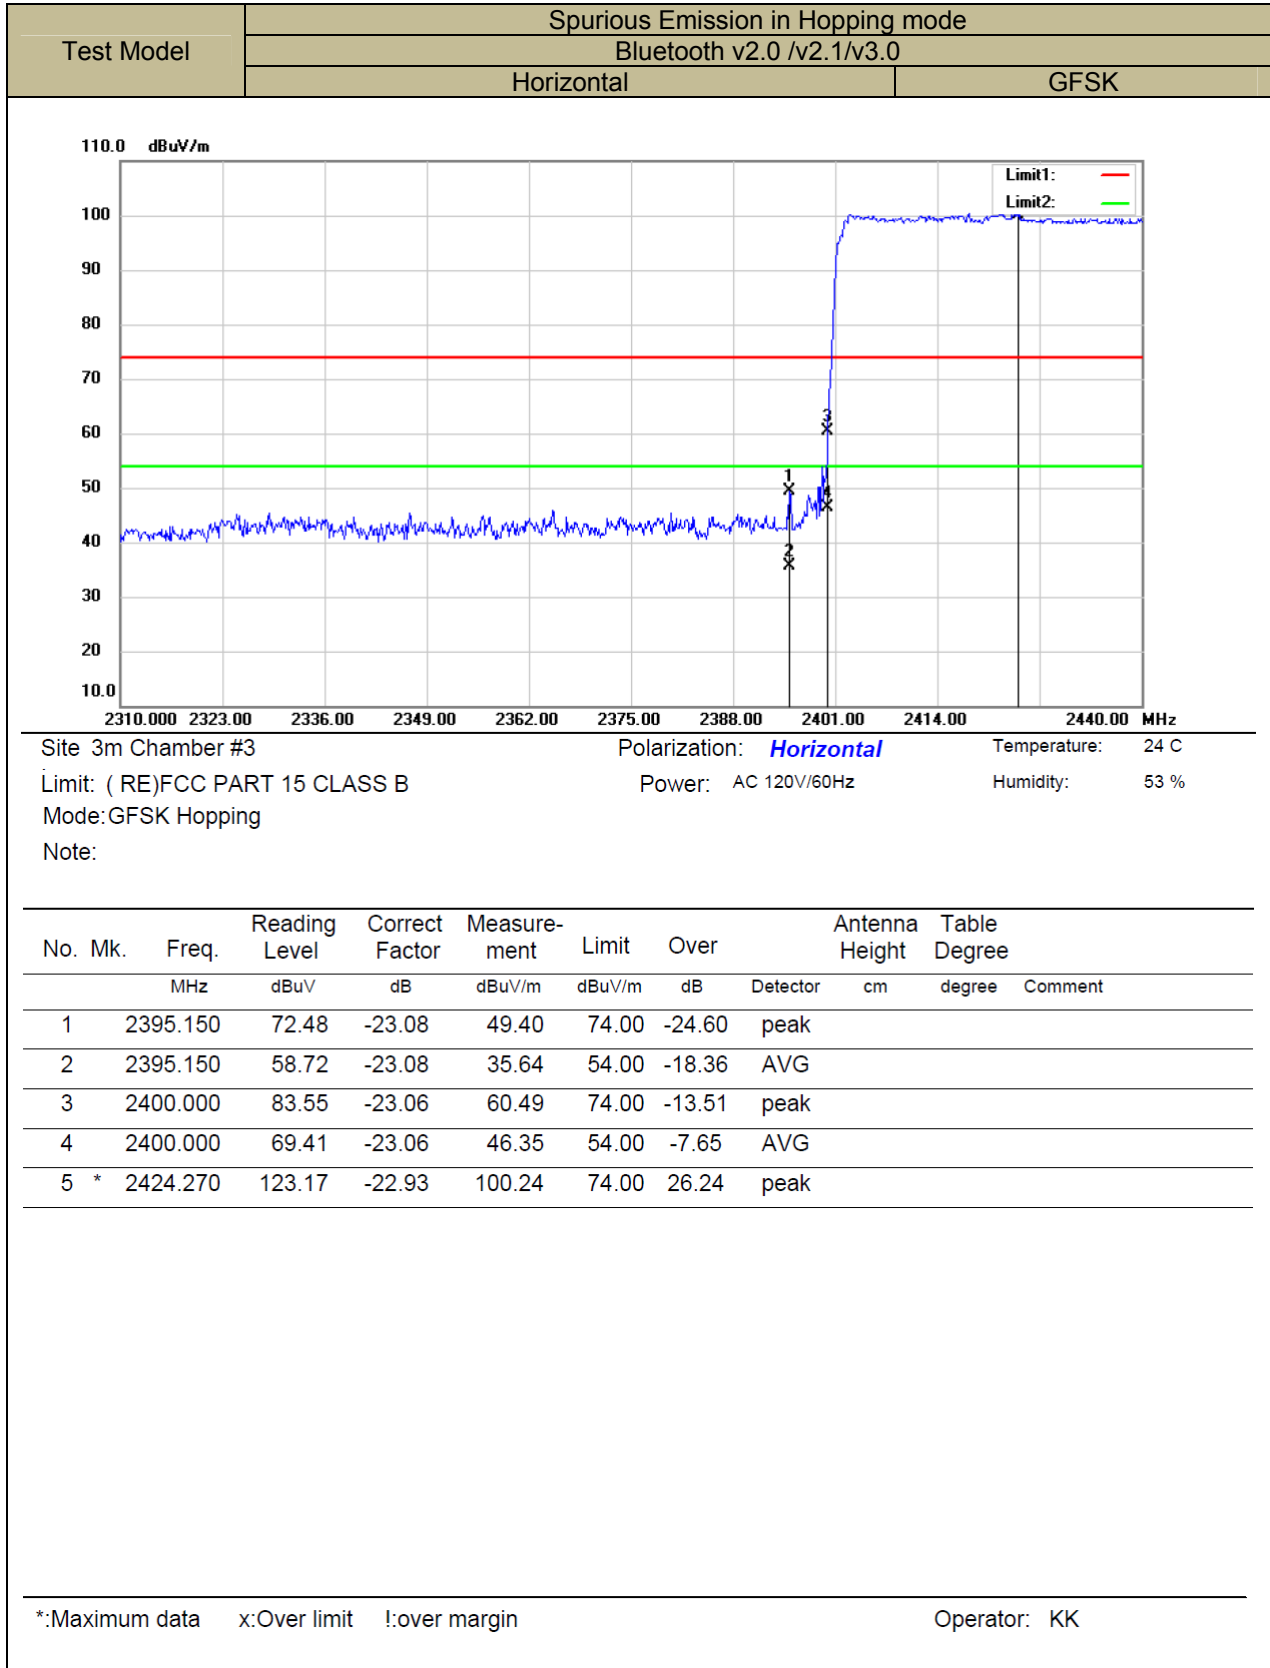

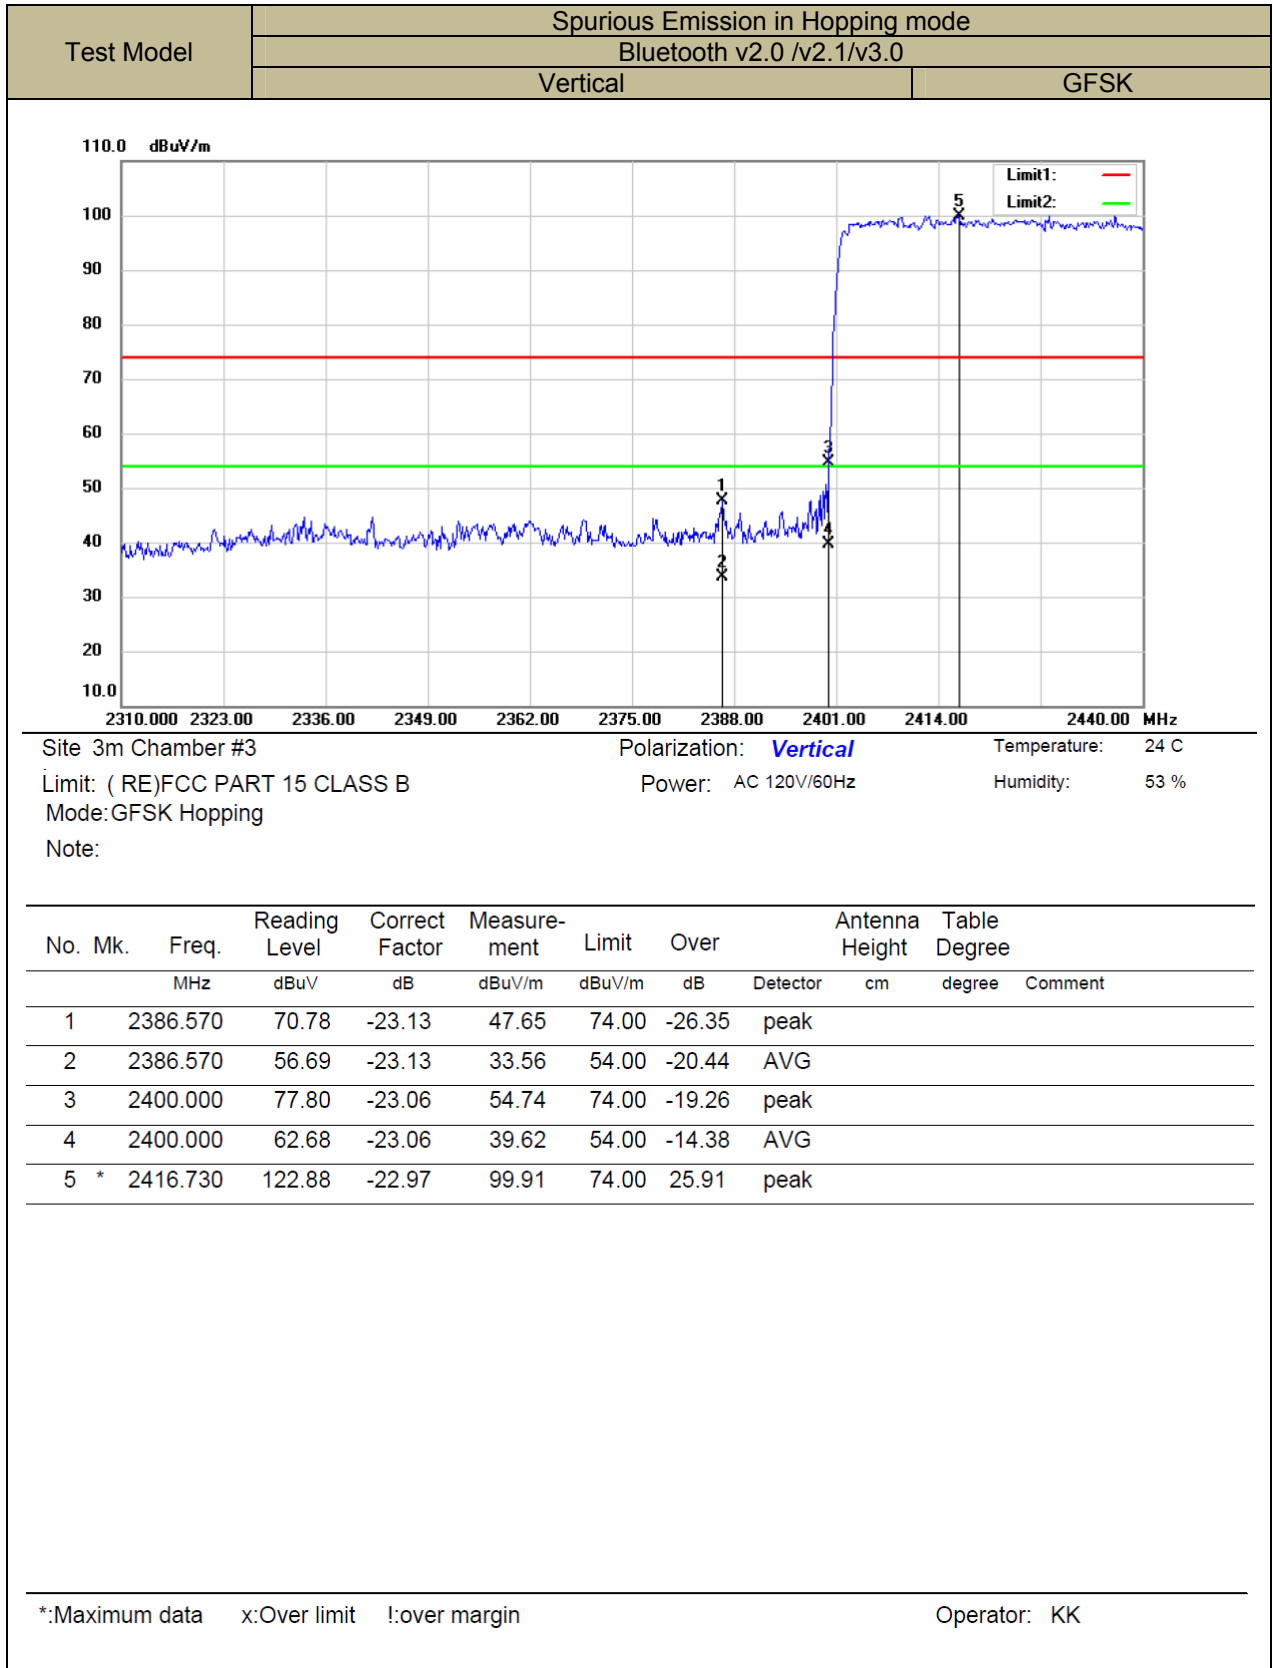

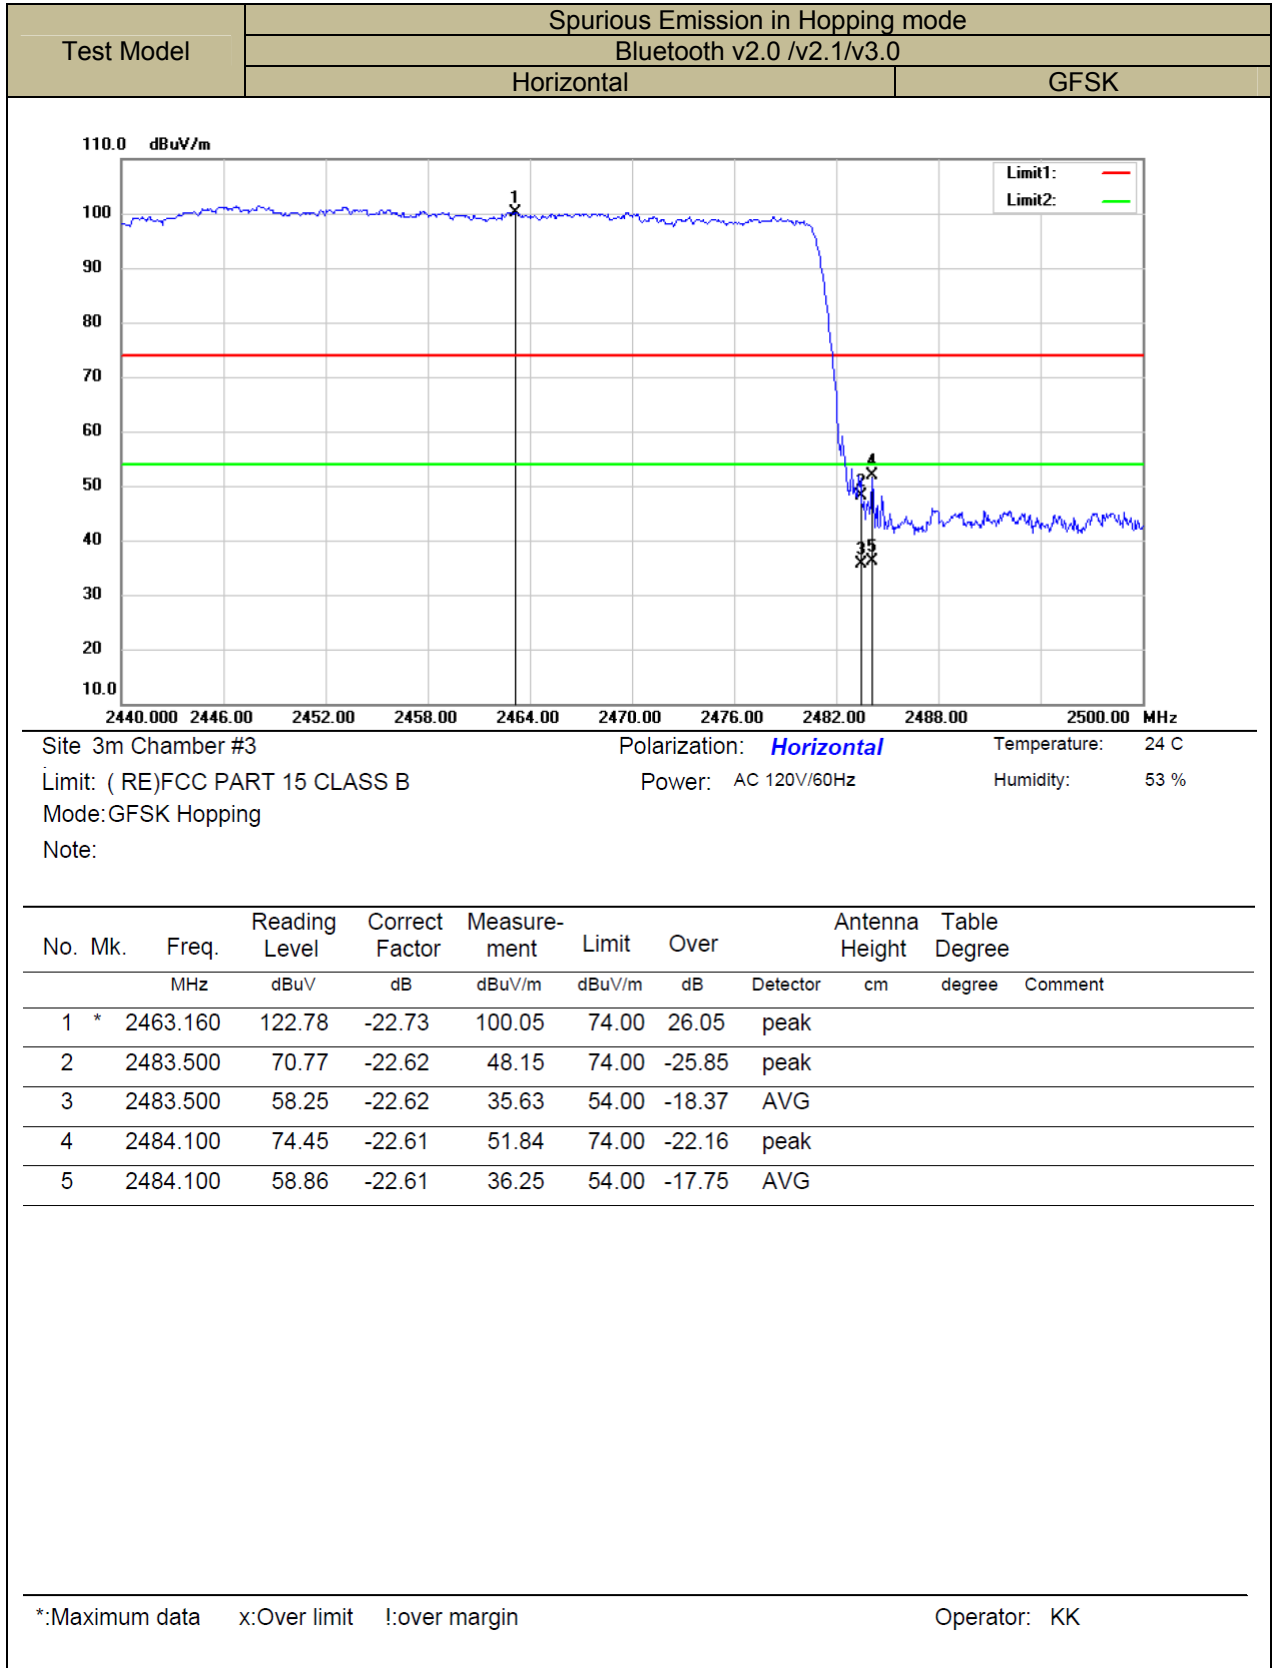



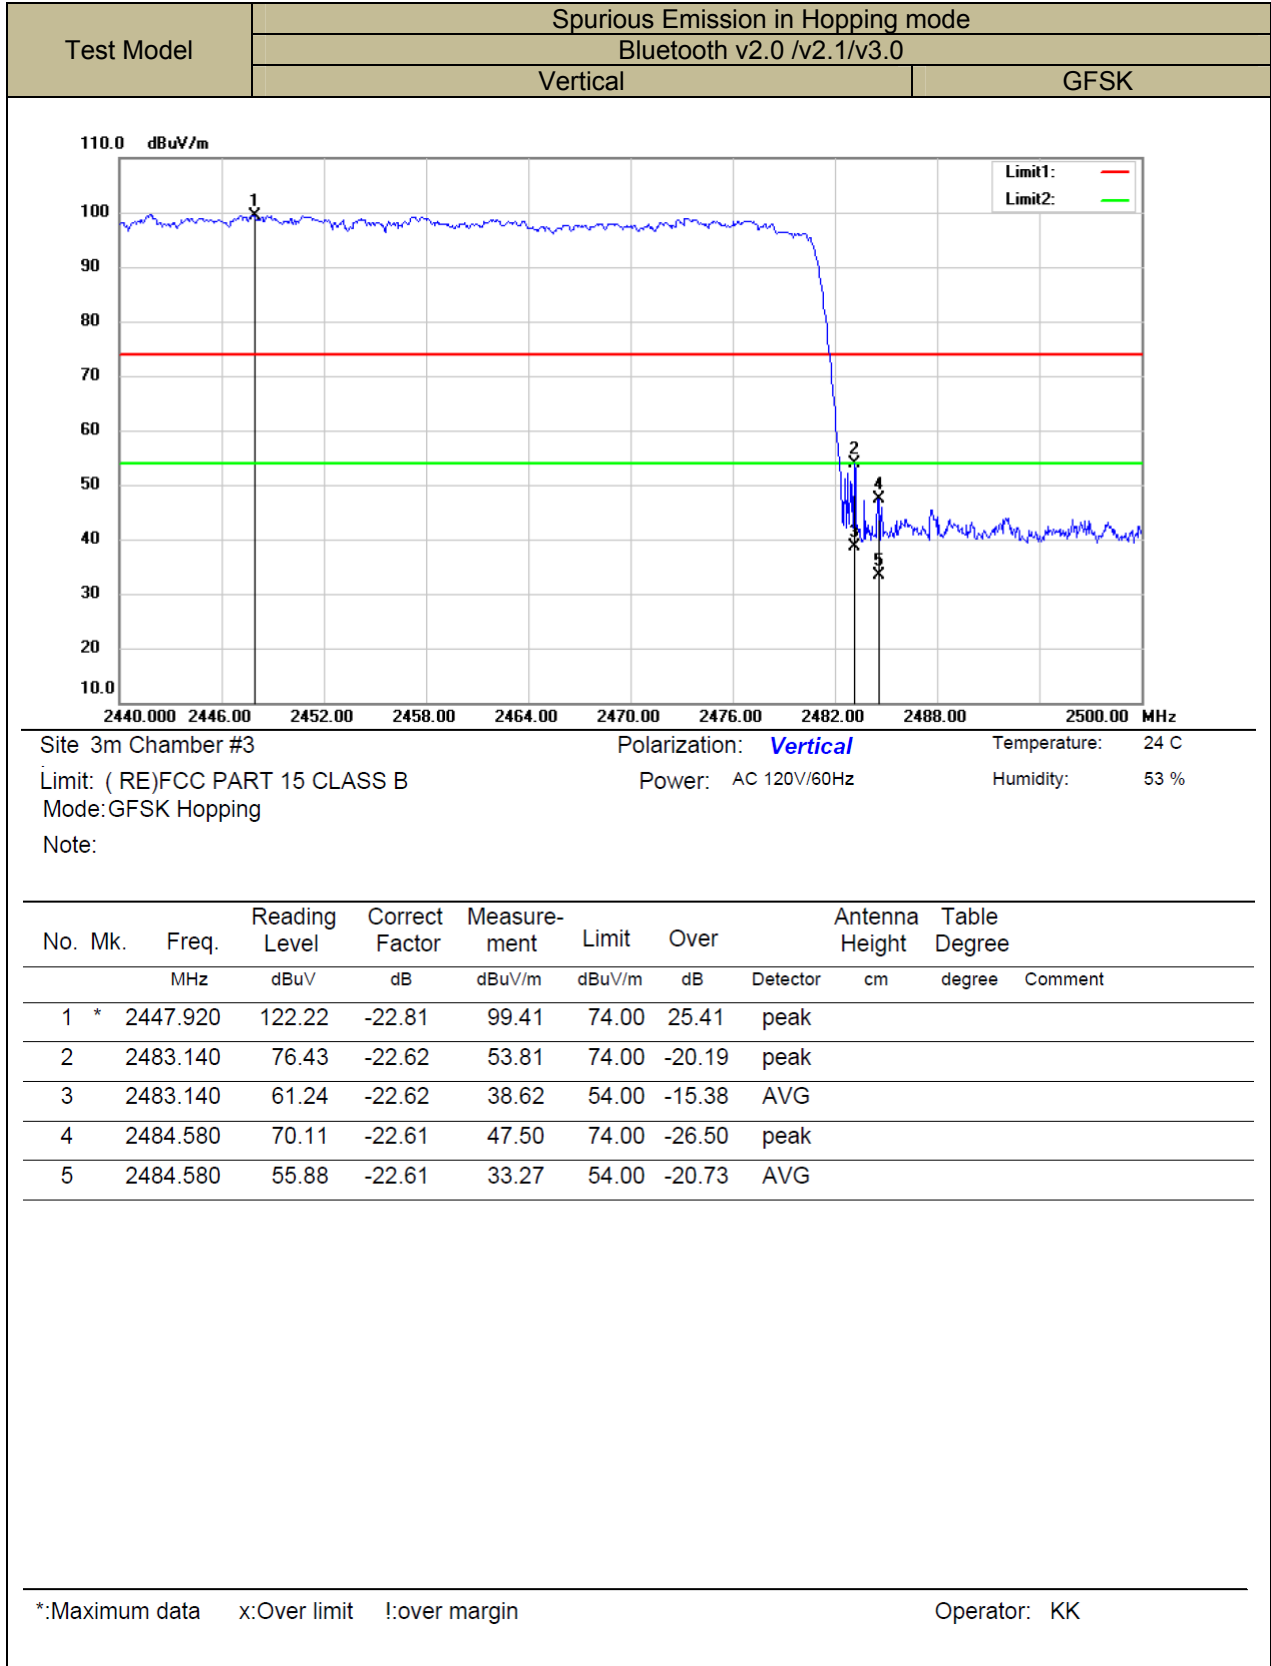

**9.8 CONDUCTED EMISSION TEST**

**9.8.1 Applicable Standard**

According to FCC Part 15.207(a)

**9.8.2 Conformance Limit**

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


**9.8.3 Test Configuration**

Test according to clause 7.3 conducted emission test setup

**9.8.4 Test Procedure**

The EUT was placed on a table which is 0.8m above ground plane.  
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
 Repeat above procedures until all frequency measured were complete.


**9.8.5 Test Results**

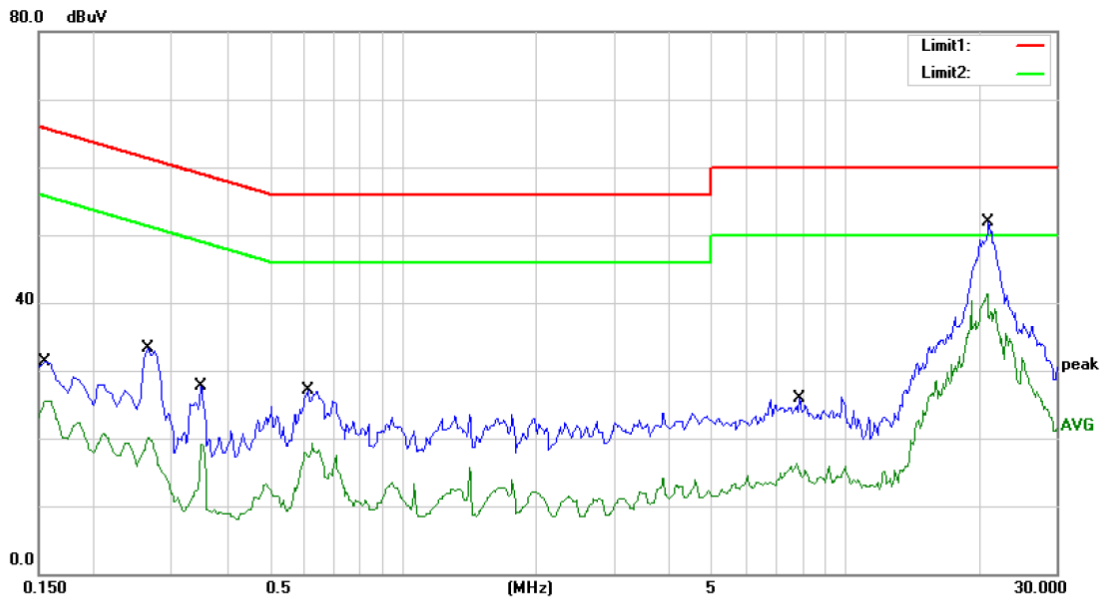

Site Conduction #2 Phase: **L1** Temperature: 26  
 Limit: (CE)FCC PART 15 class B\_QP Power: AC 120V/60Hz Humidity: 55 %  
 Mode: ON  
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1550	31.31	0.00	31.31	65.73	-34.42	QP	
2	0.1550	25.52	0.00	25.52	55.73	-30.21	AVG	
3	0.2650	33.24	0.00	33.24	61.27	-28.03	QP	
4	0.2650	20.17	0.00	20.17	51.27	-31.10	AVG	
5	0.3500	27.63	0.00	27.63	58.96	-31.33	QP	
6	0.3500	19.18	0.00	19.18	48.96	-29.78	AVG	
7	0.6100	27.08	0.00	27.08	56.00	-28.92	QP	
8	0.6100	19.28	0.00	19.28	46.00	-26.72	AVG	
9	7.8800	25.82	0.00	25.82	60.00	-34.18	QP	
10	7.8800	16.21	0.00	16.21	50.00	-33.79	AVG	
11 *	21.0500	51.93	0.00	51.93	60.00	-8.07	QP	
12	21.0500	41.34	0.00	41.34	50.00	-8.66	AVG	

\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: KK

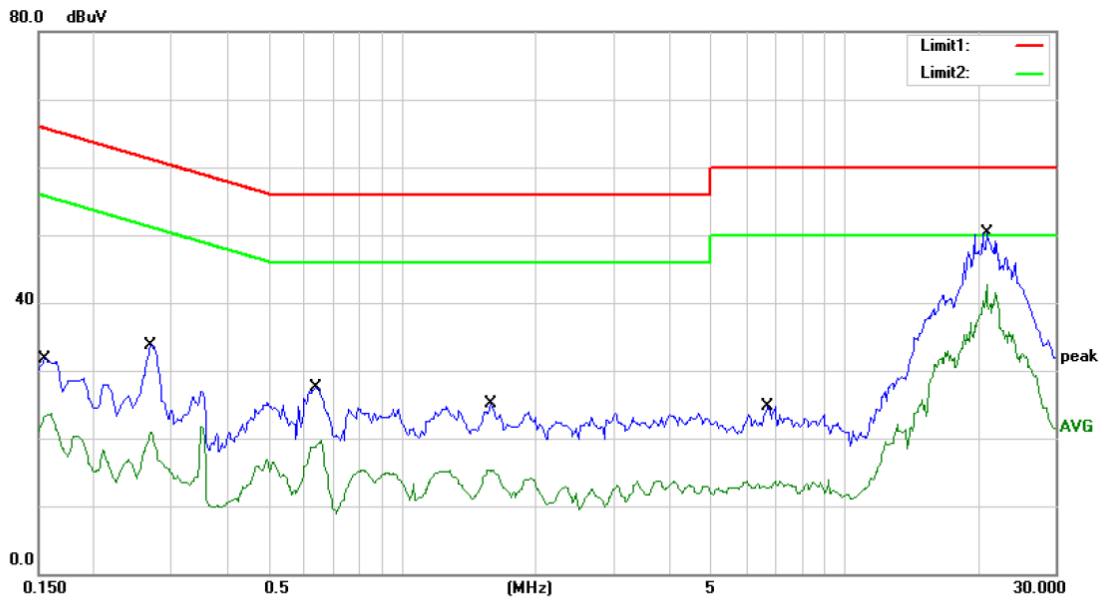


Site Conduction #2  
 Limit: (CE)FCC PART 15 class B\_QP  
 Mode: ON  
 Note:

Phase: **N**      Temperature: 26  
 Power: AC 120V/60Hz      Humidity: 55 %

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1550	31.77	0.00	31.77	65.73	-33.96	QP	
2	0.1550	23.60	0.00	23.60	55.73	-32.13	AVG	
3	0.2700	33.72	0.00	33.72	61.12	-27.40	QP	
4	0.2700	20.84	0.00	20.84	51.12	-30.28	AVG	
5	0.6350	27.57	0.00	27.57	56.00	-28.43	QP	
6	0.6350	19.60	0.00	19.60	46.00	-26.40	AVG	
7	1.5850	25.17	0.00	25.17	56.00	-30.83	QP	
8	1.5850	15.24	0.00	15.24	46.00	-30.76	AVG	
9	6.7100	24.73	0.00	24.73	60.00	-35.27	QP	
10	6.7100	13.72	0.00	13.72	50.00	-36.28	AVG	
11	20.9750	50.28	0.00	50.28	60.00	-9.72	QP	
12 *	20.9750	42.76	0.00	42.76	50.00	-7.24	AVG	


\*:Maximum data    x:Over limit    !:over margin    Comment: Factor build in receiver.    Operator: KK

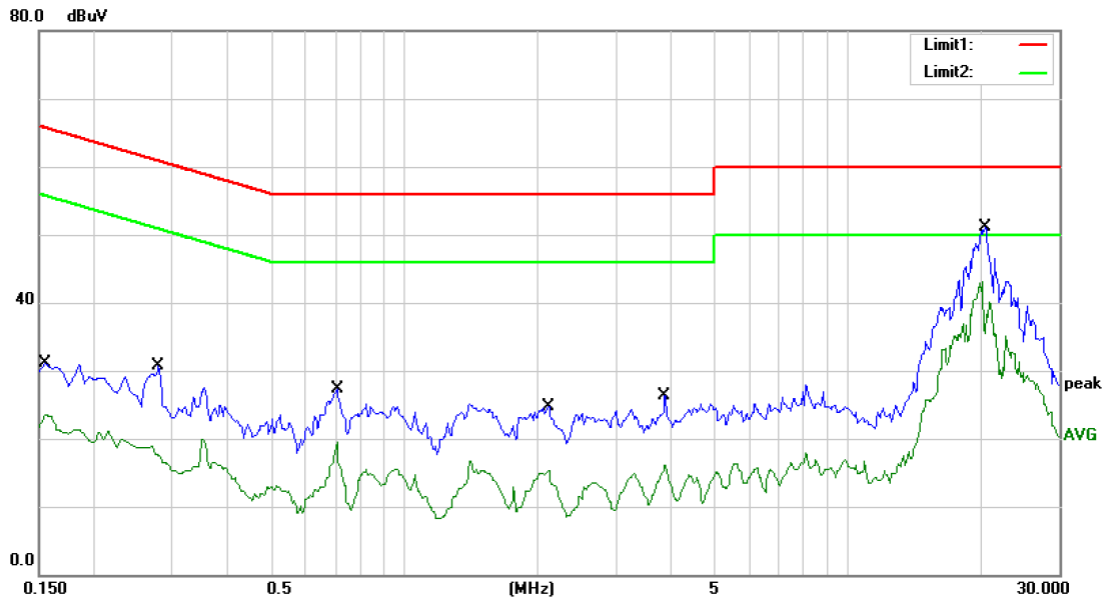

Site Conduction #2 Phase: **L1** Temperature: 26  
 Limit: (CE)FCC PART 15 class B\_QP Power: AC 240V/50Hz Humidity: 55 %  
 Mode: ON  
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1550	31.02	0.00	31.02	65.73	-34.71	QP	
2	0.1550	23.52	0.00	23.52	55.73	-32.21	AVG	
3	0.2800	30.68	0.00	30.68	60.82	-30.14	QP	
4	0.2800	21.07	0.00	21.07	50.82	-29.75	AVG	
5	0.7050	27.25	0.00	27.25	56.00	-28.75	QP	
6	0.7050	19.44	0.00	19.44	46.00	-26.56	AVG	
7	2.1200	24.76	0.00	24.76	56.00	-31.24	QP	
8	2.1200	15.37	0.00	15.37	46.00	-30.63	AVG	
9	3.8800	26.34	0.00	26.34	56.00	-29.66	QP	
10	3.8800	16.04	0.00	16.04	46.00	-29.96	AVG	
11	20.4750	51.03	0.00	51.03	60.00	-8.97	QP	
12 *	20.4750	43.07	0.00	43.07	50.00	-6.93	AVG	

\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: KK

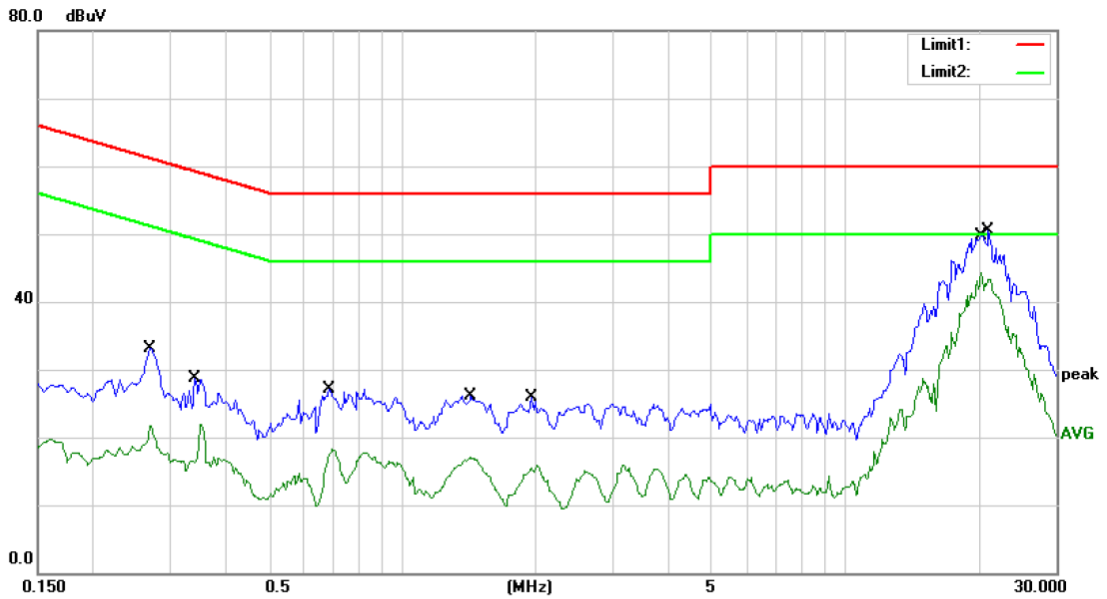

Site Conduction #2 Phase: **N** Temperature: 26  
 Limit: (CE)FCC PART 15 class B\_QP Power: AC 240V/50Hz Humidity: 55 %  
 Mode: ON  
 Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.2700	33.14	0.00	33.14	61.12	-27.98	QP	
2	0.2700	21.66	0.00	21.66	51.12	-29.46	AVG	
3	0.3400	28.75	0.00	28.75	59.20	-30.45	QP	
4	0.3400	21.94	0.00	21.94	49.20	-27.26	AVG	
5	0.6850	27.02	0.00	27.02	56.00	-28.98	QP	
6	0.6850	18.22	0.00	18.22	46.00	-27.78	AVG	
7	1.4300	26.10	0.00	26.10	56.00	-29.90	QP	
8	1.4300	17.01	0.00	17.01	46.00	-28.99	AVG	
9	1.9500	26.00	0.00	26.00	56.00	-30.00	QP	
10	1.9500	15.90	0.00	15.90	46.00	-30.10	AVG	
11 *	20.3000	44.28	0.00	44.28	50.00	-5.72	AVG	
12	21.0750	50.59	0.00	50.59	60.00	-9.41	QP	

\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: KK

**9.9 ANTENNA APPLICATION**

**9.9.1 Antenna Requirement**

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

**9.9.2 Result**

The EUT'S antenna is PCB antenna, and the antenna can't be replaced by the user, which in accordance to section 15.203, please refer to the internal photos. The antenna's gain is 1dBi and meets the requirement.

END OF REPORT