



# FCC PART 15.247 TEST REPORT

For

## XIAMEN COMFORT SCIENCE & TECHNOLOGY GROUP CO., LTD.

(5/F) NO.168, QIANPU ROAD, SIMING DISTRICT, XIAMEN, China

**FCC ID: YMX-EC3213B**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Massage Chair
<b>Report Number:</b> SZNS210723-30698E-00	
<b>Report Date:</b> 2021-08-02	
<b>Reviewed By:</b> RF Engineer	Candy Li <i>Candy Li</i>
<b>Prepared By:</b> Shenzhen Accurate Technology Co., Ltd. 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China Tel: (0755) 26503290 Fax: (0755) 26503396 <a href="http://www.atc-lab.com">Http://www.atc-lab.com</a>	

**Note:** This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “\*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**TABLE OF CONTENTS**

**GENERAL INFORMATION.....4**

    PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....4

    OBJECTIVE .....4

    TEST METHODOLOGY .....4

    MEASUREMENT UNCERTAINTY .....4

    TEST FACILITY .....5

**SYSTEM TEST CONFIGURATION.....6**

    DESCRIPTION OF TEST CONFIGURATION .....6

    EUT EXERCISE SOFTWARE .....6

    SPECIAL ACCESSORIES.....6

    EQUIPMENT MODIFICATIONS .....6

    SUPPORT EQUIPMENT LIST AND DETAILS .....6

    EXTERNAL I/O CABLE.....6

    BLOCK DIAGRAM OF TEST SETUP .....7

**SUMMARY OF TEST RESULTS .....8**

**TEST EQUIPMENT LIST .....9**

**FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE) .....10**

    APPLICABLE STANDARD .....10

    RESULT .....10

**FCC §15.203 – ANTENNA REQUIREMENT .....11**

    APPLICABLE STANDARD .....11

    ANTENNA CONNECTOR CONSTRUCTION .....11

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....12**

    APPLICABLE STANDARD .....12

    EUT SETUP .....12

    EMI TEST RECEIVER SETUP.....12

    TEST PROCEDURE .....12

    CORRECTED FACTOR & MARGIN CALCULATION .....13

    TEST DATA .....13

**FCC §15.209, §15.205 & §15.247(d) - Spurious Emissions .....16**

    APPLICABLE STANDARD .....16

    EUT SETUP .....16

    EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....17

    TEST PROCEDURE .....17

    CORRECTED AMPLITUDE & MARGIN CALCULATION .....17

    TEST DATA .....17

**FCC §15.247(a) (1) -CHANNEL Separation Test.....22**

    APPLICABLE STANDARD .....22

    TEST PROCEDURE .....22

    TEST DATA .....22

**FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH .....25**

    APPLICABLE STANDARD .....25

    TEST PROCEDURE .....25

    TEST DATA .....25

**FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST .....36**

    APPLICABLE STANDARD .....36

    TEST PROCEDURE .....36

    TEST DATA .....36

---

<b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)</b> .....	<b>39</b>
APPLICABLE STANDARD .....	39
TEST PROCEDURE .....	39
TEST DATA .....	39
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT</b> .....	<b>50</b>
APPLICABLE STANDARD .....	50
TEST PROCEDURE .....	50
TEST DATA .....	50
<b>FCC §15.247(d) - BAND EDGES TESTING</b> .....	<b>57</b>
APPLICABLE STANDARD .....	57
TEST PROCEDURE .....	57
TEST DATA .....	57

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Product	Massage Chair
Tested Model	EC-3213B
Multiple Model	OG5500
Model Differences*	All the same except model name is different.
Frequency Range	Bluetooth: 2402~2480MHz
Transmit Peak Power	1.78dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	PCB Antenna: 2.5dBi
Voltage Range	AC110-120V/60Hz
Date of Test	2021-07-23 to 2021-07-30
Sample serial number	SZNS210723-30698E-S1
Received date	2021-07-23
Sample/EUT Status	Good condition

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Measurement Uncertainty

Parameter		Uncertainty
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz- 18GHz	4.98dB
	18GHz- 26.5GHz	5.06dB

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

---

---

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 5077A-2.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

### EUT Exercise Software

“BK32xx RF Test\_V1.8.2” exercise software was made to the EUT tested and the power level is 3\*. The software and power level was provided by the applicant.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number	Specification
/	/	/	/	/

### External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Detachable AC Line	1.8	EUT	LISN

### Block Diagram of Test Setup

For conducted emission:

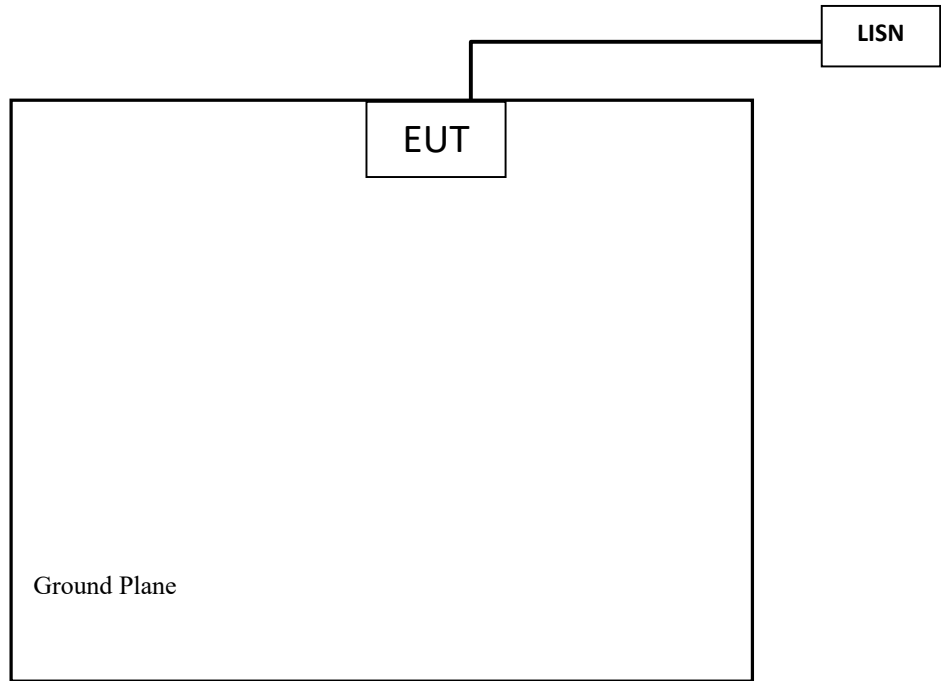

**SUMMARY OF TEST RESULTS**

<b>Rules</b>	<b>Description of Test</b>	<b>Result</b>
FCC §15.247 (i) & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
FCC §15.203	Antenna Requirement	Compliance
FCC §15.207(a)	AC Line Conducted Emissions	Compliance
FCC §15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
FCC §15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliance
FCC §15.247(a)(1)	Channel Separation Test	Compliance
FCC §15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
FCC §15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
FCC §15.247(b)(1)	Peak Output Power Measurement	Compliance
FCC §15.247(d)	Band edges	Compliance



**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	Test Receiver	ESPI3	100396	2020/12/24	2021/12/23
R & S	L.I.S.N.	ENV216	101314	2020/12/25	2021/12/24
Anritsu Corp	50Ω Coaxial Switch	MP59B	6200506474	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-2m	No.2	2020/12/25	2021/12/24
Radiated Emissions Test					
Rohde&Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2020/12/24	2021/12/23
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2021/07/08	2022/07/07
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9170	9170-359	2020/01/05	2023/01/04
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2020/11/28	2021/11/27
Unknown	RF Coaxial Cable	N-5m	No.3	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.4	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.6	2020/12/25	2021/12/24
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2020/12/24	2021/12/23
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2020/12/24	2021/12/23
WEINSCHEL	10dB Attenuator	5324	AU 3842	Each time	

\* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

**Applicable Standard**

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

**Result**

**Calculated Formulary:**

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	2.5	1.78	2	1.58	20	0.0006	1

To maintain compliance with the FCC’s RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

---

**FCC §15.203 – ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**Antenna Connector Construction**

The EUT has one internal PCB antenna arrangement which was permanently attached and the maximum antenna gain is 2.5dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Antenna Gain	Impedance	Frequency Range
PCB	2.5dBi	50 Ω	2.4~2.5GHz


**Result:** Compliance

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### EUT Setup

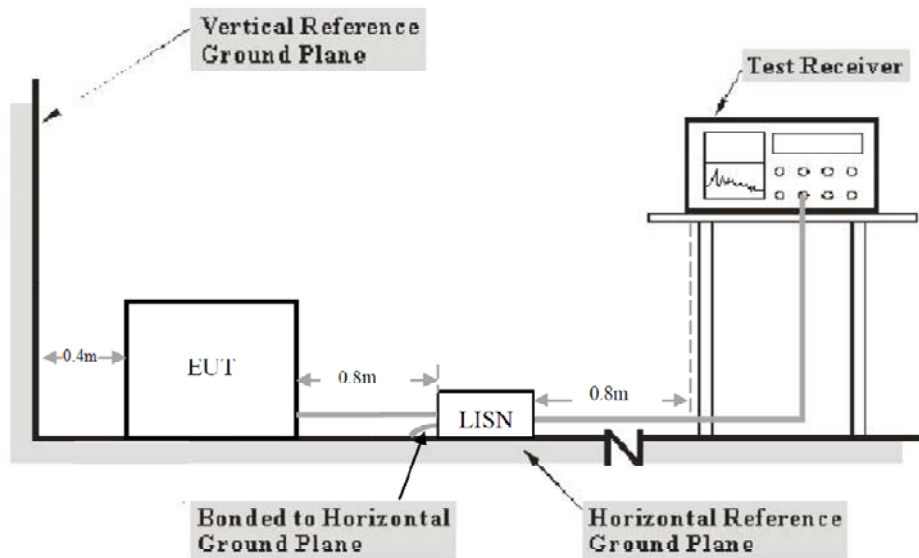

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{level}$$

$$\text{Level} = \text{reading level} + \text{Transd Factor}$$

## Test Data


### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Fan Yang on 2021-07-23.*

EUT operation mode: Transmitting

**AC 120V/60 Hz, Line**

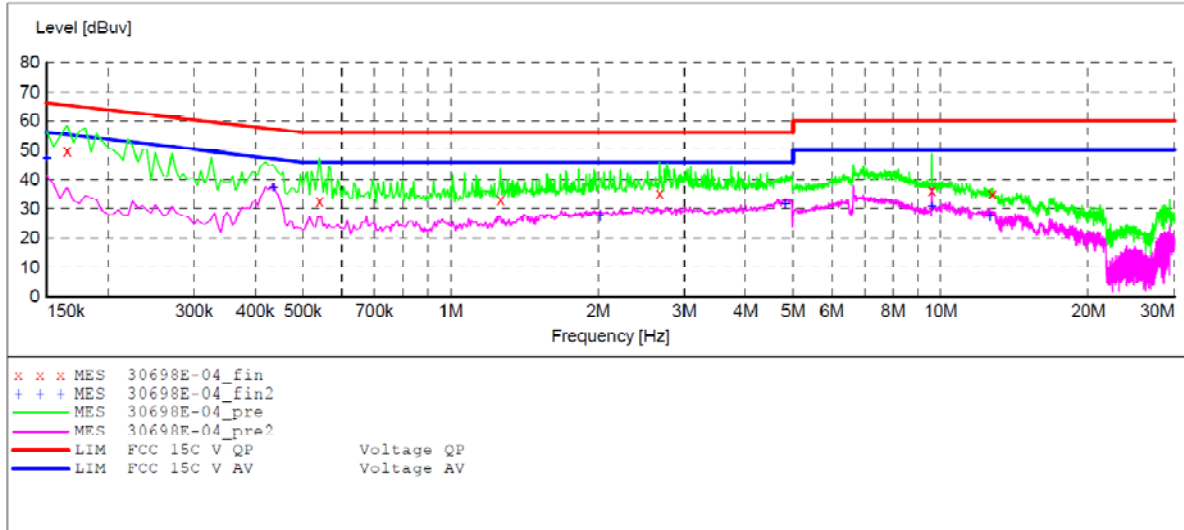

**MEASUREMENT RESULT: "30698E-04\_fin"**

2021-7-23 02:39


Frequency MHz	Level dBuv	Transd dB	Limit dBuv	Margin dB	Detector	Line	PE
0.165000	49.60	10.8	65	15.4	QP	L1	GND
0.540000	32.40	11.0	56	23.6	QP	L1	GND
1.265000	33.00	11.2	56	23.0	QP	L1	GND
2.670000	35.20	11.3	56	20.8	QP	L1	GND
9.590000	36.40	11.6	60	23.6	QP	L1	GND
12.750000	35.00	11.6	60	25.0	QP	L1	GND

**MEASUREMENT RESULT: "30698E-04\_fin2"**

2021-7-23 02:39

Frequency MHz	Level dBuv	Transd dB	Limit dBuv	Margin dB	Detector	Line	PE
0.150000	47.20	10.8	56	8.8	AV	L1	GND
0.435000	37.00	11.0	47	10.0	AV	L1	GND
2.020000	27.10	11.3	46	18.9	AV	L1	GND
4.830000	31.30	11.4	46	14.7	AV	L1	GND
9.590000	30.40	11.6	50	19.6	AV	L1	GND
12.625000	27.00	11.6	50	23.0	AV	L1	GND

**AC 120V/60 Hz, Neutral**

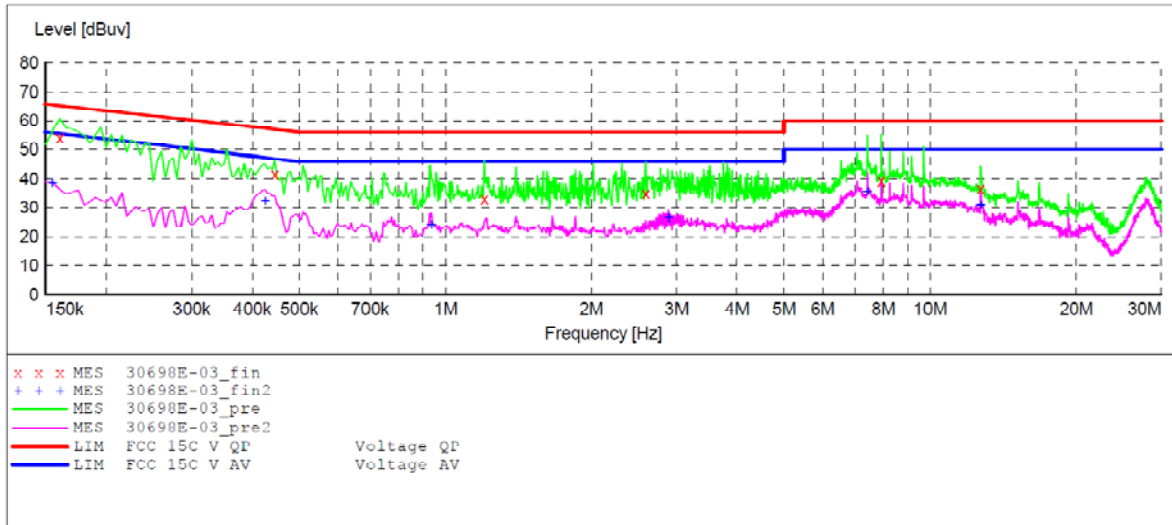

**MEASUREMENT RESULT: "30698E-03\_fin"**

2021-7-23 02:36

Frequency MHz	Level dBu	Transd dB	Limit dBu	Margin dB	Detector	Line	PE
0.160000	54.40	10.8	66	11.6	QP	N	GND
0.445000	41.80	11.0	57	15.2	QP	N	GND
1.205000	33.00	11.2	56	23.0	QP	N	GND
2.590000	35.00	11.3	56	21.0	QP	N	GND
7.920000	39.40	11.5	60	20.6	QP	N	GND
12.725000	36.50	11.6	60	23.5	QP	N	GND

**MEASUREMENT RESULT: "30698E-03\_fin2"**

2021-7-23 02:36

Frequency MHz	Level dBu	Transd dB	Limit dBu	Margin dB	Detector	Line	PE
0.155000	38.70	10.8	56	17.3	AV	N	GND
0.425000	32.00	11.0	47	15.0	AV	N	GND
0.935000	24.00	11.1	46	22.0	AV	N	GND
2.890000	26.40	11.3	46	19.6	AV	N	GND
7.410000	35.60	11.5	50	14.4	AV	N	GND
12.725000	30.70	11.6	50	19.3	AV	N	GND


## FCC §15.209, §15.205 & §15.247(d) - Spurious Emissions

### Applicable Standard


FCC §15.205; §15.209; §15.247(d);

### EUT Setup

Below 1 GHz:

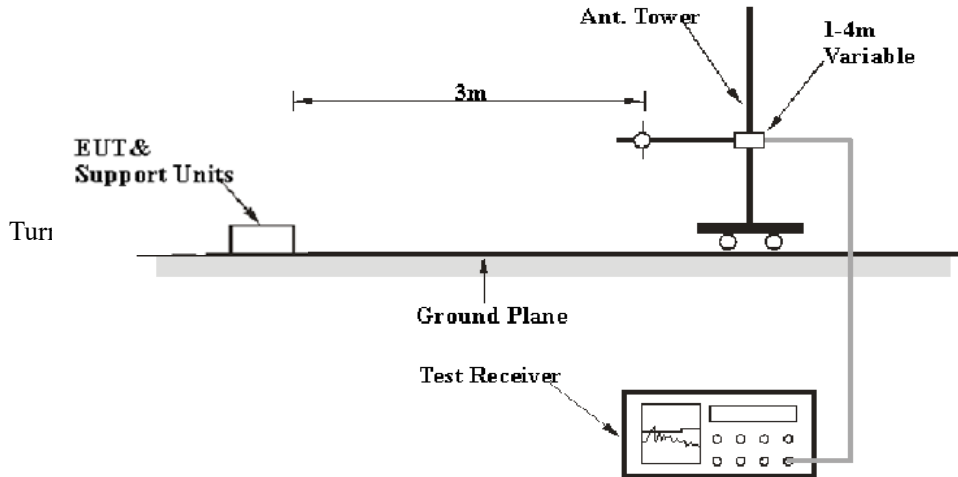

Above 1GHz:

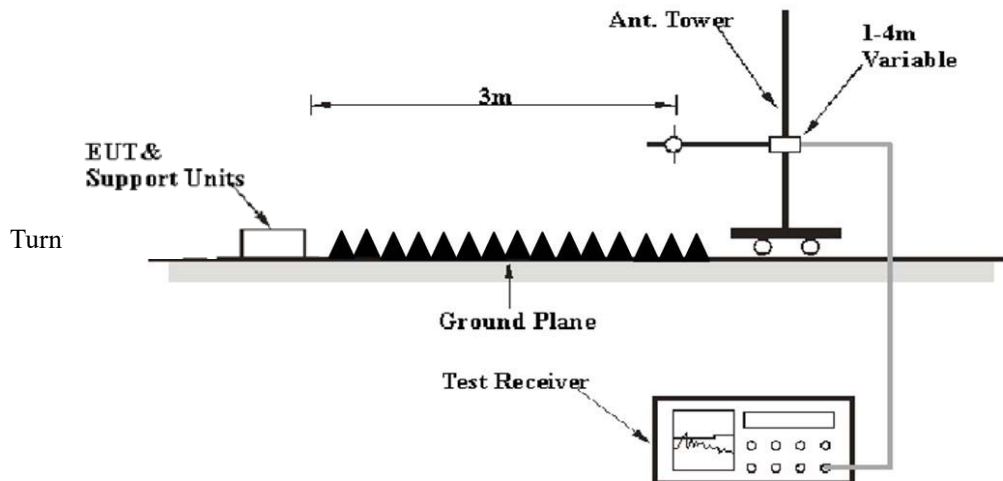

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.



## EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin} &= \text{Result} - \text{Limit} \\ \text{Result} &= \text{Reading} + \text{Factor} \end{aligned}$$

## Test Data

### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa


*The testing was performed by Fan Yang on 2021-07-30.*

*EUT operation mode: Transmitting (Scan with GFSK,  $\pi/4$ -DQPSK, 8DPSK mode, the worst case is 8DPSK Mode)*

**Below 1GHz:**


**Worst case for 8DPSK Mode, High channel:**

Horizontal

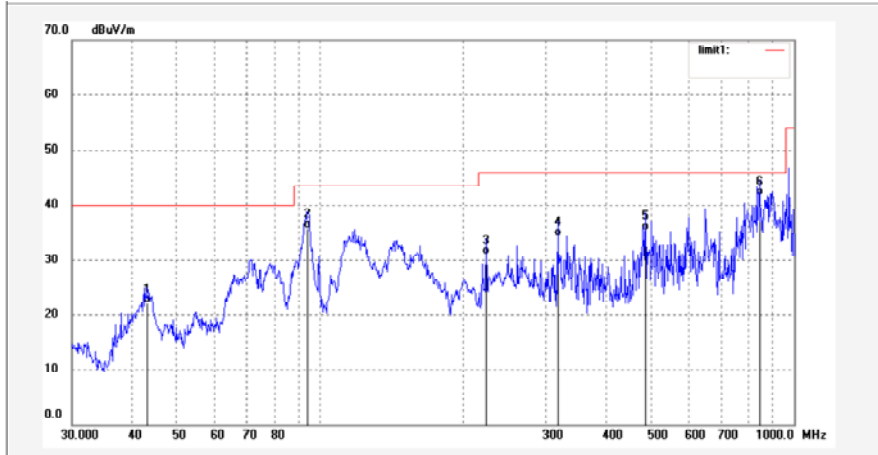

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	43.3534	39.62	-17.52	22.10	40.00	-17.90	QP			
2	94.0979	55.70	-19.89	35.81	43.50	-7.69	QP			
3	224.5193	47.94	-16.88	31.06	46.00	-14.94	QP			
4	316.5890	48.51	-14.19	34.32	46.00	-11.68	QP			
5	485.6093	46.23	-10.72	35.51	46.00	-10.49	QP			
6	845.0878	46.25	-4.55	41.70	46.00	-4.30	QP			

Vertical

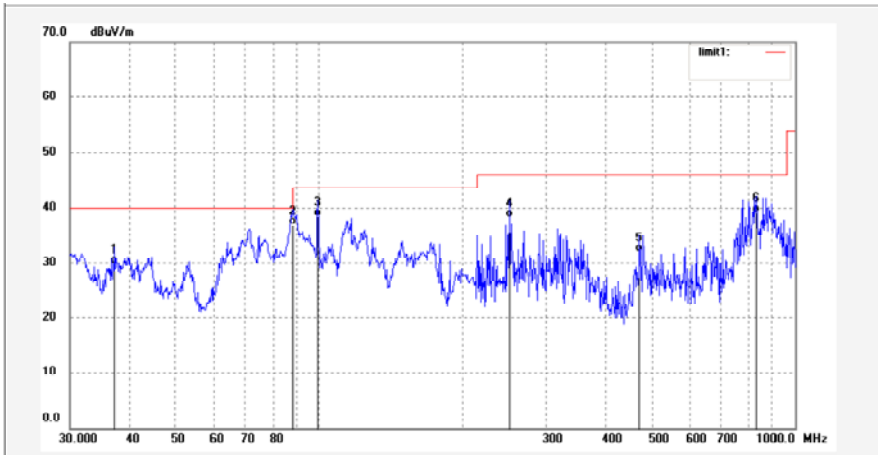

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	37.1550	45.39	-15.55	29.84	40.00	-10.16	QP			
2	88.0329	56.87	-20.10	36.77	43.50	-6.73	QP			
3	99.5281	56.68	-18.26	38.42	43.50	-5.08	QP			
4	251.1804	54.61	-16.42	38.19	46.00	-7.81	QP			
5	470.5232	42.72	-10.72	32.00	46.00	-14.00	QP			
6	830.4002	43.93	-4.79	39.14	46.00	-6.86	QP			

**Above 1GHz (worst case for 8DPSK):**

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave.		Height (m)	Polar (H/V)				
Low Channel									
2310	45.56	PK	131	2.1	H	-6.84	38.72	74	35.28
2310	48.03	PK	283	1.1	V	-6.84	41.19	74	32.81
2390	46.25	PK	283	1.8	H	-6.44	39.81	74	34.19
2390	48.6	PK	193	2.0	V	-6.44	42.16	74	31.84
4804	55.44	PK	273	1.3	H	2.81	58.25	74	15.75
4804	39.58	Ave.	273	1.3	H	2.81	42.39	54	11.61
4804	54.91	PK	113	1.3	V	2.81	57.72	74	16.28
4804	38.99	Ave.	113	1.3	V	2.81	41.8	54	12.2
Middle Channel									
4882	56.59	PK	346	1.9	H	3.04	59.63	74	14.37
4882	40.05	Ave.	346	1.9	H	3.04	43.09	54	10.91
4882	55.87	PK	212	1.9	V	3.04	58.91	74	15.09
4882	40.12	Ave.	212	1.9	V	3.04	43.16	54	10.84
High Channel									
2483.5	63.91	PK	340	1.9	H	-5.96	57.95	74	16.05
2483.5	54.59	Ave.	340	1.9	H	-5.96	48.63	54	5.37
2483.5	62.91	PK	151	2.0	V	-5.96	56.95	74	17.05
2483.5	53.12	Ave.	151	2.0	V	-5.96	47.16	54	6.84
2500	55.63	PK	336	1.5	H	-5.88	49.75	74	24.25
2500	52.49	PK	133	1.3	V	-5.88	46.61	74	27.39
4960	55.49	PK	140	1.1	H	3.29	58.78	74	15.22
4960	39.68	Ave.	140	1.1	H	3.29	42.97	54	11.03
4960	53.74	PK	195	1.3	V	3.29	57.03	74	16.97
4960	38.55	Ave.	195	1.3	V	3.29	41.84	54	12.16

**Note:**

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


The other spurious emission which is 20dB below to the limit was not recorded.

When the test result of peak was less than the limit of average, just peak value were recorded.


1 GHz - 18 GHz: (Pre-Scan plots)

Middle channel

Horizontal

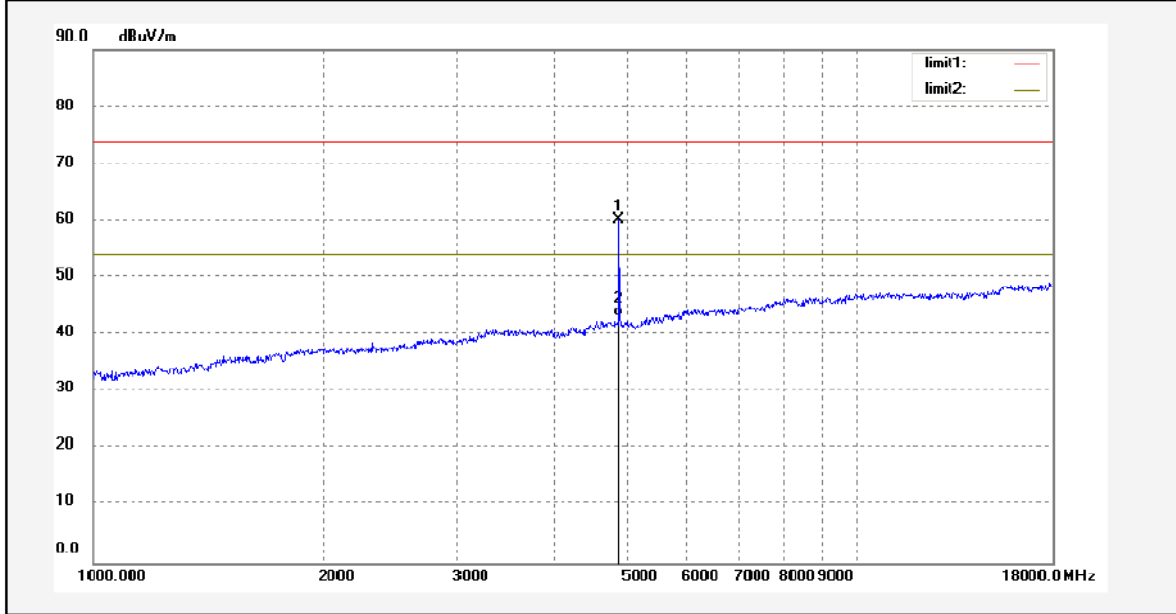


Vertical

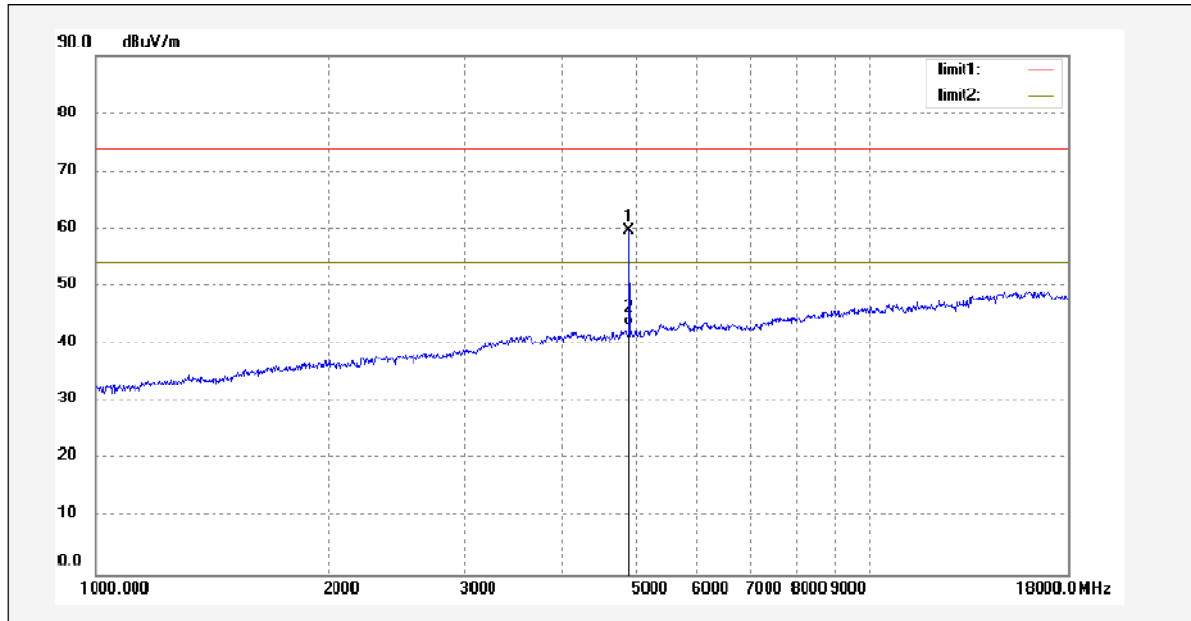


18-25GHz: (Pre-Scan plots)

Middle channel

Horizontal

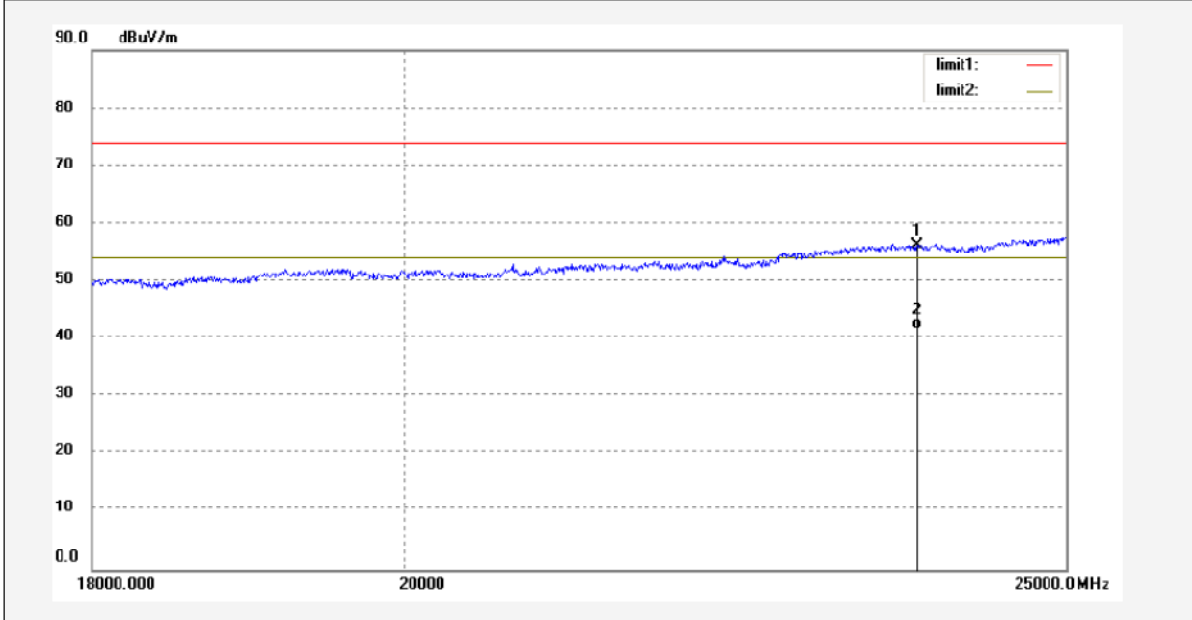

Vertical

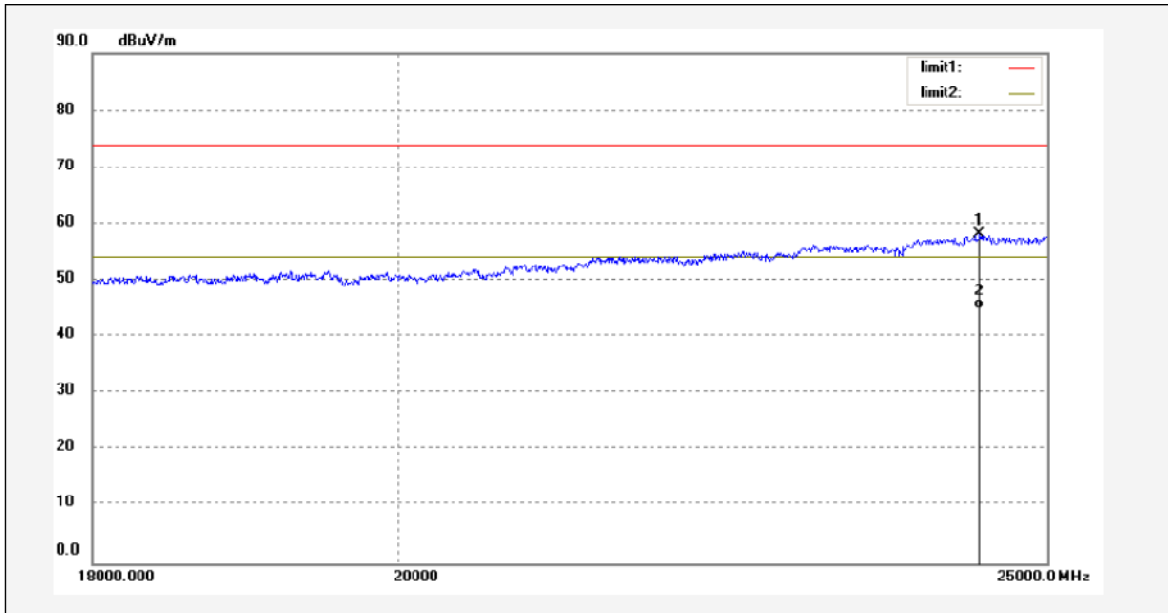

## FCC §15.247(a) (1) -CHANNEL Separation Test

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### Test Procedure

1. Set the EUT in transmitting mode, max hold the channel.
2. Set the adjacent channel of the EUT and max hold another trace.
3. Measure the channel separation.

### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

*The testing was performed by Fan Yang on 2021-07-28.*

*EUT operation mode: Transmitting*


**Test Result: Pass**

*Please refer to following table and plots.*

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	≥Limit (MHz)	Result
<b>BDR (GFSK)</b>	Middle	2441	1.003	0.651	Pass
	Adjacent	2442			
<b>EDR (π/4-DQPSK)</b>	Middle	2441	1.003	0.903	Pass
	Adjacent	2442			
<b>EDR (8DPSK)</b>	Middle	2441	1.003	0.897	Pass
	Adjacent	2442			


Note: the limit = (2/3) \* 20dB bandwidth

**BDR (GFSK): Middle Channel**

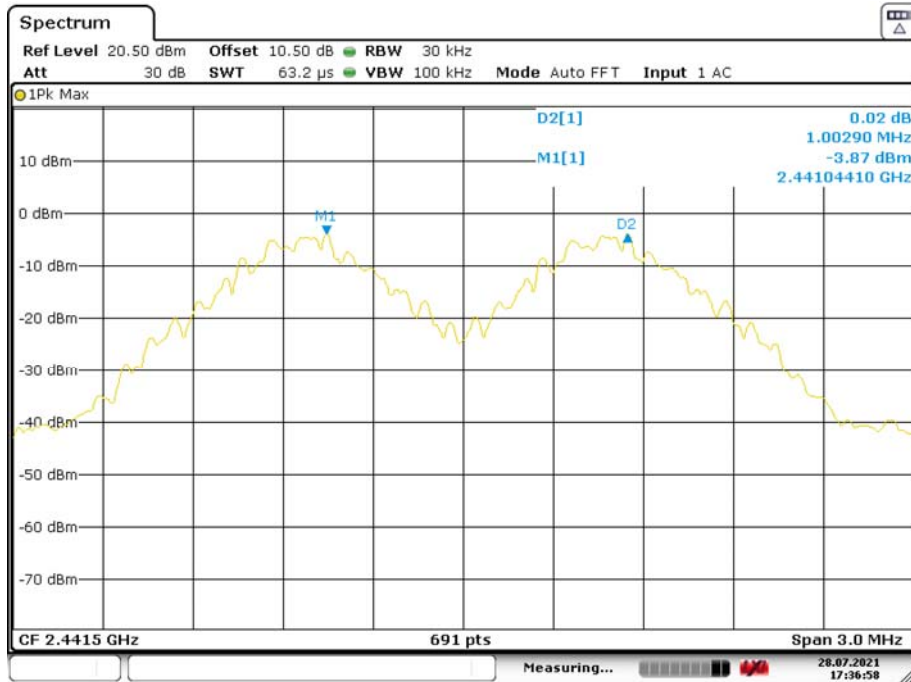


Date: 28.JUL.2021 17:36:58

### EDR ( $\pi/4$ -DQPSK): Middle Channel

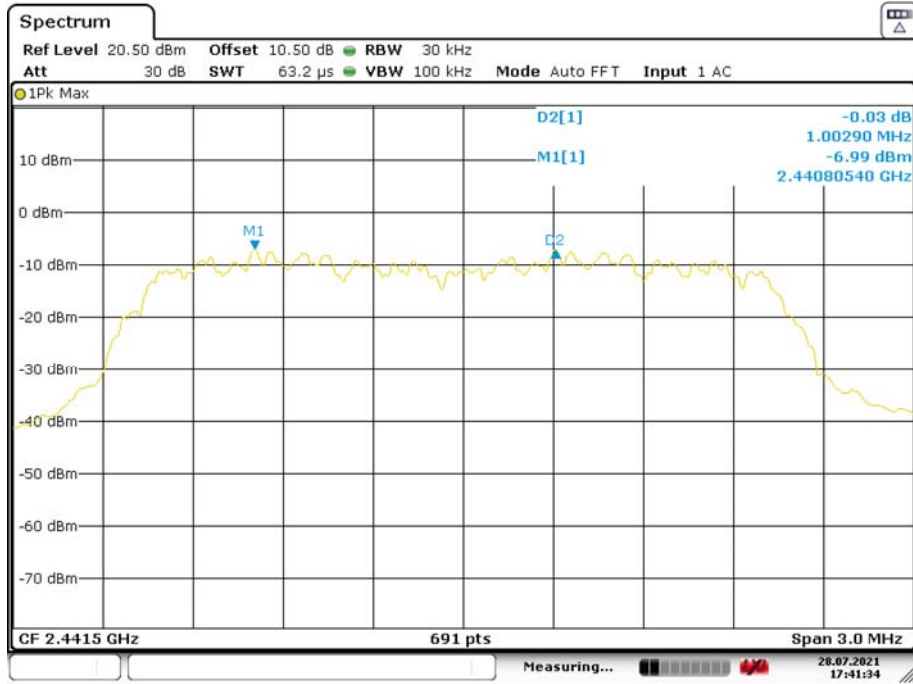

Date: 28.JUL.2021 17:41:34

### EDR (8DPSK): Middle Channel

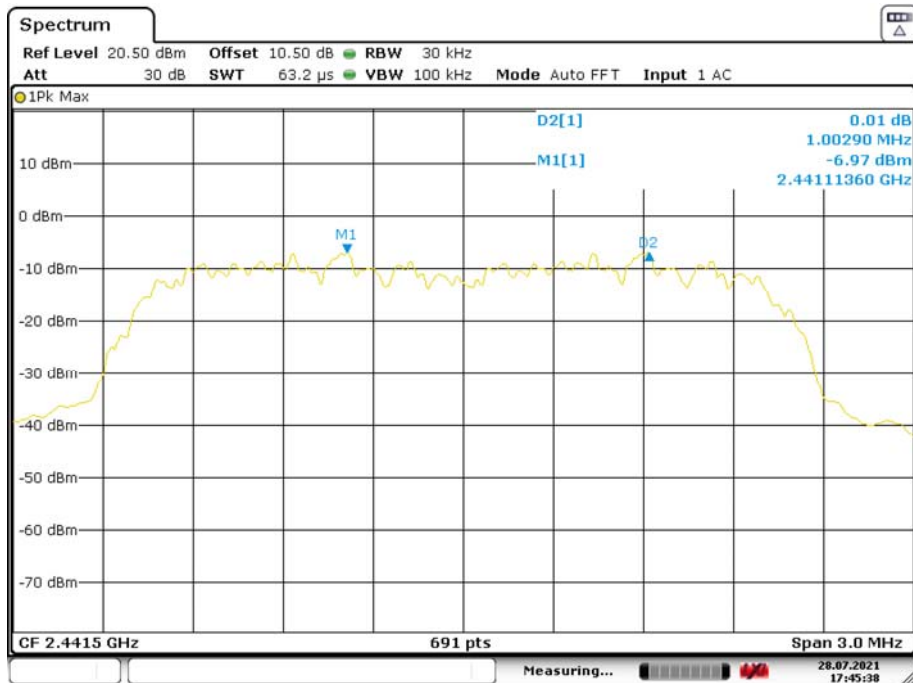

Date: 28.JUL.2021 17:45:38



## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


### Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Fan Yang on 2021-07-28.*

*EUT operation mode: Transmitting*


**Test Result: Pass**

*Please refer to following table and plots.*

<b>Mode</b>	<b>Frequency (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>	<b>20 dB Emission Bandwidth (MHz)</b>
BDR (GFSK)	2402	0.923	0.977
	2441	0.926	0.973
	2480	0.920	0.977
EDR ( $\pi/4$ -DQPSK)	2402	1.208	1.355
	2441	1.202	1.350
	2480	1.208	1.350
EDR (8DPSK)	2402	1.196	1.346
	2441	1.196	1.342
	2480	1.196	1.346


**BDR (GFSK):**

**20dB Emission Bandwidth, Low Channel**

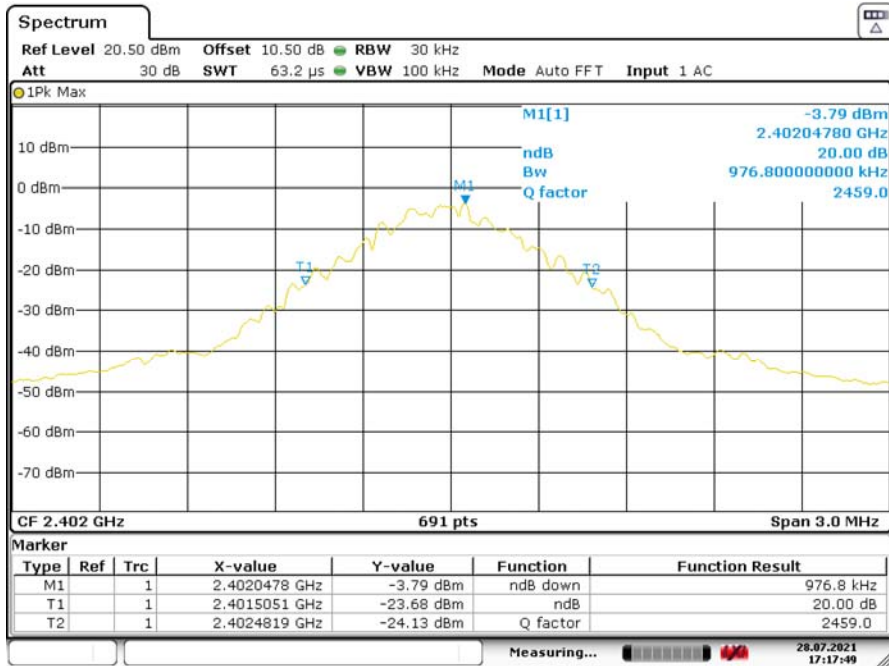


Date: 28.JUL.2021 17:17:48

**99% Occupied Bandwidth, Low Channel**

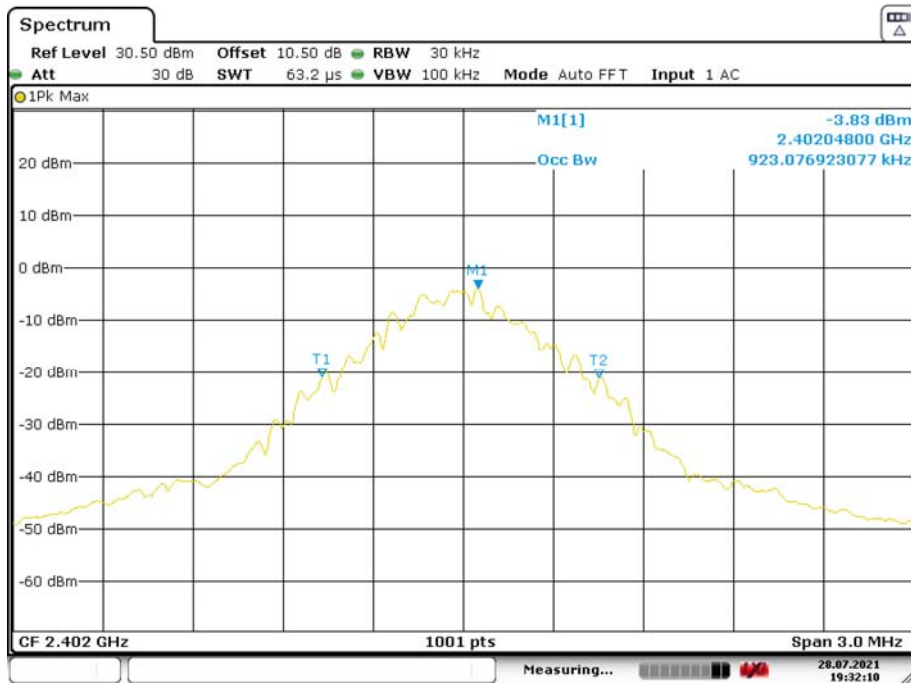


Date: 28.JUL.2021 19:32:10

### 20dB Emission Bandwidth, Middle Channel

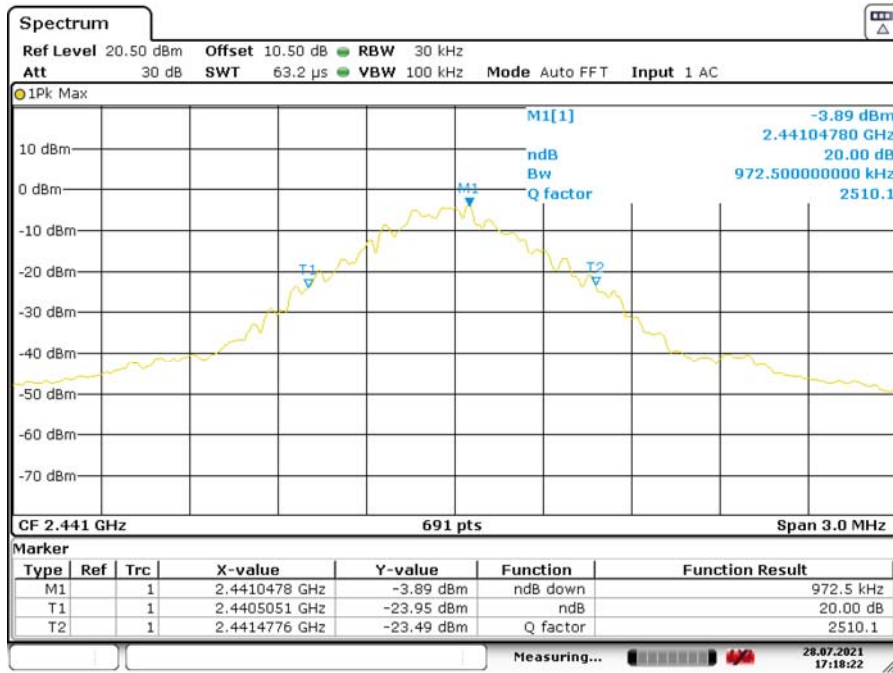


Date: 28.JUL.2021 17:18:22

### 99% Occupied Bandwidth, Middle Channel

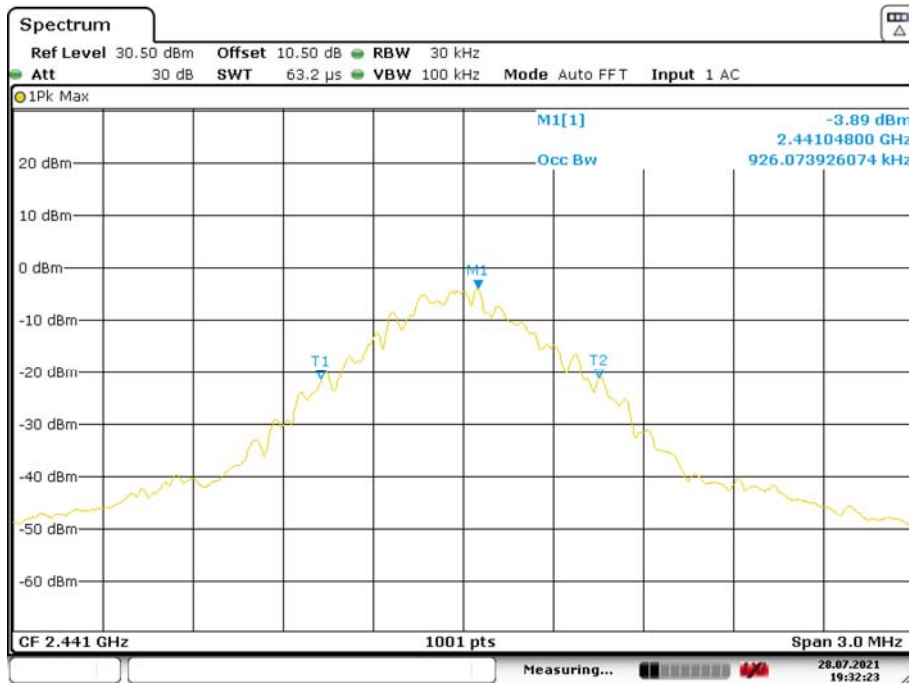


Date: 28.JUL.2021 19:32:23

### 20dB Emission Bandwidth, High Channel

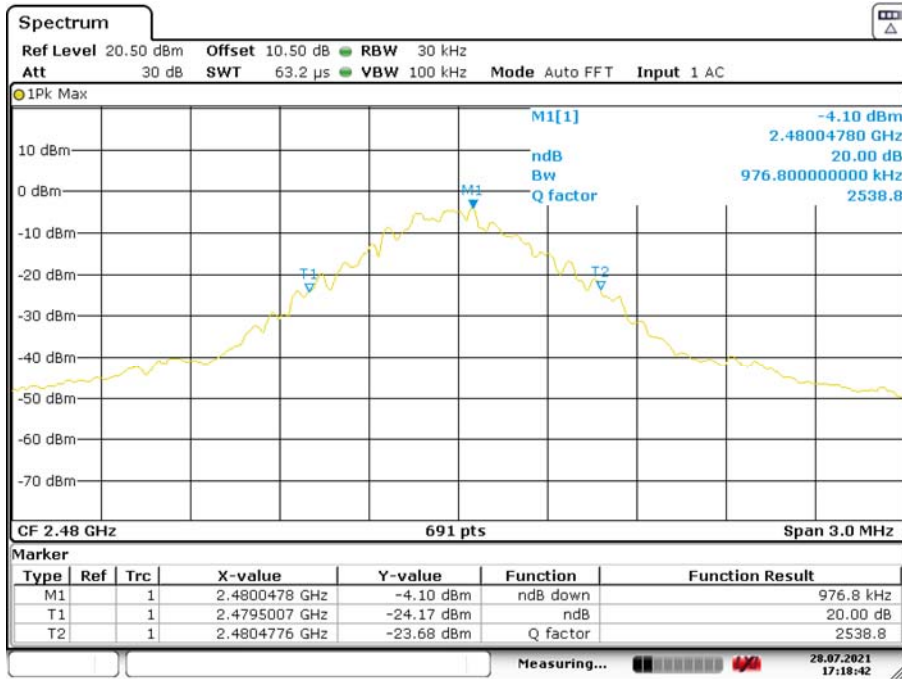

Date: 28.JUL.2021 17:18:42


### 99% Occupied Bandwidth, High Channel

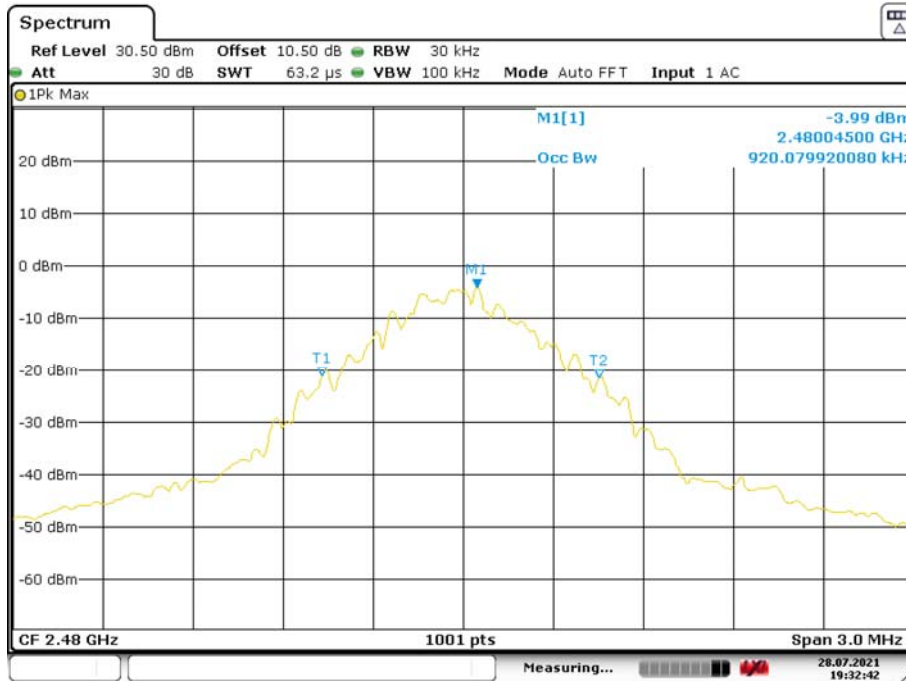

Date: 28.JUL.2021 19:32:42


**EDR ( $\pi/4$ -DQPSK):**

**20dB Emission Bandwidth, Low Channel**

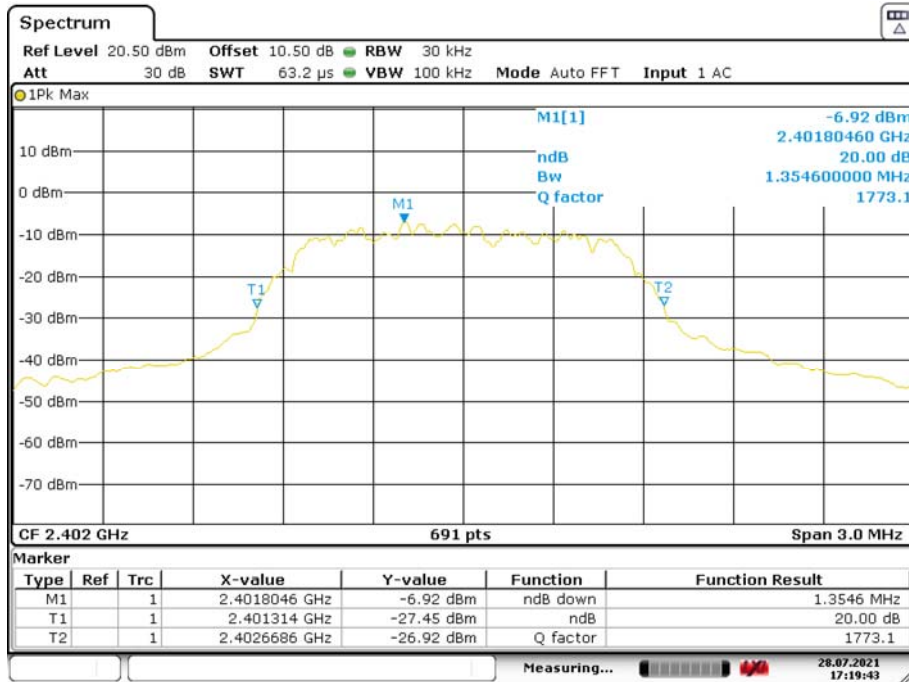


Date: 28.JUL.2021 17:19:43

**99% Occupied Bandwidth, Low Channel**

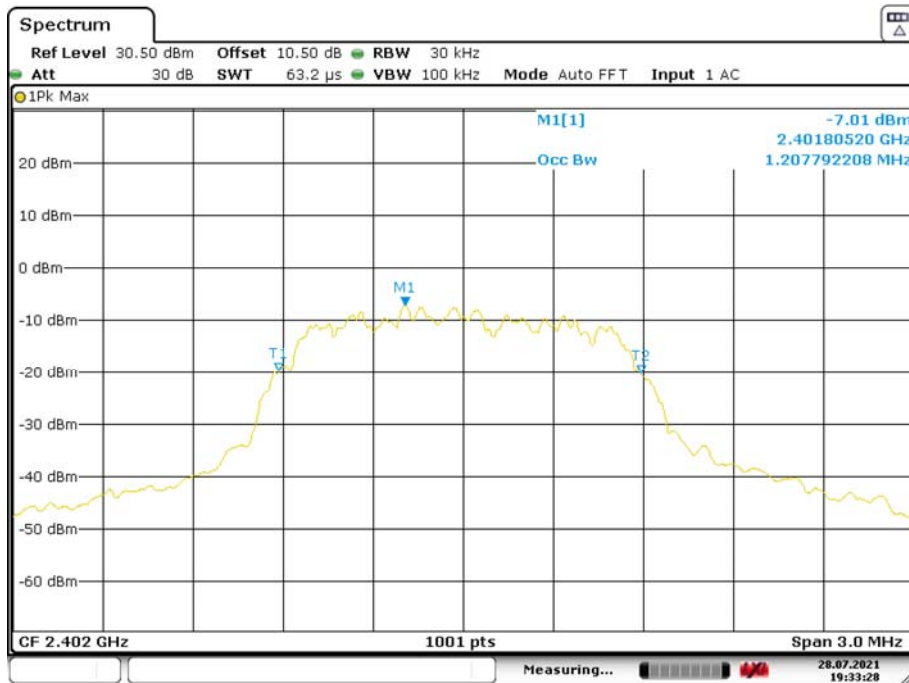


Date: 28.JUL.2021 19:33:28

### 20dB Emission Bandwidth, Middle Channel

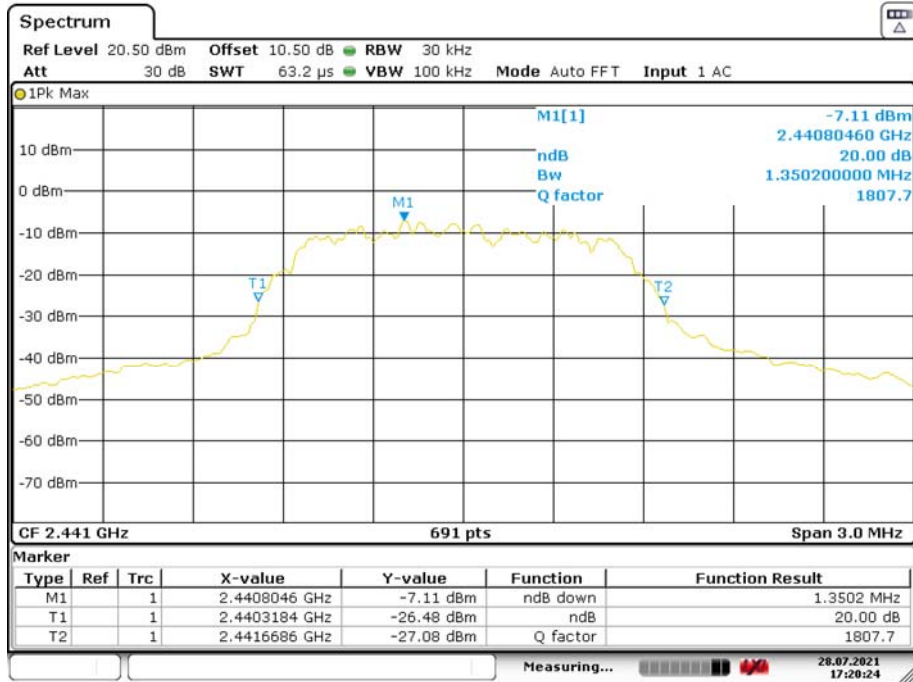


Date: 28.JUL.2021 17:20:23

### 99% Occupied Bandwidth, Middle Channel

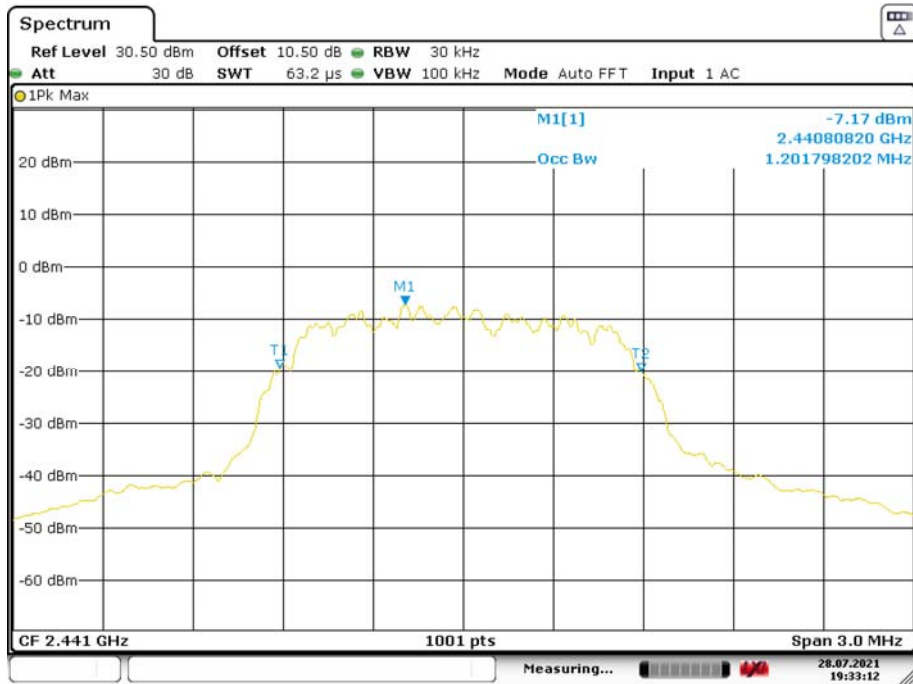


Date: 28.JUL.2021 19:33:12

### 20dB Emission Bandwidth, High Channel

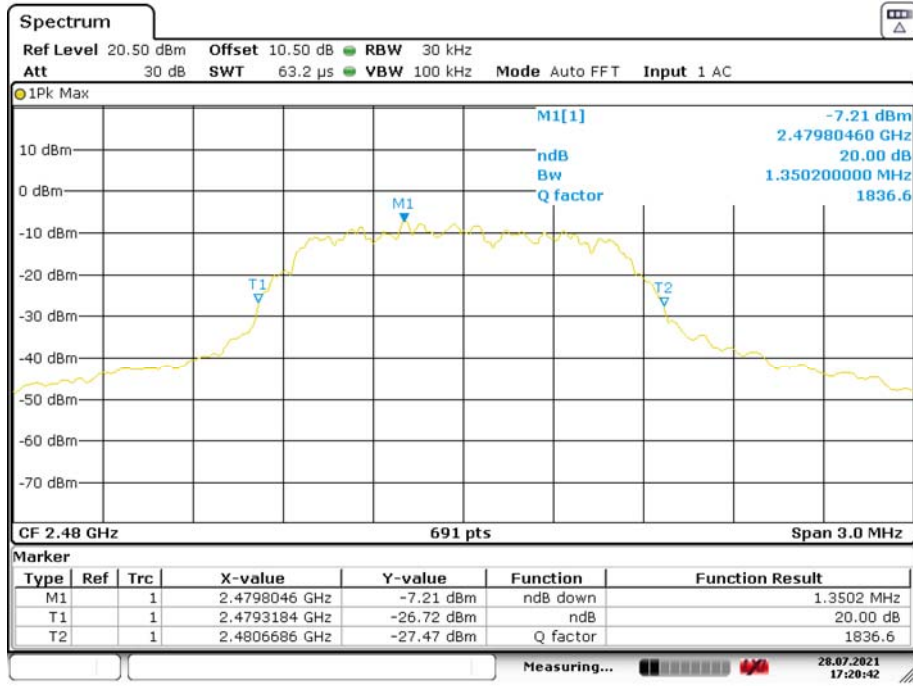

Date: 28.JUL.2021 17:20:42

### 99% Occupied Bandwidth, High Channel

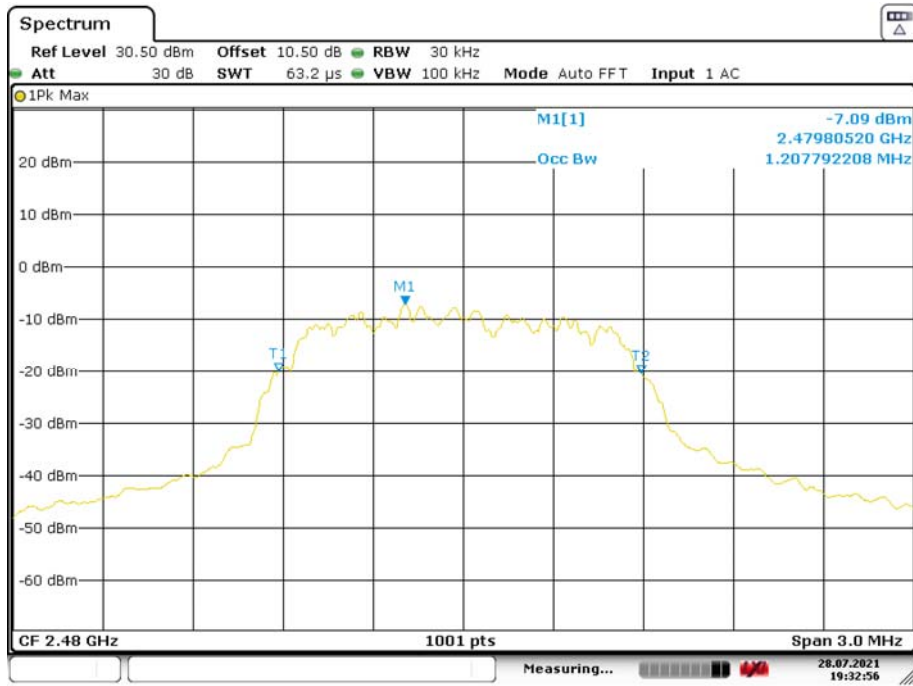


Date: 28.JUL.2021 19:32:56




**EDR (8DPSK):**

**20dB Emission Bandwidth, Low Channel**

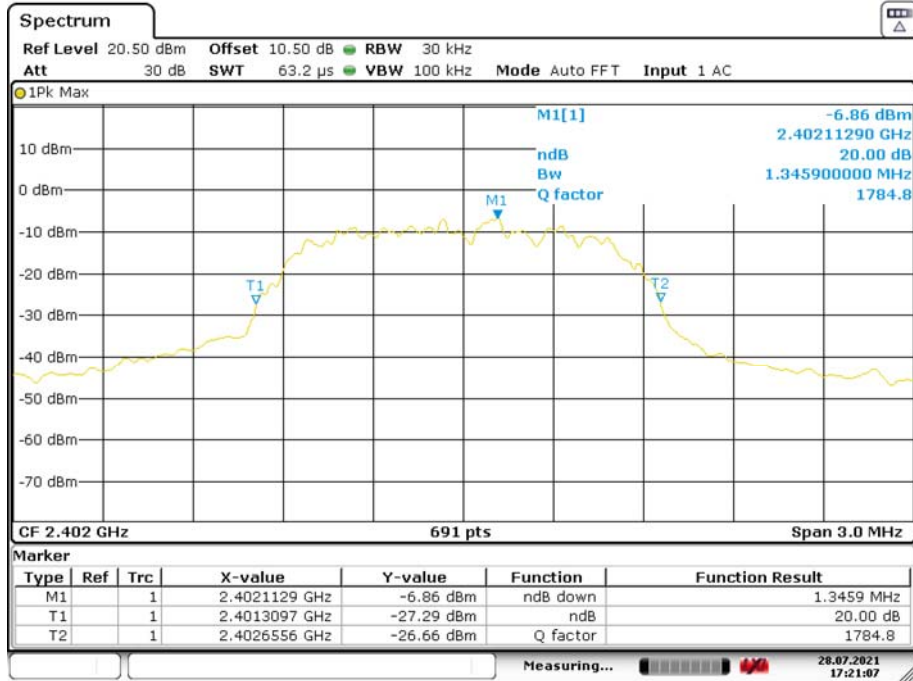


Date: 28.JUL.2021 17:21:07

**99% Occupied Bandwidth, Low Channel**

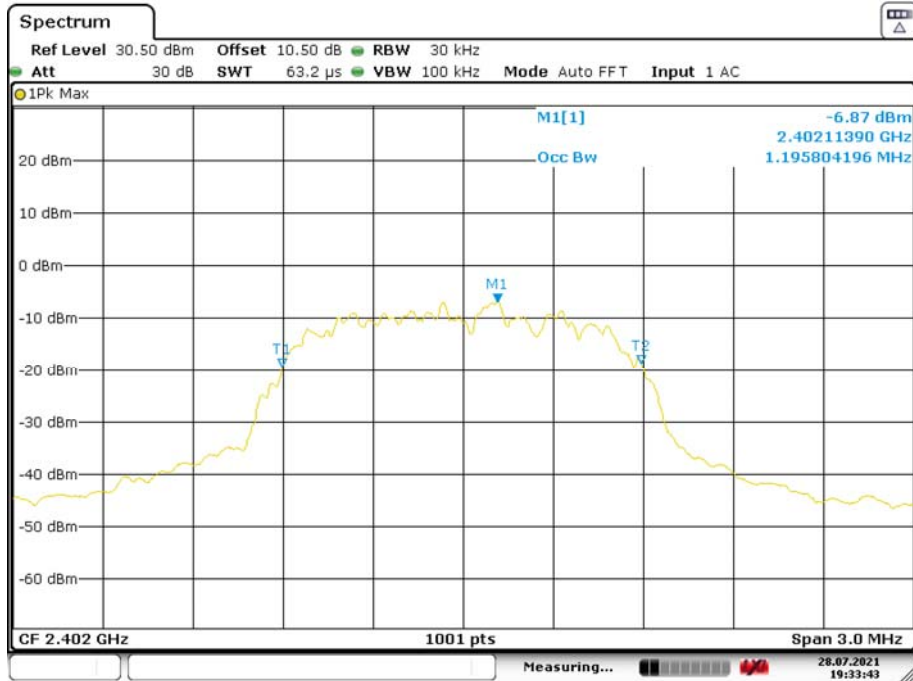


Date: 28.JUL.2021 19:33:43

### 20dB Emission Bandwidth, middle Channel

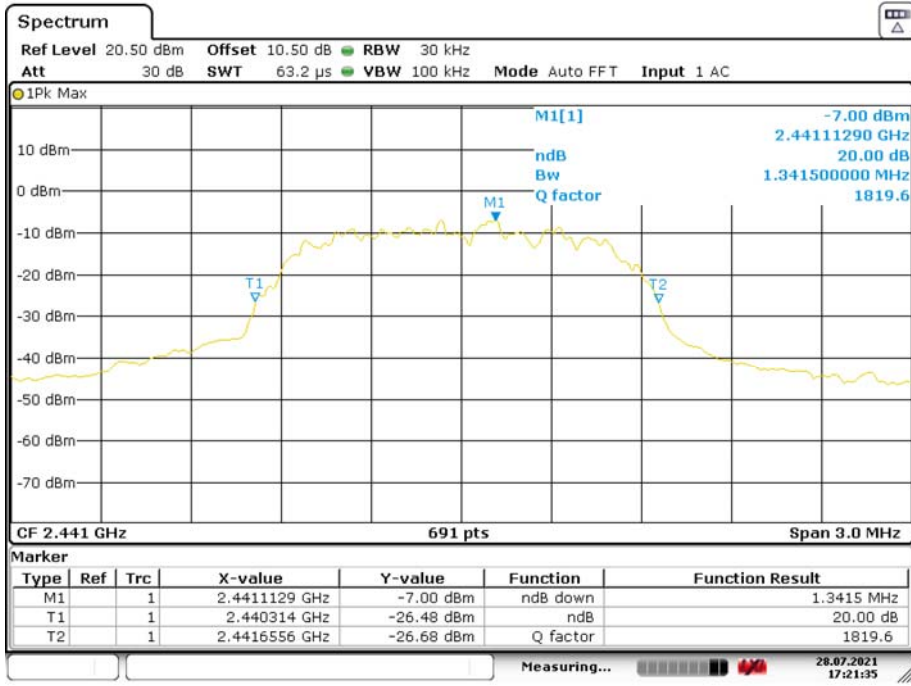


Date: 28.JUL.2021 17:21:35

### 99% Occupied Bandwidth, Middle Channel

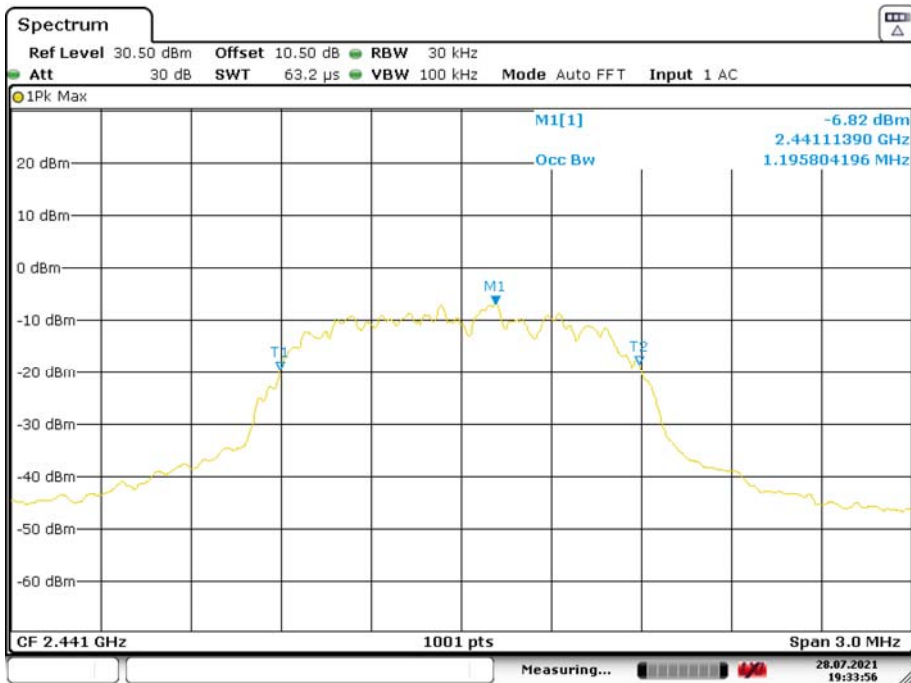


Date: 28.JUL.2021 19:33:56

### 20dB Emission Bandwidth, High Channel

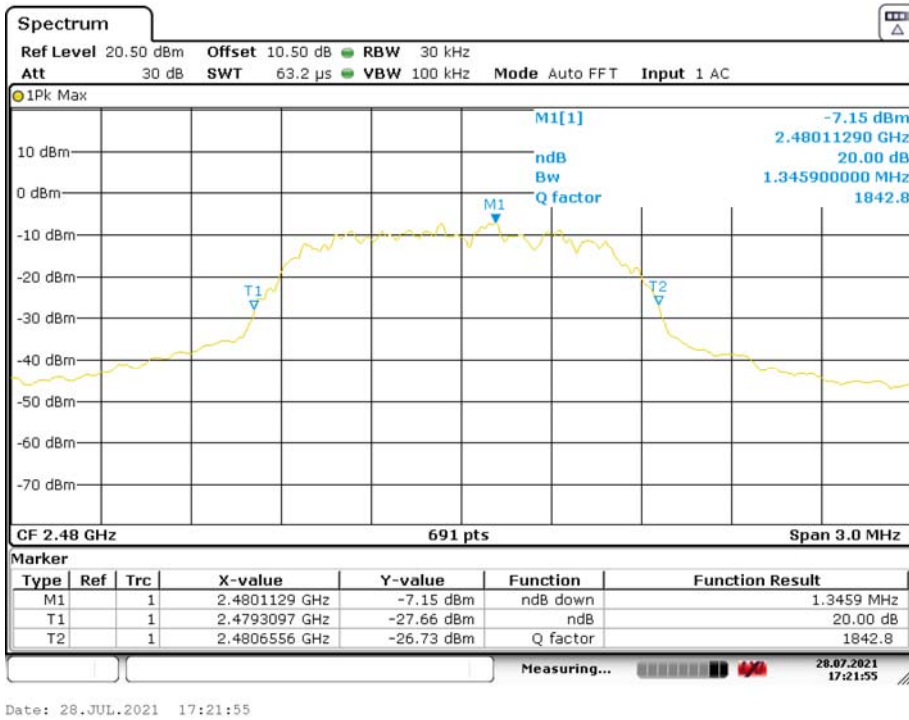

### 99% Occupied Bandwidth, High Channel

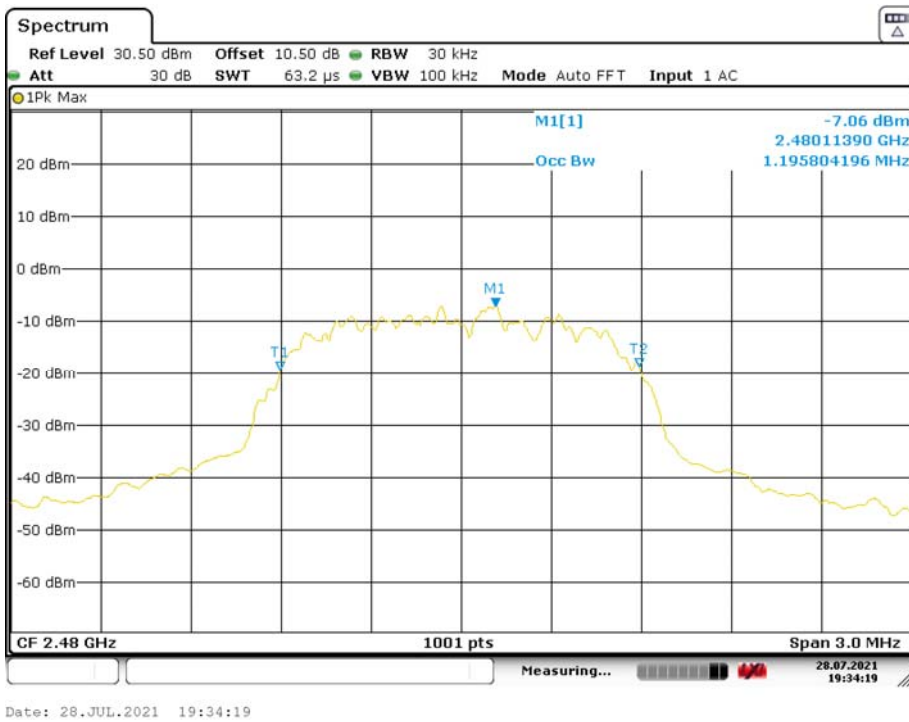

**FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST****Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Fan Yang on 2021-07-28*


*EUT operation mode: Transmitting*

**Test Result: Pass**

*Please refer to following table and plots.*




### EDR ( $\pi/4$ -DQPSK): Number of Hopping Channels

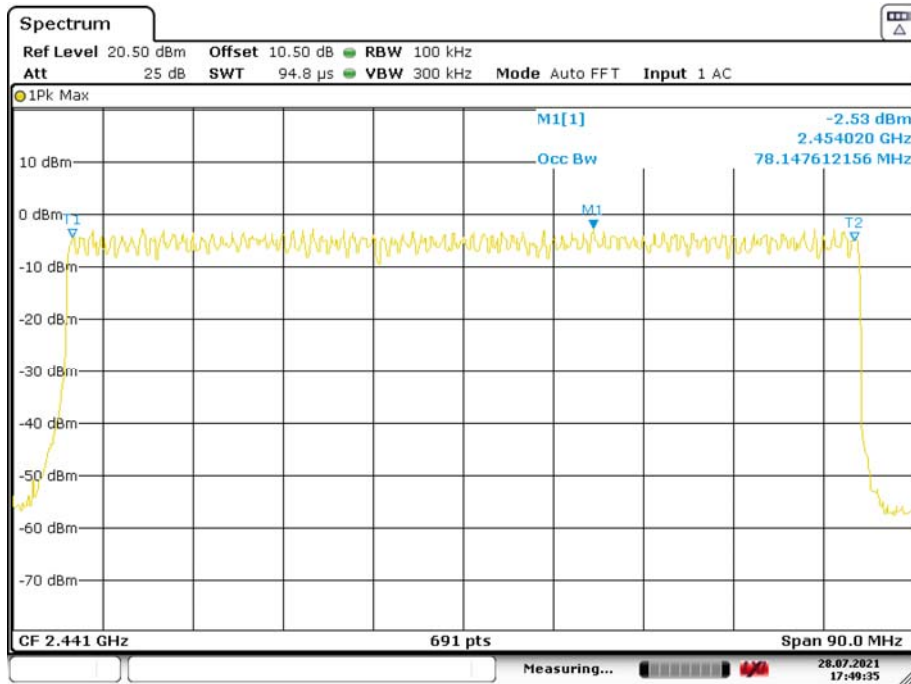

Date: 28.JUL.2021 17:49:35

### EDR (8DPSK): Number of Hopping Channels

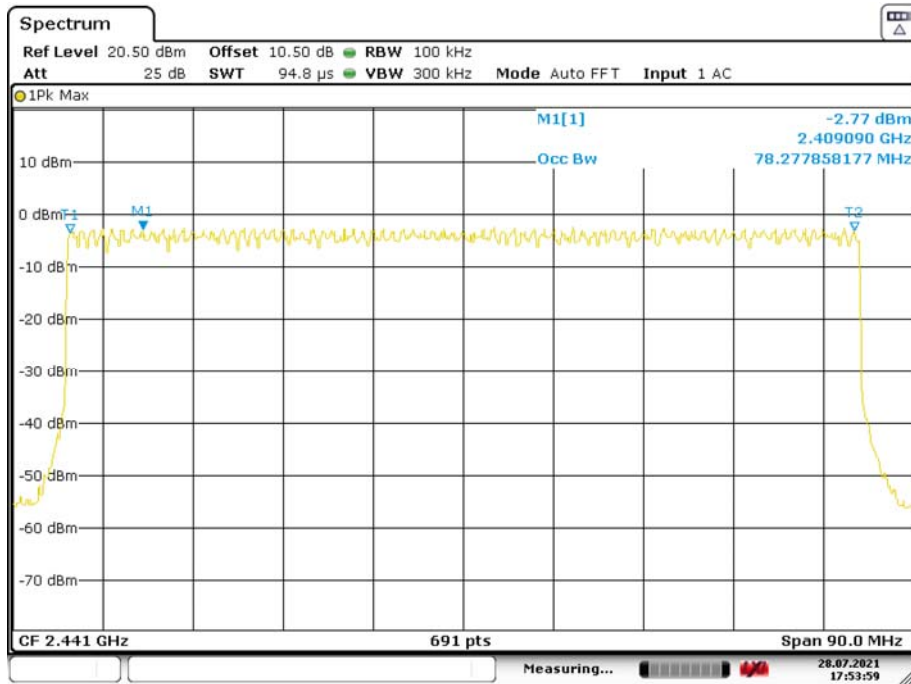

Date: 28.JUL.2021 17:53:59

## **FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**

### **Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### **Test Procedure**

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Fan Yang on 2021-07-28.*

*EUT operation mode: Transmitting*

**Test Result: Pass**

*Please refer to following table and plots*

Test Mode	Channel	Burst Width [ms]	Total Hops [Num]	Result[s]	Limit[s]	Verdict
DH1	Hop	0.37	310	0.11	<=0.4	PASS
DH3	Hop	1.62	180	0.29	<=0.4	PASS
DH5	Hop	2.89	130	0.38	<=0.4	PASS
2DH1	Hop	0.37	300	0.11	<=0.4	PASS
2DH3	Hop	1.64	170	0.28	<=0.4	PASS
2DH5	Hop	2.87	120	0.34	<=0.4	PASS
3DH1	Hop	0.40	290	0.12	<=0.4	PASS
3DH3	Hop	1.63	150	0.24	<=0.4	PASS
3DH5	Hop	2.88	100	0.29	<=0.4	PASS

Note 1: A period time= $0.4 \times 79 = 31.6(S)$ , Result=Burst Width\*Total Hops


Note 2: Total Hops =Hopping Number in 3.16s\*10

Note 3: Hoping Number in 3.16s=Total of highest signals in 3.16s (Second high signals were other channel)






### DH3

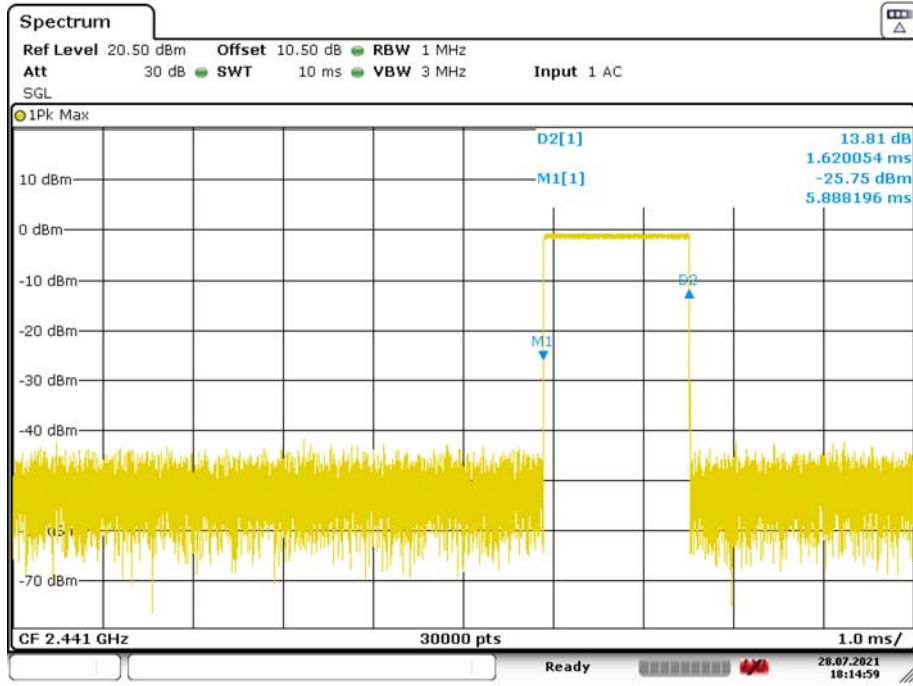


Date: 28.JUL.2021 18:14:59

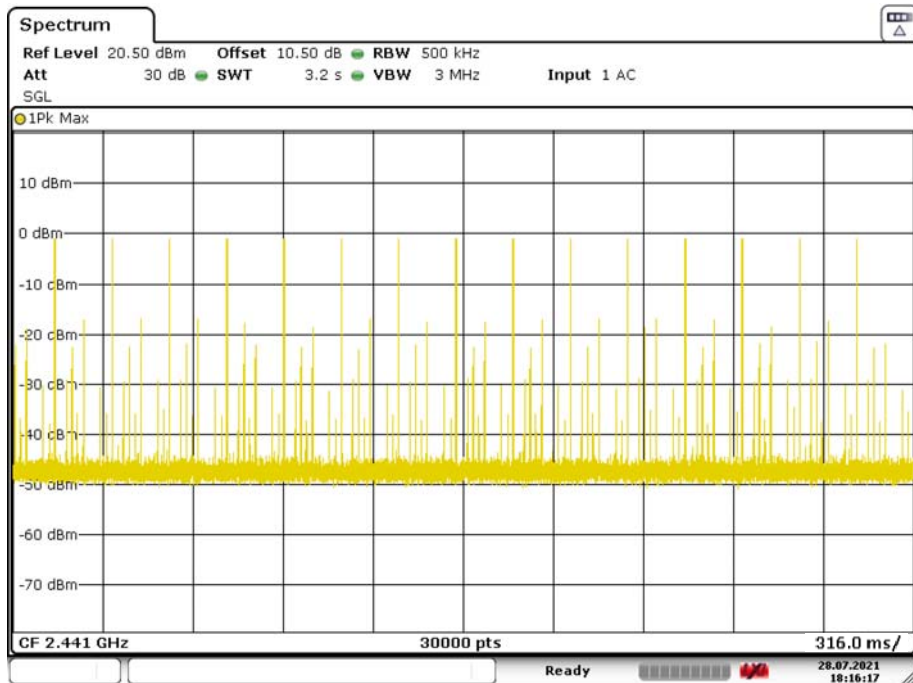


Date: 28.JUL.2021 18:16:17

### DH5

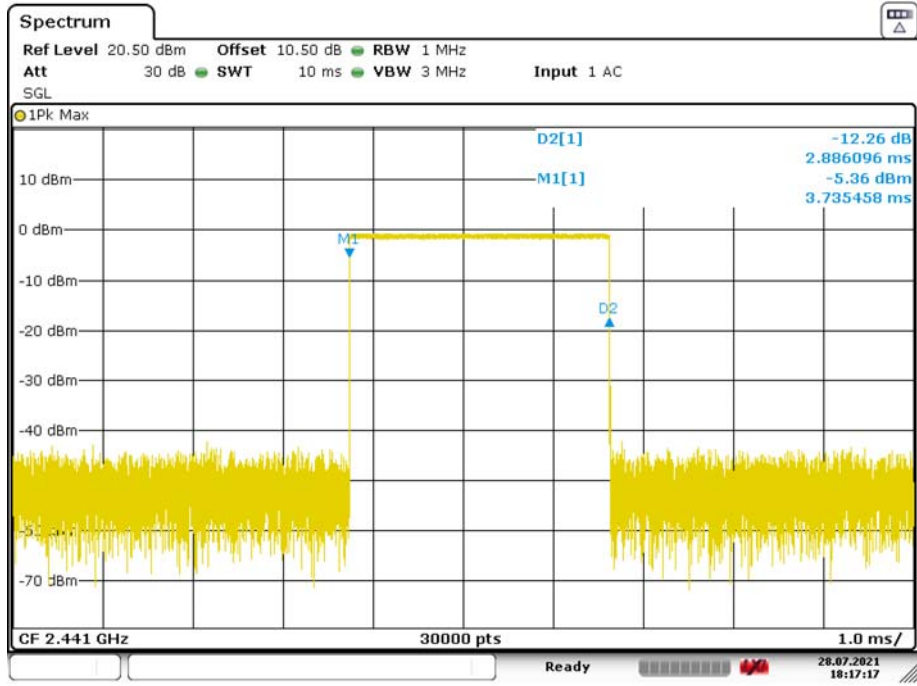


Date: 28.JUL.2021 18:17:17

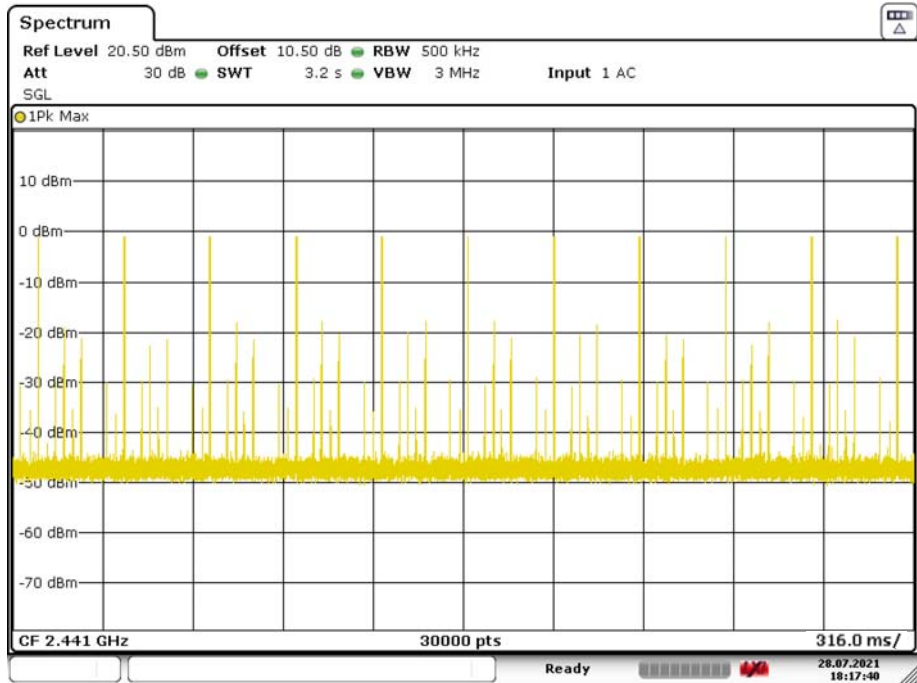


Date: 28.JUL.2021 18:17:40

### EDR( $\pi/4$ -DQPSK): 2DH1

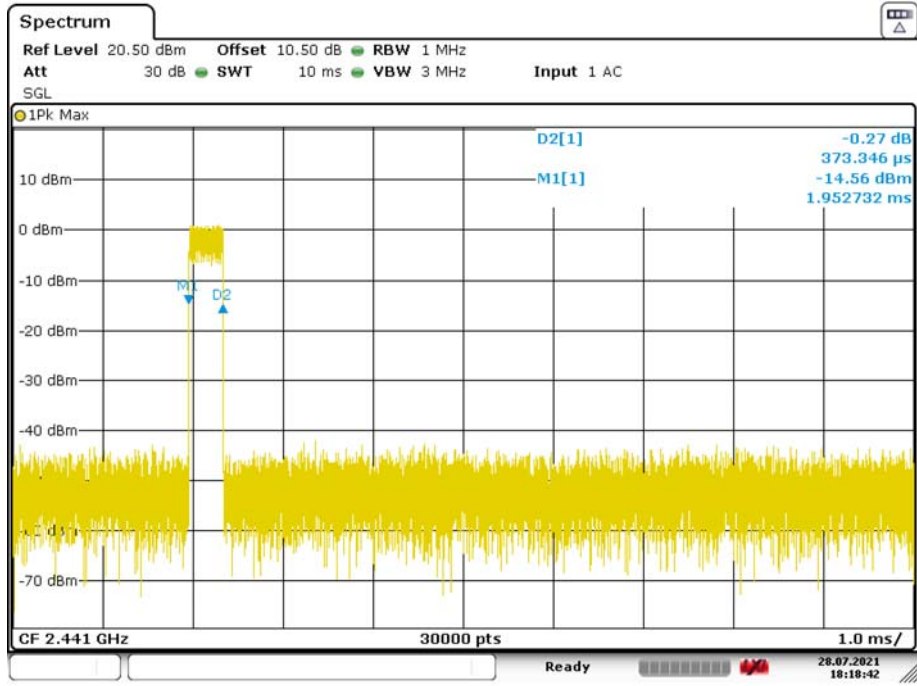


Date: 28.JUL.2021 18:18:42

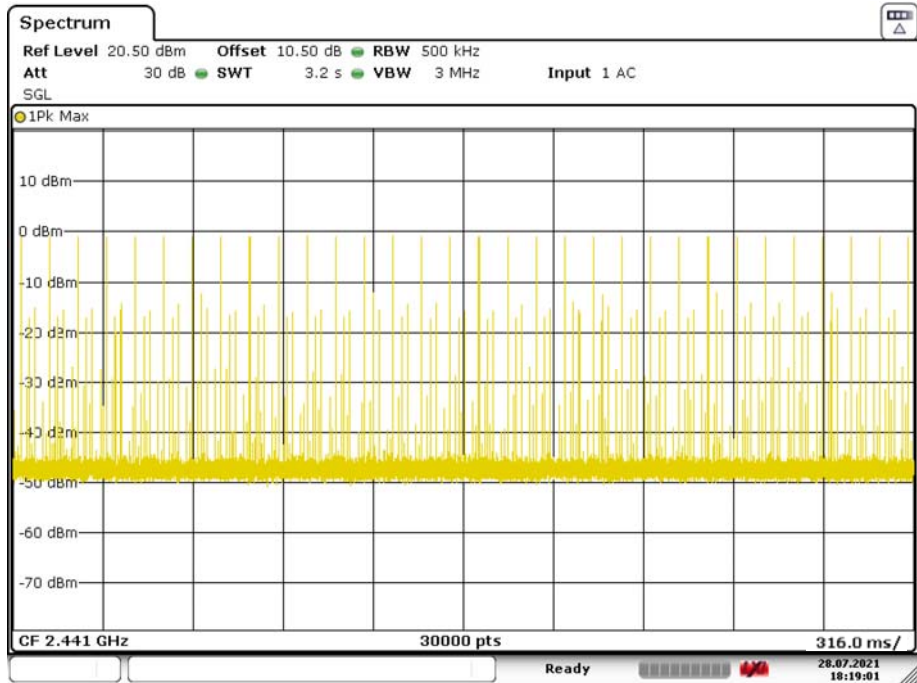


Date: 28.JUL.2021 18:19:01

### 2DH3

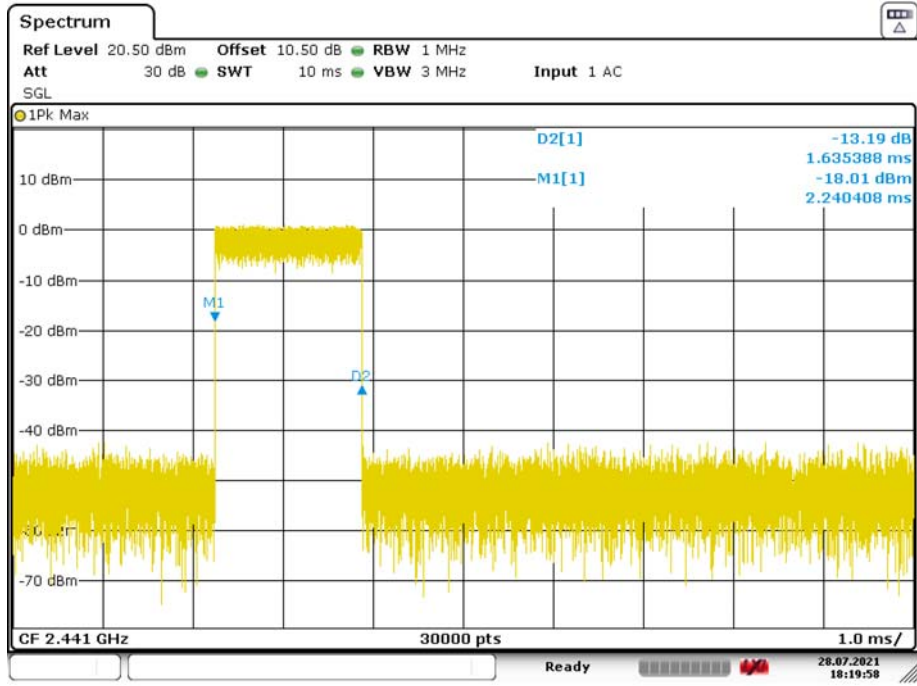


Date: 28.JUL.2021 18:19:58

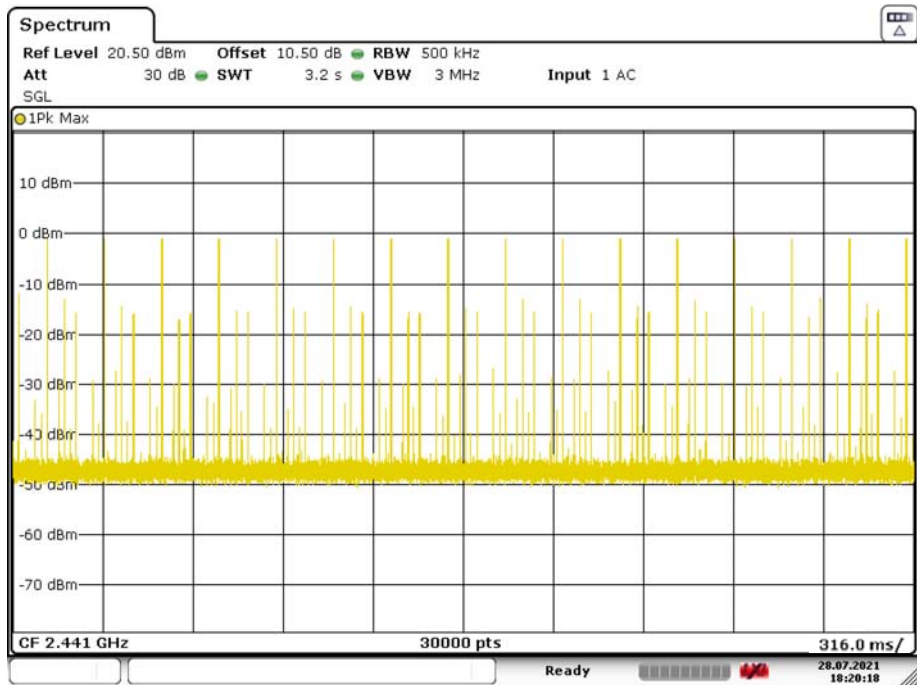


Date: 28.JUL.2021 18:20:18

### 2DH5

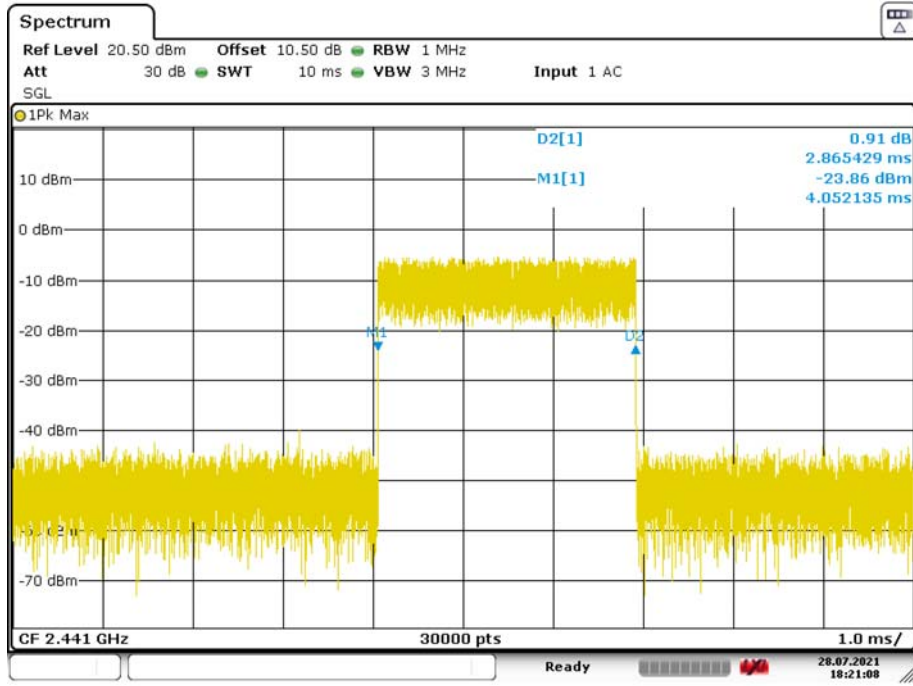


Date: 28.JUL.2021 18:21:08

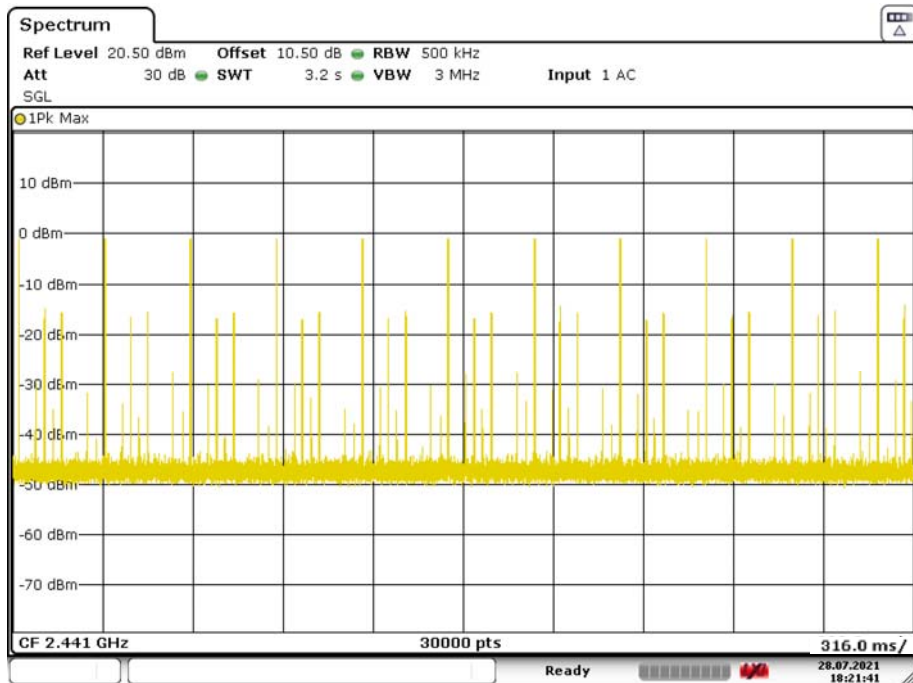


Date: 28.JUL.2021 18:21:41

### EDR (8DPSK): 3DH1

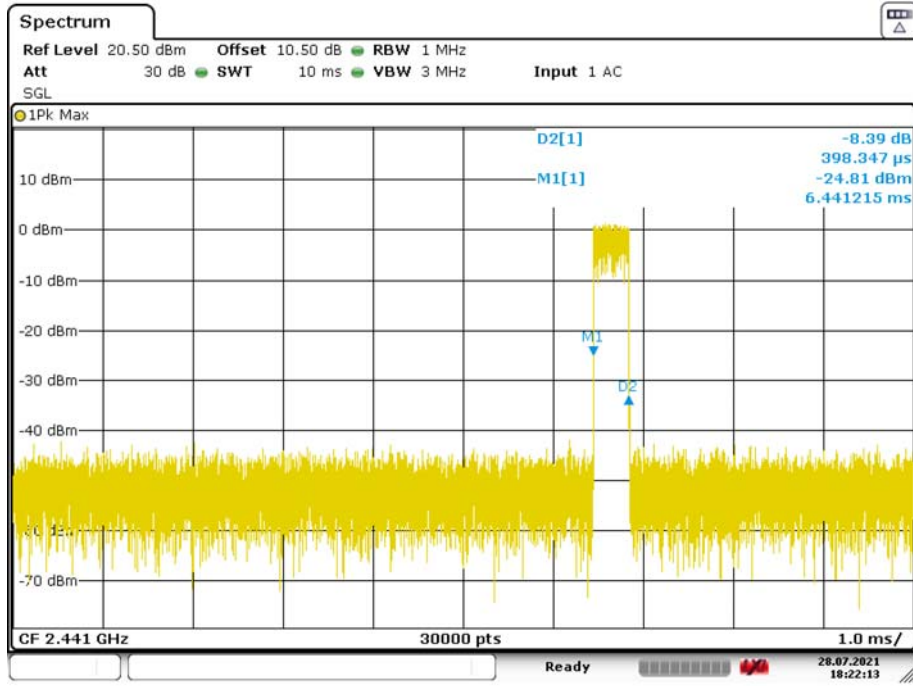


Date: 28.JUL.2021 18:22:13

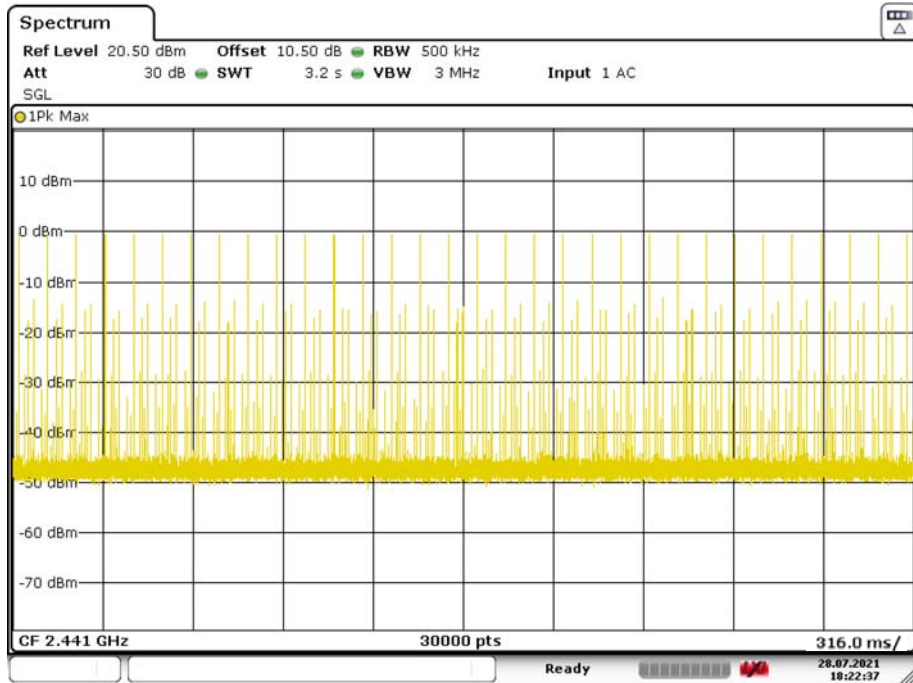


Date: 28.JUL.2021 18:22:37

### 3DH3

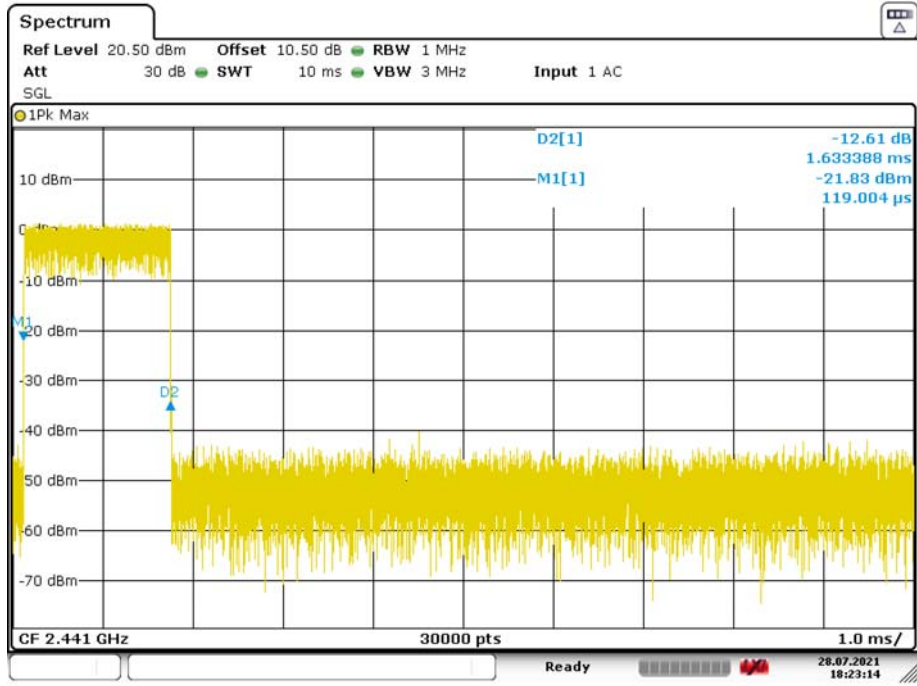


Date: 28.JUL.2021 18:23:14

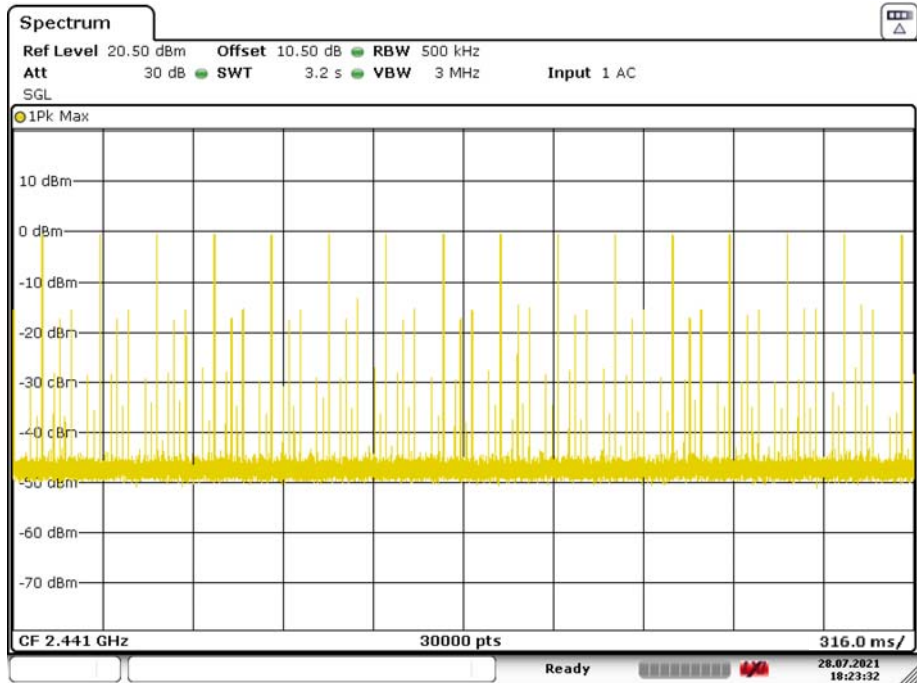


Date: 28.JUL.2021 18:23:33



### 3DH5

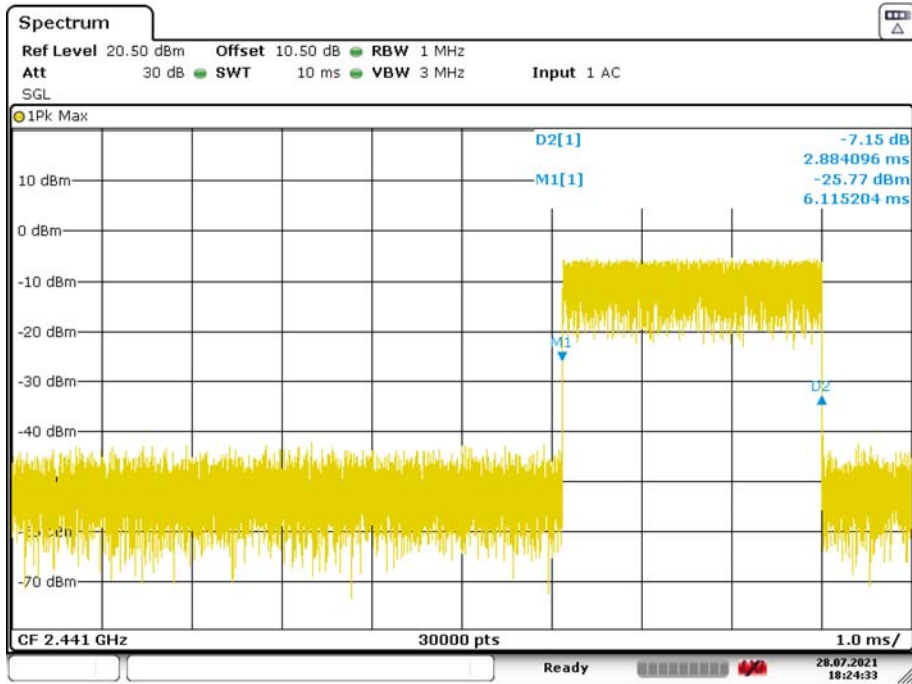

Date: 28.JUL.2021 18:24:33

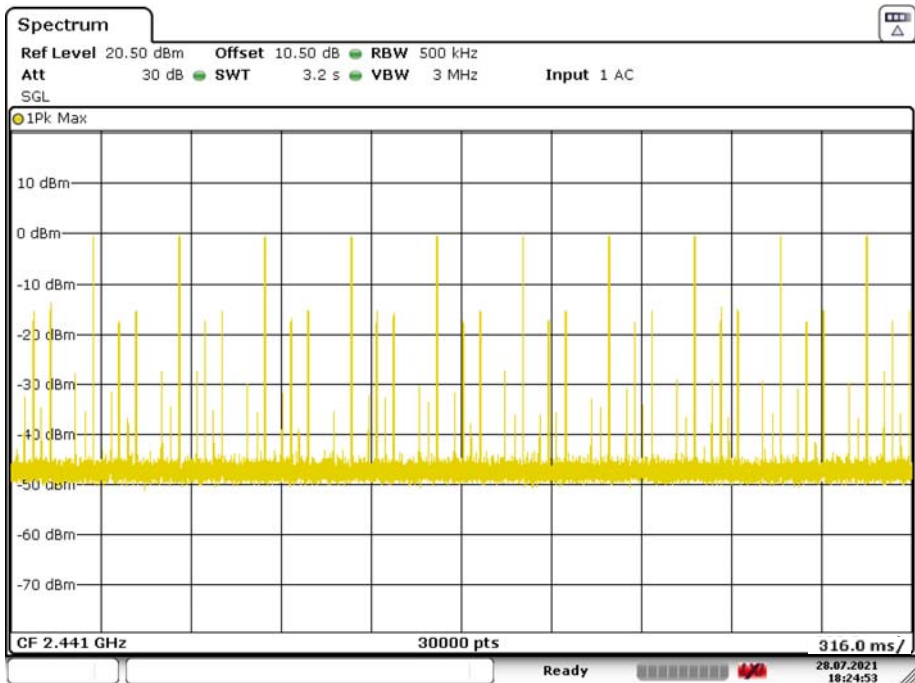


Date: 28.JUL.2021 18:24:53

**FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT****Applicable Standard**

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

**Test Procedure**

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Fan Yang on 2021-07-28.*

*EUT operation mode: Transmitting*

**Test Result: Pass**


*Please refer to following table and plots.*

Test Mode	Channel	Output Peak power [dBm]	Limit [dBm]	Verdict
<b>BDR (GFSK)</b>	2402	-0.63	<=20.97	PASS
	2441	-0.70	<=20.97	PASS
	2480	-0.80	<=20.97	PASS
<b>EDR (<math>\pi/4</math>-DQPSK)</b>	2402	1.42	<=20.97	PASS
	2441	1.53	<=20.97	PASS
	2480	1.40	<=20.97	PASS
<b>EDR (8DPSK)</b>	2402	1.63	<=20.97	PASS
	2441	1.78	<=20.97	PASS
	2480	1.63	<=20.97	PASS

Note 1: The data above was tested in conducted mode.


**BDR (GFSK):**

**Low Channel**

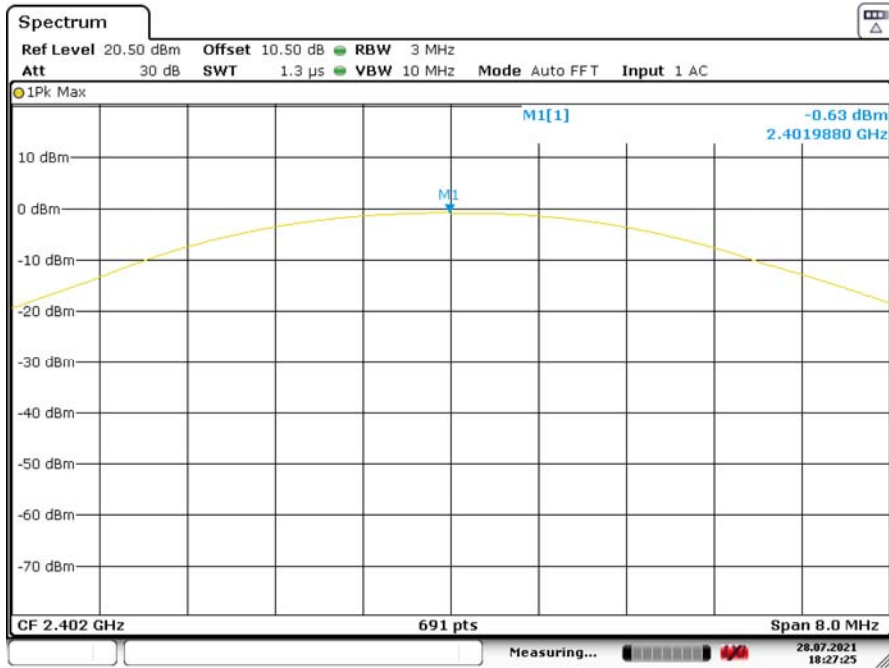


Date: 28.JUL.2021 18:27:25

**Middle Channel**

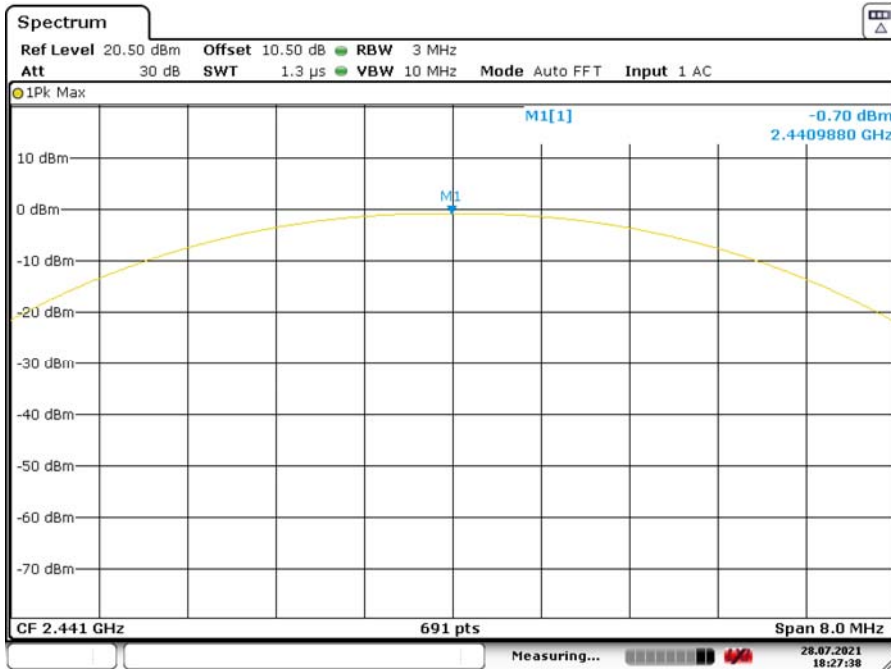


Date: 28.JUL.2021 18:27:38

### High Channel

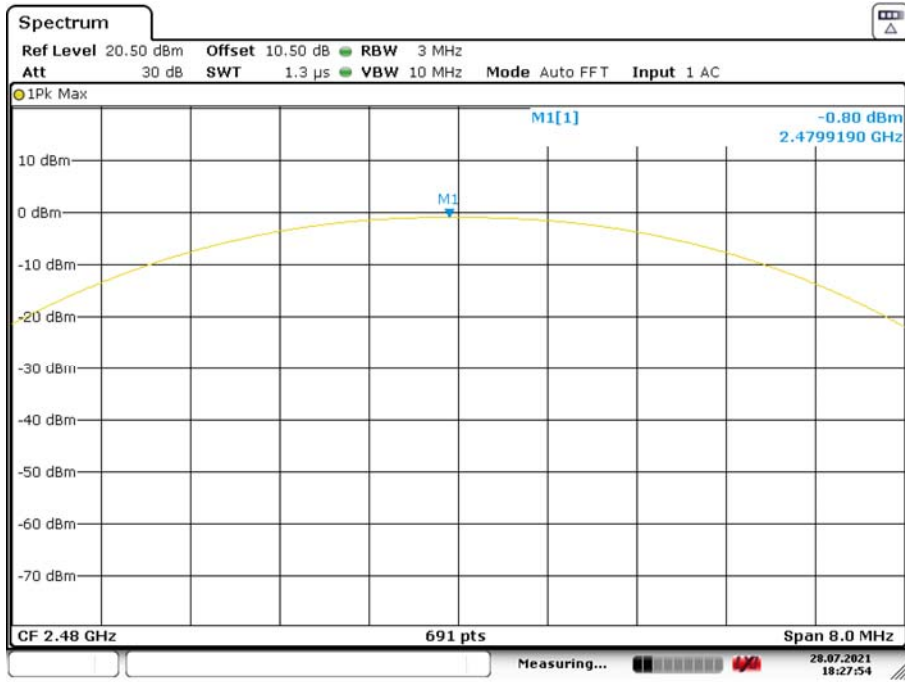


### EDR ( $\pi/4$ -DQPSK):

### Low Channel

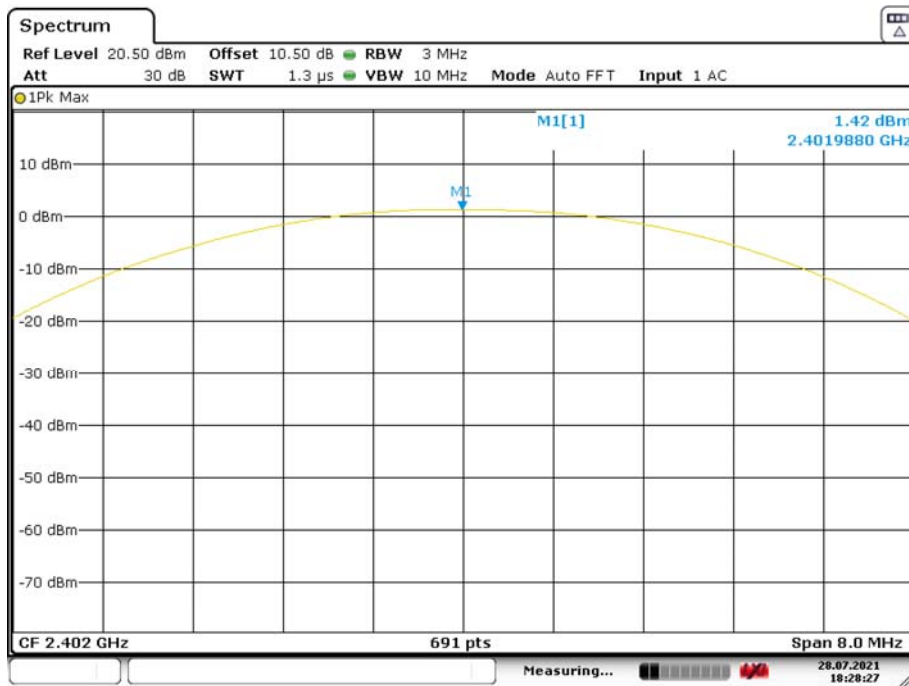


### Middle Channel

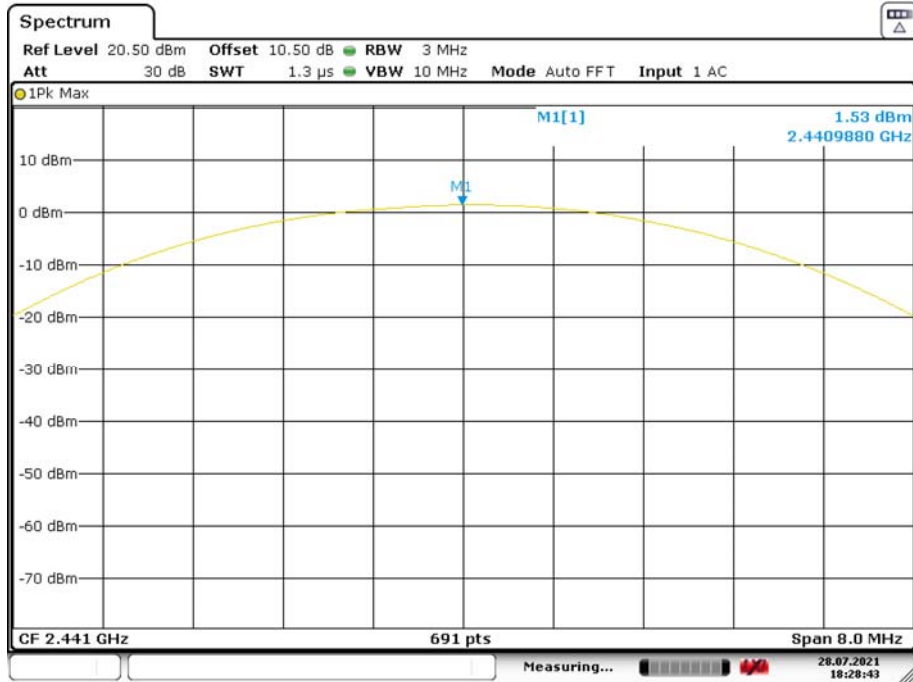

Date: 28.JUL.2021 18:28:43


### High Channel

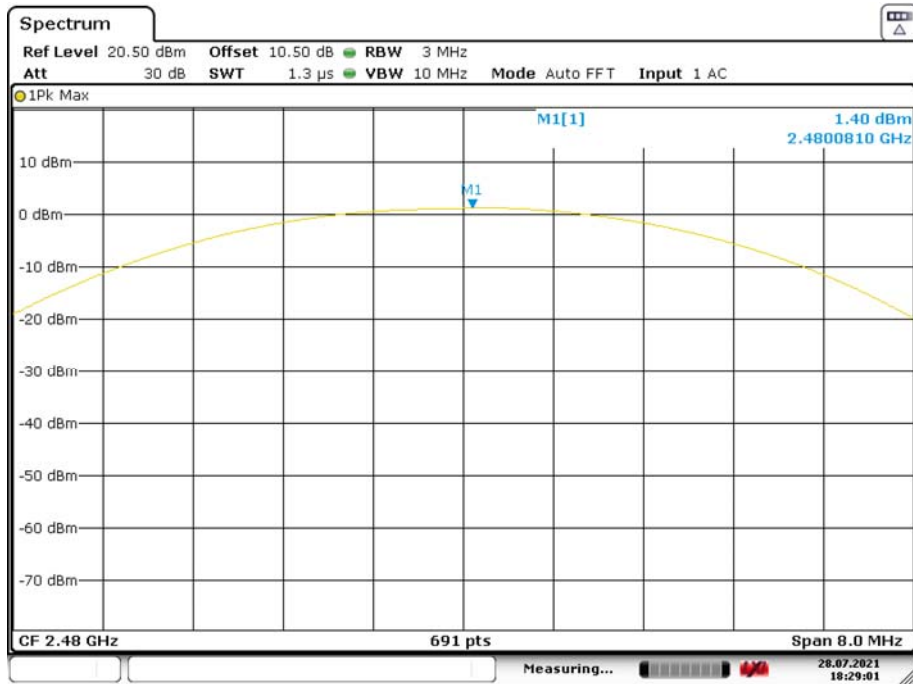

Date: 28.JUL.2021 18:29:01


**EDR (8DPSK):**

**Low Channel**

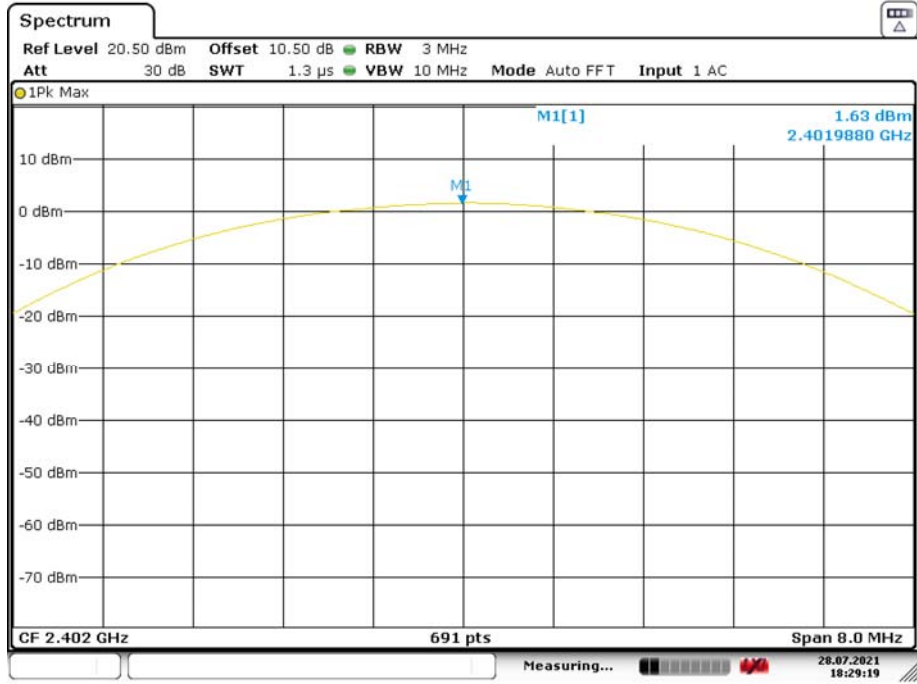


Date: 28.JUL.2021 18:29:19

**middle Channel**

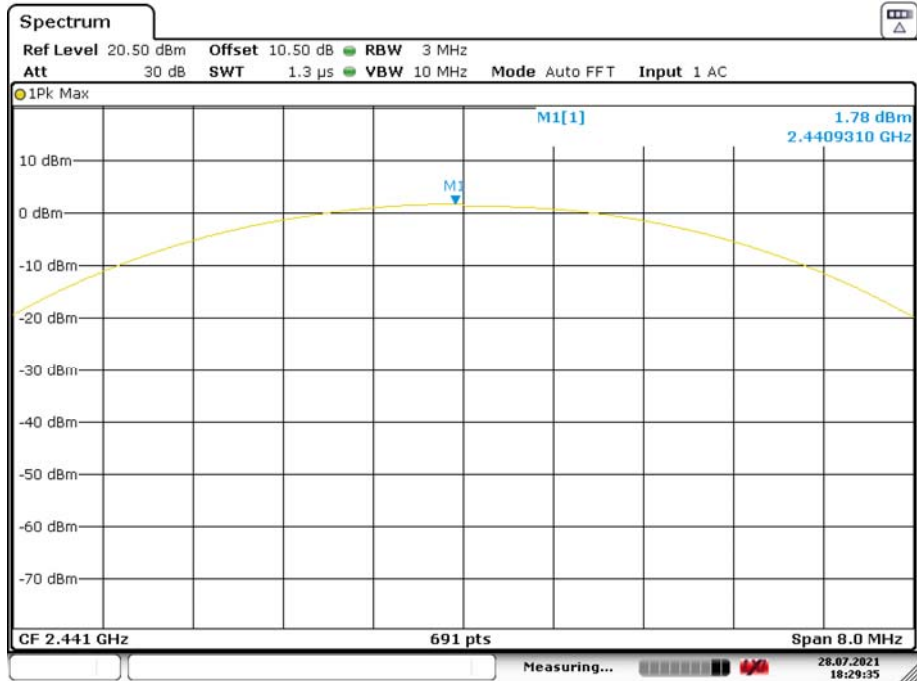

Date: 28.JUL.2021 18:29:34

### High Channel

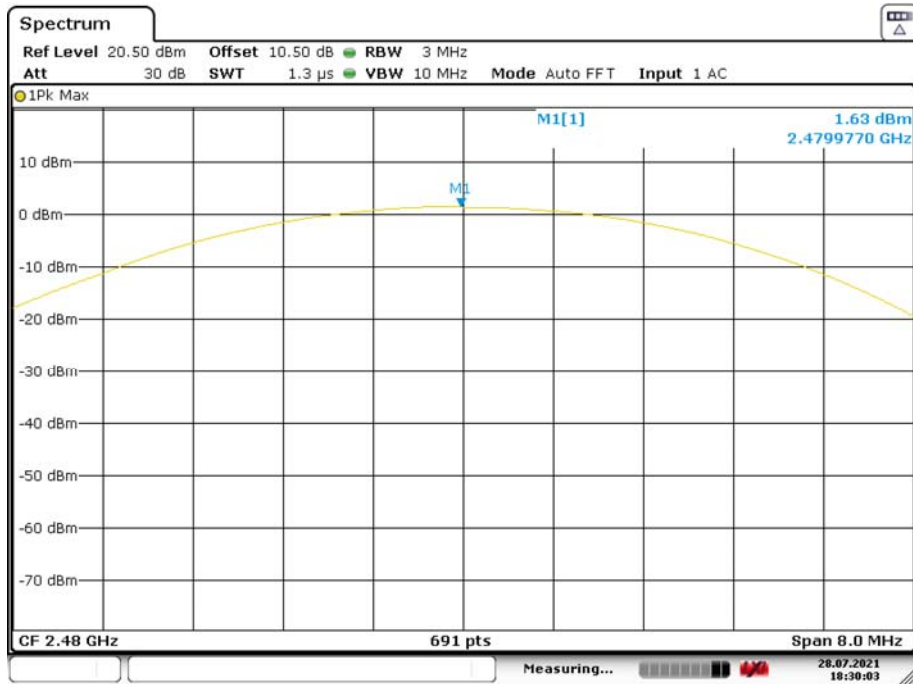

Date: 28.JUL.2021 18:30:03



## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa


*The testing was performed by Fan Yang on 2021-07-28*

*EUT operation mode: Transmitting*

#### Test Result: Pass


*Please refer to following table and plots*

### BDR (GFSK): Band Edge-Left Side Hopping

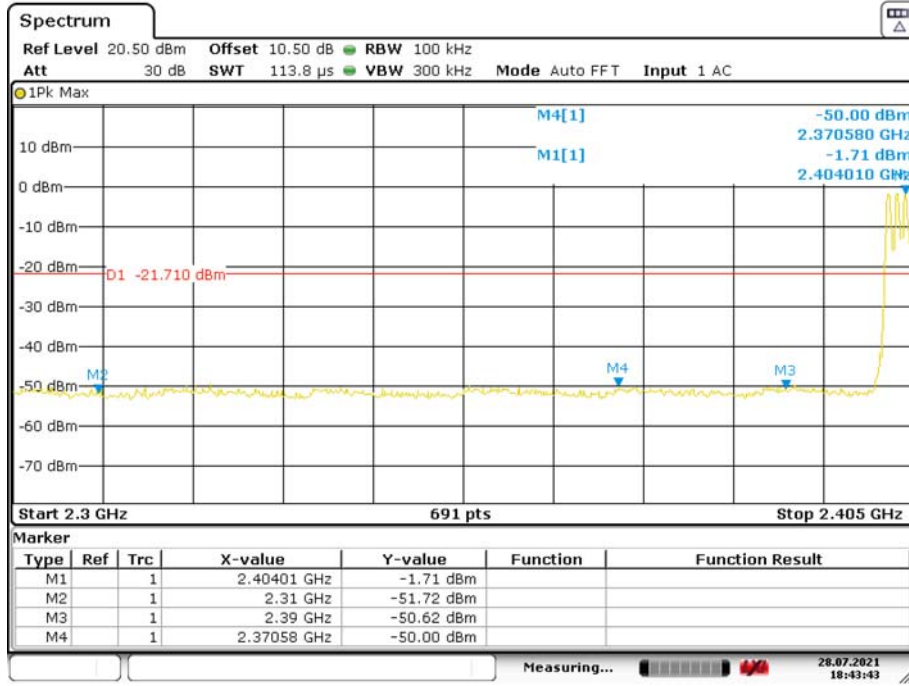


Date: 28.JUL.2021 18:43:43

### Single

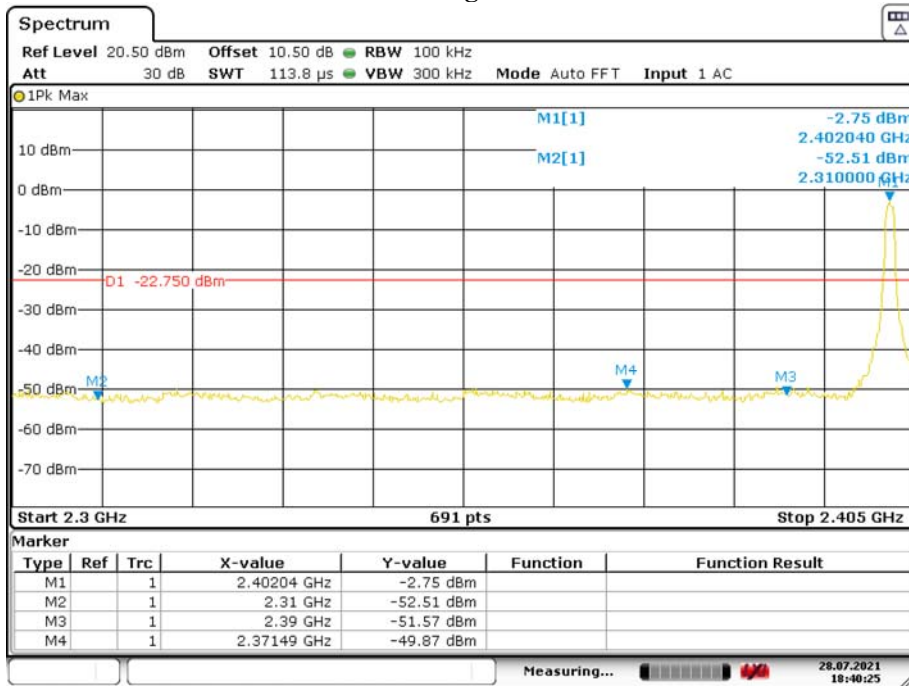


Date: 28.JUL.2021 18:40:25

### BDR (GFSK): Band Edge-Right Side Hopping

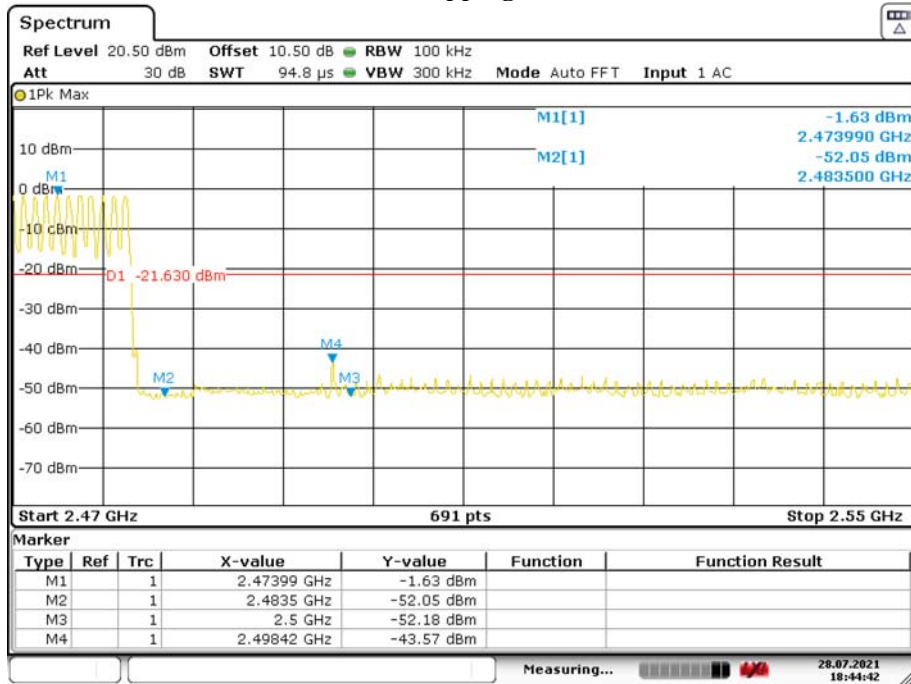


Date: 28.JUL.2021 18:44:42

### Single

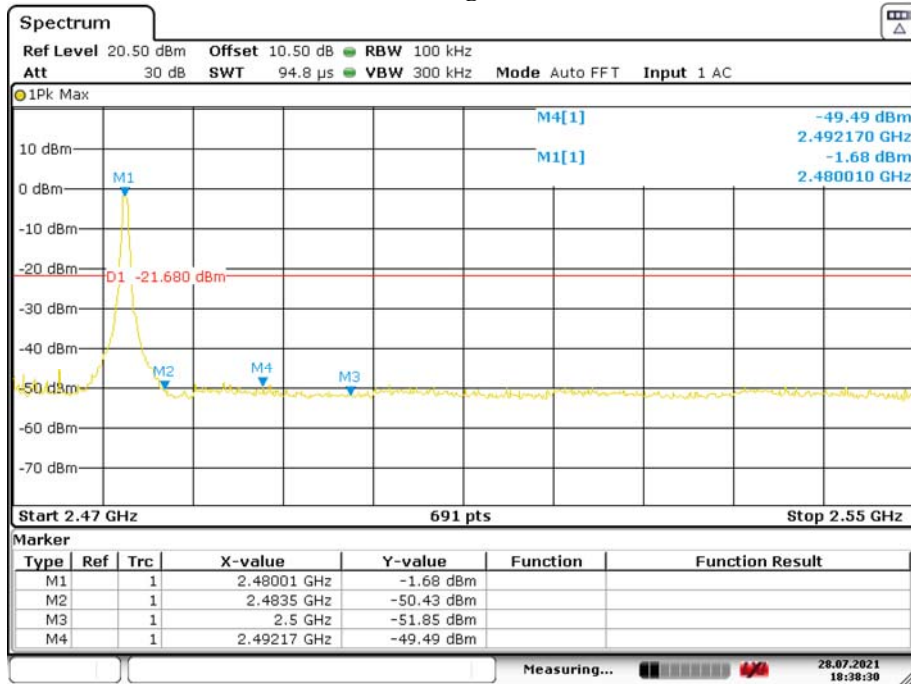


Date: 28.JUL.2021 18:38:30

### EDR ( $\pi/4$ -DQPSK): Band Edge-Left Side Hopping

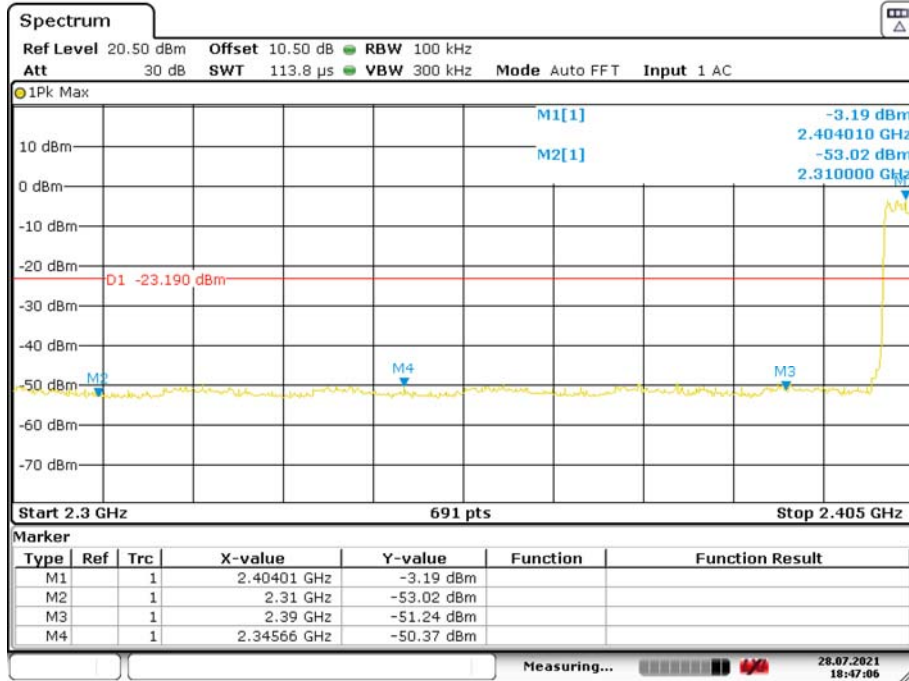


Date: 28.JUL.2021 18:47:06

### Single

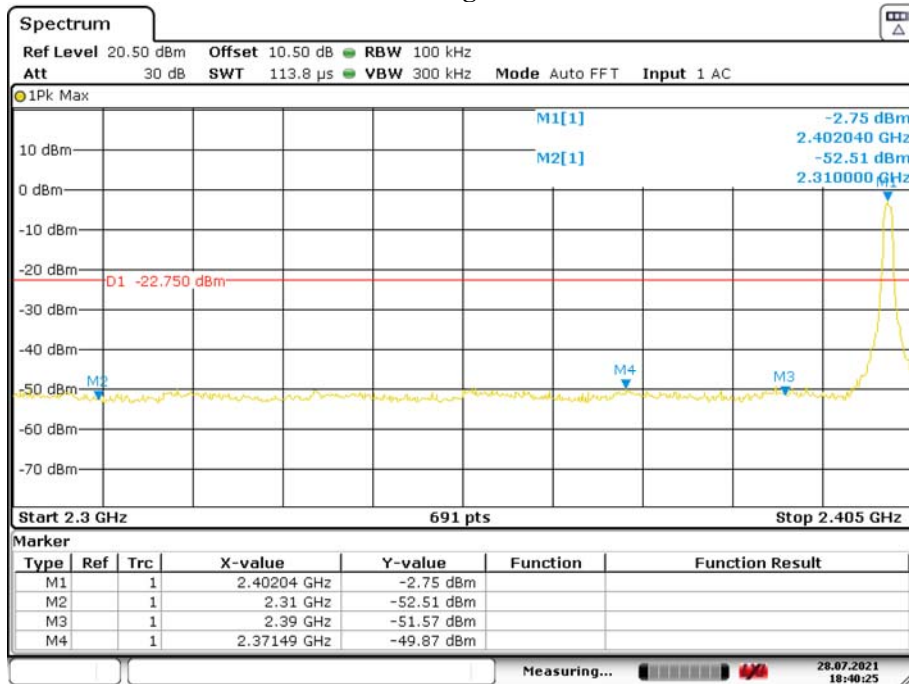


Date: 28.JUL.2021 18:40:25

### EDR ( $\pi/4$ -DQPSK): Band Edge-Right Side Hopping

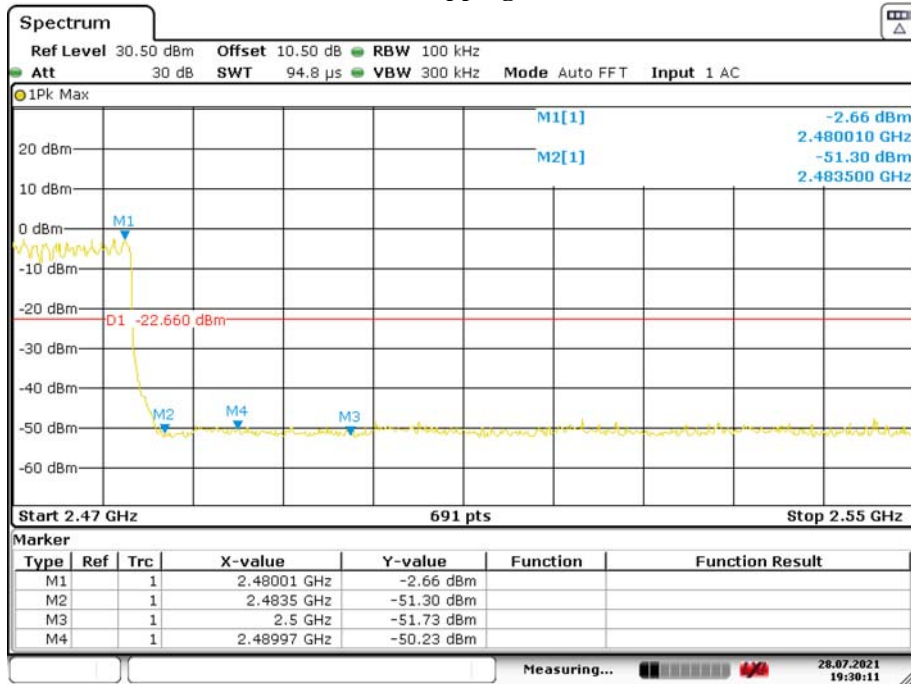


Date: 28.JUL.2021 19:30:10

### Single

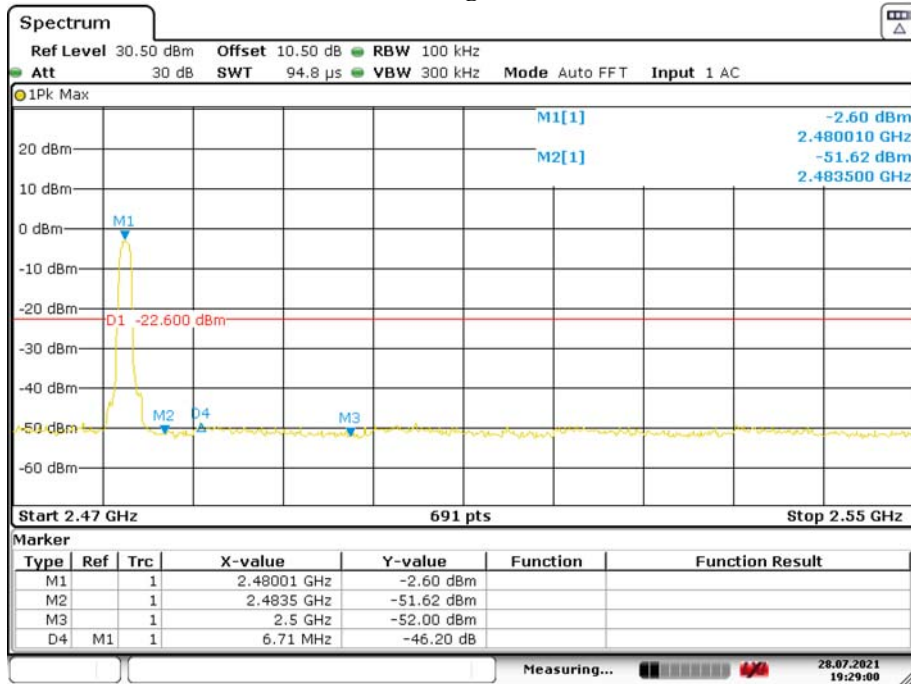


Date: 28.JUL.2021 19:29:00

### EDR (8DPSK): Band Edge-Left Side Hopping

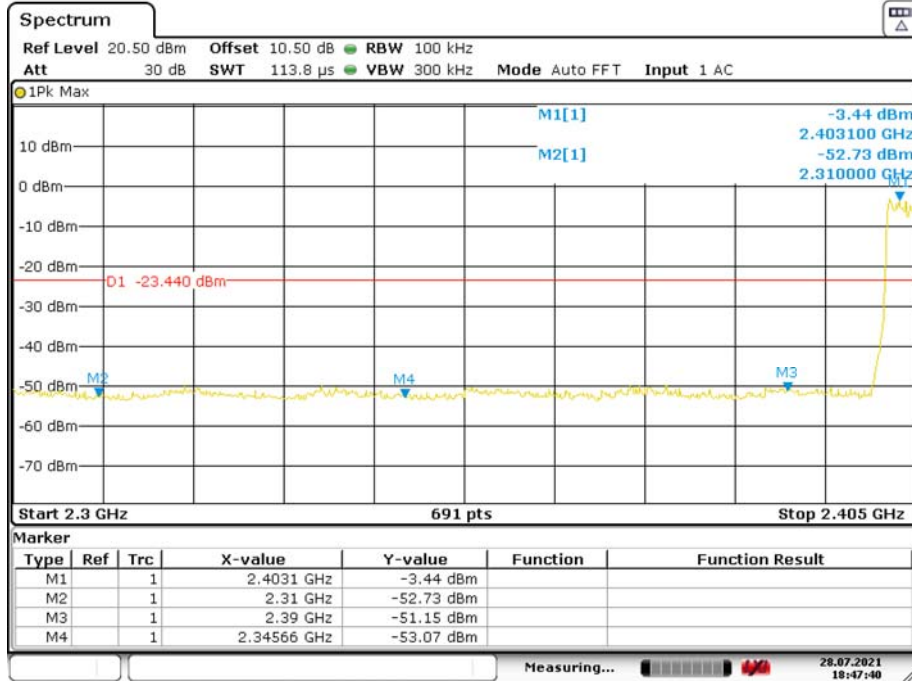


Date: 28.JUL.2021 18:47:40

### Single

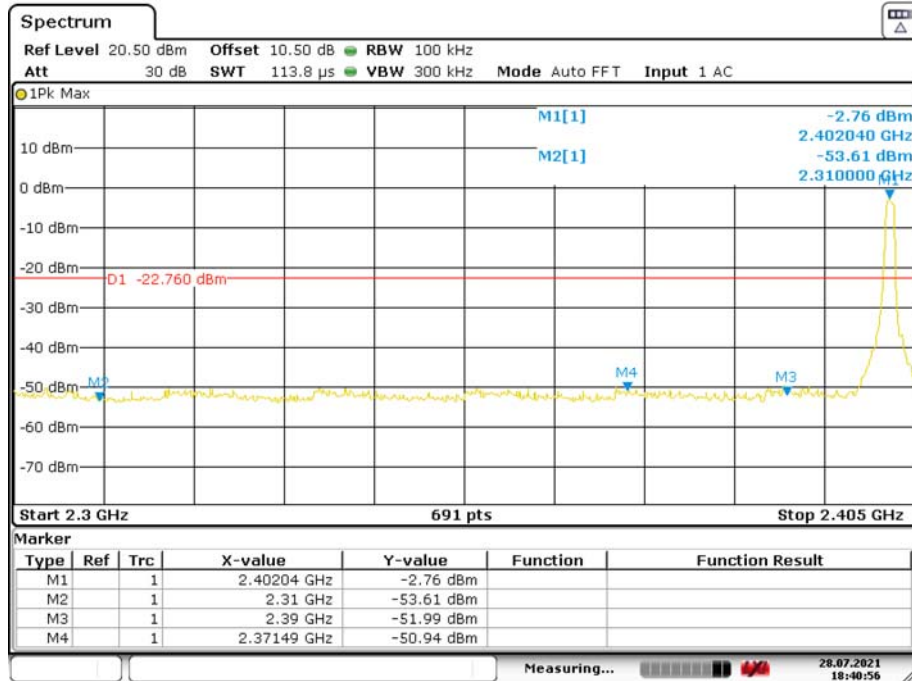


Date: 28.JUL.2021 18:40:56

### EDR (8DPSK): Band Edge-Right Side Hopping

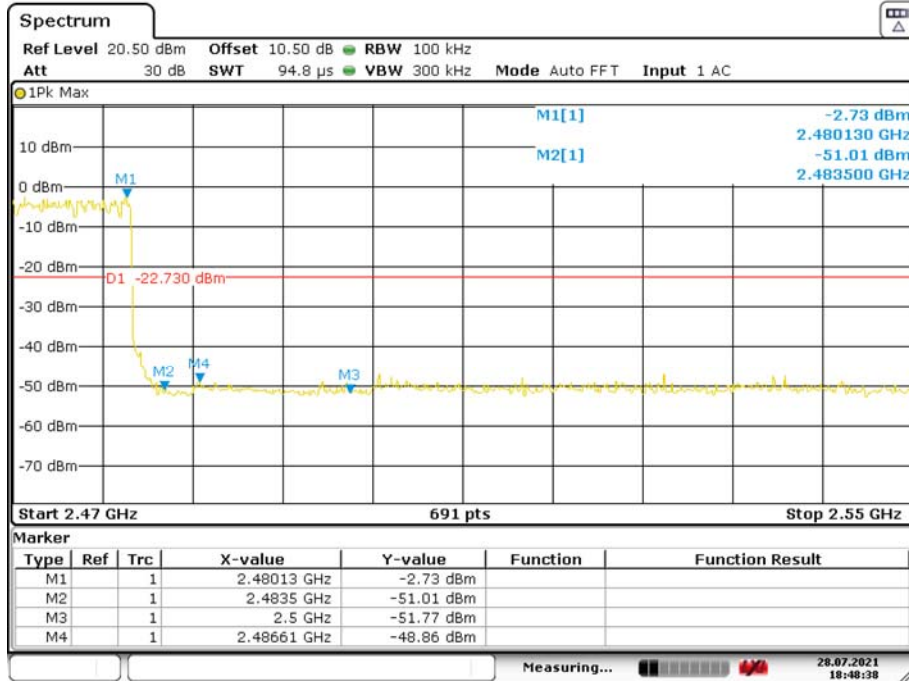

Date: 28.JUL.2021 18:48:38

### Single

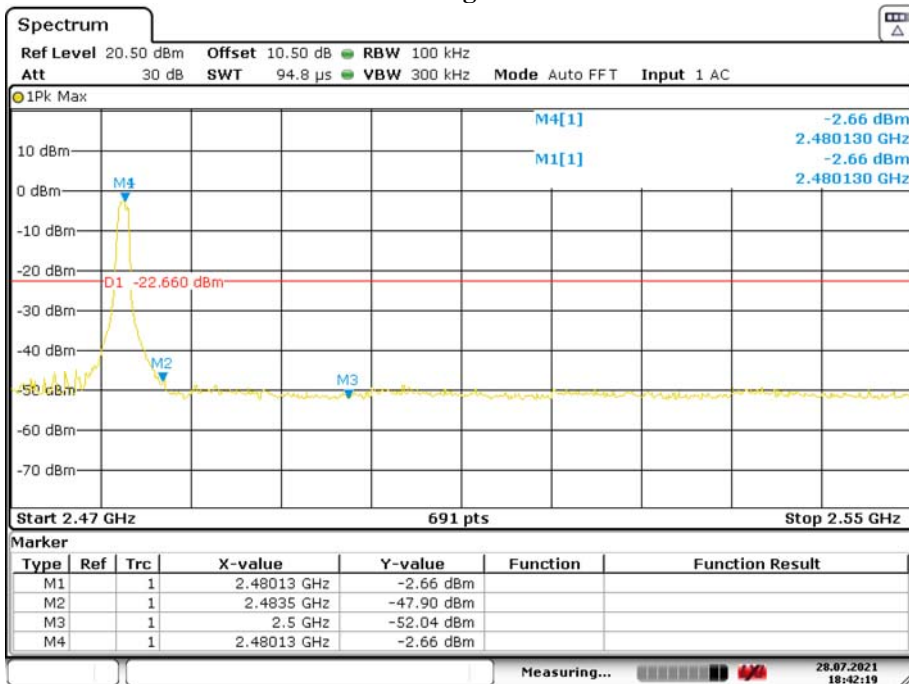

Date: 28.JUL.2021 18:42:19

\*\*\*\*\* END OF REPORT \*\*\*\*\*