




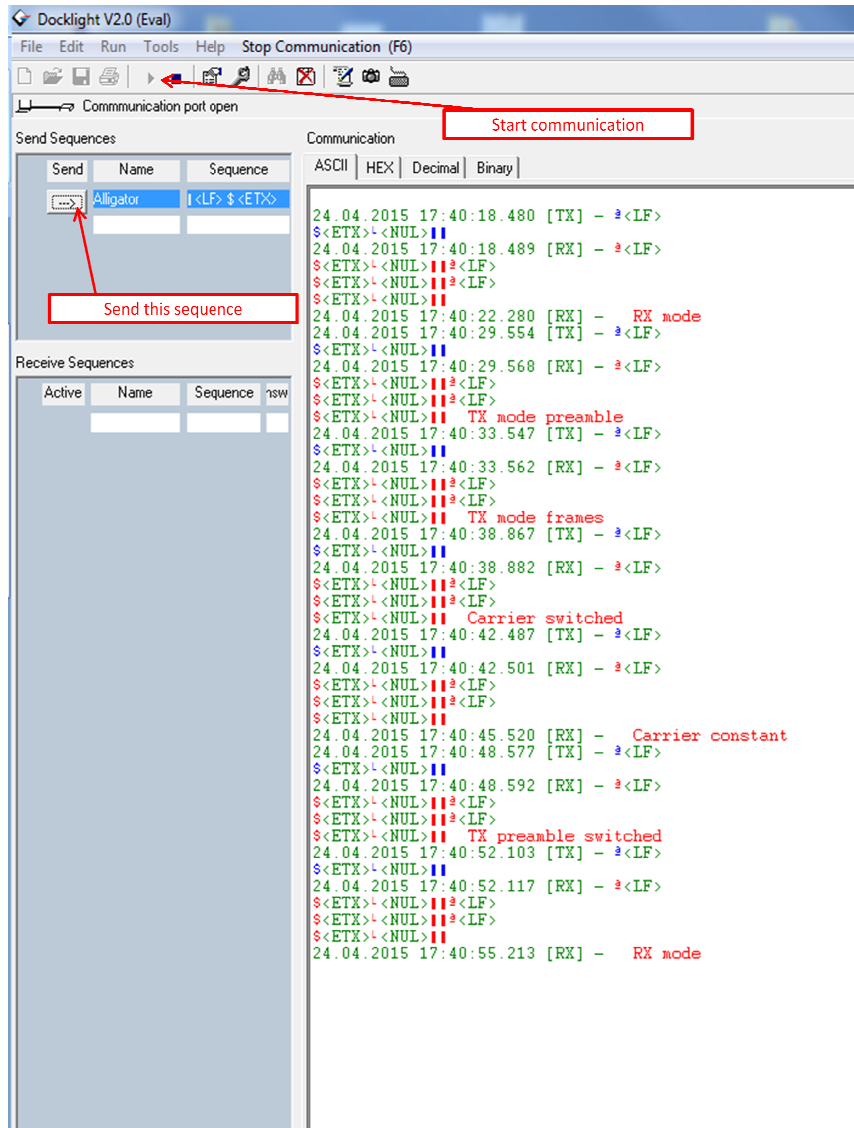
- After configuration COM port, choose **Send Sequence** function by double click on the white pool like on the graphic bellow.

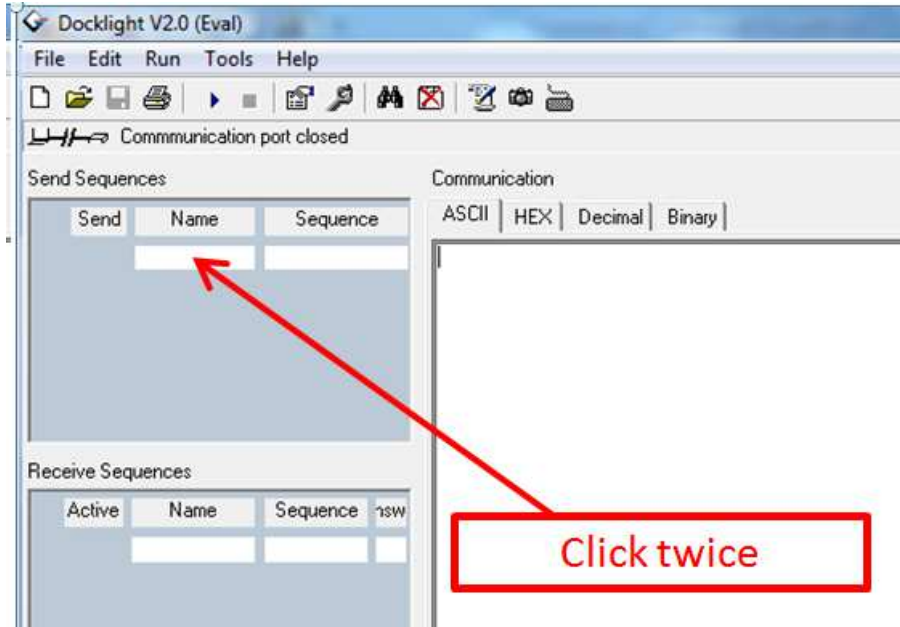

- In **Edit Send Sequence** window, write name of sequence definition (like on the graph bellow), choose HEX, and write sequence which will be sent to device: **AA 0A 24 03 00 87**, and press OK.

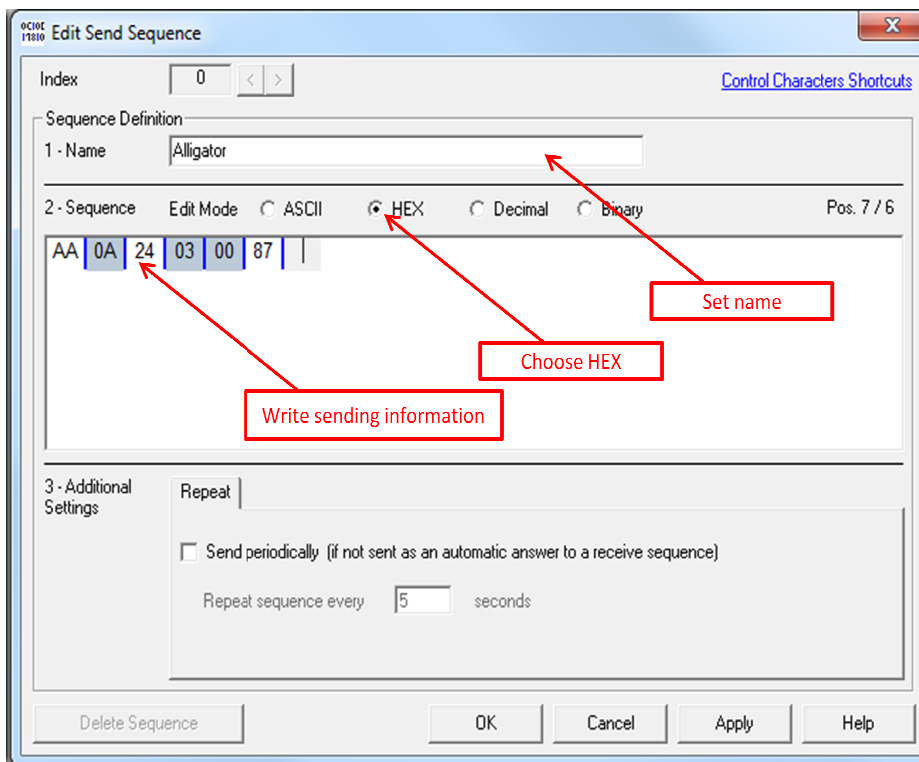

- Start communication by pressing  button on the control panel.
- Chose communication window from HEX to ASCII.
- To set correct mode, please press on arrow button to send this sequence.
After each activity of the arrow button, mode will be changed.



Dipl. -Ing. Tomasz Niedźwiedz

E-Mail: niedzwiedz@bury.com
Internet: www.bury.com
Tel: +49 5732 9706-214
Fax: +49 5732 9706-209