



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DAZA #69

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: channel 1(802.11g)

Model: ME12-7001

Manufacturer:YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/07/06

Time: 22:00:27

Engineer Signature: Terry

Distance: 3m

Note:Report NO.:ATE20121392

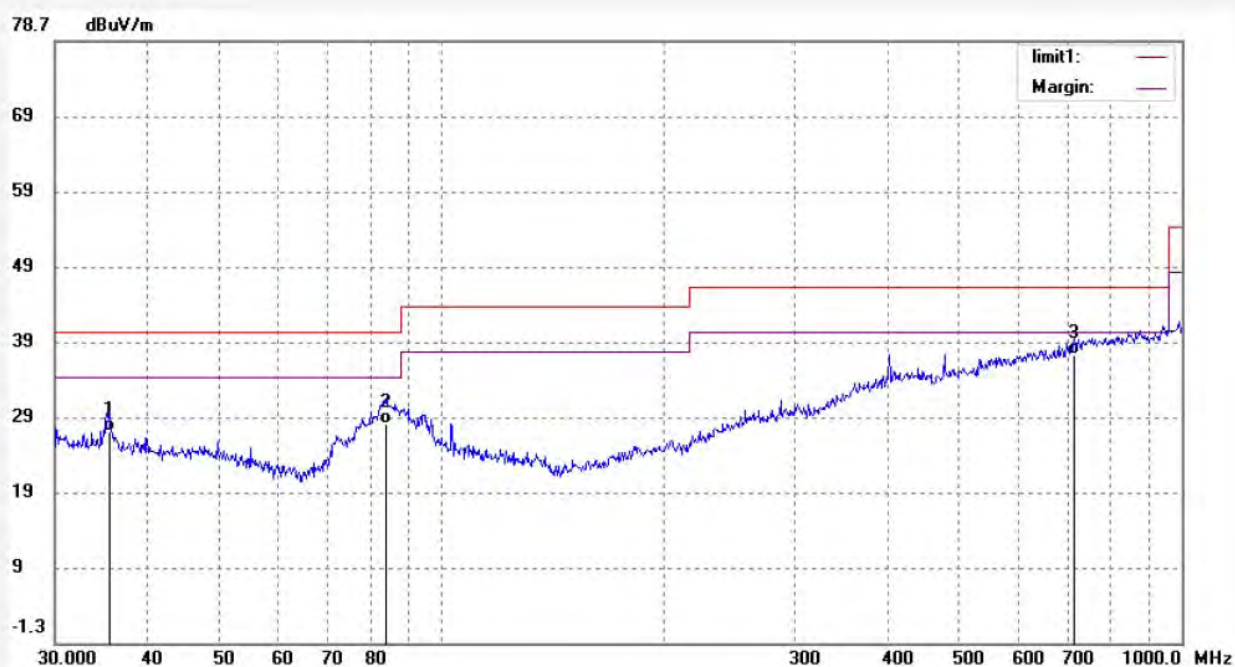

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.5112	11.25	15.57	26.82	40.00	-13.18	QP			
2	84.2839	14.32	13.40	27.72	40.00	-12.28	QP			
3	716.2038	10.01	27.05	37.06	46.00	-8.94	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DAZA #70

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: channel 1(802.11g)

Model: ME12-7001

Manufacturer:YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/07/06

Time: 22:02:02

Engineer Signature: Terry

Distance: 3m

Note:Report NO.:ATE20121392

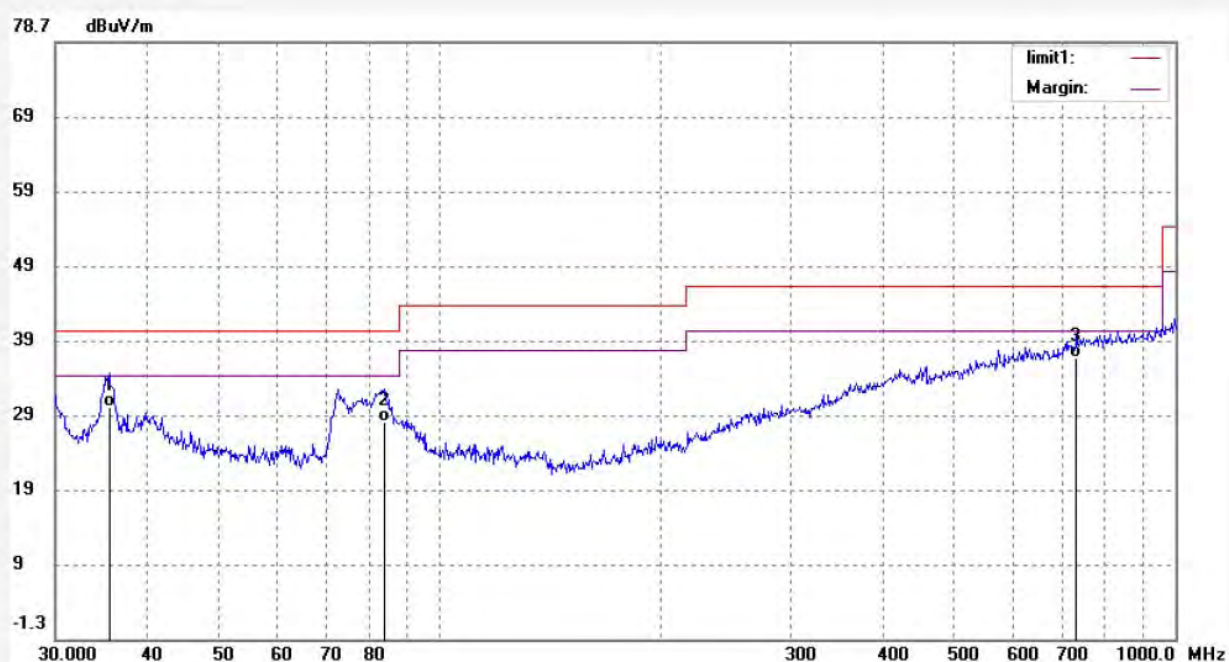

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.5112	14.32	15.57	29.89	40.00	-10.11	QP			
2	83.9883	14.54	13.34	27.88	40.00	-12.12	QP			
3	734.0373	9.05	27.43	36.48	46.00	-9.52	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #1855

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 1(802.11g)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 9/05/37

Engineer Signature:Terry

Distance: 3m

Note: Report NO.:ATE20121392

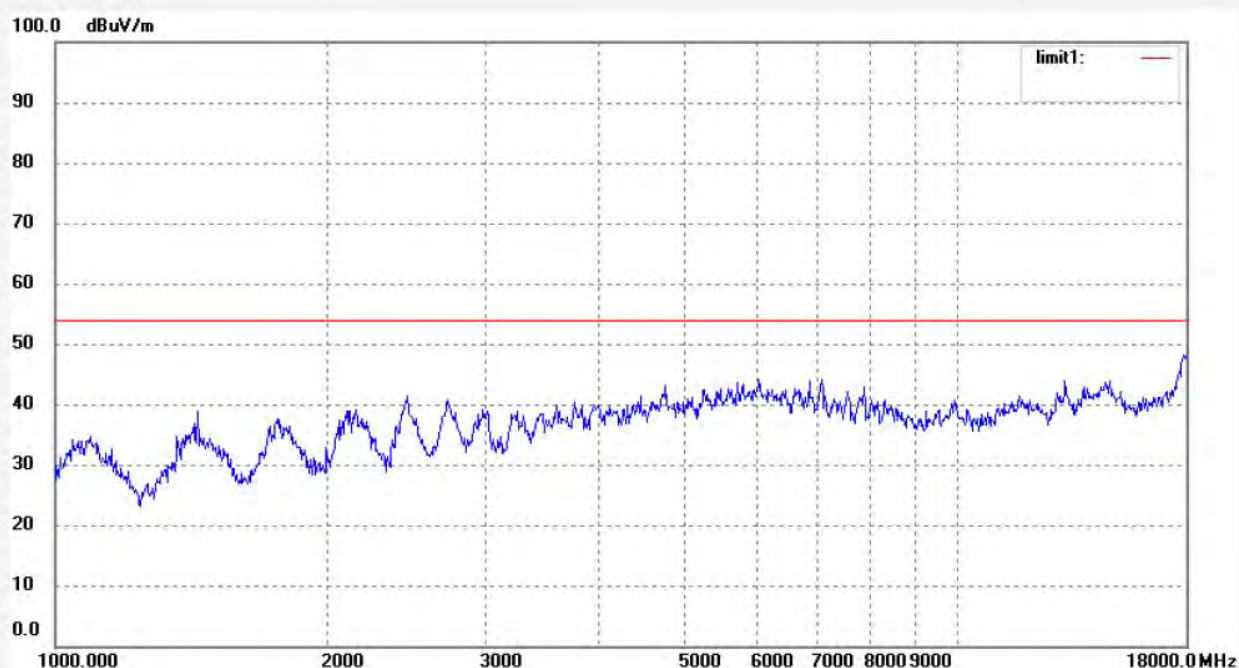

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #1854

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 1(802.11g)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 9/02/30

Engineer Signature:Terry

Distance: 3m

Note: Report NO.:ATE20121392

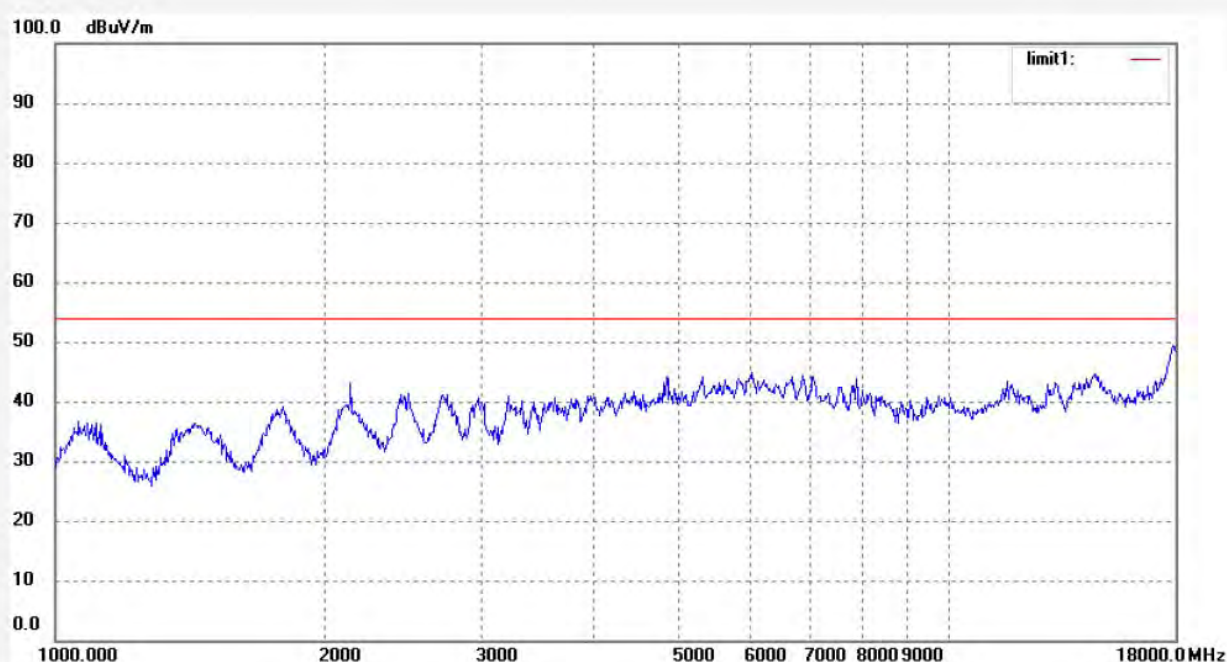

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #1608

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet Pad

Mode: TX Channel 1 (802.11g)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/07/05

Time: 10:35:56

Engineer Signature:\ Terry

Distance:

Note: Report NO.:ATE20121392

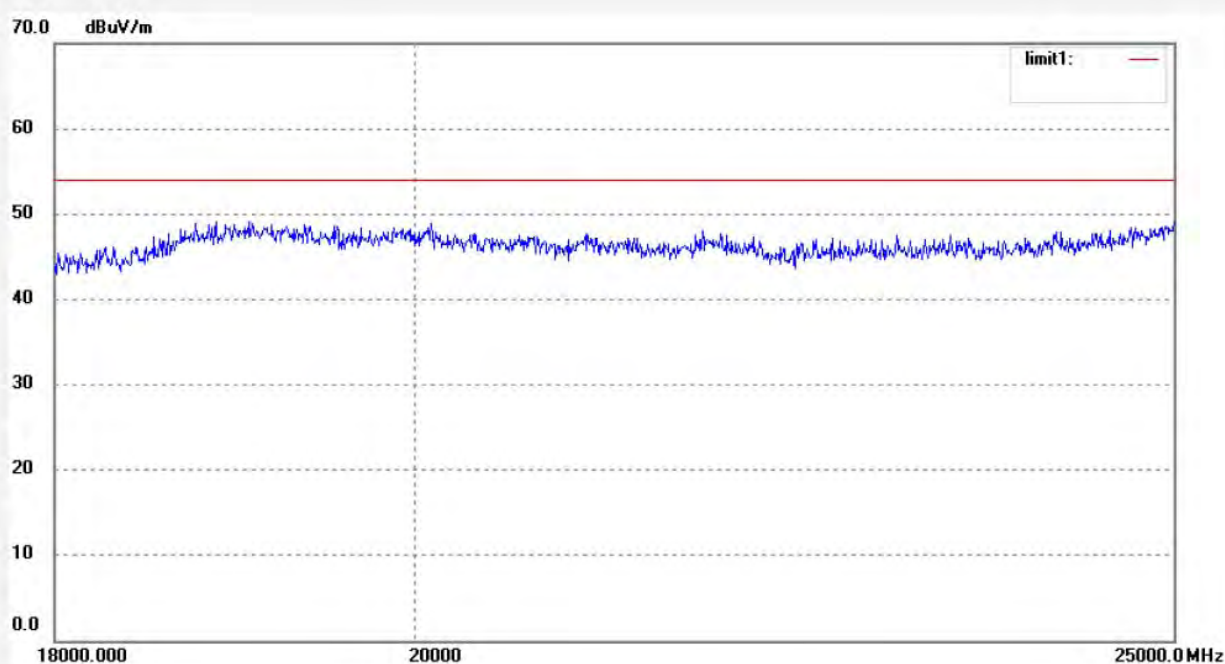

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #1607

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet Pad

Mode: TX Channel 1 (802.11g)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/07/05

Time: 10:32:05

Engineer Signature: Terry

Distance:

Note: Report NO.:ATE20121392

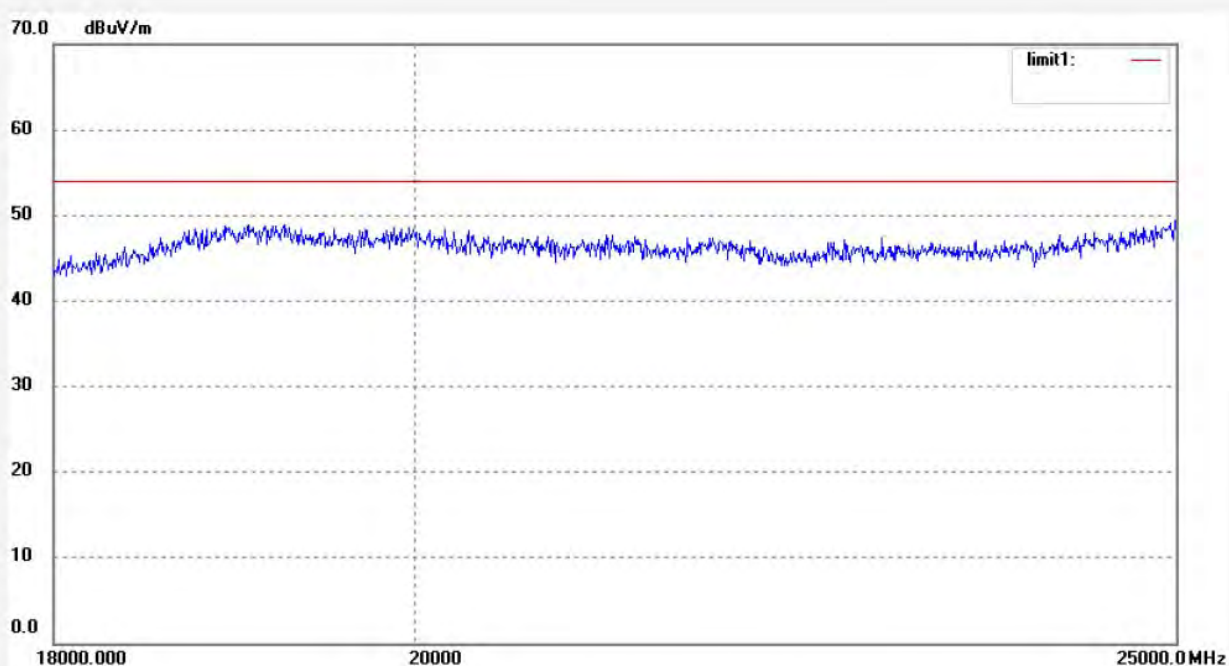

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DAZA #72

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: channel 6(802.11g)

Model: ME12-7001

Manufacturer:YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/07/06

Time: 22:05:25

Engineer Signature: Terry

Distance: 3m

Note:Report NO.:ATE20121392

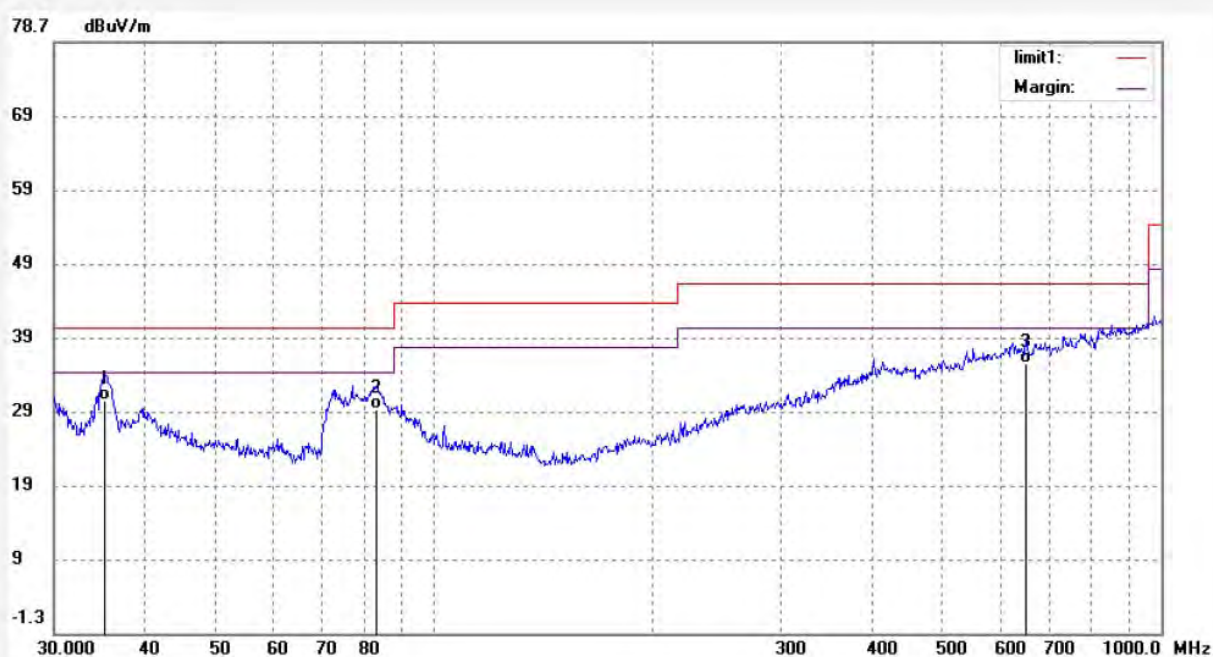

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.2626	14.65	15.63	30.28	40.00	-9.72	QP			
2	83.4002	15.74	13.20	28.94	40.00	-11.06	QP			
3	653.6758	9.25	25.99	35.24	46.00	-10.76	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DAZA #71

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: channel 6(802.11g)

Model: ME12-7001

Manufacturer:YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/07/06

Time: 22:03:34

Engineer Signature: Terry

Distance: 3m

Note:Report NO.:ATE20121392

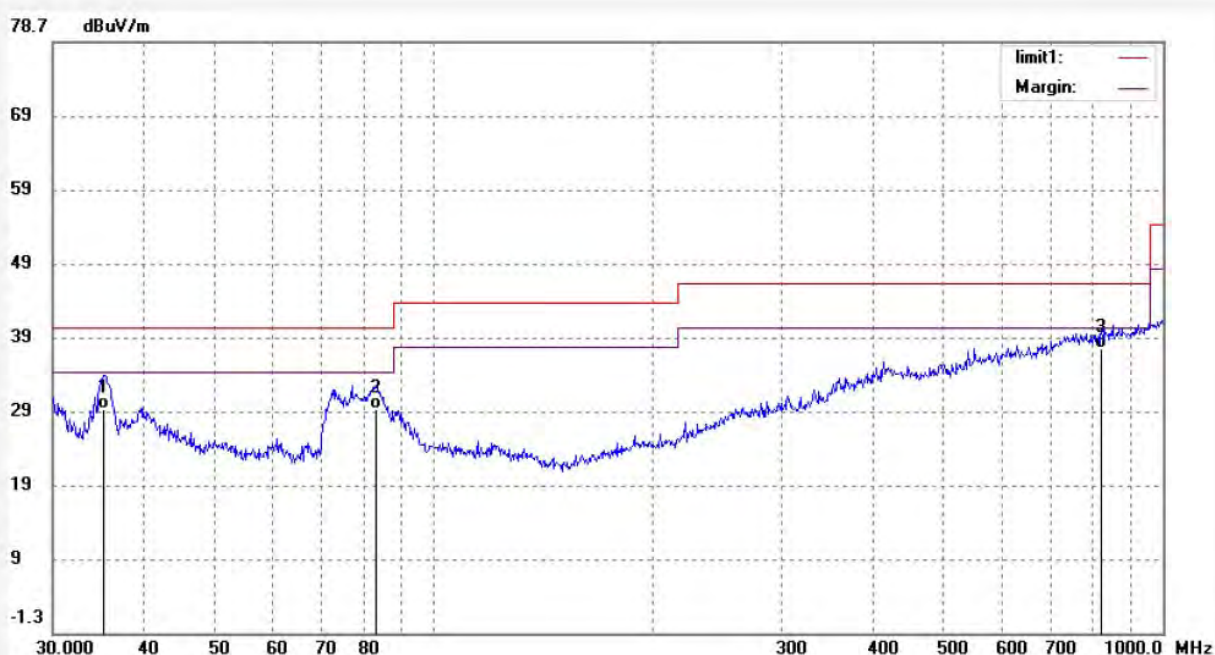

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.2626	13.32	15.63	28.95	40.00	-11.05	QP			
2	83.4002	15.74	13.20	28.94	40.00	-11.06	QP			
3	824.2782	9.12	28.15	37.27	46.00	-8.73	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #1860

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 6(802.11g)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 9/22/38

Engineer Signature:Terry

Distance: 3m

Note: Report NO.:ATE20121392

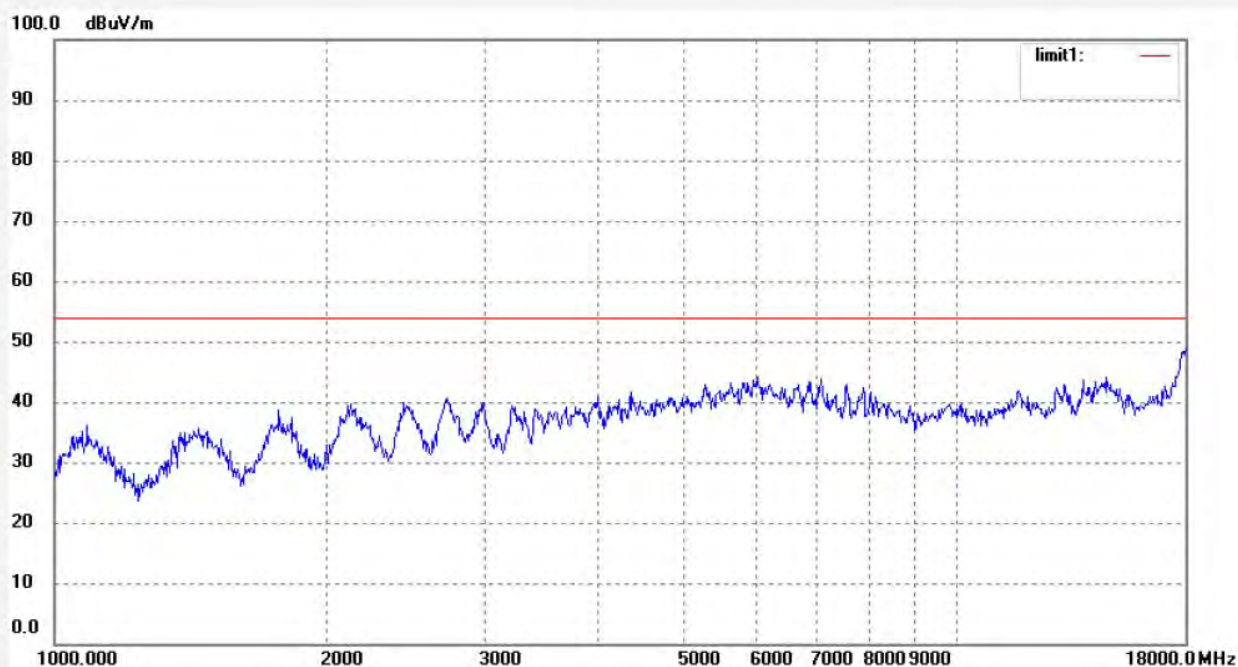

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DAZA #72
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: Tablet Pad
Mode: channel 6(802.11g)
Model: ME12-7001
Manufacturer:YuanFeng

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2012/07/06
Time: 22:05:25
Engineer Signature: Terry
Distance: 3m

Note:Report NO.:ATE20121392

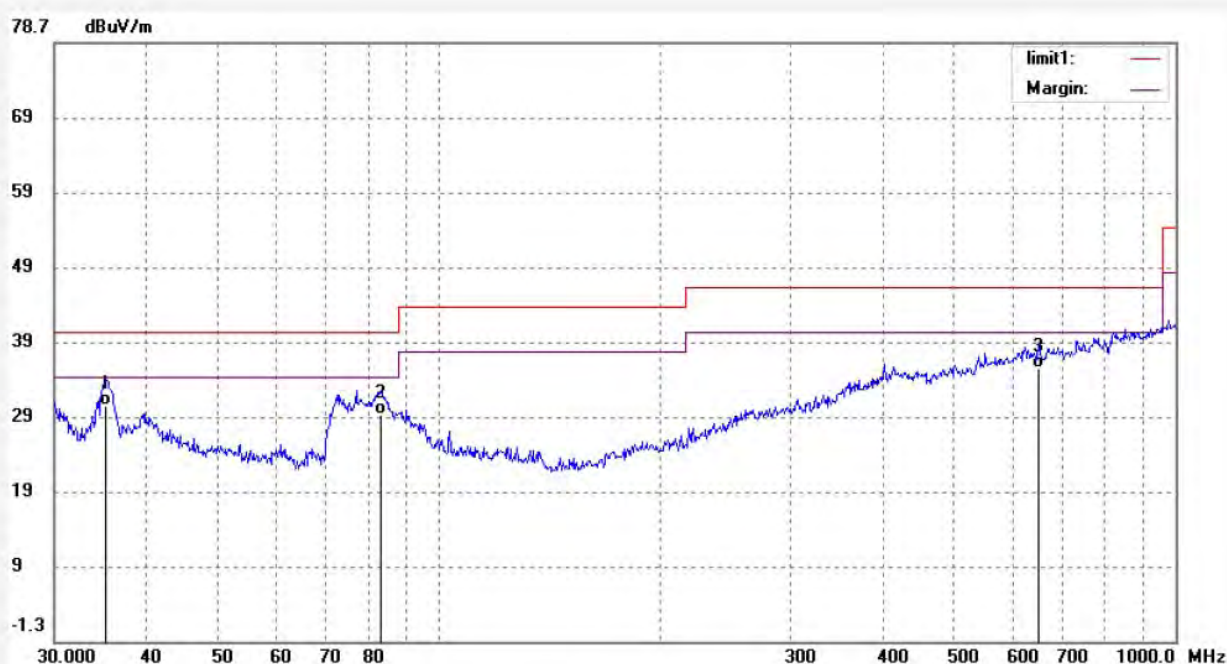

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.2626	14.65	15.63	30.28	40.00	-9.72	QP			
2	83.4002	15.74	13.20	28.94	40.00	-11.06	QP			
3	653.6758	9.25	25.99	35.24	46.00	-10.76	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #1609

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet Pad

Mode: TX Channel 6 (802.11g)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/07/05

Time: 10:38:38

Engineer Signature: Terry

Distance:

Note: Report NO.:ATE20121392

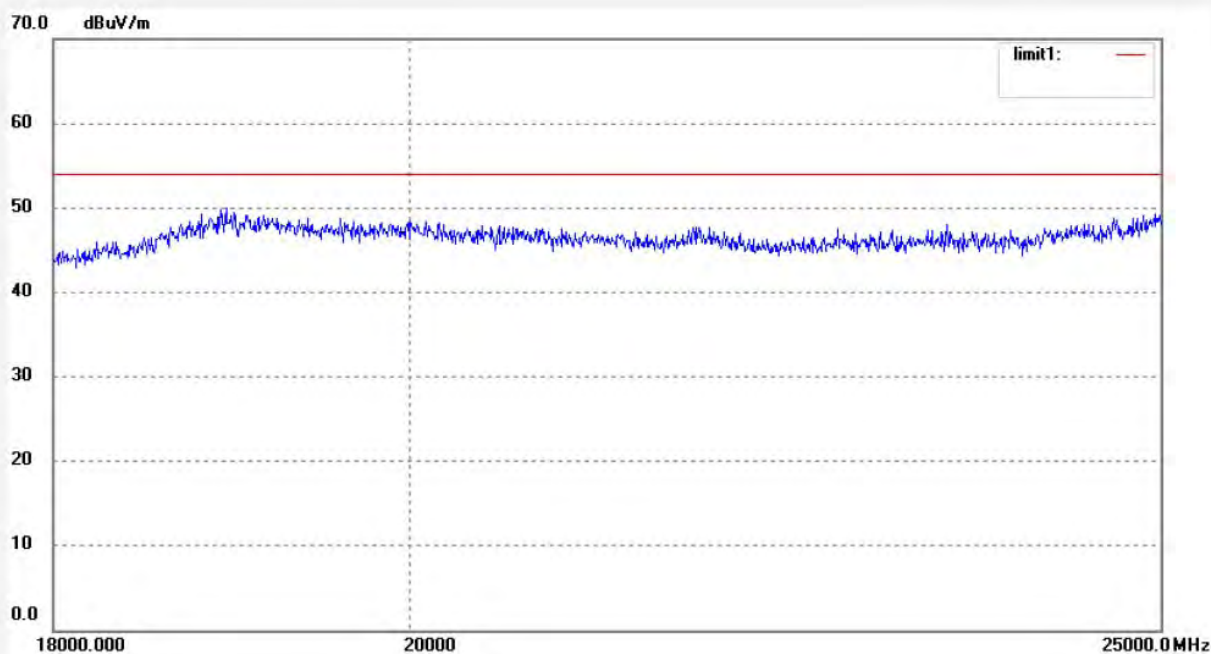

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #1610

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet Pad

Mode: TX Channel 6 (802.11g)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/07/05

Time: 10:43:17

Engineer Signature: Terry

Distance:

Note: Report NO.:ATE20121392

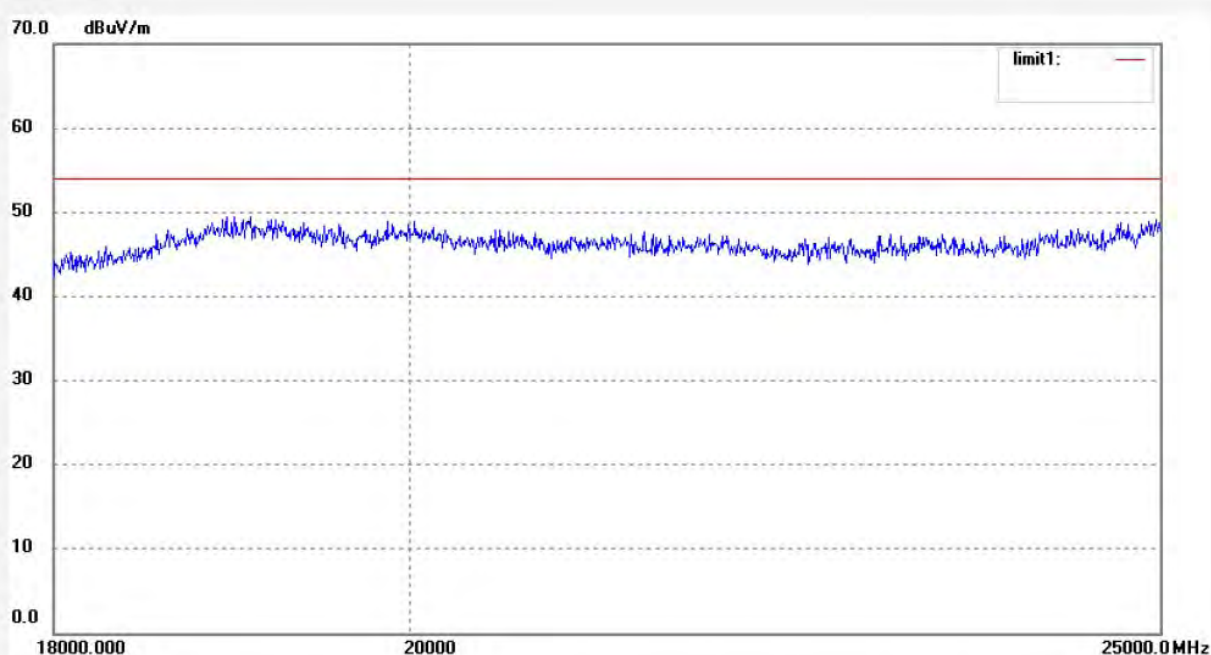

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DAZA #73

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: channel 11(802.11g)

Model: ME12-7001

Manufacturer:YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/07/06

Time: 22:10:14

Engineer Signature: Terry

Distance: 3m

Note:Report NO.:ATE20121392

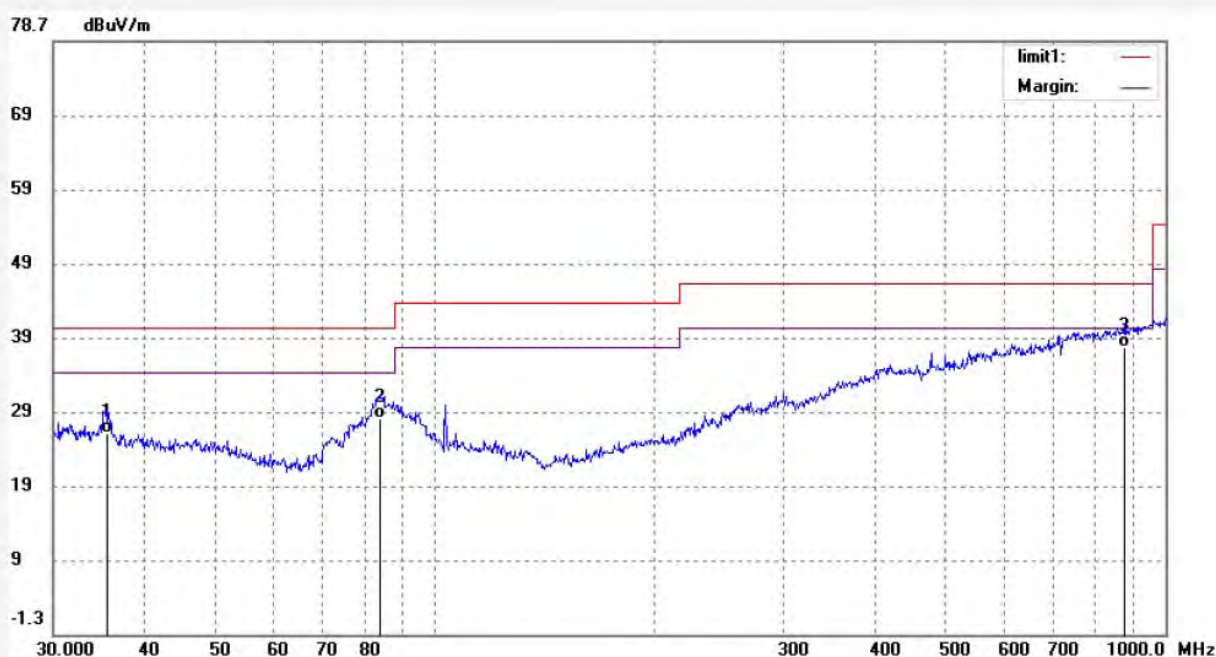

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.2626	10.24	15.63	25.87	40.00	-14.13	QP			
2	83.6937	14.56	13.27	27.83	40.00	-12.17	QP			
3	878.0931	8.64	28.70	37.34	46.00	-8.66	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DAZA #74
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: Tablet Pad
Mode: channel 11(802.11g)
Model: ME12-7001
Manufacturer:YuanFeng

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2012/07/06
Time: 22:12:23
Engineer Signature: Terry
Distance: 3m

Note:Report NO.:ATE20121392

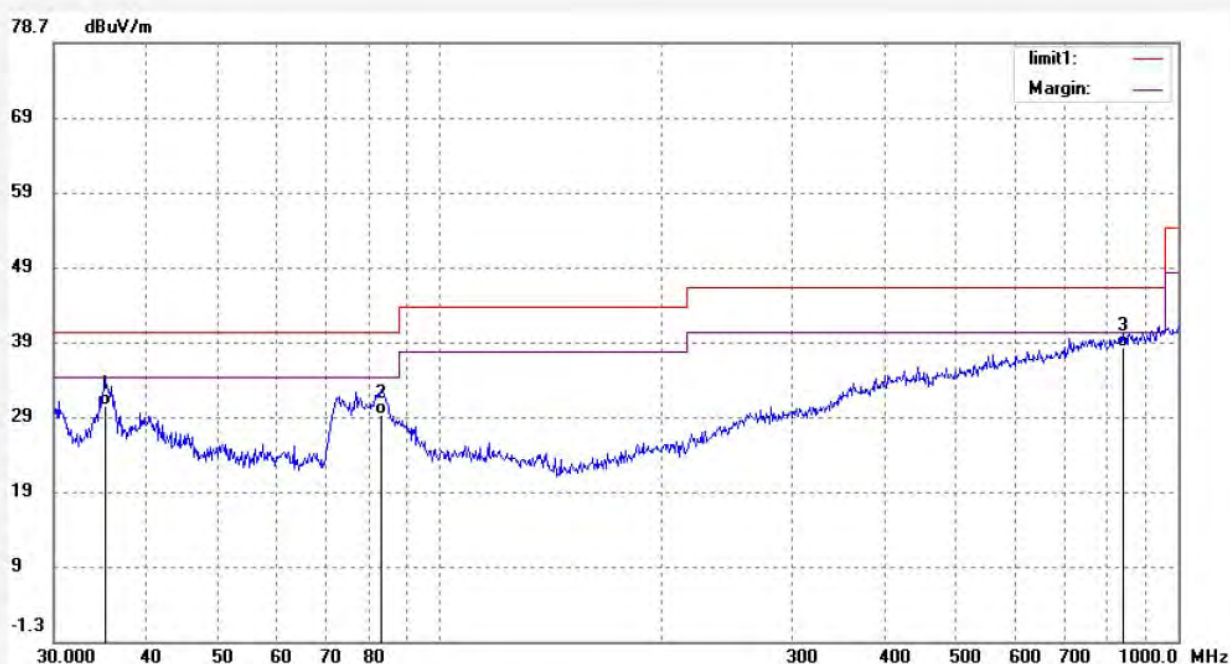

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.2626	14.65	15.63	30.28	40.00	-9.72	QP			
2	82.8162	15.89	13.07	28.96	40.00	-11.04	QP			
3	841.8397	9.71	28.36	38.07	46.00	-7.93	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: T #1867

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 11(802.11g)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 9/44/11

Engineer Signature:Terry

Distance: 3m

Note: Report NO.:ATE20121392

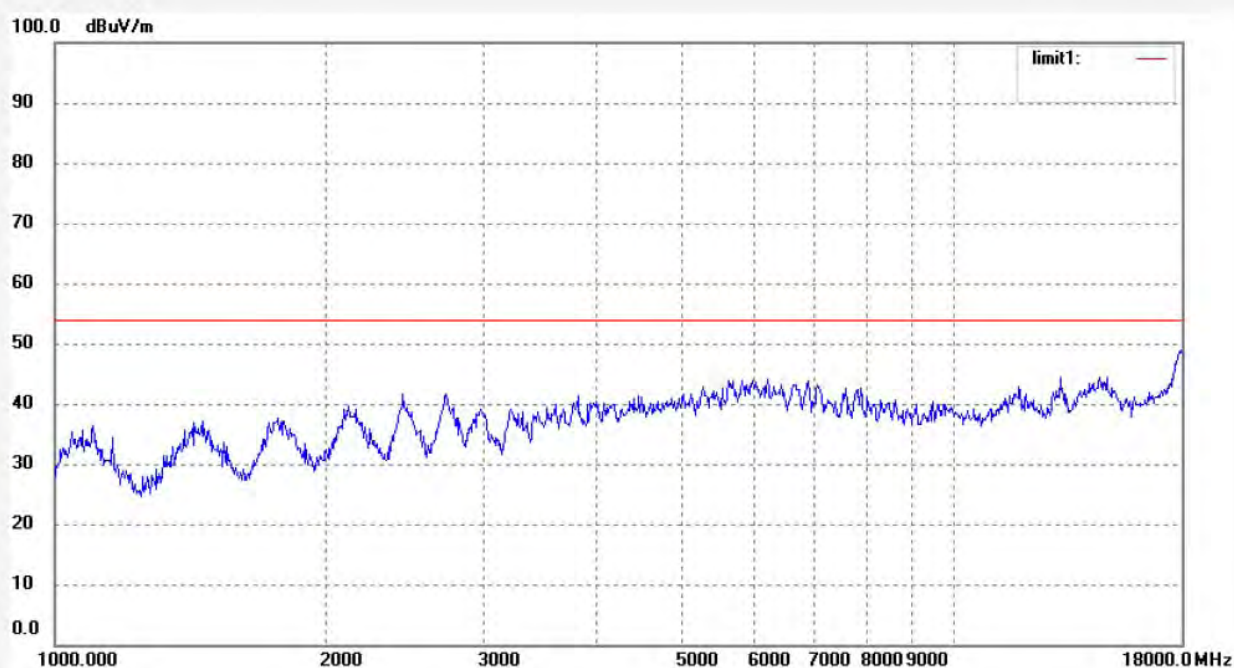

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #1866

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 11(802.11g)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 9/41/20

Engineer Signature:Terry

Distance: 3m

Note: Report NO.:ATE20121392

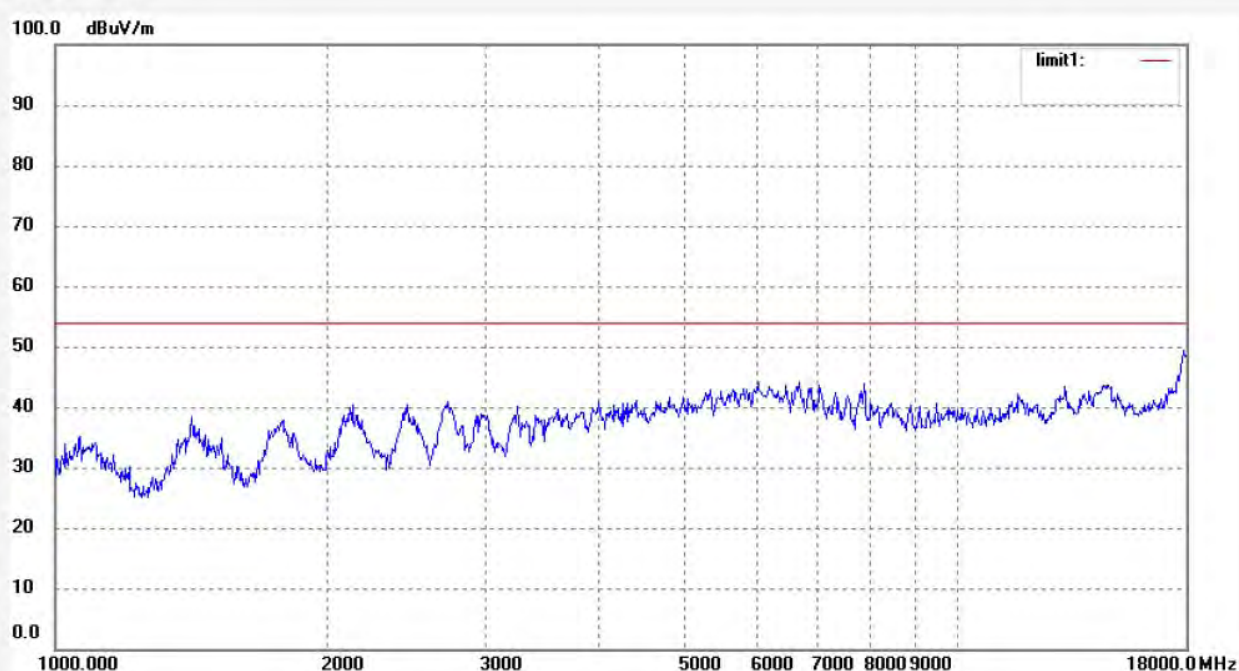

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #1612

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet Pad

Mode: TX Channel 11 (802.11g)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/07/05

Time: 10:50:47

Engineer Signature: Terry

Distance:

Note: Report NO.:ATE20121392

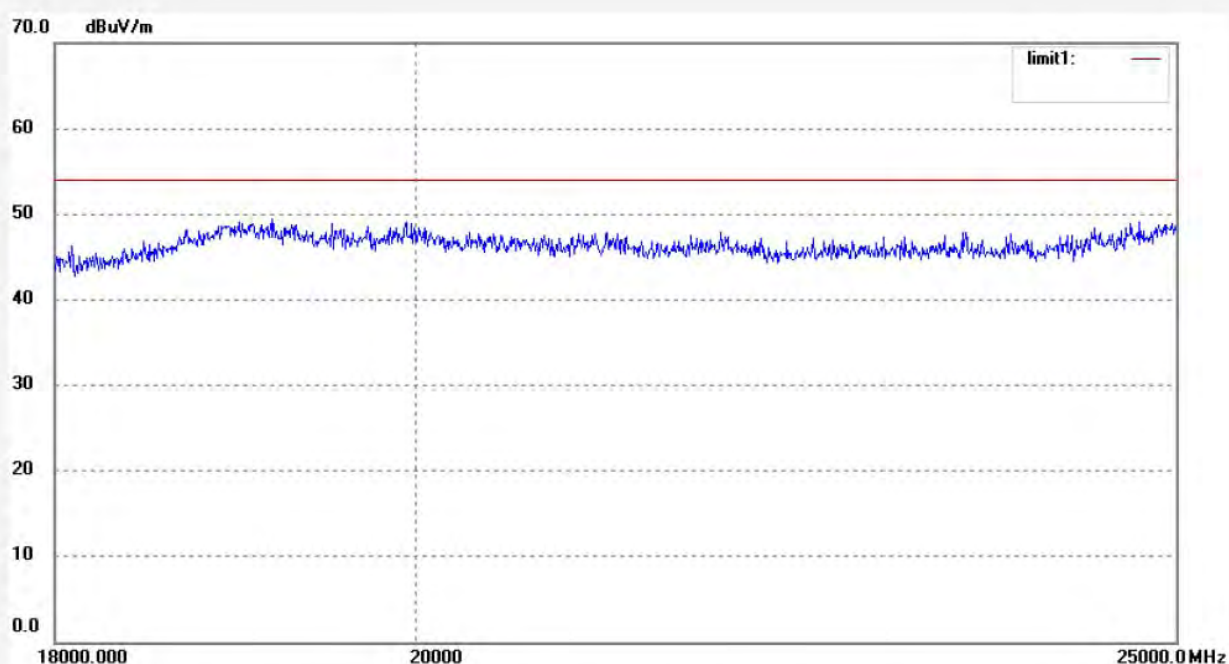

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #1611

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet Pad

Mode: TX Channel 11 (802.11g)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/07/05

Time: 10:47:55

Engineer Signature: Terry

Distance:

Note: Report NO.:ATE20121392

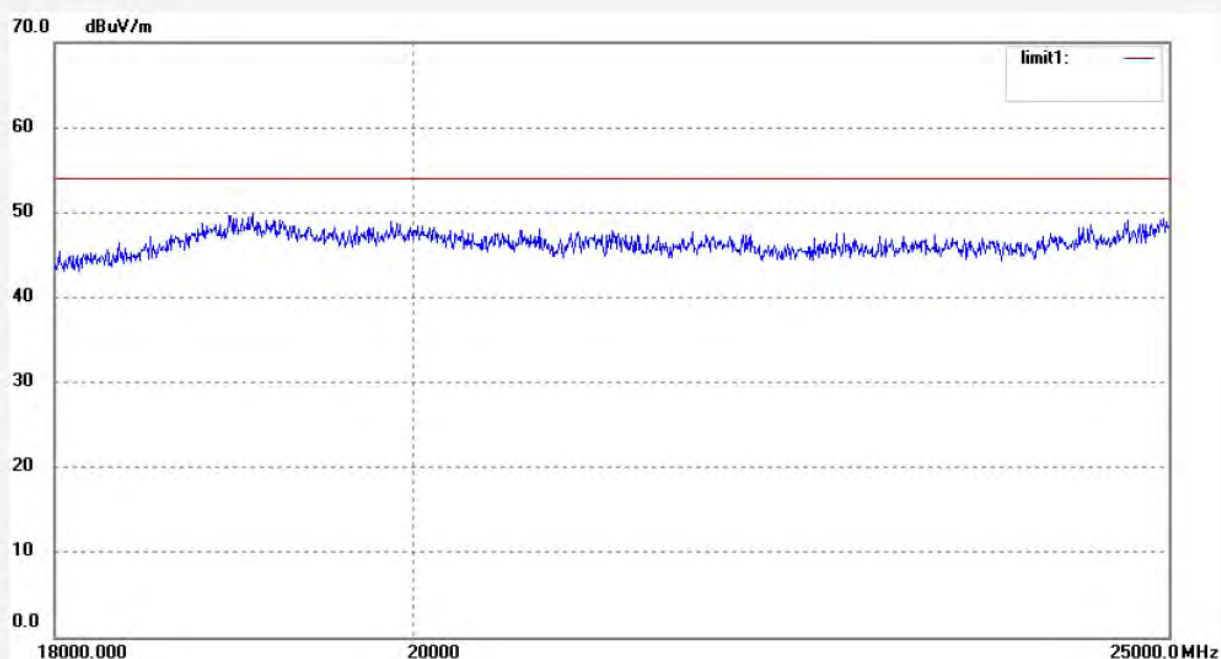

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DAZA #77

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: channel 1(802.11n)

Model: ME12-7001

Manufacturer:YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/07/06

Time: 22:37:44

Engineer Signature: Terry

Distance: 3m

Note:Report NO.:ATE20121392

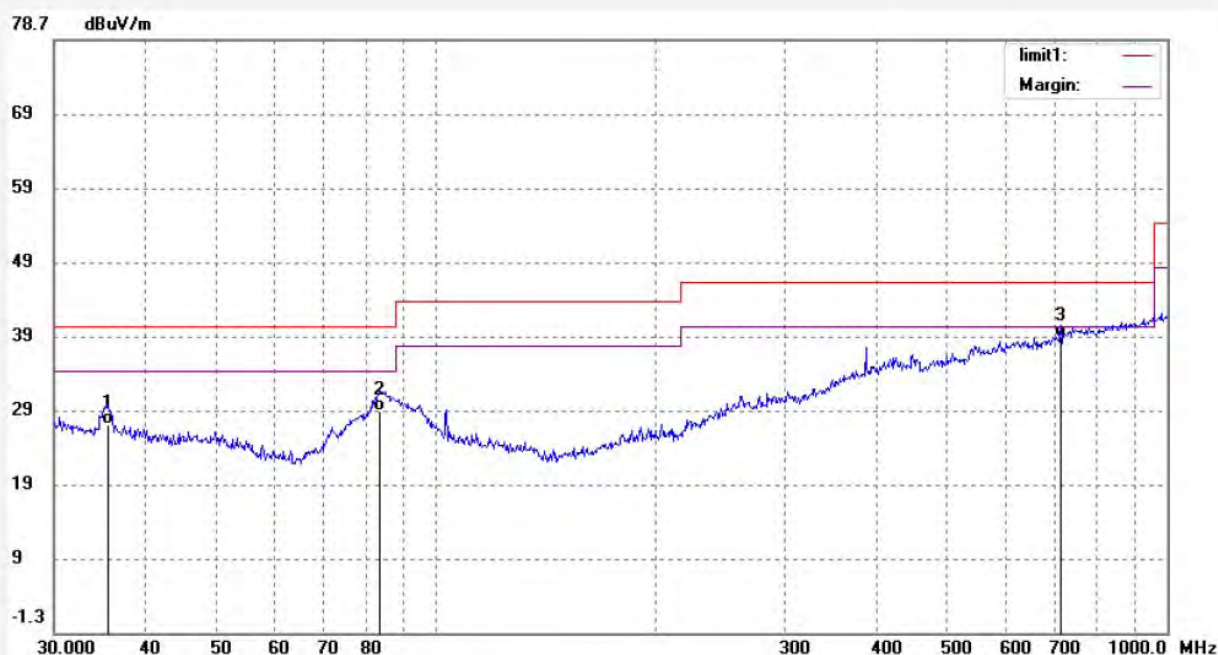

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.5112	11.25	15.57	26.82	40.00	-13.18	QP			
2	83.6937	15.42	13.27	28.69	40.00	-11.31	QP			
3	716.2038	11.54	27.05	38.59	46.00	-7.41	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DAZA #75

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: channel 1(802.11n)

Model: ME12-7001

Manufacturer:YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/07/06

Time: 22:14:22

Engineer Signature: Terry

Distance: 3m

Note:Report NO.:ATE20121392

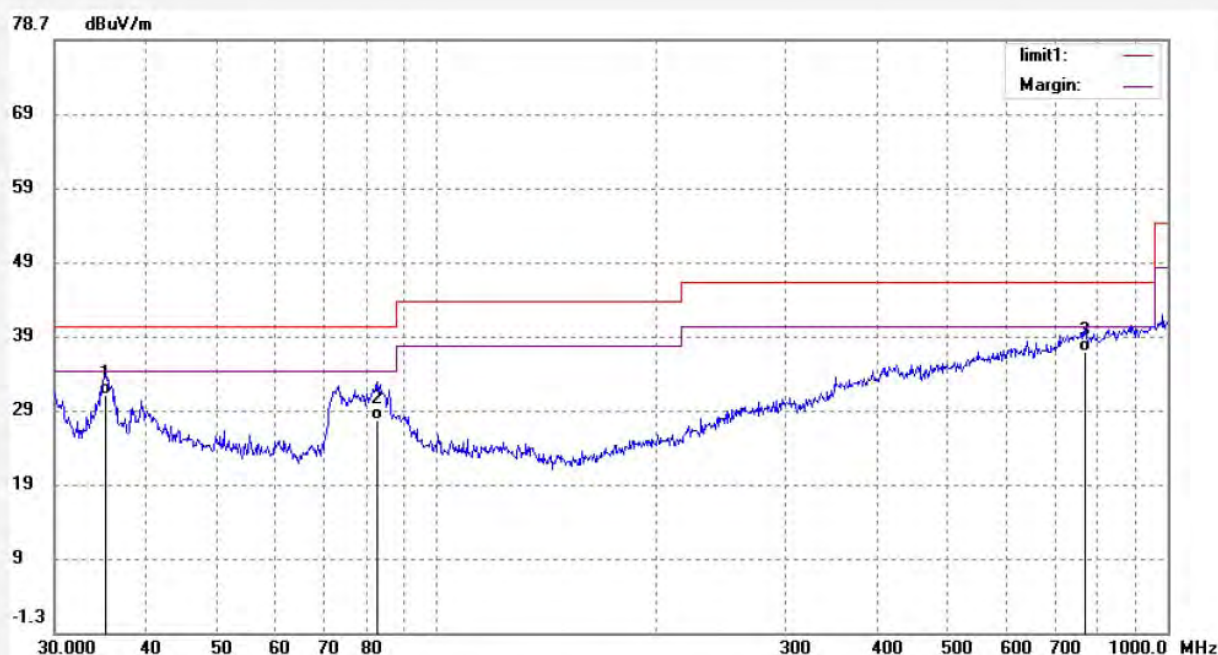

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.2626	15.24	15.63	30.87	40.00	-9.13	QP			
2	82.5257	14.35	13.01	27.36	40.00	-12.64	QP			
3	773.7614	8.71	27.85	36.56	46.00	-9.44	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #1856

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 1(802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 9/09/29

Engineer Signature:Terry

Distance: 3m

Note: Report NO.:ATE20121392

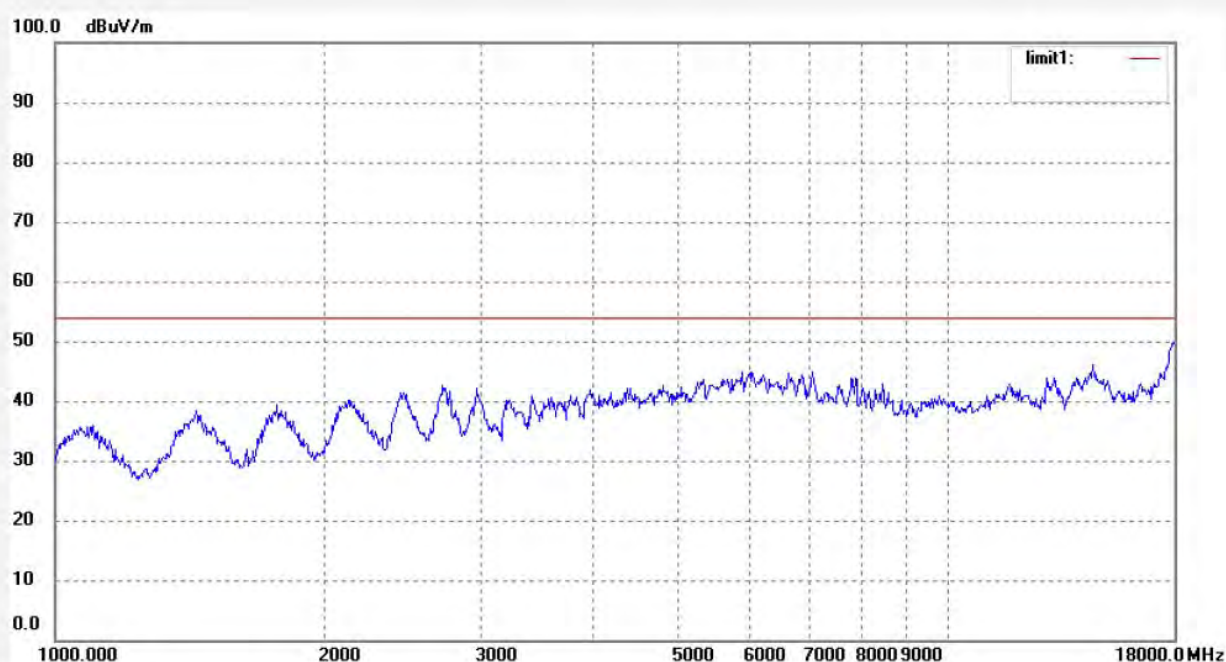

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #1857

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 1(802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 9/12/15

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20121392

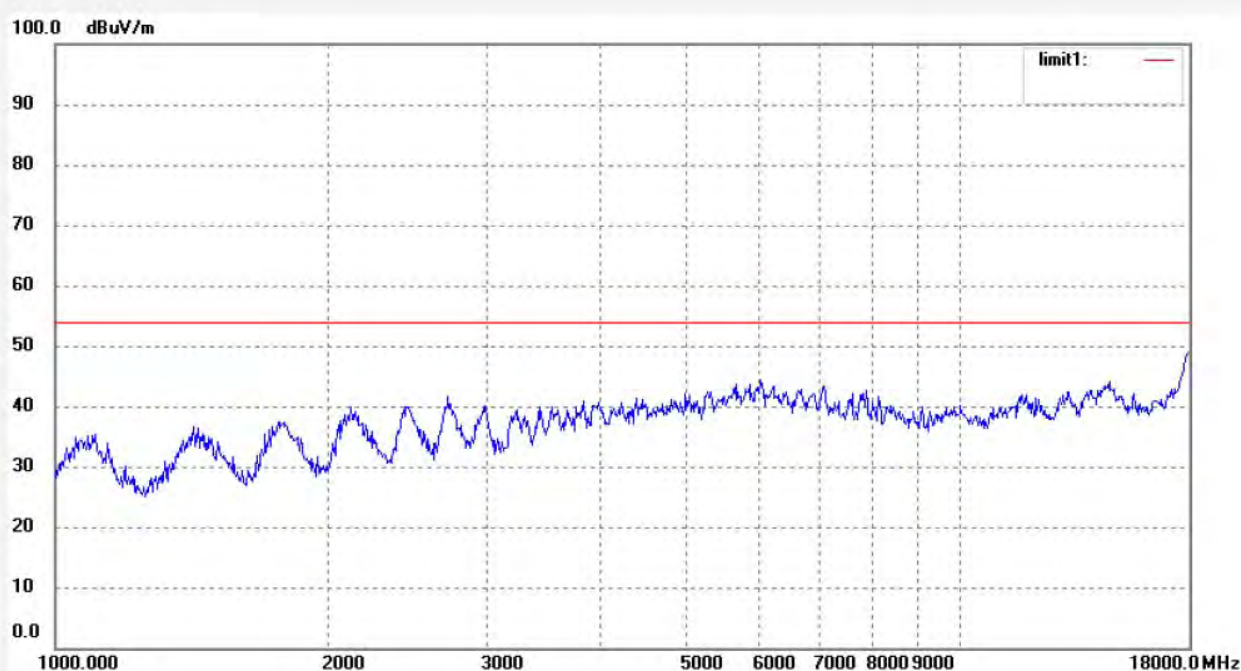

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #1617

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: TX Channel 1 (802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/07/05

Time: 11:09:37

Engineer Signature: Terry

Distance:

Note: Report NO.:ATE20121392

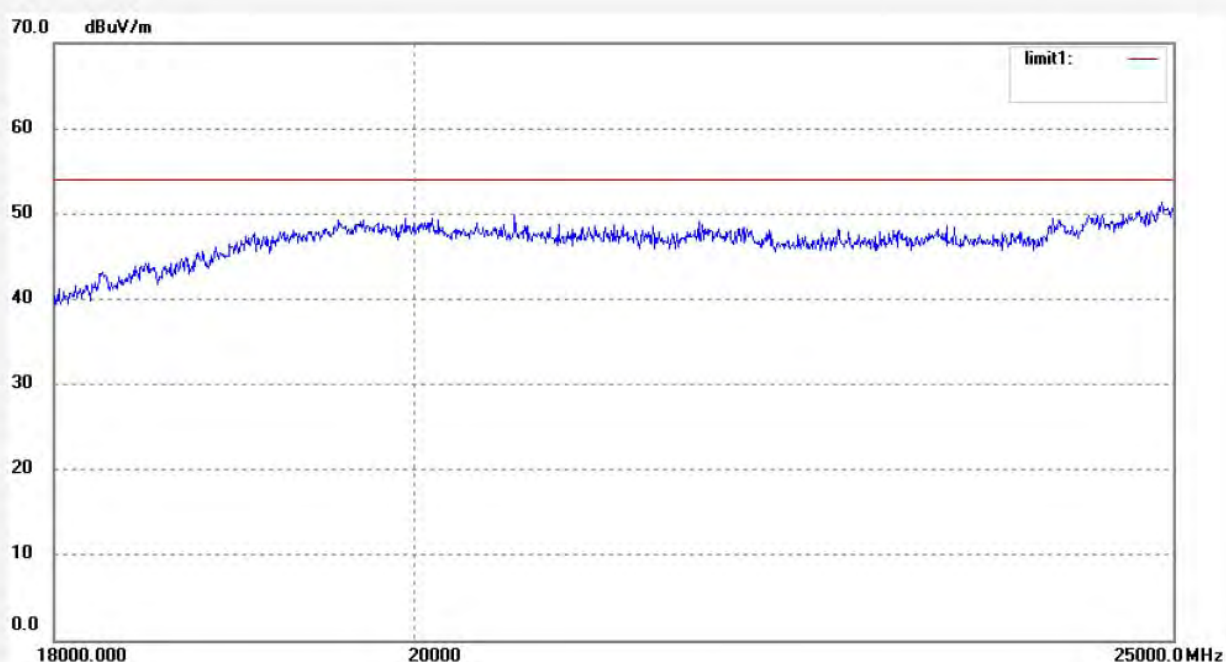

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #1618

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: TX Channel 1 (802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/07/05

Time: 11:14:41

Engineer Signature: Terry

Distance:

Note: Report NO.: ATE20121392

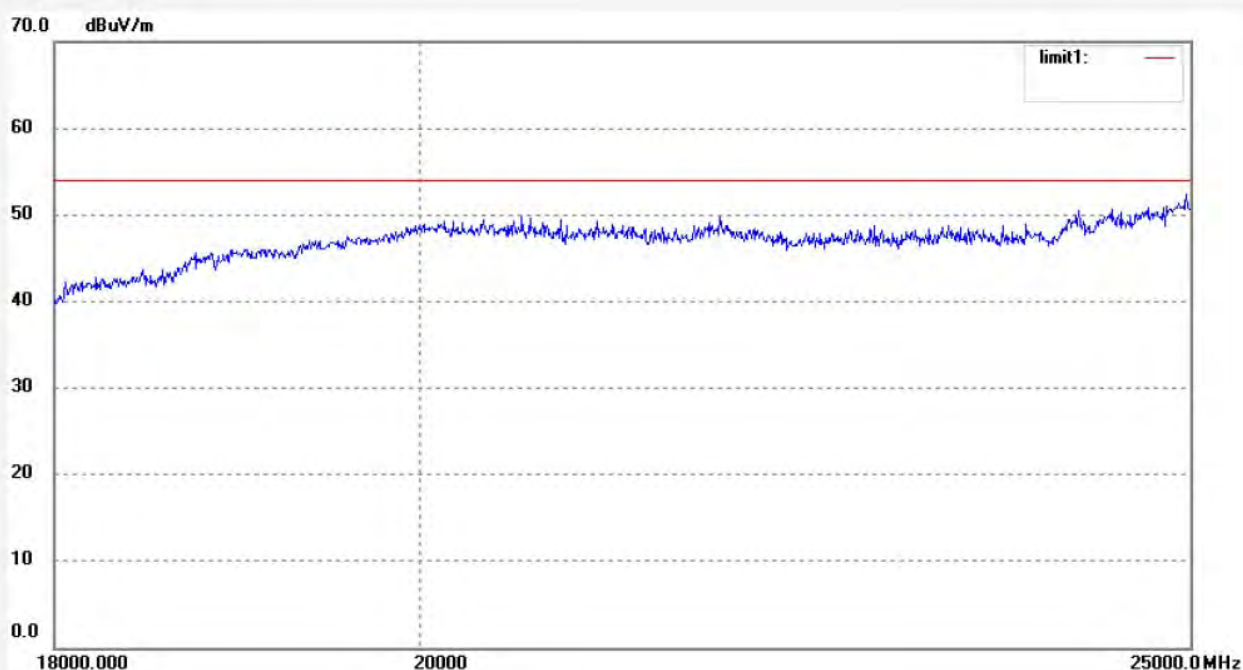

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DAZA #81

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: channel 6(802.11n)

Model: ME12-7001

Manufacturer:YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/07/06

Time: 22:45:12

Engineer Signature: Terry

Distance: 3m

Note:Report NO.:ATE20121392

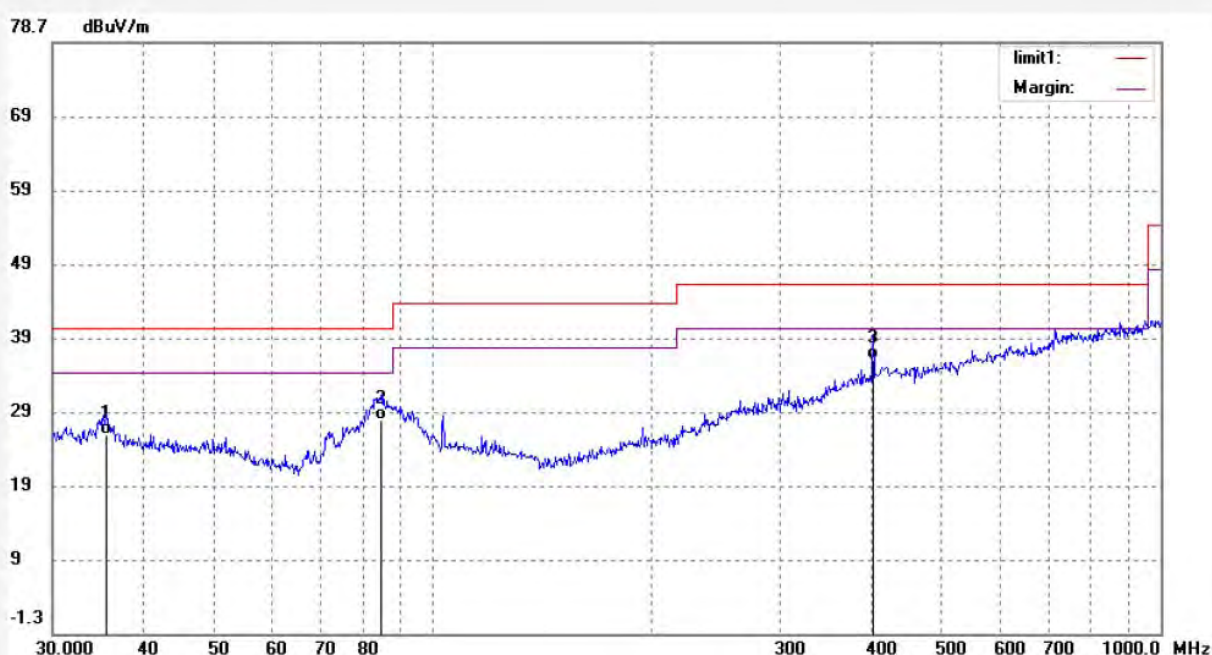

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.5112	10.02	15.57	25.59	40.00	-14.41	QP			
2	84.5806	14.12	13.46	27.58	40.00	-12.42	QP			
3	402.5168	13.45	22.39	35.84	46.00	-10.16	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DAZA #79

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: channel 6(802.11n)

Model: ME12-7001

Manufacturer:YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/07/06

Time: 22:42:24

Engineer Signature: Terry

Distance: 3m

Note:Report NO.:ATE20121392

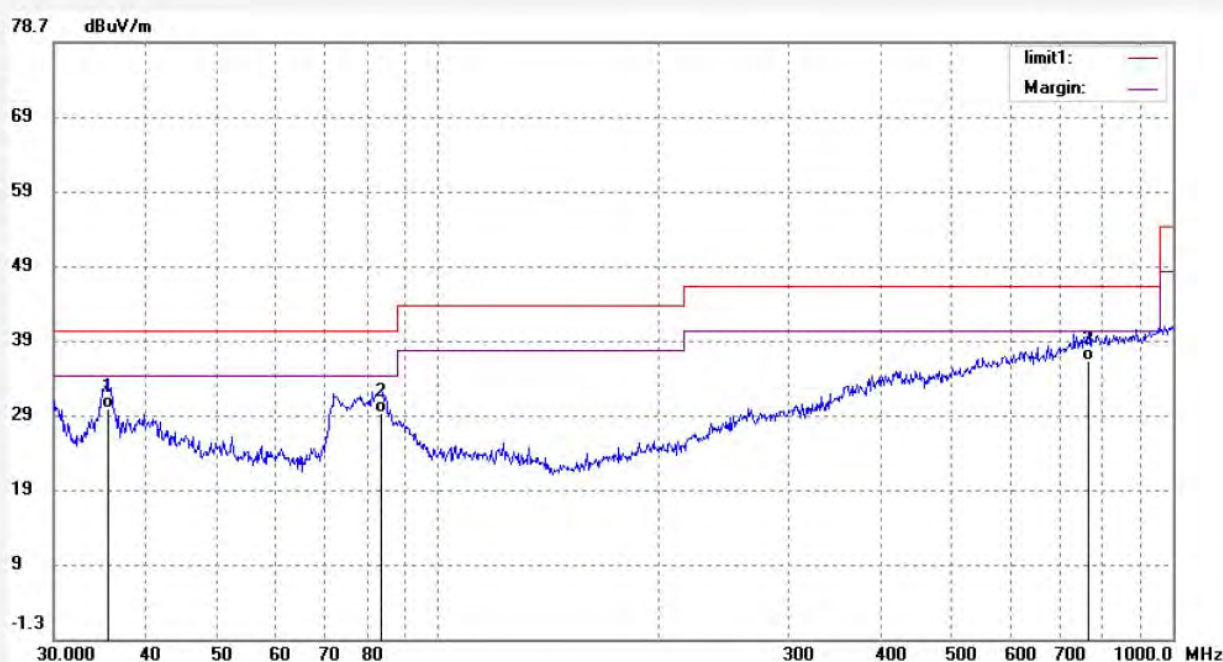

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.5112	14.12	15.57	29.69	40.00	-10.31	QP			
2	83.6937	15.72	13.27	28.99	40.00	-11.01	QP			
3	771.0475	8.15	27.85	36.00	46.00	-10.00	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #1863

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 6(802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 9/32/54

Engineer Signature:Terry

Distance: 3m

Note: Report NO.:ATE20121392

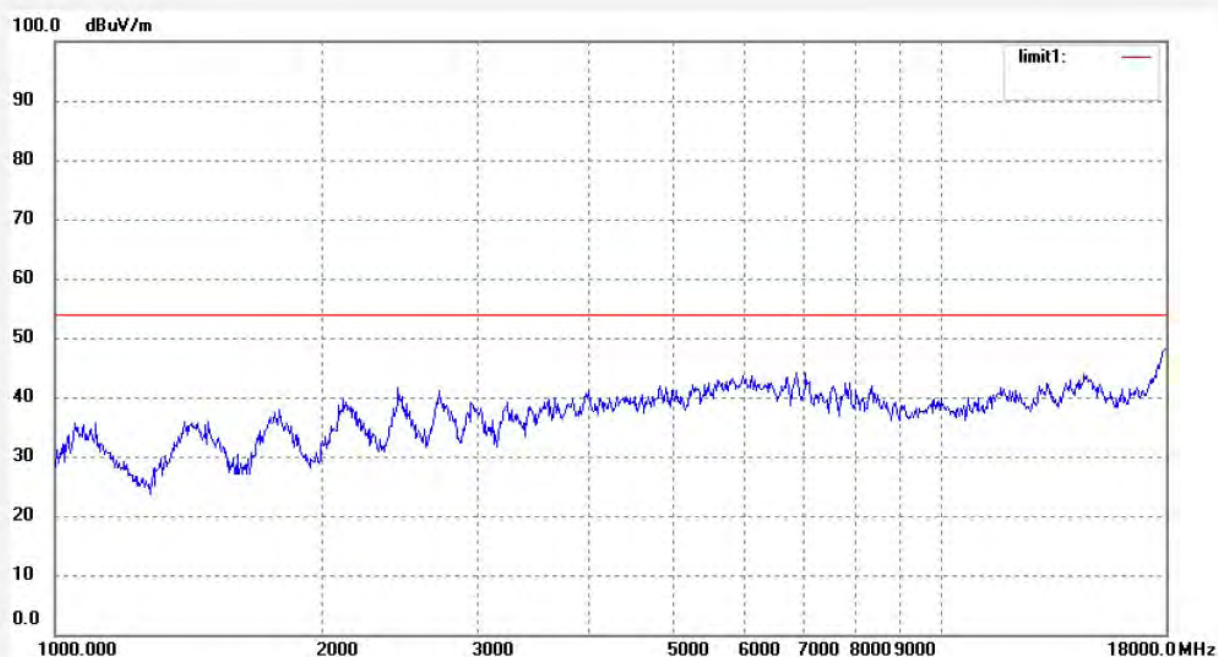

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #1862

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 6(802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 9/28/51

Engineer Signature:Terry

Distance: 3m

Note: Report NO.:ATE20121392

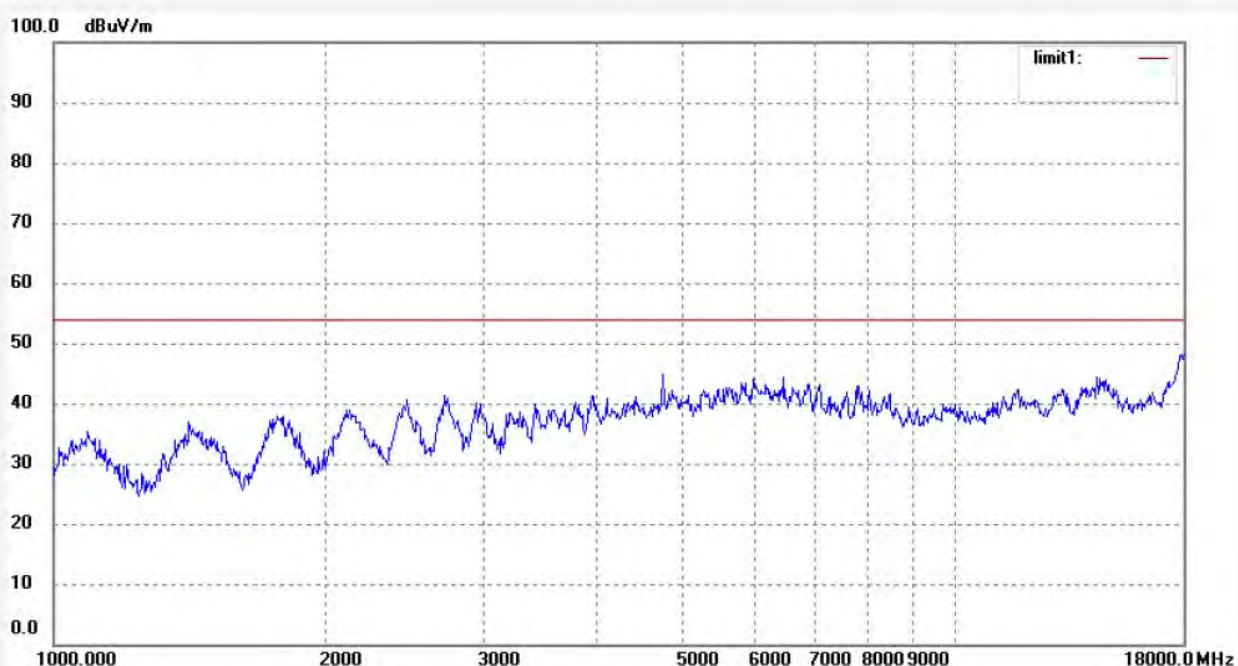

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #1616

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: TX Channel 6 (802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/07/05

Time: 11:05:58

Engineer Signature: Bob

Distance:

Note: Report NO.:ATE20121392

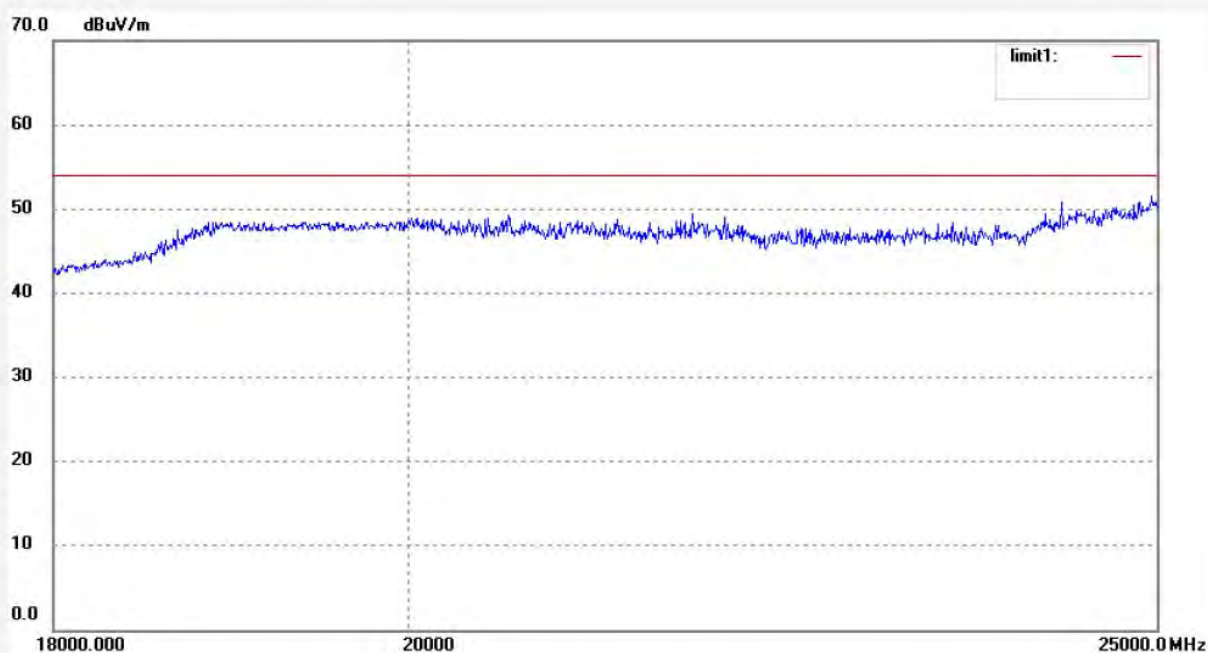

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #1615

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: TX Channel 6 (802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/07/05

Time: 11:02:36

Engineer Signature: Terry

Distance:

Note: Report NO.:ATE20121392

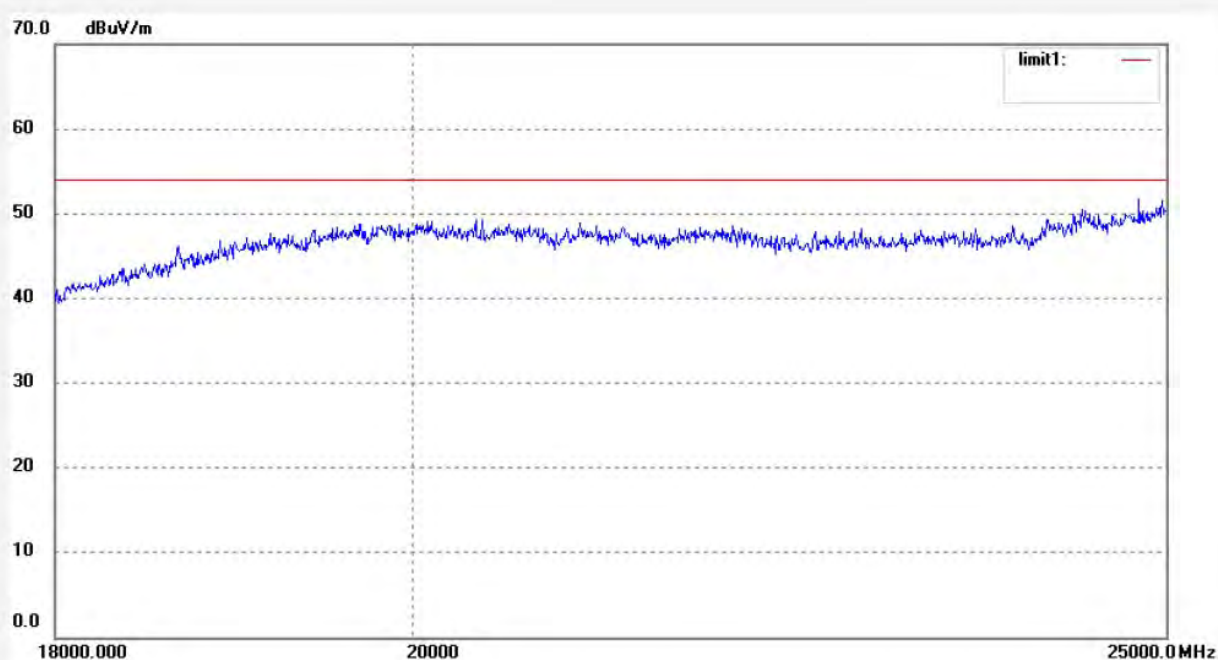

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DAZA #84

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: channel 11(802.11n)

Model: ME12-7001

Manufacturer:YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/07/06

Time: 22:54:08

Engineer Signature: Terry

Distance: 3m

Note:Report NO.:ATE20121392

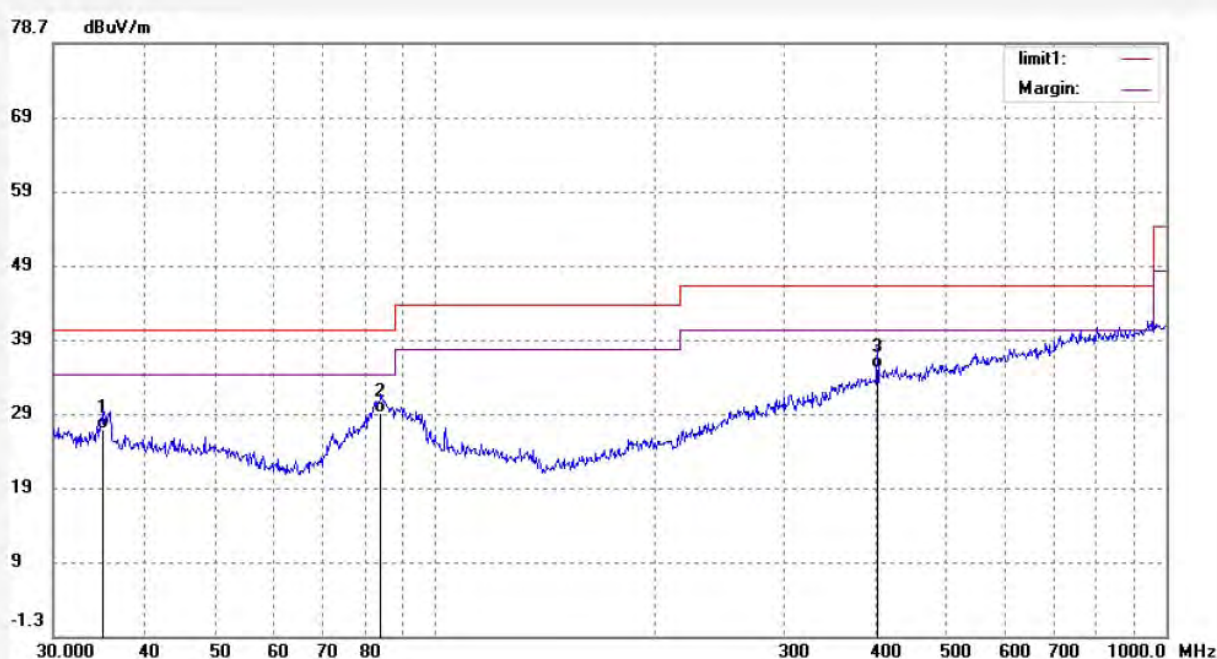

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.2626	11.02	15.63	26.65	40.00	-13.35	QP			
2	84.5806	15.27	13.46	28.73	40.00	-11.27	QP			
3	402.5168	12.45	22.39	34.84	46.00	-11.16	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DAZA #83
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: Tablet Pad
Mode: channel 11(802.11n)
Model: ME12-7001
Manufacturer:YuanFeng

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2012/07/06
Time: 22:51:18
Engineer Signature: Terry
Distance: 3m

Note:Report NO.:ATE20121392

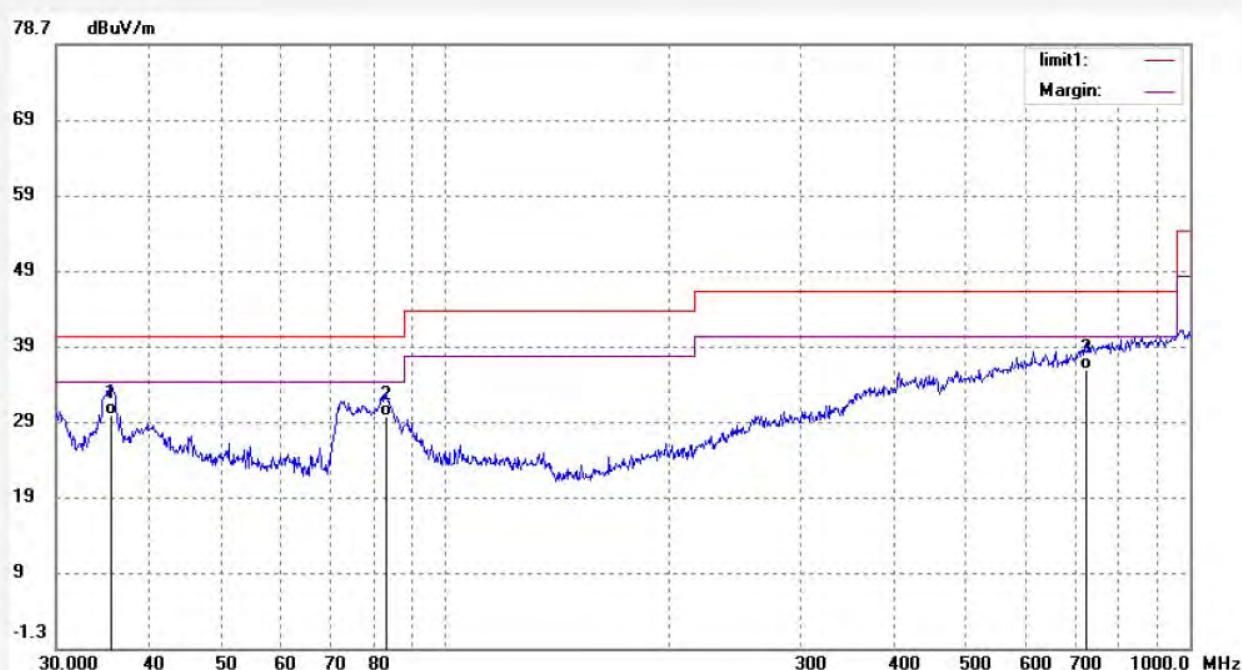

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.5112	14.12	15.57	29.69	40.00	-10.31	QP			
2	83.4002	16.25	13.20	29.45	40.00	-10.55	QP			
3	728.8971	8.31	27.34	35.65	46.00	-10.35	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #1868

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 11(802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 9/47/34

Engineer Signature:Terry

Distance: 3m

Note: Report NO.:ATE20121392

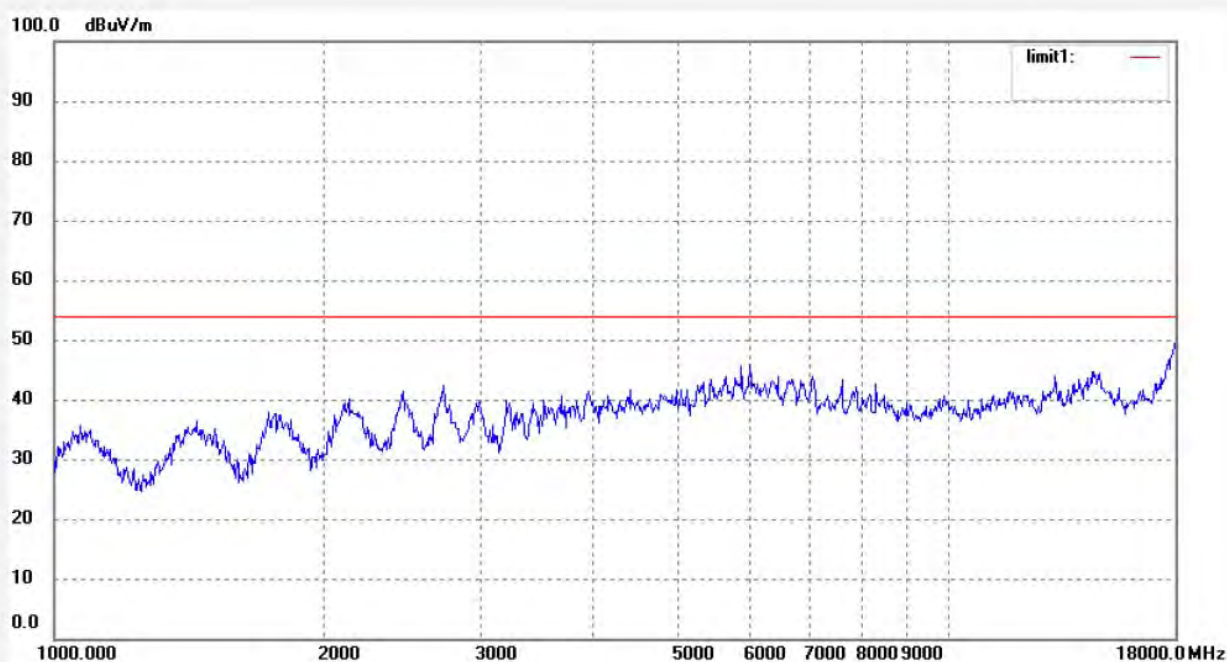

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #1869

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 11(802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 9/50/48

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20121392

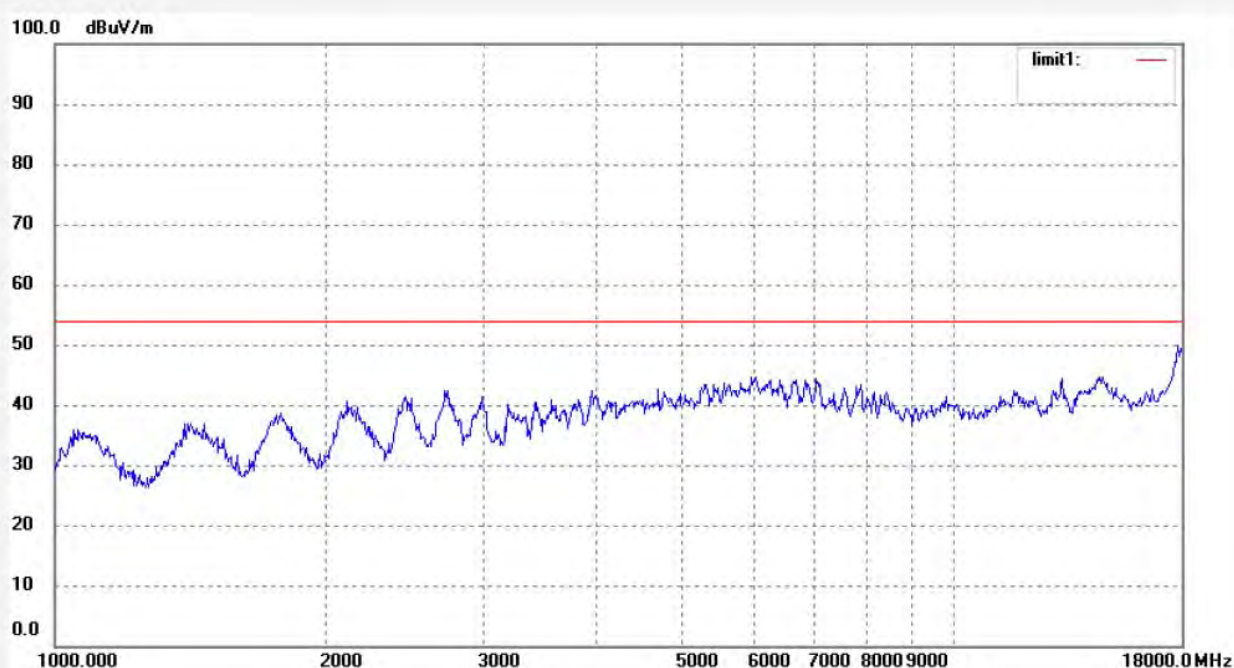

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #1613

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: TX Channel 11 (802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/07/05

Time: 10:53:17

Engineer Signature: Terry

Distance:

Note: Report NO.:ATE20121392

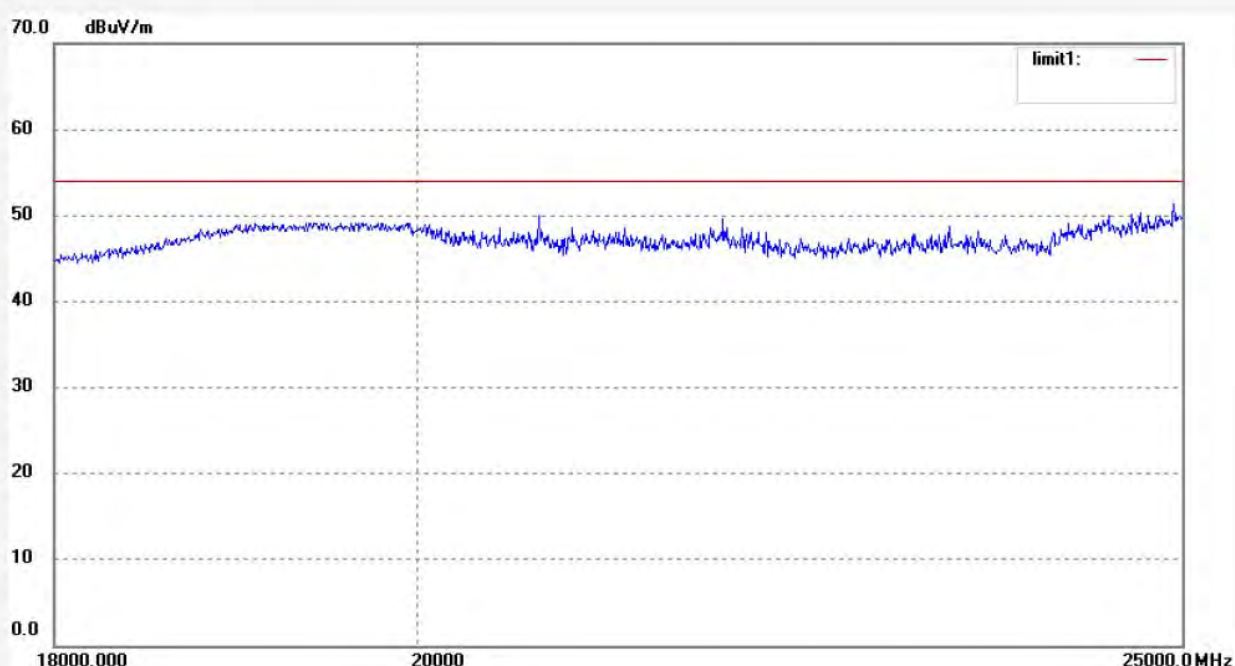

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #1614

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: TX Channel 11 (802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/07/05

Time: 10:57:05

Engineer Signature: Terry

Distance:

Note: Report NO.:ATE20121392

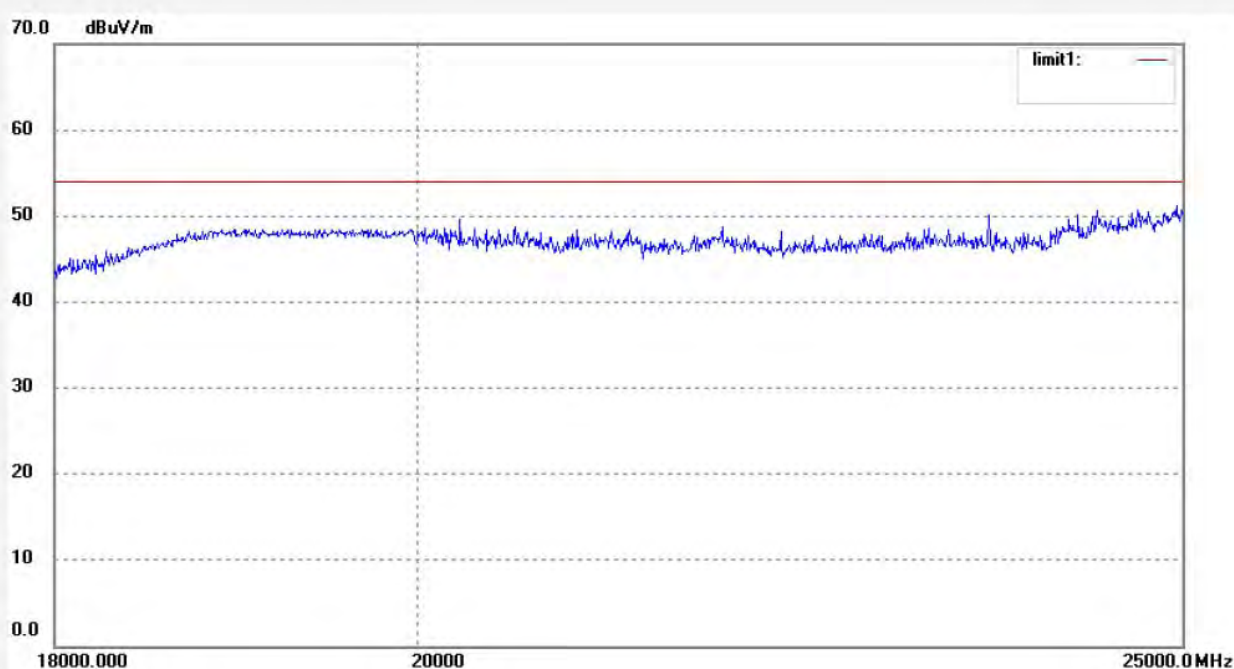

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DAZA #87

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: channel 3(802.11n)

Model: ME12-7001

Manufacturer:YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/07/06

Time: 22:58:07

Engineer Signature: Terry

Distance: 3m

Note:Report NO.:ATE20121392

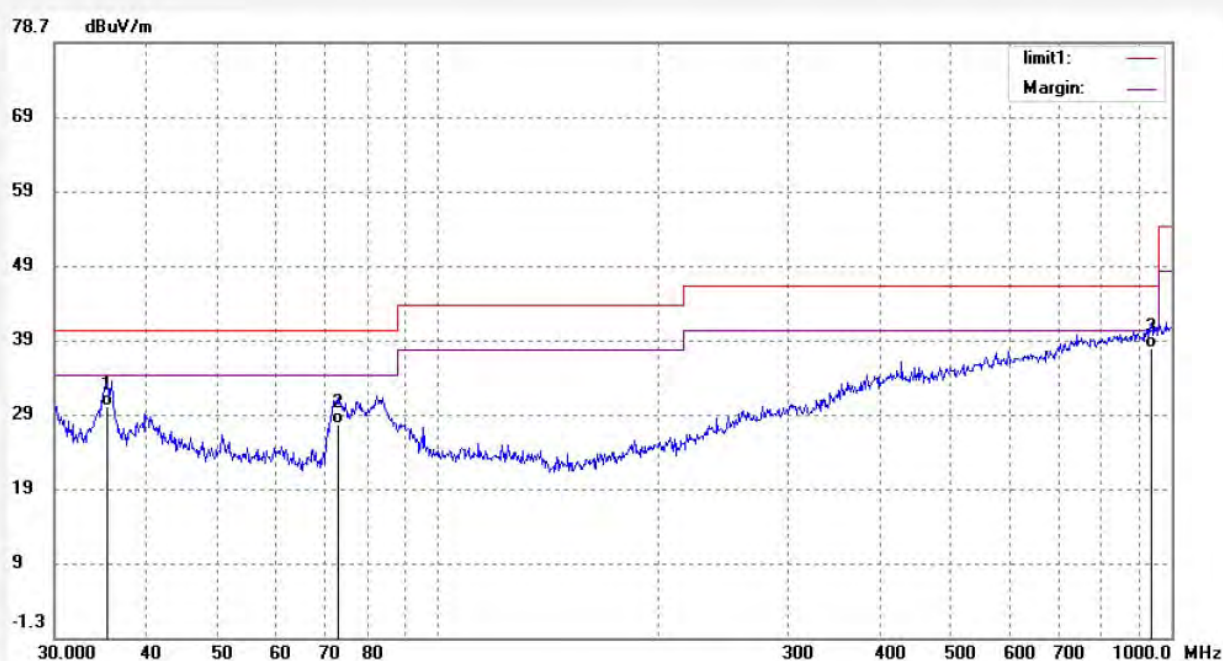

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.3867	14.23	15.60	29.83	40.00	-10.17	QP			
2	72.9763	16.41	11.08	27.49	40.00	-12.51	QP			
3	935.4214	8.42	29.26	37.68	46.00	-8.32	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DAZA #89

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: channel 3(802.11n)

Model: ME12-7001

Manufacturer:YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/07/06

Time: 23:03:01

Engineer Signature: Terry

Distance: 3m

Note:Report NO.:ATE20121392

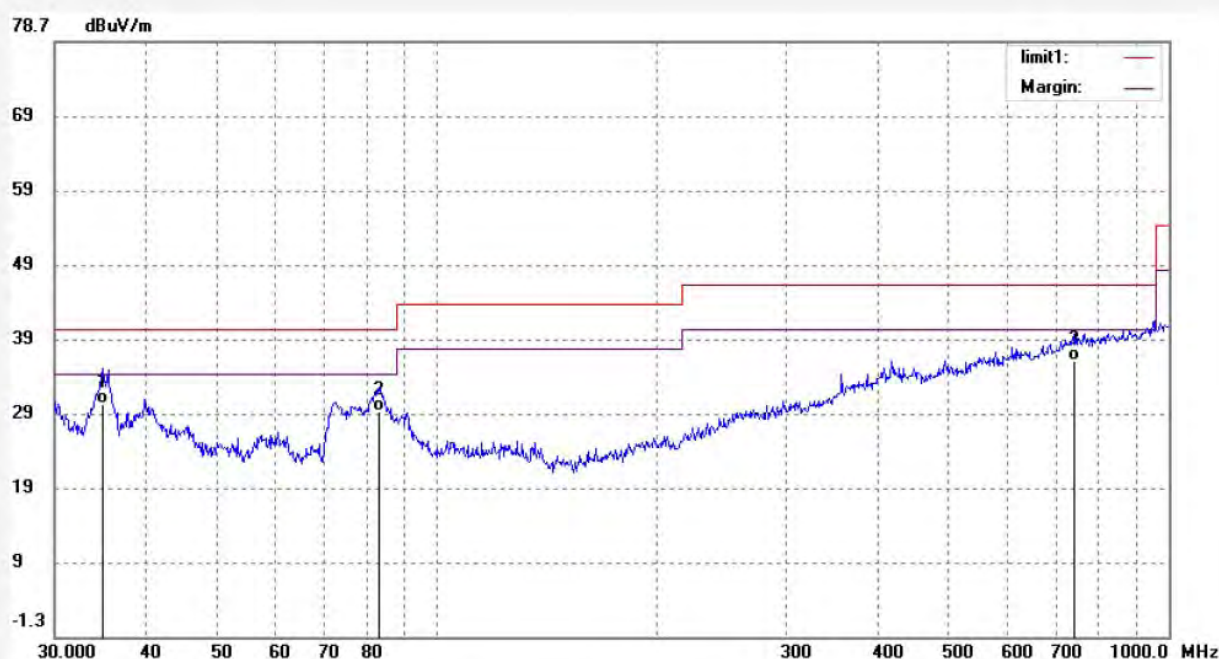

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.7705	14.32	15.72	30.04	40.00	-9.96	QP			
2	82.8162	15.89	13.07	28.96	40.00	-11.04	QP			
3	741.8155	8.35	27.53	35.88	46.00	-10.12	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #1871

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 3(802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 9/56/18

Engineer Signature:Terry

Distance: 3m

Note: Report NO.:ATE20121392

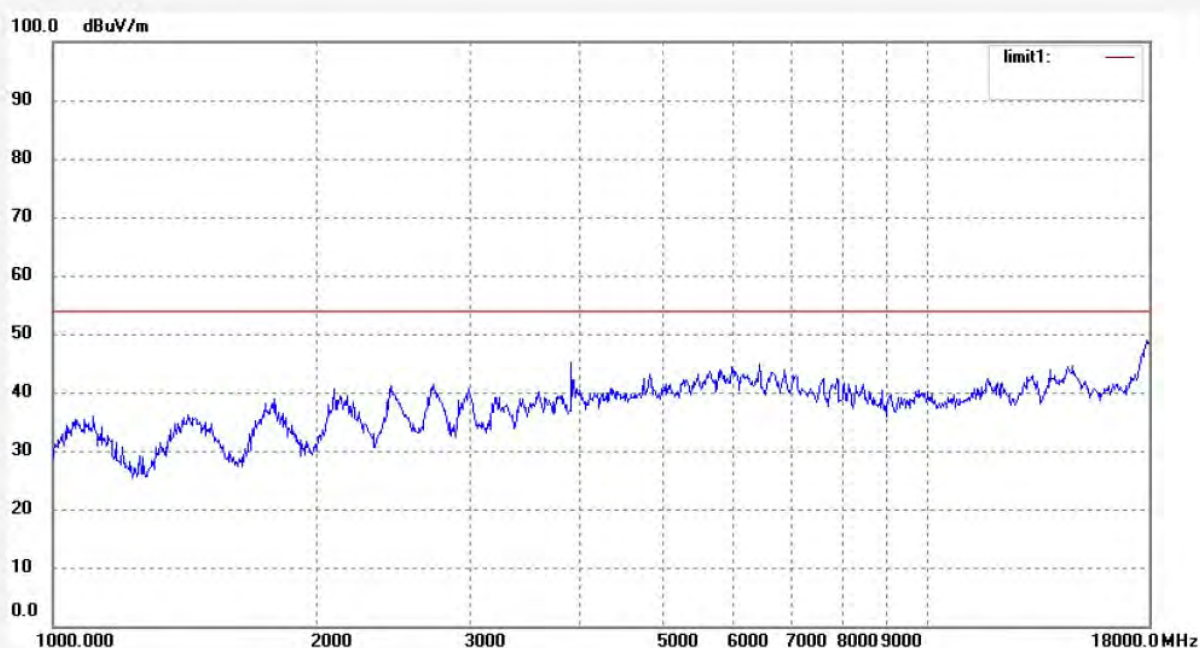

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #1870

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 3(802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 9/53/21

Engineer Signature:Terry

Distance: 3m

Note: Report NO.:ATE20121392

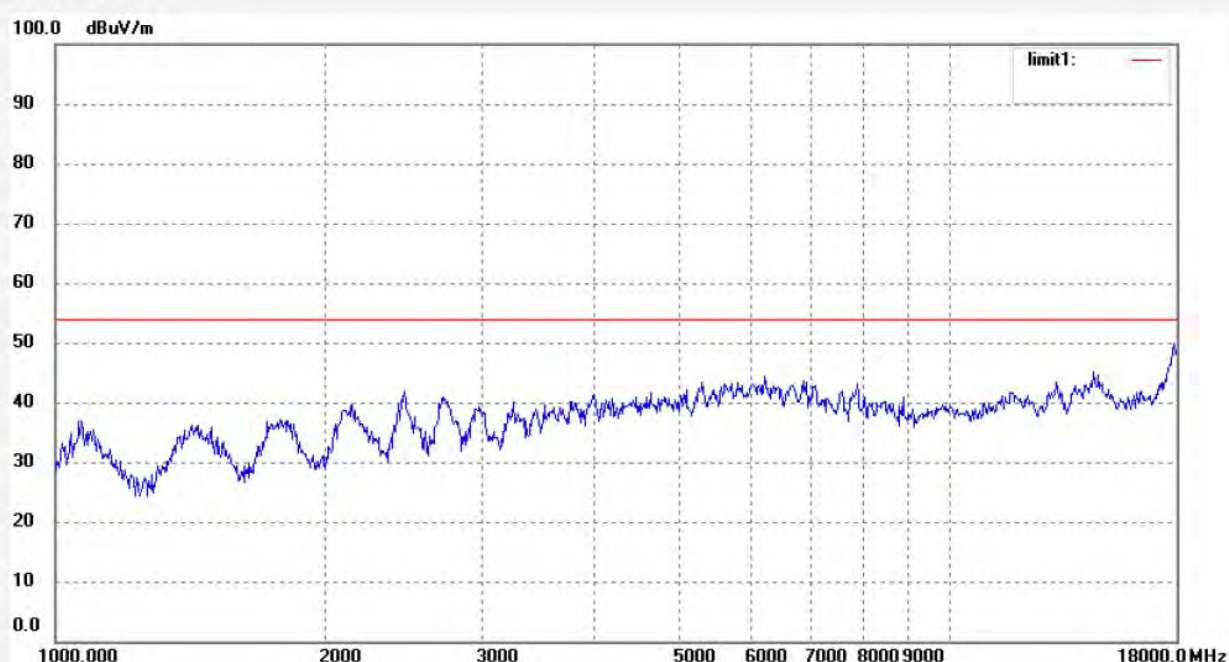

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #5916

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet Pad

Mode: TX Channel 3 (802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/07/05

Time: 11:52:09

Engineer Signature: Terry

Distance:

Note: Report NO.:ATE20121392

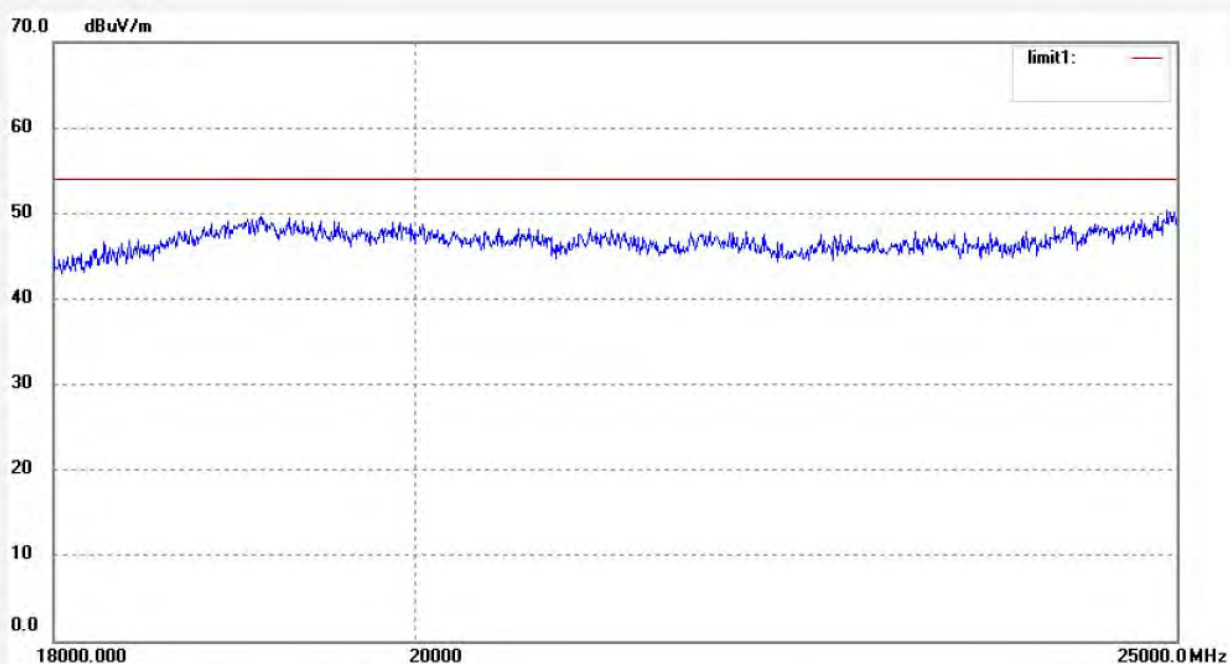

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #5917

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet Pad

Mode: TX Channel 3 (802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/07/05

Time: 11:56:43

Engineer Signature: Terry

Distance:

Note: Report NO.:ATE20121392

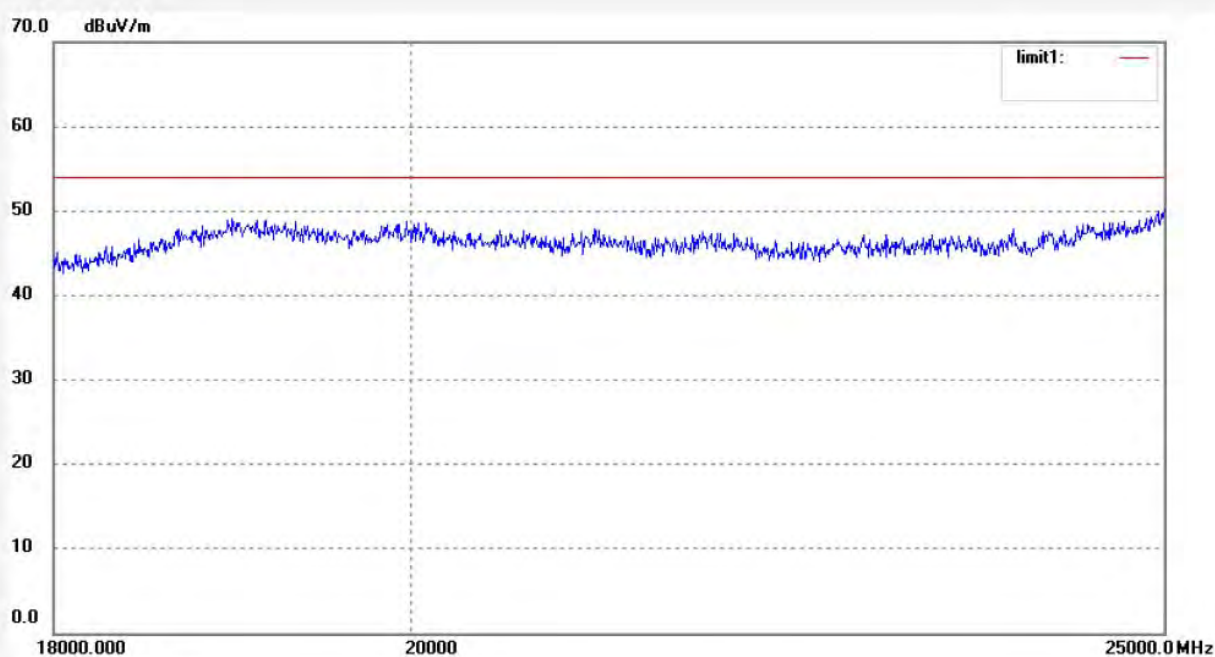

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DAZA #92

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: channel 6(802.11n)

Model: ME12-7001

Manufacturer:YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/07/06

Time: 23:10:46

Engineer Signature: Terry

Distance: 3m

Note:Report NO.:ATE20121392

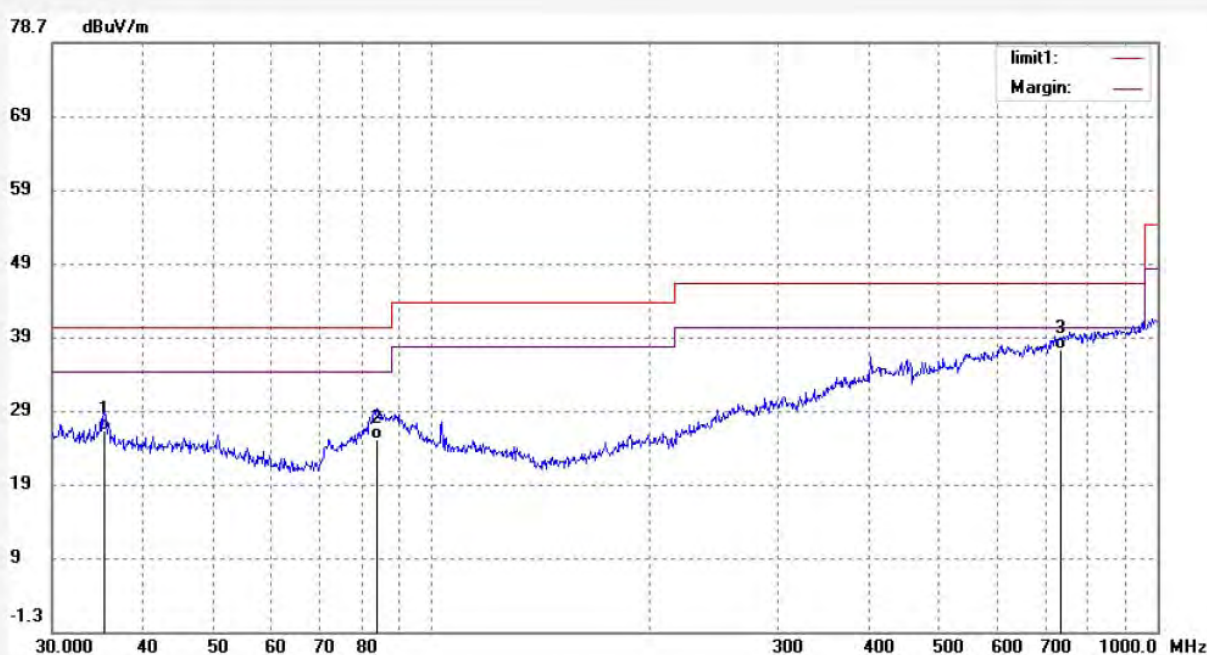

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.3867	10.35	15.60	25.95	40.00	-14.05	QP			
2	83.6937	11.54	13.27	24.81	40.00	-15.19	QP			
3	731.4627	9.65	27.38	37.03	46.00	-8.97	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DAZA #93

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: channel 6(802.11n)

Model: ME12-7001

Manufacturer:YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/07/06

Time: 23:12:46

Engineer Signature: Terry

Distance: 3m

Note:Report NO.:ATE20121392

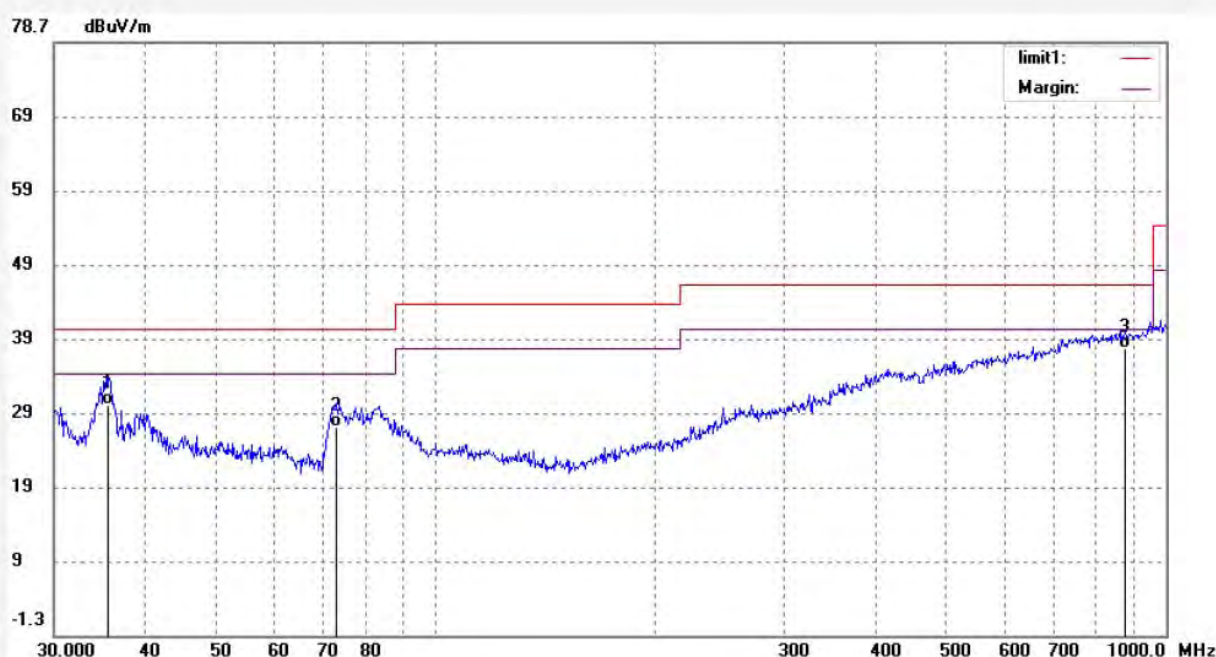

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.7617	14.36	15.51	29.87	40.00	-10.13	QP			
2	72.9763	15.65	11.08	26.73	40.00	-13.27	QP			
3	878.0931	8.75	28.70	37.45	46.00	-8.55	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #1872

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 6(802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 10/00/41

Engineer Signature:Terry

Distance: 3m

Note: Report NO.:ATE20121392

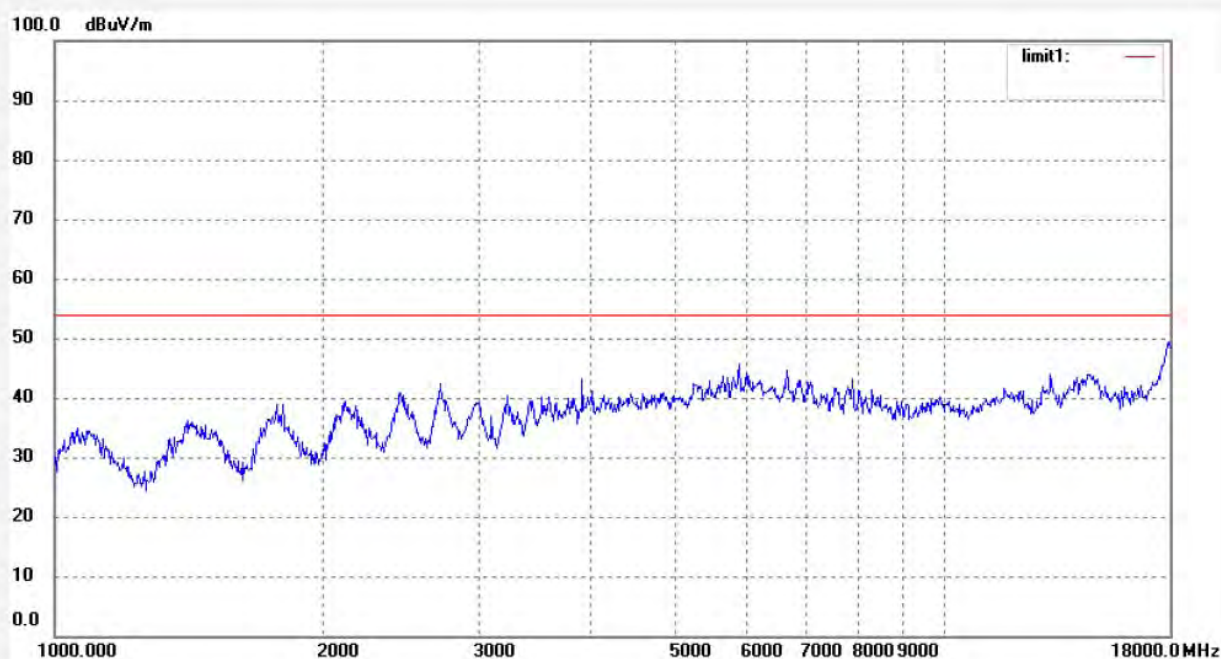

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #1873

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 6(802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 10/03/50

Engineer Signature: Terry

Distance: 3m

Note: Report NO.:ATE20121392

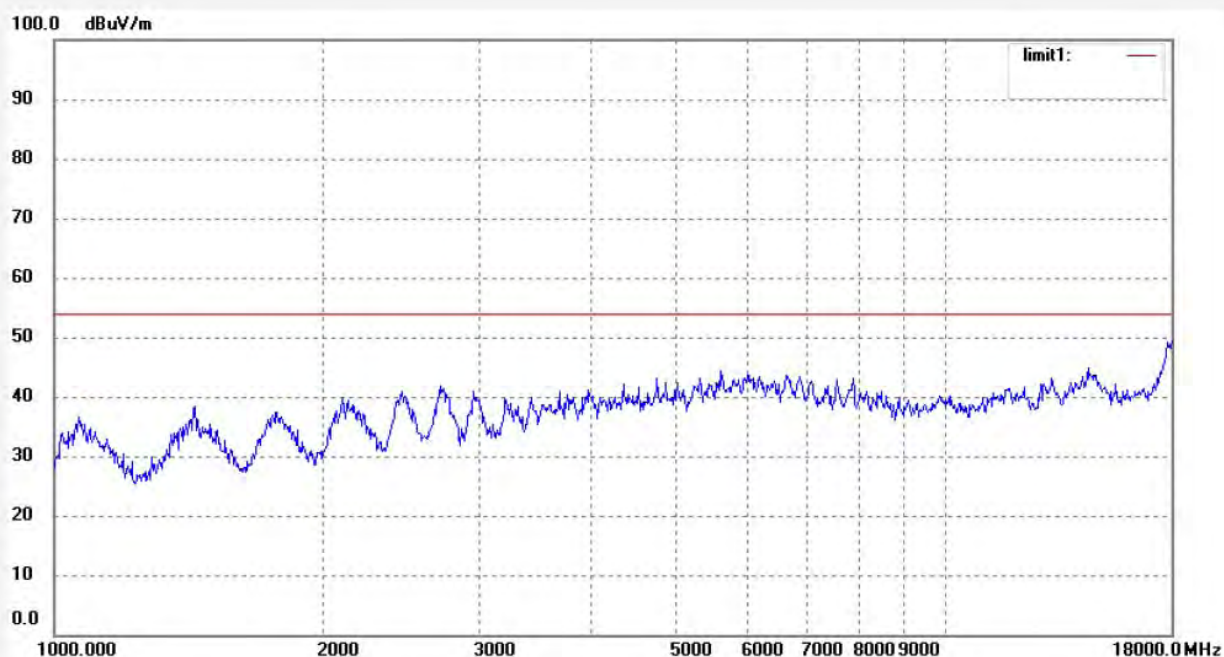

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #5919

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet Pad

Mode: TX Channel 6 (802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/07/05

Time: 12:05:30

Engineer Signature: Terry

Distance:

Note: Report NO.:ATE20121392

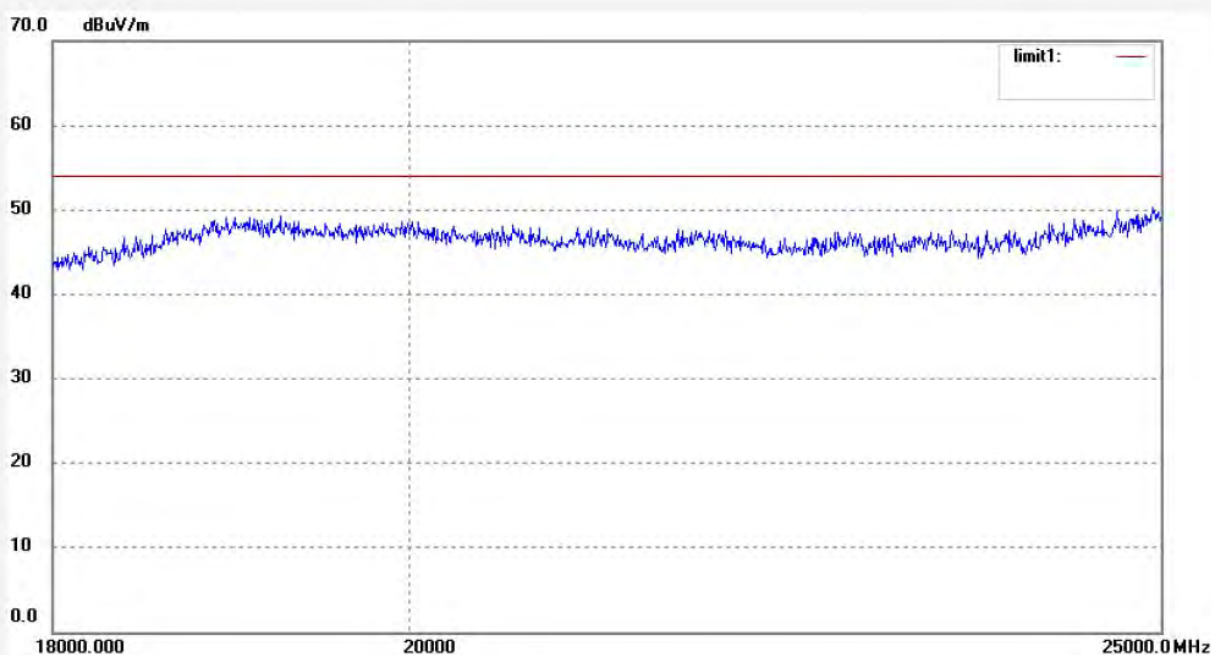

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #5918

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet Pad

Mode: TX Channel 6 (802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/07/05

Time: 12:01:19

Engineer Signature: Terry

Distance:

Note: Report NO.:ATE20121392

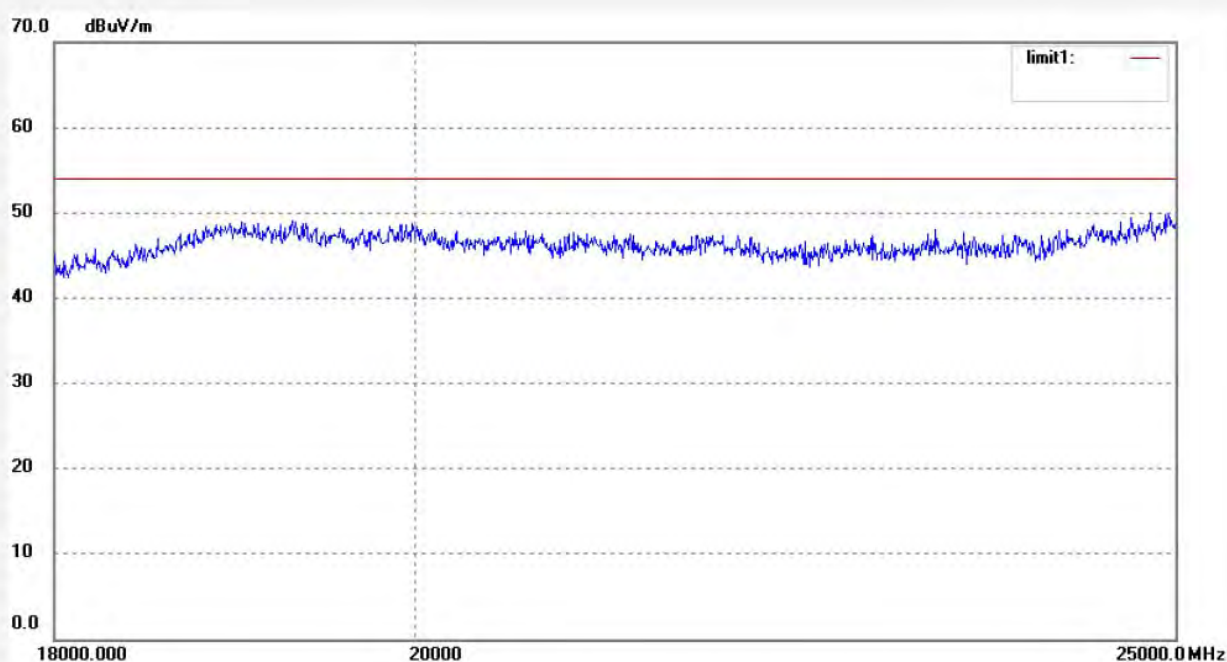

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: DAZA #95
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: Tablet Pad
Mode: channel 9(802.11n)
Model: ME12-7001
Manufacturer:YuanFeng

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2012/07/06
Time: 23:17:21
Engineer Signature: Terry
Distance: 3m

Note: Report NO.:ATE20121392

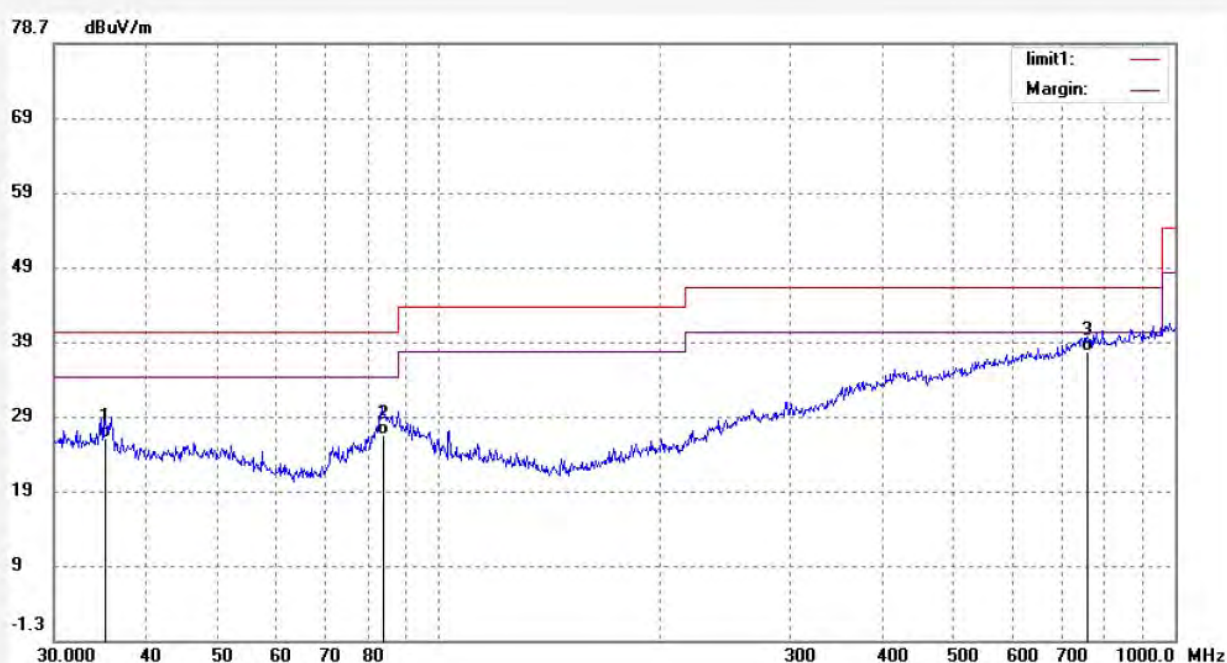

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.5112	10.21	15.57	25.78	40.00	-14.22	QP			
2	84.5806	12.65	13.46	26.11	40.00	-13.89	QP			
3	760.2867	9.58	27.79	37.37	46.00	-8.63	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: DAZA #94

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 24 C / 48 %

EUT: Tablet Pad

Mode: channel 9(802.11n)

Model: ME12-7001

Manufacturer:YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/07/06

Time: 23:14:39

Engineer Signature: Terry

Distance: 3m

Note:Report NO.:ATE20121392

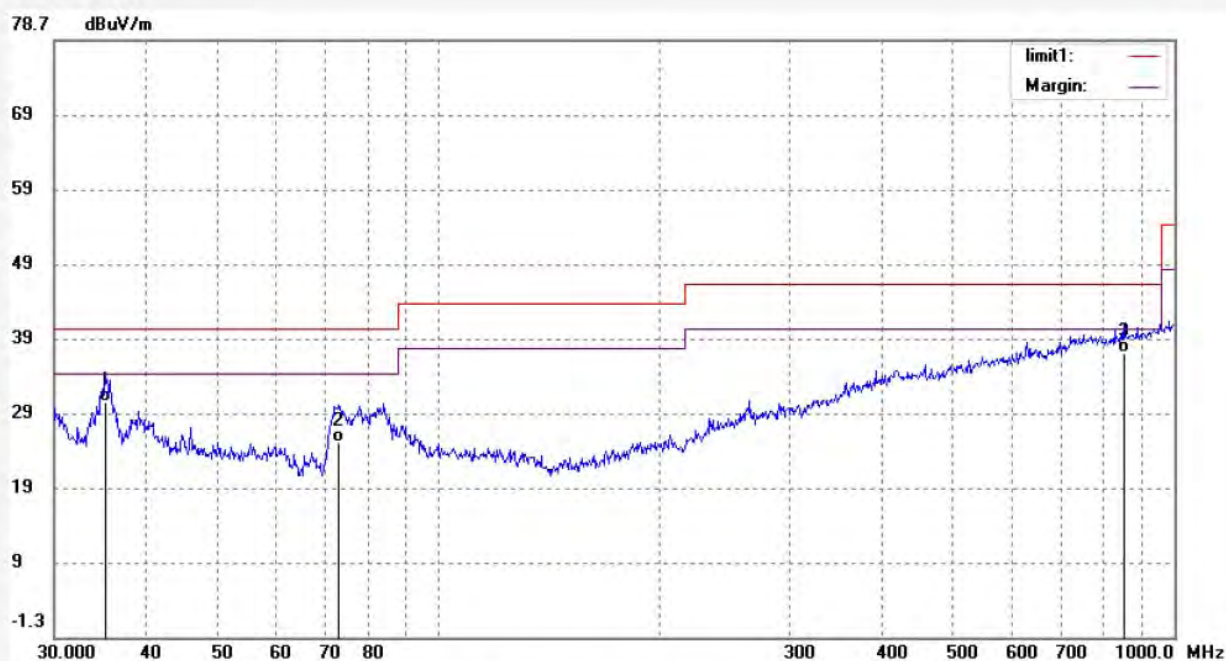

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.2626	14.56	15.63	30.19	40.00	-9.81	QP			
2	72.9763	13.78	11.08	24.86	40.00	-15.14	QP			
3	850.7603	8.47	28.36	36.83	46.00	-9.17	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #1875

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 9(802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 10/09/22

Engineer Signature:Terry

Distance: 3m

Note: Report NO.:ATE20121392

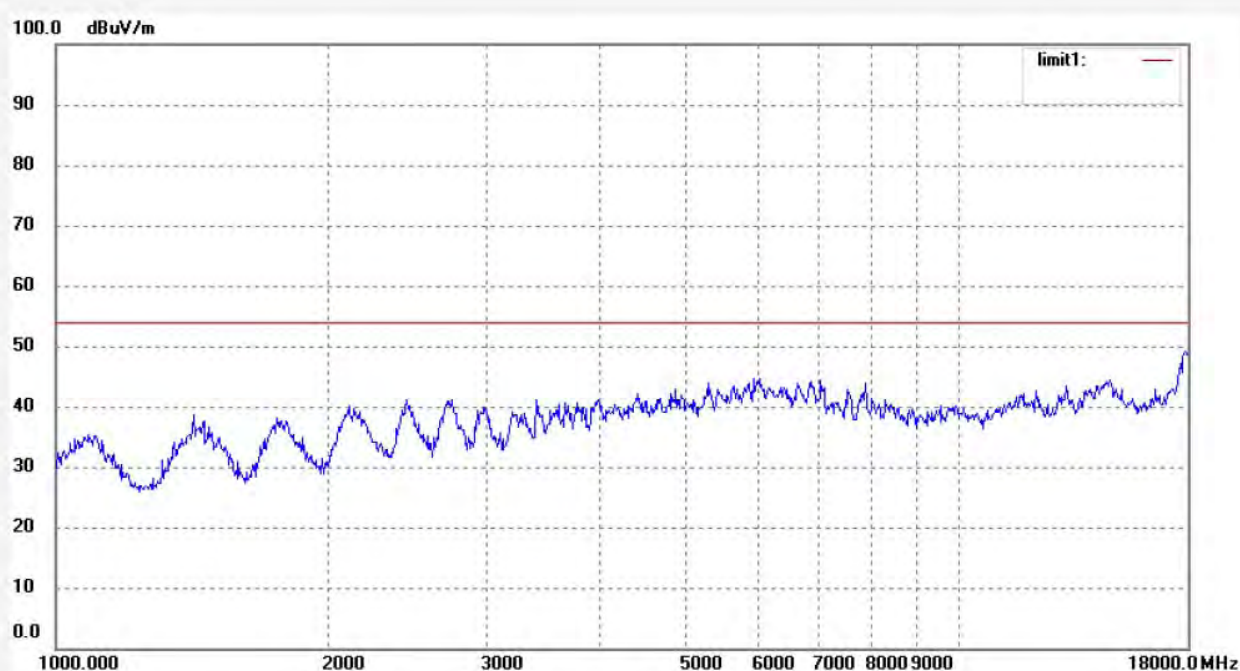

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #1874

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 51 %

EUT: Tablet Pad

Mode: TX Channel 9(802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 12/07/05/

Time: 10/06/21

Engineer Signature:Terry

Distance: 3m

Note: Report NO.:ATE20121392

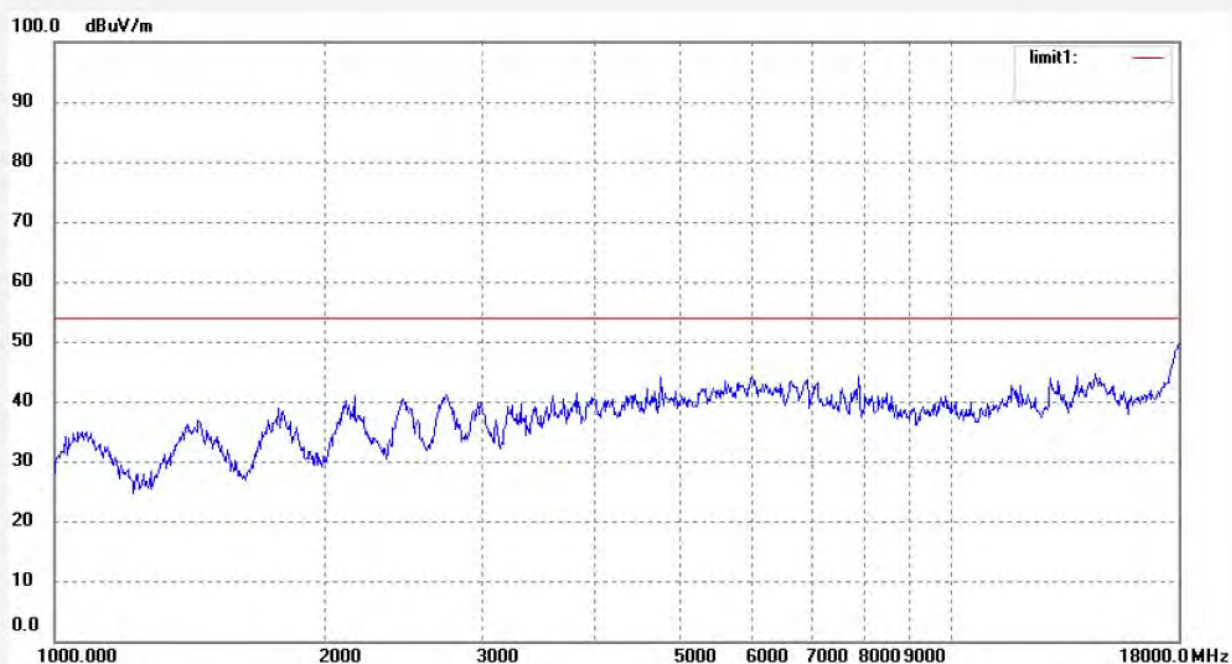

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: T #5920

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet Pad

Mode: TX Channel 9 (802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2012/07/05

Time: 12:10:41

Engineer Signature: Terry

Distance:

Note: Report NO.:ATE20121392

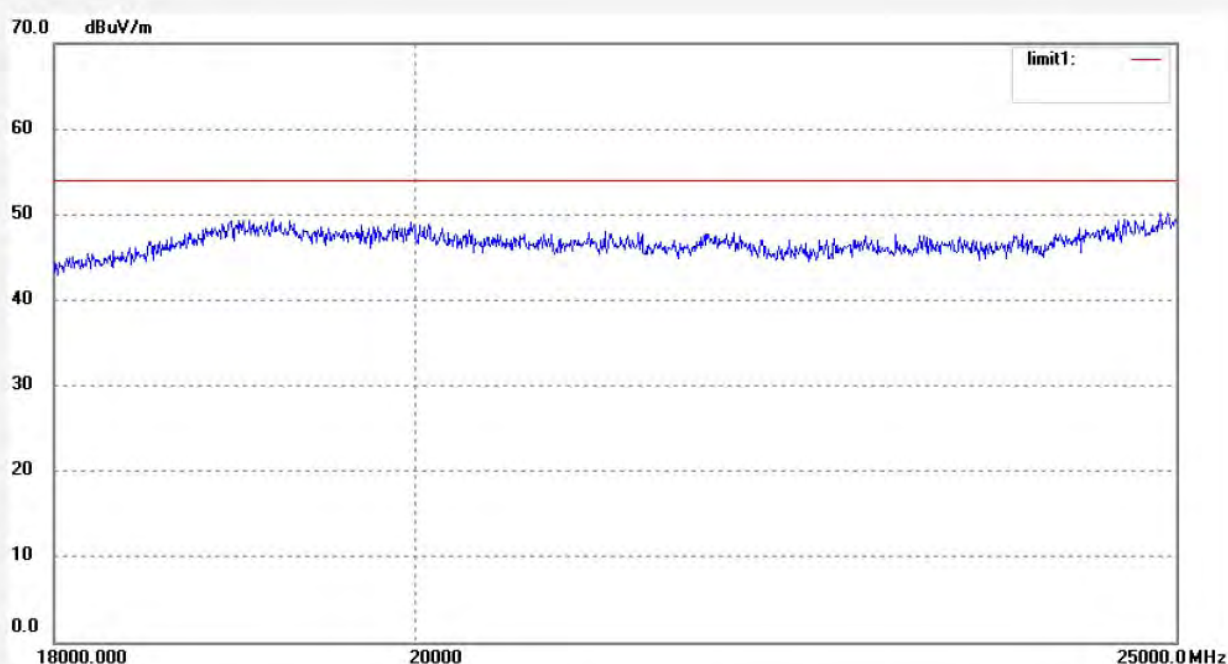

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: T #5921

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: Tablet Pad

Mode: TX Channel 9 (802.11n)

Model: ME12-7001

Manufacturer: YuanFeng

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2012/07/05

Time: 12:15:08

Engineer Signature: Terry

Distance:


Note: Report NO.:ATE20121392

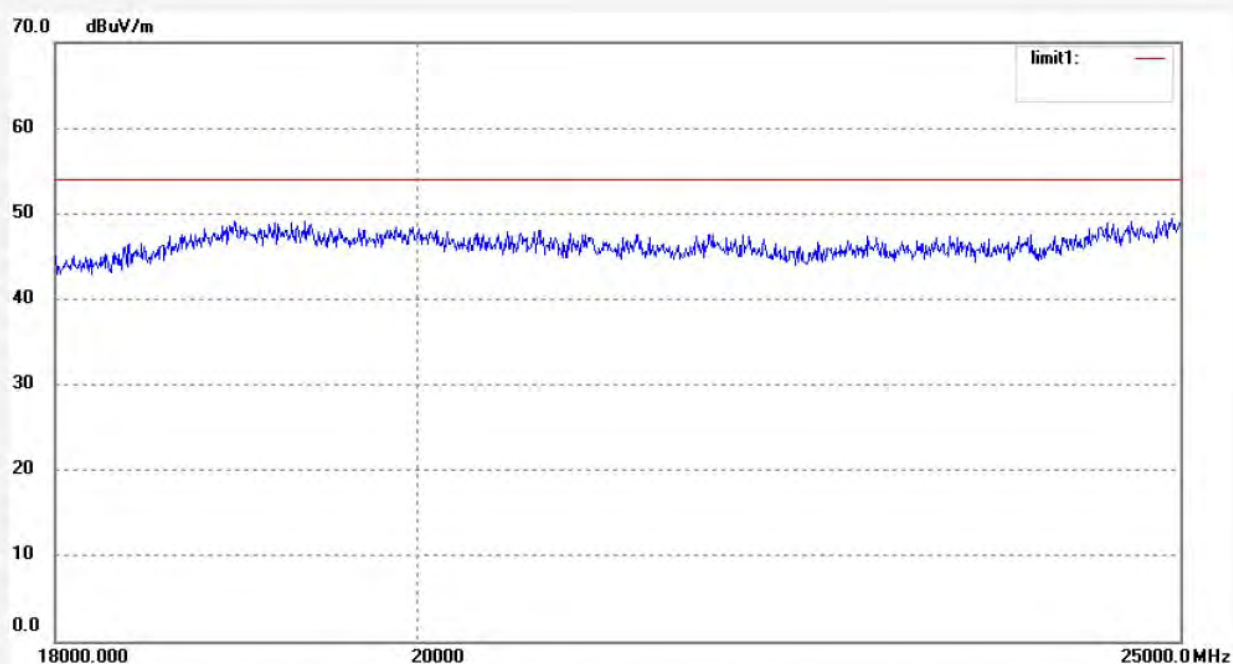

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

10.CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

10.1.Block Diagram of Test Setup



(EUT: Tablet Pad)

10.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.EUT Configuration on Measurement

The following equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.3.1.Tablet Pad (EUT)

Model Number	:	ME12-7001
Serial Number	:	N/A
Manufacturer	:	Dongguan Yuanfeng Technology Co., Ltd

10.4.Operating Condition of EUT

10.4.1.Setup the EUT and simulator as shown as Section 10.1.

10.4.2.Turn on the power of all equipment.

10.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462 and 2422-2452MHz. We select 2412MHz, 2437MHz, 2462MHz and 2422MHz, 2437MHz, 2452MHz TX frequency to transmit.

10.5.Test Procedure

10.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

10.5.2.Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz (below 1GHz).

Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz (above 1GHz).


10.5.3.The Conducted Spurious Emission was measured and recorded.

10.6.Test Result


Pass.

The spectrum analyzer plots are attached as below.


TX 802.11b Channel Low 2412MHz (30MHz-1GHz)

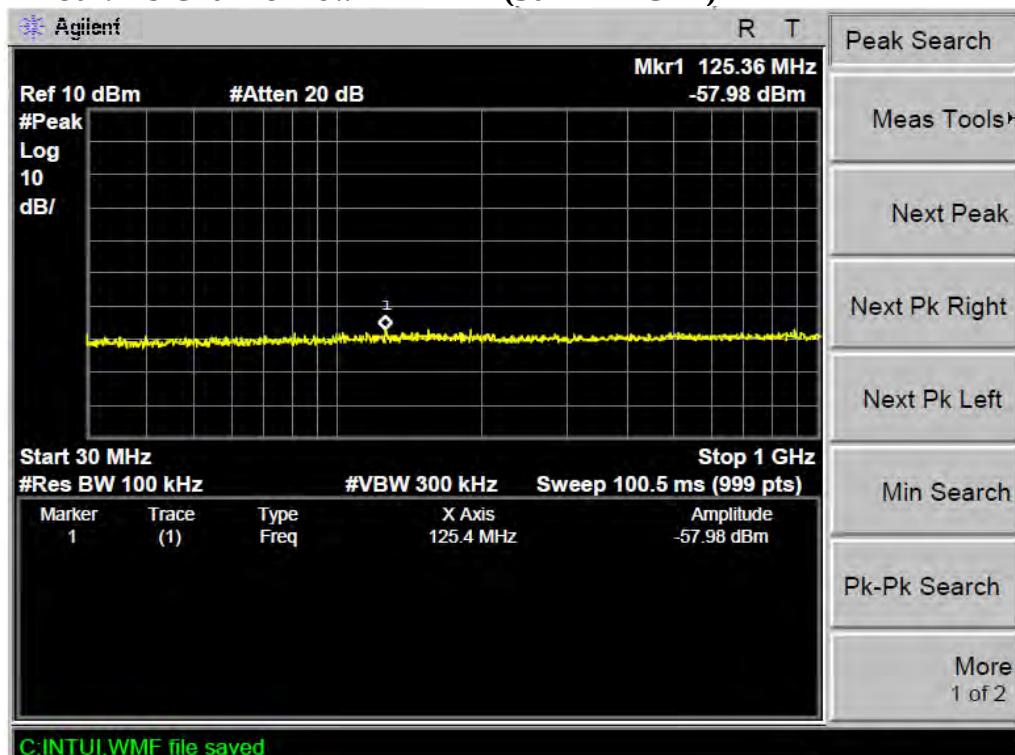


TX 802.11b Channel Low 2412MHz (1GHz-25GHz)

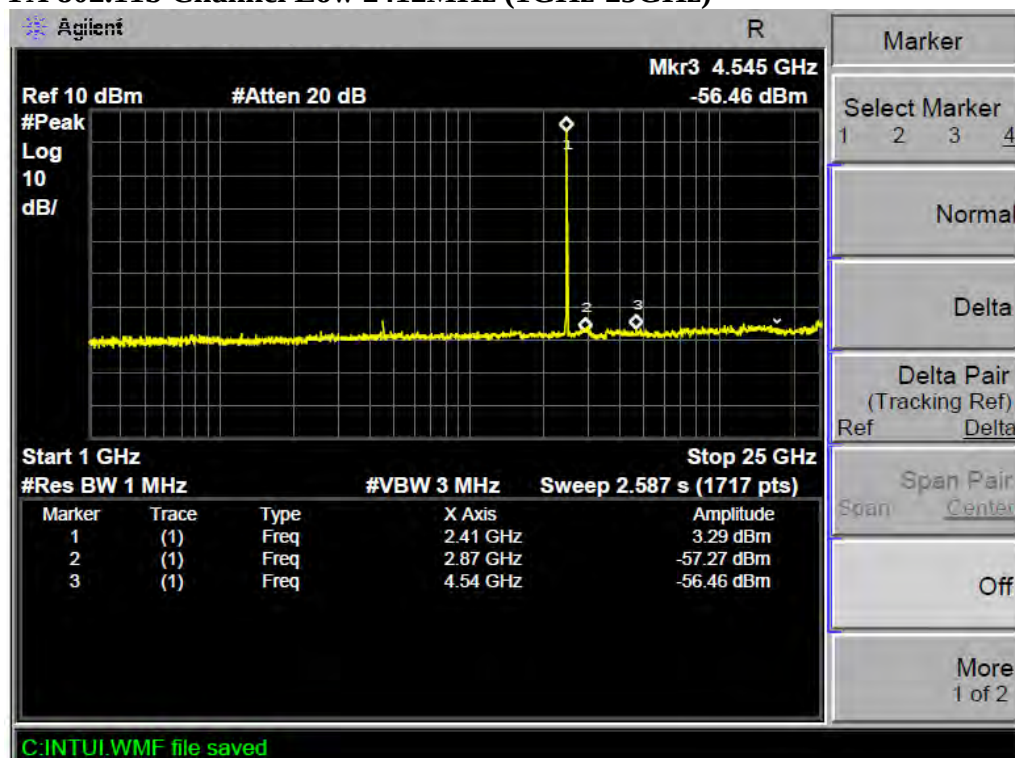


TX 802.11b Channel Middle 2437MHz (30MHz-1GHz)

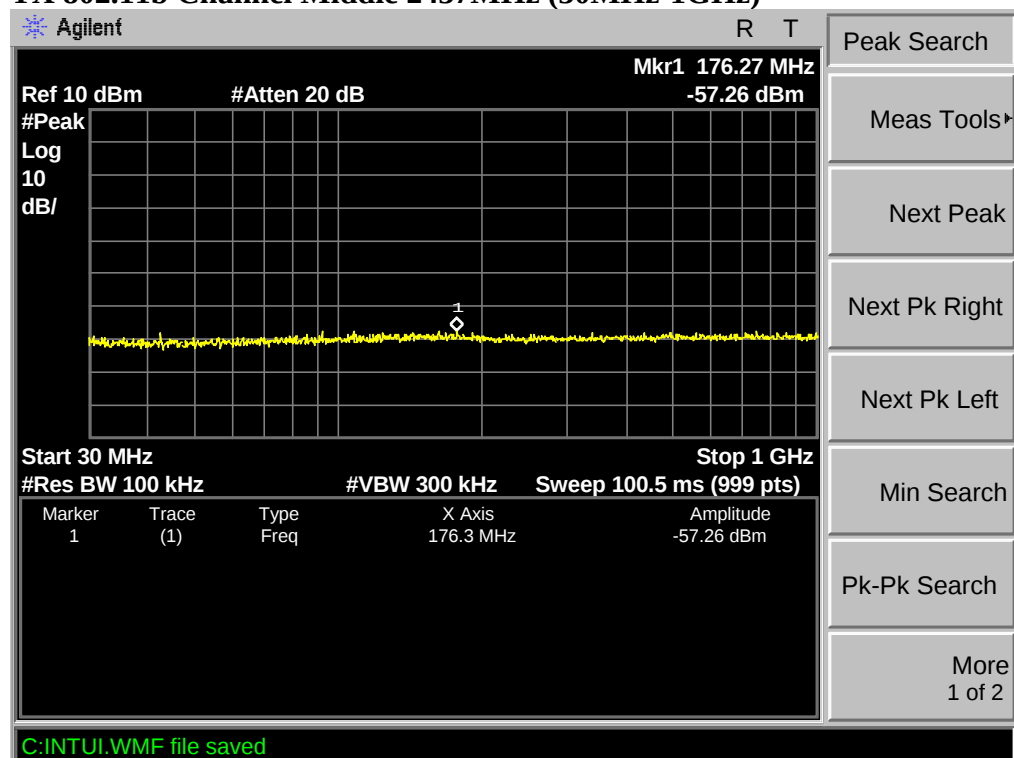


TX 802.11b Channel Middle 2437MHz (1GHz-25GHz)

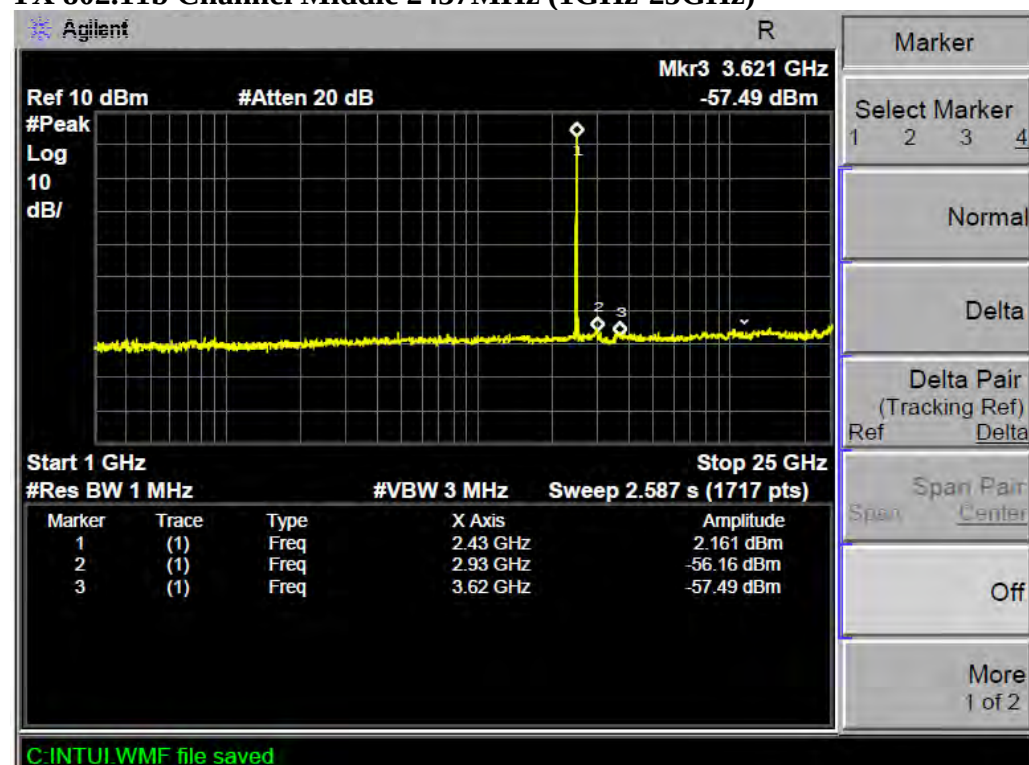


TX 802.11b Channel High 2462MHz (30MHz-1GHz)

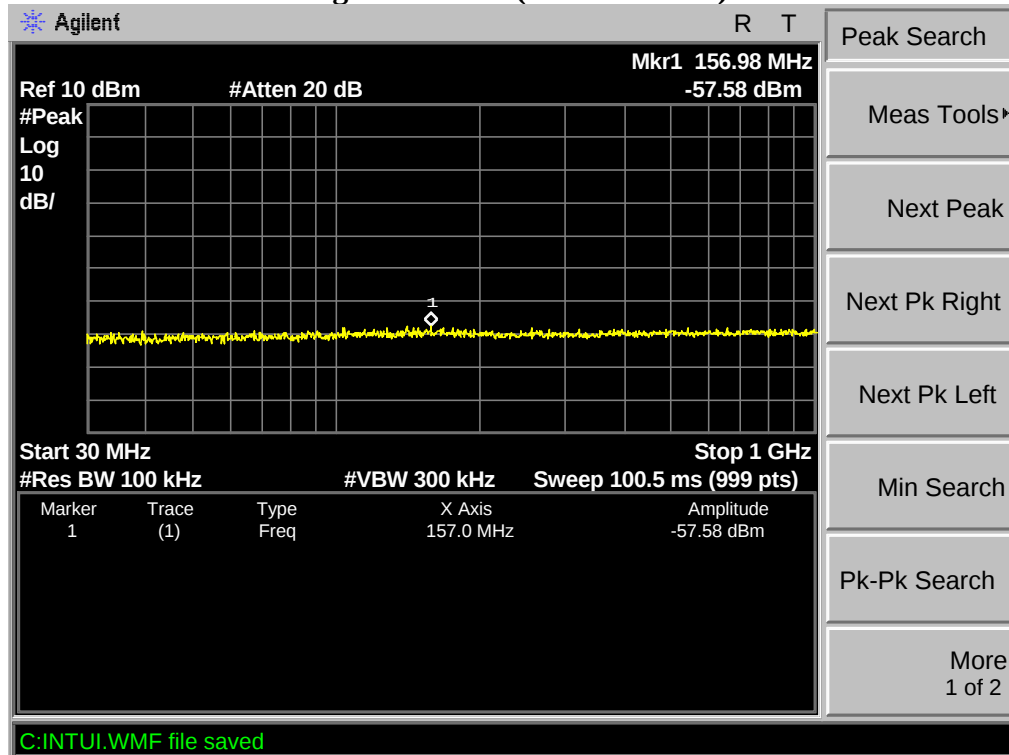


TX 802.11b Channel High 2462MHz (1GHz-25GHz)

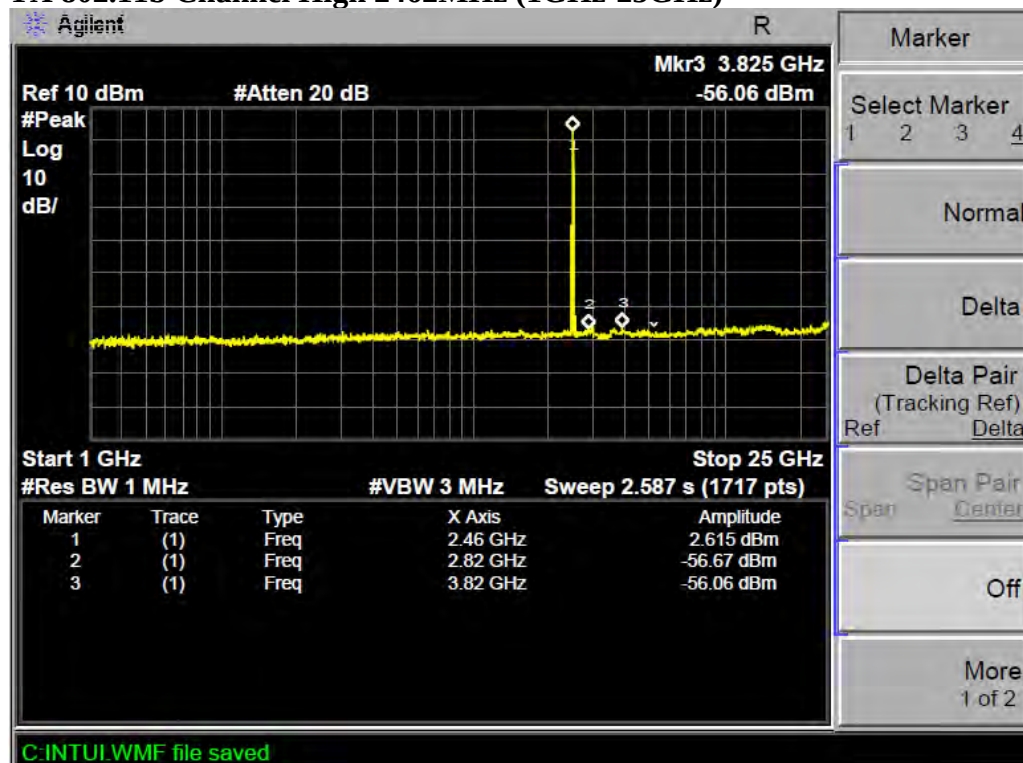


TX 802.11g Channel Low 2412MHz (30MHz-1GHz)

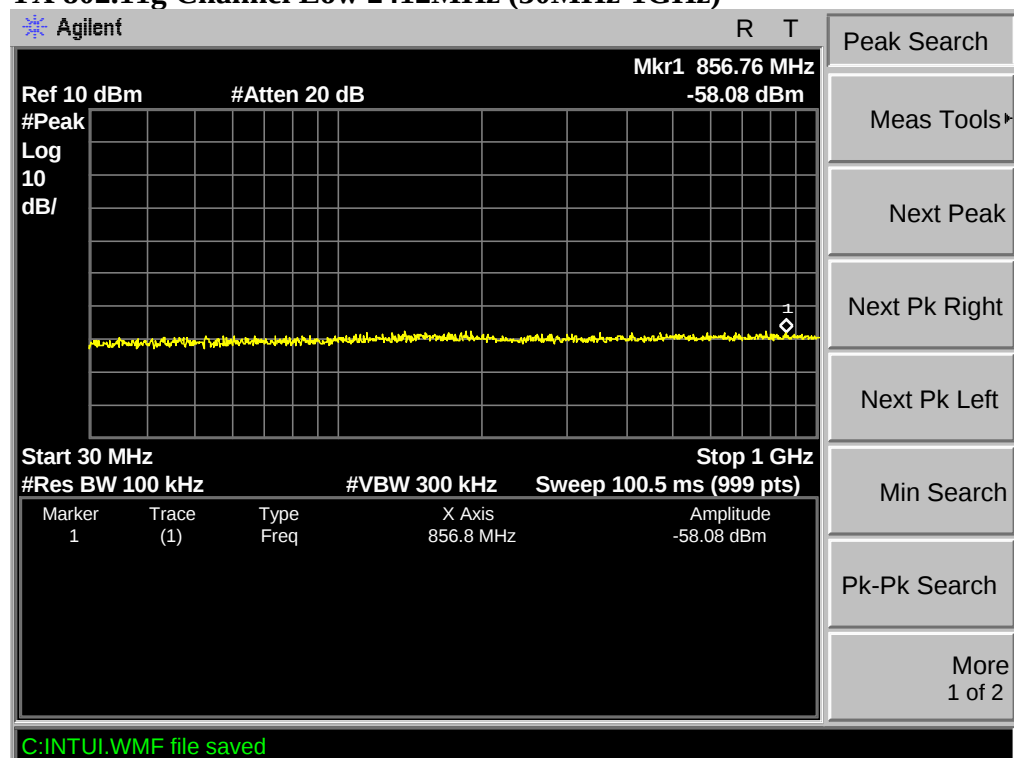


TX 802.11g Channel Low 2412MHz (1GHz-25GHz)

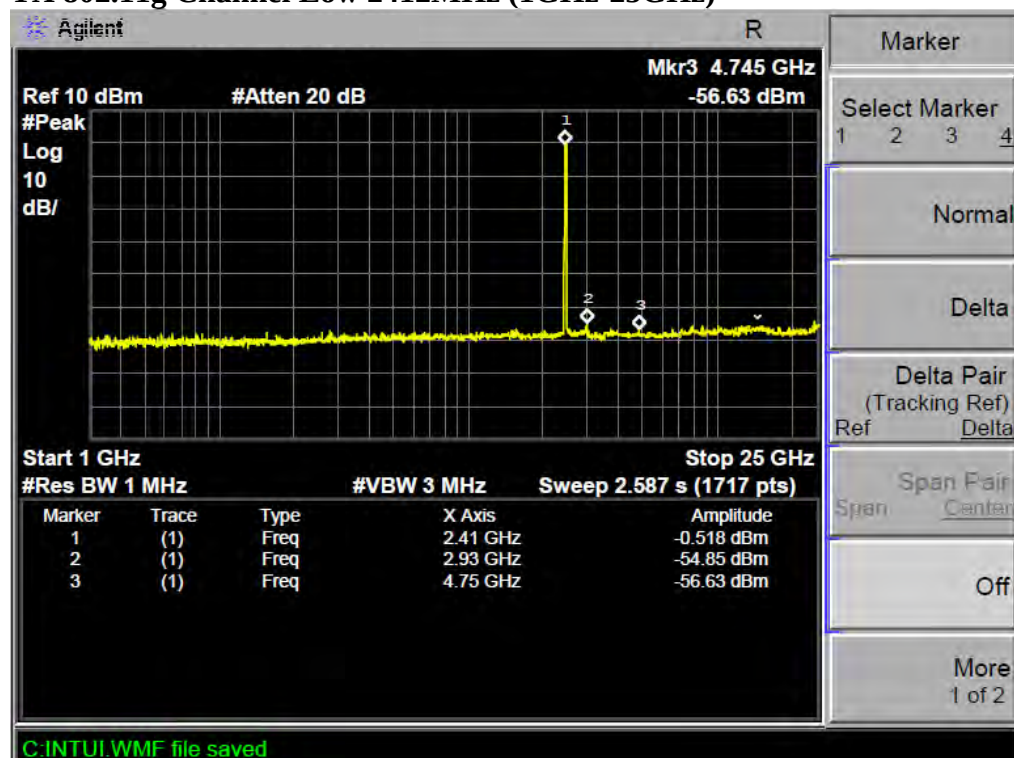


TX 802.11g Channel Middle 2437MHz (30MHz-1GHz)

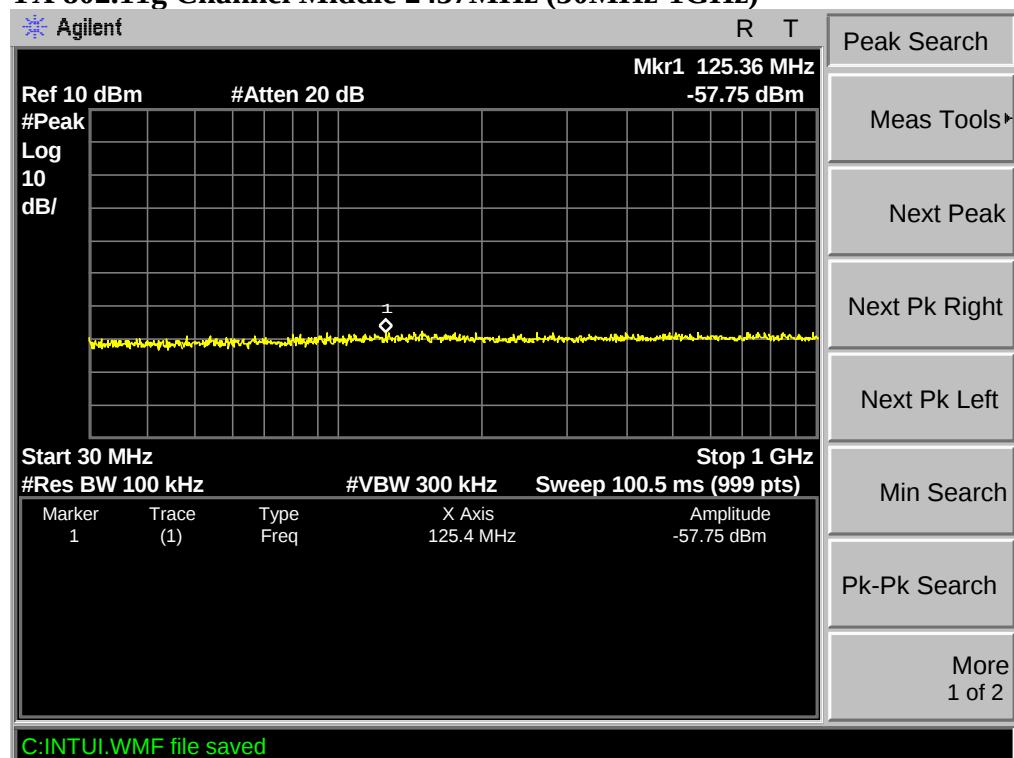


TX 802.11g Channel Middle 2437MHz

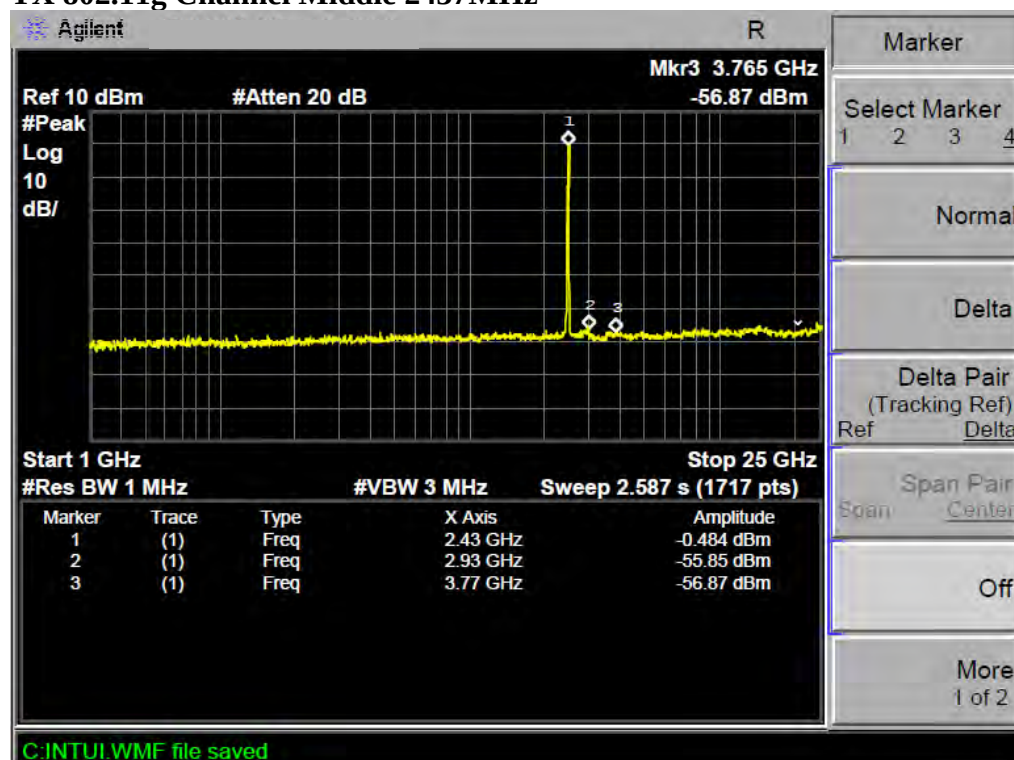


TX 802.11g Channel High 2462MHz (30MHz-1GHz)

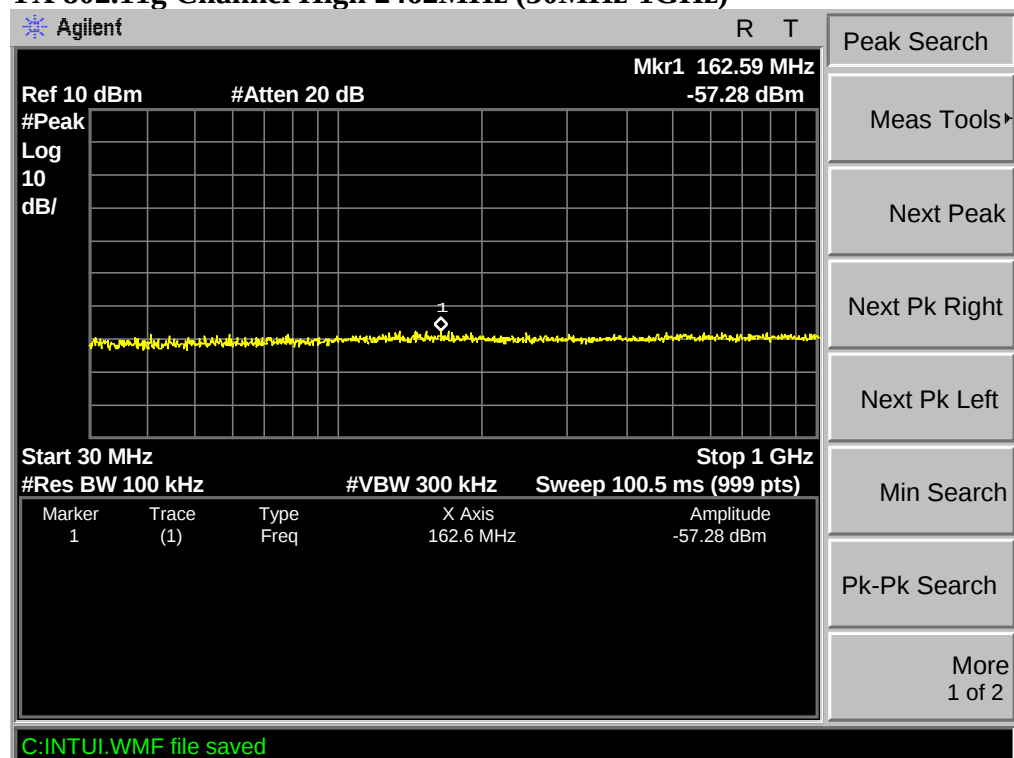


TX 802.11g Channel High 2462MHz (1GHz-25GHz)

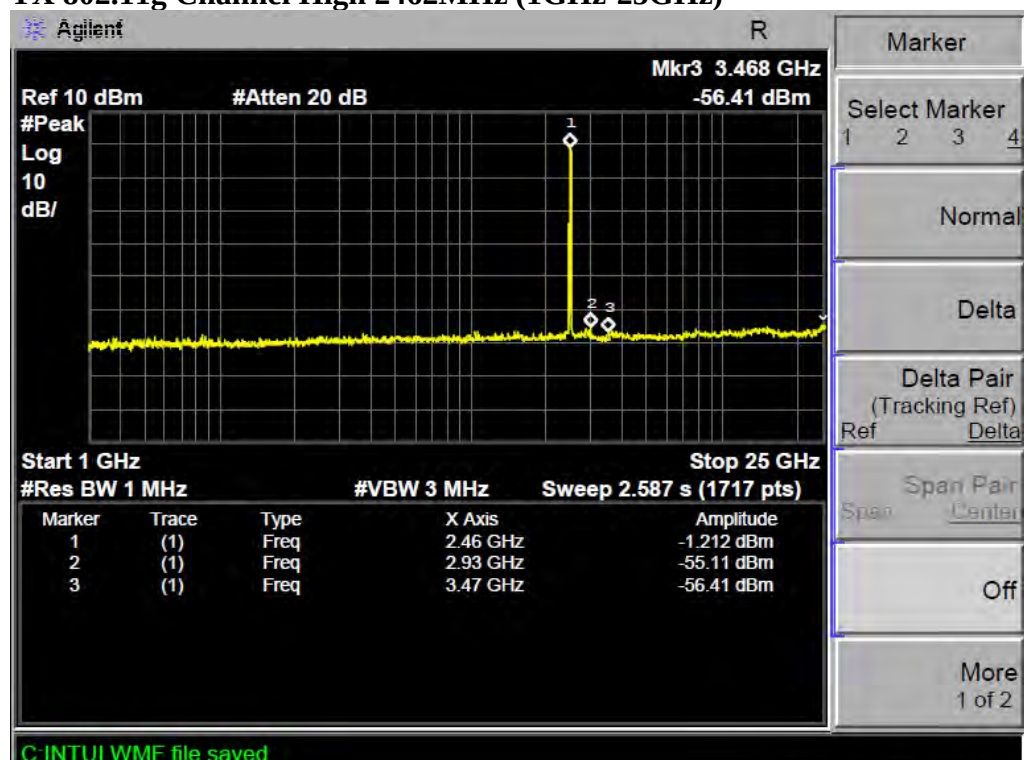


TX 802.11n Channel Low 2412MHz (20MHz) (30MHz-1GHz)

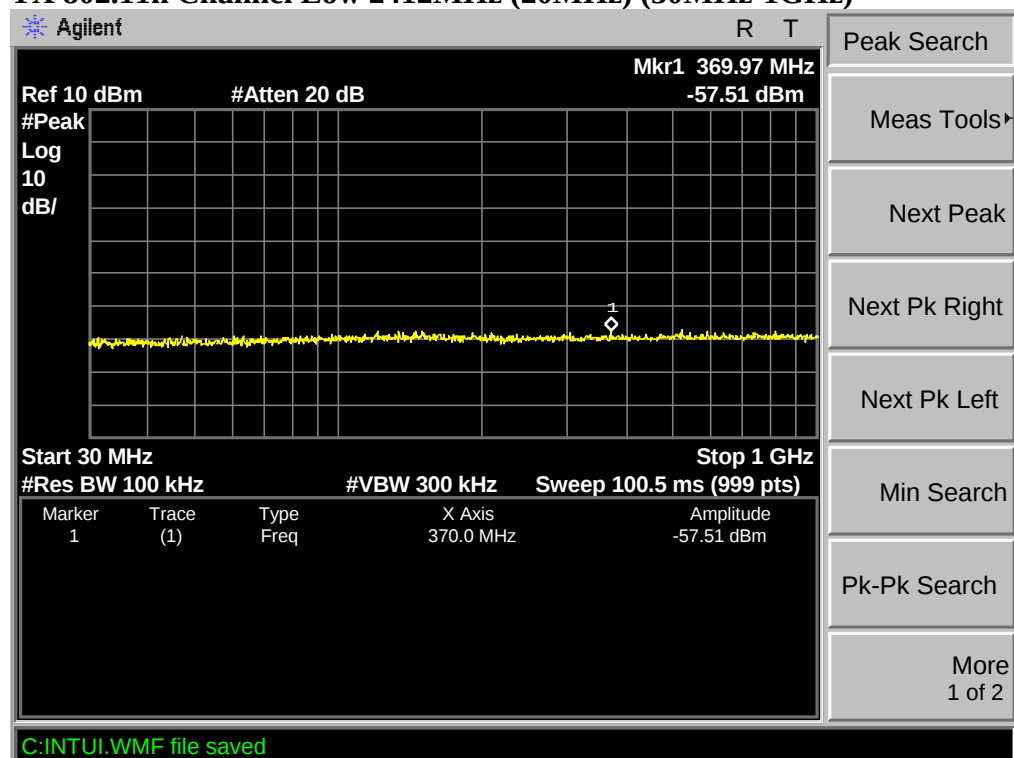


TX 802.11n Channel Low 2412MHz (20MHz) (1GHz-25GHz)

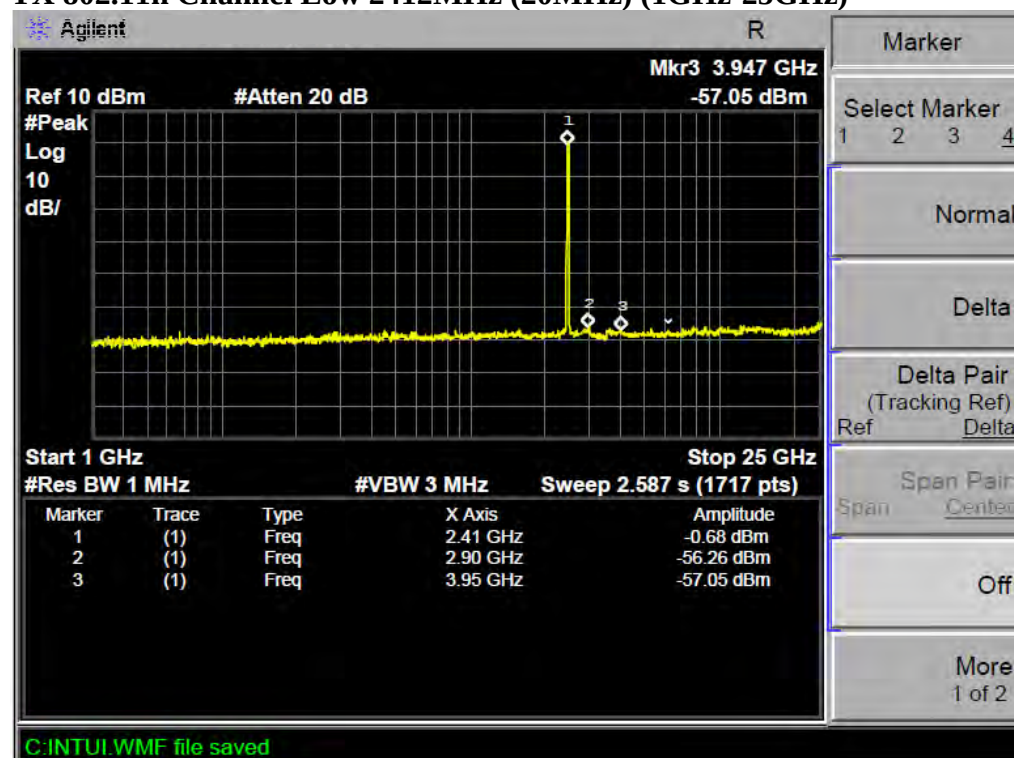


TX 802.11n Channel Middle 2437MHz (20MHz) (30MHz-1GHz)

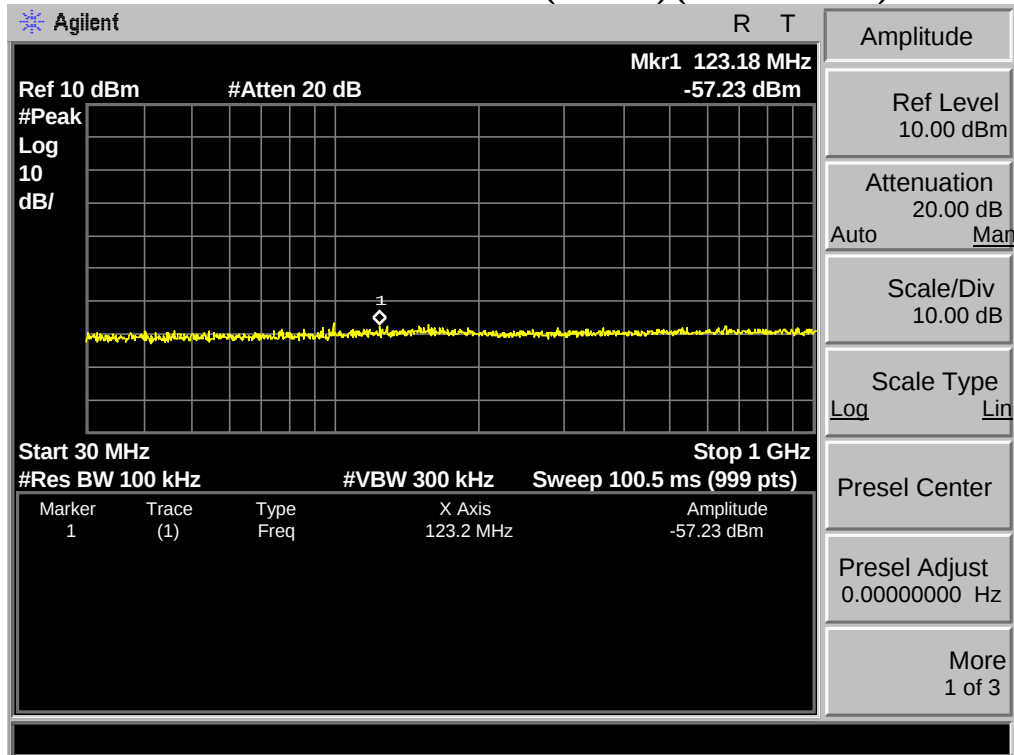


TX 802.11n Channel Middle 2437MHz (20MHz) (1GHz-25GHz)

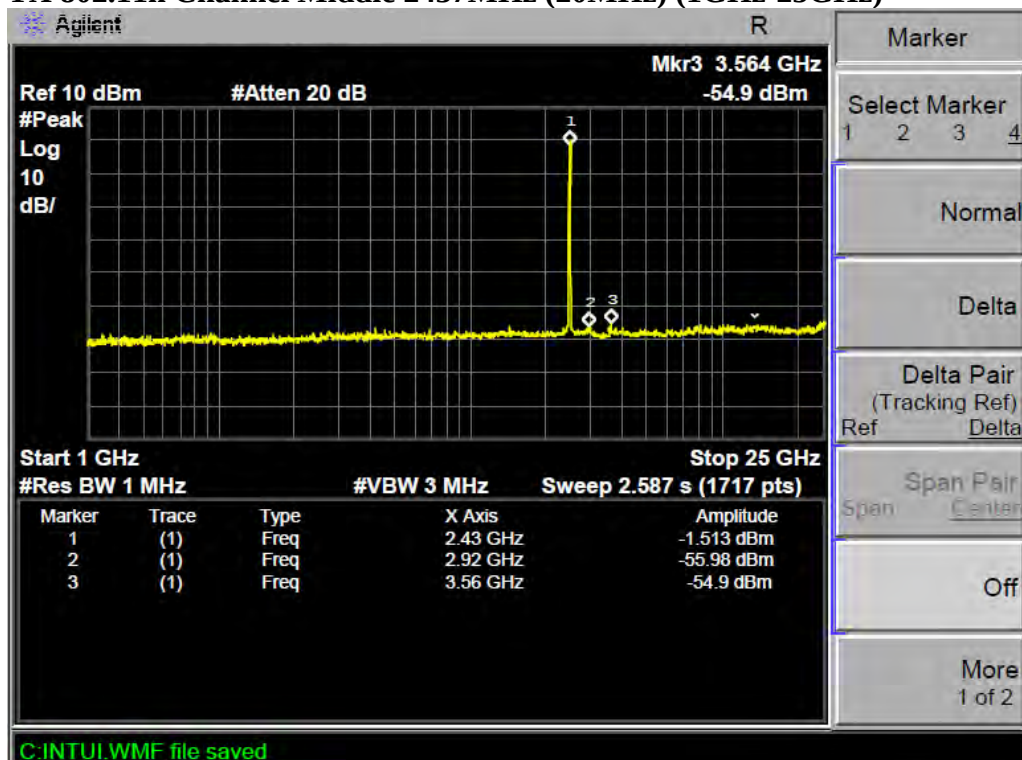


TX 802.11n Channel High 2462MHz (20MHz) (30MHz-1GHz)

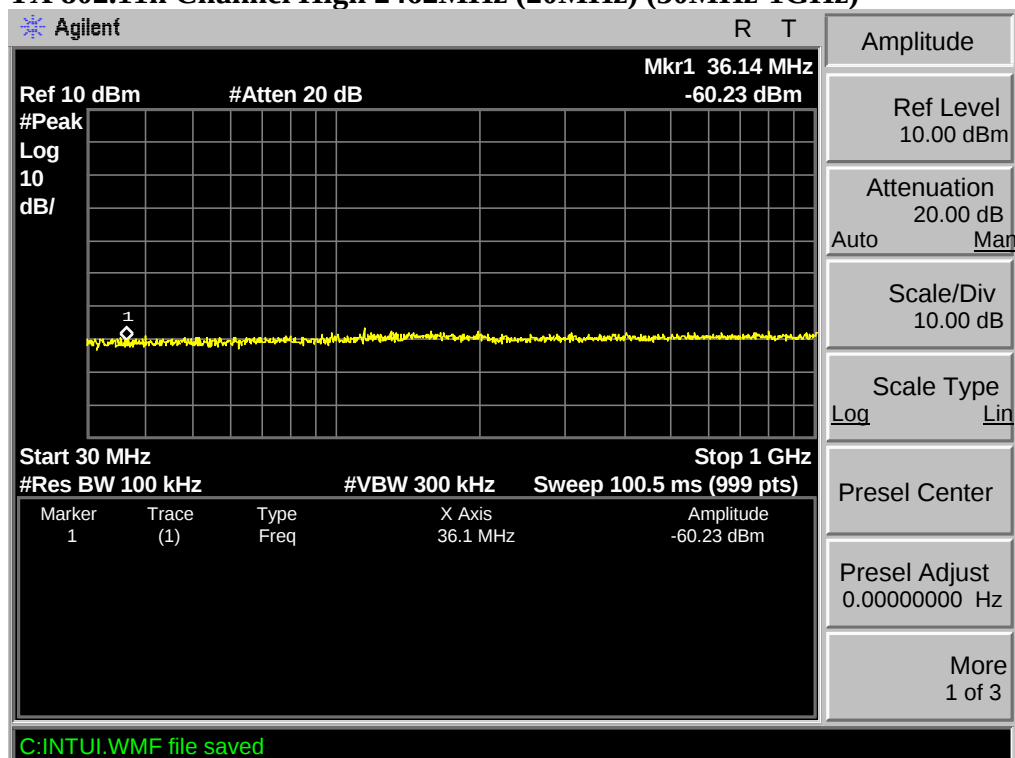


TX 802.11n Channel High 2462MHz (20MHz) (1GHz-25GHz)

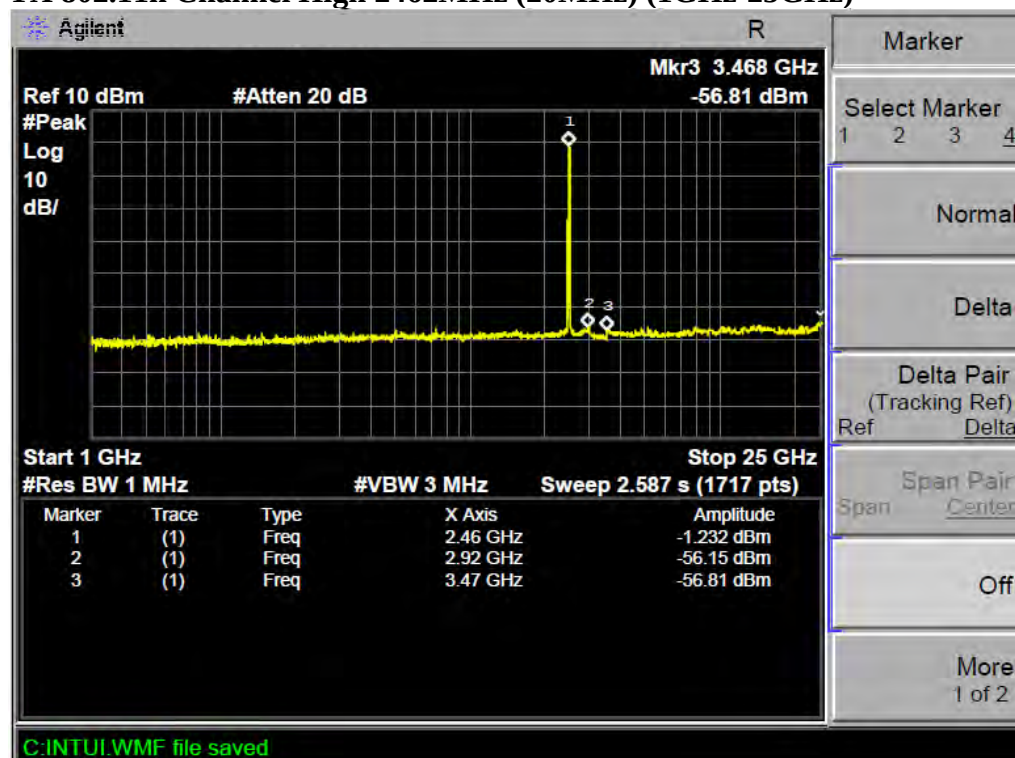


TX 802.11n Channel Low 2422MHz (40MHz) (30MHz-1GHz)

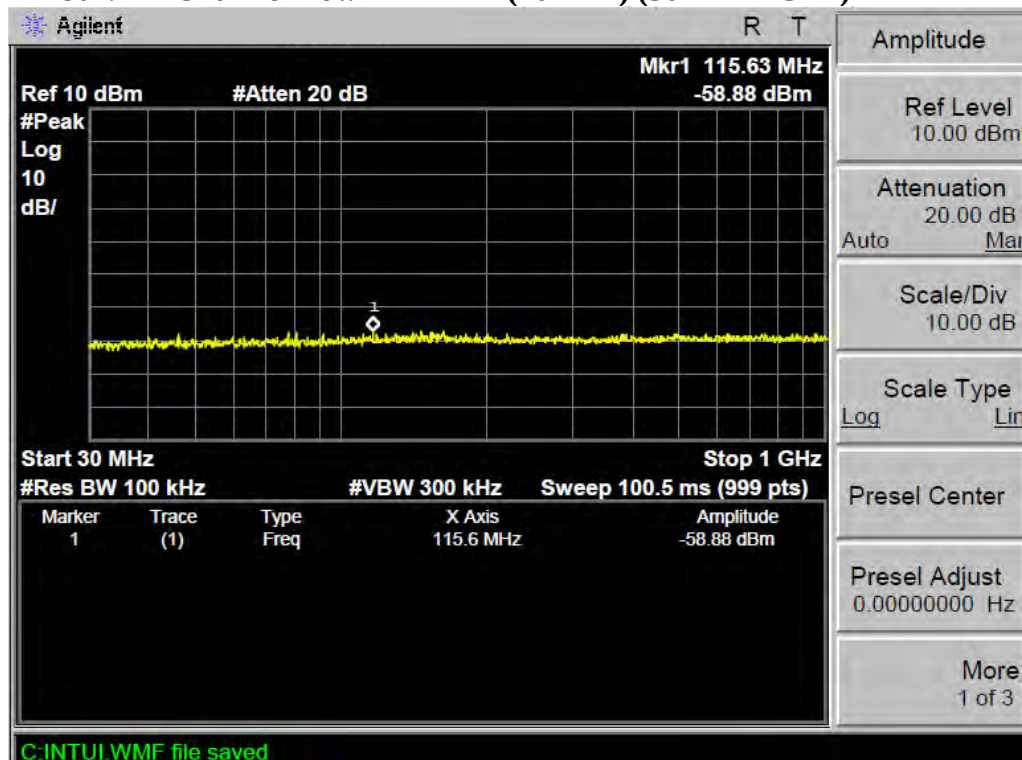


TX 802.11n Channel Low 2422MHz (40MHz) (1GHz-25GHz)

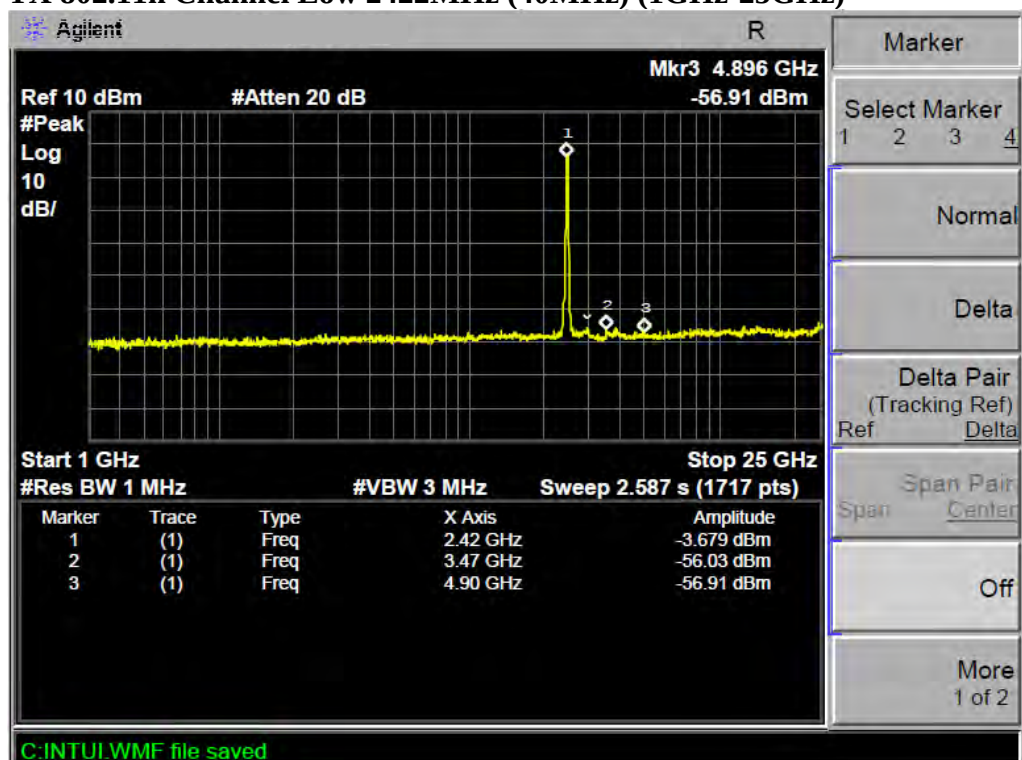


TX 802.11n Channel Middle 2437MHz (40MHz) (30MHz-1GHz)

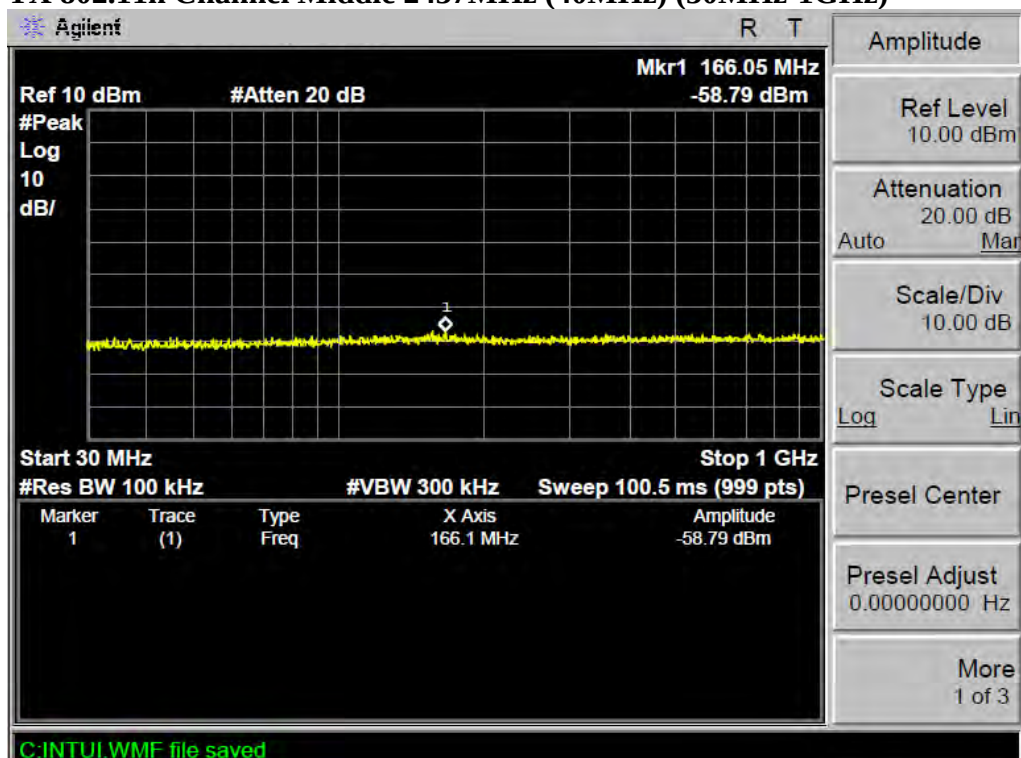


TX 802.11n Channel Middle 2437MHz (40MHz) (1GHz-25GHz)

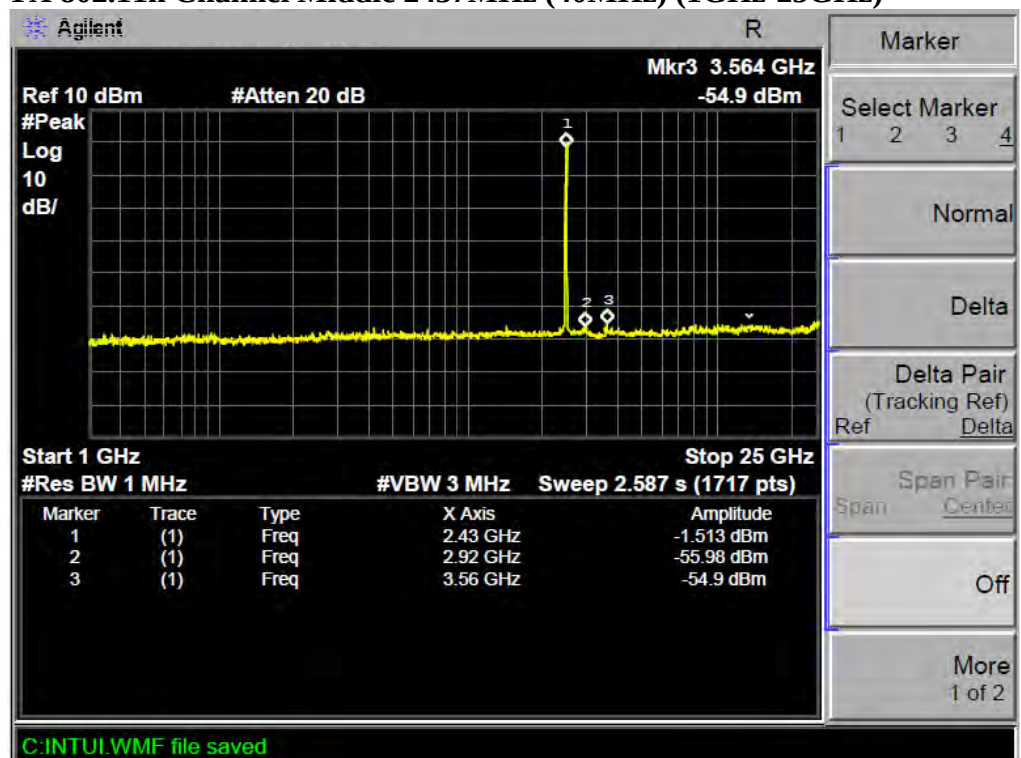

TX 802.11n Channel High 2452MHz (40MHz) (30MHz-1GHz)

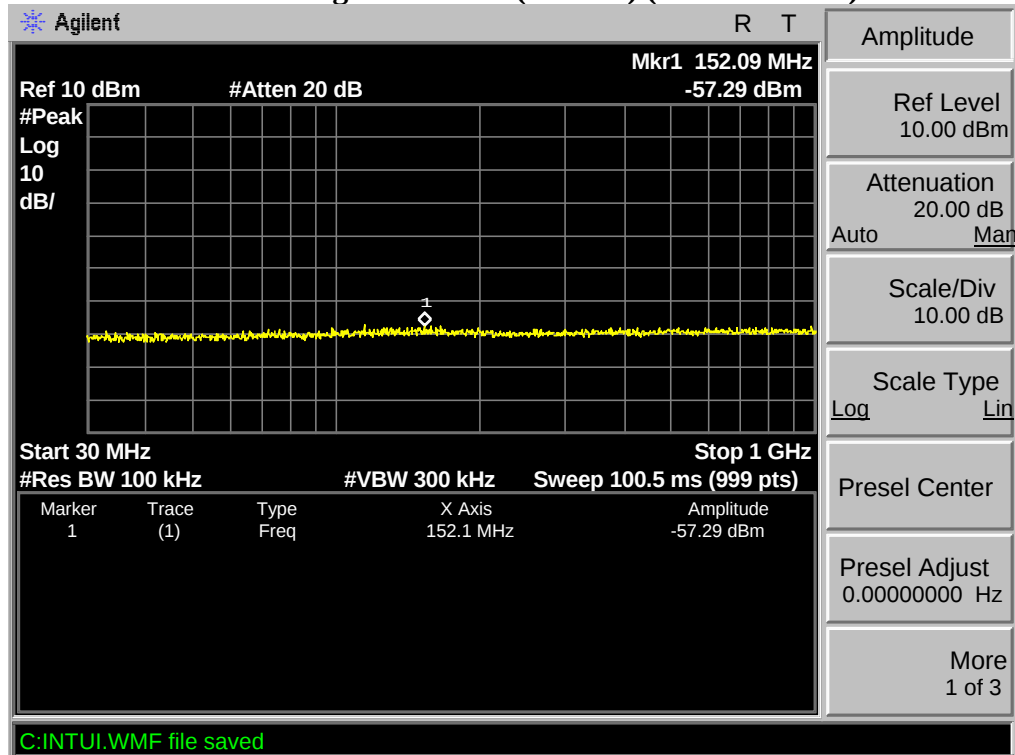


TX 802.11n Channel High 2452MHz (40MHz) (1GHz-25GHz)

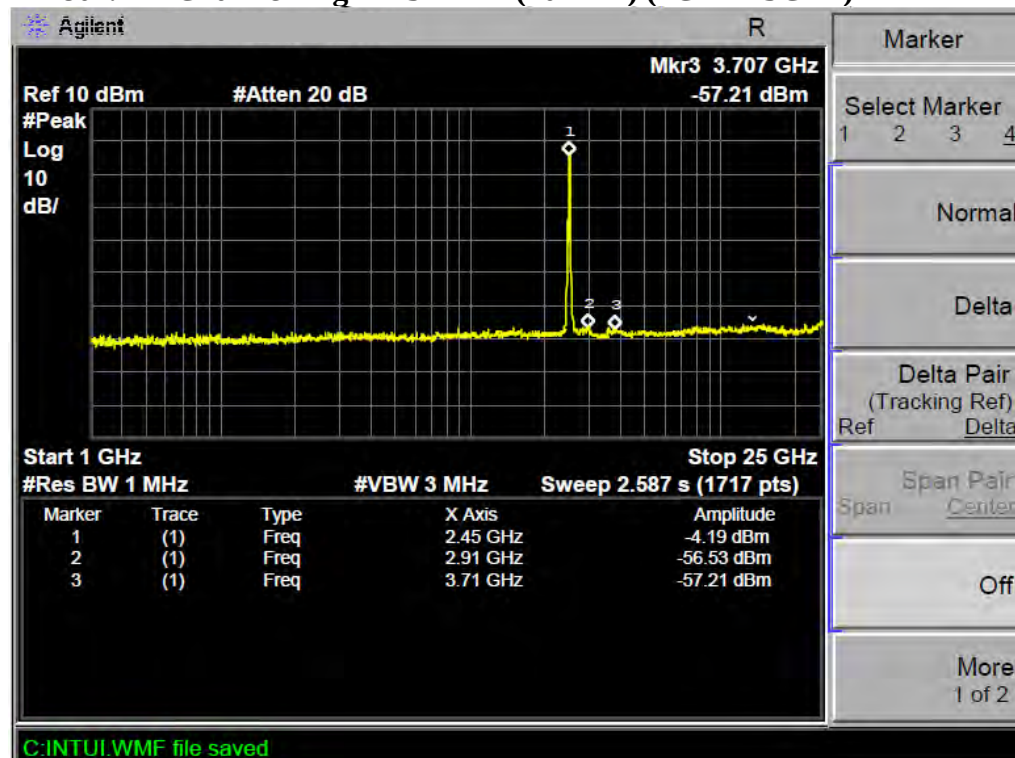


11.AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A)

11.1.Block Diagram of Test Setup

11.1.1.Block diagram of connection between the EUT and simulators

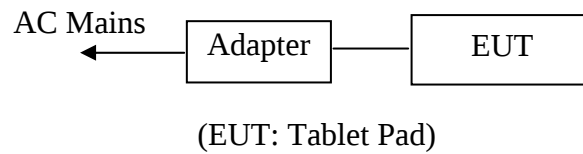

11.1.2.Shielding Room Test Setup Diagram

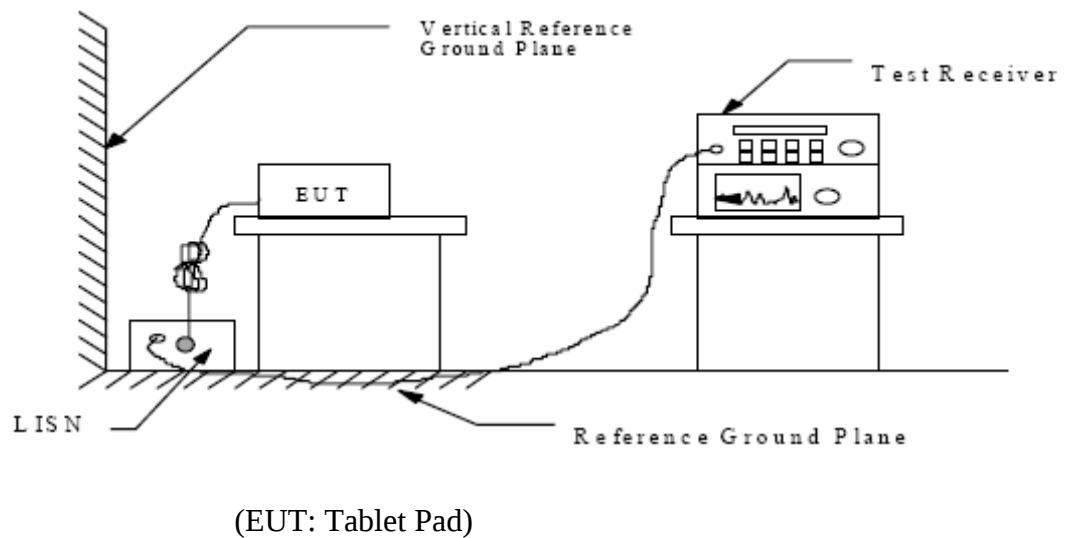

11.2.The Emission Limit

11.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

11.3.Configuration of EUT on Measurement

The following equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.3.1.Tablet Pad (EUT)

Model Number : ME12-7001
Serial Number : N/A
Manufacturer : Dongguan Yuanfeng Technology Co., Ltd

11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in (Charging) mode measure it.

11.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

11.6.Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Date of Test:	July 5, 2012	Temperature:	25°C
EUT:	Tablet Pad	Humidity:	50%
Model No.:	ME12-7001	Power Supply:	AC 120V/60Hz
Test Mode:	Charging	Test Engineer:	Pei

Frequency (MHz)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector	Line
0.204796	56.10	63.4	-7.3	QP	Neutral
0.304059	47.60	60.1	-12.5	QP	
1.289919	41.90	56	-14.1	QP	
0.211442	44.50	53.1	-8.6	AV	
0.523291	32.70	46	-13.3	AV	
2.573326	31.80	46	-14.2	AV	
0.203980	54.10	63.4	-9.3	QP	Live
0.861901	45.40	56	-10.6	QP	
1.135229	45.20	56	-10.8	QP	
0.207263	43.70	53.3	-9.6	AV	
0.521206	36.10	46	-9.9	AV	
1.144329	34.90	46	-11.1	AV	


Emissions attenuated more than 20 dB below the permissible value are not reported.
The spectral diagrams are attached as below.

ACCURATE TECHNOLOGY CO.,LTD**CONDUCTED EMISSION STANDARD FCC Part 15.207**

EUT: Tablet Pad M/N:ME12-7001
 Manufacturer: YuanFeng
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: Terry
 Test Specification: N 120V/60Hz
 Comment:
 Start of Test: 7/5/2012 / 4:39:59PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

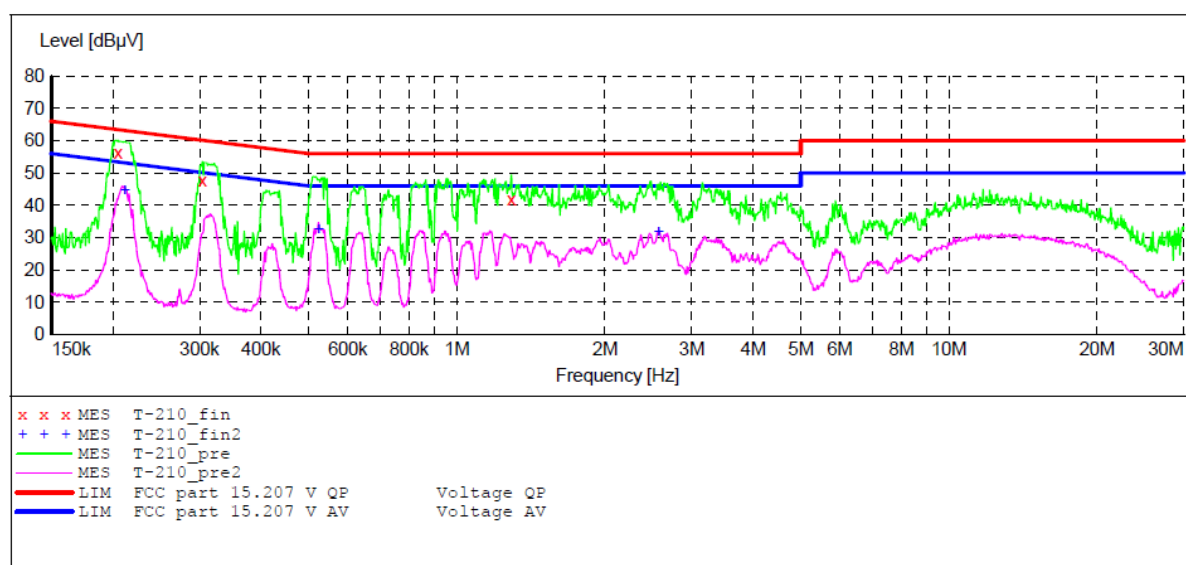**MEASUREMENT RESULT: "T-210_fin"**

7/5/2012 4:43PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.204796	56.10	11.3	63.4	7.3	QP	N	GND
0.304059	47.60	11.6	60.1	12.5	QP	N	GND
1.289919	41.90	11.8	56	14.1	QP	N	GND

MEASUREMENT RESULT: "T-210_fin2"

7/5/2012 4:43PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.211442	44.50	11.3	53.1	8.6	AV	N	GND
0.523291	32.70	12.0	46	13.3	AV	N	GND
2.573326	31.80	11.6	46	14.2	AV	N	GND

ACCURATE TECHNOLOGY CO.,LTD**CONDUCTED EMISSION STANDARD FCC Part 15.207**

EUT: Tablet Pad M/N:ME12-7001
 Manufacturer: YuanFeng
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: Terry
 Test Specification: L 120V/60Hz
 Comment:
 Start of Test: 7/5/2012 / 4:45:55PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

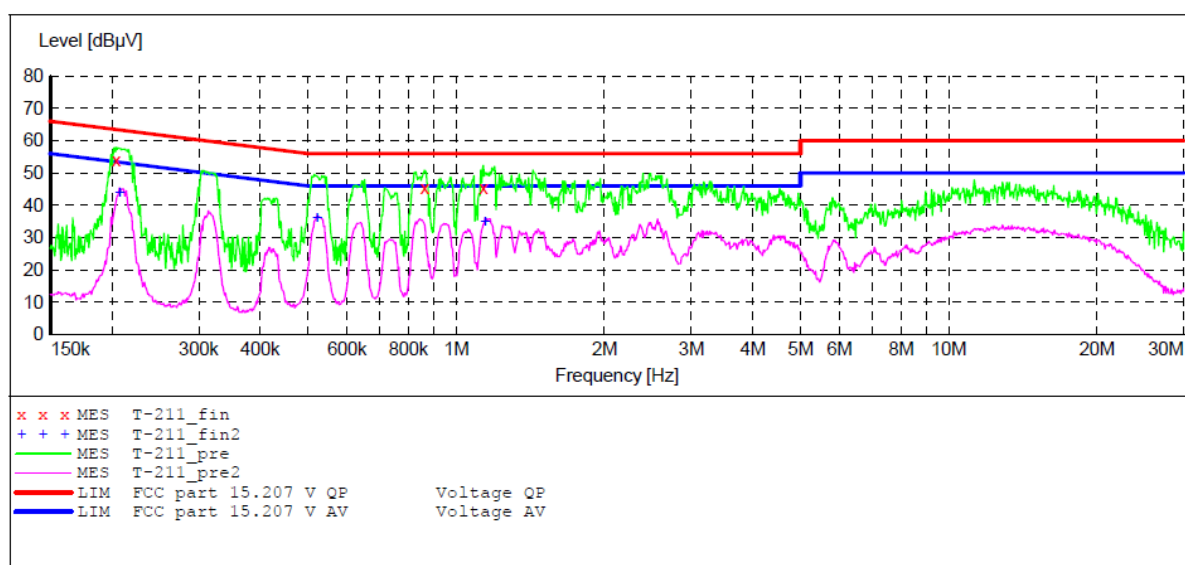**MEASUREMENT RESULT: "T-211_fin"**

7/5/2012 4:48PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.203980	54.10	11.3	63.4	9.3	QP	L1	GND
0.861901	45.40	11.9	56	10.6	QP	L1	GND
1.135229	45.20	11.8	56	10.8	QP	L1	GND

MEASUREMENT RESULT: "T-211_fin2"

7/5/2012 4:48PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.207263	43.70	11.3	53.3	9.6	AV	L1	GND
0.521206	36.10	12.0	46	9.9	AV	L1	GND
1.144329	34.90	11.8	46	11.1	AV	L1	GND


12.ANTENNA REQUIREMENT

12.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2.Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

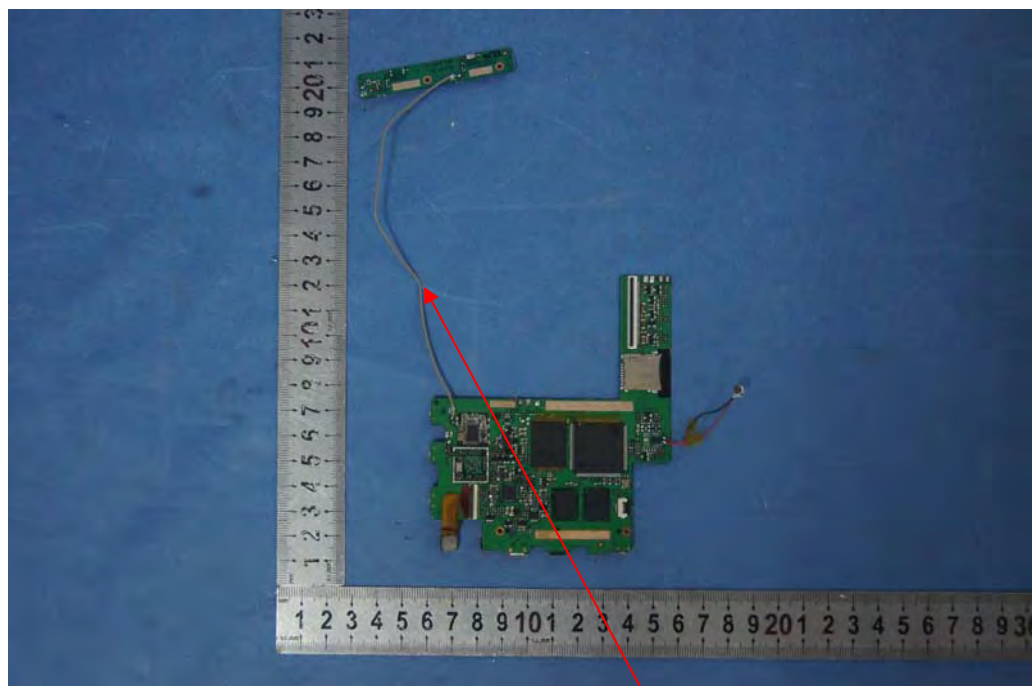

Antenna