



NVLAP LAB CODE 200707-0



FCC PART 15.235

EMI MEASUREMENT AND TEST REPORT

For

Jazwares Inc.

New Mandarin Plaza, Tower B, Room 801, 14 Science Museum Road,

TST East, Kowloon, Hong Kong

FCC ID: YNIJAZWARES65410

Report Type: Original Report	Product Type: Sonic Walkie Talkie
Test Engineer: Chris You	<i>Chris You</i>
Report Number: RSZ10080581	
Report Date: 2010-08-17	
Reviewed By: EMC Engineer	<i>Merry Zhao</i>
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....3
 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)3
 OBJECTIVE3
 RELATED SUBMITTAL(S)/GRANT(S).....3
 TEST METHODOLOGY3
 TEST FACILITY3

SYSTEM TEST CONFIGURATION.....5
 JUSTIFICATION5
 EQUIPMENT MODIFICATIONS5
 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS5
 CONFIGURATION OF TEST SETUP5
 BLOCK DIAGRAM OF TEST SETUP6

SUMMARY OF TEST RESULTS7

FCC §15.203 - ANTENNA REQUIREMENT.....8
 APPLICABLE STANDARD8

FCC §15.205, §15.209(A), §15.235(A) & §15.109 - RADIATED EMISSIONS9
 APPLICABLE STANDARD9
 MEASUREMENT UNCERTAINTY9
 EUT SETUP9
 EMI TEST RECEIVER SETUP.....10
 TEST EQUIPMENT LIST AND DETAILS.....10
 TEST PROCEDURE10
 CORRECTED AMPLITUDE & MARGIN CALCULATION10
 TEST RESULTS SUMMARY10
 TEST DATA11

FCC §15.235(B) - BAND EDGES TESTING13
 APPLICABLE STANDARD13
 TEST PROCEDURE13
 TEST EQUIPMENT LIST AND DETAILS.....13
 TEST DATA13

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Jazwares Inc*'s product, model number: *65410* (FCC ID: *YNIJAZWARES65410*) or the "EUT" as referred to in this report is a *Sonic Walkie Talkie*, which measures approximately 9.0 cm (L) x 9.5 cm (W) x 6.5 cm (H), rated input voltage: DC 9 V Battery.

*Note: The product model *65410* has two color appearances (*black and blue*), and both of them are electrically identical; we select the black one to test, which was explained in the declaration letter.

* All measurement and test data in this report was gathered from production sample serial number: *1008001* (Assigned by *BACL, Shenzhen*). The EUT was received on *2010-08-05*.

Objective

This Type approval report is prepared on behalf of *Jazwares Inc* in accordance with Part 2, Subpart J, and Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules, section 15.203, 15.205, 15.209 and 15.235 rules.

Related Submittal(s)/Grant(s)

No Related Submittals.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratory Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratory Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 21, 2007. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179 and Industrial Canada registration test site No.: 5500A. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



NVLAP LAB CODE 200707-0

The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Justification

The system was configured for test mode.


Equipment Modifications

No modifications were made to the unit tested.

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
VOICA	Speaker	RTD170	N/A	N/A
Nanyan	Audio Generator	NY2201	019596	N/A

Configuration of Test Setup

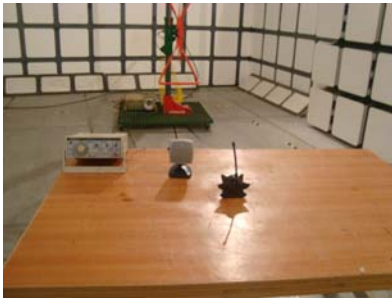

Stand




Side



Lie

Block Diagram of Test Setup

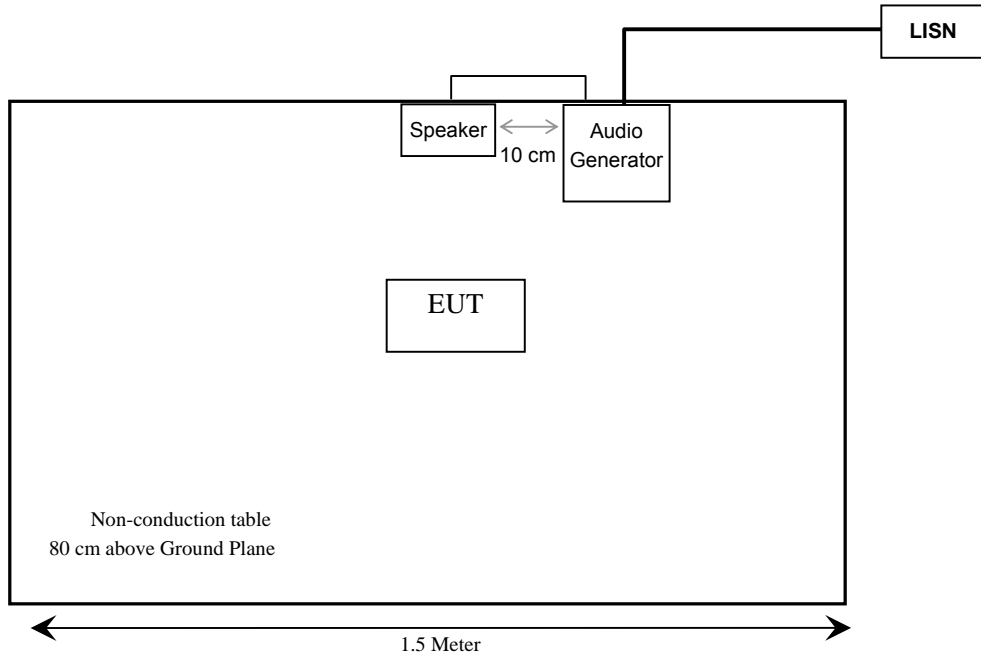

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna requirement	Compliance
§15.207(a)	Conducted Emissions	N/A*
§15.205; §15.209(a) §15.235(a)	Radiated Emissions	Compliance
§15.235(b)	Band Edge Testing	Compliance

Note: * Battery operation only.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a permanent antenna, fulfill the requirement of this section.

Result: Compliance.

Please refer to the EUT photos.

FCC §15.205, §15.209(a), §15.235(a) & §15.109 - RADIATED EMISSIONS

Applicable Standard


FCC Part 15.205, 15.209, 15.235 and 15.109.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 4.0 dB.

EUT Setup

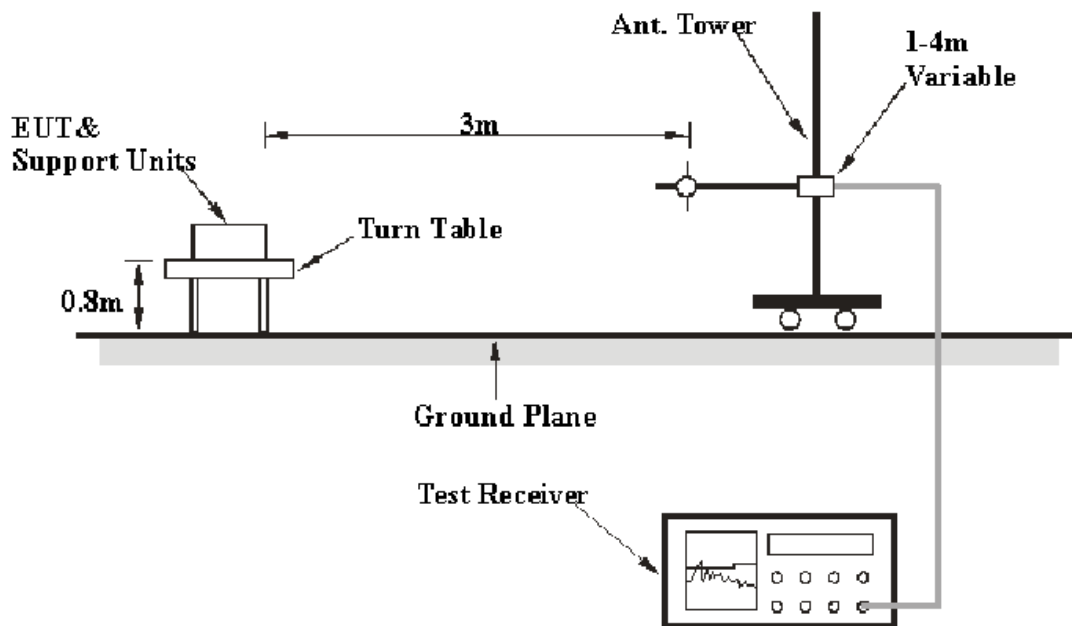

The radiated emission tests were performed in the chamber B test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC part 15.205, 15.209, 15.235 and 15.109 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 1000 MHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>R B/W</i>	<i>Video B/W</i>	<i>IF B/W</i>
30 – 1000 MHz	100 kHz	100 kHz	120 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-24	2010-11-23
HP	Amplifier	HP8447E	1937A01046	2010-08-02	2011-08-01
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2010-04-12	2011-04-12

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All fundamental data was recorded in the Average and Peak detection mode.

All Spurious data was recorded in the Quasi-Peak detection mode.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 & 15.235, with the worst margin reading of:

8.1 dB at 349.015000 MHz in the Horizontal polarization (Transmitting)
14.0 dB at 42.780500 MHz in the Vertical polarization (Receiving)

Test Data**Environmental Conditions**

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

The testing was performed by Chris You on 2010-08-13.

Test Mode: Transmitting

Frequency (MHz)	Cord. Amp. (dB μ V/m)	Test Antenna		Turntable Position (deg)	Limit (dB μ V/m)	Margin (dB)	Detector (PK/QP/Ave)	Remark
		Height (cm)	Polarity (H/V)					
349.015	37.9	104.0	H	111.0	46.0	8.1	QP	harmonic
698.01125	35.9	105.0	H	180.0	46.0	10.1	QP	harmonic
49.86	68.5	120.0	V	135.0	80.0	11.5	Ave	Fund.
99.725	31.6	105.0	V	118.0	43.5	11.9	QP	harmonic
398.87325	32.6	103.0	H	96.0	46.0	13.4	QP	harmonic
49.86	65.1	120.0	H	206.0	80.0	14.9	Ave	Fund.
947.296	28.9	106.0	V	180.0	46.0	17.1	QP	harmonic
49.86	69.1	110.0	V	185.0	100.0	30.1	PK	Fund.
49.86	67.4	120.0	H	160.0	100.0	32.6	PK	Fund.


*Note 1: The Duty cycle is 100%

*Note 2: The worst-case is located in stand orientation for fundamental.

*Note 3: The worst-case is located in lie orientation for spurious emissions.

Test Mode: Receiving

Auto Test(FCC 15 Class B)

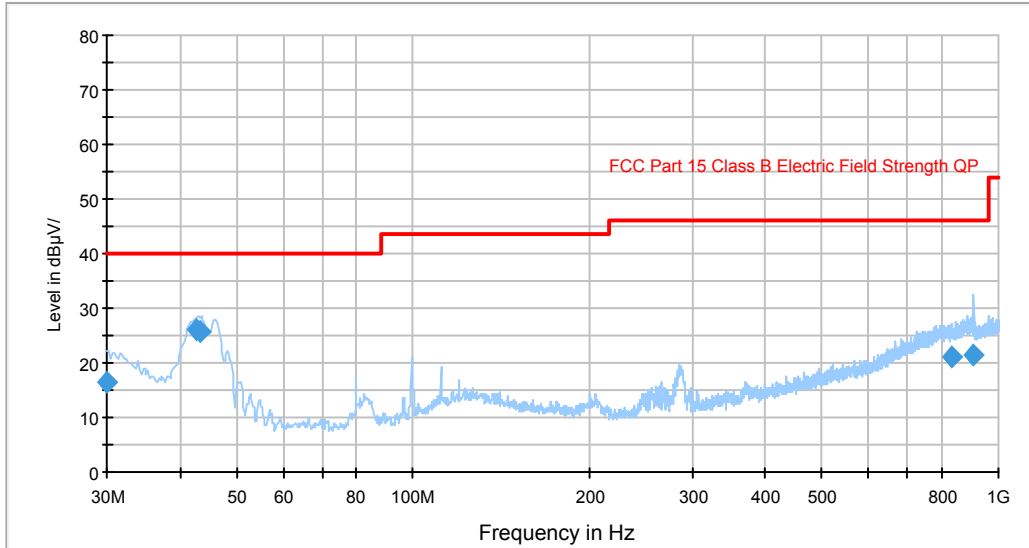

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Test Antenna		Turntable position (deg)	Limit (dBµV/m)	Margin (dB)
		Height (cm)	Polarity (H/V)			
42.780500	26.0	102.0	V	264.0	40.0	14.0
43.474000	25.6	104.0	V	292.0	40.0	14.4
30.094854	16.3	105.0	V	136.0	40.0	23.7
908.400250	21.5	204.0	V	196.0	46.0	24.5
834.589000	20.9	103.0	V	124.0	46.0	25.1

FCC §15.235(b) - BAND EDGES TESTING

Applicable Standard

The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in §15.209, whichever permits the higher emission levels. The field strength of any emissions removed by more than 10 kHz from the band edges shall not exceed the general radiated emission limits in §15.209. All signals exceeding 20 microvolts/meter at 3 meters shall be reported in the application for certification.

Test Procedure

With the EUT's antenna attached, the EUT's radiated emission power was received by the test antenna which was connected to the test receiver setup with the START and STOP frequencies set to the EUT's operation band.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-24	2010-11-23
HP	Amplifier	HP8447E	1937A01046	2010-08-02	2011-08-01
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2010-04-12	2011-04-12

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

The testing was performed by Chris You on 2010-08-16.


Test Mode: Transmitting

Indicated		Table Angle Degree	Ant. Height (m)	Detector PK/QP/Ave	Correction Factor			Cord. Amp. (dBµV/m)	Part 15.235/15.209	
Freq. (MHz)	Reading (dBµV)				Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. (dB)		Limit (dBµV/m)	Margin (dB)
49.81	28.80	150	1.5	PK	9.60	0.33	26.7	12.03	40	27.97
49.91	27.90	180	1.5	PK	9.60	0.33	26.7	11.13	40	28.87

Result: Compliance.


Please refer to the plot attached.

Plot of Band Edge- Left Side

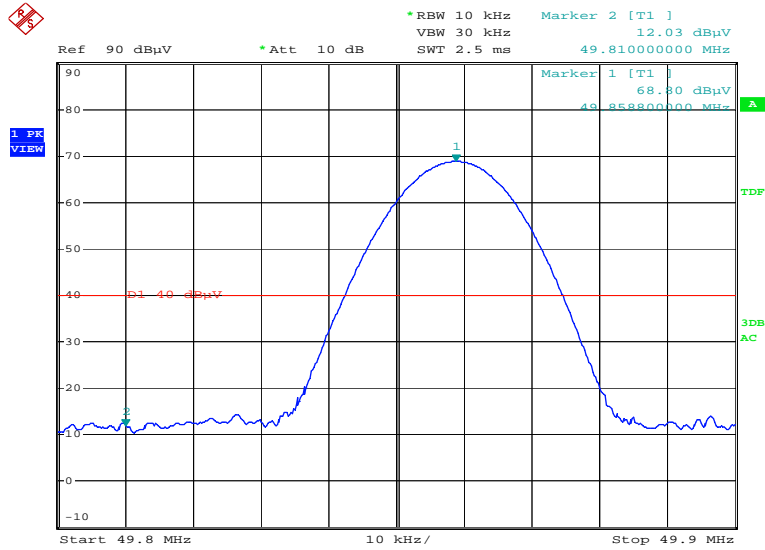

plot of band edge-left side
Date: 16.AUG.2010 10:45:55

Plot of Band Edge- Right Side

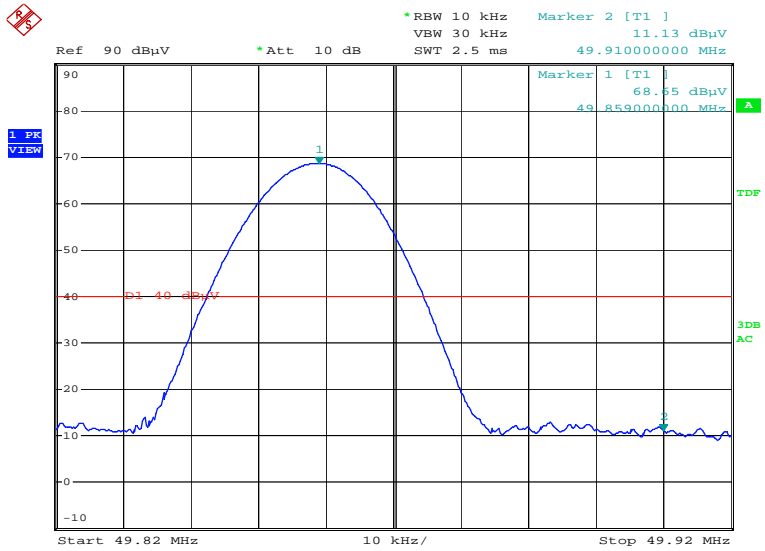

plot of band edge-right side
Date: 16.AUG.2010 10:44:40

***** END OF REPORT *****