

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Telephone:	+86 (0) 755 2601 2053
Fax:	+86 (0) 755 2671 0594
Email:	ee.shenzhen@sgs.com

Report No.: SZEM151100719601 Page: 1 of 16

FCC REPORT

Application No. : Applicant: Manufacturer:	SZEM1511007196CR (SGS SZ No.:T51510260053EM) Jazwares. Inc RR
Product Name:	92571 – CHUCK & FRIENDS – Rollin` Racer R/C Assortment (92572 – CHUCK & FRIENDS – Rollin` Chuck R/C)
Model No.(EUT):	92571 (92572)
Request Age Grading:	3+
Country of Destination:	US
FCC ID:	YNIJAZWARES92572
Standards:	47 CFR Part 15, Subpart C (2014)
Date of Receipt:	2015-11-23
Date of Test:	2015-11-24 to 2015-11-25
Date of Issue:	2015-11-30
Test Result:	PASS *

In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM151100719601 Page: 2 of 16

2 Version

Revision Record							
Version Chapter Date Modifier Ren							
00		2015-11-30		Original			

Authorized for issue by:		
Tested By	(Bill Chen) /Project Engineer	2015-11-25
Prepared By	Jade Chen (Jade Chen) /Clerk	2015-11-30
Checked By	Eric Fu (Eric Fu) /Reviewer	2015-11-30

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM151100719601 Page: 3 of 16

3 Test Summary

Test Item	Test Requirement	Test method	Result
Radiated Emission47 CFR Part 15, Subpart C Section 15.227		ANSI C63.10 (2009)	PASS
Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.215	ANSI C63.10 (2009)	PASS



Report No.: SZEM151100719601 Page: 4 of 16

Dogo

4 Contents

			ye
1	С	OVER PAGE	1
2	v	ERSION	2
3	т	EST SUMMARY	3
4	С	CONTENTS	4
5	G	ENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	5
	5.3	TEST ENVIRONMENT AND MODE	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5		
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8 5.9	ABNORMALITIES FROM STANDARD CONDITIONS OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.9		
6	••••	EST RESULT & MEASUREMENT DATA	
	6.1	ANTENNA REQUIRMENT	q
	6.2	RADIATED EMISSIONS	
	6.3	Occupied Bandwidth	-
7	Р	HOTOGRAPHS - EUT TEST SETUP	.16
	7.1	RADIATED EMISSION	
8	Ρ	HOTOGRAPHS - EUT CONSTRUCTION DETAILS	.16



Report No.: SZEM151100719601 Page: 5 of 16

5 General Information

5.1 Client Information

Applicant:	Jazwares. Inc
Address of Applicant:	1067 SHOTGUN ROAD
Manufacturer:	RR

5.2 General Description of EUT

Product Name:	92571 – CHUCK & FRIENDS – Rollin` Racer R/C Assortment
	(92572 – CHUCK & FRIENDS – Rollin` Chuck R/C)
Model No.:	92571 (92572)
Sample Type:	Portable production
Operation Frequency:	27.145MHz
Antenna Type:	Integral
Power Supply:	3V DC (2x1.5V"AAA" Size Batteries)

5.3 Test Environment and Mode

Operating Environment:	Operating Environment:				
Temperature:	25.0 °C				
Humidity:	52 % RH				
Atmospheric Pressure:	1010 mbar				
Test mode:					
Transmitting mode: Keep the EUT in transmitting mode.					

5.4 Description of Support Units

The EUT has been tested independent unit.



Report No.: SZEM151100719601 Page: 6 of 16

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

The 3m Semi-anechoic chambers and the 10m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2, 4620C-3.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM151100719601 Page: 7 of 16

5.10 Equipment List

	RE in Chamber							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)		
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEL0198	2015-03-01	2016-03-01		
2	EMI Test Receiver (9k-3GHz)	Rohde & Schwarz	ESCI	SEL0175	2015-05-13	2016-05-13		
3	EMI Test software	AUDIX	E3	SEL0201	N/A	N/A		
4	Coaxial cable	SGS	N/A	SEL0202	2015-03-01	2016-03-01		
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-11-15	2017-11-15		
6	Amplifier (0.1-1300MHz)	HP	8447D	SEL0153	2015-10-09	2016-10-09		



Report No.: SZEM151100719601 Page: 8 of 16

	RF connected test							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)		
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-09	2016-10-09		
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24	2016-10-24		
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-17	2016-10-17		
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13		
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-13	2016-05-13		
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-13	2016-05-13		
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-04-25	2016-04-25		
8	POWER METER	R & S	NRVS	SEL0144	2015-10-09	2016-10-09		
9	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-04-25	2016-04-25		



Report No.: SZEM151100719601 Page: 9 of 16

6 Test Result & Measurement Data

6.1 Antenna Requirment

Standard Requirement: 47 CFR Part 15C Section 15.203

15.203 Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:



Report No.: SZEM151100719601 Page: 10 of 16

Test Requirement:	47 CFR Part 15C Sect	47 CFR Part 15C Section 15.227							
Test Method:	ANSI C63.10: 2009	ANSI C63.10: 2009							
Test Site:	3m (Semi-Anechoic C	3m (Semi-Anechoic Chamber)							
ERP Limit:	Carrier Power will not	exce	ed 80dBuV/m a	at 3m (Avera	ge).				
Receiver Setup:	Frequency		Detector	RBW	VBW		Remark]	
	0.009MHz-0.090MH	Ηz	Peak	10kHz	30kHz		Peak	1	
	0.009MHz-0.090MH	Ηz	Average	10kHz	30kHz		Average	1	
	0.090MHz-0.110MH	Ηz	Quasi-peak	10kHz	30kHz	C	Quasi-peak		
	0.110MHz-0.490MH	Ηz	Peak	10kHz	30kHz		Peak	1	
	0.110MHz-0.490MH	Ηz	Average	10kHz	30kHz		Average	1	
	0.490MHz -30MH;	Z	Quasi-peak	10kHz	30kHz	C	Quasi-peak]	
	30MHz-1GHz		Quasi-peak	100 kHz	300kHz	C	Quasi-peak]	
	Above 1GHz		Peak	1MHz	3MHz		Peak		
	Above TGH2		Peak	1MHz	10Hz		Average		
Limit:	Frequency		ield strength crovolt/meter)	Limit (dBuV/m)	Remark		Measurem distance (
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-		300		
	0.490MHz705MHz	24	1000/F(kHz)	-	-		30		
	1.705MHz-30MHz		30	-	-		30		
	30MHz-88MHz		100	40.0	Quasi-peak		3		
	88MHz-216MHz		150	43.5	Quasi-peak		3		
	216MHz-960MHz		200	46.0	Quasi-peak		3		
	960MHz-1GHz		500	54.0	Quasi-pea	ak	3		
	Above 1GHz		500	54.0	Average	;	3		
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.								
Test Procedure:	 a. The EUT was place a 3 meter semine determine the pose 	-anec	choic camber. of the highest r	The table adiation.	was rotat	ed	360 degree	es to	
	was mounted on the	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.							
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.								
	d. For each suspected the antenna was the second se				-				

6.2 Radiated Emissions




Report No.: SZEM151100719601 Page: 11 of 16

LIT

of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be retested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.

Test Setup:

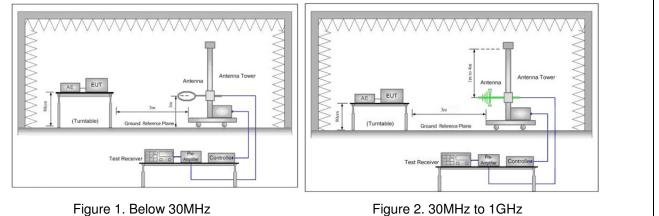

Test Mode: Transmitting mode.				
Instruments Used: Refer to section 5.10 for details.				
Test Result:	Pass			

27.145MHz Mode

T. ... D.

Test Procedure: For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10: 2009. The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

Intentional emission						
Test Frequency	Peak (d	dBµV/m)	Limits	Margin (dB)/ Z		
(MHz)	Vertical	Vertical Horizontal (dBµV/m		Vertical	Horizontal	
27.145	68.98	57.48	100.00	-31.02	-42.52	


Test Frequency	Average	(dBµV/m)	Limits	Margin (dB)	
(MHz)	Vertical	Horizontal	(dBµV/m)	Vertical	Horizontal
27.145	57.98	46.48	80.00	-22.02	-33.52



Report No.: SZEM151100719601 Page: 12 of 16

Out of Band Emissions

Vertical

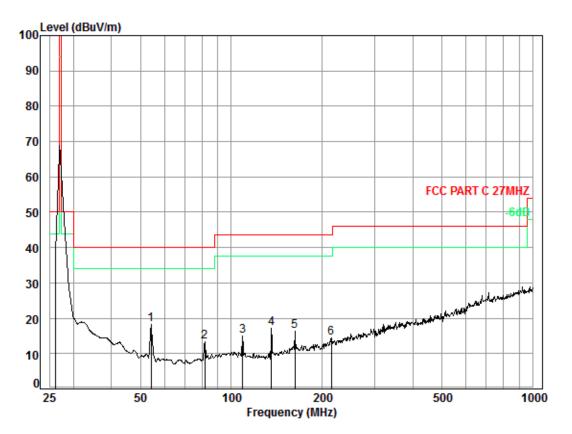


Condition: FCC PART C 27MHZ 3m 3142C Vertical Job No. : 7196CR Test Mode: TX mode

	Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	54.25	0.80	8.14	27.28	36.49	18.15	40.00	-21.85
2	81.70	1.10	7.98	27.23	31.63	13.48	40.00	-26.52
3	108.93	1.23	8.74	27.14	32.19	15.02	43.50	-28.48
4	135.92	1.29	8.20	26.98	34.55	17.06	43.50	-26.44
5	162.25	1.34	9.65	26.85	32.24	16.38	43.50	-27.12
6	214.75	1.49	10.93	26.65	28.74	14.51	43.50	-28.99



Report No.: SZEM151100719601 Page: 13 of 16

Horizontal

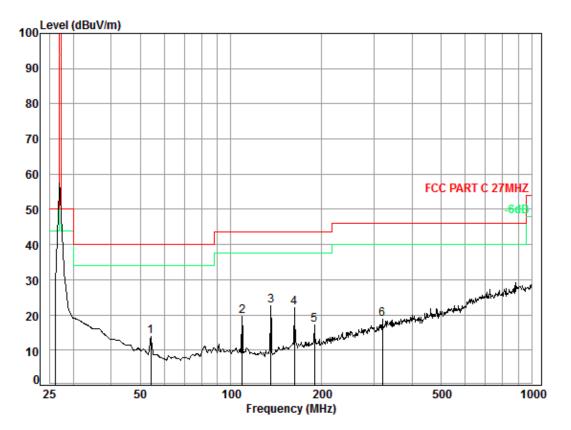

Condition: FCC PART C 27MHZ 3m 3142C Horizontal Job No. : 7196CR Test Mode: TX mode

iest	mode. IA	moue						
		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	54.25	0.80	8.14	27.28	32.17	13.83	40.00	-26.17
2	108.93	1.23	8.74	27.14	36.91	19.74	43.50	-23.76
3	135.92	1.29	8.20	26.98	40.17	22.68	43.50	-20.82
4	162.25	1.34	9.65	26.85	37.80	21.94	43.50	-21.56
5	189.44	1.39	10.09	26.74	32.49	17.23	43.50	-26.27
6	318.68	1.96	14.51	26.54	28.99	18.92	46.00	-27.08

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

2) The disturbance below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




Report No.: SZEM151100719601 Page: 14 of 16

Test Requirement:	47 CFR Part 15C Section 15.215 (C)
Test Method:	ANSI C63.10: 2009
Limit:	Operation within the band 26.960 – 27.280 MHz
Requirement :	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be decomposited by measuring the radiated emissions.
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane
Test Mode:	Transmitting mode.
Instruments Used:	Refer to section 5.10 for details.
Test Result:	Pass

6.3 Occupied Bandwidth



Report No.: SZEM151100719601 Page: 15 of 16

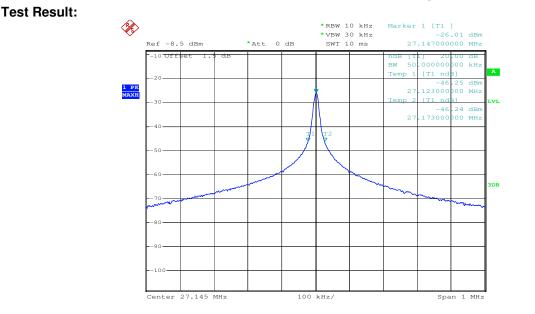



Report No.: SZEM151100719601 Page: 16 of 16

7 Photographs - EUT Test Setup

Test model No.:92571 (92572)

7.1 Radiated Emission



8 Photographs - EUT Construction Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1511007196CR.