



FCC PART 15.247  
TEST REPORT

For

**Xoopar Limited**

Room 1608-09, Jin Wei Building, 4051 Jiabin Road, Luohu Area, Shenzhen, China

**FCC ID: YOAXBOY31009**

<b>Report Type:</b> Original Report	<b>Product Type:</b> GRAND XOOPAR BOY 8 inch Wireless Speaker
<b>Report Number:</b> <u>RSZ171030011-00B</u>	
<b>Report Date:</b> <u>2017-11-20</u>	
<b>Reviewed By:</b> <u>Rocky Kang</u> RF Engineer	<i>Rocky Kang</i>
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★". This report may contain data were produced under the subcontractor and shall be marked with an asterisk "△".

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>9</b>
<b>FCC §15.247 (i) &amp; §1.1307 (b) (1) &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
RESULT .....	11
<b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
ANTENNA CONNECTOR CONSTRUCTION .....	12
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
EUT SETUP.....	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE .....	13
CORRECTED FACTOR & MARGIN CALCULATION .....	14
TEST RESULTS SUMMARY .....	14
TEST DATA .....	14
<b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b>	<b>17</b>
APPLICABLE STANDARD .....	17
EUT SETUP .....	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	18
TEST PROCEDURE .....	18
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	18
TEST RESULTS SUMMARY .....	19
TEST DATA .....	19
<b>FCC §15.247(a) (1)-CHANNEL SEPARATION TEST .....</b>	<b>25</b>
APPLICABLE STANDARD .....	25
TEST PROCEDURE .....	25
TEST DATA .....	25

**FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....32**  
 APPLICABLE STANDARD .....32  
 TEST PROCEDURE .....32  
 TEST DATA .....32

**FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST .....38**  
 APPLICABLE STANDARD .....38  
 TEST PROCEDURE .....38  
 TEST DATA .....38

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....41**  
 APPLICABLE STANDARD .....41  
 TEST PROCEDURE .....41  
 TEST DATA .....41

**FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....57**  
 APPLICABLE STANDARD .....57  
 TEST PROCEDURE .....57  
 TEST DATA .....57

**FCC §15.247(d) - BAND EDGES TESTING .....59**  
 APPLICABLE STANDARD .....59  
 TEST PROCEDURE .....59  
 TEST DATA .....59

---

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *Xoopar Limited's* product, model number: *XBOY31009* (FCC ID: *YOAXBOY31009*) or the "EUT" in this report was a *GRAND XOOPAR BOY 8 inch Wireless Speaker*, which was measured approximately: 18.0 cm (L) x 16.5 cm (W) x 20.0 cm (H), rated with input voltage: DC 7.4 V from battery or DC 5V from adapter.

*\* All measurement and test data in this report was gathered from production sample serial number: 1702364 (Assigned by BAACL, Shenzhen). The EUT supplied by the applicant was received on 2017-10-30.*

### Objective

This test report is prepared on behalf of *Xoopar Limited* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

Part 15.247 DTS submissions with FCC ID: YOAXBOY31009

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Measurement Uncertainty

Parameter	uncertainty
Occupied Channel Bandwidth	±5%
RF Output Power with Power meter	±0.5dB
RF conducted test with spectrum	±1.5dB
AC Power Lines Conducted Emissions	±1.95dB
All emissions, radiated	±4.88dB
Temperature	±3°C
Humidity	±6%
Supply voltages	±0.4%

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

Bay Area Compliance Laboratories Corp. (Shenzhen) has been accredited to ISO/IEC 17025 by CNAS(Lab code: L2408). And accredited to ISO/IEC 17025 by NVLAP(Lab code: 200707-0), the FCC Designation No. CN5001 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Shenzhen) was registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

---

### Description of Test Configuration

The system was configured for testing in an engineering mode.

### EUT Exercise Software

Software “Bluetest3” was used for Bluetooth testing, power level is default.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
N/A	Adapter	MDY-03-EB	N/A

### External I/O Cable

Cable Description	Length (m)	From Port	To
Shielding Detachable DC Cable	1.2	EUT	Adapter

### Block Diagram of Test Setup

For conducted emission:

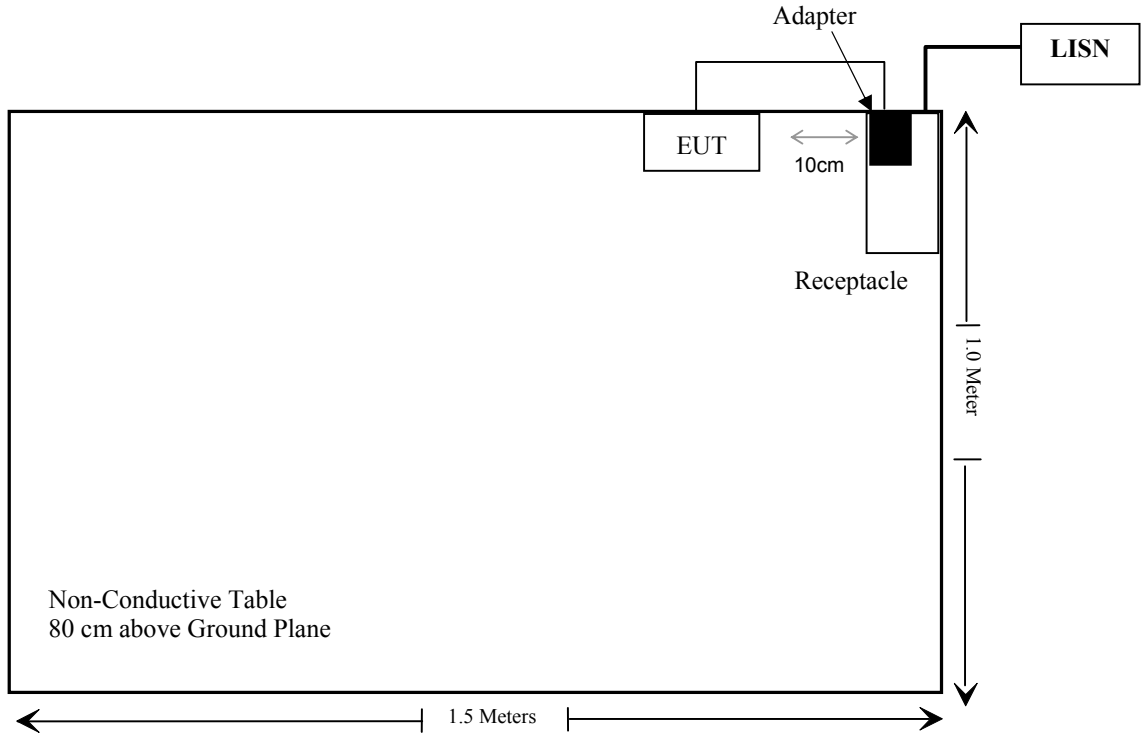

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.247 (i), §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance



**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted Emissions Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2017-08-04	2018-08-04
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2016-12-07	2017-12-07
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2017-05-21	2017-11-19
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
N/A	Conducted Emission Cable	N/A	UF A210B-1-0720-504504	2017-05-12	2017-11-12
<b>Radiated Emission Test</b>					
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2017-04-24	2018-04-24
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-05-21	2018-05-21
HP	Amplifier	HP8447E	1937A01046	2017-05-21	2017-11-19
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2014-12-17	2017-12-16
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2016-12-07	2017-12-07
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369223410-001	2017-05-21	2017-11-19
Ducommun technologies	RF Cable	104PEA	218124002	2017-05-21	2017-11-19
Ducommun technologies	RF Cable	RG-214	1	2017-05-21	2017-11-19
Ducommun technologies	RF Cable	RG-214	2	2017-05-22	2017-11-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2014-12-29	2017-12-28
Ducommun Technologies	Pre-amplifier	ALN-22093530-01	991373-01	2017-08-03	2018-08-03
Sinoscite	Band Reject Filter	BSF2402-2480MN-0898-001	N/A	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>RF Conducted Test</b>					
Agilent	P-Series Power Meter	N1912A	MY5000448	2016-12-05	2017-12-05
Agilent	Wideband Power Sensor	N1921A	MY54210016	2016-12-05	2017-12-05
WEINSCHTEL	3 dB Attenuator	N/A	N/A	2017-05-21	2017-11-19
WEINSCHTEL	3 dB Attenuator	N/A	N/A	2017-11-19	2018-05-21
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03 -101746-zn	2017-08-17	2018-08-17
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2016-12-05	2017-12-05
Ducommun technologies	RF Cable	RG-214	3	2017-05-22	2017-11-22

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

**Applicable Standard**

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

**Result**

**Calculated Formulary:**

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Turn up Power		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	2	1.58	5.5	3.55	20	0.001	1

Note: To maintain compliance with the FCC’s RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result: Compliance**

---

## **FCC §15.203 – ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 2 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliance.

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS**

**Applicable Standard**

FCC §15.207(a)

**EUT Setup**



- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

**EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

**Test Procedure**

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL,  $U_{(Lm)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

## Test Data


### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Kobe Li on 2017-11-09.*


*EUT operation mode: Transmitting*

**AC 120V/60 Hz, Line**

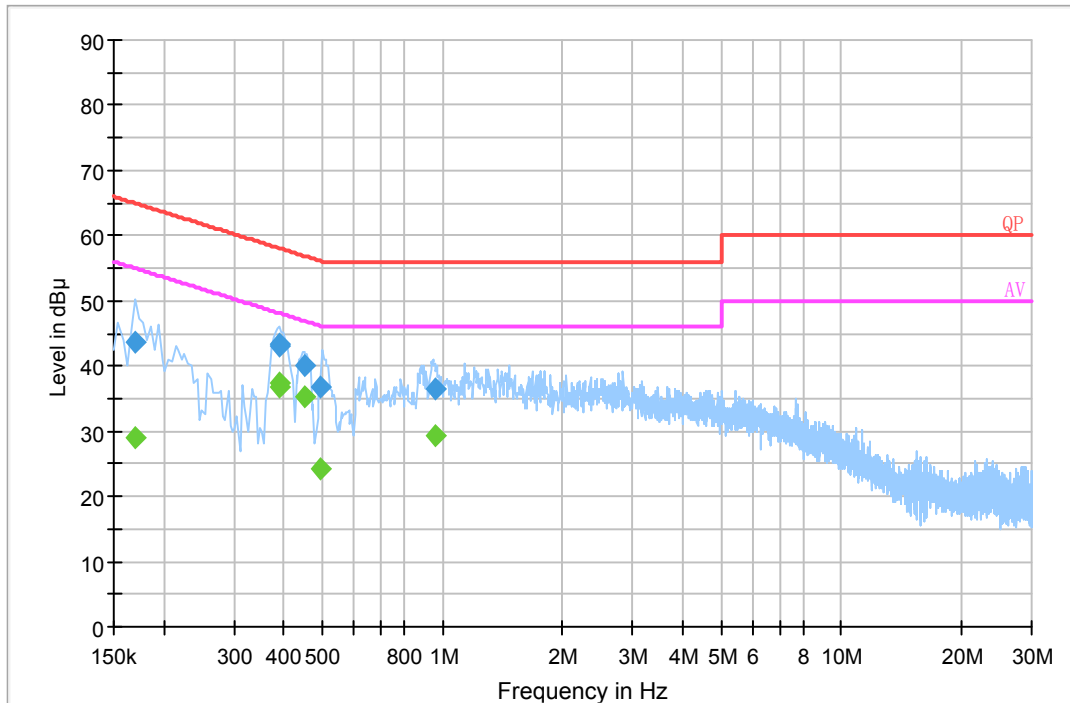

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.169500	43.5	20.2	65.0	21.5	QP
0.388150	43.3	20.2	58.1	14.8	QP
0.391790	43.2	20.2	58.0	14.8	QP
0.451250	40.1	20.2	56.9	16.8	QP
0.494470	36.7	20.2	56.1	19.4	QP
0.964250	36.5	20.1	56.0	19.5	QP
0.169500	29.1	20.2	55.0	25.9	Ave.
0.388150	36.7	20.2	48.1	11.4	Ave.
0.391790	37.4	20.2	48.0	10.6	Ave.
0.451250	35.2	20.2	46.9	11.7	Ave.
0.494470	24.1	20.2	46.1	22	Ave.
0.964250	29.2	20.1	46.0	16.8	Ave.

**AC 120V/60 Hz, Neutral**

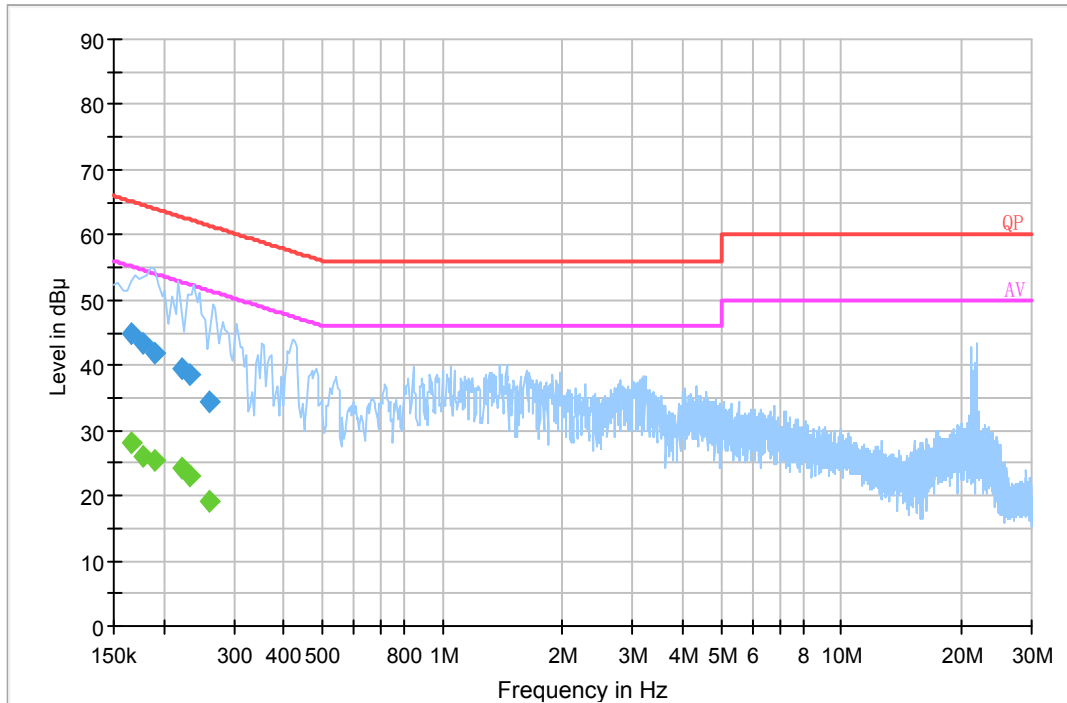

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.165500	44.8	20.2	65.2	20.4	QP
0.177500	43.4	20.2	64.6	21.2	QP
0.189500	41.9	20.2	64.1	22.1	QP
0.221500	39.4	20.2	62.8	23.4	QP
0.233500	38.4	20.2	62.3	23.9	QP
0.261500	34.3	20.2	61.4	27.1	QP
0.165500	28.0	20.2	55.2	27.2	Ave.
0.177500	26.1	20.2	54.6	28.5	Ave.
0.189500	25.4	20.2	54.1	28.7	Ave.
0.221500	24.2	20.2	52.8	28.6	Ave.
0.233500	23.1	20.2	52.3	29.2	Ave.
0.261500	19.1	20.2	51.4	32.3	Ave.

**Note:**

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude




**FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**

**Applicable Standard**


FCC §15.205; §15.209; §15.247(d)

**EUT Setup**

**Below 1 GHz:**

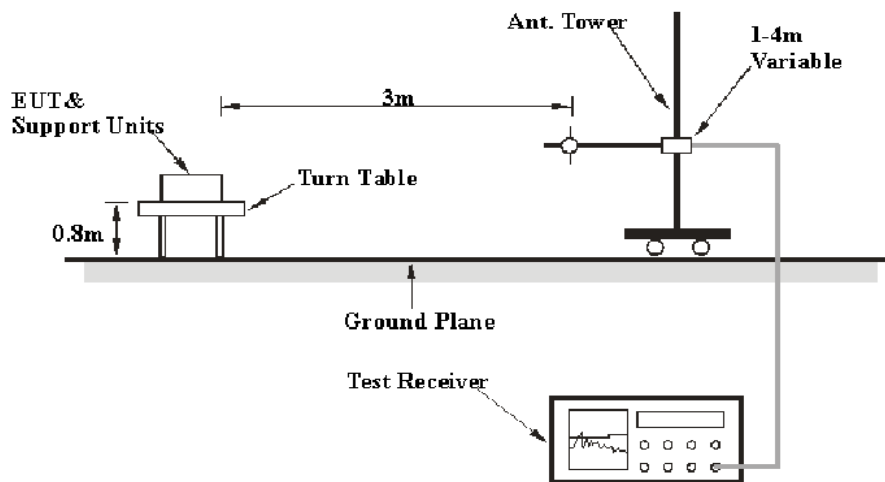

**Above 1GHz:**

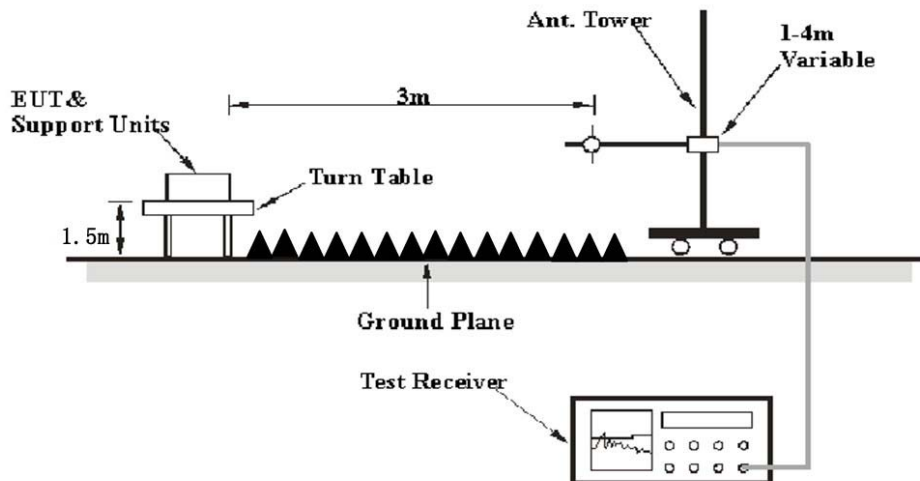

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Ave.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

In BAACL,  $U_{(L_m)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

## Test Data


### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Kobe Li on 2017-11-06 and 2017-11-07.*

*EUT operation mode: Transmitting(Scan with GFSK,  $\pi/4$ -DQPSK, 8-DPSK mode, the worst case was GFSK mode)*

30 MHz~1 GHz

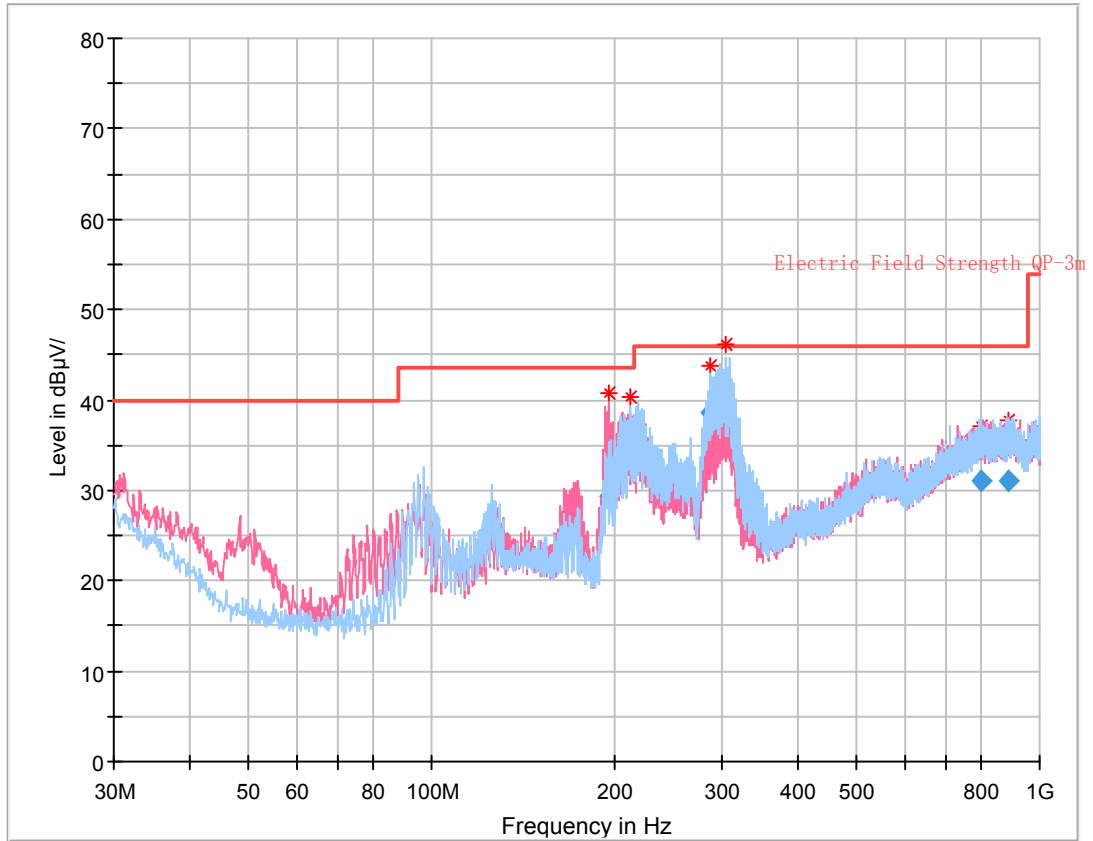

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
195.658250	29.24	100.0	V	0.0	-5.3	43.50	14.26
212.227125	33.54	184.0	H	223.0	-6.2	43.50	9.96
288.031250	38.54	130.0	H	299.0	-3.1	46.00	7.46
305.369625	39.92	108.0	H	100.0	-2.9	46.00	6.08
803.766250	31.12	354.0	H	145.0	9.0	46.00	14.88
885.469625	31.03	117.0	H	253.0	9.5	46.00	14.97

1 GHz - 25 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	(PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
<b>Low Channel (2402 MHz)</b>									
2402.00	65.05	PK	232	2.2	H	33.92	98.97	/	/
2402.00	54.46	Ave.	232	2.2	H	33.92	88.38	/	/
2402.00	60.24	PK	288	2.1	V	33.92	94.16	/	/
2402.00	49.91	Ave.	288	2.1	V	33.92	83.83	/	/
2347.67	26.58	PK	164	1.1	H	33.83	60.41	74	13.59
2347.67	13.11	Ave.	164	1.1	H	33.83	46.94	54	7.06
2370.92	27.26	PK	357	2.4	H	33.92	61.18	74	12.82
2370.92	13.45	Ave.	357	2.4	H	33.92	47.37	54	6.63
2485.28	27.31	PK	164	1.7	H	34.08	61.39	74	12.61
2485.28	13.56	Ave.	164	1.7	H	34.08	47.64	54	6.36
4804.00	46.47	PK	313	1.5	H	5.84	52.31	74	21.69
4804.00	33.48	Ave.	313	1.5	H	5.84	39.32	54	14.68
<b>Middle Channel (2441 MHz)</b>									
2441.00	68.67	PK	145	2.4	H	33.92	102.59	/	/
2441.00	57.73	Ave.	145	2.4	H	33.92	91.65	/	/
2441.00	64.82	PK	306	2.2	V	33.92	98.74	/	/
2441.00	54.59	Ave.	306	2.2	V	33.92	88.51	/	/
2377.65	27.16	PK	77	1.4	H	33.92	61.08	74	12.92
2377.65	13.34	Ave.	77	1.4	H	33.92	47.26	54	6.74
2385.67	27.51	PK	256	1.0	H	33.92	61.43	74	12.57
2385.67	13.72	Ave.	256	1.0	H	33.92	47.64	54	6.36
2488.16	26.89	PK	218	2.2	H	34.08	60.97	74	13.03
2488.16	13.22	Ave.	218	2.2	H	34.08	47.30	54	6.70
4882.00	45.94	PK	329	1.5	H	6.21	52.15	74	21.85
4882.00	32.06	Ave.	329	1.5	H	6.21	38.27	54	15.73

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	(PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
<b>High Channel (2480 MHz)</b>									
2480.00	68.45	PK	194	1.5	H	34.08	102.53	/	/
2480.00	58.08	Ave.	194	1.5	H	34.08	92.16	/	/
2480.00	65.65	PK	288	1.2	V	34.08	99.73	/	/
2480.00	54.63	Ave.	288	1.2	V	34.08	88.71	/	/
2325.71	27.23	PK	24	1.8	H	33.83	61.06	74	12.94
2325.71	13.46	Ave.	24	1.8	H	33.83	47.29	54	6.71
2483.53	31.25	PK	106	1.2	H	34.08	65.33	74	8.67
2483.53	16.08	Ave.	106	1.2	H	34.08	50.16	54	3.84
2483.69	30.64	PK	23	2.4	H	34.08	64.72	74	9.28
2483.69	15.52	Ave.	23	2.4	H	34.08	49.60	54	4.40
4960.00	43.55	PK	254	1.2	H	7.82	51.37	74	22.63
4960.00	30.38	Ave.	254	1.2	H	7.82	38.20	54	15.80

Note:


Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit was not recorded.


### High channel- H (1-18 GHz)

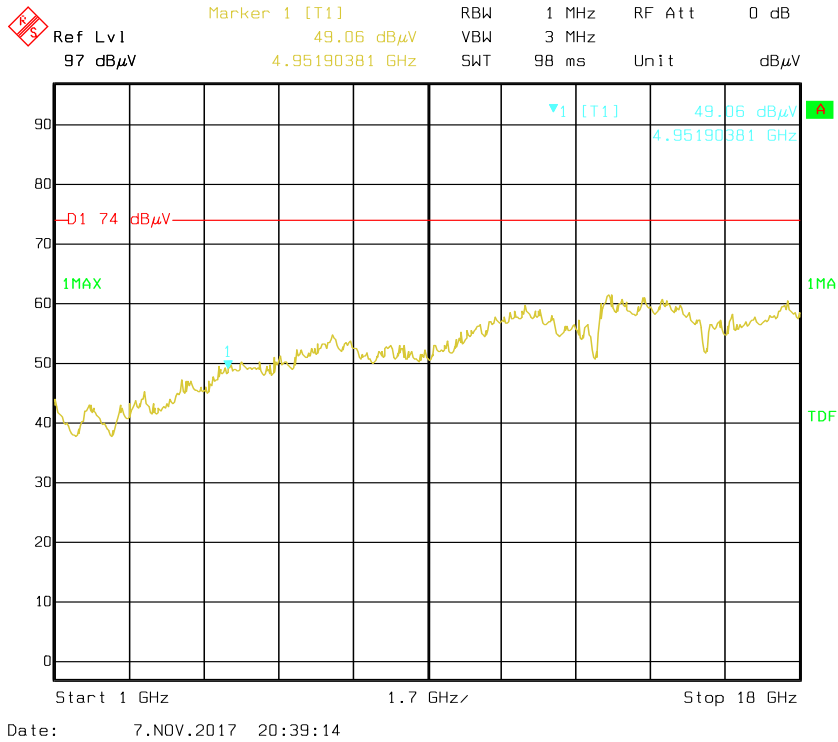


### High channel-H (18-25 GHz)

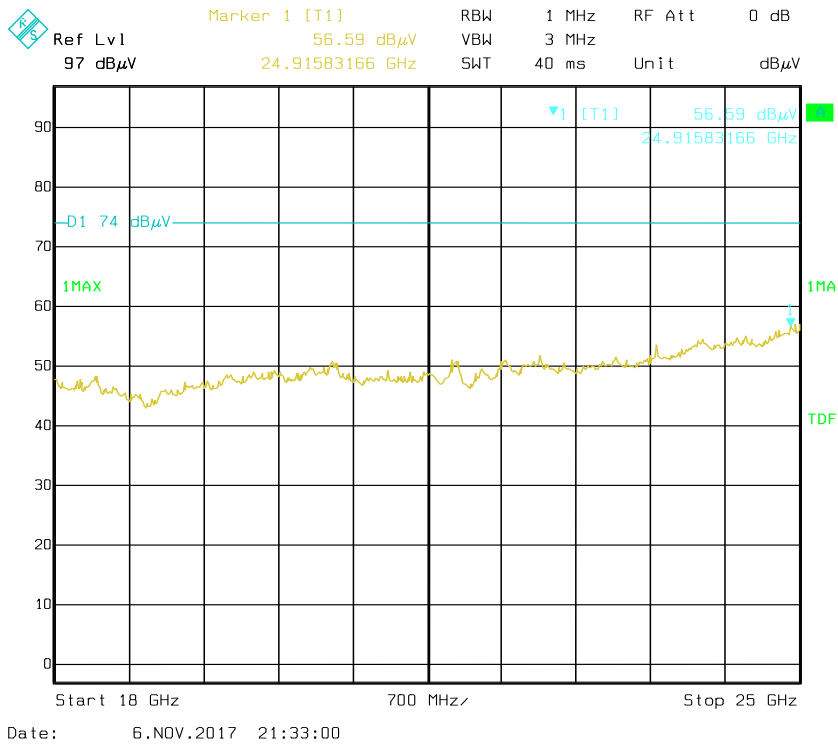

### High channel-V (1-18 GHz)

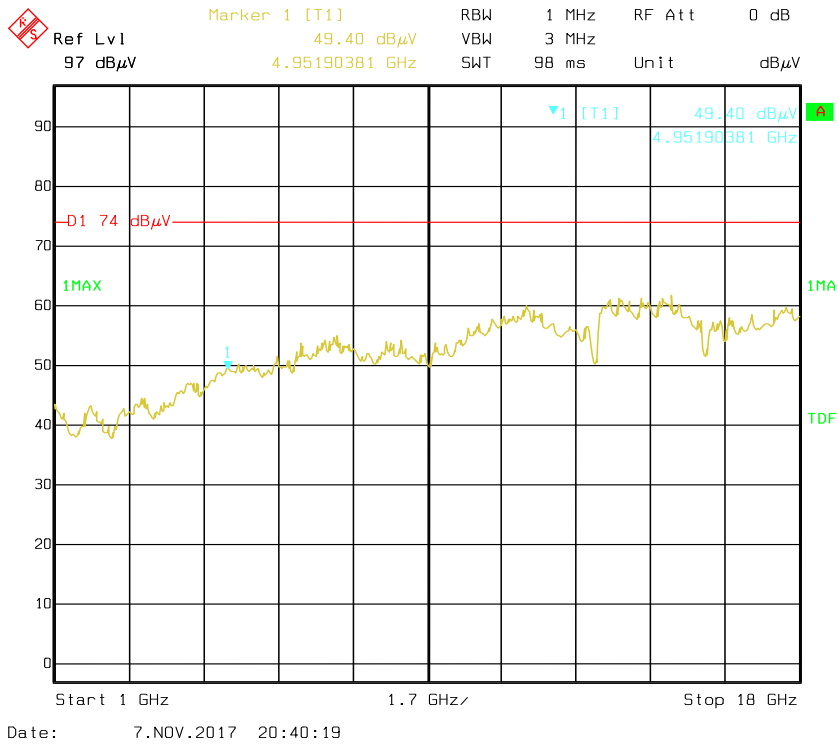

### High channel-V (18-25 GHz)

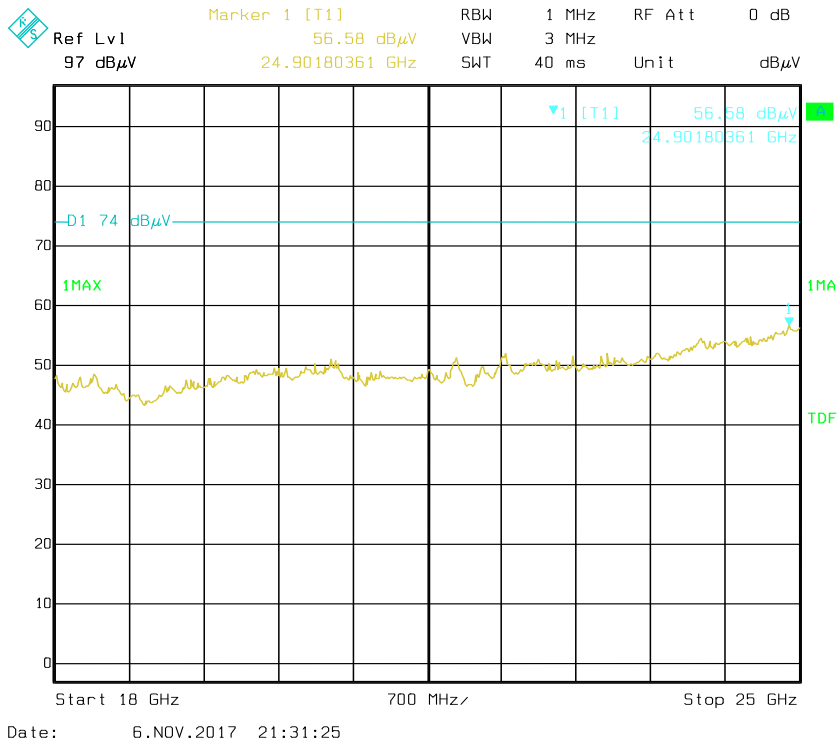



## **FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**

### **Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### **Test Procedure**

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Kobe Li on 2017-11-06.*


*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table and plots*

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	≥Limit (MHz)	Result
<b>BDR (GFSK)</b>	Low	2402	0.999	0.617	Pass
	Adjacent	2403			
	Middle	2441	1.003	0.591	Pass
	Adjacent	2442			
	High	2480	0.999	0.613	Pass
	Adjacent	2479			
<b>EDR (π/4-DQPSK)</b>	Low	2402	0.999	0.813	Pass
	Adjacent	2403			
	Middle	2441	1.003	0.819	Pass
	Adjacent	2442			
	High	2480	0.999	0.816	Pass
	Adjacent	2479			
<b>EDR (8DPSK)</b>	Low	2402	0.999	0.807	Pass
	Adjacent	2403			
	Middle	2441	0.999	0.811	Pass
	Adjacent	2442			
	High	2480	0.999	0.807	Pass
	Adjacent	2479			


Note: Limit = 20 dB bandwidth \*2/3

**BDR (GFSK): Low Channel**

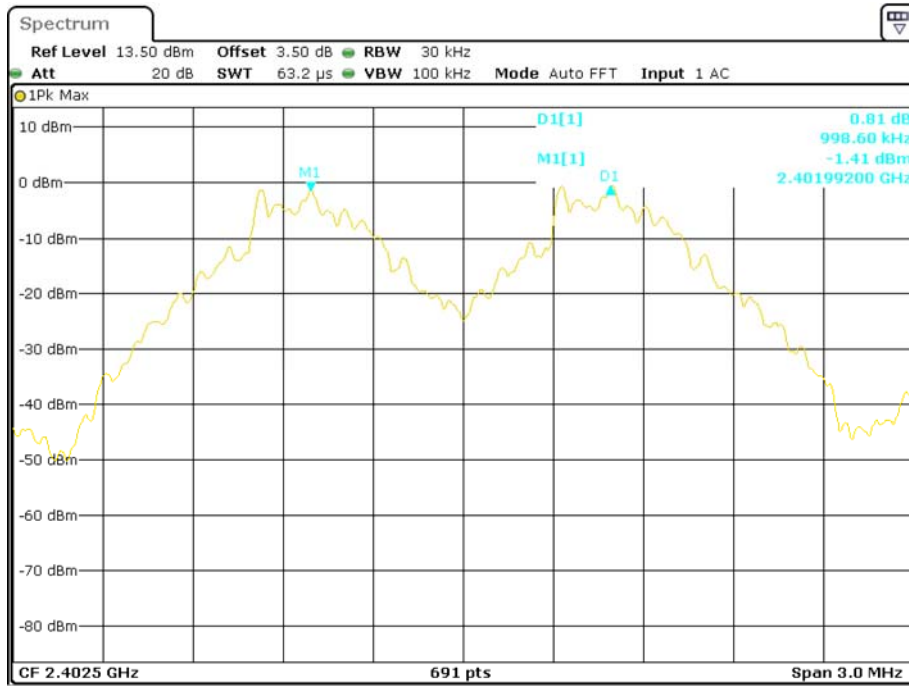


Date: 6.NOV.2017 22:16:26

**BDR (GFSK): Middle Channel**

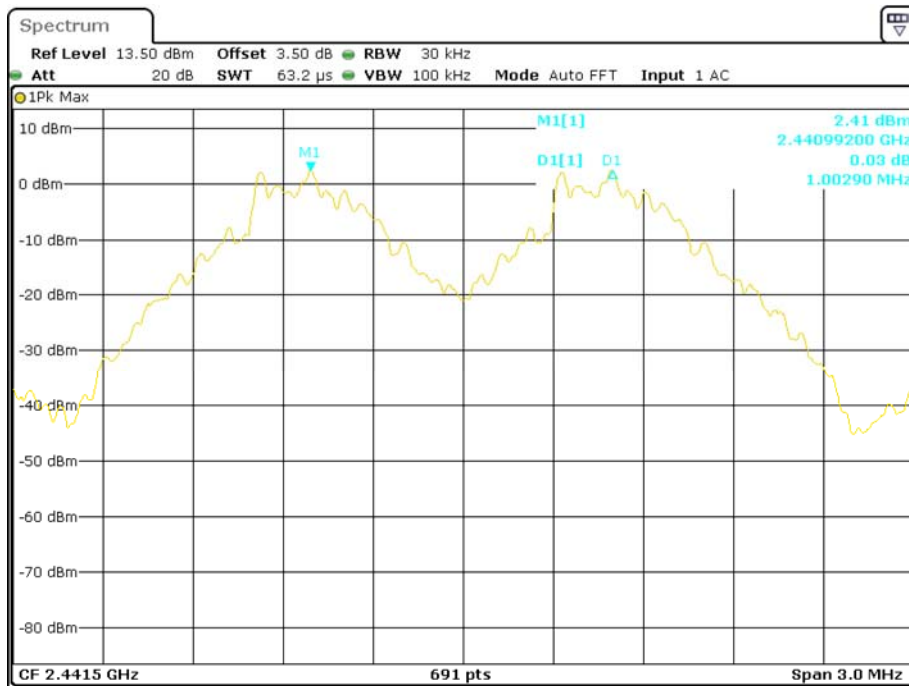


Date: 6.NOV.2017 22:17:17

**BDR (GFSK): High Channel**

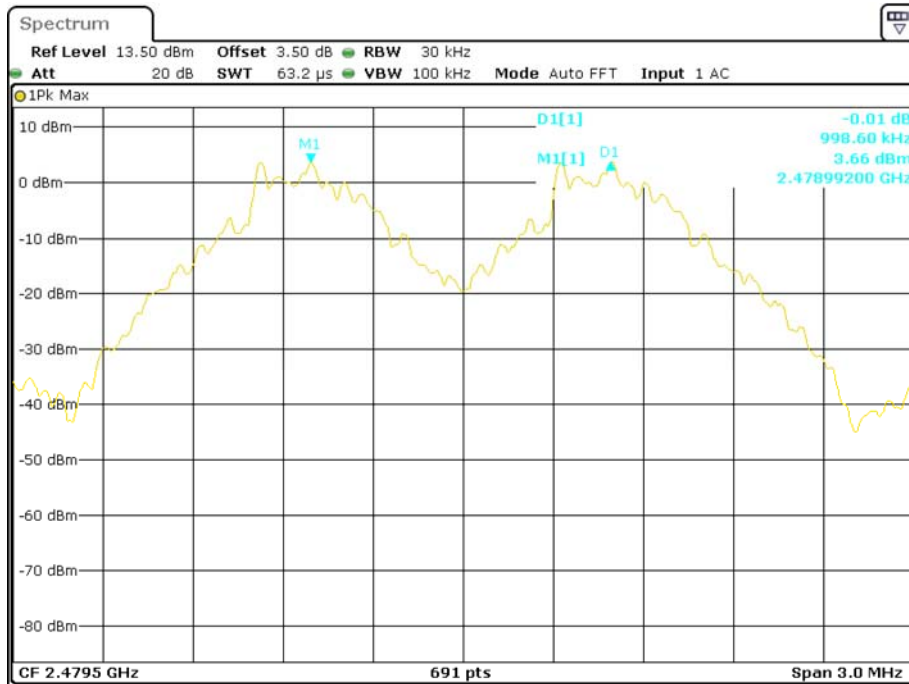


Date: 6.NOV.2017 22:17:59

**EDR ( $\pi/4$ -DQPSK): Low Channel**

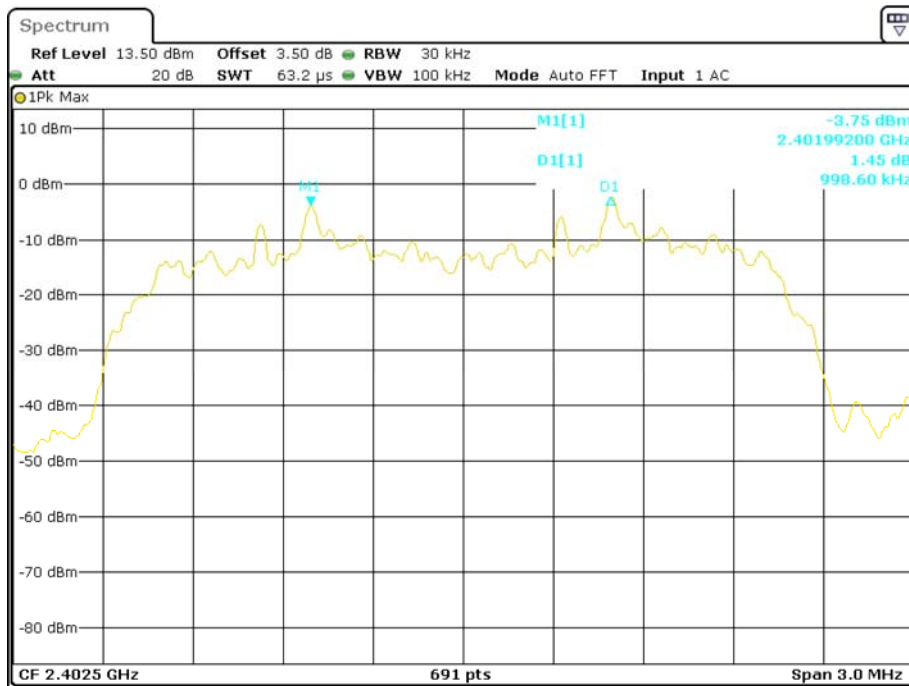


Date: 6.NOV.2017 22:20:04

**EDR ( $\pi/4$ -DQPSK): Middle Channel**

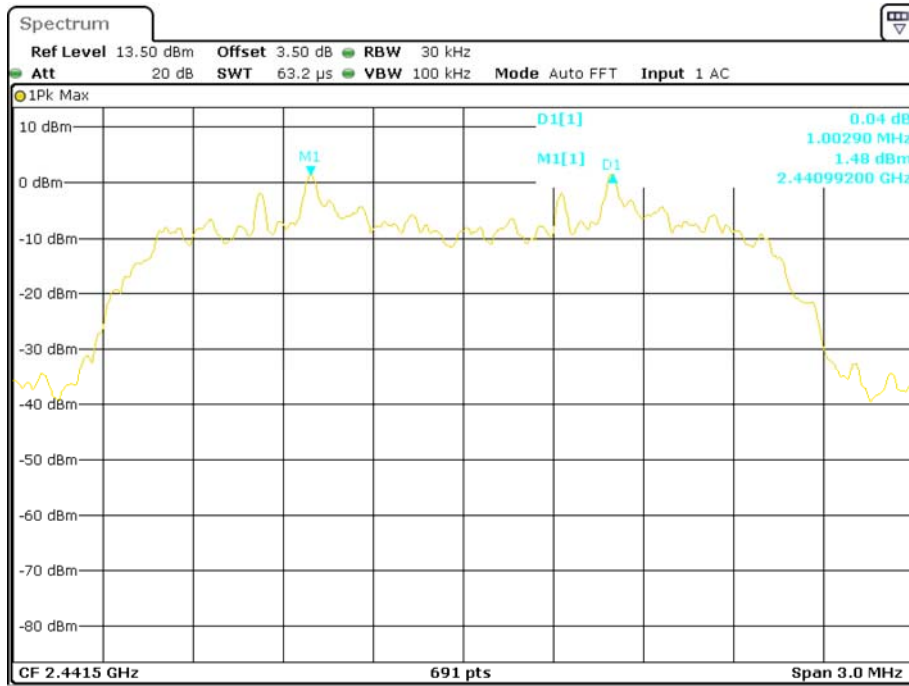


Date: 6.NOV.2017 22:19:27

**EDR ( $\pi/4$ -DQPSK): High Channel**

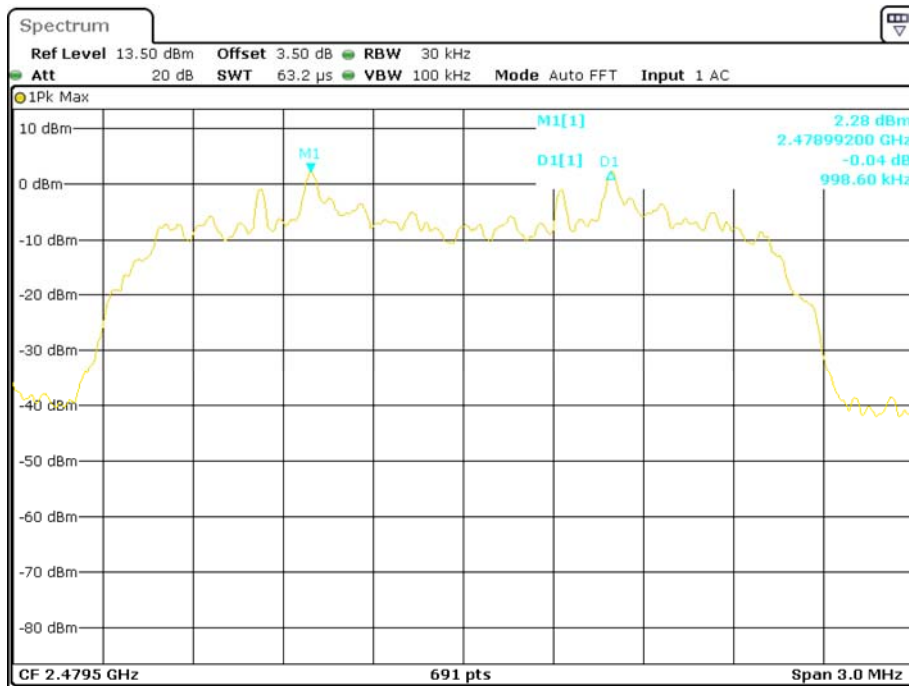


Date: 6.NOV.2017 22:18:49

**EDR (8DPSK): Low Channel**

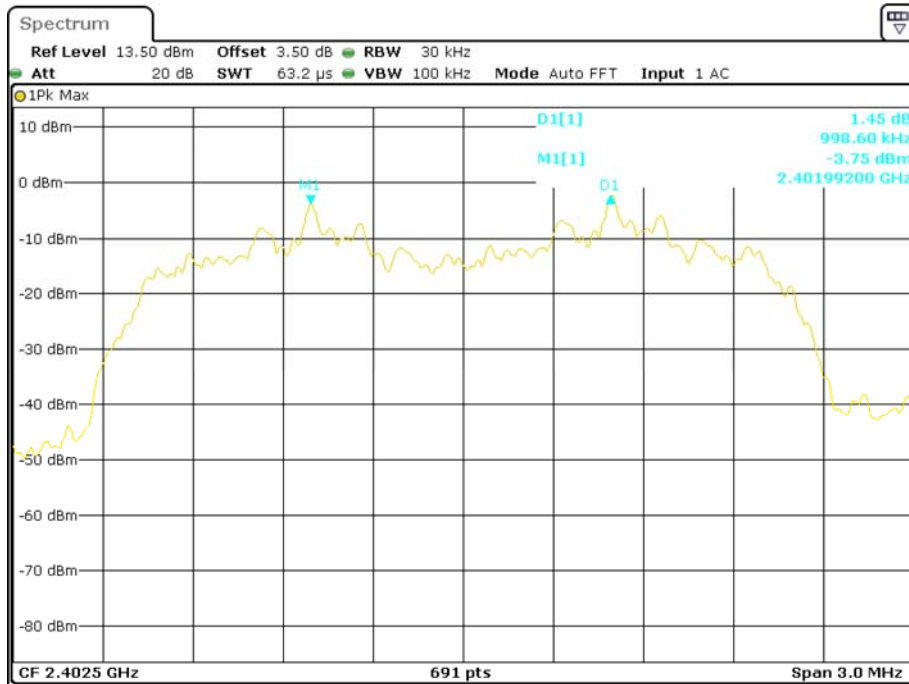


Date: 6.NOV.2017 22:20:51

**EDR (8DPSK): Middle Channel**

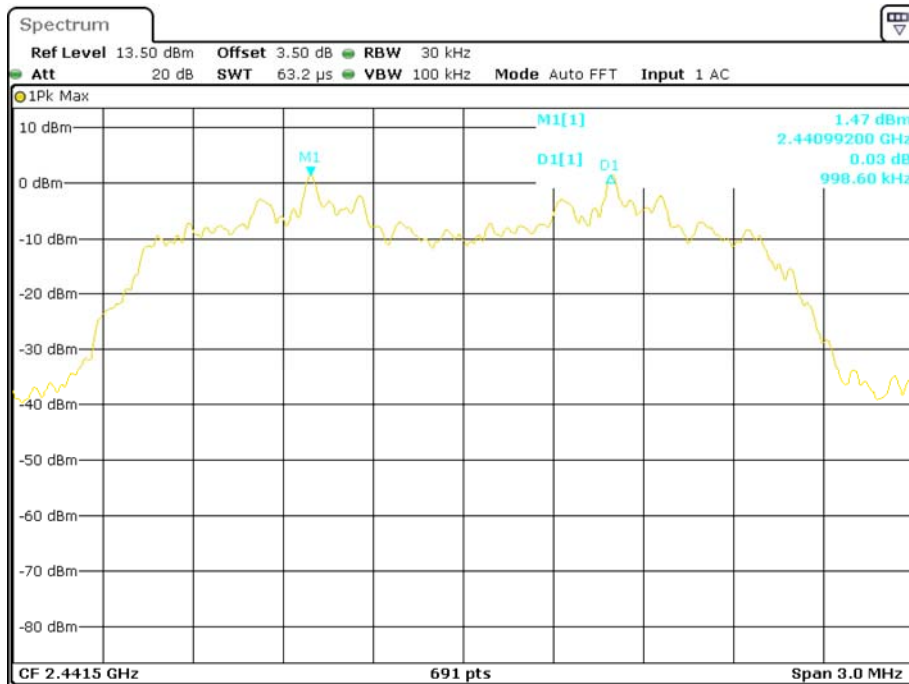

Date: 6.NOV.2017 22:21:43

### EDR (8DPSK): High Channel

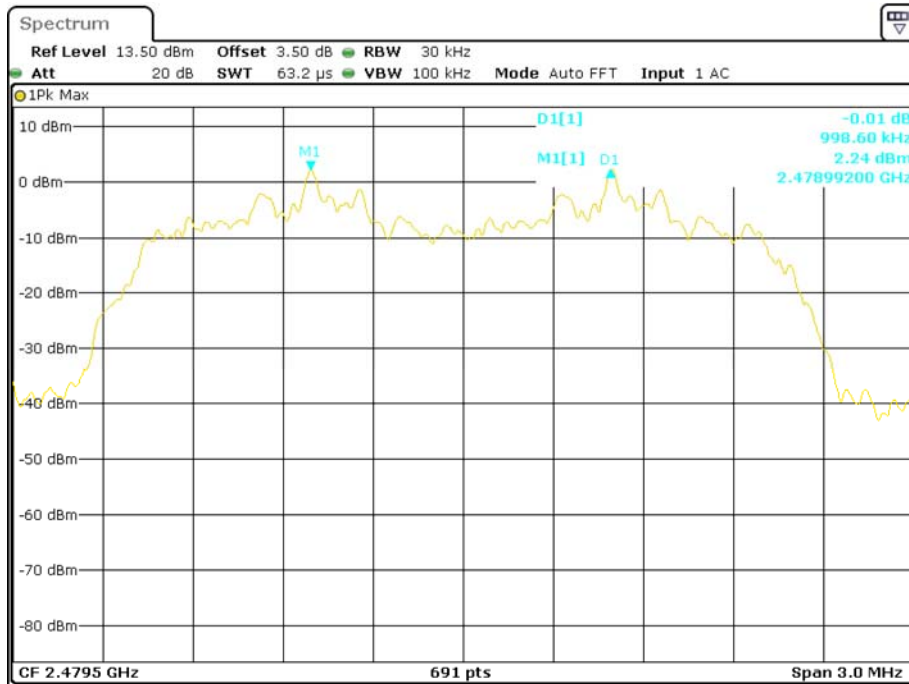

Date: 6.NOV.2017 22:22:30

## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Kobe Li on 2017-11-06*


*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table and plots*




Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
<b>BDR (GFSK)</b>	Low	2402	0.925
	Middle	2441	0.886
	High	2480	0.920
<b>EDR (<math>\pi/4</math>-DQPSK)</b>	Low	2402	1.220
	Middle	2441	1.229
	High	2480	1.224
<b>EDR (8DPSK)</b>	Low	2402	1.211
	Middle	2441	1.216
	High	2480	1.211

**BDR (GFSK): Low Channel**

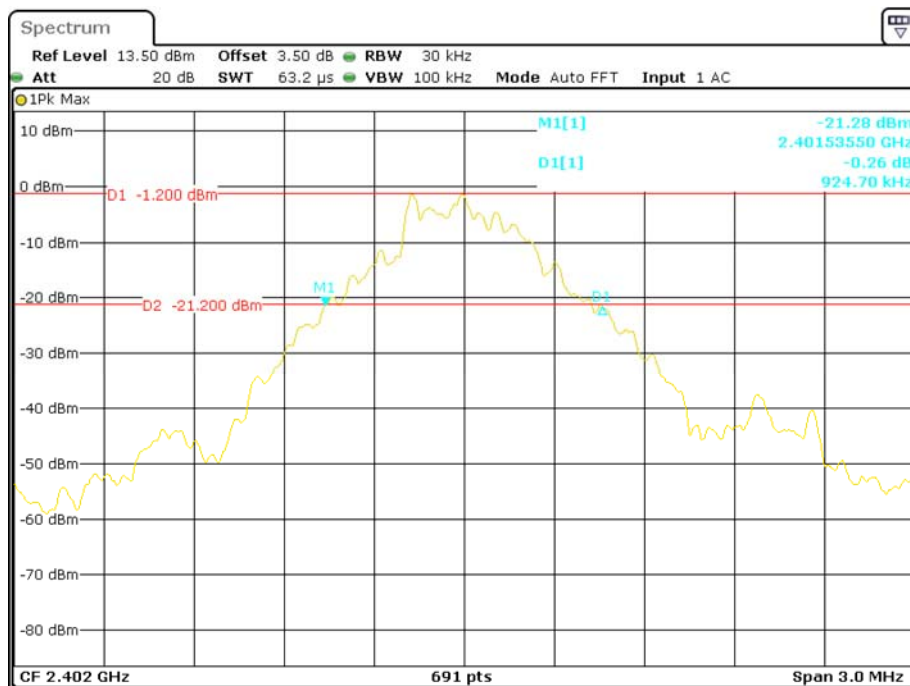


Date: 6.NOV.2017 22:11:42

### BDR (GFSK): Middle Channel

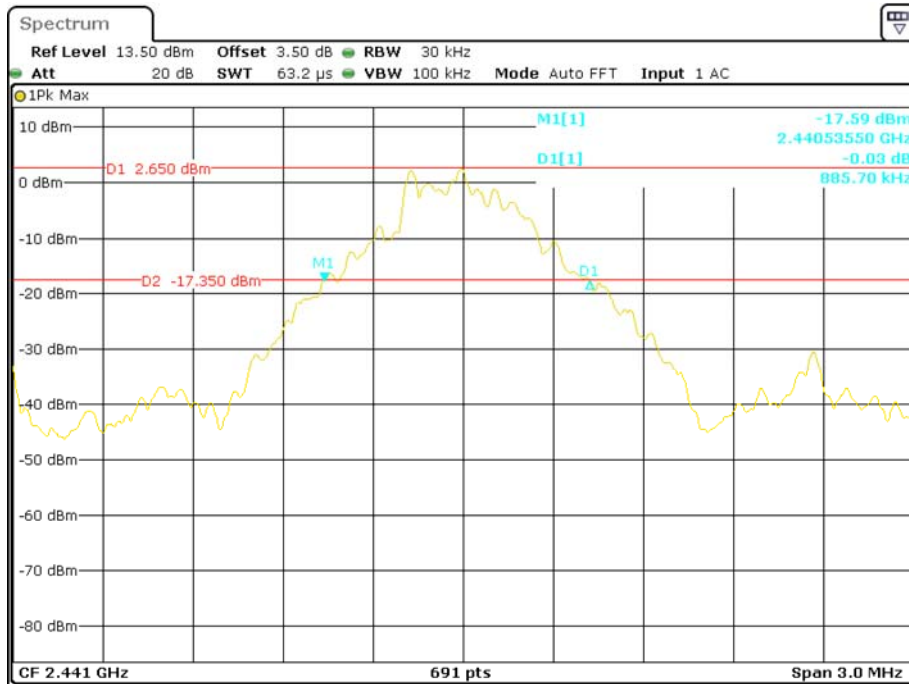


Date: 6.NOV.2017 22:13:35

### BDR (GFSK): High Channel

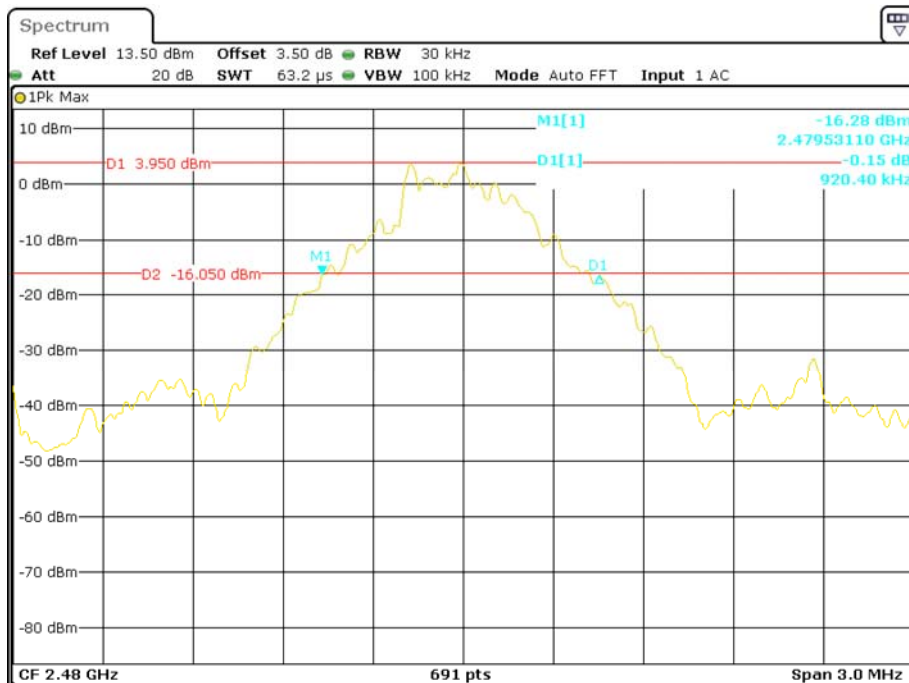


Date: 6.NOV.2017 22:15:11

### EDR ( $\pi/4$ -DQPSK): Low Channel

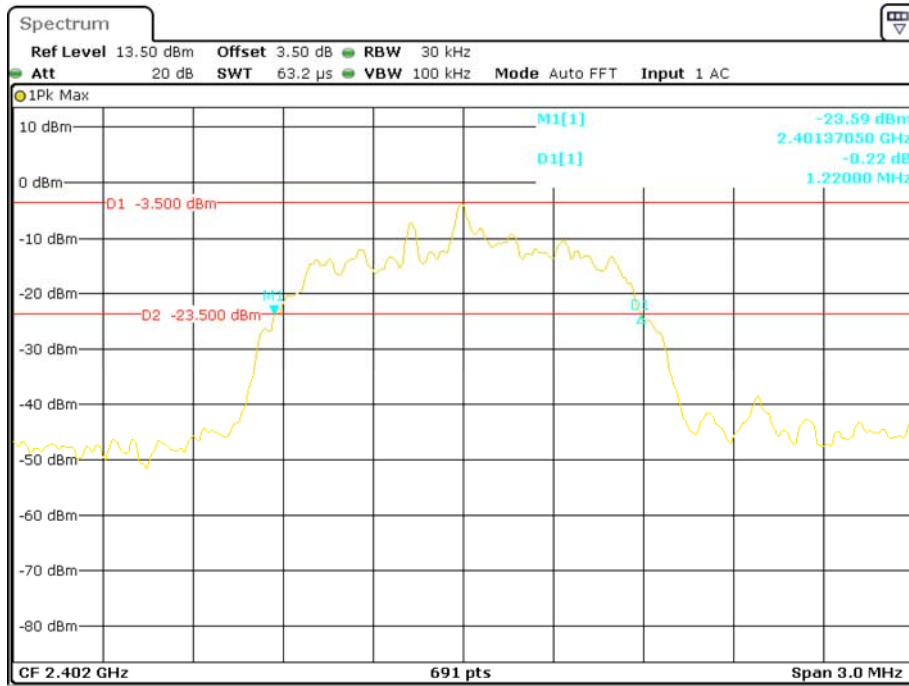


Date: 6.NOV.2017 22:09:44

### EDR ( $\pi/4$ -DQPSK): Middle Channel

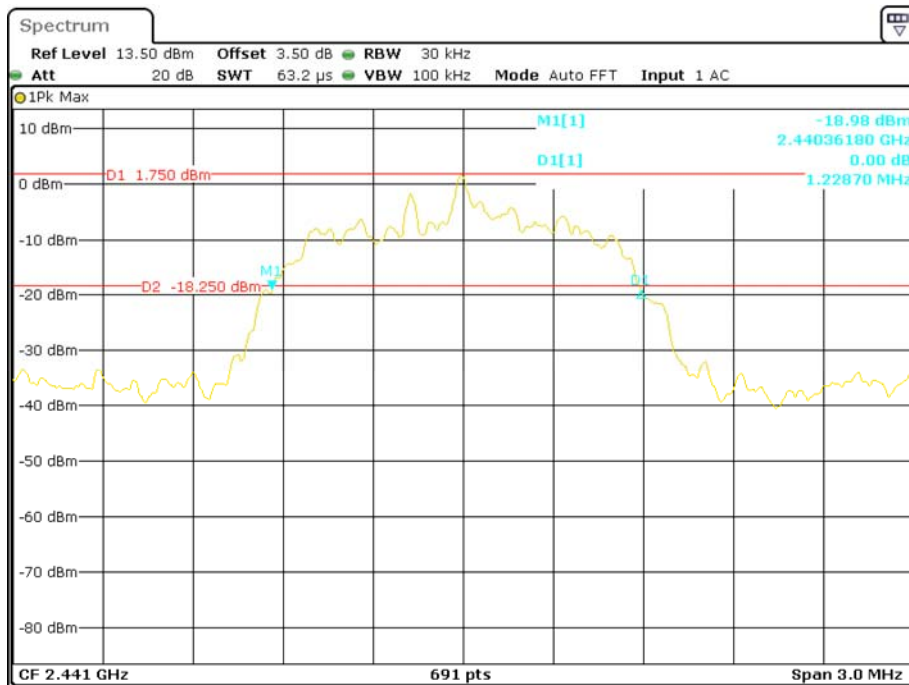


Date: 6.NOV.2017 22:08:35

### EDR ( $\pi/4$ -DQPSK): High Channel

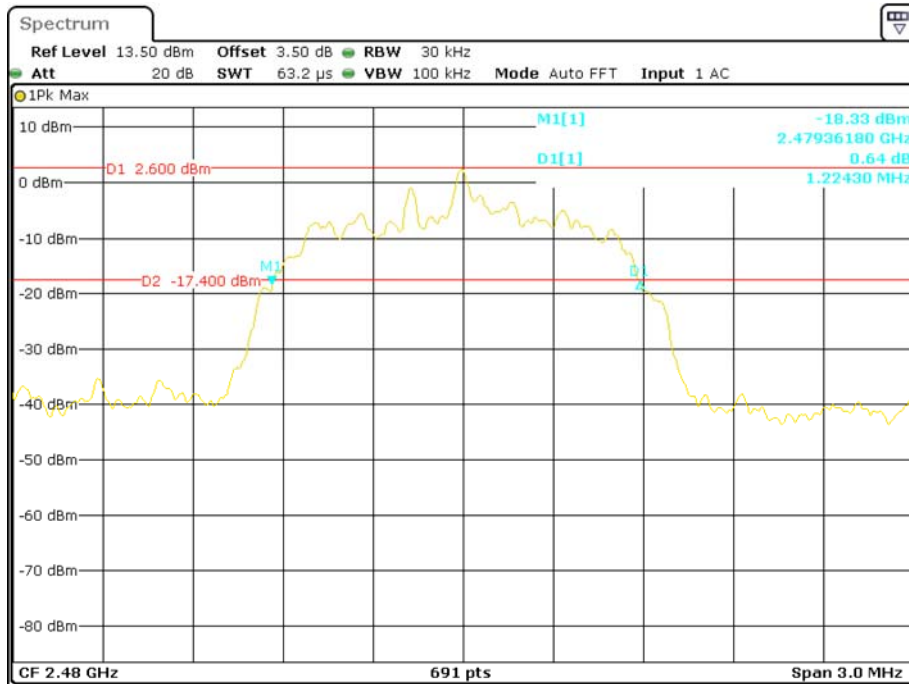


Date: 6.NOV.2017 22:06:46

### EDR (8DPSK): Low Channel

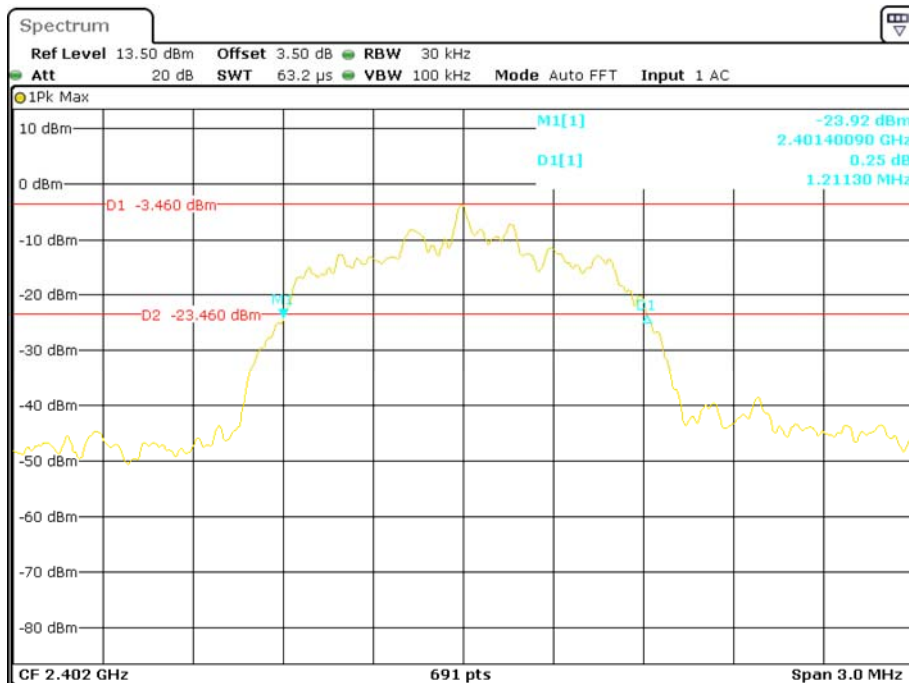


Date: 6.NOV.2017 22:01:04

**EDR (8DPSK): Middle Channel**

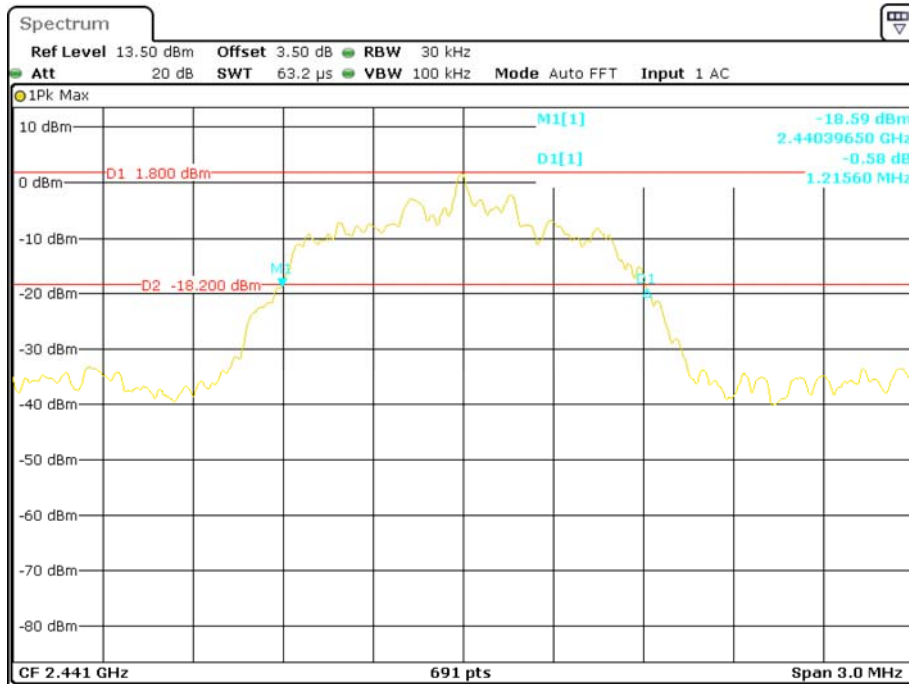

Date: 6.NOV.2017 22:03:05

**EDR (8DPSK): High Channel**

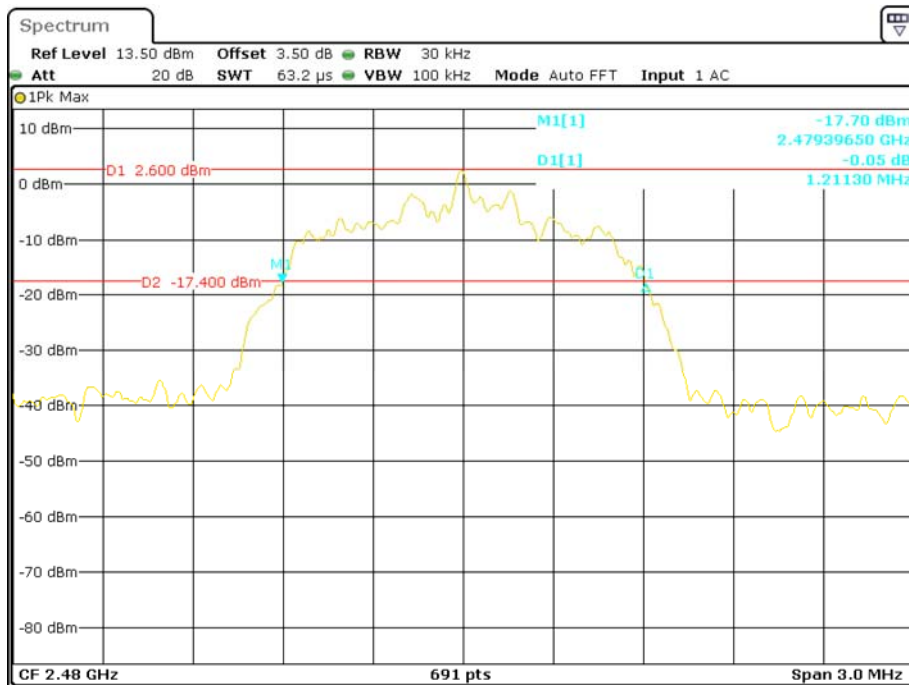

Date: 6.NOV.2017 22:05:17

**FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST****Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa


*The testing was performed by Kobe Li on 2017-11-06.*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table and plots*


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

**BDR (GFSK): Number of Hopping Channels**

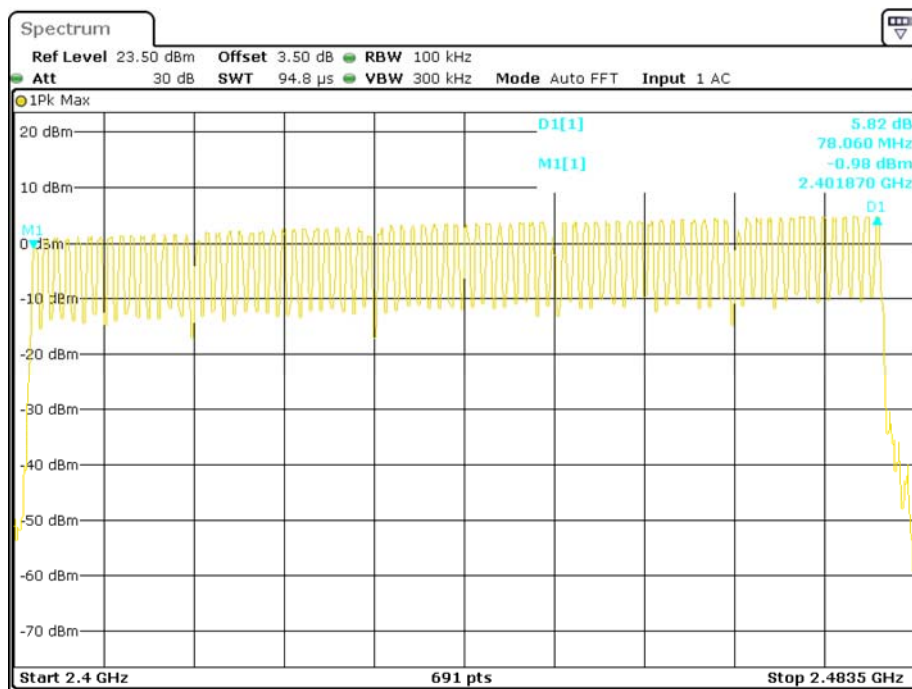


Date: 6.NOV.2017 22:35:43

### EDR ( $\pi/4$ -DQPSK): Number of Hopping Channels

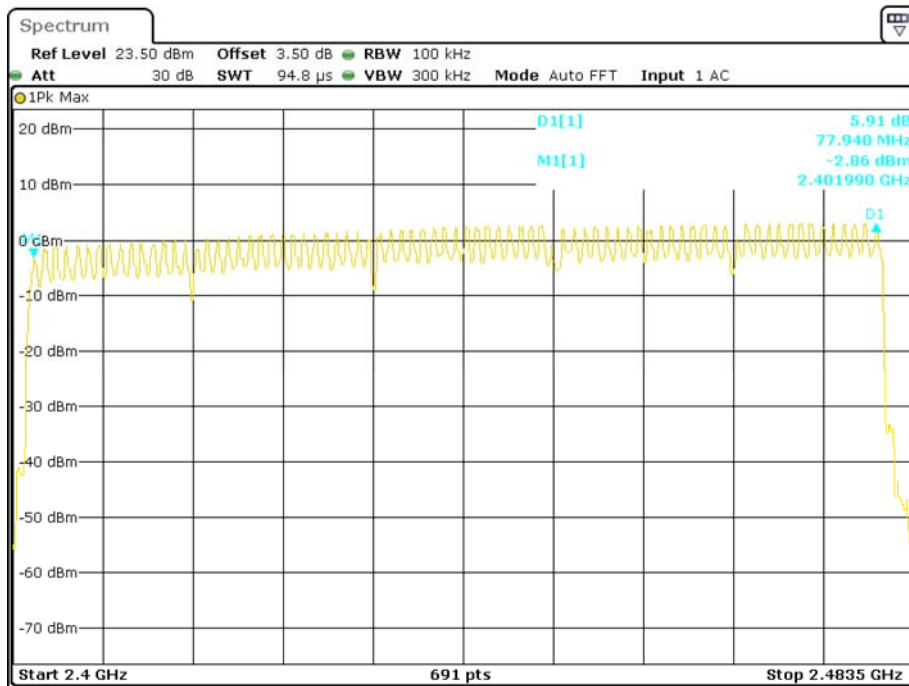

Date: 6.NOV.2017 22:40:37

### EDR (8DPSK): Number of Hopping Channels

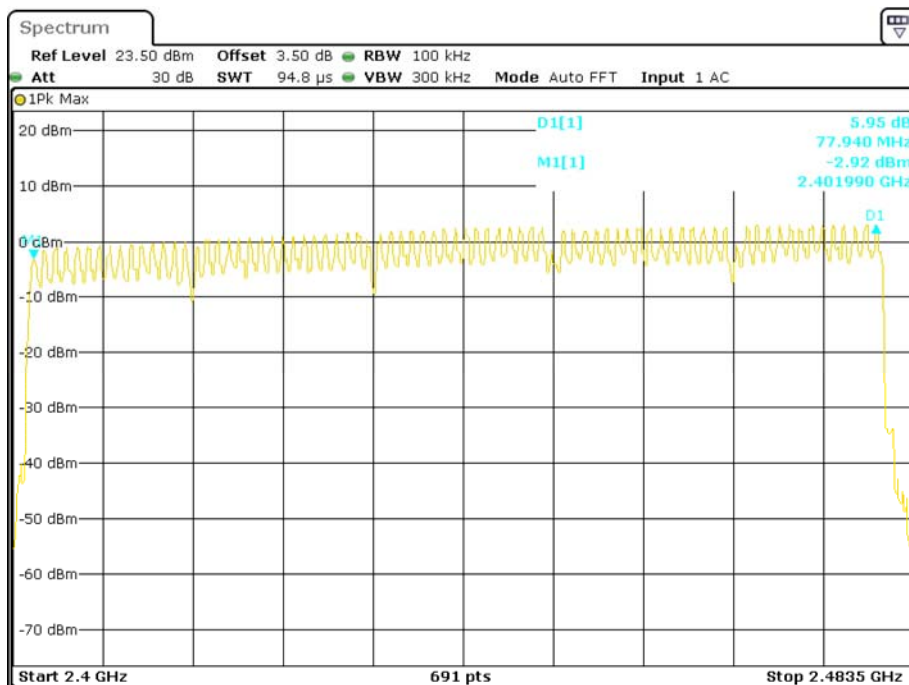

Date: 6.NOV.2017 22:44:23



**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW  $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa


*The testing was performed by Kobe Li on 2017-11-06 and 2017-11-20.*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table and plots*


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result	
BDR (GFSK)	DH 1	Low	0.433	0.139	0.4	Pass	
		Middle	0.435	0.139	0.4	Pass	
		High	0.441	0.141	0.4	Pass	
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	DH 3	Low	1.703	0.272	0.4	Pass	
		Middle	1.703	0.272	0.4	Pass	
		High	1.697	0.272	0.4	Pass	
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	DH 5	Low	2.951	0.315	0.4	Pass	
		Middle	2.958	0.316	0.4	Pass	
		High	2.972	0.317	0.4	Pass	
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						
	EDR ( $\pi/4$ -DQPSK)	2DH 1	Low	0.449	0.144	0.4	Pass
Middle			0.449	0.144	0.4	Pass	
High			0.449	0.144	0.4	Pass	
Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S							
2DH 3		Low	1.710	0.274	0.4	Pass	
		Middle	1.714	0.274	0.4	Pass	
		High	1.706	0.273	0.4	Pass	
Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S							
2DH 5		Low	2.980	0.318	0.4	Pass	
		Middle	2.972	0.317	0.4	Pass	
		High	2.935	0.313	0.4	Pass	
Note:2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S							
EDR (8DPSK)		3DH 1	Low	0.449	0.144	0.4	Pass
	Middle		0.449	0.144	0.4	Pass	
	High		0.449	0.144	0.4	Pass	
	Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	3DH 3	Low	1.710	0.274	0.4	Pass	
		Middle	1.714	0.274	0.4	Pass	
		High	1.719	0.275	0.4	Pass	
	Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	3DH 5	Low	2.980	0.318	0.4	Pass	
		Middle	2.980	0.318	0.4	Pass	
		High	2.980	0.318	0.4	Pass	
	Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						

**BDR (GFSK):  
Pulse time, Low Channel, DH1**

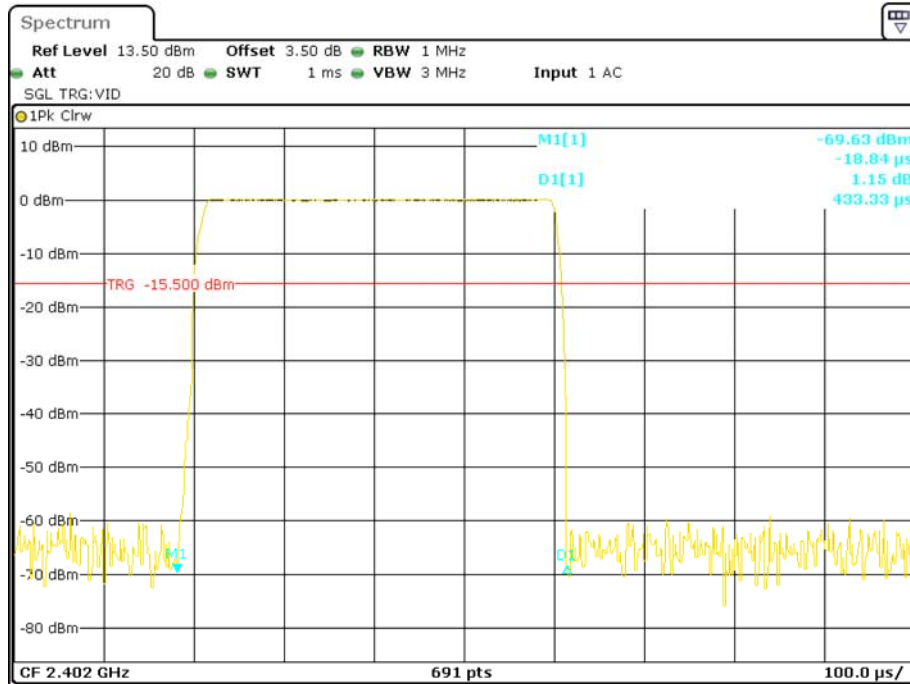


Date: 6.NOV.2017 22:56:32

**Pulse time, Middle Channel, DH1**

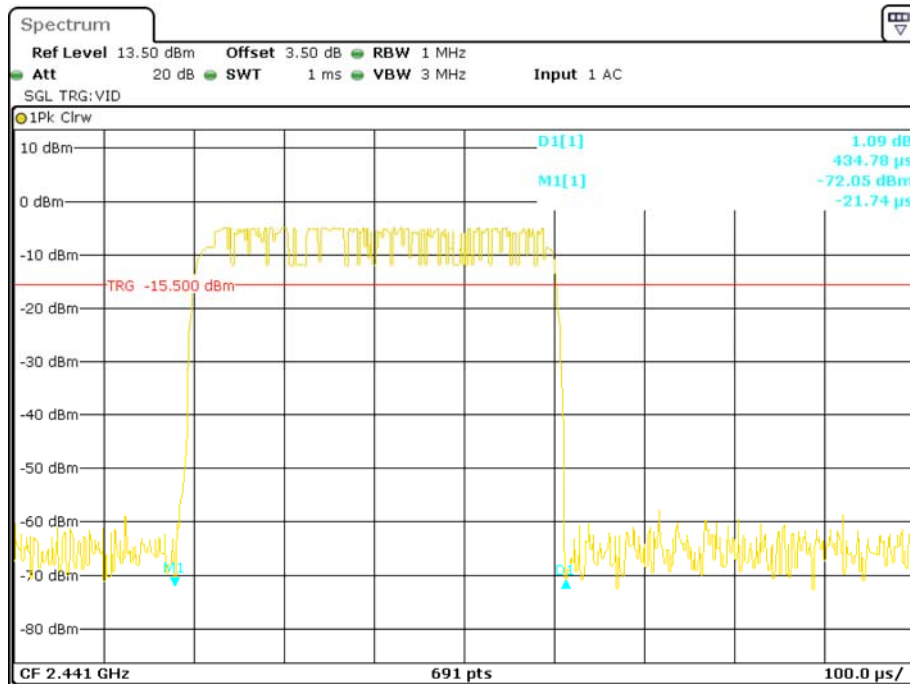


Date: 6.NOV.2017 22:55:46

Pulse time, High Channel, DH1

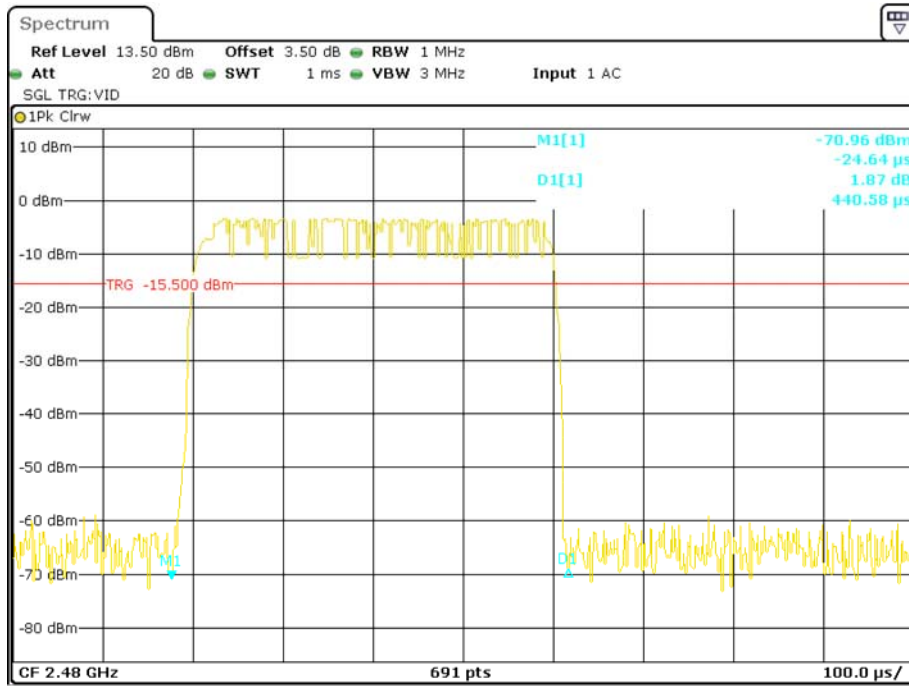


Date: 6.NOV.2017 22:54:09

Pulse time, Low Channel, DH3

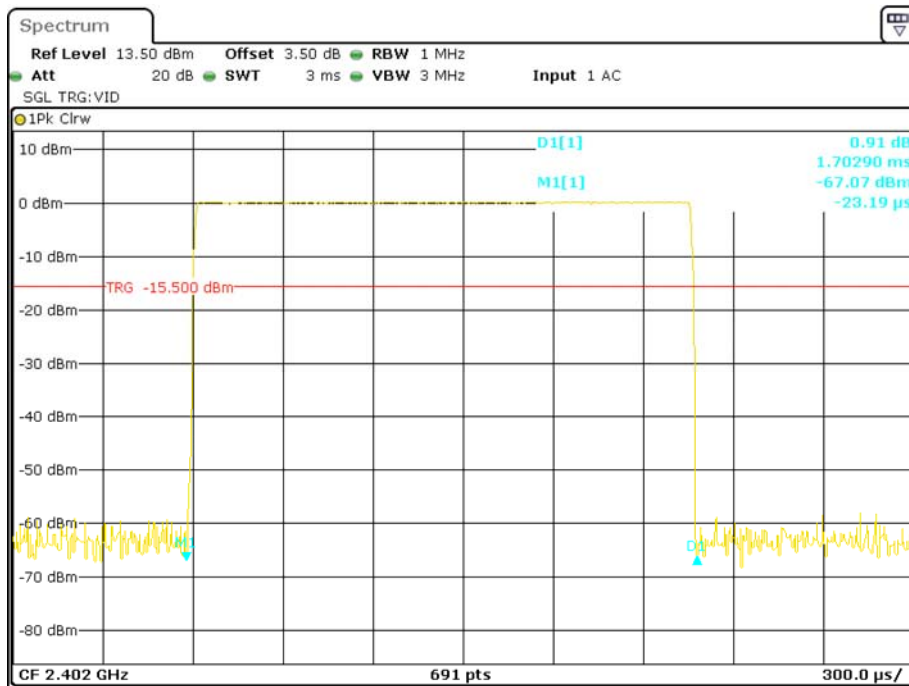


Date: 6.NOV.2017 22:58:00

### Pulse time, Middle Channel, DH3

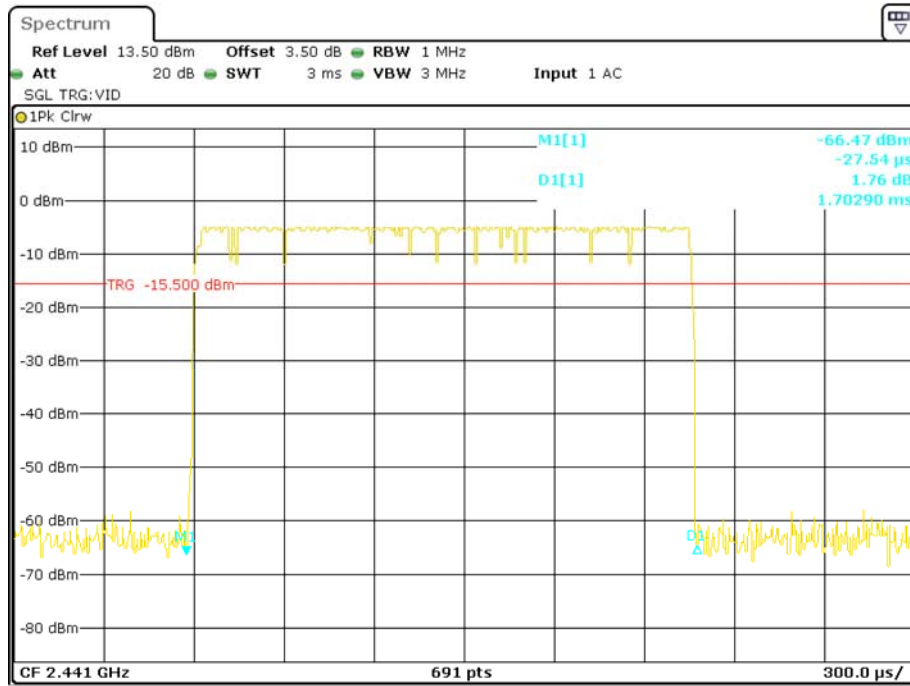


Date: 6.NOV.2017 22:58:38

### Pulse time, High Channel, DH3

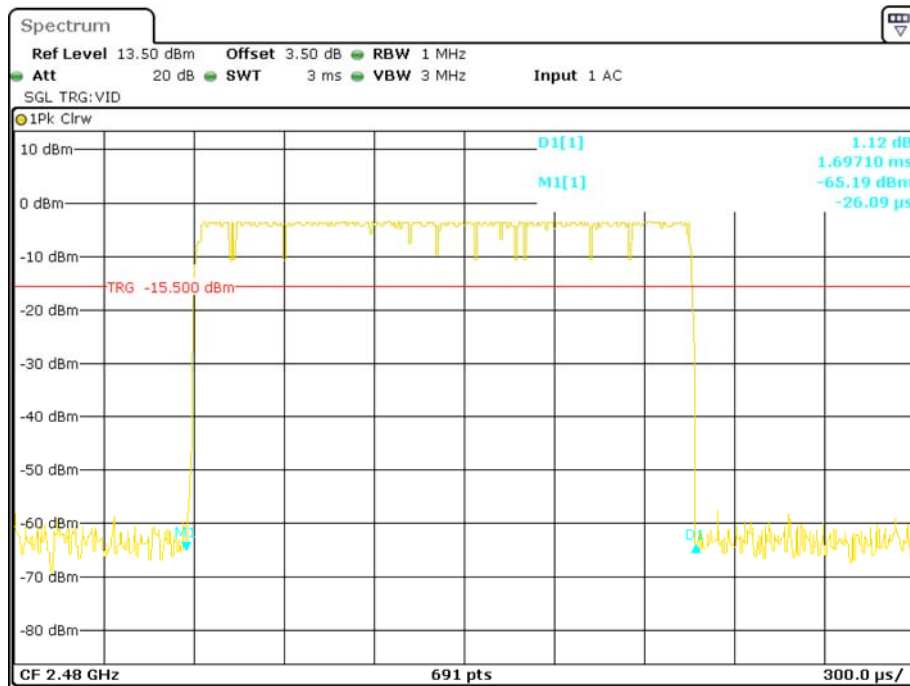


Date: 6.NOV.2017 22:59:27

### Pulse time, Low Channel, DH5

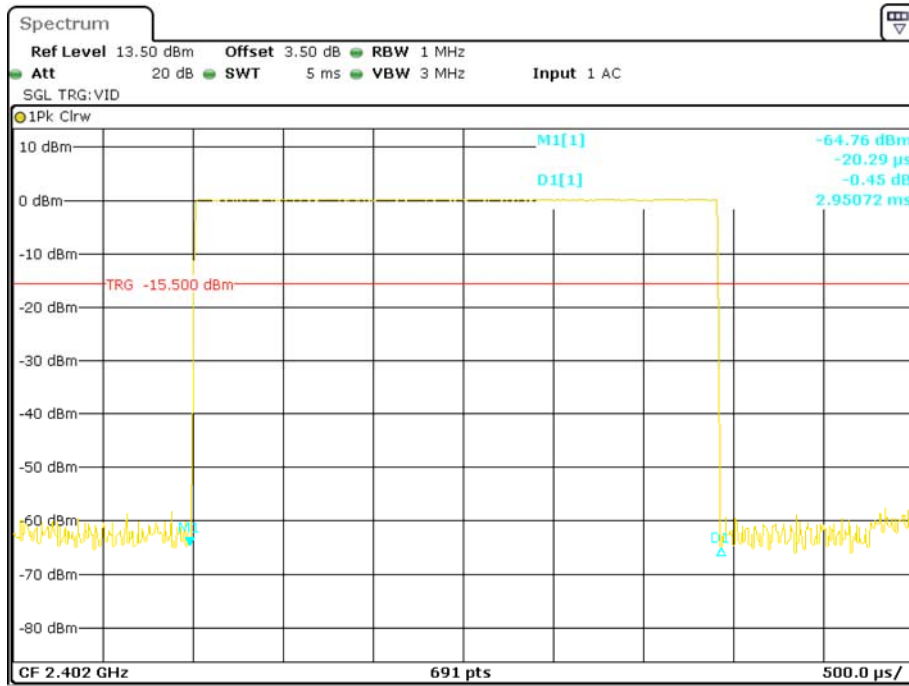


Date: 6.NOV.2017 23:06:07

### Pulse time, Middle Channel, DH5

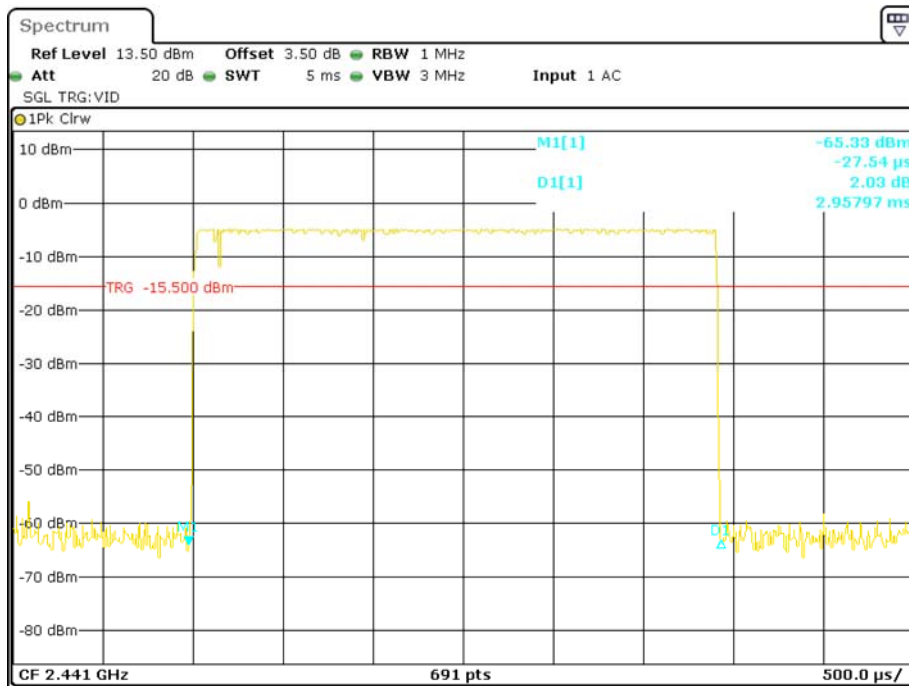


Date: 6.NOV.2017 23:05:40

**Pulse time, High Channel, DH5**

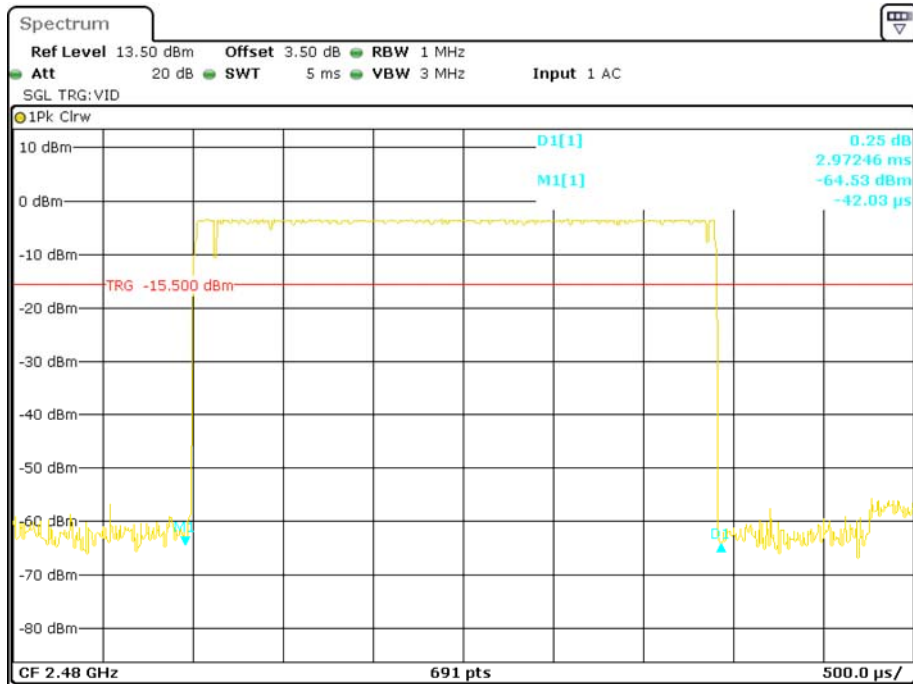


Date: 6.NOV.2017 23:04:58

**EDR ( $\pi/4$ -DQPSK):  
Pulse time, Low Channel, 2DH1**

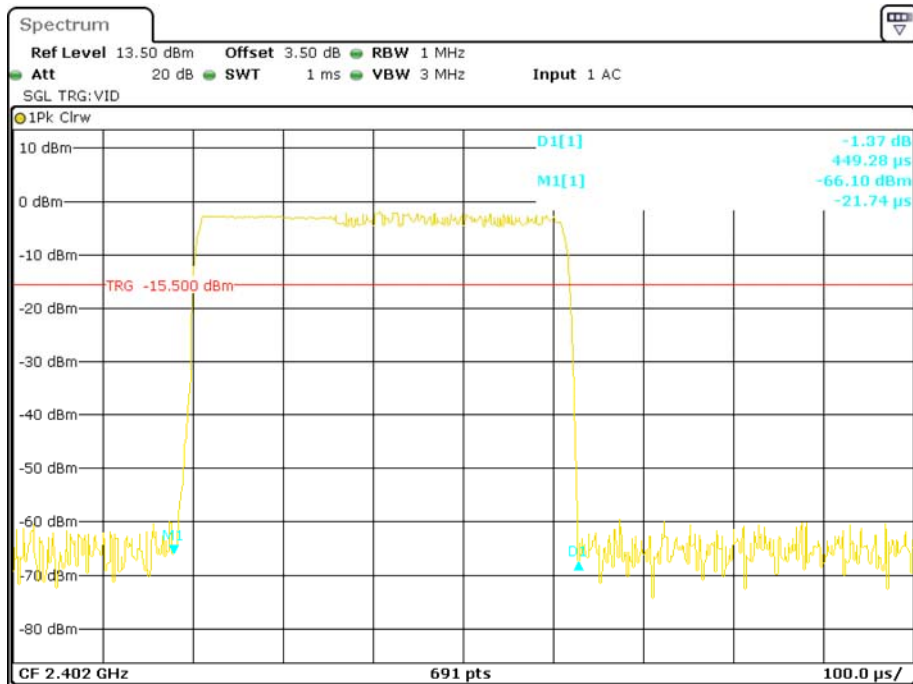


Date: 6.NOV.2017 22:52:20

### Pulse time, Middle Channel, 2DH1

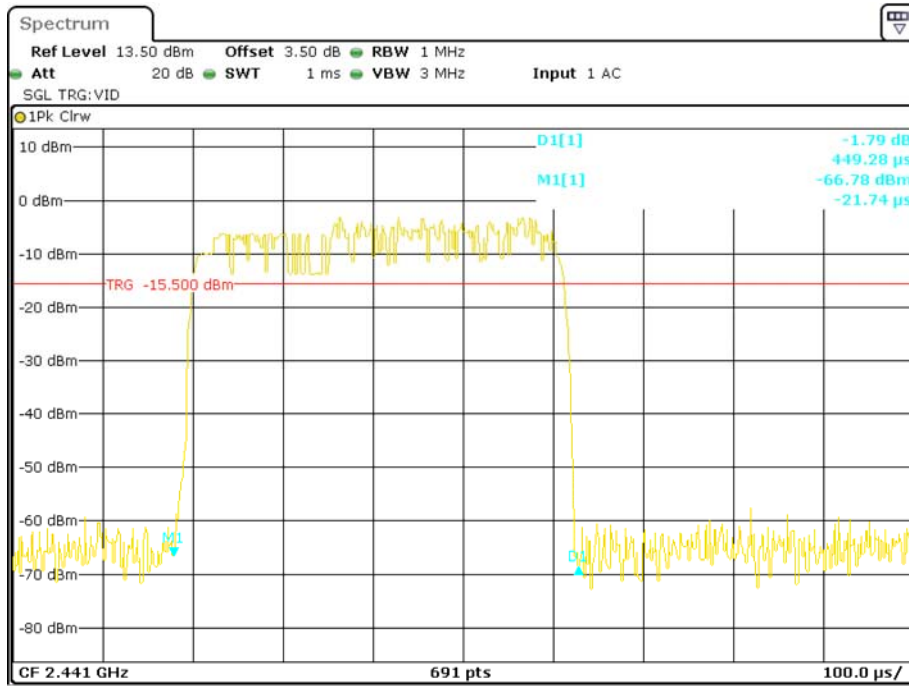

Date: 6.NOV.2017 22:52:49


### Pulse time, High Channel, 2DH1

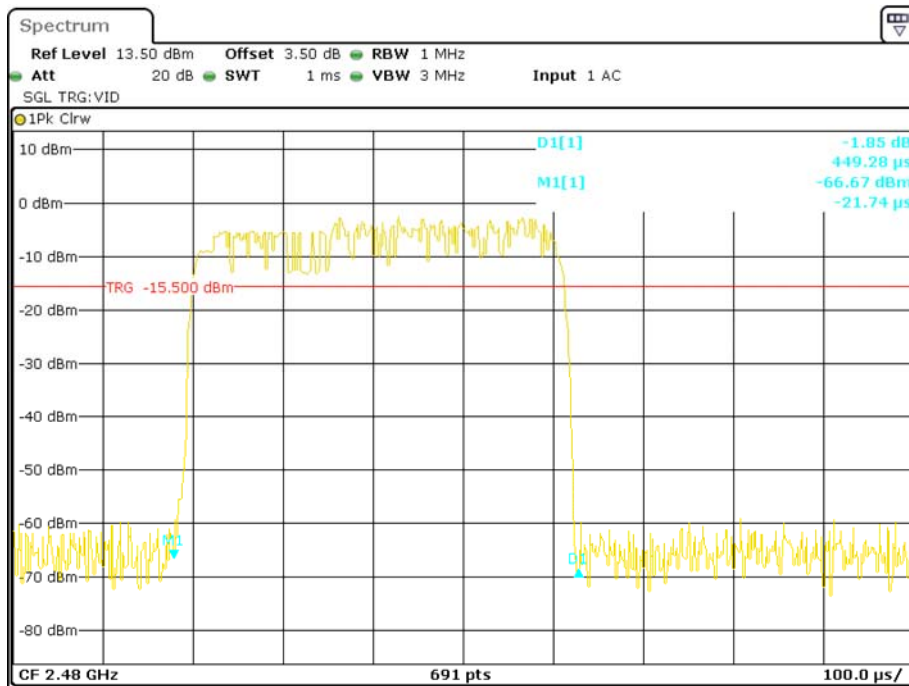

Date: 6.NOV.2017 22:53:14




### Pulse time, Low Channel, 2DH3

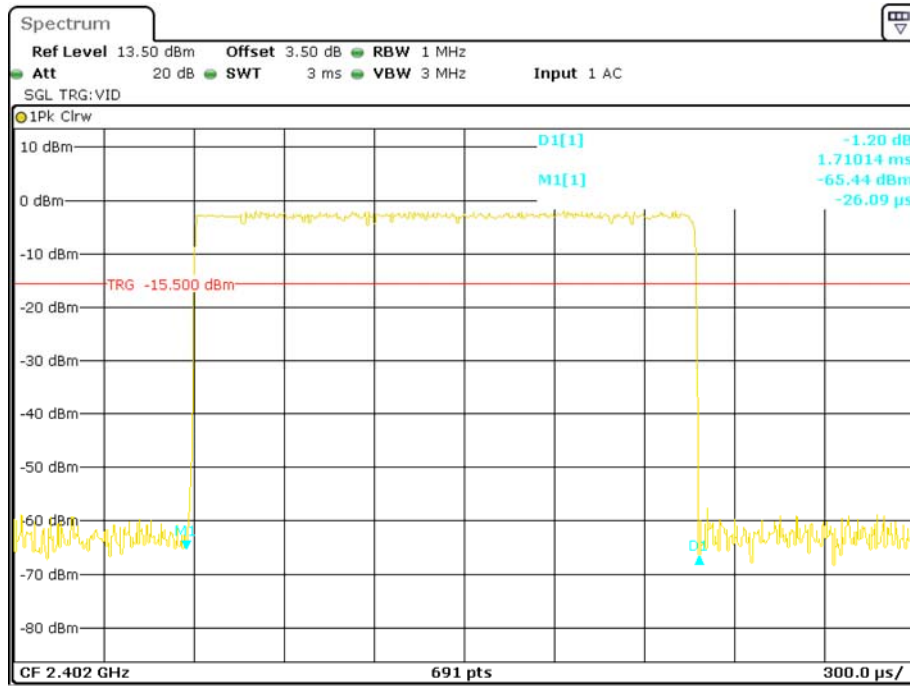


Date: 6.NOV.2017 23:01:44

### Pulse time, Middle Channel, 2DH3

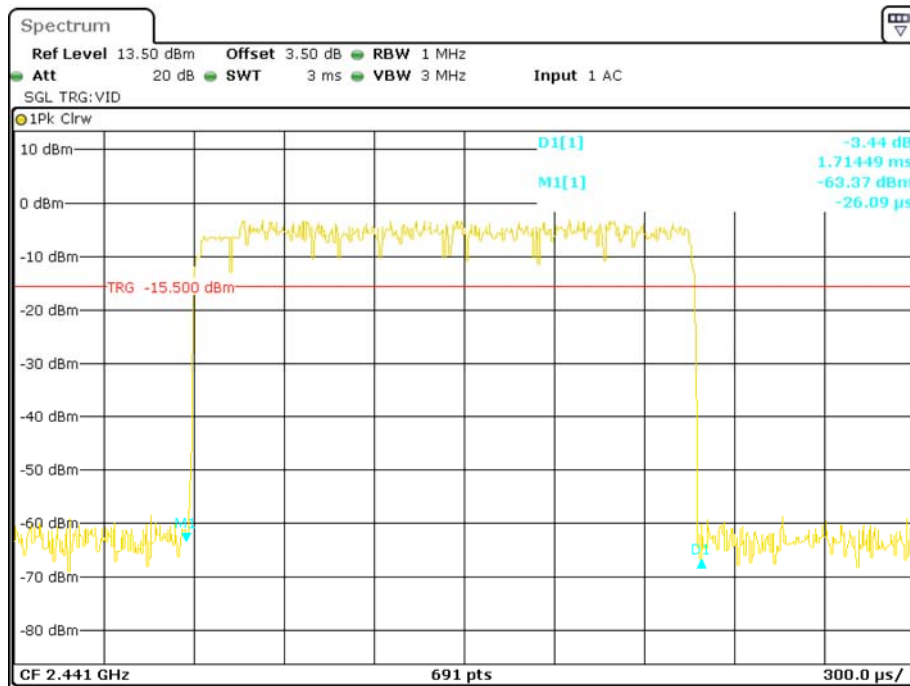


Date: 6.NOV.2017 23:01:15

**Pulse time, High Channel, 2DH3**

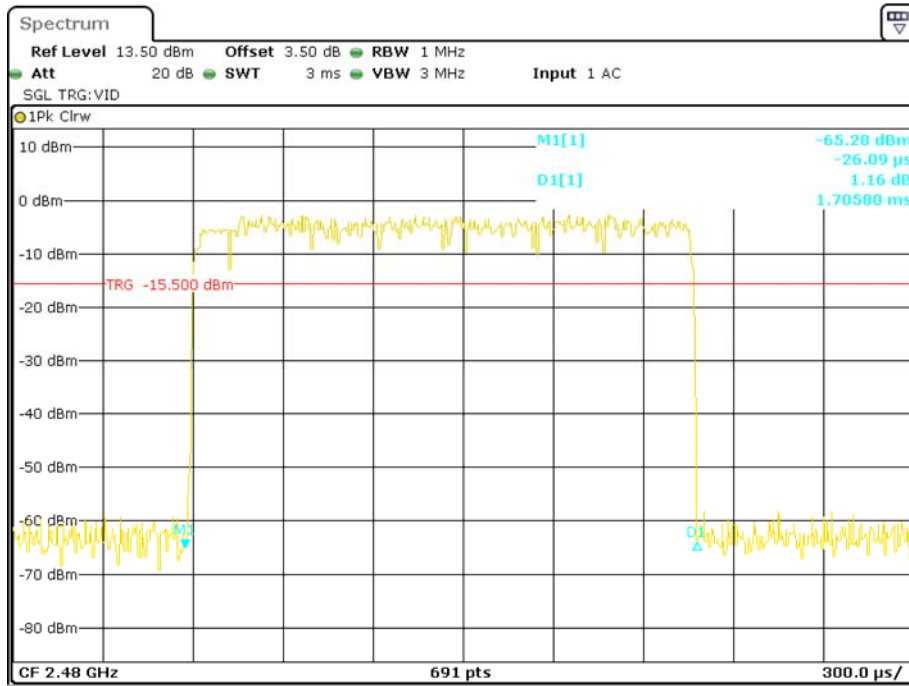


Date: 6.NOV.2017 23:00:31

**Pulse time, Low Channel, 2DH5**

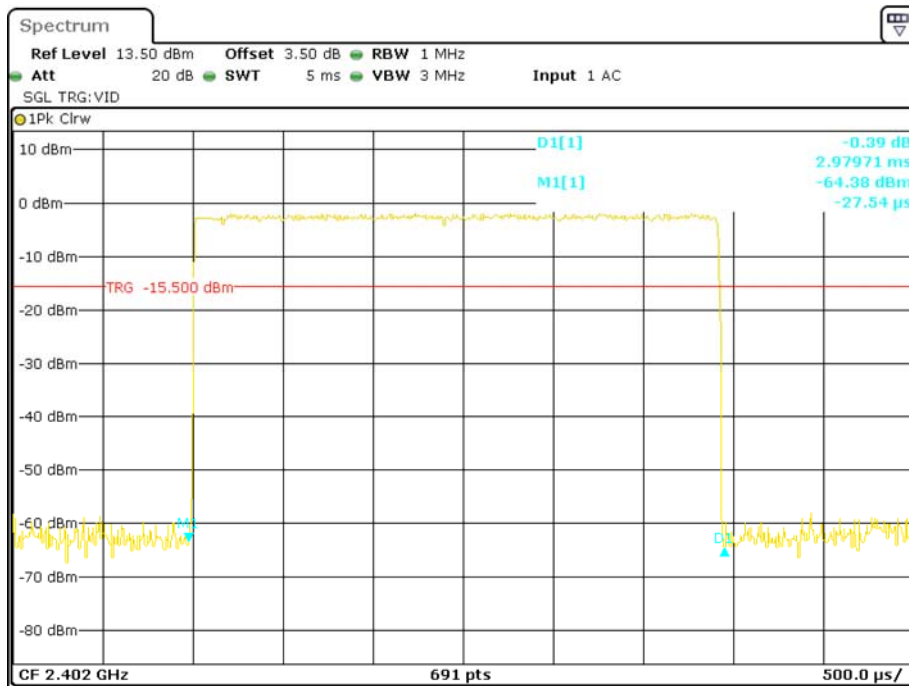


Date: 6.NOV.2017 23:07:03

### Pulse time, Middle Channel, 2DH5

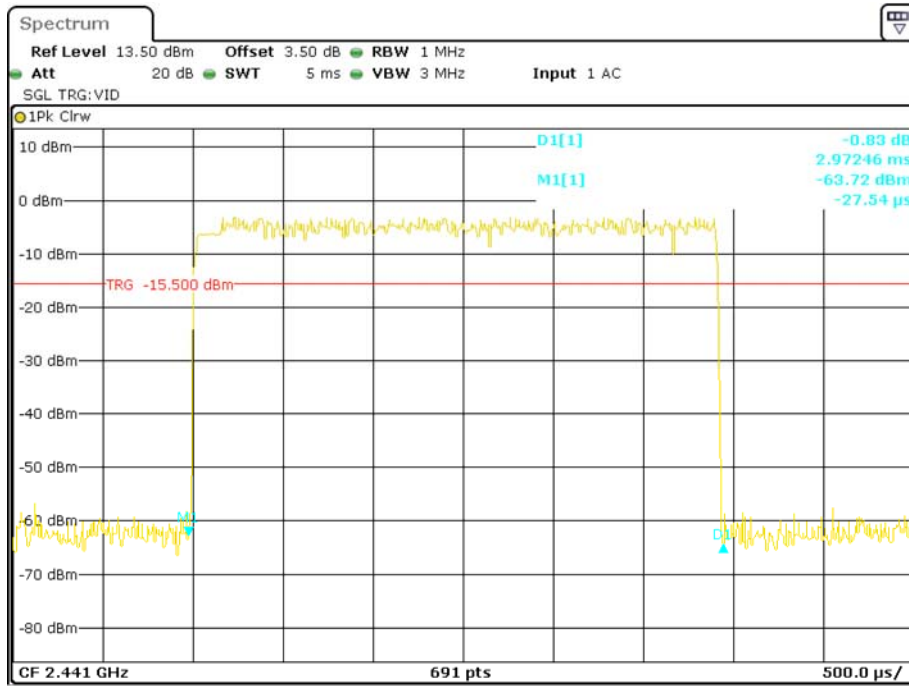


Date: 6.NOV.2017 23:07:38

### Pulse time, High Channel, 2DH5

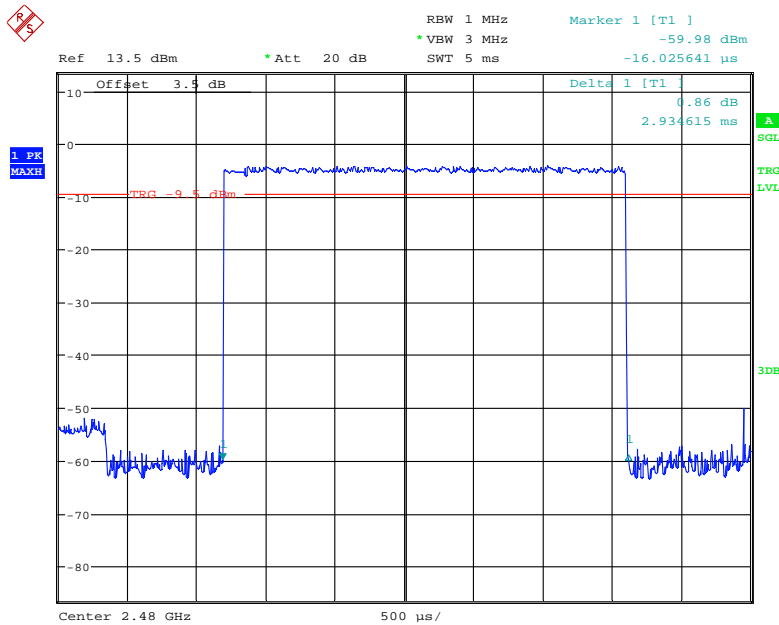


Date: 20.NOV.2017 19:29:38

**EDR (8DPSK):  
Pulse time, Low Channel, 3DH1**

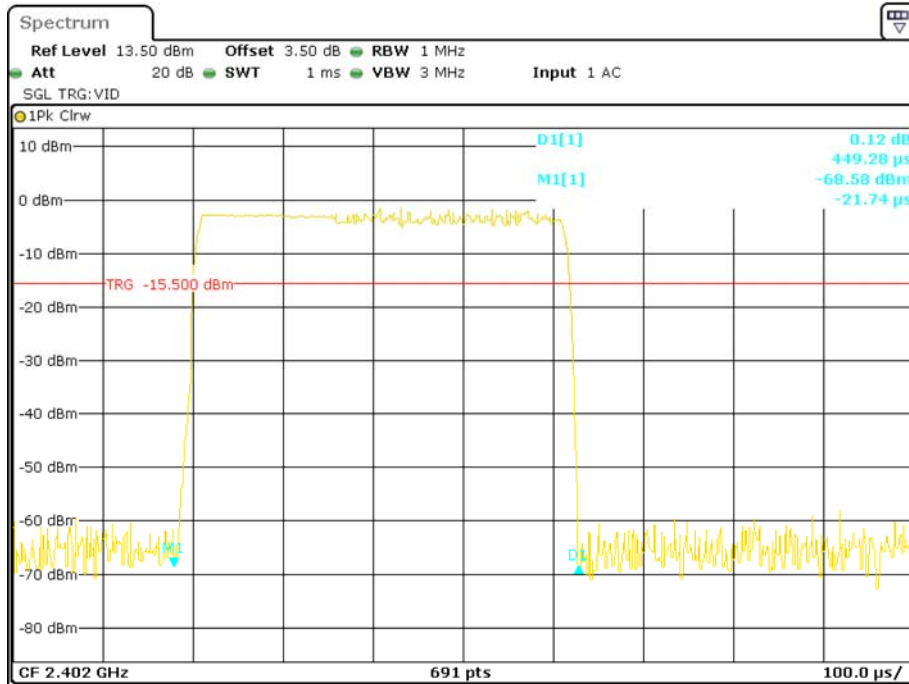


Date: 6.NOV.2017 22:51:32

**Pulse time, Middle Channel, 3DH1**

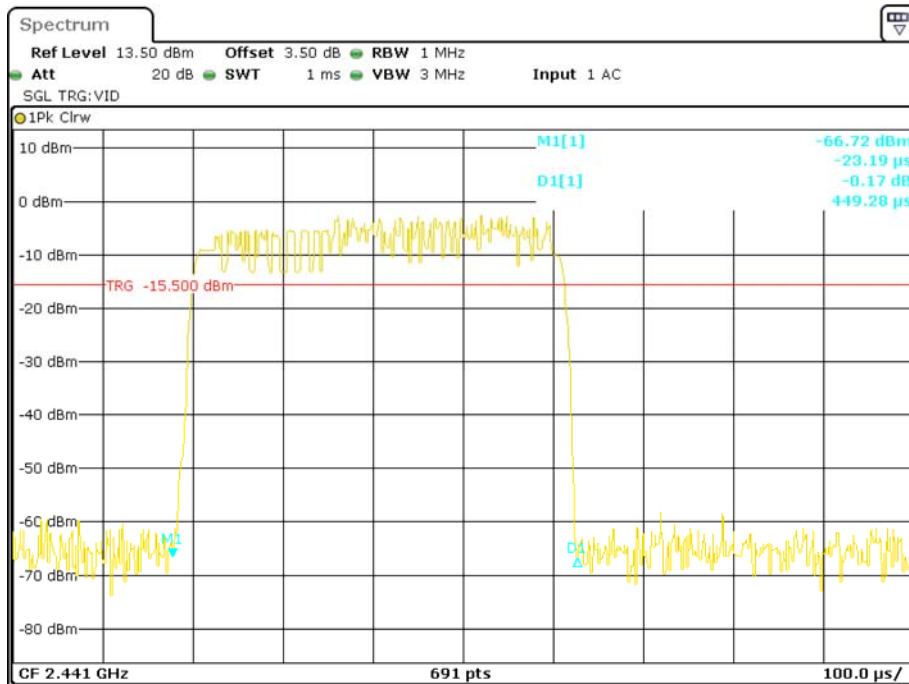


Date: 6.NOV.2017 22:50:57

**Pulse time, High Channel, 3DH1**

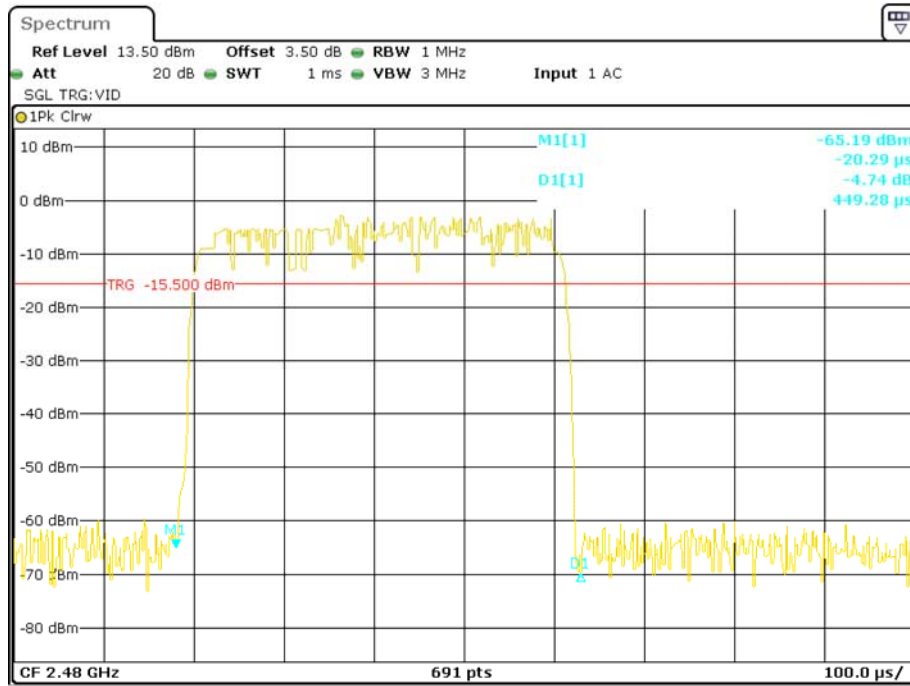


Date: 6.NOV.2017 22:48:53

**Pulse time, Low Channel, 3DH3**

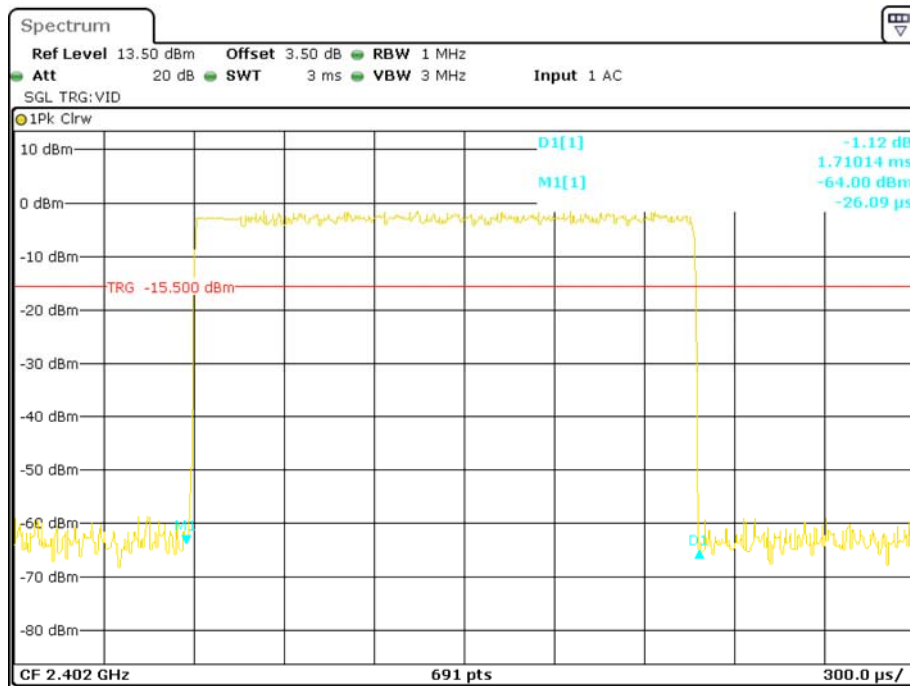


Date: 6.NOV.2017 23:02:30

**Pulse time, Middle Channel, 3DH3**

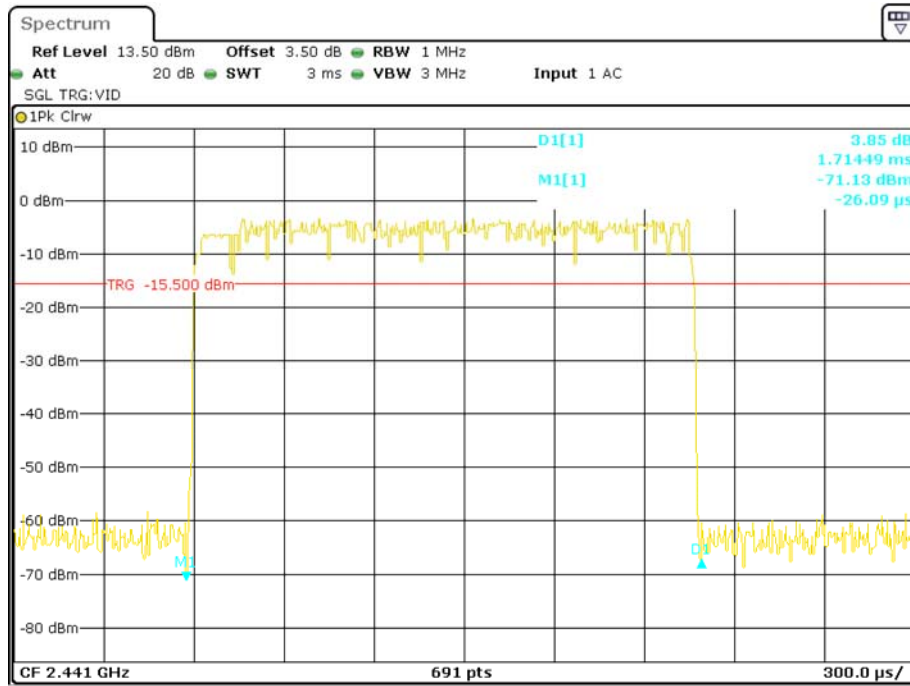


Date: 6.NOV.2017 23:03:00

**Pulse time, High Channel, 3DH3**

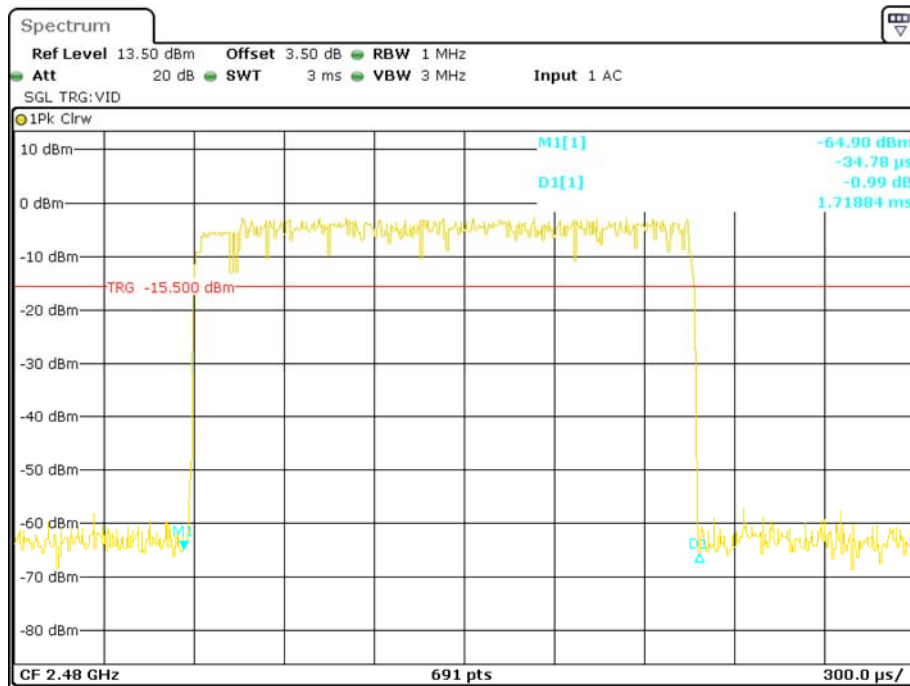


Date: 6.NOV.2017 23:03:38

### Pulse time, Low Channel, 3DH5

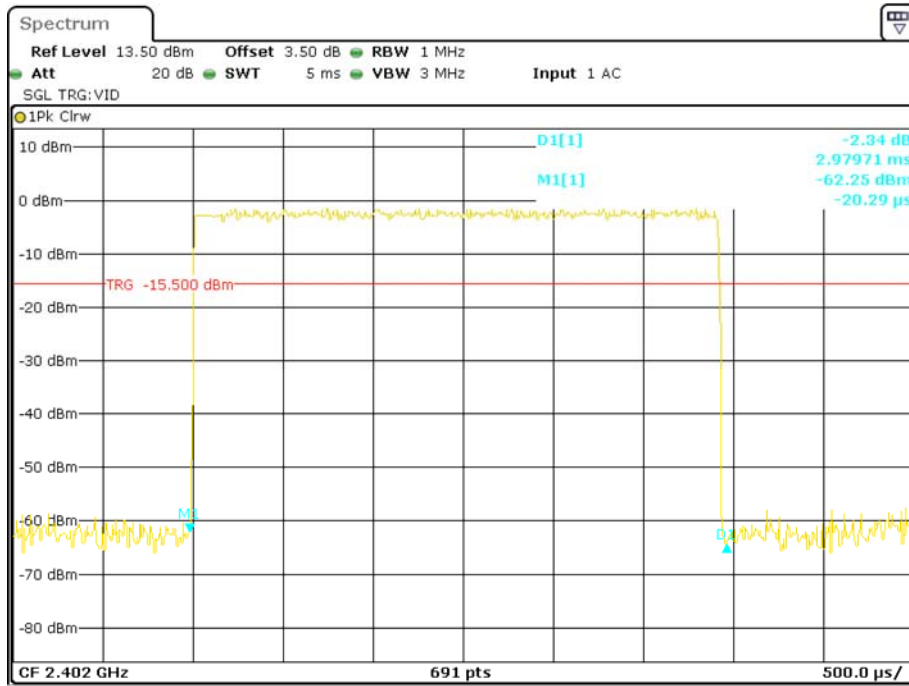


Date: 6.NOV.2017 23:12:13

### Pulse time, Middle Channel, 3DH5

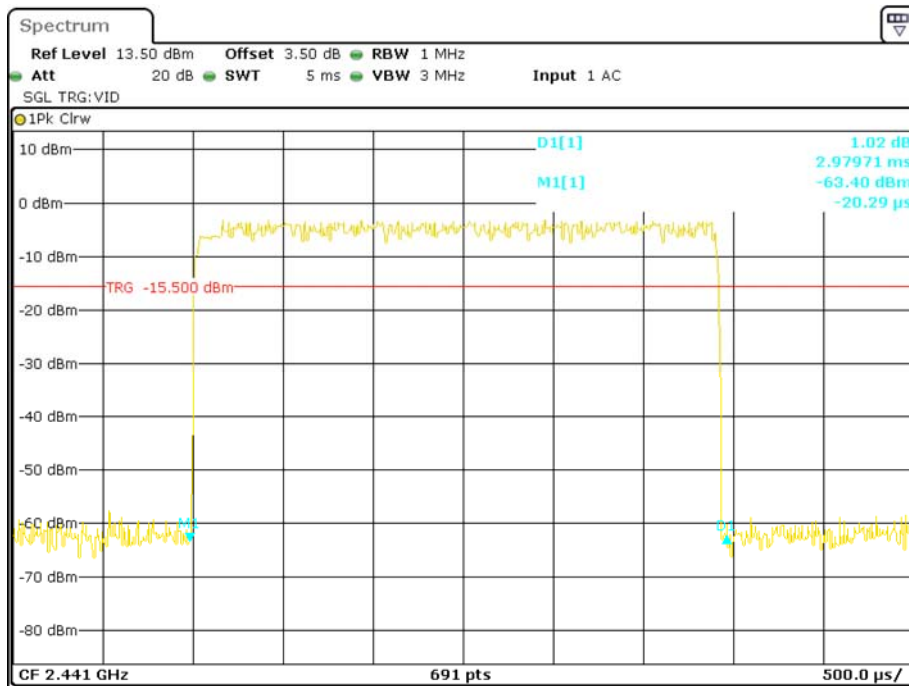

Date: 6.NOV.2017 23:11:45

### Pulse time, High Channel, 3DH5

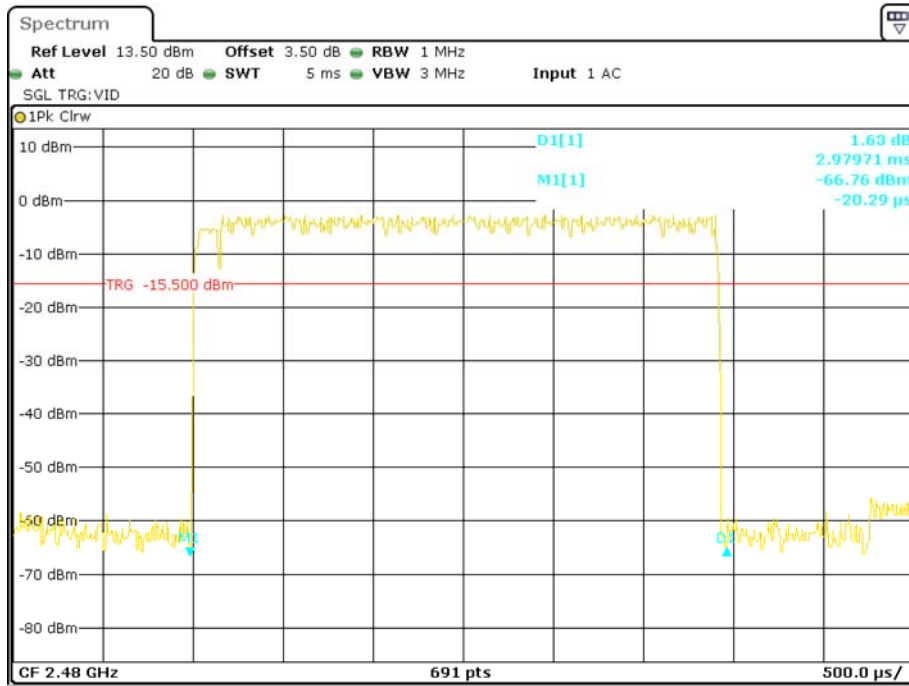

Date: 6.NOV.2017 23:11:11



## **FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**

### **Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### **Test Procedure**

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Kobe Li on 2017-11-06.*

*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following table.*

Mode	Channel	Frequency (MHz)	Peak Output Power		Limit (mW)
			(dBm)	(mW)	
<b>BDR (GFSK)</b>	Low	2402	0.40	1.096	1000
	Middle	2441	3.66	2.323	1000
	High	2480	5.11	3.243	1000
<b>EDR (<math>\pi/4</math>-DQPSK)</b>	Low	2402	-1.42	0.721	1000
	Middle	2441	2.97	1.982	1000
	High	2480	4.10	2.570	1000
<b>EDR (8DPSK)</b>	Low	2402	-0.97	0.800	1000
	Middle	2441	2.98	1.986	1000
	High	2480	4.23	2.649	1000

## **FCC §15.247(d) - BAND EDGES TESTING**

### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### **Test Data**

#### **Environmental Conditions**


<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Kobe Li on 2017-11-06.*


*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following plots.*


### BDR (GFSK): Band Edge-Left Side

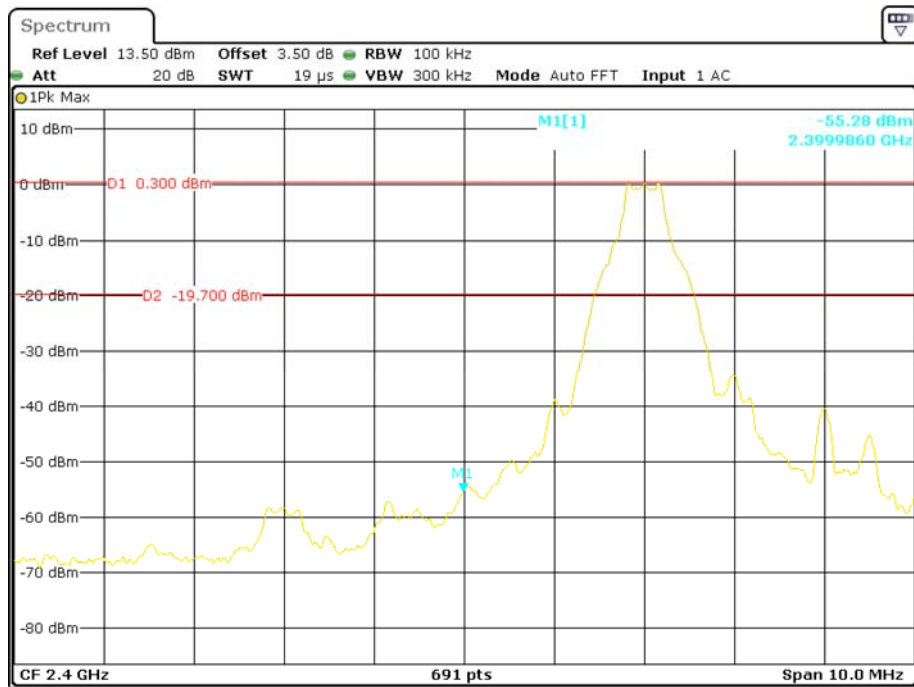

### BDR (GFSK): Band Edge-Right Side

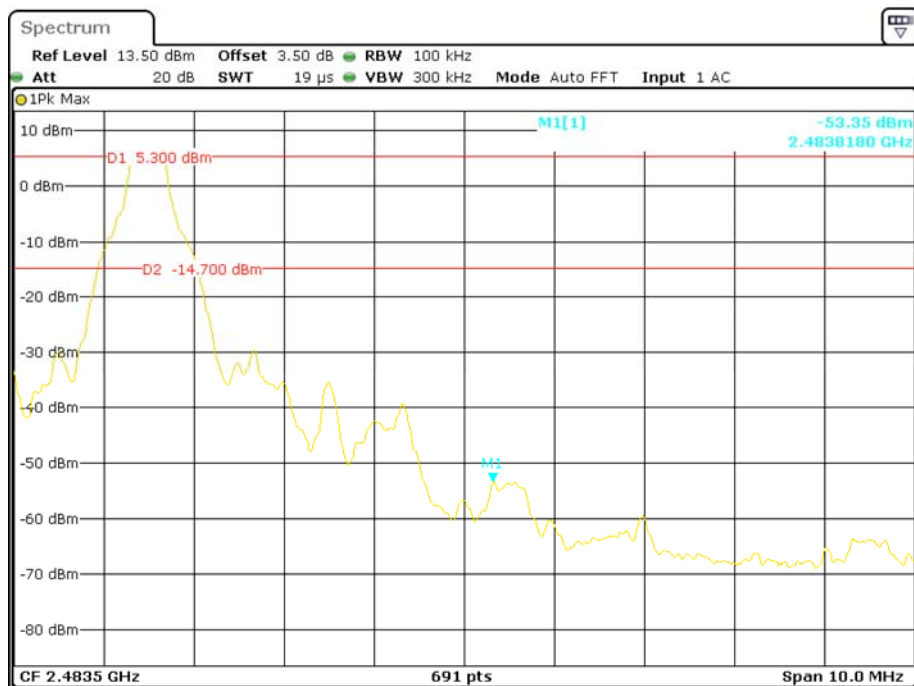


### EDR ( $\pi/4$ -DQPSK): Band Edge-Left Side

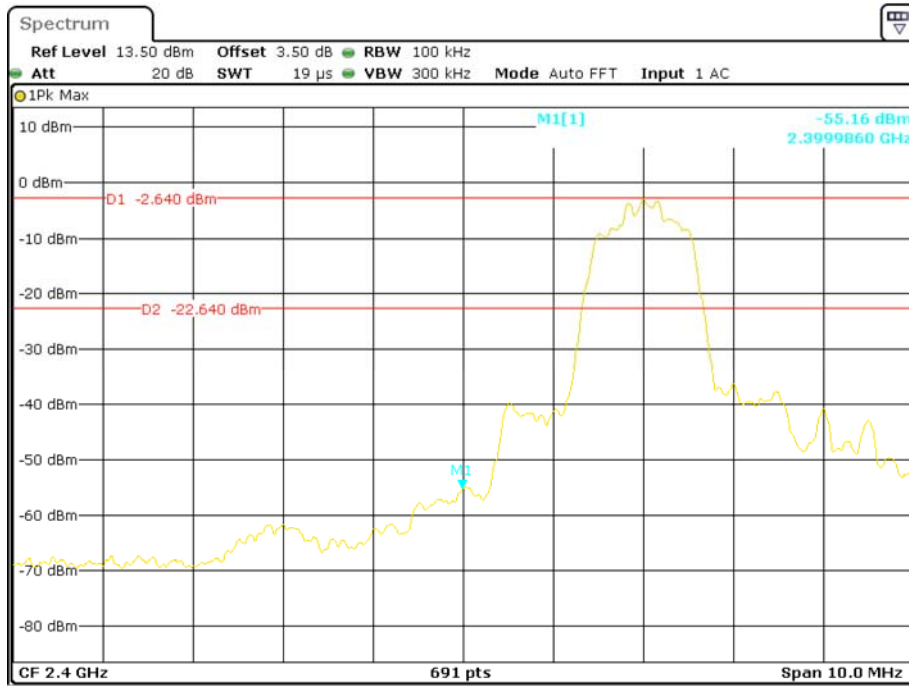


Date: 6.NOV.2017 22:27:16

### EDR ( $\pi/4$ -DQPSK): Band Edge-Right Side

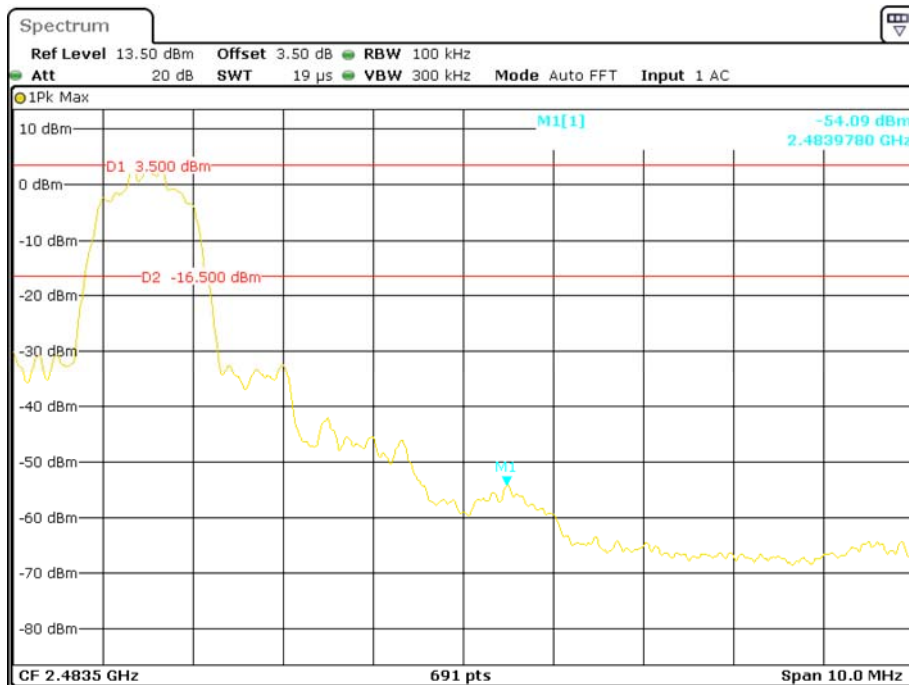


Date: 6.NOV.2017 22:28:14

**EDR (8DPSK): Band Edge-Left Side**

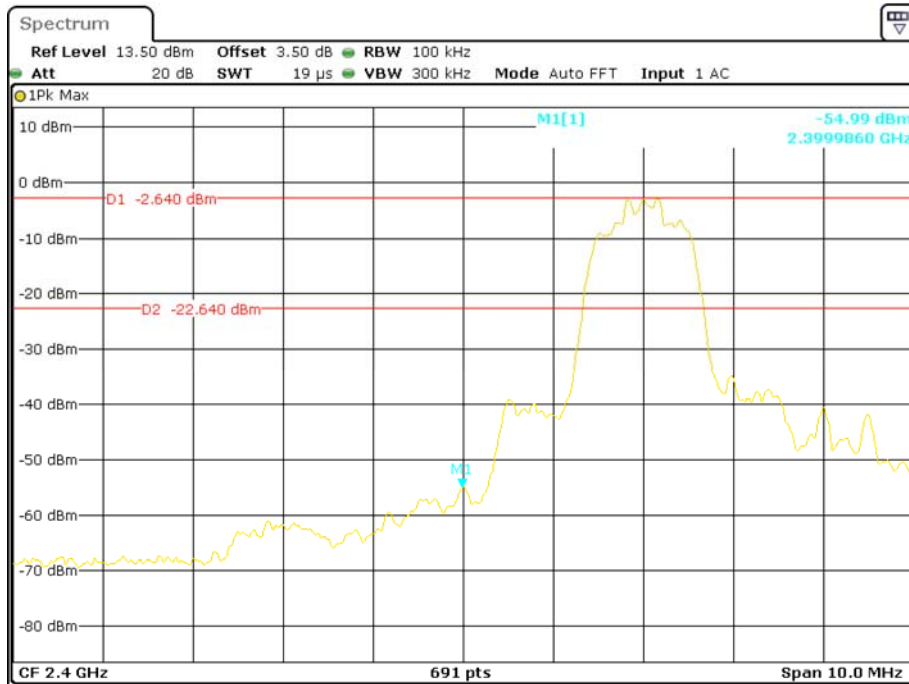

Date: 6.NOV.2017 22:26:21

**EDR (8DPSK): Band Edge-Right Side**

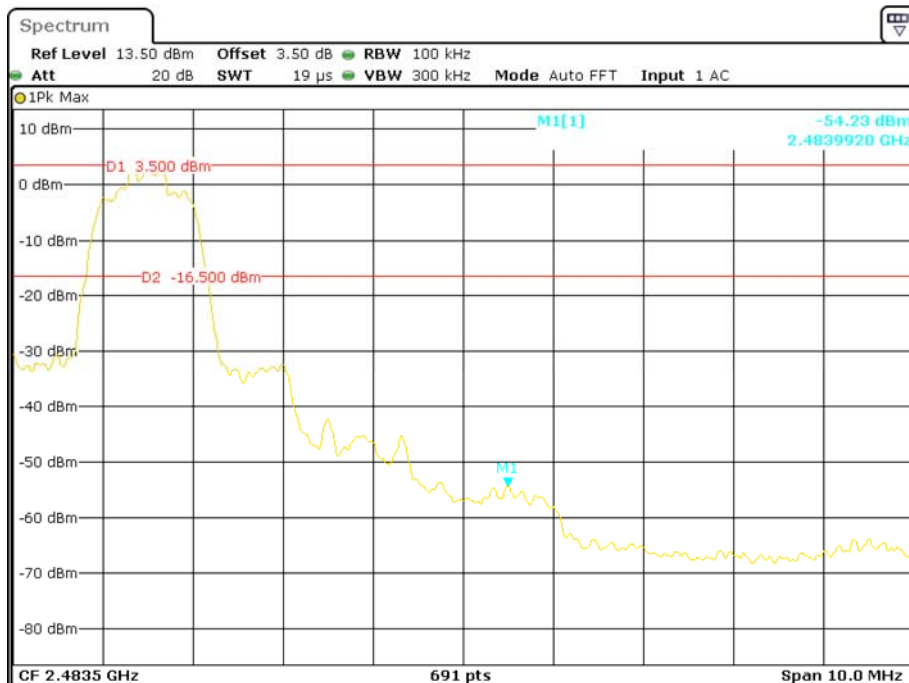

Date: 6.NOV.2017 22:24:49

\*\*\*\*\* END OF REPORT \*\*\*\*\*