

Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed.

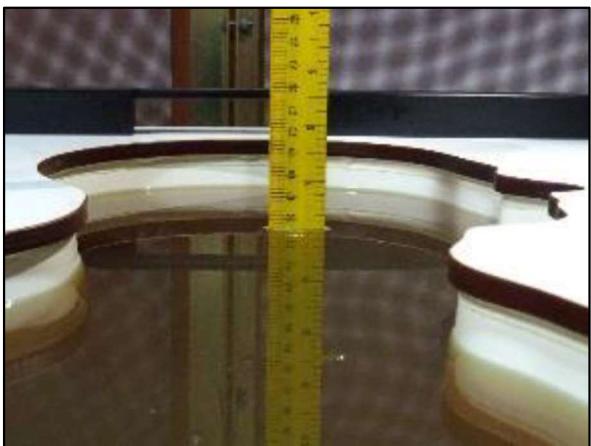


Figure 10: Photo of Liquid Height for Head Position & Photo of Liquid Height for Body Position

The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528, and KDB 865664 D01 Appendix A. For the body tissue simulating liquids, the dielectric properties are defined in KDB 865664 D01 Appendix A. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a dielectric assessment kit(DAK) and a network analyzer.

Prüfbericht - Nr.:

Test Report No.:

ULR-TC568820300000054F**Seite 22 von 41**

Page 22 of 41

Table 8: Targets of Tissue Simulating Liquid

Frequency (MHz)	Target Permittivity	Range of ±5%	Target Conductivity	Range of ±5%
For Head				
750	41.9	39.8 ~ 44.0	0.89	0.85 ~ 0.93
835	41.5	39.4 ~ 43.6	0.90	0.86 ~ 0.95
900	41.5	39.4 ~ 43.6	0.97	0.92 ~ 1.02
1450	40.5	38.5 ~ 42.5	1.20	1.14 ~ 1.26
1640	40.3	38.3 ~ 42.3	1.29	1.23 ~ 1.35
1750	40.1	38.1 ~ 42.1	1.37	1.30 ~ 1.44
1800	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
1900	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2000	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2300	39.5	37.5 ~ 41.5	1.67	1.59 ~ 1.75
2450	39.2	37.2 ~ 41.2	1.80	1.71 ~ 1.89
2600	39.0	37.1 ~ 41.0	1.96	1.86 ~ 2.06
3500	37.9	36.0 ~ 39.8	2.91	2.76 ~ 3.06
5200	36.0	34.2 ~ 37.8	4.66	4.43 ~ 4.89
5300	35.9	34.1 ~ 37.7	4.76	4.52 ~ 5.00
5500	35.6	33.8 ~ 37.4	4.96	4.71 ~ 5.21
5600	35.5	33.7 ~ 37.3	5.07	4.82 ~ 5.32
5800	35.3	33.5 ~ 37.1	5.27	5.01 ~ 5.53
For Body				
750	55.5	52.7 ~ 58.3	0.96	0.91 ~ 1.01
835	55.2	52.4 ~ 58.0	0.97	0.92 ~ 1.02
900	55.0	52.3 ~ 57.8	1.05	1.00 ~ 1.10
1450	54.0	51.3 ~ 56.7	1.30	1.24 ~ 1.37
1640	53.8	51.1 ~ 56.5	1.40	1.33 ~ 1.47
1750	53.4	50.7 ~ 56.1	1.49	1.42 ~ 1.56
1800	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
1900	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
2000	53.3	50.6 ~ 56.0	1.52	1.44 ~ 1.60
2300	52.9	50.3 ~ 55.5	1.81	1.72 ~ 1.90
2450	52.7	50.1 ~ 55.3	1.95	1.85 ~ 2.05
2600	52.5	49.9 ~ 55.1	2.16	2.05 ~ 2.27
3500	51.3	48.7 ~ 53.9	3.31	3.14 ~ 3.48
5200	49.0	46.6 ~ 51.5	5.30	5.04 ~ 5.57
5300	48.9	46.5 ~ 51.3	5.42	5.15 ~ 5.69
5500	48.6	46.2 ~ 51.0	5.65	5.37 ~ 5.93
5600	48.5	46.1 ~ 50.9	5.77	5.48 ~ 6.06
5800	48.2	45.8 ~ 50.6	6.00	5.70 ~ 6.30

The following table gives the recipes for tissue simulating liquids.

Table 9: Recipes of Tissue Simulating Liquid

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
H750	0.2	-	0.2	1.5	56.0	-	42.1	-
H835	0.2	-	0.2	1.5	57.0	-	41.1	-
H900	0.2	-	0.2	1.4	58.0	-	40.2	-
H1450	-	43.3	-	0.6	-	-	56.1	-
H1640	-	45.8	-	0.5	-	-	53.7	-
H1750	-	47.0	-	0.4	-	-	52.6	-
H1800	-	44.5	-	0.3	-	-	55.2	-
H1900	-	44.5	-	0.2	-	-	55.3	-
H2000	-	44.5	-	0.1	-	-	55.4	-
H2300	-	44.9	-	0.1	-	-	55.0	-
H2450	-	45.0	-	0.1	-	-	54.9	-
H2600	-	45.1	-	0.1	-	-	54.8	-
H3500	-	8.0	-	0.2	-	20.0	71.8	-
H5G	-	-	-	-	-	17.2	65.5	17.3
B750	0.2	-	0.2	0.8	48.8	-	50.0	-
B835	0.2	-	0.2	0.9	48.5	-	50.2	-
B900	0.2	-	0.2	0.9	48.2	-	50.5	-
B1450	-	34.0	-	0.3	-	-	65.7	-
B1640	-	32.5	-	0.3	-	-	67.2	-
B1750	-	31.0	-	0.2	-	-	68.8	-
B1800	-	29.5	-	0.4	-	-	70.1	-
B1900	-	29.5	-	0.3	-	-	70.2	-
B2000	-	30.0	-	0.2	-	-	69.8	-
B2300	-	31.0	-	0.1	-	-	68.9	-
B2450	-	31.4	-	0.1	-	-	68.5	-
B2600	-	31.8	-	0.1	-	-	68.1	-
B3500	-	28.8	-	0.1	-	-	71.1	-
B5G	-	-	-	-	-	10.7	78.6	10.7

SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

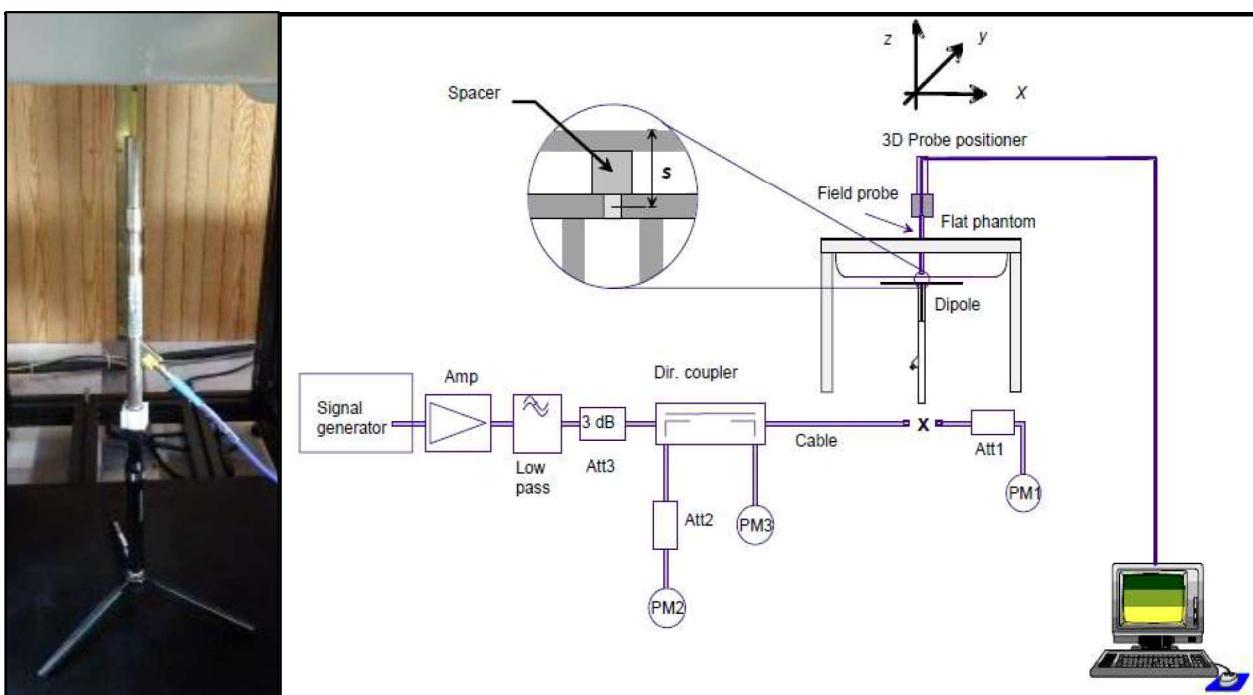


Figure 11: System Verification Setup

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The spectrum analyzer measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

9 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Perform SAR testing steps on the DASY system
- (e) Record the SAR value

9.1 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. According to KDB 865664 D01, the resolution for Area and Zoom scan is specified in the table below.

Items	<= 2 GHz	2-3 GHz	3-4 GHz	4-5 GHz	5-6 GHz
Area Scan ($\Delta x, \Delta y$)	<= 15 mm	<= 12 mm	<= 12 mm	<= 10 mm	<= 10 mm
Zoom Scan ($\Delta x, \Delta y$)	<= 8 mm	<= 5 mm	<= 5 mm	<= 4 mm	<= 4 mm
Zoom Scan (Δz)	<= 5 mm	<= 5 mm	<= 4 mm	<= 3 mm	<= 2 mm
Zoom Scan Volume	>= 30 mm	>= 30 mm	>= 28 mm	>= 25 mm	>= 22 mm

Note:

When zoom scan is required and report SAR is $\leq 1.4 \text{ W/kg}$, the zoom scan resolution of $\Delta x / \Delta y$ (2-3GHz: $\leq 8 \text{ mm}$, 3-4GHz: $\leq 7 \text{ mm}$, 4-6GHz: $\leq 5 \text{ mm}$) may be applied.

9.2 Volume Scan Procedure

Volume Scans are 3D scans used to assess the peak spatial SAR values within an averaging volume containing 1g and 10g of simulated tissue. It is compatible with any phantom. For regular phantoms, the measurement grid is generated by projecting a plane onto the phantom surface as for Area and Zoom scans. For specific phantoms, the measurement grid is generated by a conformal offset to the phantom surface at the desired distances. The grid extents can be set by the end user to cover the DUT dimensions or the whole measurable area of the phantom.

9.3 PowerDrift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

9.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE 1528 standard. It can be conducted for 1 g and 10 g, as well as for user-specific masses. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- a. Extraction of the measured data (grid and values) from the Zoom Scan
- b. Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- c. Generation of a high-resolution mesh within the measured volume
- d. Interpolation of all measured values from the measurement grid to the high-resolution grid
- e. Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- f. Calculation of the averaged SAR within masses of 1g and 10g

In DASY5 V5.2 SAR, the calculation is performed in the SEMCAD post processing engine. In cDASY6 Module SAR, the 1 g and 10 g cubes are calculated in the software itself.

9.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

9.6 Tissue Verification

Table 10: The measuring results for tissue simulating liquid

Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Target Conductivity (σ)	Target Permittivity (ϵ_r)	Conductivity Deviation (%)	Permittivity Deviation (%)	Test Date
H2450	2450	23.7	1.83	38.08	1.80	39.2	1.81	-2.9	Oct. 26, 2020
H5200	5200	22.3	4.51	36.20	4.66	36.0	-3.10	0.6	Oct. 27, 2020
H5800	5800	22.5	5.27	35.30	5.27	35.3	-0.00	0.1	Oct. 27, 2020

Note:

1. The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within $\pm 5\%$ of the target values. Liquid temperature during the SAR testing must be within $\pm 2^\circ\text{C}$.
2. Since the maximum deviation of dielectric properties of the tissue simulating liquid is within 5%, SAR correction is evaluated in the measurement uncertainty shown on section 3.3 of this report.

9.7 System Verification

Table 11: The measuring results for system check

Frequency (MHz)	TSL	Power [dBm]	Deviation 1g [%]	Deviation 10g [%]	Deviation Peak [%]	Isotropic Error [%]	Test Date
2450	HSL	17	6.7	4.9	8.5	-2.2	Oct. 26, 2020
5200	HSL	17	-2.40	-1.1	-6.6	3.8	Oct. 27, 2020
5800	HSL	17	8.1	8.5	9.0	3.8	Oct. 27, 2020

Note:

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to APPENDIXB: PLOTS FOR SYSTEM VERIFICATION. of this report.

9.8 RF Conducted Power

The measuring conducted power (Unit: dBm) are shown as below.

Table 12: The results of conducted power (Wi-Fi 2.4GHz)

Mode	Data rate (Mbps)	Channel Frequency (MHz)	Average Power (dBm)	Tune up tolerance (dB)	Duty cycle (%)	Average Power Including Tune-up Tolerance (dBm)	SAR Test applicability (Yes/No)**
b	1	2412	13.95	2	99.42	15.98	Yes
		2437	14.07	2	99.42	16.10	
		2462	13.91	2	99.42	15.94	
	11	2412	13.68	2	93.51	15.97	No
		2437	13.89	2	93.52	16.18	
		2462	13.56	2	93.51	15.85	
g	6	2412	9.70	2	96.08	11.87	Yes
		2437	14.31	2	96.07	16.48	
		2462	9.63	2	96.07	11.80	
	24	2412	9.01	2	86.15	11.66	No
		2437	12.93	2	86.13	15.58	
		2462	8.86	2	86.13	11.51	
	54	2412	8.49	2	73.85	11.81	No
		2437	10.07	2	73.83	13.39	
		2462	8.34	2	73.84	11.66	
n_HT40	MCS0	2422	6.89	2	95.34	9.30	Yes
		2437	6.78	2	95.33	8.99	
		2452	7.04	2	95.33	9.46	
	MCS4	2422	5.54	2	95.33	9.44	No
		2437	4.99	2	95.33	7.19	
		2452	5.64	2	78.06	9.55	
	MCS7	2422	4.69	2	78.03	9.38	No
		2437	4.58	2	78.03	7.65	
		2452	4.87	2	78.03	9.57	
n_HT20	MCS0	2412	9.76	2	68.92	11.97	Yes
		2437	13.64	2	68.90	15.85	
		2462	9.79	2	68.91	12.00	
	MCS4	2412	8.93	2	90.90	12.01	No
		2437	11.96	2	90.86	15.04	
		2462	8.88	2	64.55	11.96	
	MCS7	2412	8.39	2	64.37	12.01	No
		2437	8.90	2	53.81	12.52	
		2462	8.33	2	53.76	11.95	

Table 13: The results of conducted power (BLE)

Data rate (Mbps)	Frequency (MHz)	Peak Power (dBm)	Tune-up Tolerance (dB)	Duty cycle factor (dB)	Peak Power Including Tune-up Tolerance (dBm)	SAR Test applicability (Yes/No)**
1	2402	4.42	2	0	6.42	No *
1	2440	4.97	2	0	6.97	
1	2480	5.08	2	0	7.08	

Notes :

*Refer clause 9.9 SAR Test Exclusion of this test report

Table 14: The results of conducted power (Wi-Fi 5GHz)

Mode	Data rate (Mbps)	Frequency (MHz)	Average Power (dBm)	Tune-up Tolerance (dB)	Duty cycle factor (dB)	Average Power Including Tune-up Tolerance (dBm)	SAR Test applicability (Yes/No)**
a	6	5180	8.60	2	0.18	10.78	Yes
		5200	8.59	2	0.18	10.77	
		5240	9.04	2	0.19	11.23	
		5745	5.09	2	0.18	7.27	
		5785	4.99	2	0.18	7.17	
		5825	7.36	2	0.20	9.56	
	24	5180	7.91	2	0.74	10.65	No
		5200	7.61	2	0.74	10.35	
		5240	8.27	2	0.74	11.01	
		5745	4.15	2	0.71	6.86	
		5785	4.01	2	0.71	6.72	
		5825	6.34	2	0.68	9.02	
	54	5180	6.32	2	1.39	9.71	No
		5200	6.22	2	1.39	9.61	
		5240	6.73	2	1.39	10.12	
		5745	3.68	2	1.39	7.07	
		5785	3.22	2	1.39	6.61	
		5825	5.86	2	1.39	9.25	
n-20	MCS0	5180	8.41	2	0.23	10.64	No
		5200	8.35	2	0.23	10.58	
		5240	9.00	2	0.22	11.22	
		5745	5.02	2	0.24	7.26	
		5785	4.78	2	0.24	7.02	
		5825	7.25	2	0.22	9.47	
	MCS4	5180	7.86	2	1.14	11.00	Yes
		5200	6.99	2	1.14	10.13	
		5240	8.41	2	1.18	11.59	
		5745	4.20	2	1.18	7.38	
		5785	4.10	2	1.12	7.22	
		5825	6.30	2	1.12	9.42	
	MCS7	5180	5.47	2	1.70	9.17	No
		5200	5.01	2	1.70	8.71	
		5240	5.80	2	1.76	9.56	
		5745	3.66	2	1.70	7.36	
		5785	3.55	2	1.70	7.25	
		5825	5.28	2	1.70	8.98	

Prüfbericht - Nr.:

Test Report No.:

ULR-TC568820300000054F

Seite 30 von 41

Page 30 of 41

n-40	MCS0	5190	6.93	2	0.49	9.42	No
		5230	7.64	2	0.48	10.12	
		5755	6.30	2	0.51	8.81	
		5795	6.29	2	0.44	8.73	
	MCS4	5190	5.69	2	2.34	10.03	Yes
		5230	6.31	2	2.43	10.74	
		5755	5.01	2	2.20	9.21	
		5795	5.23	2	2.08	9.31	
	MCS7	5190	3.71	2	3.39	9.10	No
		5230	3.91	2	3.30	9.21	
		5755	2.79	2	3.50	8.29	
		5795	3.25	2	3.20	8.45	

Notes : SAR test reduction was applied from KDB 248227

** YES : SAR testing is performed, Refer clause 9.11 Guidelines Applied of this report

NO : SAR testing is excluded, Refer clause 9.11 Guidelines Applied of this report

9.9 SAR Test Exclusion

Based on the conducted power measurement, reported under section " RF Conducted Power " of this test report and derivation of Low-Power exclusion level defined in FCC KDB 447498 D01 General RF Exposure Guidance v06 (See 4.3 a), SAR test exclusion was identified for the followong frequency band

RF protocol	Measured Frequency (MHz)	Maximum measured RF output power at antenna terminal (dBm)	Tune-up tolerance (dB)	Max power Including tune-up tolerance * (mW)	Exclusion threshold ** for separation distance of 5mm	SAR Test required (Yes/No)
BLE	2480	5.08 dBm	±2	5.11	1.61	No

*Max power is rounded to two decimal place for reporting

**separation distance of 5mm is used for the calculation, where as the actual saperation distance is 3.6mm

Hence RF exposure evaluation or SAR testig is not required for BLE 2.4 GHz frequency range

- Per KDB 447498 D01v06, the 1-g and 10-g SAR Test Exclusion threshold for 100MHz to 6GHz at separation distance ≤50mm are determined by

$$\left[\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot \sqrt{f_{(\text{GHz})}} \leq 3.0 \text{ for 1-g SAR, and } \leq 7.5 \text{ for 10-g extremity SAR}$$

Where

f (GHz) is the RF channel transmit frequency in GHz

9.10 Simultaneous Transmission

This device do not support Simultaneous transmission.

9.11 Guidelines Applied

FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02

- The maximum output power specified for production units, including tune-up tolerance, are used to determine initial SAR test requirements for the 802.11 transmission modes in a frequency band.
- SAR test reduction is determined according to 802.11 transmission mode and configuration with multiple positions
- When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band
- The reported SAR must be scaled to the maximum transmission duty factor to determine compliance
- During SAR testing, RF transmission and EUT functionality is verified with spectrum analyzer
- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR testing is not required for OFDM

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04

- Repeated measurement is not required when the original highest measured SAR is $< 0.80 \text{ W/kg}$
- When the original highest measured SAR is $\geq 0.80 \text{ W/kg}$, repeat that measurement once
- Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45 \text{ W/kg}$ ($\sim 10\%$ from the 1-g SAR limit).
- Perform a third repeated measurement only if the original, first or second repeated measurement is $\geq 1.5 \text{ W/kg}$ and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

FCC KDB 447498 D01 General RF Exposure Guidance v06

- Measured SAR is adjusted for maximum tune-up tolerance
- The test separation distances required for a device to demonstrate SAR or MPE compliance must be sufficiently conservative to support the operational separation distances required by the device and its antennas and radiating structures
- For SAR testing of WLAN signal with duty cycle $< 100\%$, the measured SAR is scaled-up by the duty cycle scaling factor (i.e. 1/duty cycle)
- For all the applicable exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR of the mid-channel or highest output power channel is
 - $\leq 0.8 \text{ W/kg}$ or $\leq 2 \text{ W/kg}$, for 1-g or 10-g respectively, when transmission band is $\leq 100\text{MHz}$
 - $\leq 0.6 \text{ W/kg}$ or $\leq 1.5 \text{ W/kg}$, for 1-g or 10-g respectively, when transmission band is between 100MHz and 200 MHz
 - $\leq 0.4 \text{ W/kg}$ or $\leq 1 \text{ W/kg}$, for 1-g or 10-g respectively, when transmission band is $\geq 200\text{MHz}$

9.12 SAR Testing Results

Position	Extremity	Limit 1 g (W/kg)	Limit 10g (W/kg)
Edge Top & Edge Bottom	Trunk	1.6	-
Front , Back , Edge Right , Edge Left	Limb	-	4

Table 15: SAR Testing Results (Wi-Fi 2.4 GHz)

Phantom	Position	Description	Channel	Frequency (MHz)	psSAR 1g [W/Kg]	psSAR 10g [W/Kg]	Tune up toleran ce	Adjust ed SAR Value (1g) W/kg	Adjust ed SAR Value (10g) W/kg
Flat HSL	FRONT	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	6	2437	0.337	0.162	±2	0.534	0.257
Flat HSL	BACK	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	6	2437	0.027	0.013	±2	0.043	0.021
Flat HSL	EDGE TOP	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	6	2437	0.019	0.008	±2	0.030	0.013
Flat HSL	EDGE BOTTOM	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	6	2437	0.052	0.024	±2	0.082	0.038
Flat HSL	EDGE LEFT	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	6	2437	0.082	0.035	±2	0.130	0.055
Flat HSL	EDGE RIGHT	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	6	2437	0.103	0.047	±2	0.163	0.074
Flat HSL	FRONT	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	11	2462	0.323	0.145	±2	0.512	0.230
Flat HSL	FRONT	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	1	2412	0.463	0.21	±2	0.734	0.333

Note :

- As the highest measured SAR is < 0.8 W/kg for lowest bandwidth channel, which is also the highest power configuration, remaining channels are optional. However these channels are measured as an additional analysis and reported in below table.
- For 2.4 GHz 802.11 g/n OFDMA mode, SAR testing is not required when the highest reported SAR for DSSS adjusted by the ratio of OFDMA to DSSS specified maximum output power and adjusted SAR is ≤ 1.2 W/kg, however this exclusion is not applied as an additional analysis, OFDMA test results are reported in the below table.
- Thresholds should be multiplied by 2.5 when 10-g extremity SAR is considered.

Prüfbericht- Nr.:

Test Report No.:

ULR-TC56882030000054F

Seite 34 von 41

Page 34 of 41

Flat HSL	FRONT	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	1	2412	0.159	0.069	±2	0.252	0.109
Flat HSL	FRONT	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	6	2437	0.37	0.167	±2	0.586	0.265
Flat HSL	FRONT	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	11	2462	0.108	0.046	±2	0.171	0.073
Flat HSL	FRONT	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	1	2412	0.161	0.071	±2	0.255	0.113
Flat HSL	FRONT	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	6	2437	0.311	0.14	±2	0.493	0.222
Flat HSL	FRONT	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	11	2462	0.105	0.046	±2	0.166	0.073
Flat HSL	FRONT	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	3	2422	0.075	0.036	±2	0.119	0.057
Flat HSL	FRONT	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	9	2452	0.07	0.03	±2	0.111	0.048

Prüfbericht- Nr.:
Test Report No.:

ULR-TC568820300000054F

Seite 35 von 41
Page 35 of 41

Position	Extremity	Limit 1 g (W/kg)	Limit 10g (W/kg)
Edge Top & Edge Bottom	Trunk	1.6	-
Front , Back , Edge Right , Edge Left	Limb	-	4

Table 16: SAR Testing Results (Wi-Fi 5 GHz- UNII Band 1)

Phantom	Position	Description	Chann el	Frequency (MHz)	psSAR 1g [W/Kg]	psSAR 10g [W/Kg]	Tune up tolera nce	Adjust ed SAR Value (1g) W/kg	Adjust ed SAR Value (10g) W/kg
Flat HSL	FRONT	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	36	5180	1.31	0.495	±2	2.076	0.785
Flat HSL	EDGE TOP	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	36	5180	0.069	0.032	±2	0.109	0.051
Flat HSL	EDGE BOTTOM	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	36	5180	0.341	0.123	±2	0.540	0.195
Flat HSL	FRONT	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	48	5240	1.03	0.395	±2	1.632	0.626
Flat HSL	BACK	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	48	5240	0.016	0.007	±2	0.025	0.011
Flat HSL	EDGE RIGHT	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	48	5240	0.120	0.045	±2	0.190	0.071
Flat HSL	EDGE LEFT	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	48	5240	0.125	0.049	±2	0.198	0.078
Flat HSL	EDGE TOP	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	48	5240	0.058	0.028	±2	0.092	0.044
Flat HSL	EDGE BOTTOM	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	48	5240	0.28	0.104	±2	0.444	0.165

Note :

- As the highest measured 1-g SAR is < 0.8 W/kg (be multiplied by 2.5 when 10-g extremity SAR is considered) in initial configuration, remaining channels are optional, However these channels are measured as an additional analysis.
- When the reported 1-g SAR in initial test configuration is less than 1.2W/kg (be multiplied by 2.5 when 10-g extremity SAR is considered),subsequent test configuration SAR is optional.

Prüfbericht- Nr.:

Test Report No.:

ULR-TC56882030000054F

Seite 36 von 41

Page 36 of 41

Flat HSL	FRONT	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	36	5180	1.4	1.11	±2	2.219	1.759
Flat HSL	EDGE TOP	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	36	5180	0.057	0.024	±2	0.090	0.038
Flat HSL	EDGE BOTTOM	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	36	5180	0.326	0.116	±2	0.517	0.184
Flat HSL	FRONT	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	48	5240	1.44	0.538	±2	2.282	0.853
Flat HSL	BACK	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	48	5240	0.014	0.009	±2	0.022	0.014
Flat HSL	EDGE RIGHT	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	48	5240	0.115	0.026	±2	0.182	0.041
Flat HSL	EDGE LEFT	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	48	5240	0.133	0.070	±2	0.211	0.111
Flat HSL	EDGE TOP	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	48	5240	0.072	0.029	±2	0.114	0.046
Flat HSL	EDGE BOTTOM	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	48	5240	0.34	0.123	±2	0.539	0.195

Prüfbericht- Nr.:

Test Report No.:

ULR-TC56882030000054F

Seite 37 von 41

Page 37 of 41

Flat HSL	FRONT	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	38	5190	0.538	0.202	±2	0.853	0.320
Flat HSL	EDGE TOP	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	38	5190	0.045	0.019	±2	0.071	0.030
Flat HSL	EDGE BOTTOM	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	38	5190	0.249	0.09	±2	0.395	0.143
Flat HSL	FRONT	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	46	5230	0.987	0.369	±2	1.564	0.585
Flat HSL	BACK	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	46	5230	0.030	0.009	±2	0.048	0.014
Flat HSL	EDGE RIGHT	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	46	5230	0.164	0.086	±2	0.260	0.136
Flat HSL	EDGE LEFT	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	46	5230	0.195	0.052	±2	0.309	0.082
Flat HSL	EDGE TOP	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	46	5230	0.047	0.026	±2	0.074	0.041
Flat HSL	EDGE BOTTOM	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	46	5230	0.235	0.086	±2	0.372	0.136

Prüfbericht- Nr.:

Test Report No.:

ULR-TC568820300000054F**Seite 38 von 41**

Page 38 of 41

Position	Extremity	Limit 1 g (W/kg)	Limit 10g (W/kg)
Edge Top & Edge Bottom	Trunk	1.6	-
Front , Back , Edge Right , Edge Left	Limb	-	4

Table 17: SAR Testing Results(Wi-Fi 5 GHz- UNII Band 3)

Phantom	Position	Description	Channel	Frequency (MHz)	psSAR 1g [W/Kg]	psSAR 10g [W/Kg]	Tune up tolera nce	Adjust ed SAR Value (1g) W/kg	Adjust ed SAR Value (10g) W/kg
Flat HSL	FRONT	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	149	5745	0.618	0.209	±2	0.979	0.331
Flat HSL	EDGE TOP	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	149	5745	0.021	0.019	±2	0.033	0.030
Flat HSL	EDGE BOTTOM	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	149	5745	0.234	0.097	±2	0.371	0.154
Flat HSL	FRONT	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	165	5825	0.943	0.326	±2	1.495	0.517
Flat HSL	BACK	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	165	5825	0.009	0.007	±2	0.014	0.011
Flat HSL	EDGE RIGHT	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	165	5825	0.100	0.055	±2	0.158	0.087
Flat HSL	EDGE LEFT	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	165	5825	0.050	0.009	±2	0.079	0.014
Flat HSL	EDGE TOP	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	165	5825	0.027	0.022	±2	0.043	0.035
Flat HSL	EDGE BOTTOM	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	165	5825	0.266	0.098	±2	0.422	0.155

Note :

- As the highest measured 1-g SAR is < 0.8 W/kg (be multiplied by 2.5 when 10-g extremity SAR is considered) in initial configuration, remaining channels are optional, However these channels are measured as an additional analysis.
- When the reported 1-g SAR in initial test configuration is less than 1.2W/kg (be multiplied by 2.5 when 10-g extremity SAR is considered),subsequent test configuration SAR is optional.

Prüfbericht- Nr.:

Test Report No.:

ULR-TC568820300000054F

Seite 39 von 41

Page 39 of 41

Flat HSL	FRONT	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	149	5745	0.692	0.232	±2	1.097	0.368
Flat HSL	EDGE TOP	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	149	5745	0.026	0.023	±2	0.041	0.036
Flat HSL	EDGE BOTTOM	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	149	5745	0.247	0.098	±2	0.391	0.155
Flat HSL	FRONT	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	165	5825	0.799	0.265	±2	1.266	0.420
Flat HSL	BACK	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	165	5825	0.005	0.001	±2	0.008	0.002
Flat HSL	EDGE RIGHT	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	165	5825	0.095	0.018	±2	0.151	0.029
Flat HSL	EDGE LEFT	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	165	5825	0.060	0.009	±2	0.095	0.014
Flat HSL	EDGE TOP	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	165	5825	0.028	0.024	±2	0.044	0.038
Flat HSL	EDGE BOTTOM	IEEE 802.11n (HT Mixed, 39 Mbps, BPSK)	165	5825	0.244	0.092	±2	0.387	0.146

Prüfbericht- Nr.:

Test Report No.:

ULR-TC568820300000054F

Seite 40 von 41

Page 40 of 41

Flat HSL	FRONT	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	151	5755	0.99	0.33	±2	1.569	0.523
Flat HSL	EDGE TOP	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	151	5755	0.022	0.02	±2	0.035	0.032
Flat HSL	EDGE BOTTOM	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	151	5755	0.285	0.113	±2	0.452	0.179
Flat HSL	FRONT	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	159	5795	0.944	0.31	±2	1.496	0.491
Flat HSL	BACK	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	159	5795	0.008	0.005	±2	0.013	0.008
Flat HSL	EDGE RIGHT	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	159	5795	0.053	0.026	±2	0.084	0.041
Flat HSL	EDGE LEFT	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	159	5795	0.046	0.004	±2	0.073	0.006
Flat HSL	EDGE TOP	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	159	5795	0.028	0.025	±2	0.044	0.040
Flat HSL	EDGE BOTTOM	IEEE 802.11n (HT Mixed, 81 Mbps, BPSK)	159	5795	0.257	0.106	±2	0.407	0.168

10 LIST OF TABLES

Table 1: Test and measurement instruments used	7
Table 2: Instrument application Software versions.....	7
Table 3: Ratings and System Details as declared by client*	8
Table 4: Measurement Uncertainty	9
Table 5: List of center Frequencies(Wi-Fi 5 GHz).....	11
Table 6: List of Wi-Fi Frequencies(Wi-Fi 2.4 GHz).....	12
Table 7: List of BLE Frequencies of the EUT	13
Table 8: Targets of Tissue Simulating Liquid	22
Table 9: Recipes of Tissue Simulating Liquid.....	23
Table 10: The measuring results for tissue simulating liquid.....	27
Table 11: The measuring results for system check	27
Table 12: The results of conducted power (Wi-Fi 2.4GHz).....	28
Table 13: The results of conducted power (BLE).....	28
Table 14: The results of conducted power (Wi-Fi 5GHz).....	29
Table 15: SAR Testing Results(Wi-Fi 2.4 GHz).....	33
Table 16: SAR Testing Results(Wi-Fi 5 GHz- UNII Band 1).....	35
Table 17: SAR Testing Results(Wi-Fi 5 GHz- UNII Band 3).....	38

11 LIST OF FIGURES

Figure 1: SPEAG DASY6 System	17
Figure 2: SPEAG DASY6 Robot	18
Figure 3: EX3DV4 Probe.....	18
Figure 4: DAE4	19
Figure 5: Twin SAM Phantom	19
Figure 6: ELI Phantom	19
Figure 7: Mounting Device.....	20
Figure 8: Laptop Extension.....	20
Figure 9: D-Serial Dipole	20
Figure 10: Photo of Liquid Height for Head Position & Photo of Liquid Height for Body Position.....	21
Figure 11: System Verification Setup.....	24

*END OF TEST REPORT***