




Transmitter Radiated Unwanted Emissions (Below 1GHz)

Transmitter Radiated Unwanted Emissions (Below 1GHz)			
Operating Mode	1	Polarization	V
Operating Function	Adapter Mode		

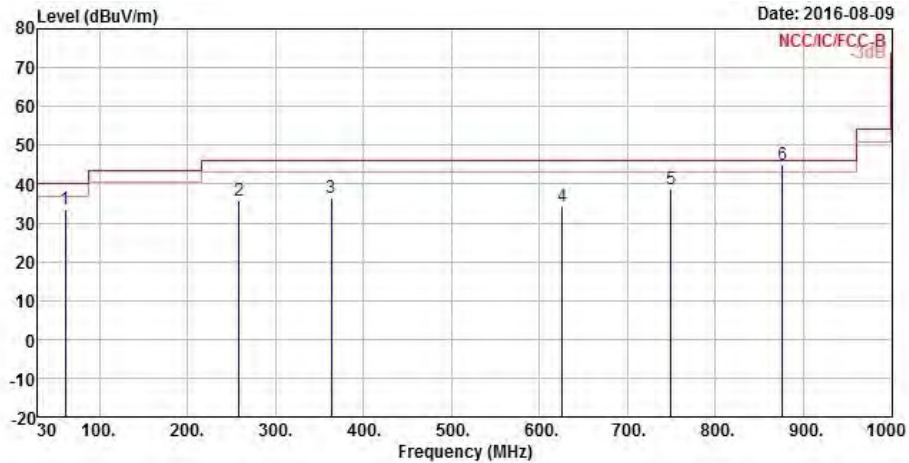


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	61.040	33.34	-6.66	40.00	58.93	11.05	0.47	37.11	Peak
2	258.920	35.87	-10.13	46.00	52.48	18.89	0.90	36.40	Peak
3	363.680	36.63	-9.37	46.00	51.50	20.63	1.07	36.57	Peak
4	625.580	34.35	-11.65	46.00	45.23	25.01	1.44	37.33	Peak
5	749.740	38.82	-7.18	46.00	47.84	26.90	1.60	37.52	Peak
6	875.840	44.88	-1.12	46.00	52.47	28.30	1.76	37.65	QP

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	H
Operating Function	Adapter Mode		

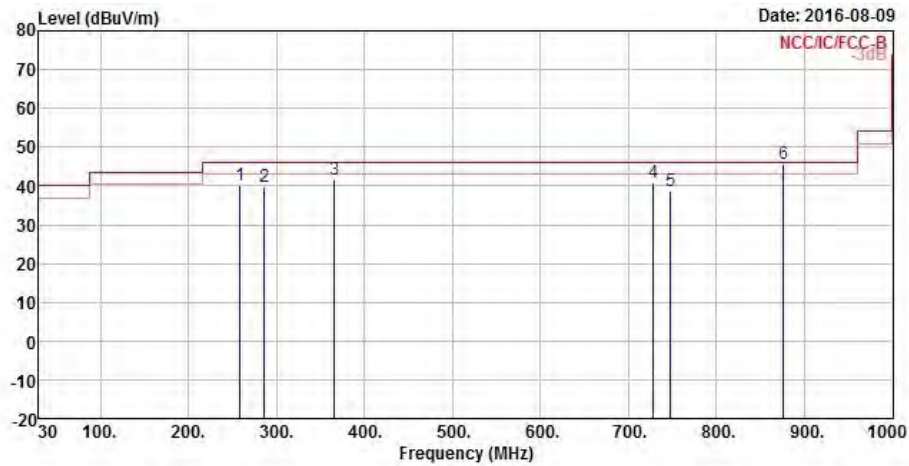

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	258.920	40.04	-5.96	46.00	56.65	18.89	0.90	36.40	Peak
2	286.080	39.60	-6.40	46.00	56.54	18.52	0.94	36.40	Peak
3	365.620	41.51	-4.49	46.00	56.34	20.67	1.07	36.57	Peak
4	728.400	41.06	-4.94	46.00	50.47	26.51	1.58	37.50	Peak
5	747.800	38.80	-7.20	46.00	47.85	26.86	1.60	37.51	Peak
6	875.840	45.82	-0.18	46.00	53.41	28.30	1.76	37.65	QP


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

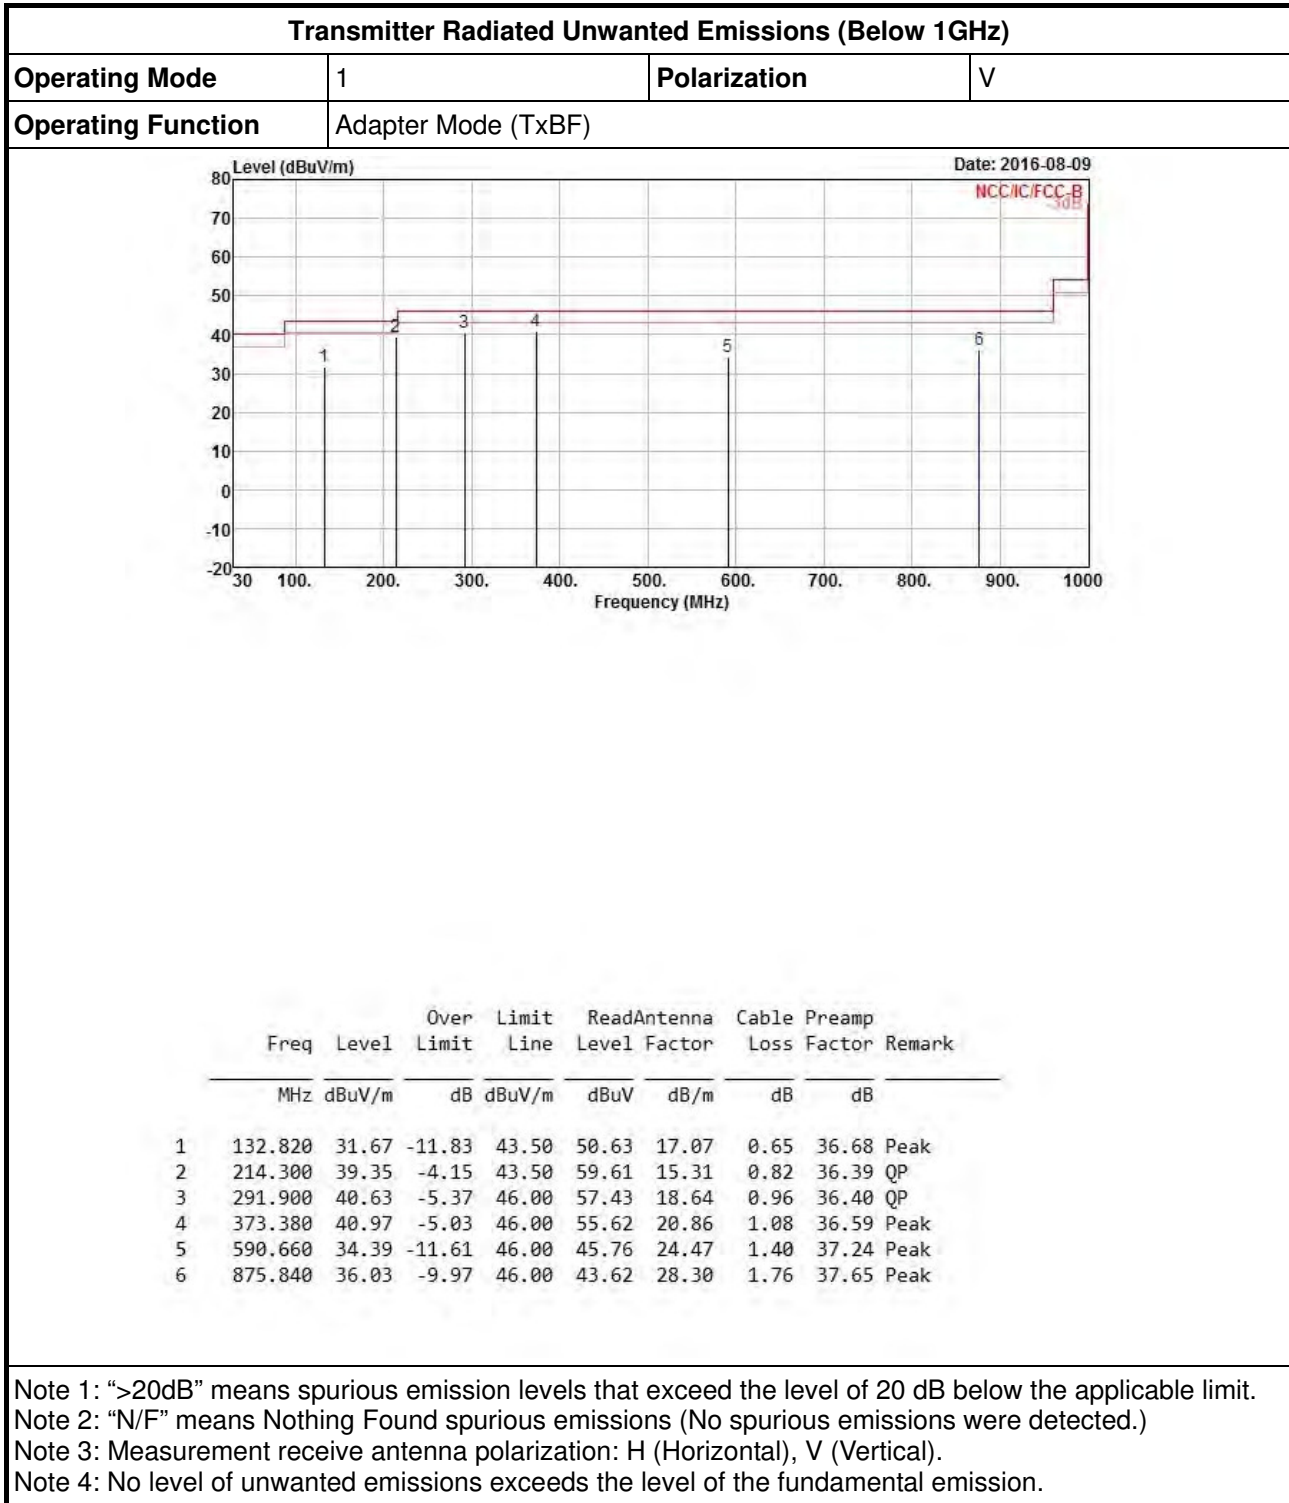



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	H
Operating Function	Adapter Mode (TxBF)		

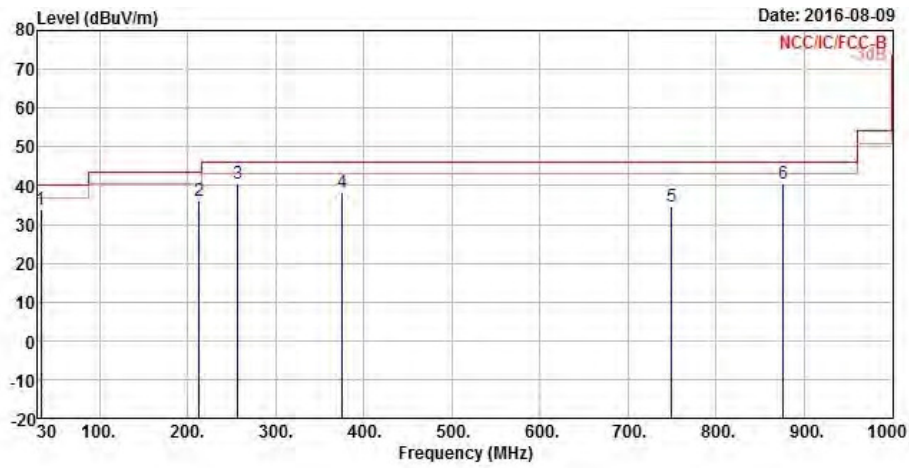


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	33.880	33.71	-6.29	40.00	47.94	22.80	0.34	37.37 Peak
2	213.330	36.10	-7.40	43.50	56.35	15.33	0.81	36.39 Peak
3	256.980	40.37	-5.63	46.00	57.18	18.70	0.89	36.40 QP
4	375.320	38.46	-7.54	46.00	53.07	20.91	1.08	36.60 Peak
5	749.740	34.46	-11.54	46.00	43.48	26.90	1.60	37.52 Peak
6	875.840	40.66	-5.34	46.00	48.25	28.30	1.76	37.65 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz


Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a	Test Freq. (MHz)	5180
N _{TX}	4	Polarization	V

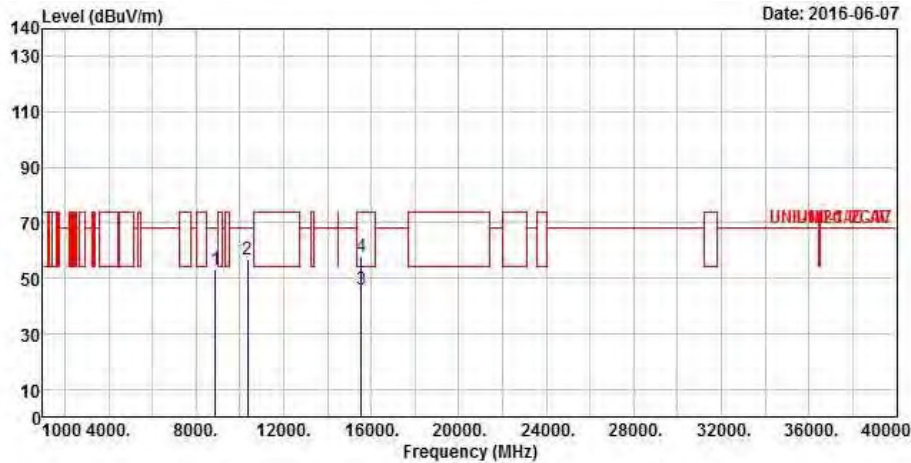

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8873.000	53.08	-15.12	68.20	43.26	37.25	8.30	35.73	Peak
2	10360.000	57.03	-11.17	68.20	43.75	39.48	9.41	35.61	Peak
3	15540.000	46.23	-7.77	54.00	31.91	38.41	11.54	35.63	Average
4	15540.000	57.71	-16.29	74.00	43.39	38.41	11.54	35.63	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

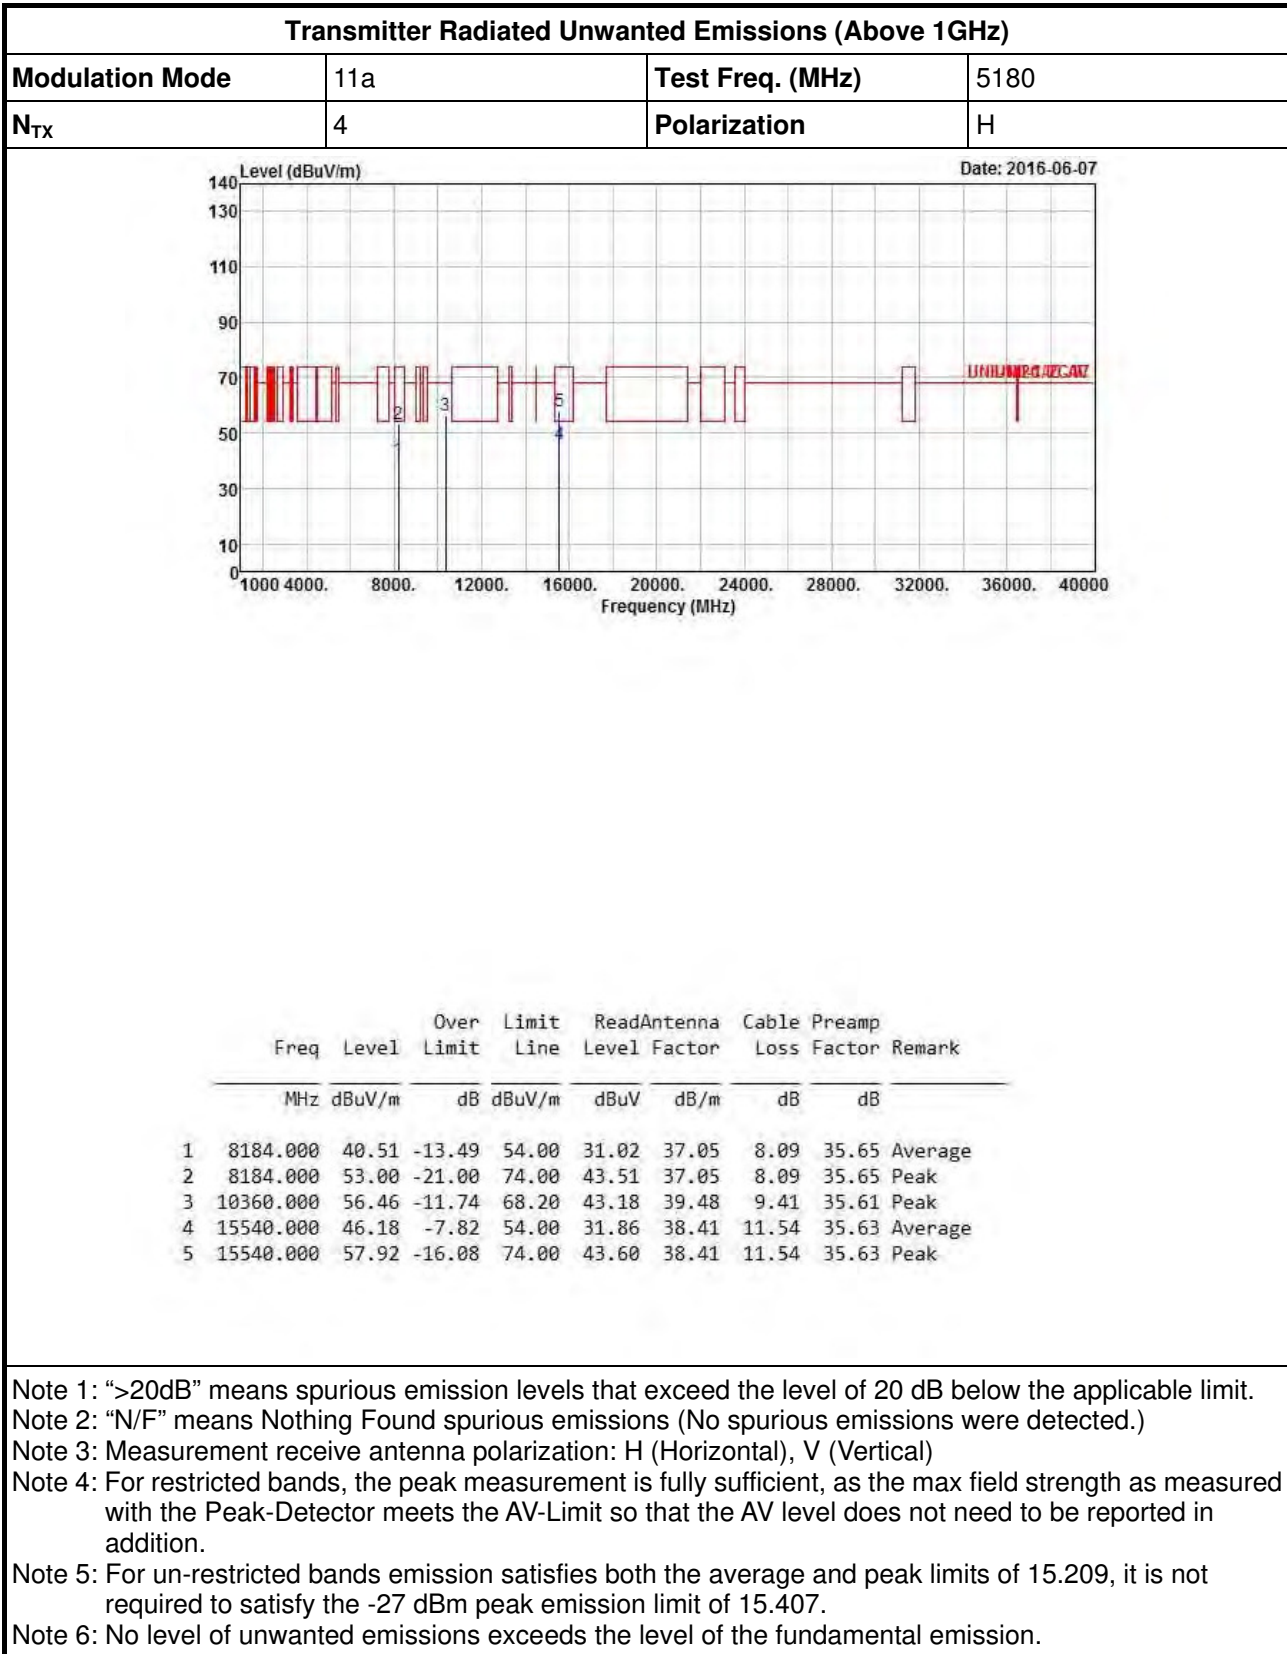


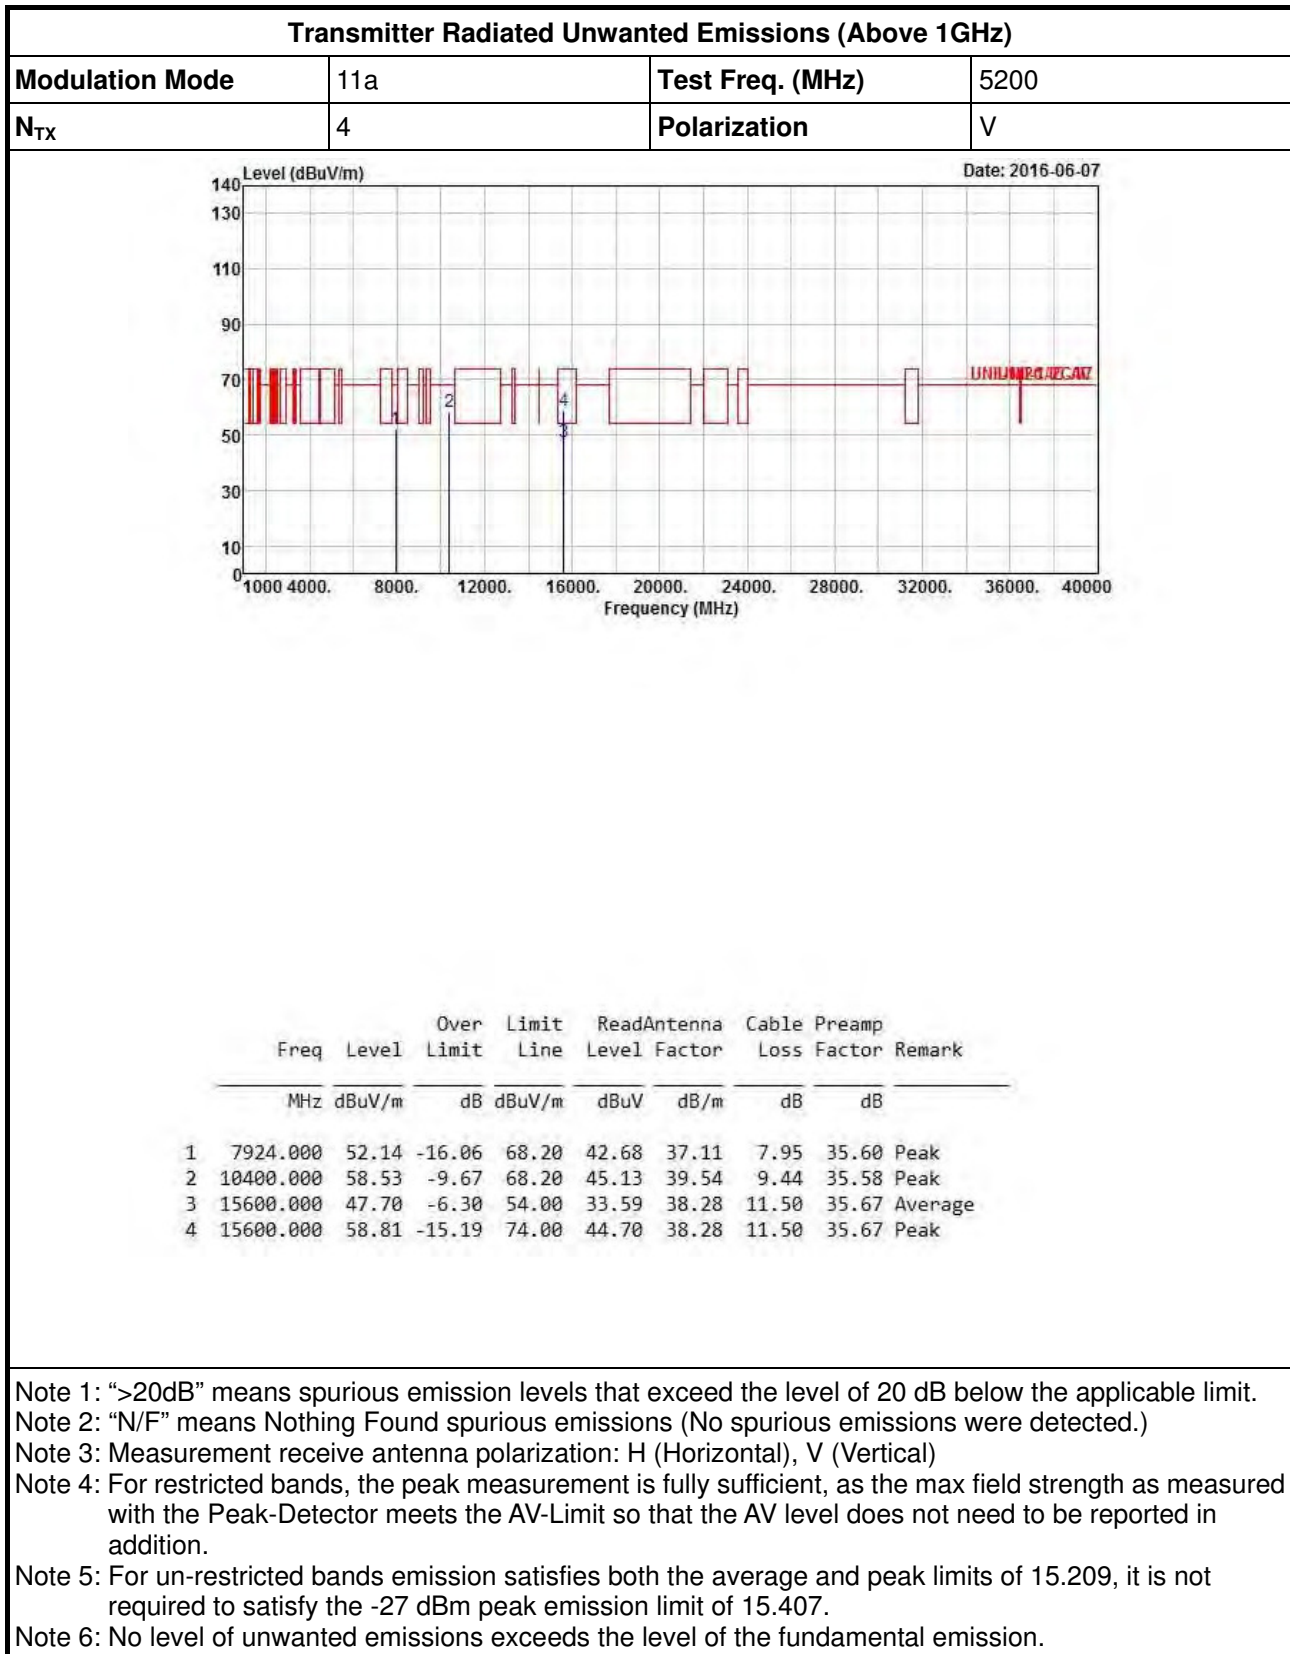




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	11a	Test Freq. (MHz)	5200
N _{TX}	4	Polarization	H

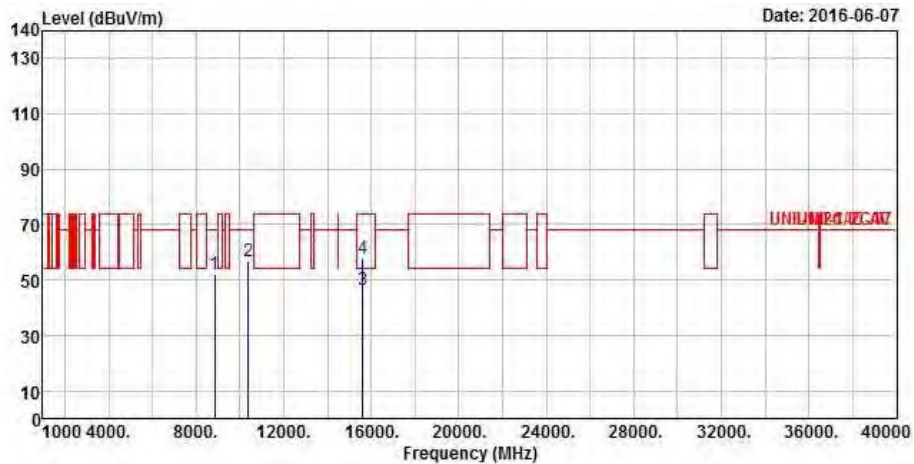



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8852.000	52.20	-16.00	68.20	42.41	37.22	8.30	35.73	Peak
2	10400.000	56.96	-11.24	68.20	43.56	39.54	9.44	35.58	Peak
3	15600.000	46.28	-7.72	54.00	32.17	38.28	11.50	35.67	Average
4	15600.000	57.98	-16.02	74.00	43.87	38.28	11.50	35.67	Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

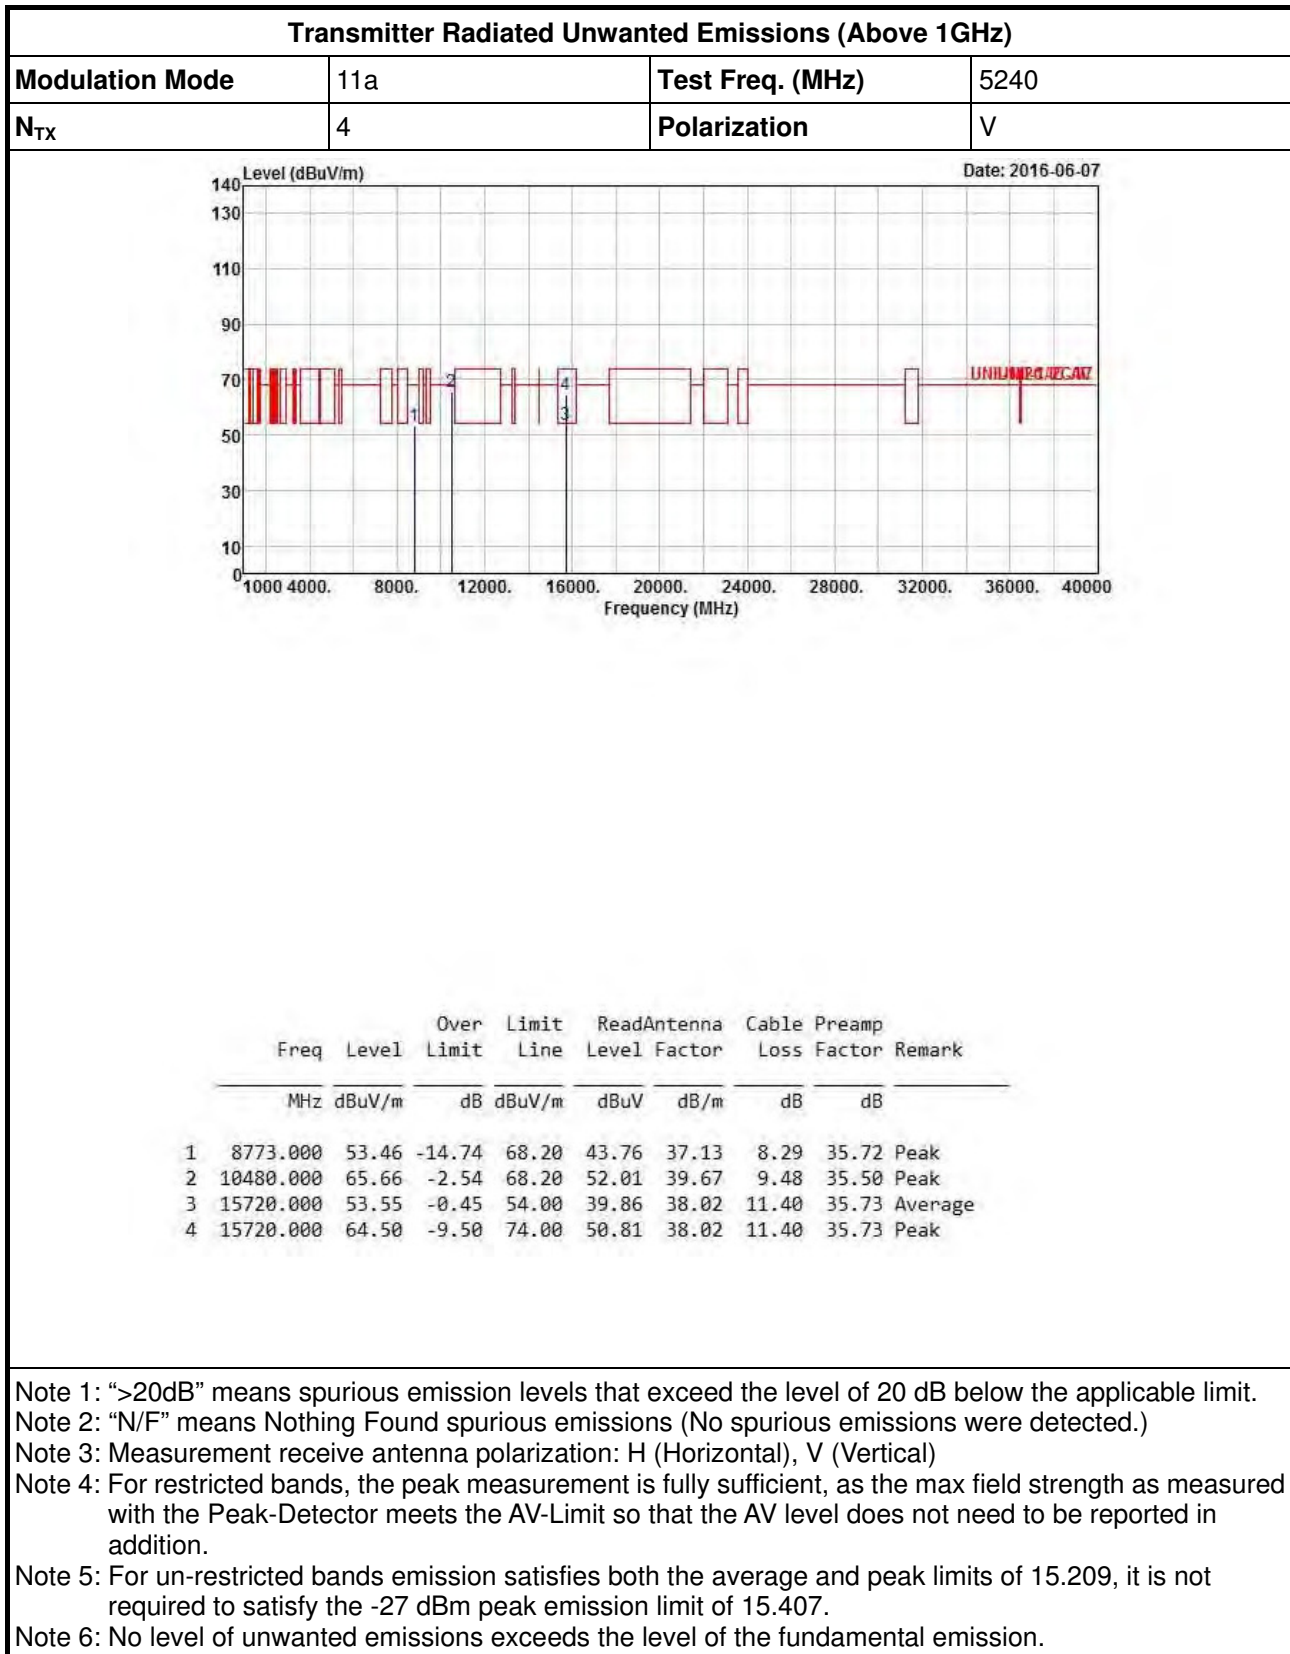


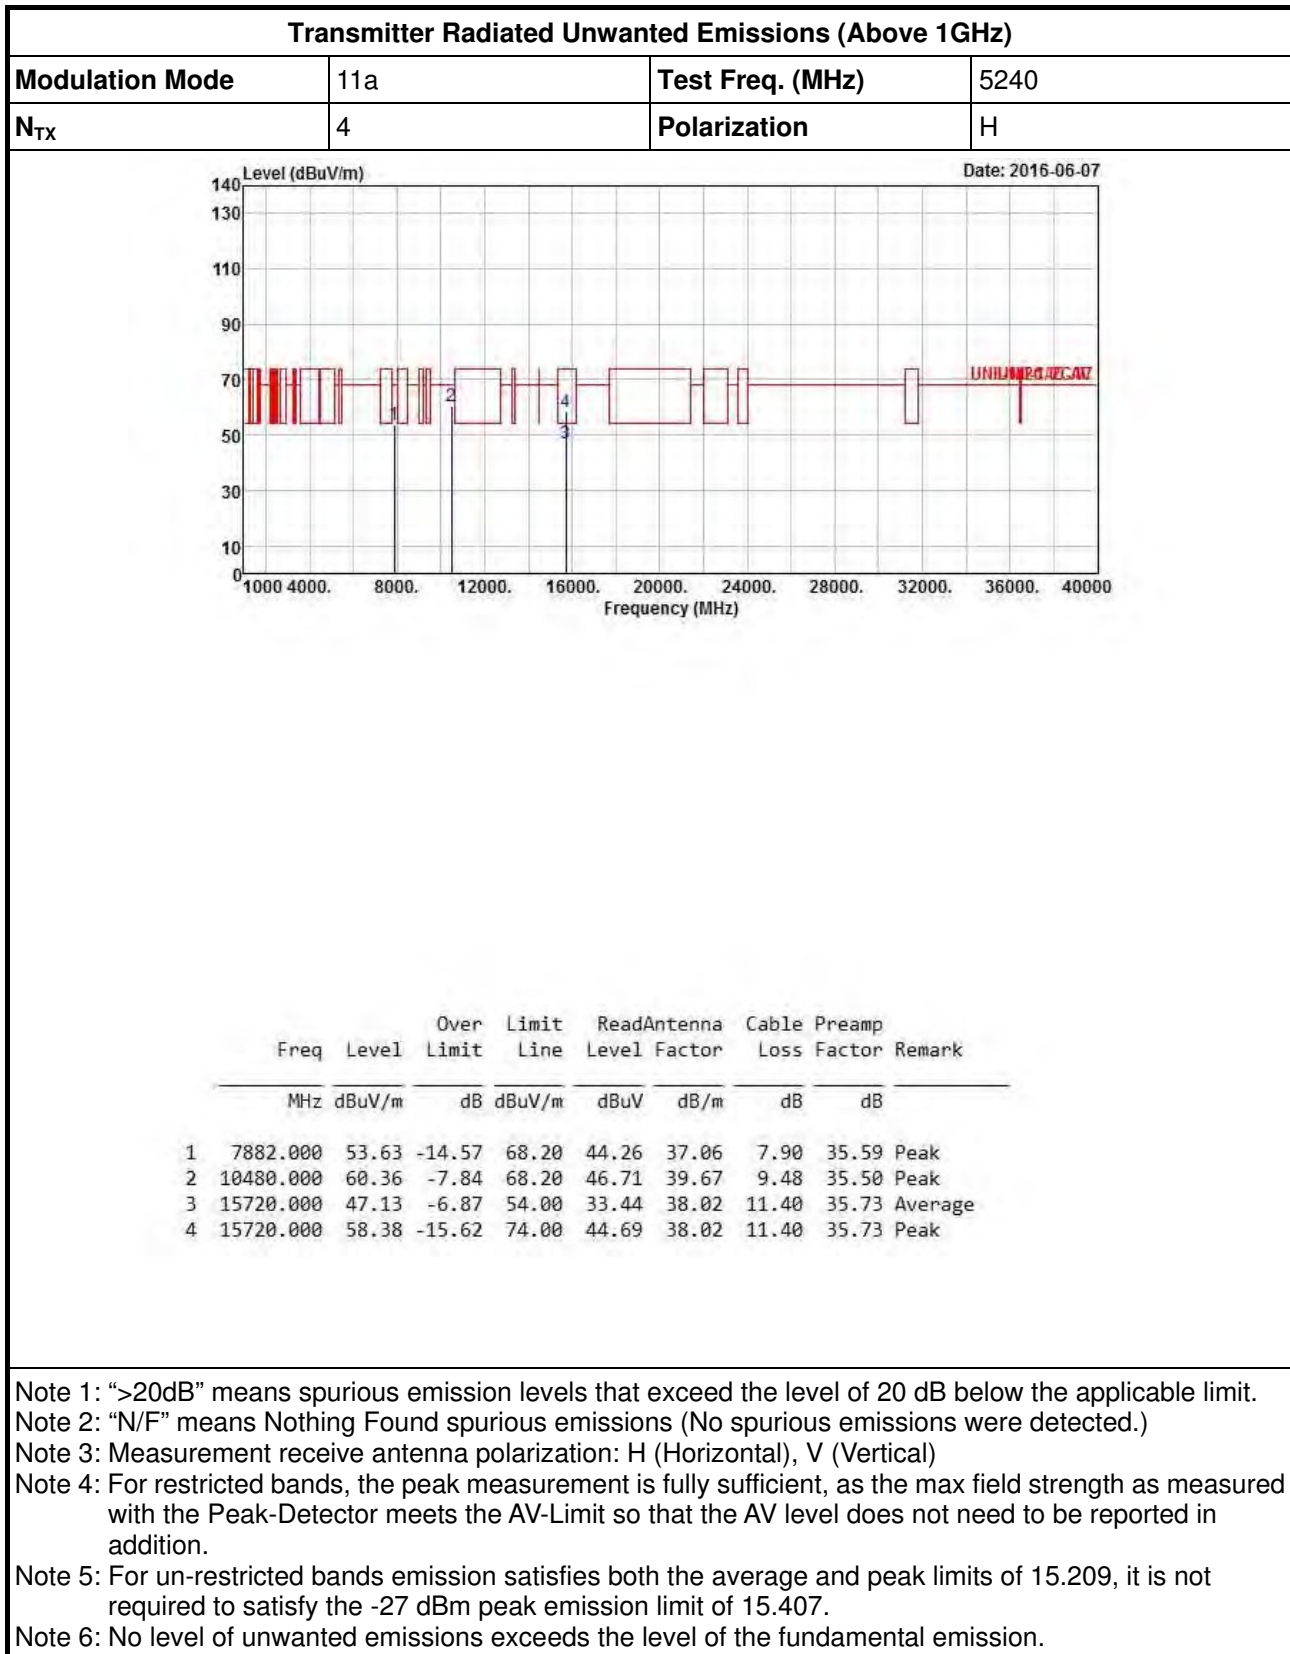


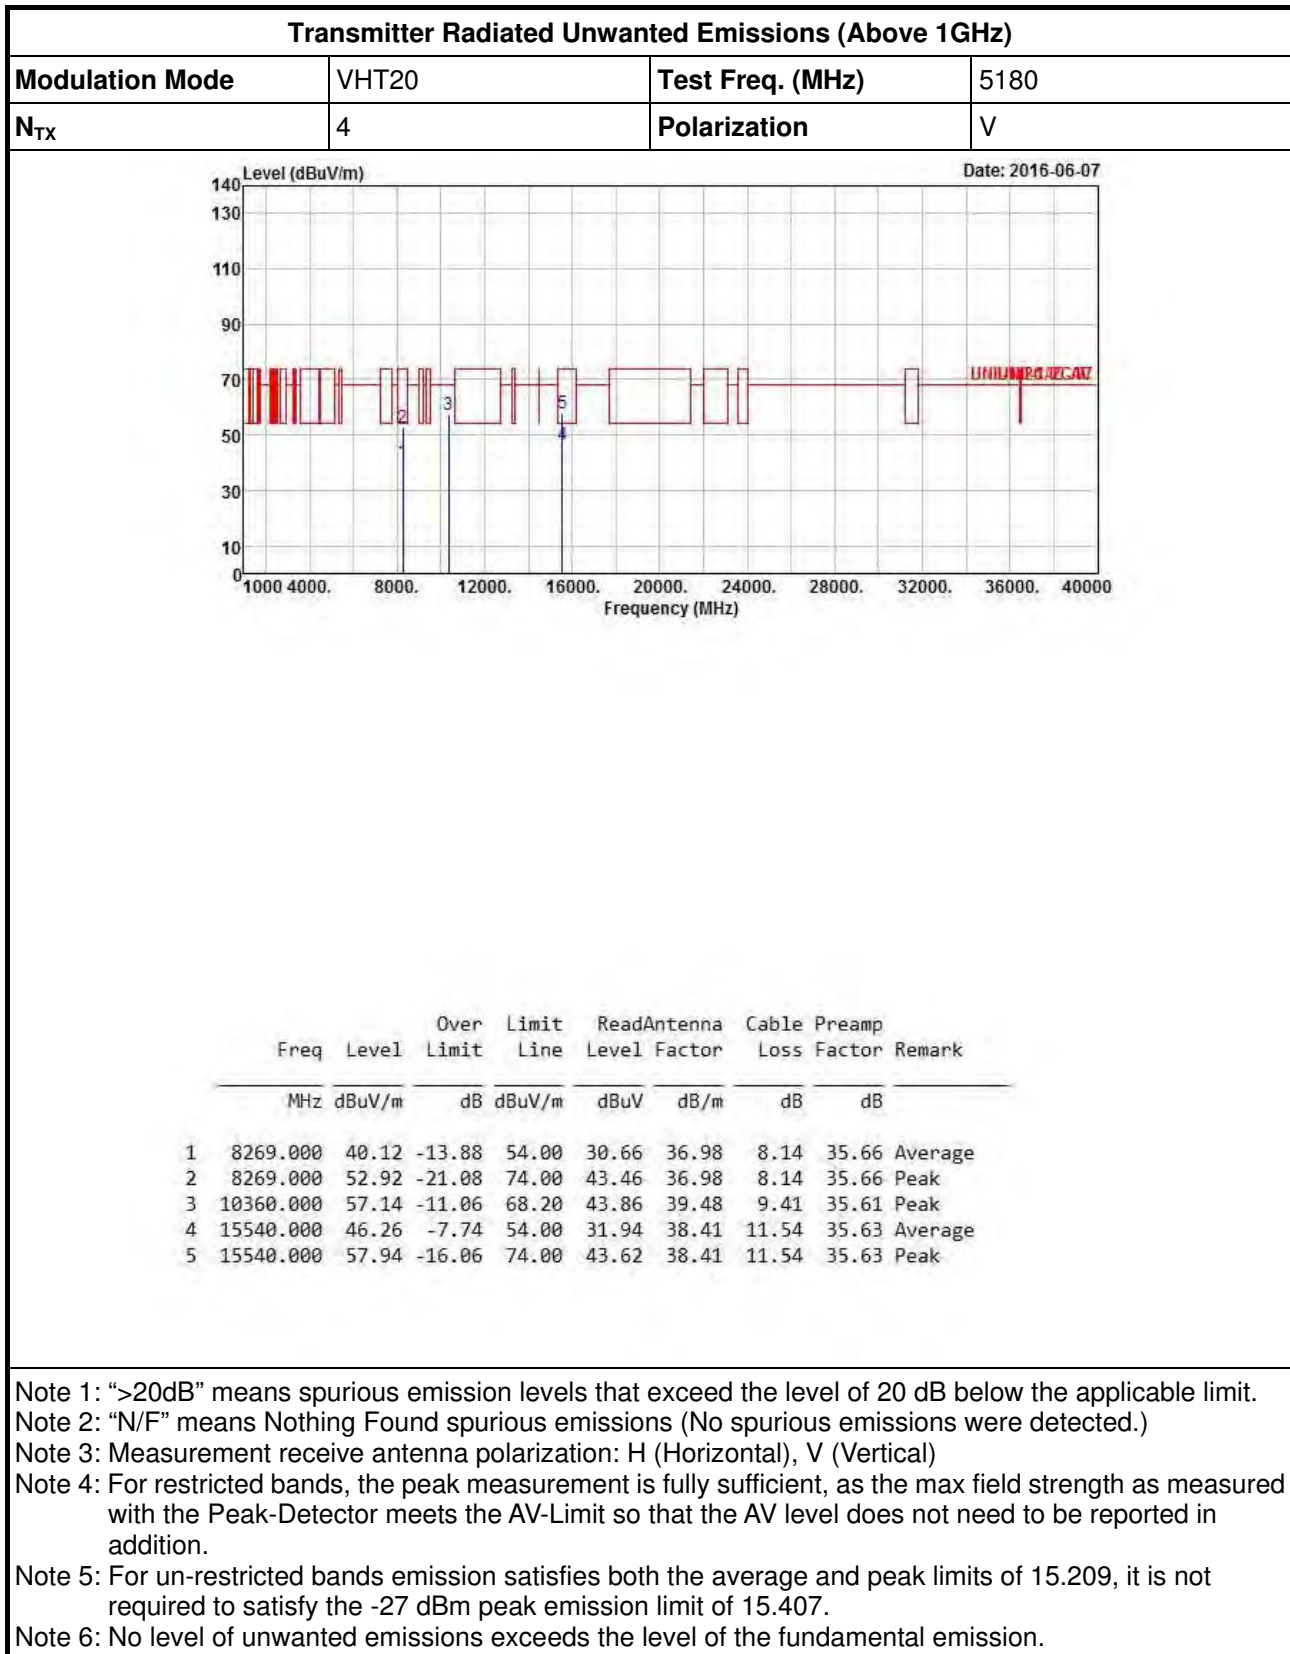

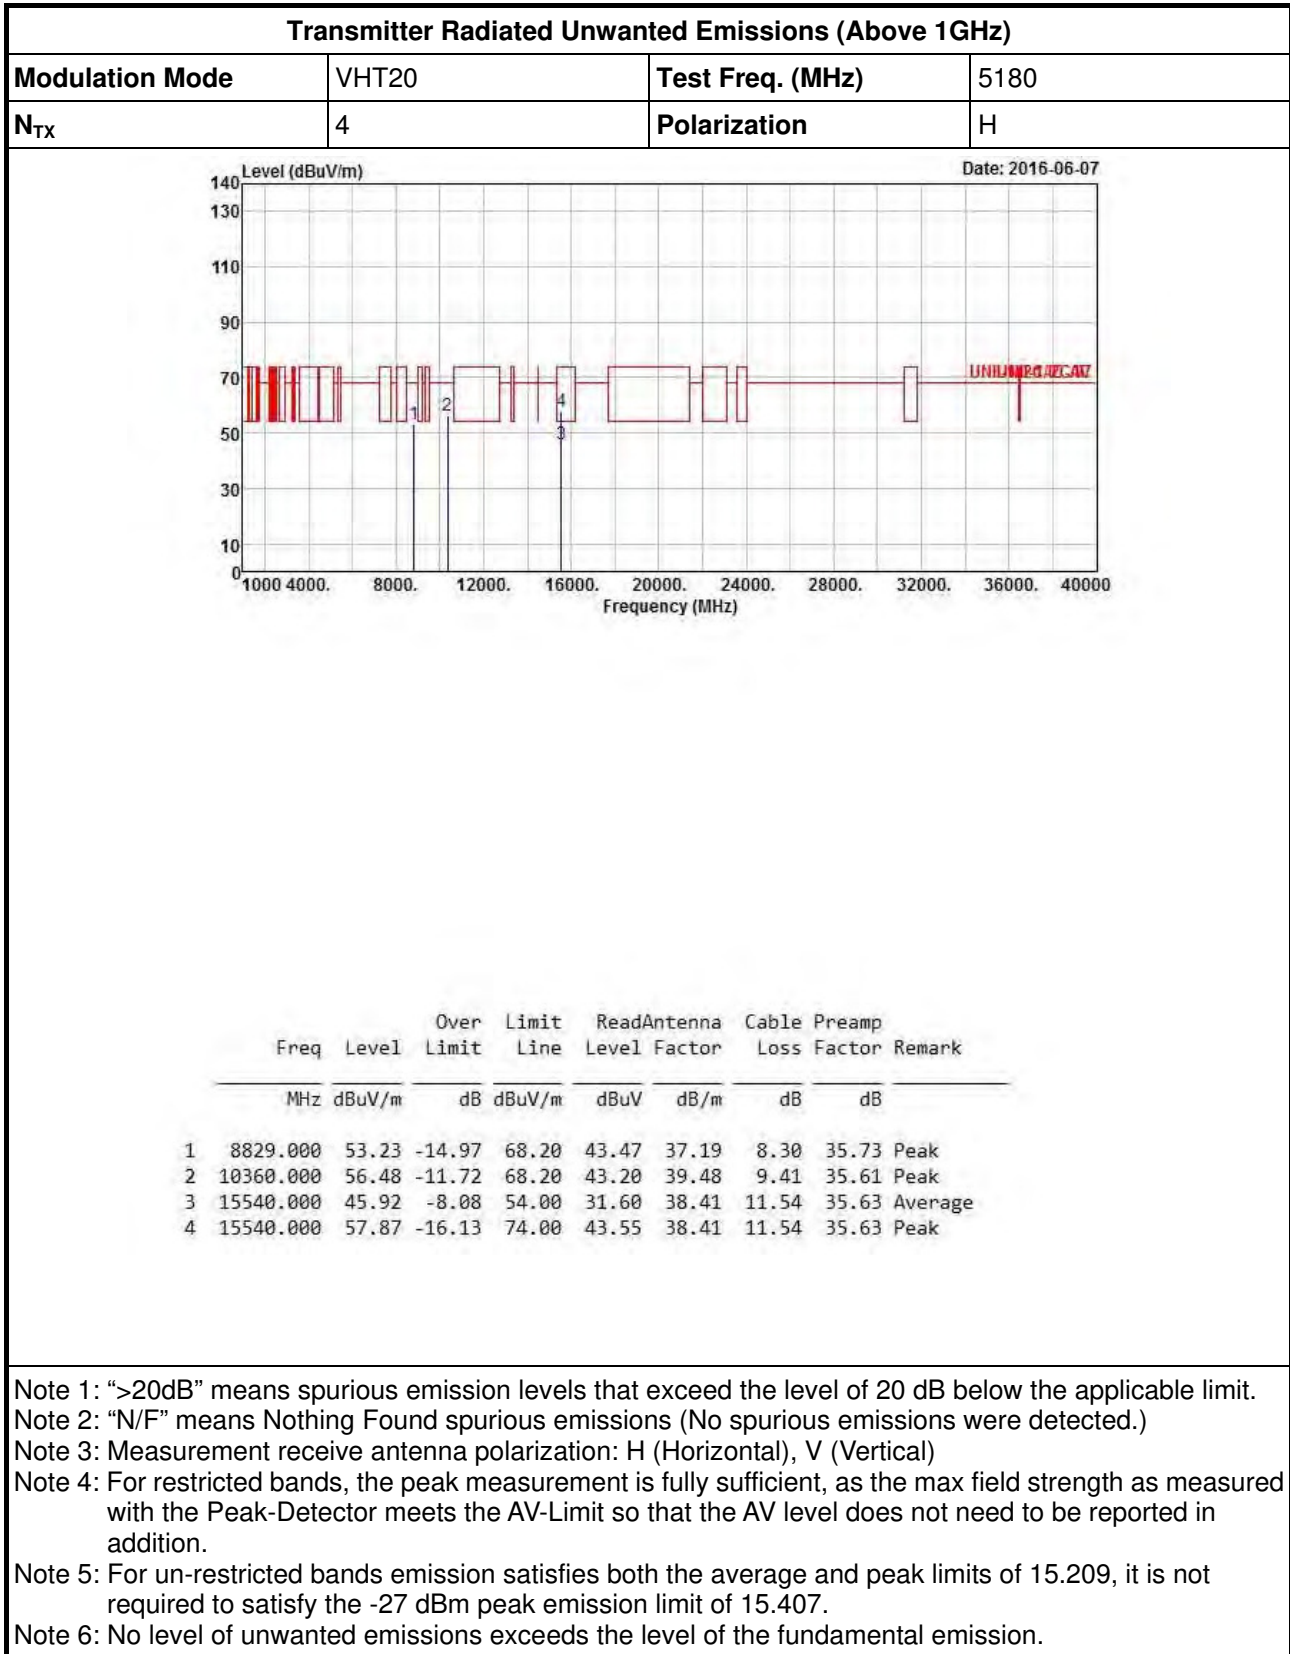

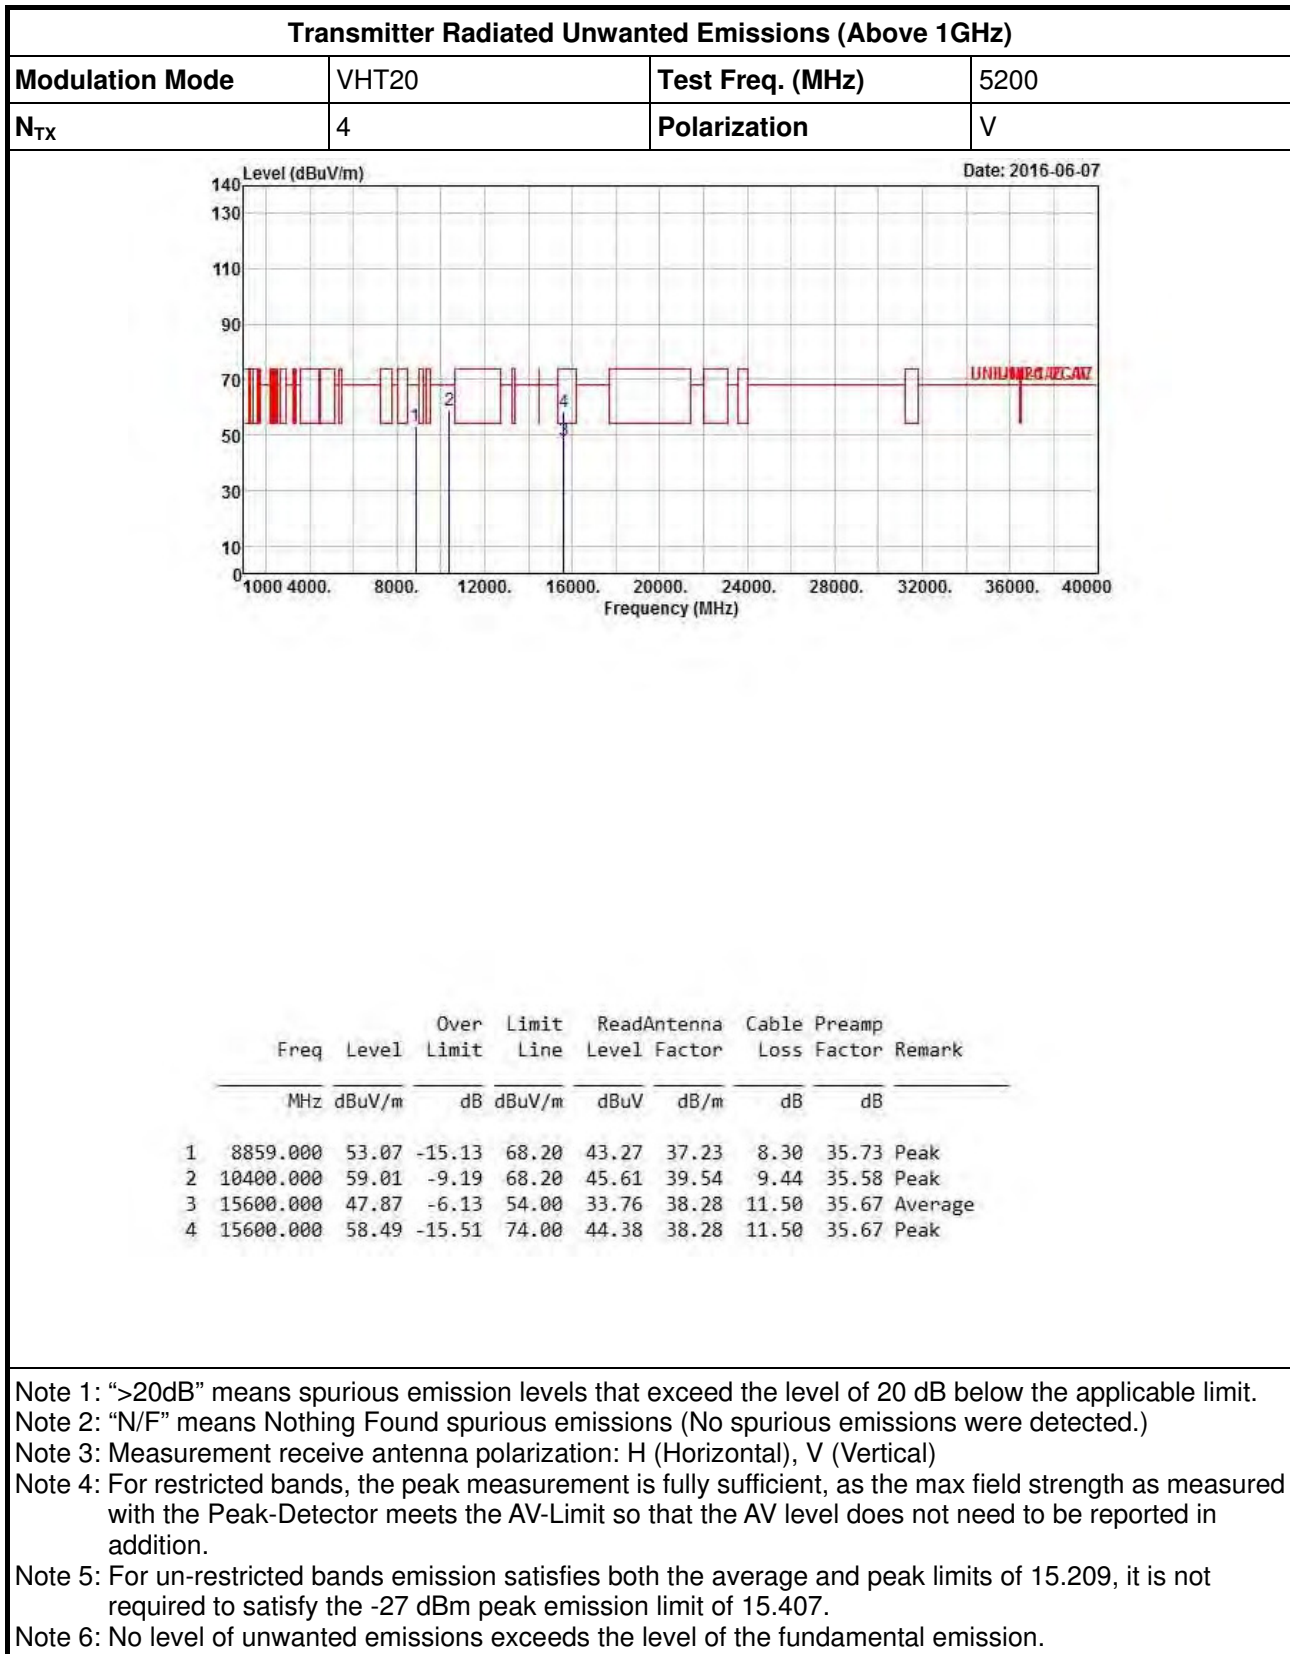


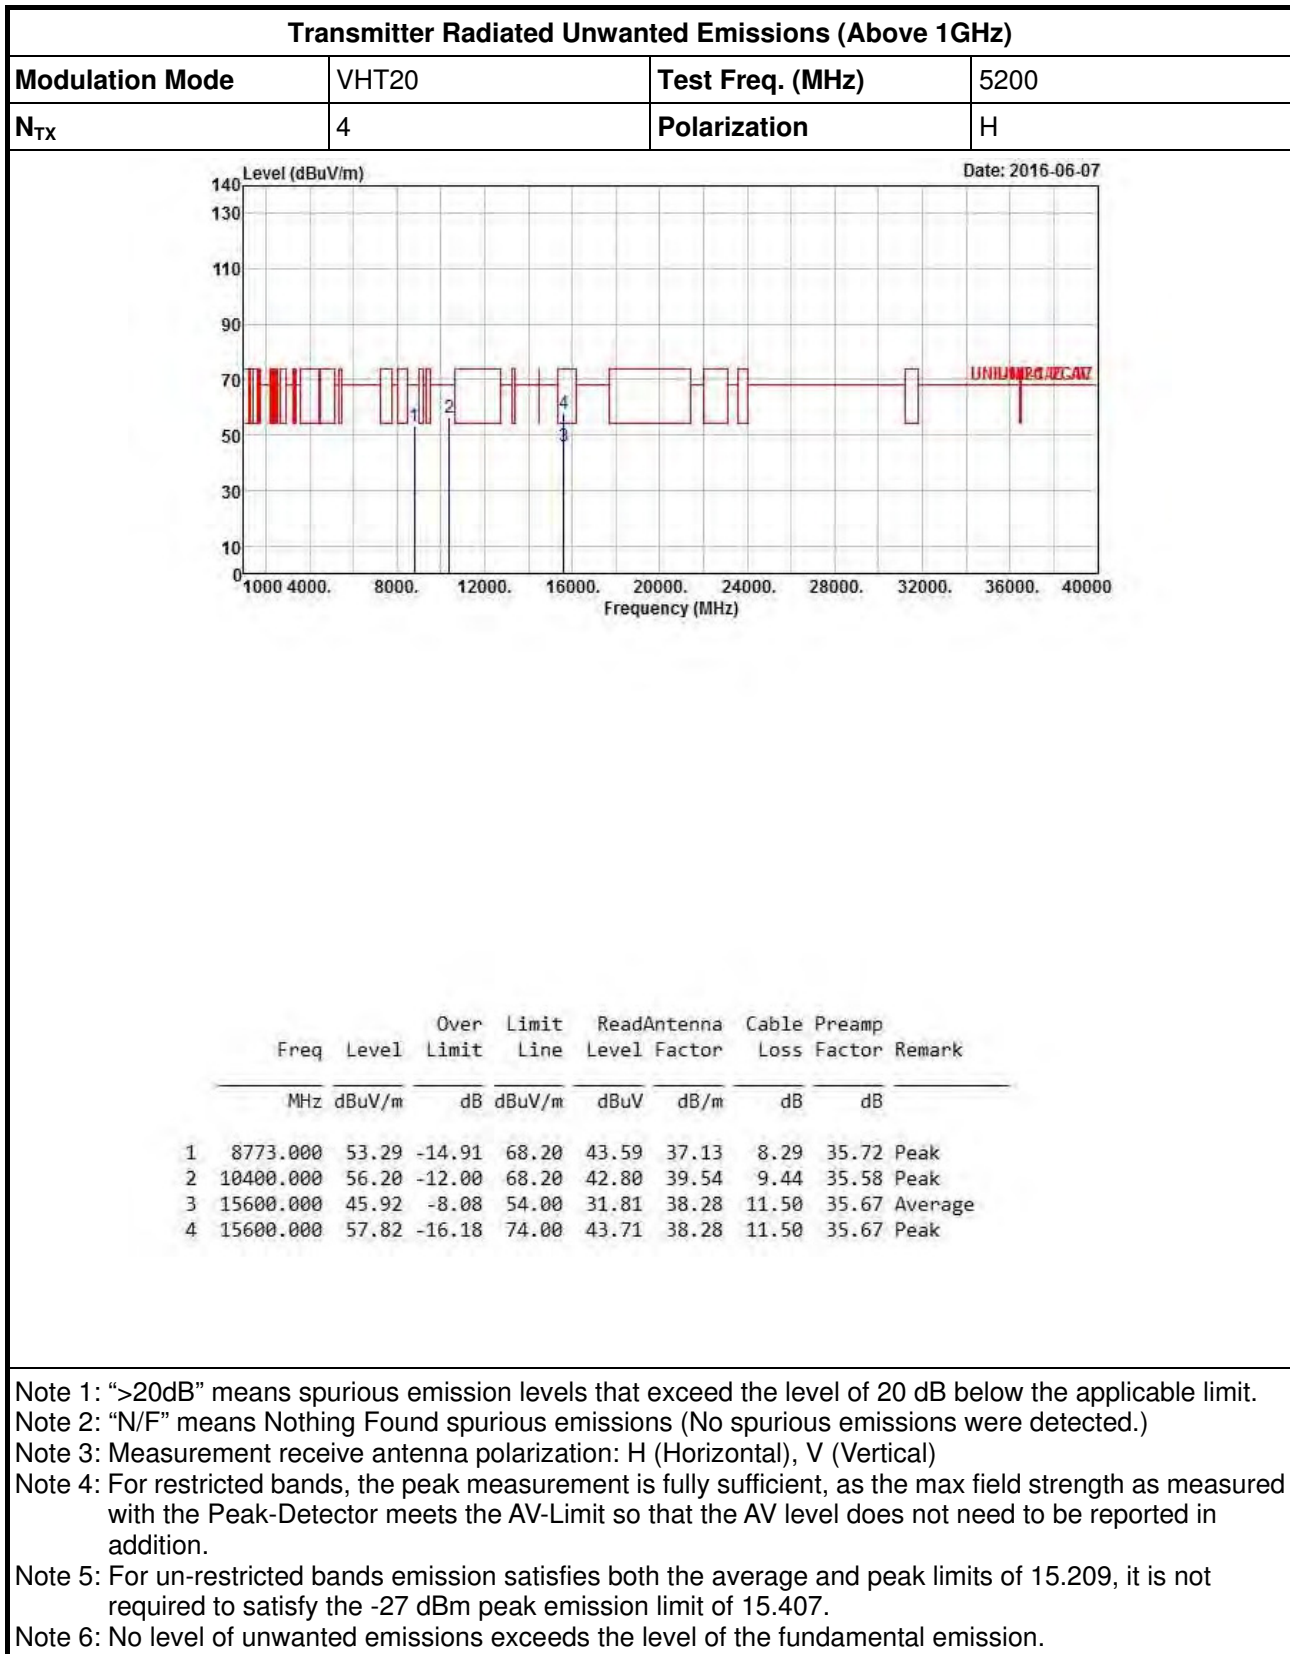

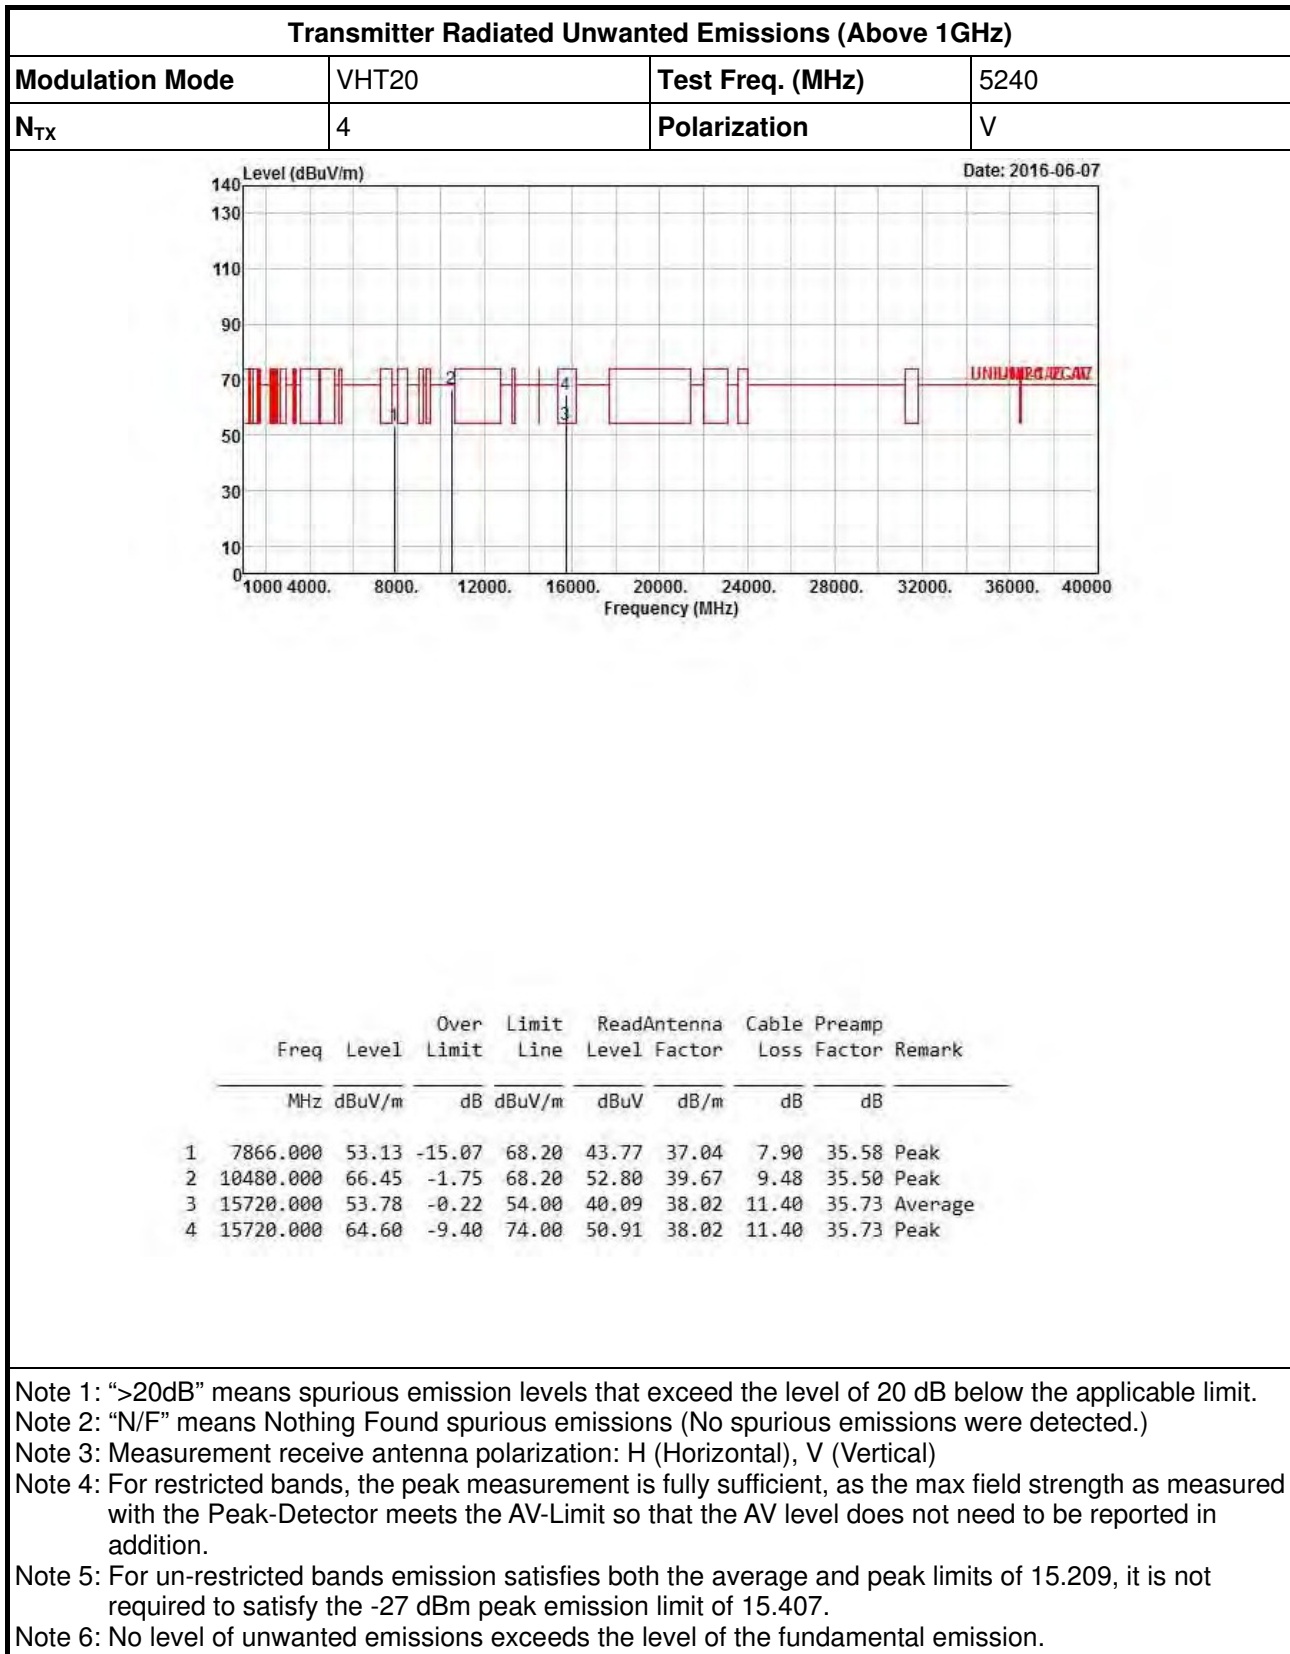





Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	VHT20	Test Freq. (MHz)	5240
N _{TX}	4	Polarization	H

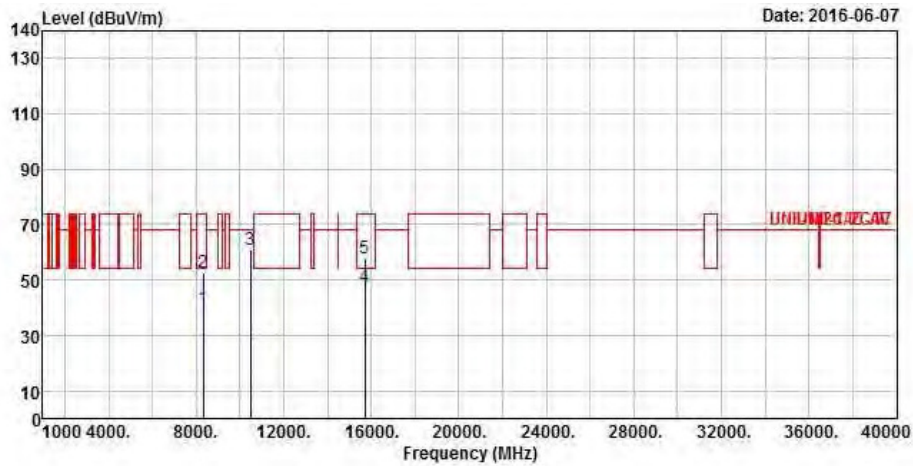



	Freq	Level	Over Limit	Limit	ReadAntenna	Cable Preamp	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8321.000	40.03	-13.97	54.00	30.57	36.94	8.18	35.66 Average
2	8321.000	52.95	-21.05	74.00	43.49	36.94	8.18	35.66 Peak
3	10480.000	60.95	-7.25	68.20	47.30	39.67	9.48	35.50 Peak
4	15720.000	47.51	-6.49	54.00	33.82	38.02	11.40	35.73 Average
5	15720.000	57.98	-16.02	74.00	44.29	38.02	11.40	35.73 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

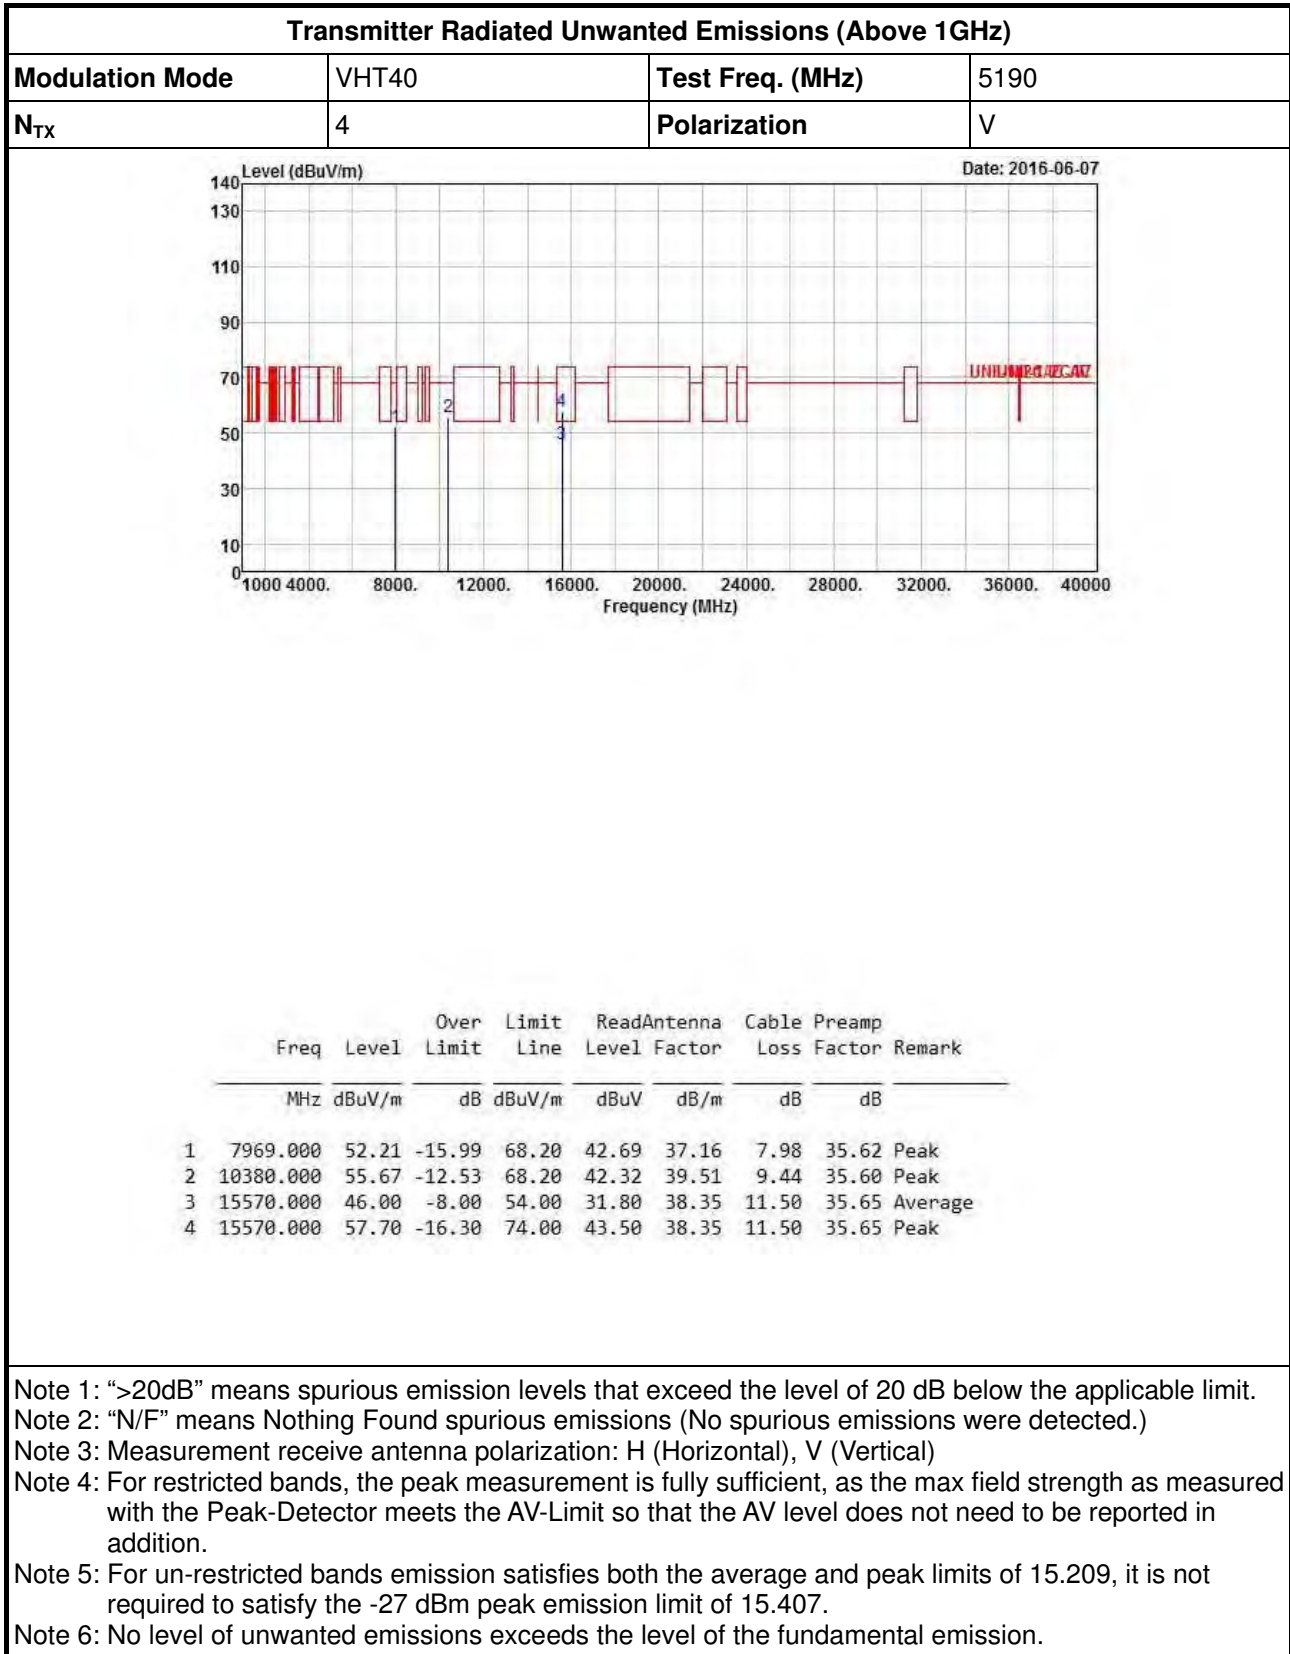


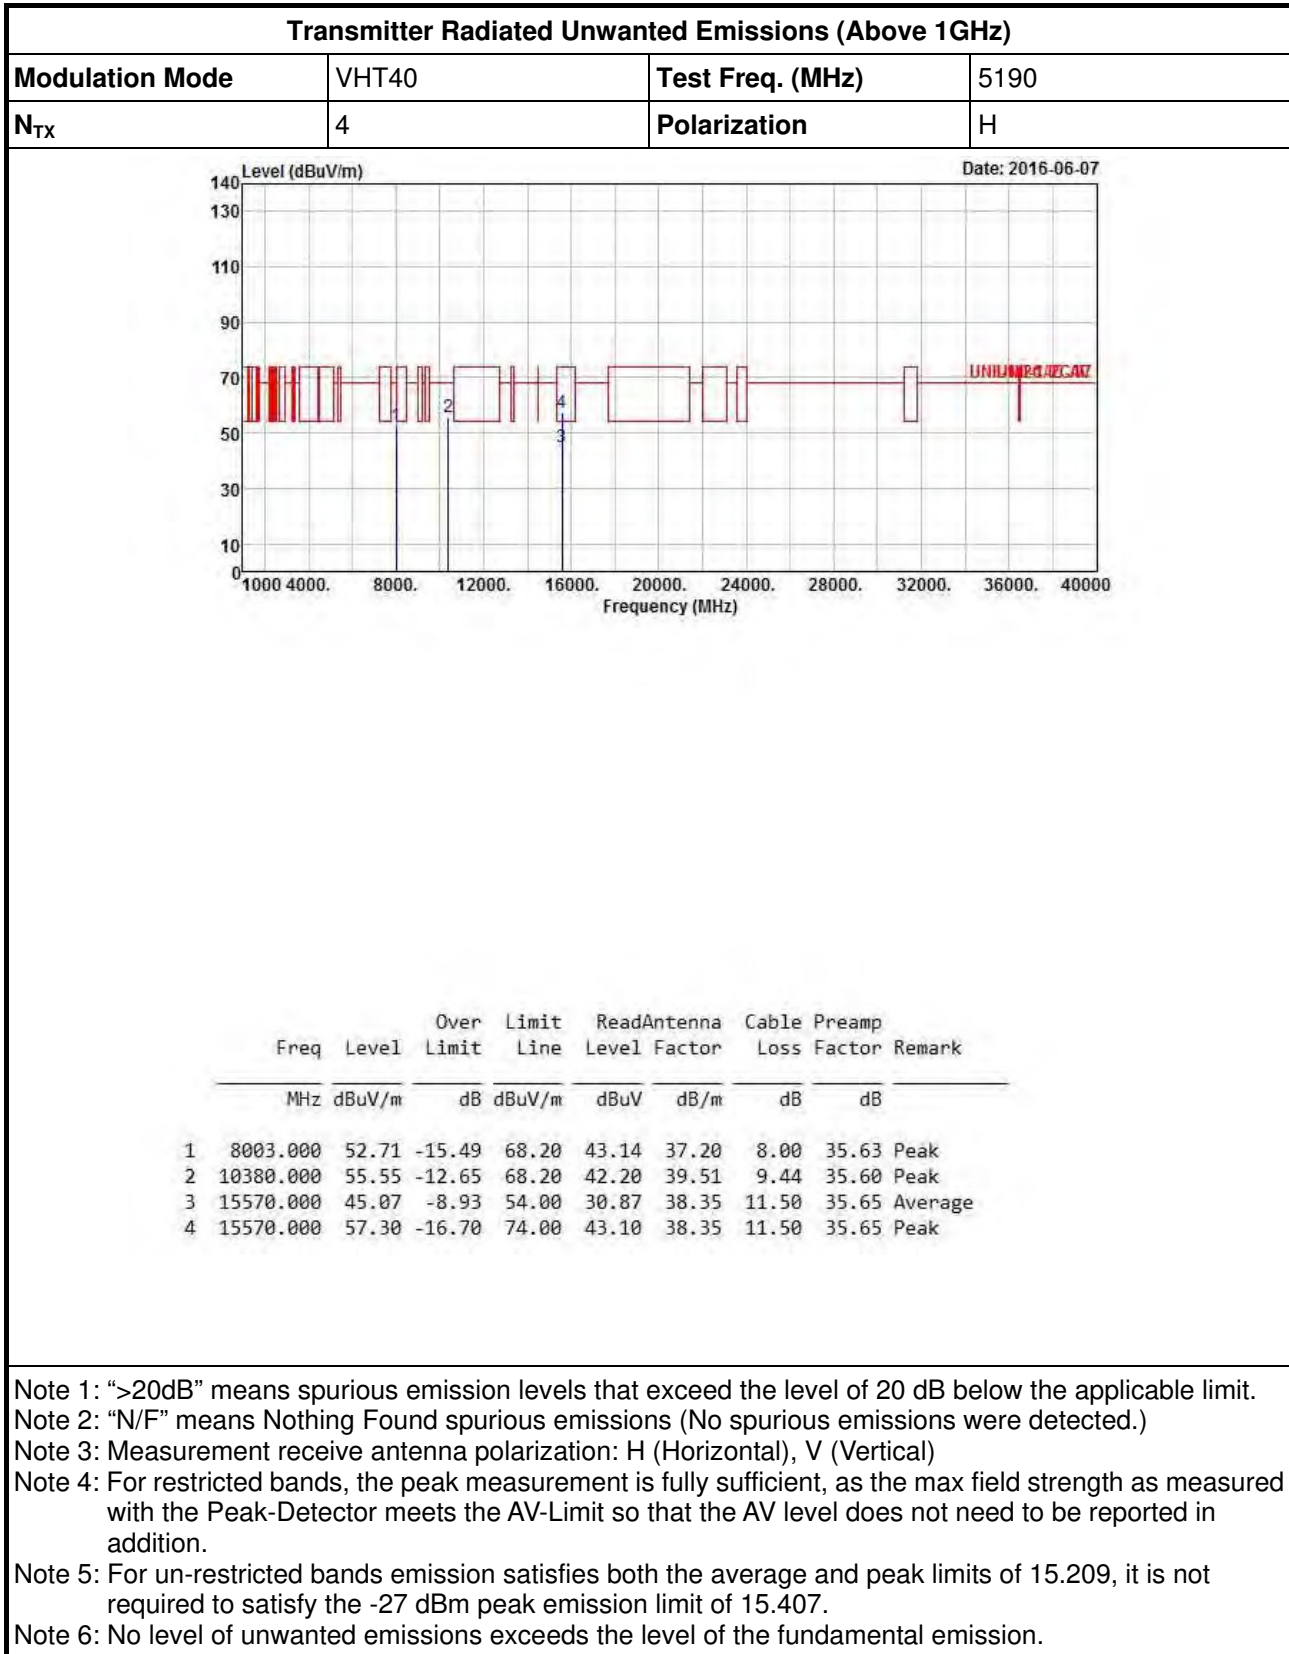


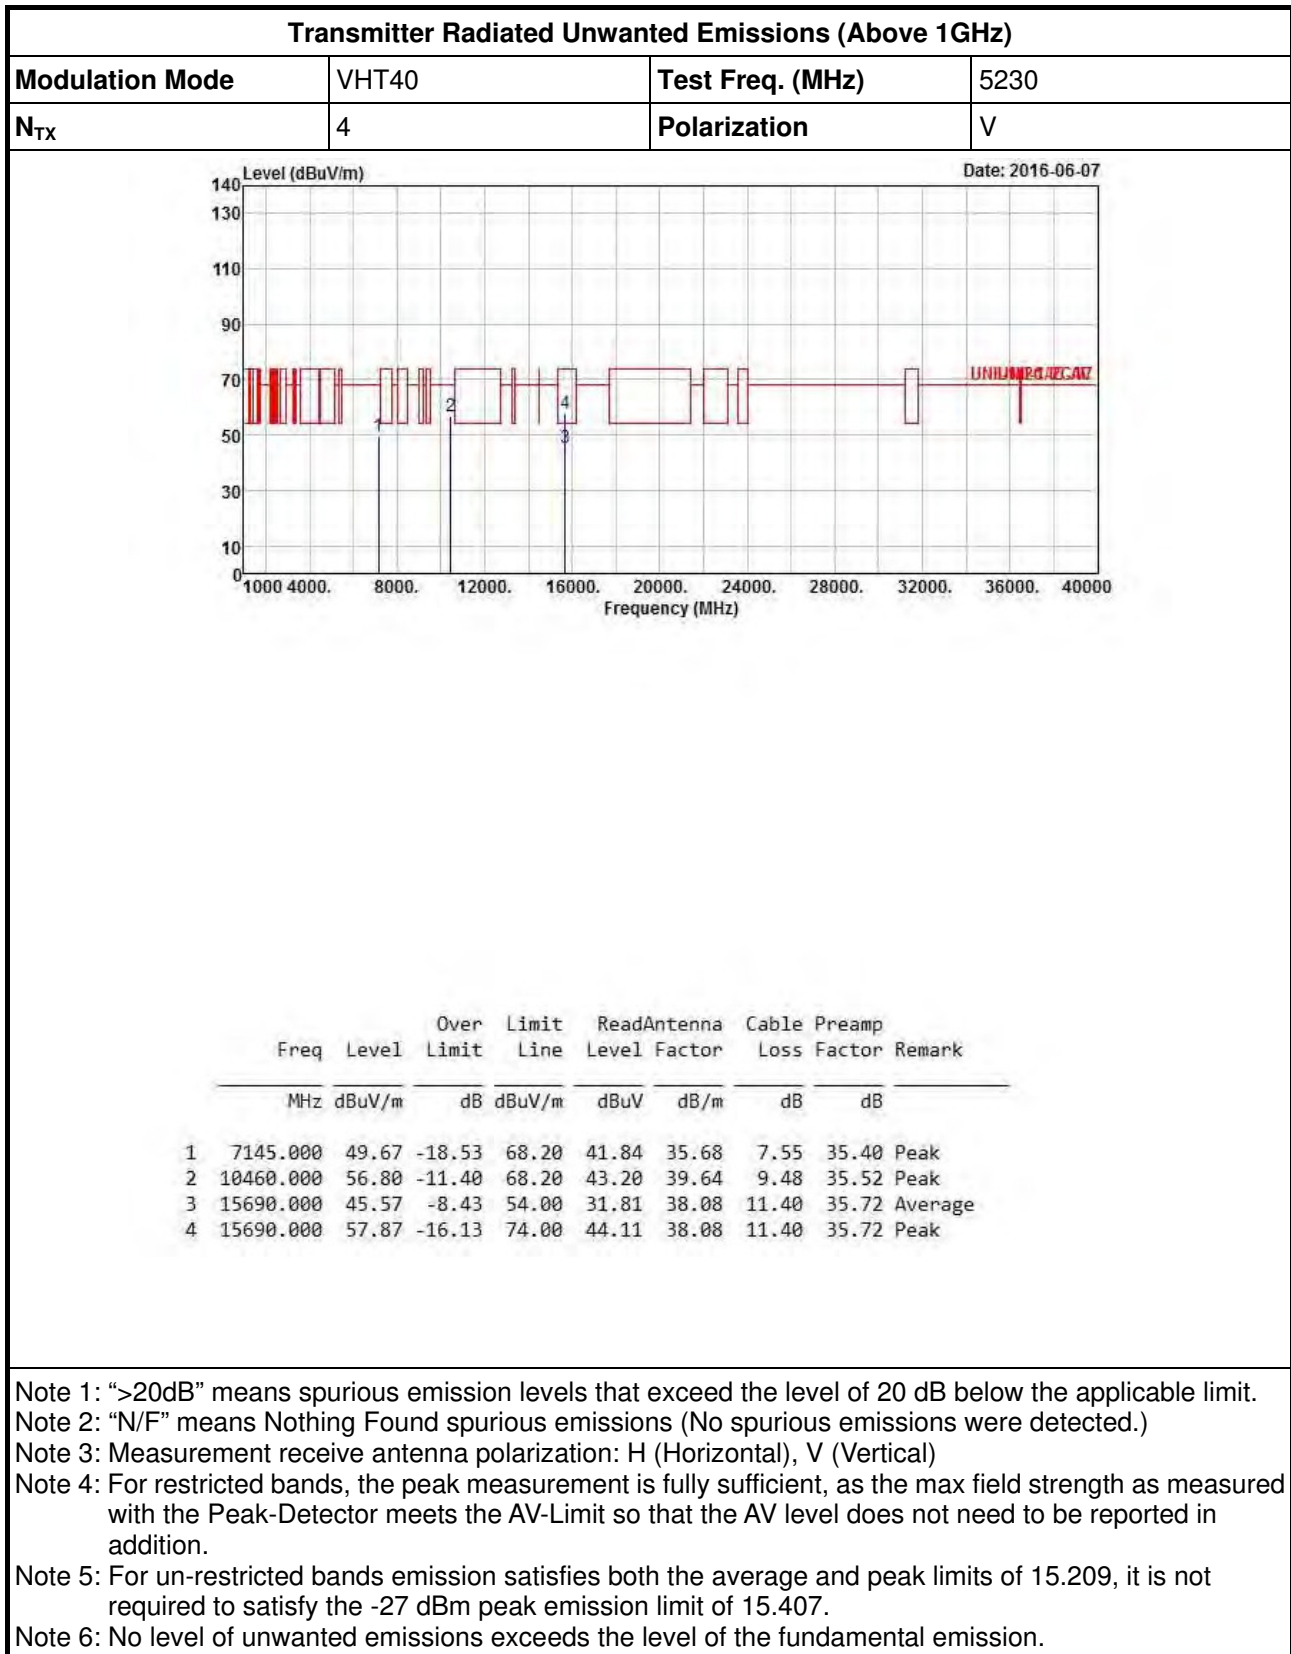

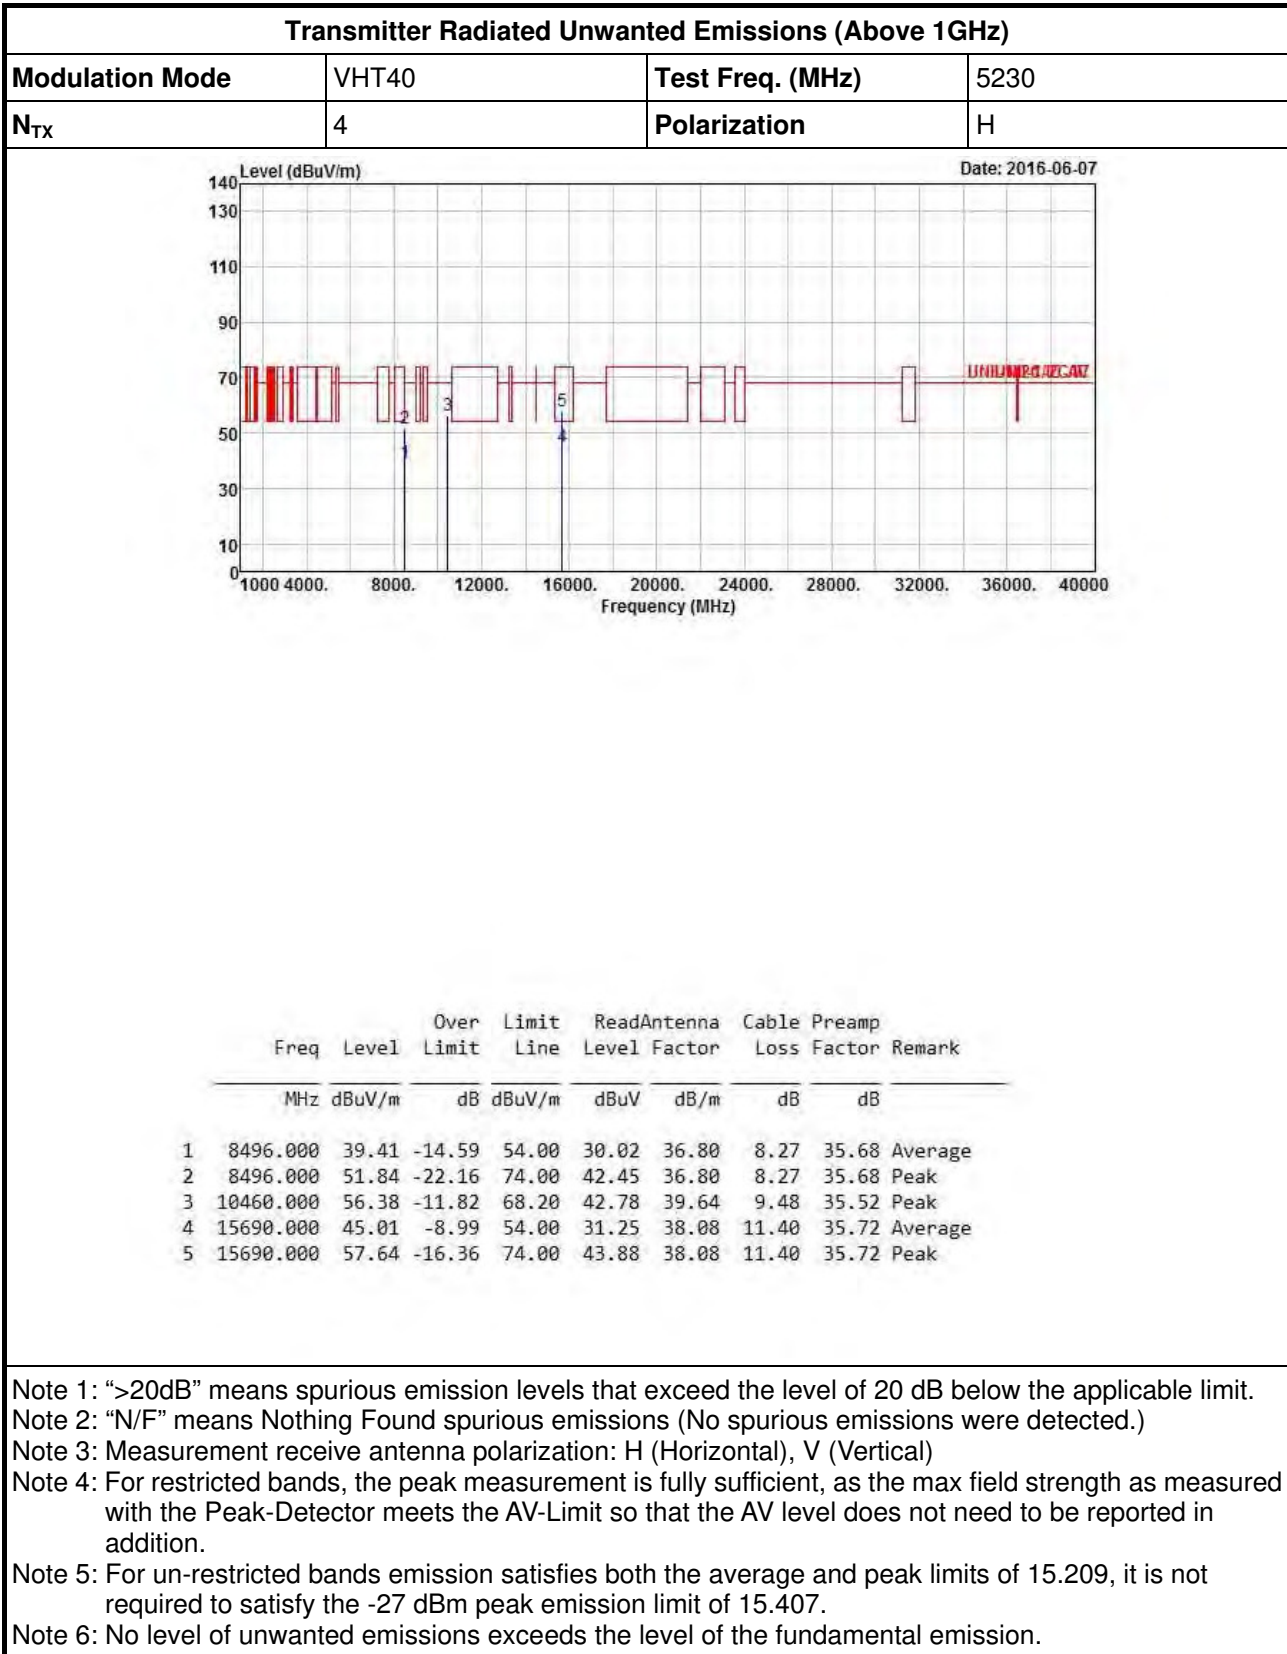

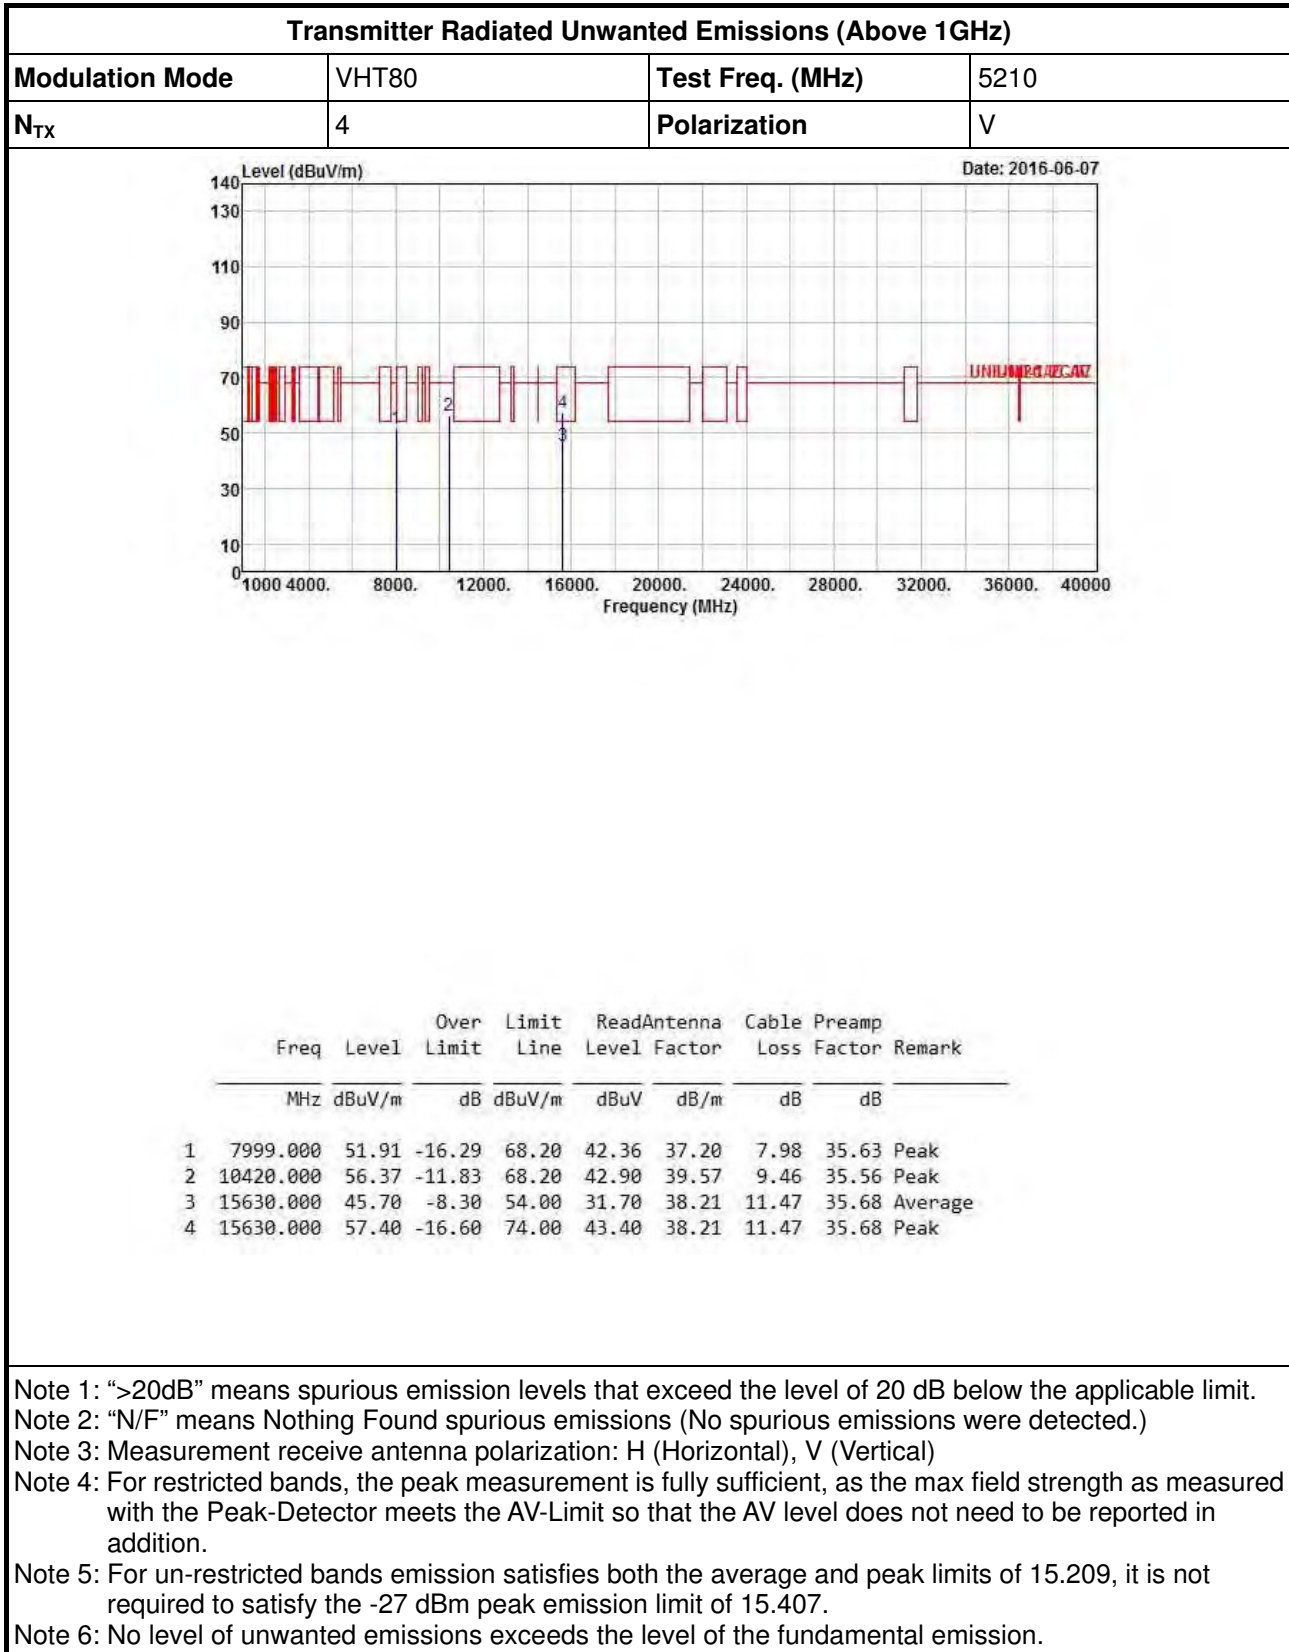

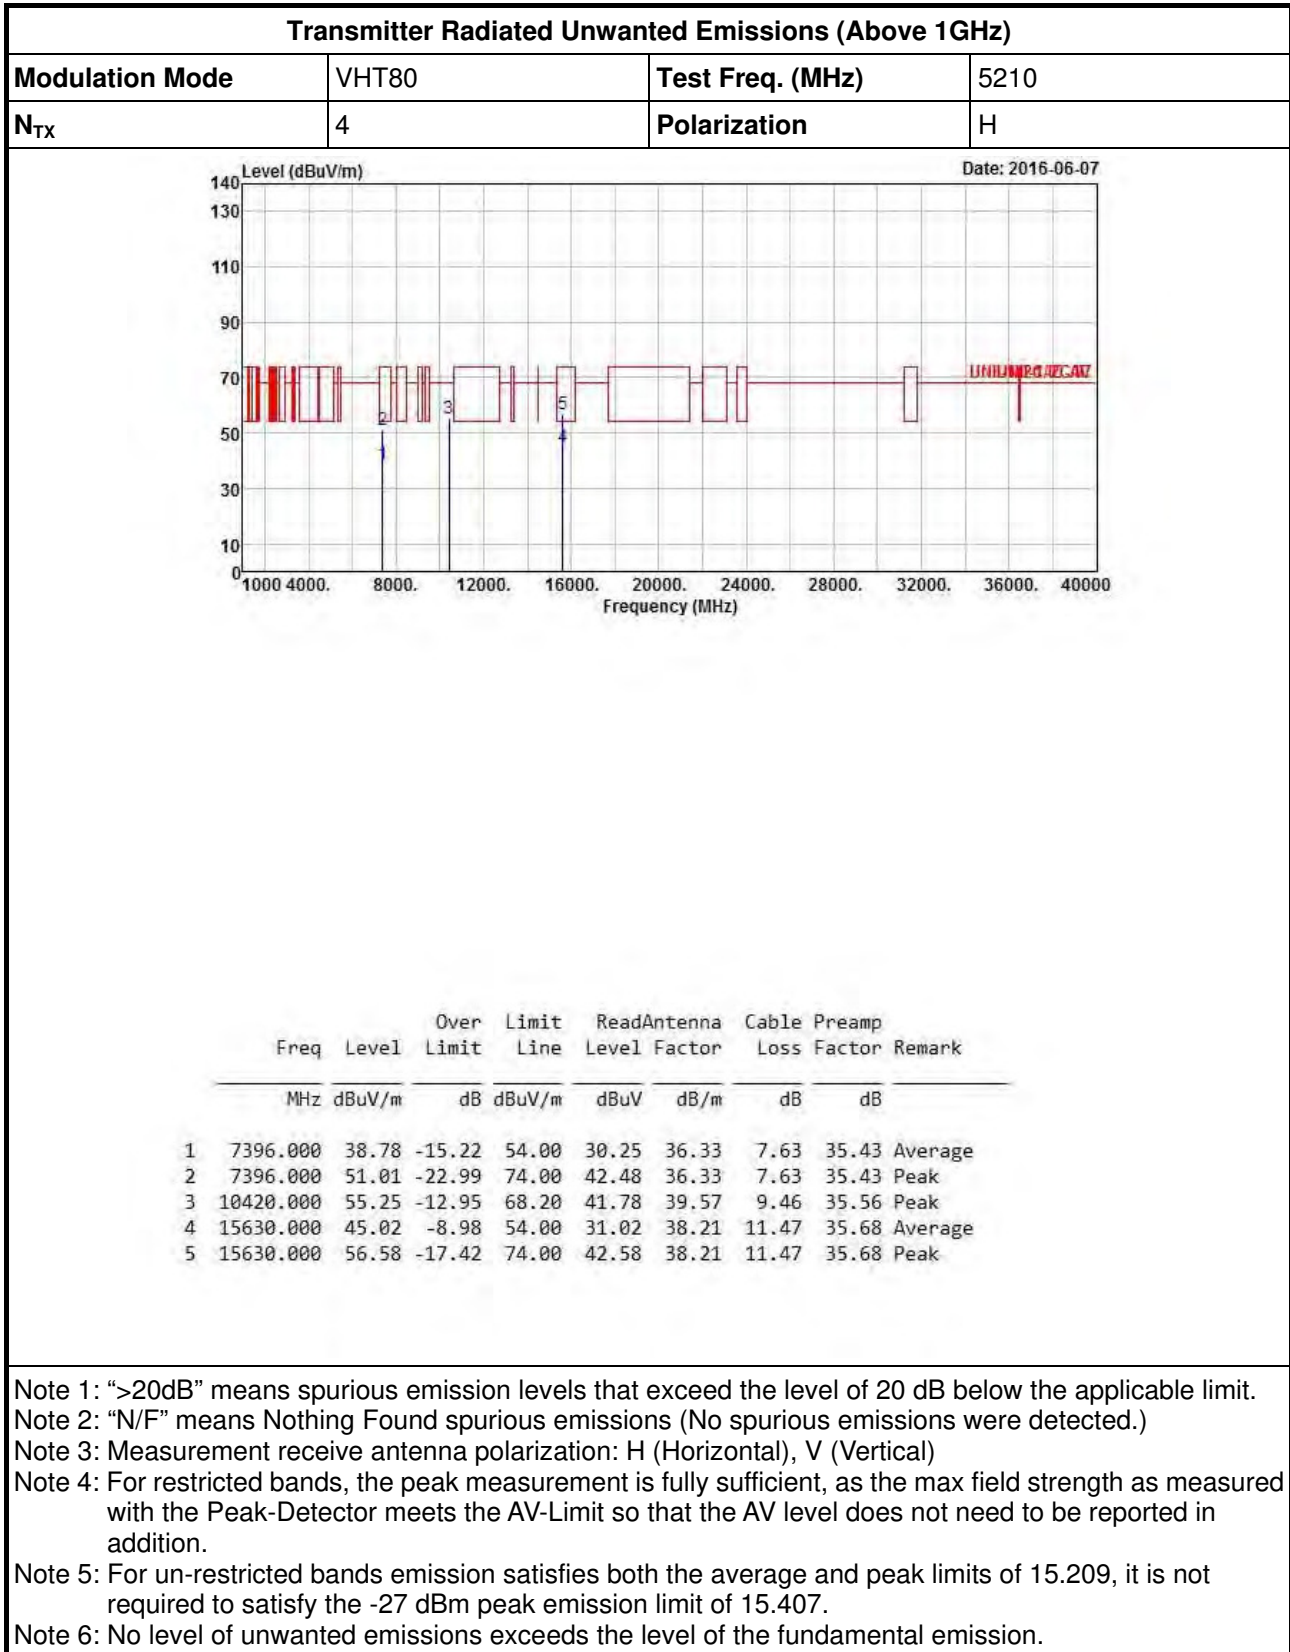


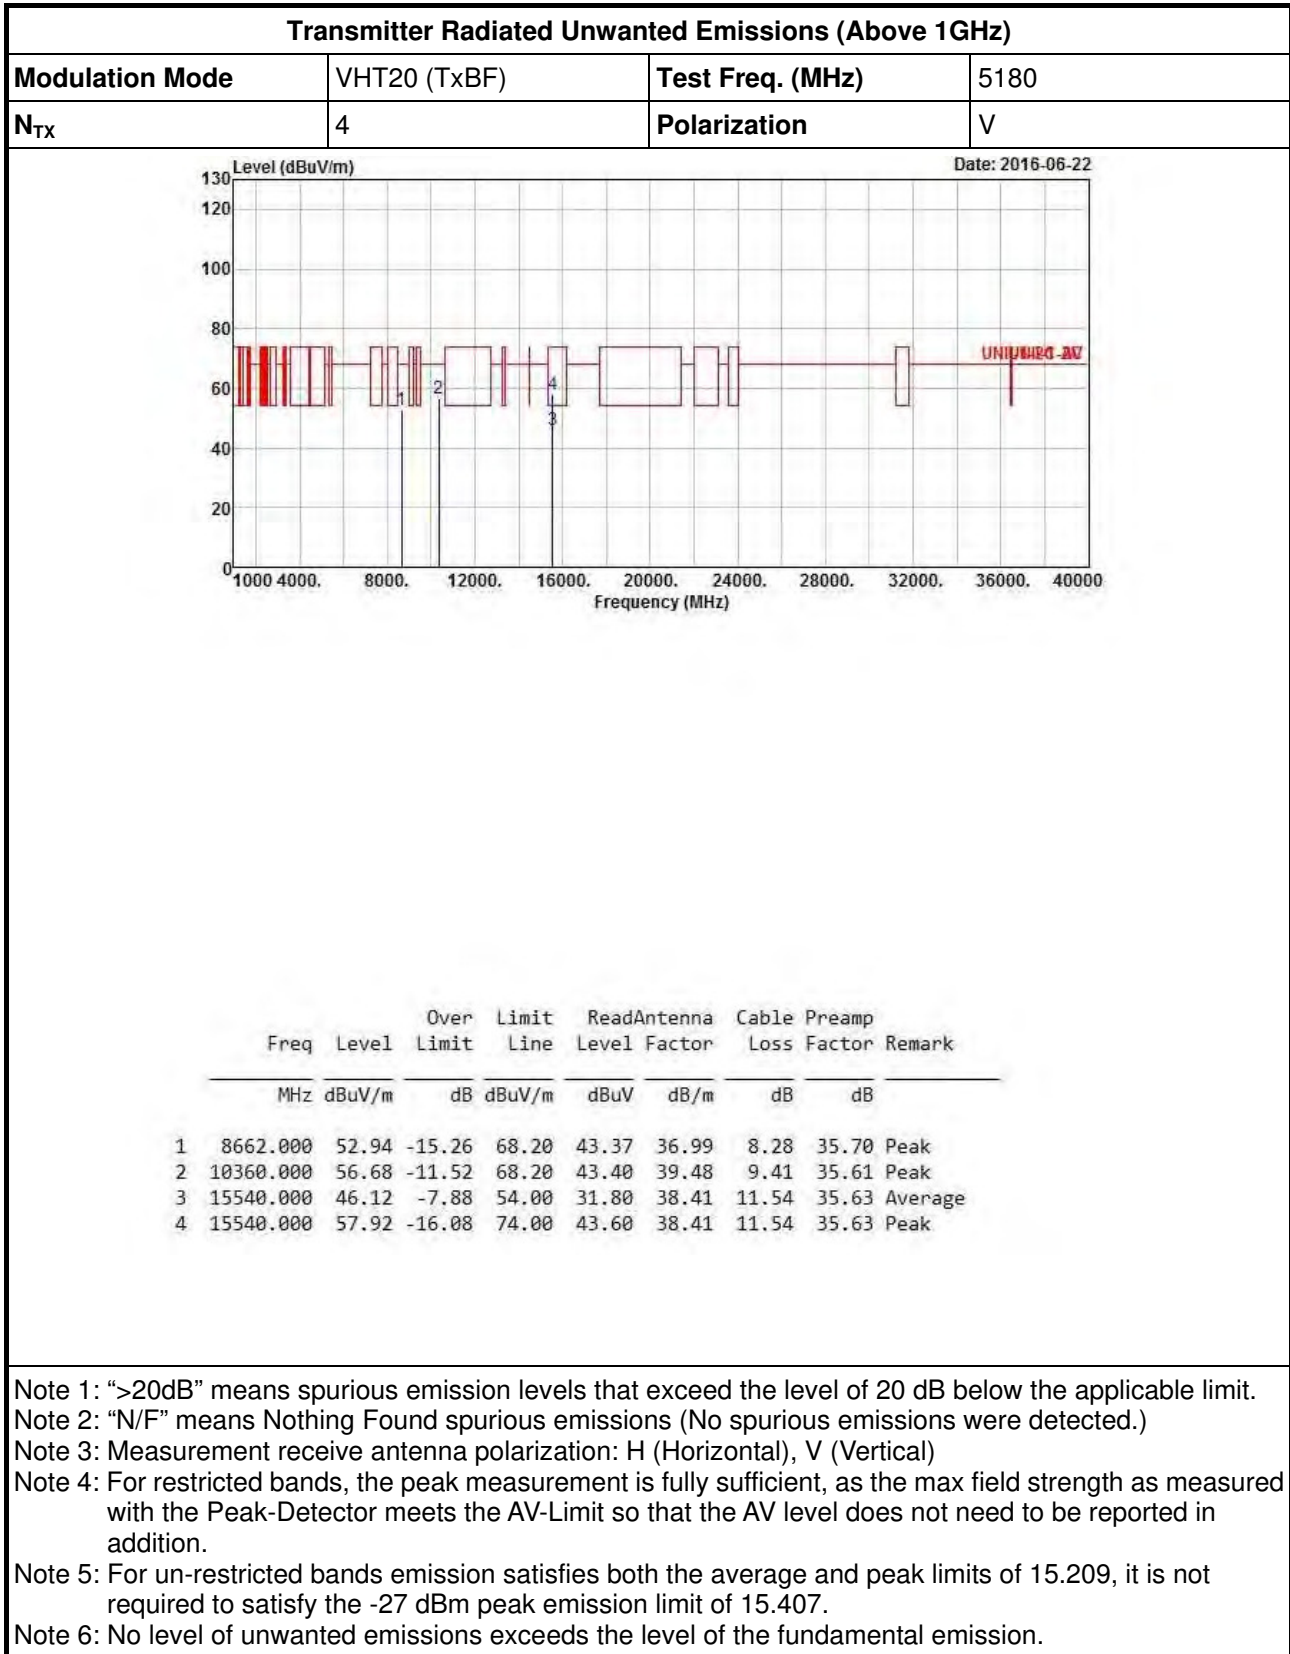



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5180
N _{TX}	4	Polarization	H

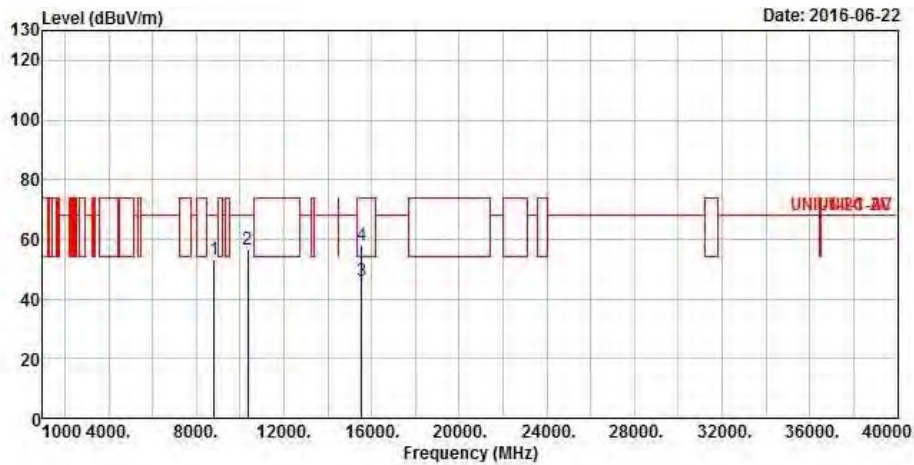


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8815.000	53.15	-15.05	68.20	43.40	37.18	8.29	35.72	Peak
2	10360.000	56.78	-11.42	68.20	43.50	39.48	9.41	35.61	Peak
3	15540.000	46.27	-7.73	54.00	31.95	38.41	11.54	35.63	Average
4	15540.000	57.90	-16.10	74.00	43.58	38.41	11.54	35.63	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5200
N _{TX}	4	Polarization	V

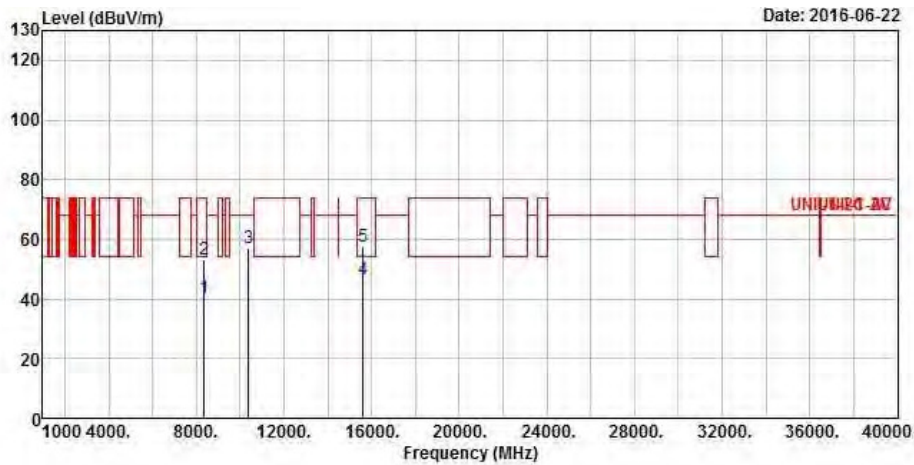

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	8371.000	40.50	-13.50	54.00	31.07	36.90	8.20	Average
2	8371.000	53.16	-20.84	74.00	43.73	36.90	8.20	Peak
3	10400.000	57.10	-11.10	68.20	43.70	39.54	9.44	Peak
4	15600.000	46.42	-7.58	54.00	32.31	38.28	11.50	Average
5	15600.000	57.80	-16.20	74.00	43.69	38.28	11.50	Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

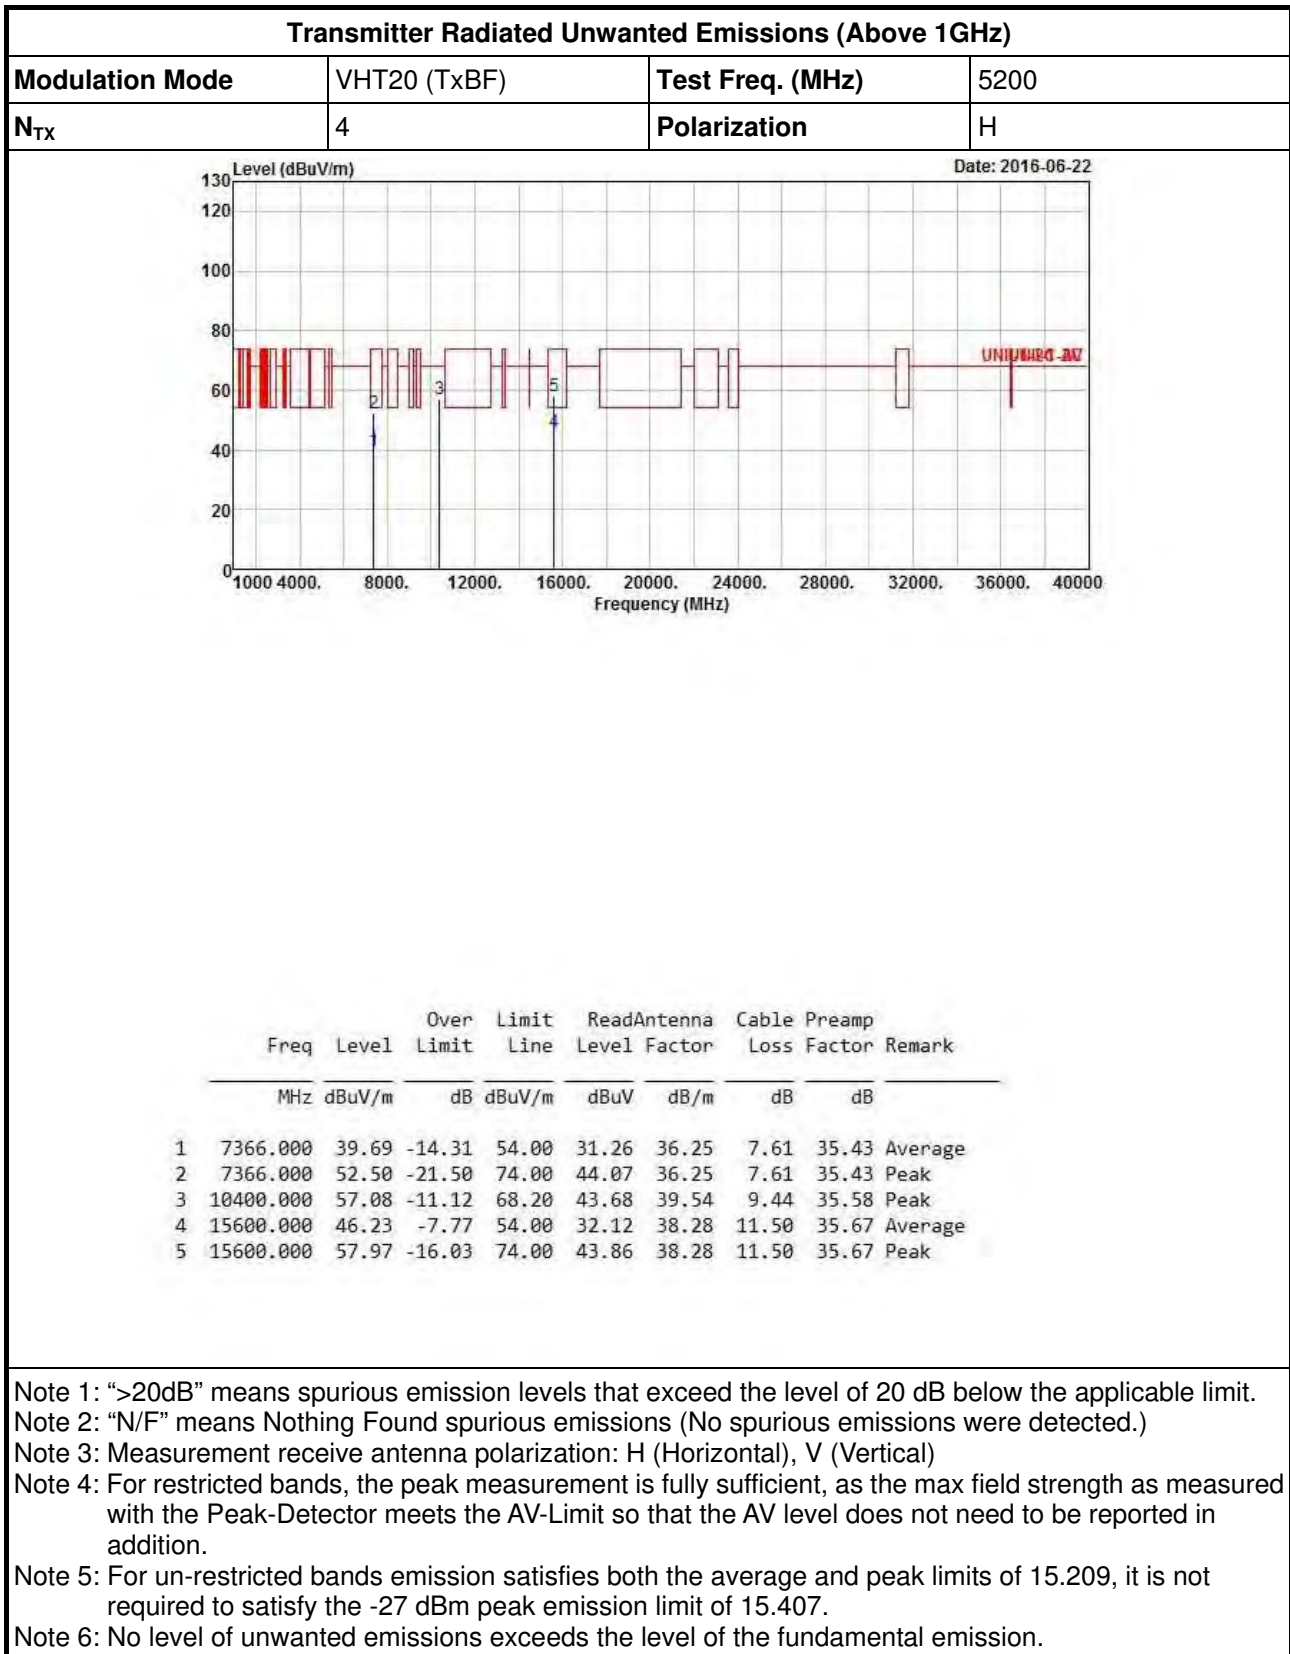



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5240
N _{TX}	4	Polarization	V

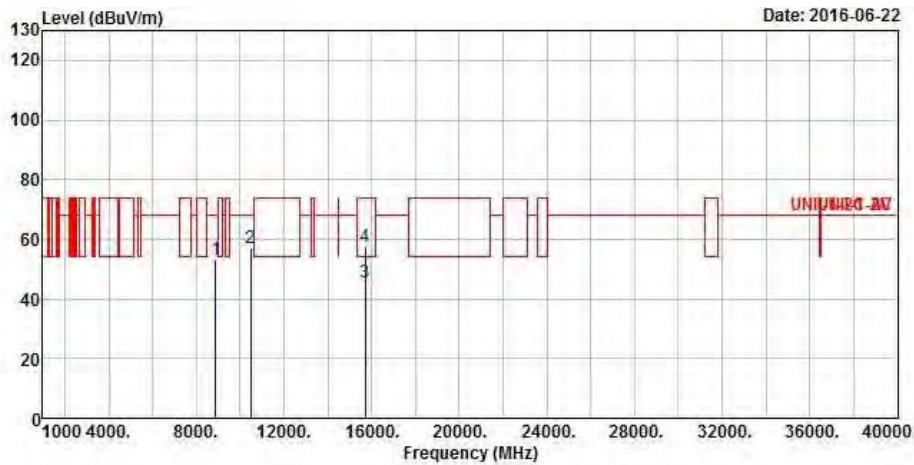


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8873.000	53.31	-14.89	68.20	43.49	37.25	8.30	35.73	Peak
2	10480.000	57.10	-11.10	68.20	43.45	39.67	9.48	35.50	Peak
3	15720.000	45.63	-8.37	54.00	31.94	38.02	11.40	35.73	Average
4	15720.000	57.63	-16.37	74.00	43.94	38.02	11.40	35.73	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5240
N _{TX}	4	Polarization	H

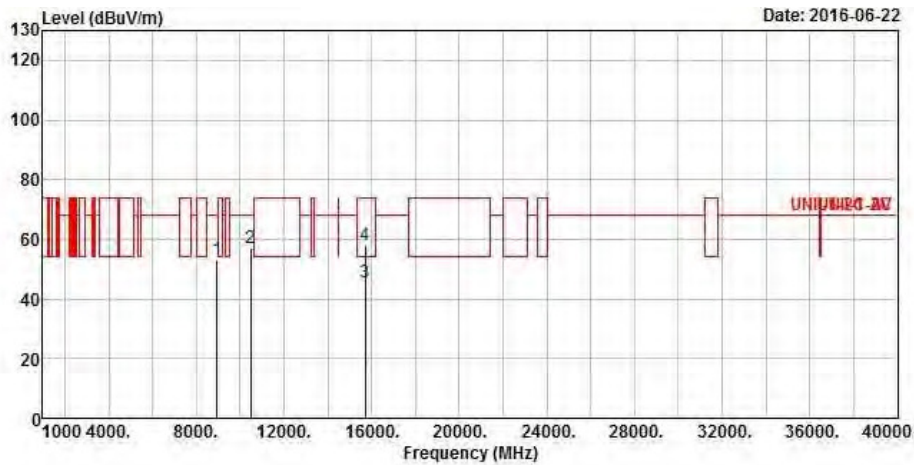


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8936.000	53.30	-14.90	68.20	43.42	37.32	8.30	35.74	Peak
2	10480.000	57.03	-11.17	68.20	43.38	39.67	9.48	35.50	Peak
3	15720.000	45.48	-8.52	54.00	31.79	38.02	11.40	35.73	Average
4	15720.000	57.83	-16.17	74.00	44.14	38.02	11.40	35.73	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5190
N _{TX}	4	Polarization	V

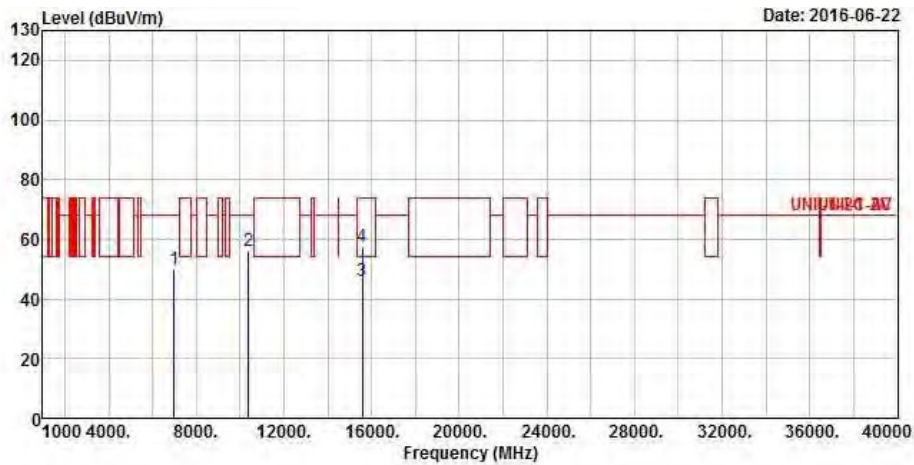


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7002.000	50.10	-18.10	68.20	42.69	35.31	7.49	35.39	Peak
2	10380.000	56.02	-12.18	68.20	42.67	39.51	9.44	35.60	Peak
3	15570.000	45.92	-8.08	54.00	31.72	38.35	11.50	35.65	Average
4	15570.000	57.51	-16.49	74.00	43.31	38.35	11.50	35.65	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5190
N _{TX}	4	Polarization	H

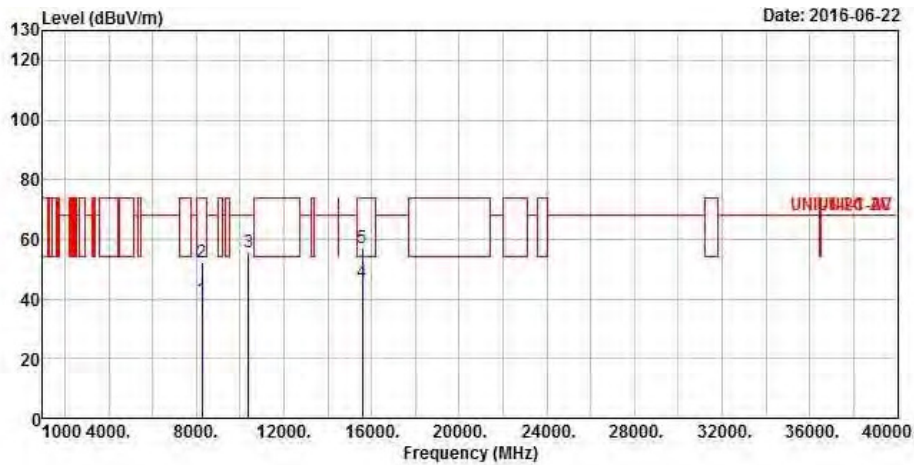


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8265.000	39.72	-14.28	54.00	30.25	36.99	8.14	35.66	Average
2	8265.000	52.16	-21.84	74.00	42.69	36.99	8.14	35.66	Peak
3	10380.000	55.49	-12.71	68.20	42.14	39.51	9.44	35.60	Peak
4	15570.000	45.45	-8.55	54.00	31.25	38.35	11.50	35.65	Average
5	15570.000	57.22	-16.78	74.00	43.02	38.35	11.50	35.65	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40 (TxBF)	Test Freq. (MHz)	5230
N _{TX}	4	Polarization	V

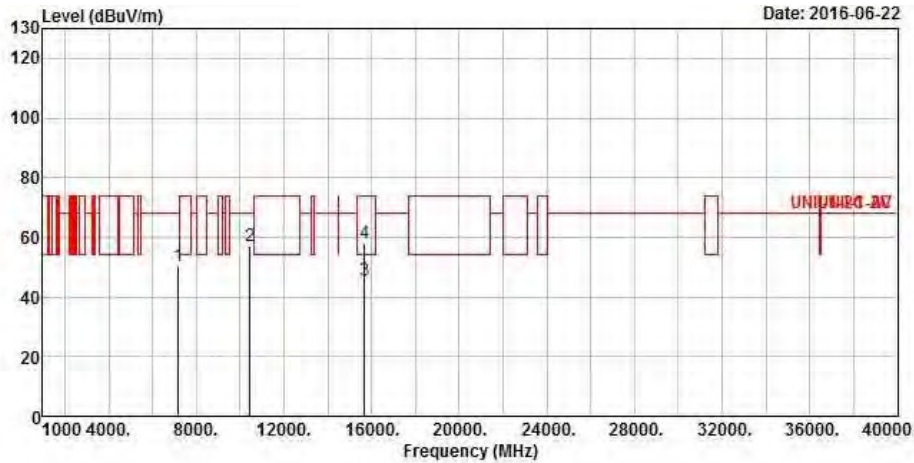


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7185.000	50.51	-17.69	68.20	42.58	35.78	7.56	35.41	Peak
2	10460.000	57.29	-10.91	68.20	43.69	39.64	9.48	35.52	Peak
3	15690.000	45.79	-8.21	54.00	32.03	38.08	11.40	35.72	Average
4	15690.000	58.08	-15.92	74.00	44.32	38.08	11.40	35.72	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40 (TxBF)	Test Freq. (MHz)	5230
N _{TX}	4	Polarization	H

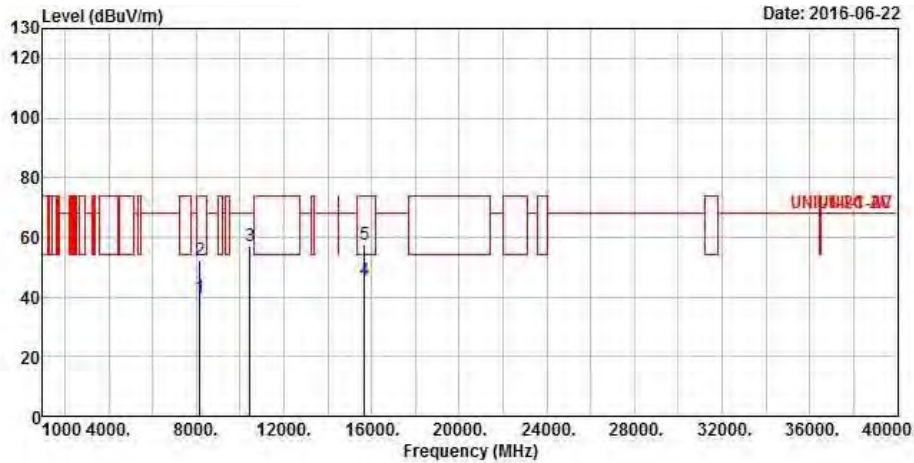


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	8174.000	39.75	-14.25	54.00	30.25	37.06	8.09	Average
2	8174.000	52.48	-21.52	74.00	42.98	37.06	8.09	Peak
3	10460.000	56.85	-11.35	68.20	43.25	39.64	9.48	Peak
4	15690.000	45.35	-8.65	54.00	31.59	38.08	11.40	Average
5	15690.000	57.55	-16.45	74.00	43.79	38.08	11.40	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80 (TxBF)	Test Freq. (MHz)	5210
N _{TX}	4	Polarization	V

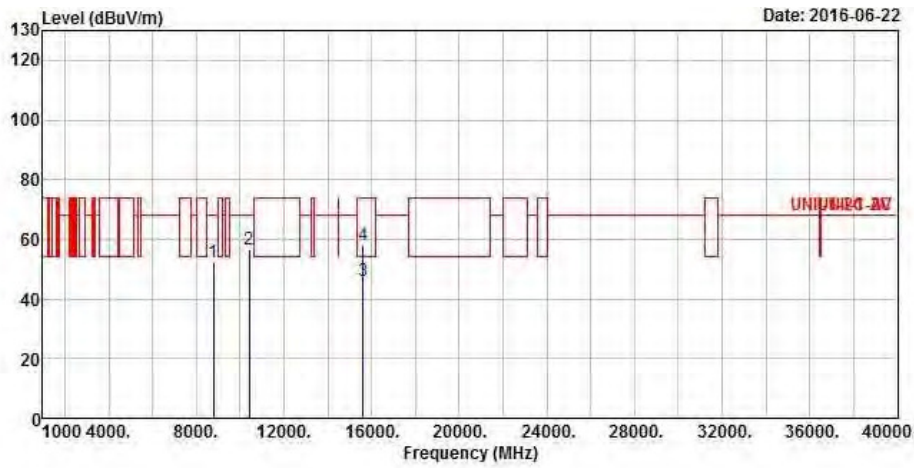


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8785.000	52.40	-15.80	68.20	42.69	37.14	8.29	35.72 Peak
2	10420.000	56.64	-11.56	68.20	43.17	39.57	9.46	35.56 Peak
3	15630.000	45.90	-8.10	54.00	31.90	38.21	11.47	35.68 Average
4	15630.000	57.94	-16.06	74.00	43.94	38.21	11.47	35.68 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80 (TxBF)	Test Freq. (MHz)	5210
N _{TX}	4	Polarization	H

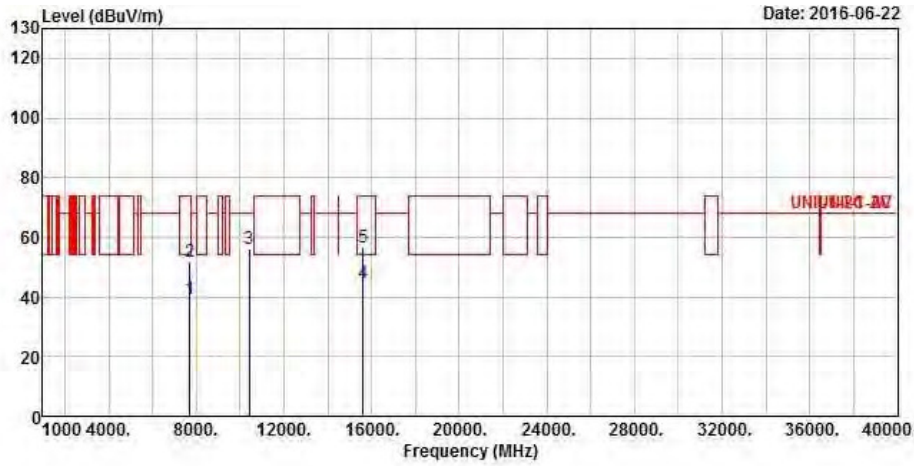


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7696.000	39.26	-14.74	54.00	30.13	36.84	7.80	35.51	Average
2	7696.000	51.80	-22.20	74.00	42.67	36.84	7.80	35.51	Peak
3	10420.000	56.32	-11.88	68.20	42.85	39.57	9.46	35.56	Peak
4	15630.000	44.58	-9.42	54.00	30.58	38.21	11.47	35.68	Average
5	15630.000	56.78	-17.22	74.00	42.78	38.21	11.47	35.68	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5725-5850MHz

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a	Test Freq. (MHz)	5745
N _{TX}	4	Polarization	V

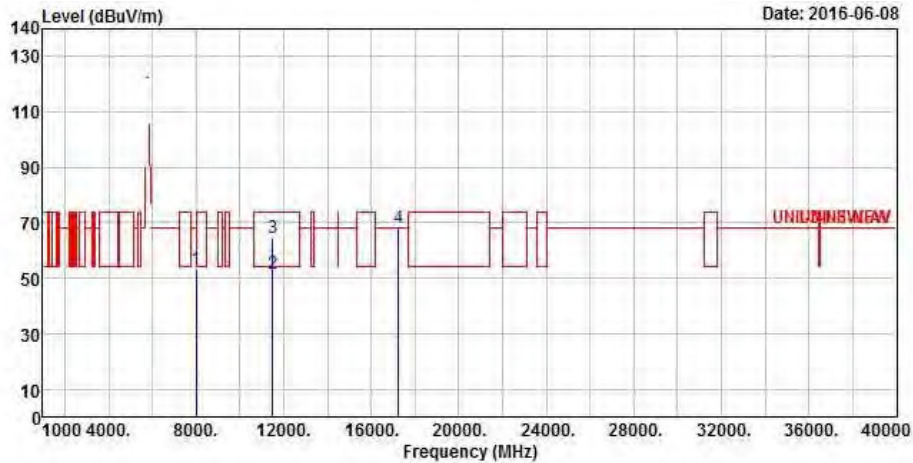


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8002.000	53.08	-15.12	68.20	43.51	37.20	8.00	35.63	Peak
2	11490.000	51.41	-2.59	54.00	36.85	40.10	9.74	35.28	Average
3	11490.000	64.34	-9.66	74.00	49.78	40.10	9.74	35.28	Peak
4	17235.000	68.05	-0.15	68.20	50.16	41.05	11.93	35.09	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	11a	Test Freq. (MHz)	5745
N _{TX}	4	Polarization	H

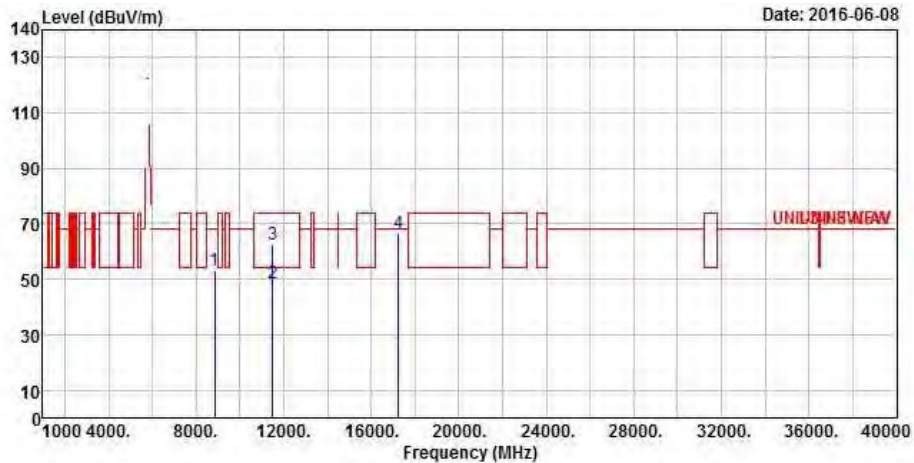

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8866.000	53.06	-15.14	68.20	43.25	37.24	8.30	35.73	Peak
2	11490.000	48.81	-5.19	54.00	34.25	40.10	9.74	35.28	Average
3	11490.000	62.72	-11.28	74.00	48.16	40.10	9.74	35.28	Peak
4	17235.000	66.84	-1.36	68.20	48.95	41.05	11.93	35.09	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

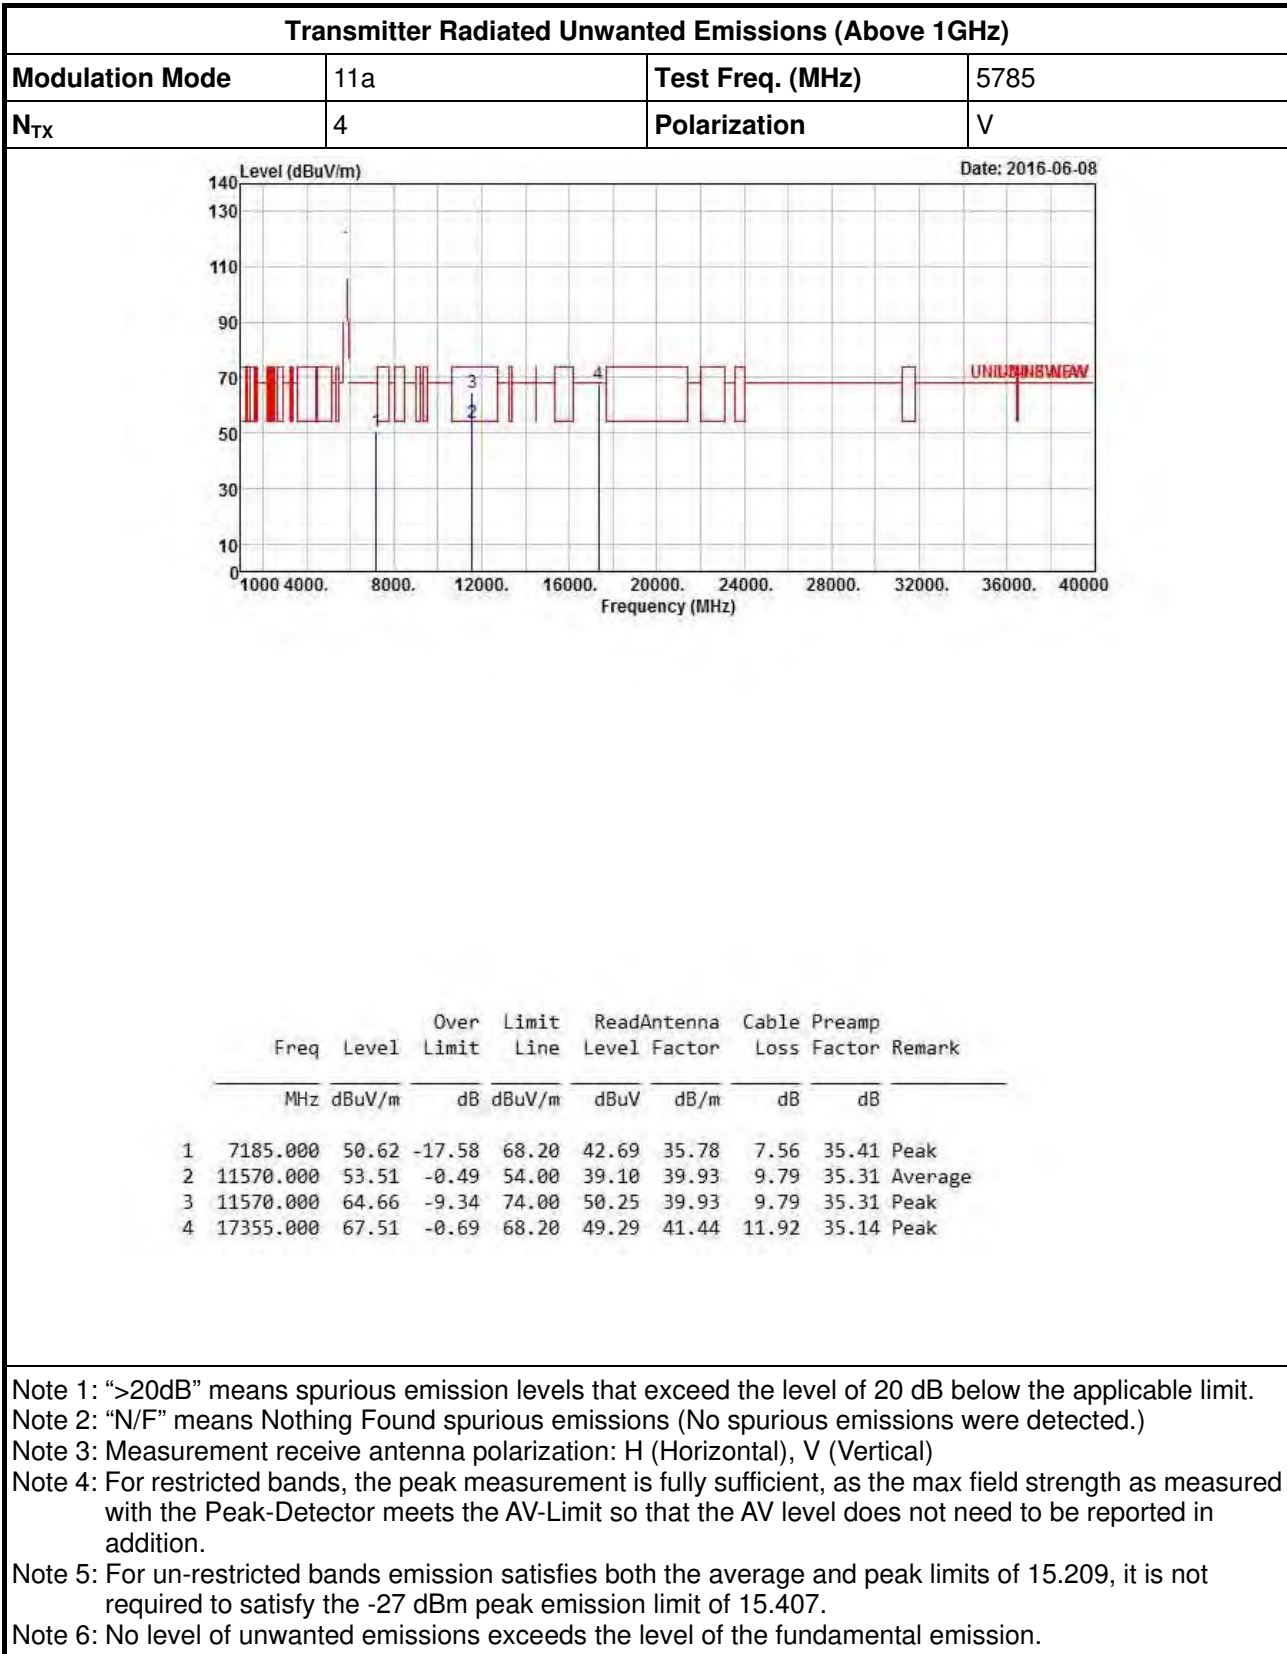


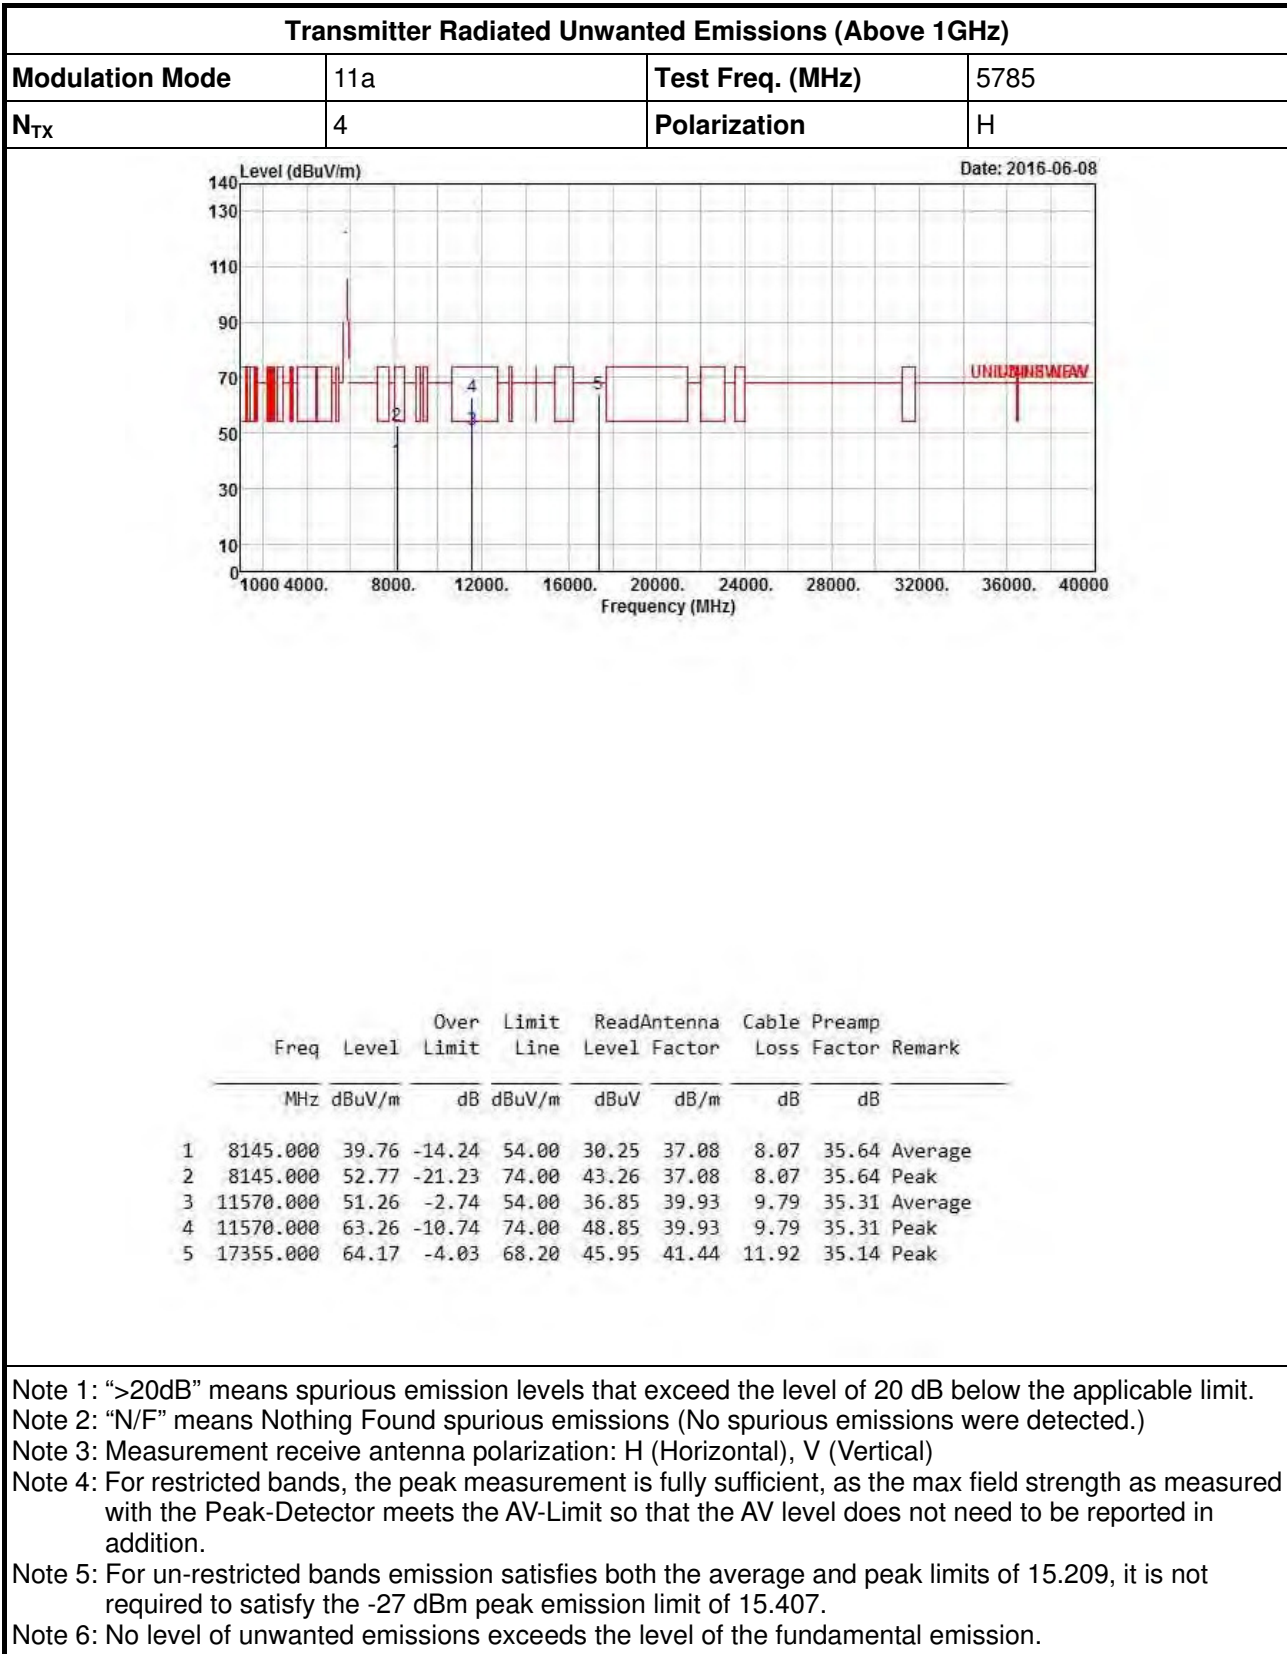




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	11a	Test Freq. (MHz)	5825
N _{TX}	4	Polarization	V

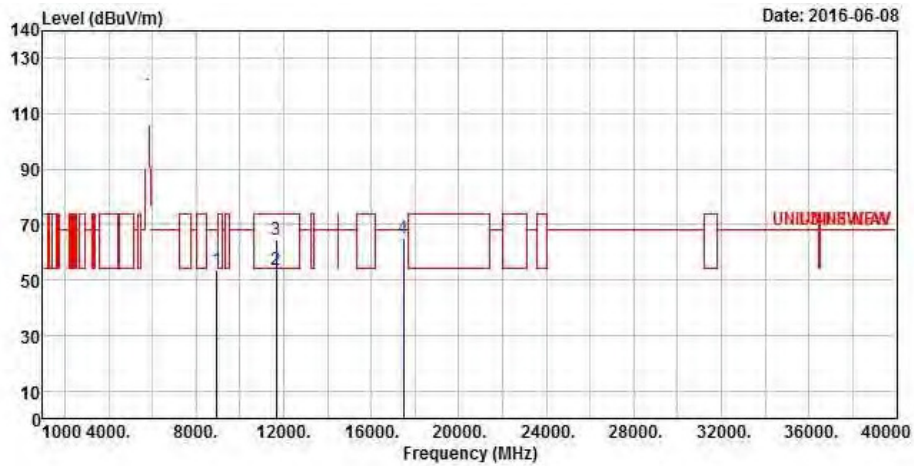

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8943.000	53.51	-14.69	68.20	43.61	37.33	8.31	35.74	Peak
2	11650.000	53.68	-0.32	54.00	39.44	39.74	9.84	35.34	Average
3	11650.000	64.51	-9.49	74.00	50.27	39.74	9.84	35.34	Peak
4	17475.000	64.91	-3.29	68.20	46.37	41.82	11.90	35.18	Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

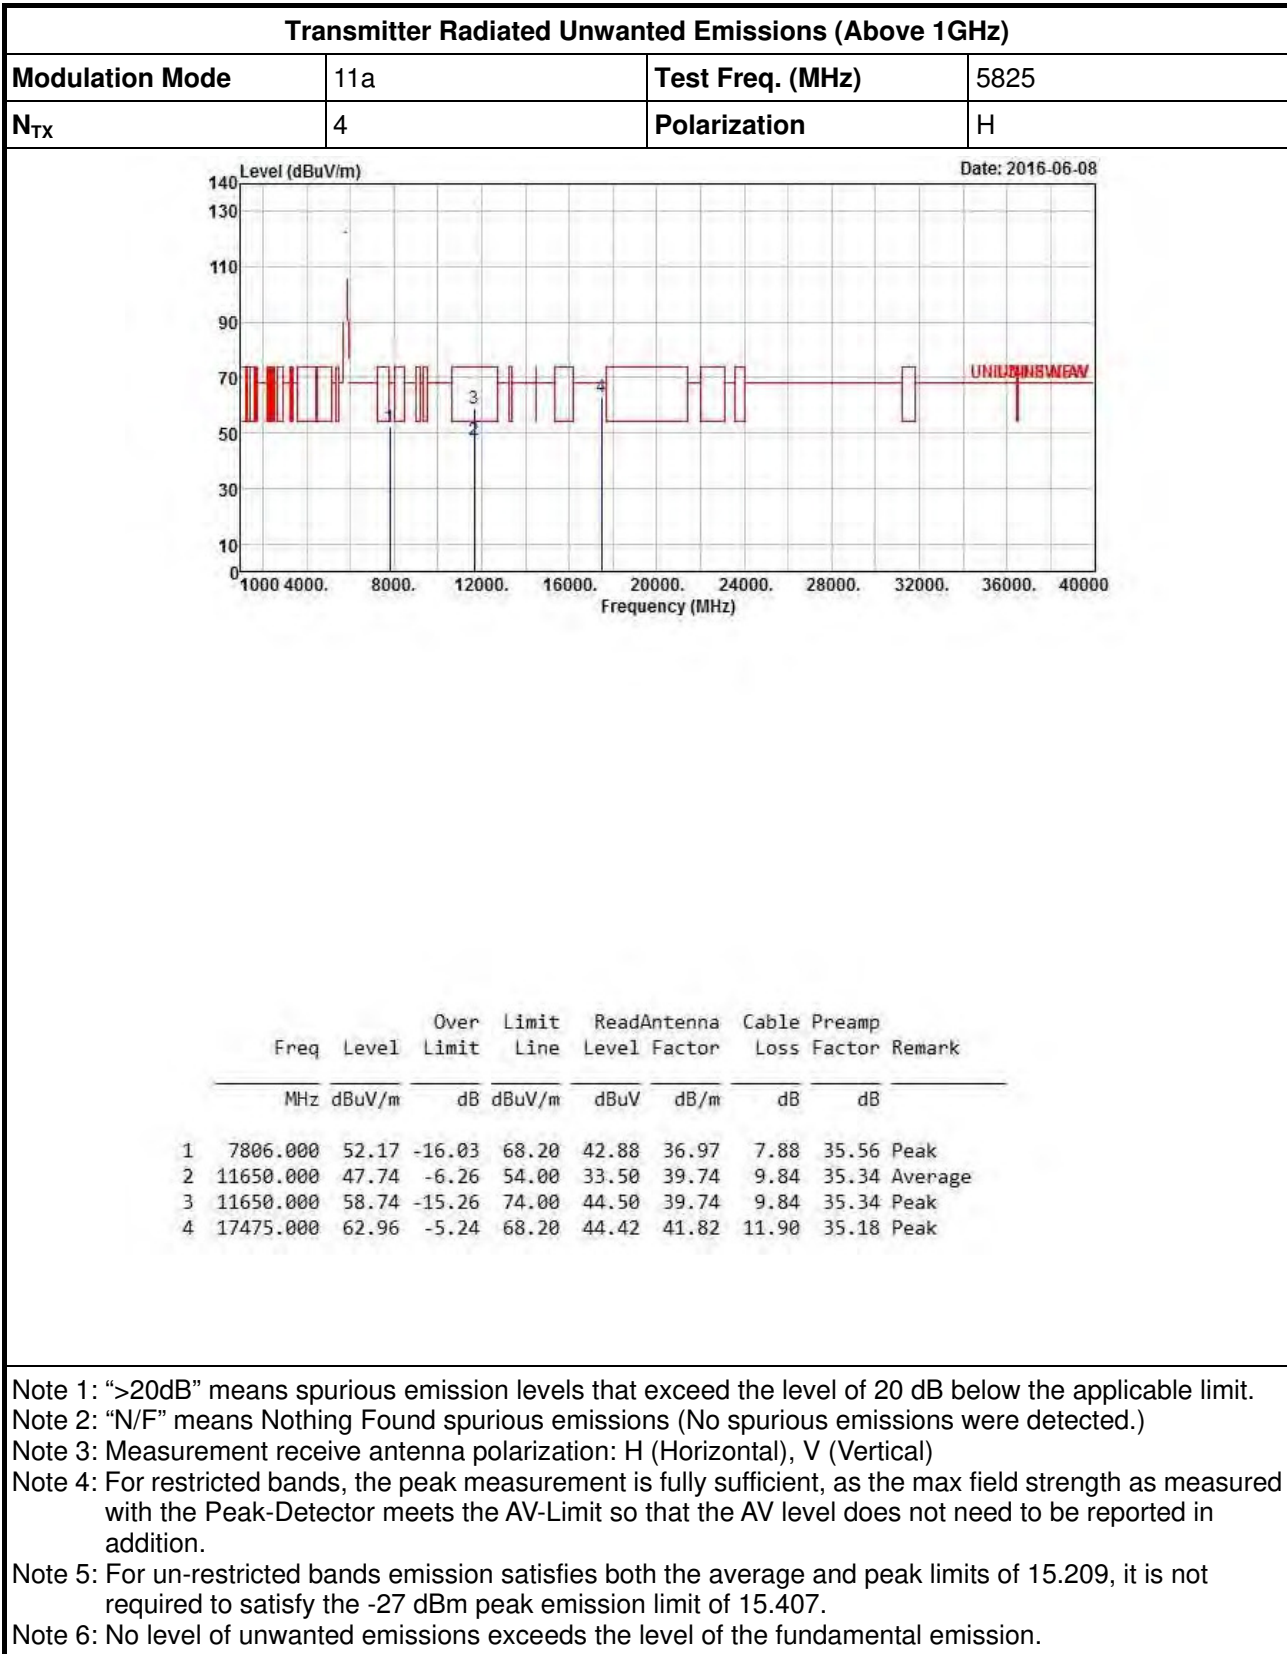

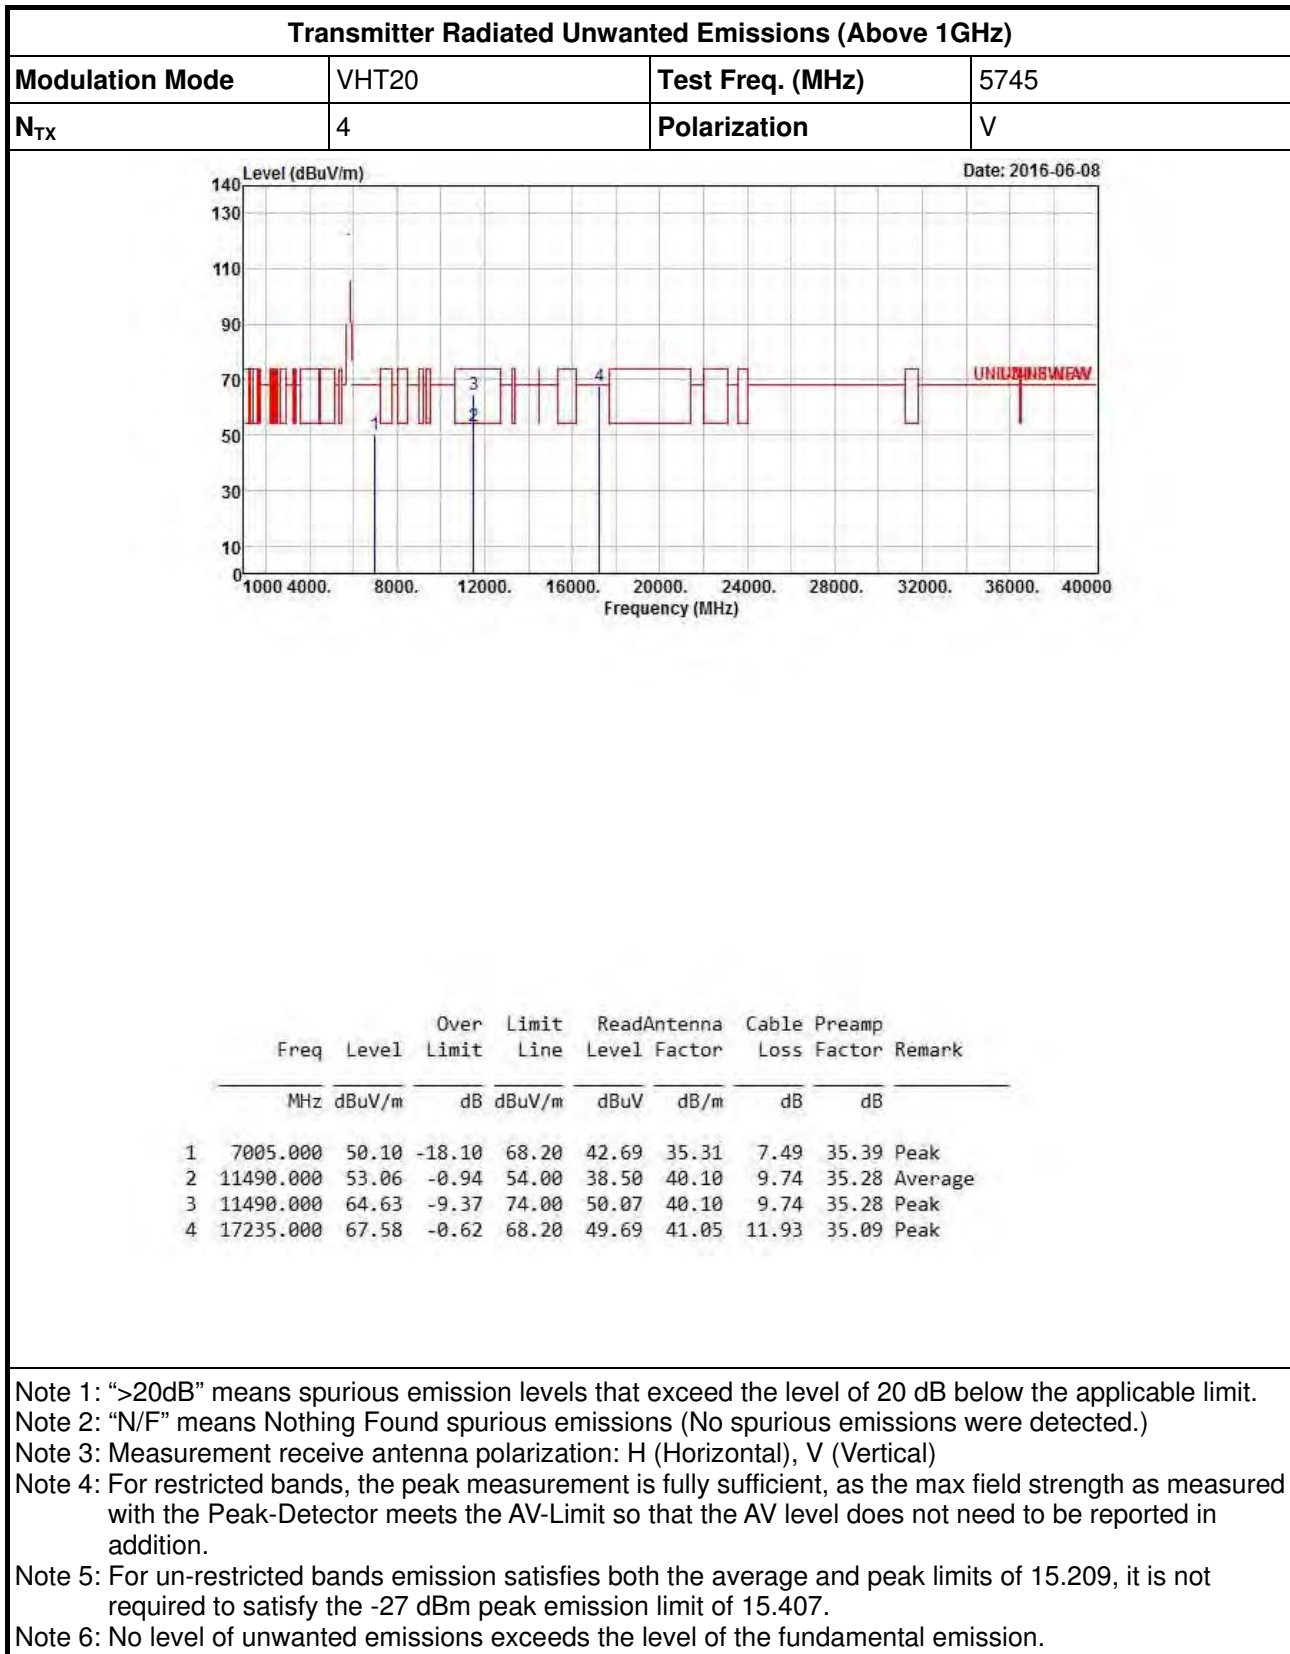





Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	VHT20	Test Freq. (MHz)	5745
N _{TX}	4	Polarization	H

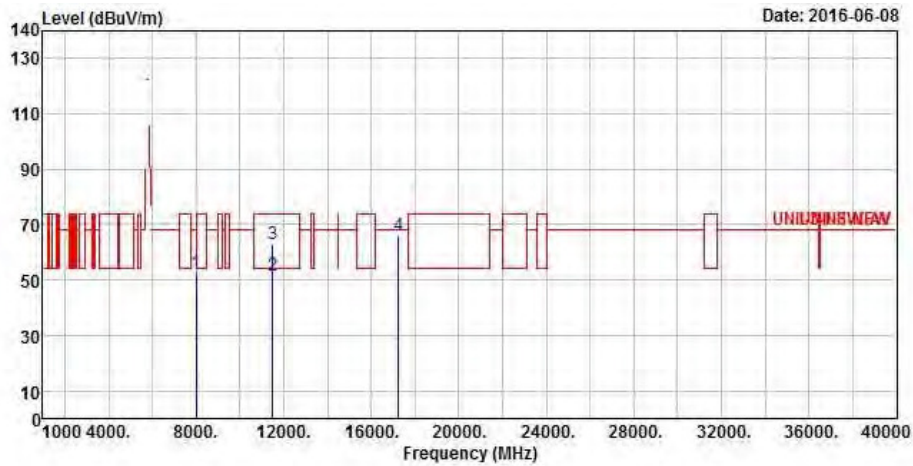



	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7999.000	52.57	-15.63	68.20	43.02	37.20	7.98	35.63 Peak
2	11490.000	51.41	-2.59	54.00	36.85	40.10	9.74	35.28 Average
3	11490.000	63.25	-10.75	74.00	48.69	40.10	9.74	35.28 Peak
4	17235.000	66.13	-2.07	68.20	48.24	41.05	11.93	35.09 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

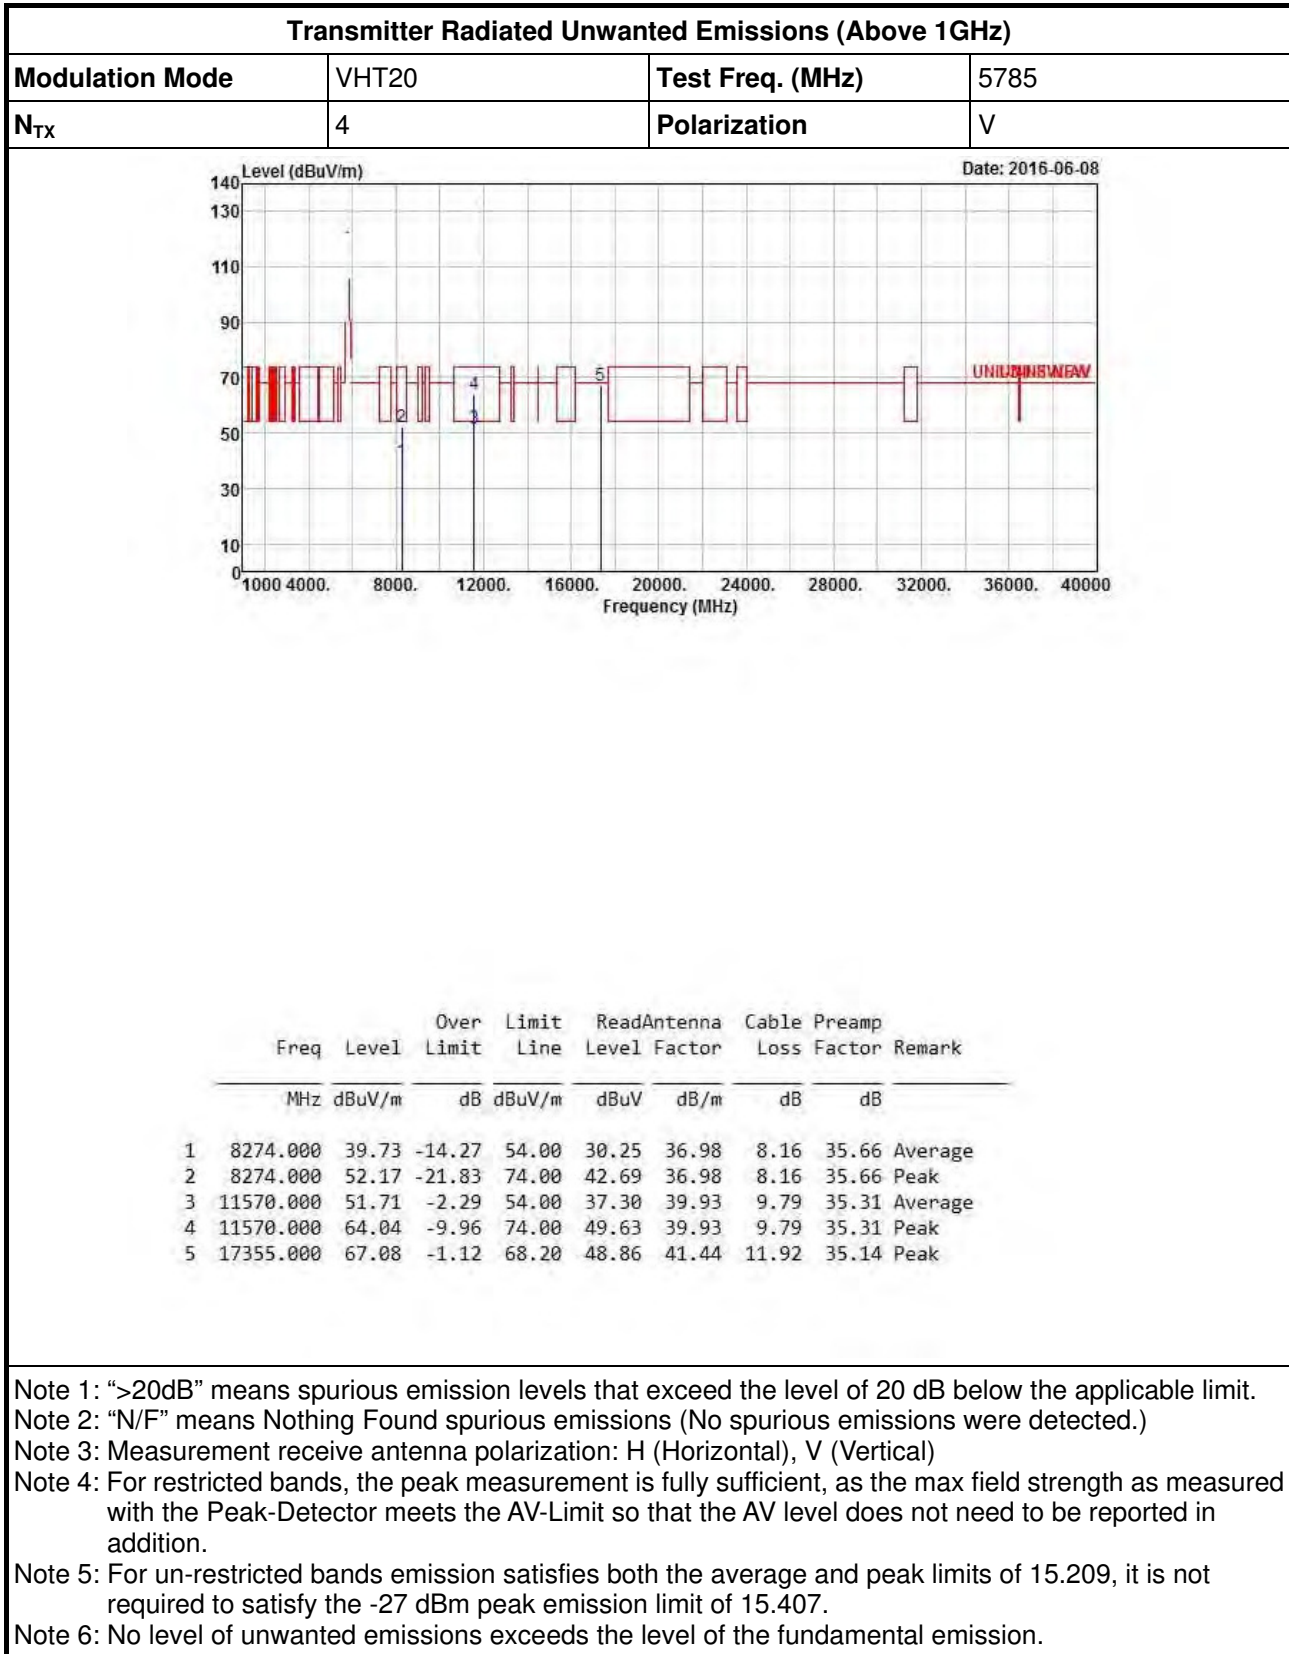


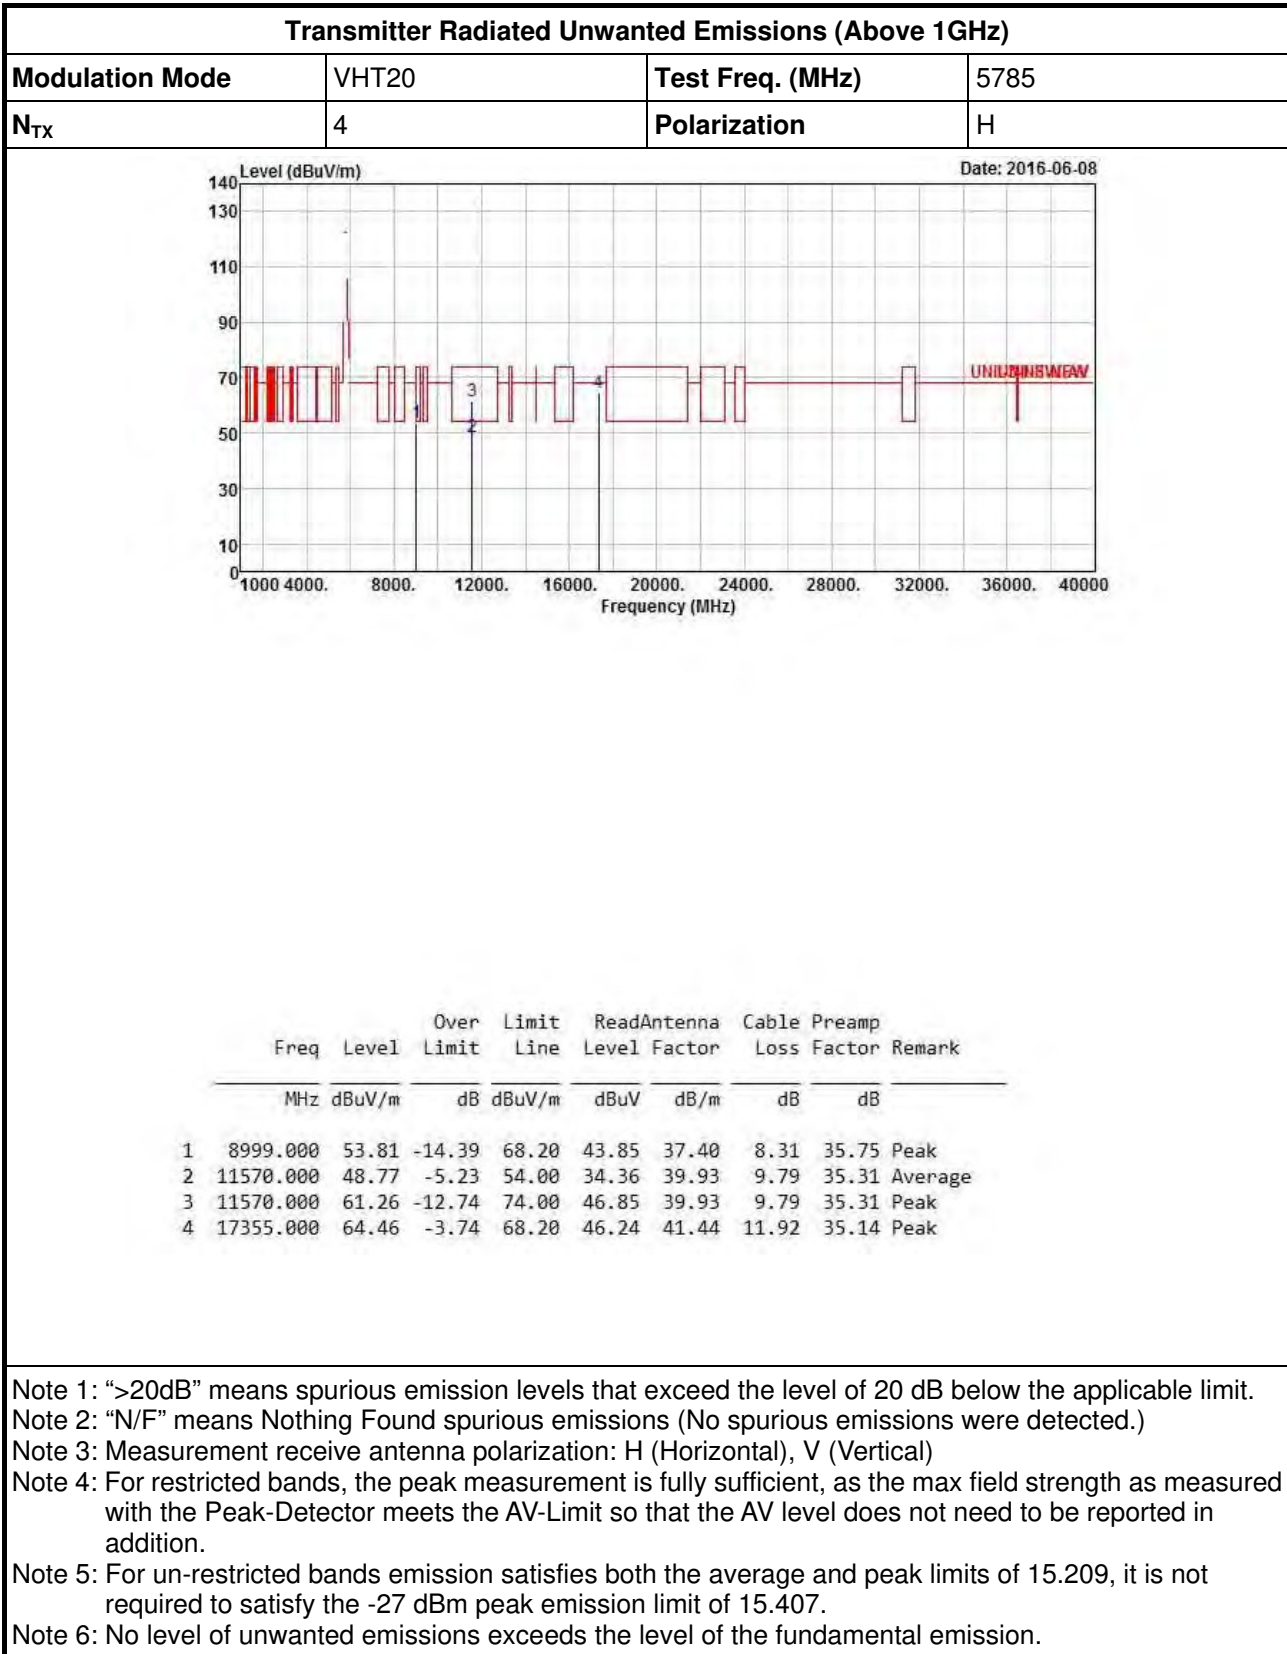


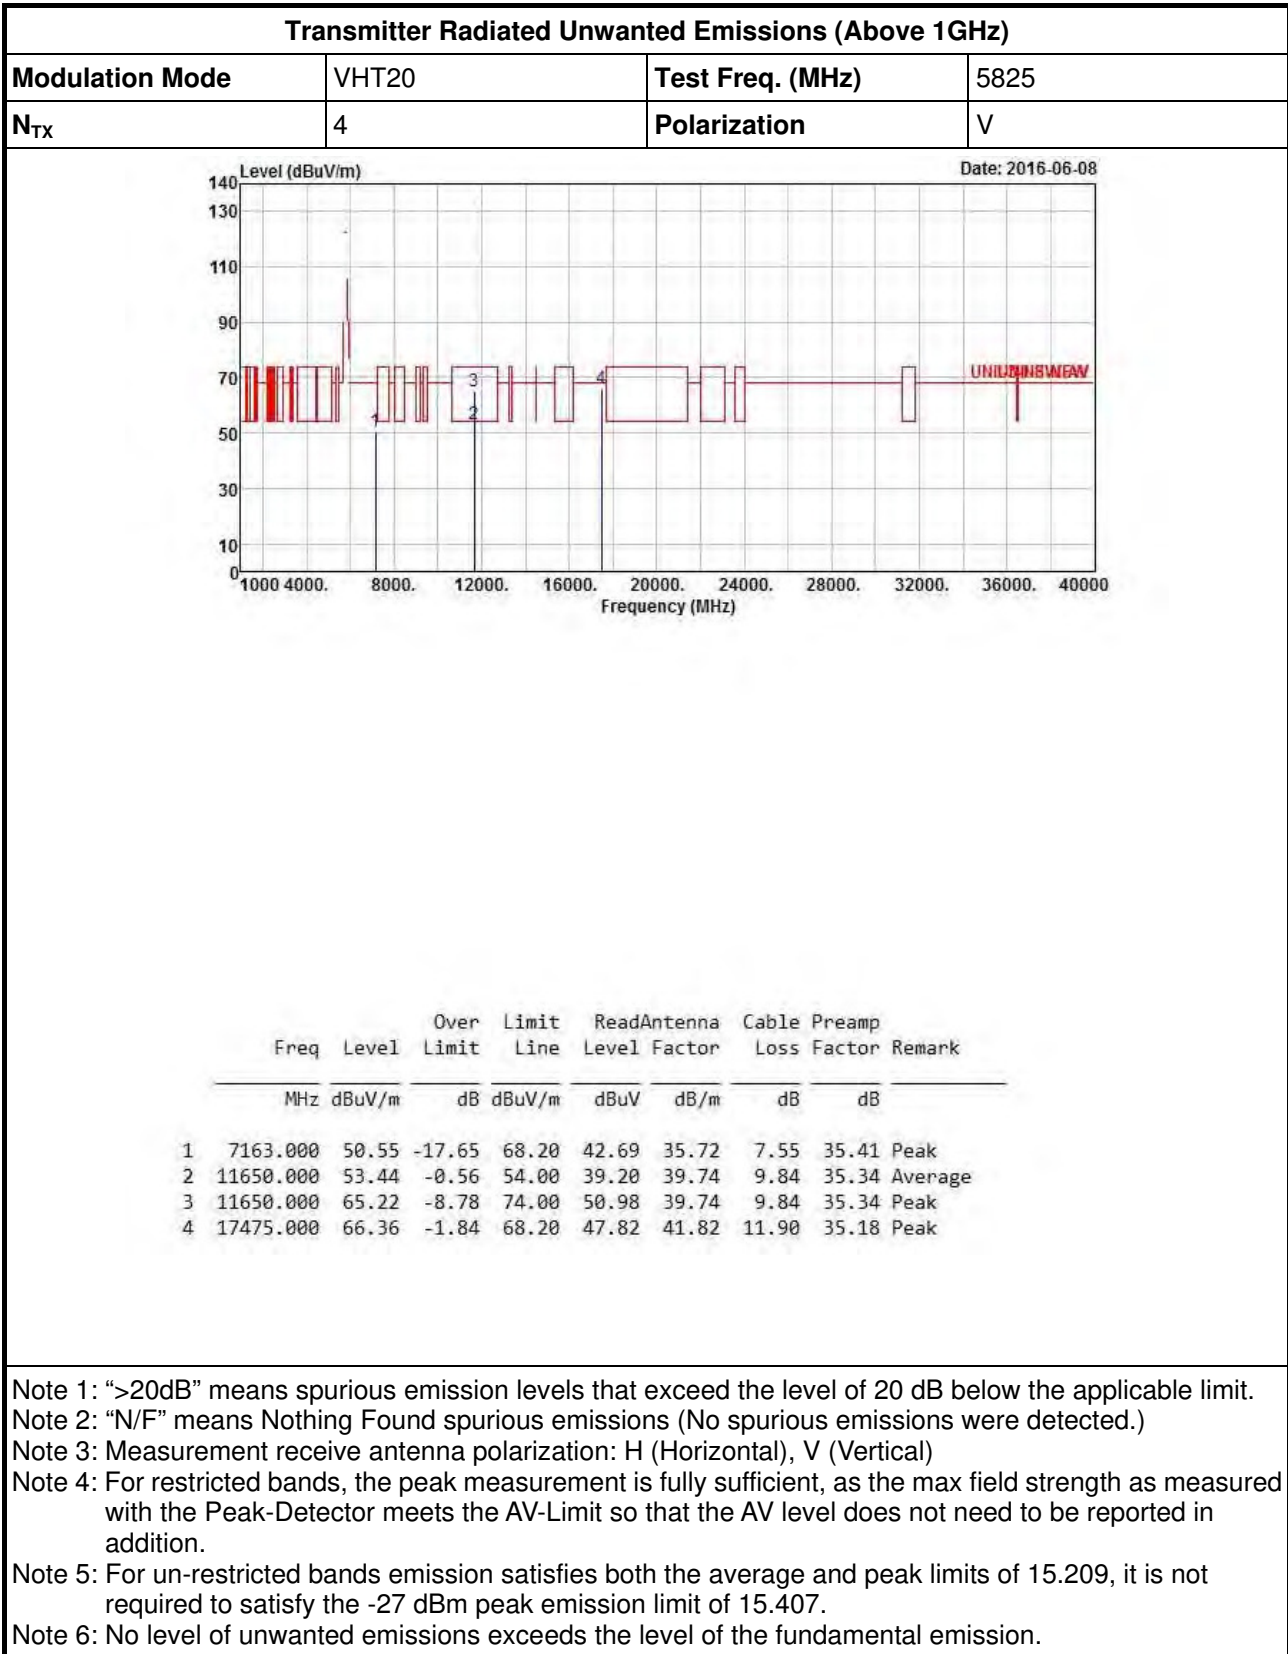

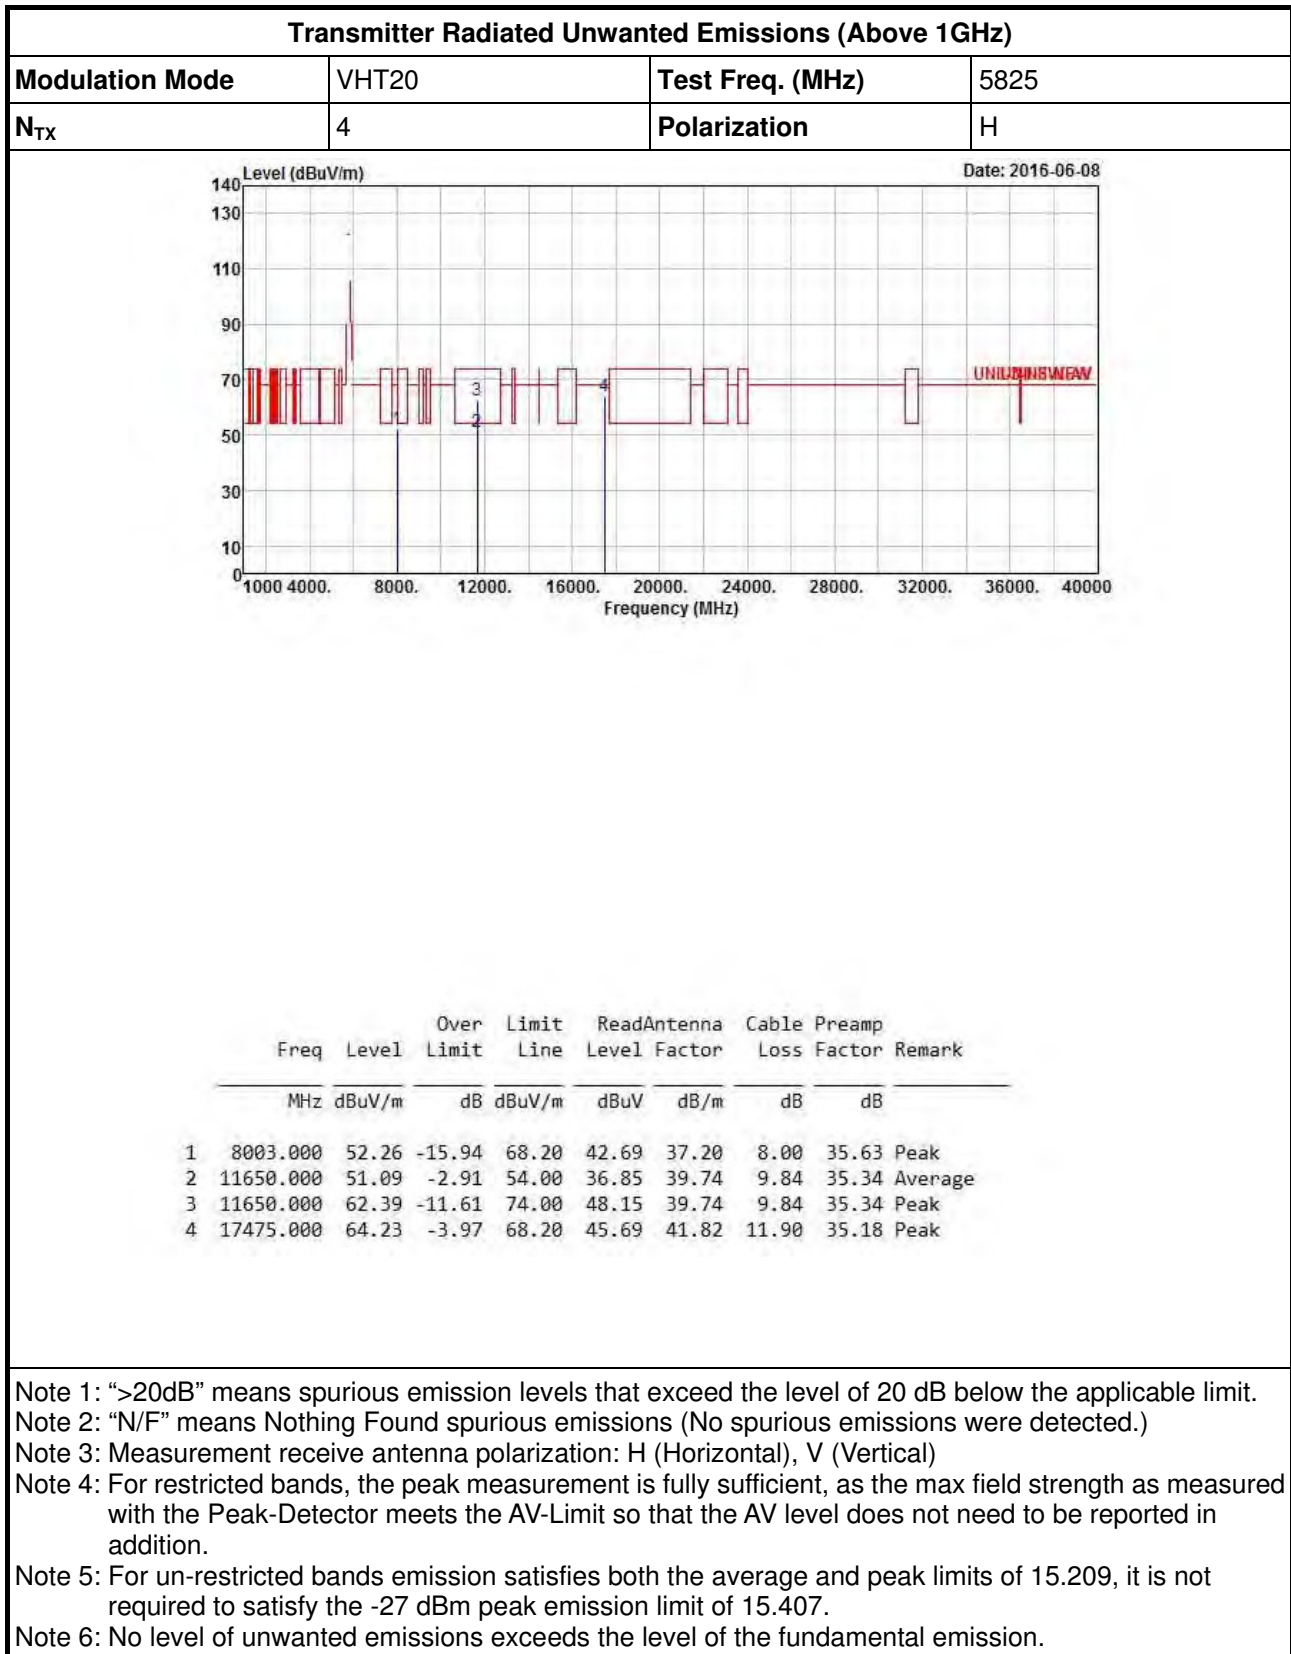

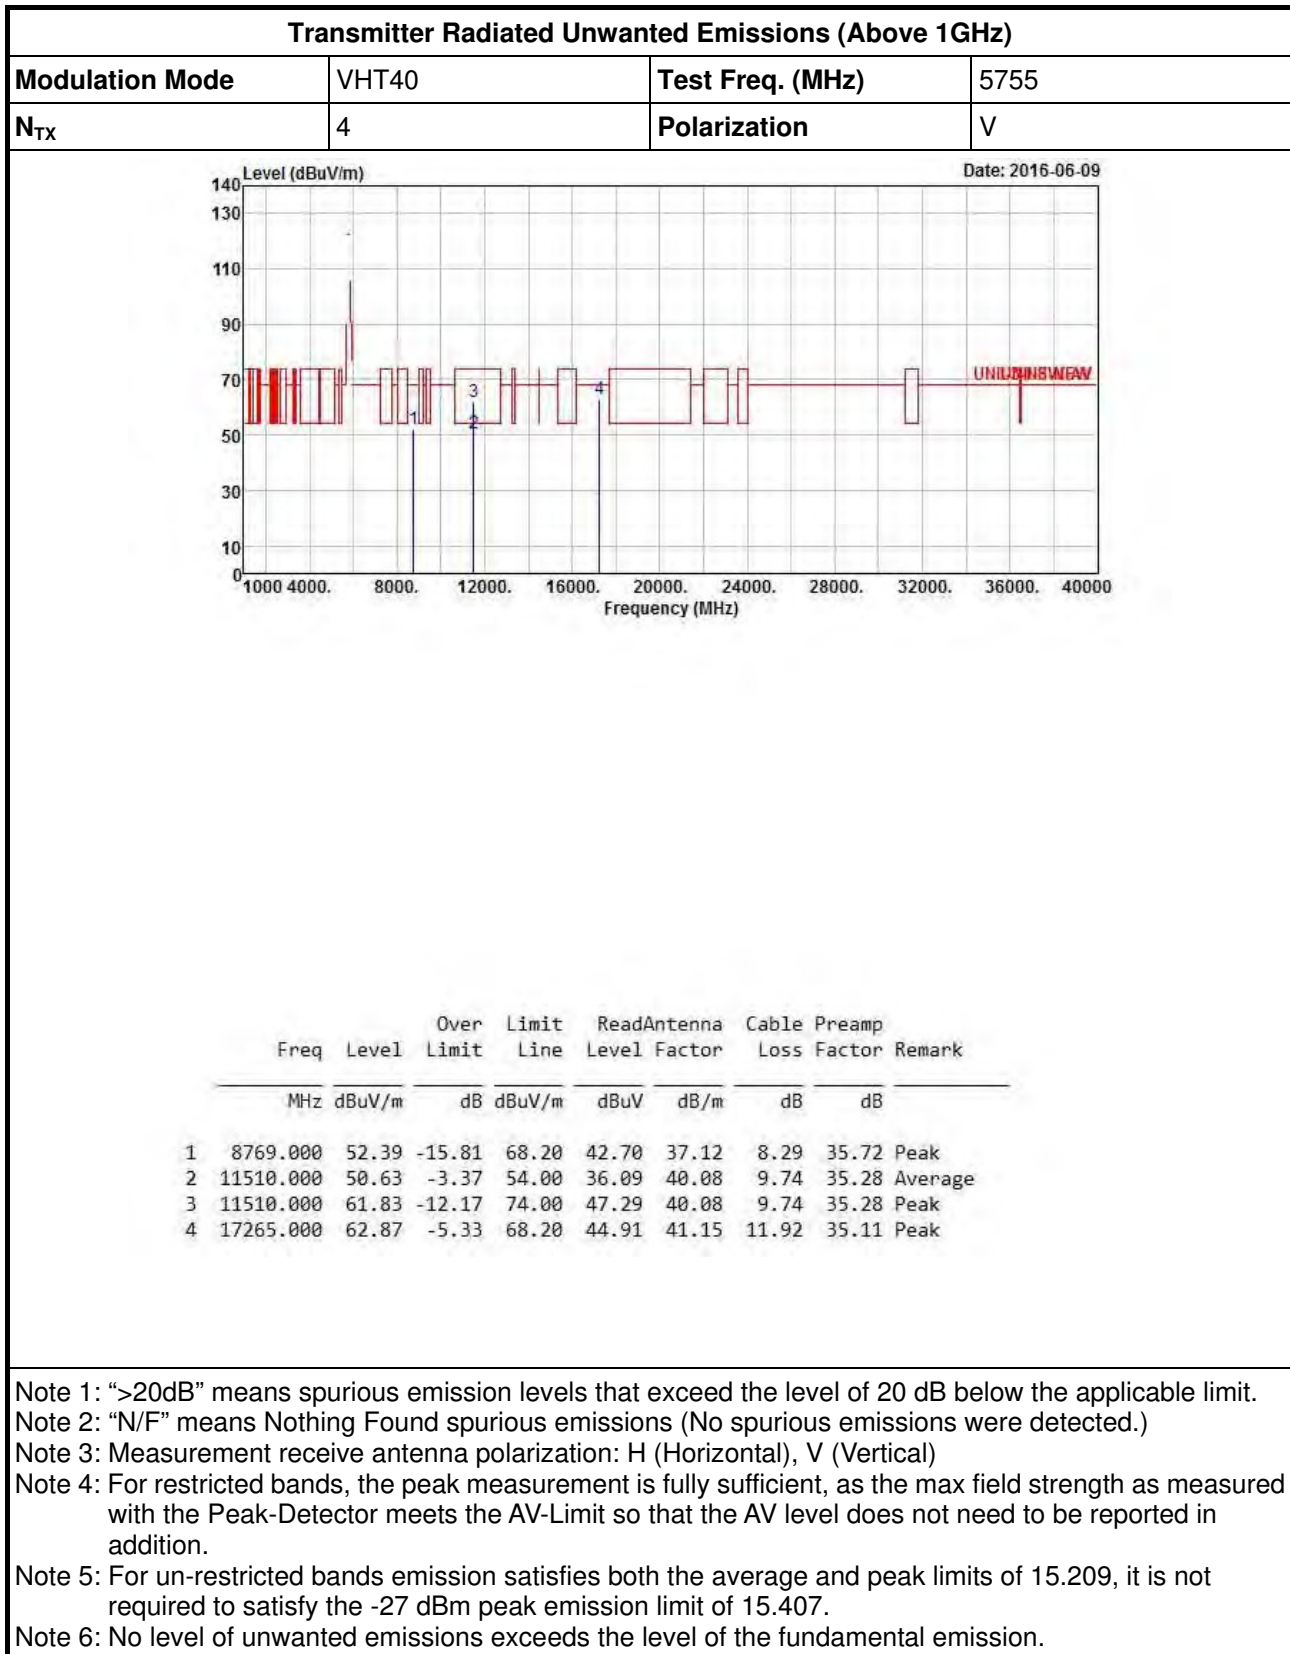

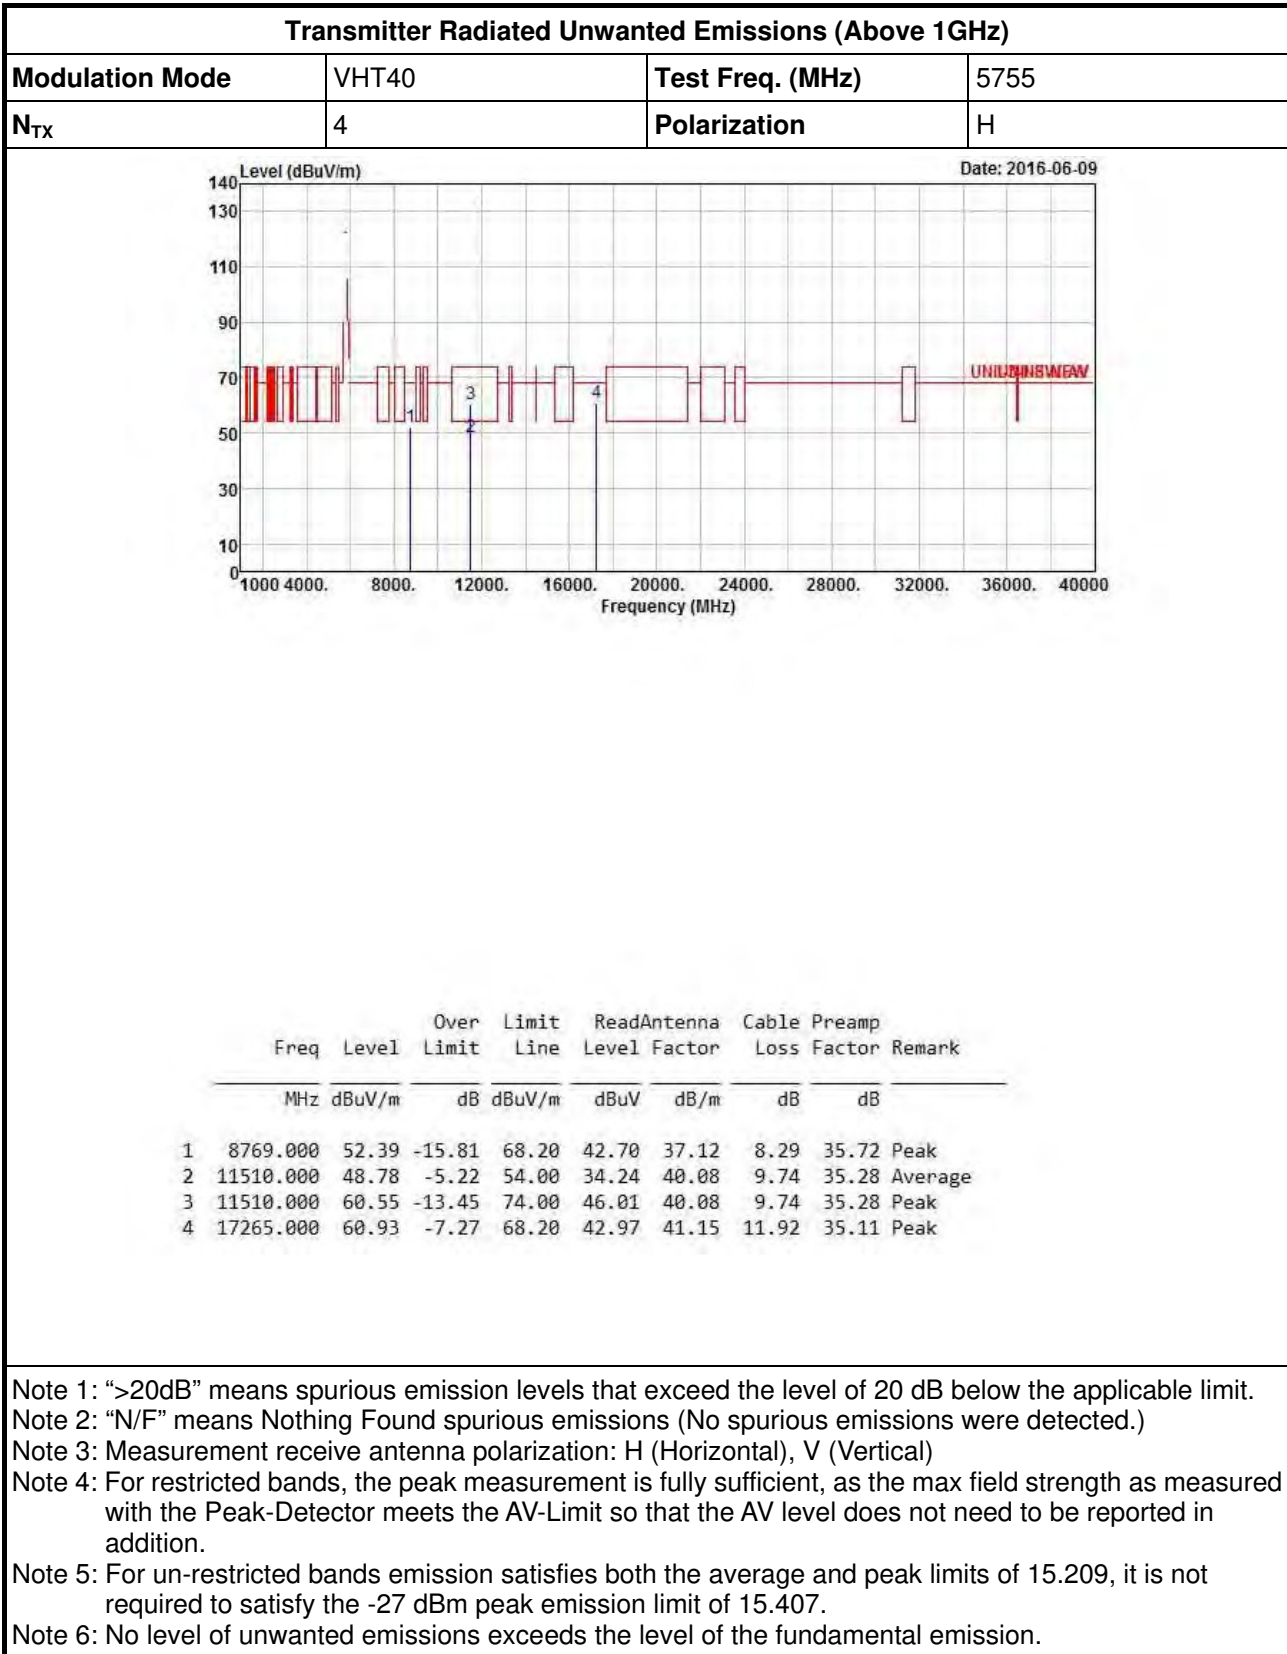


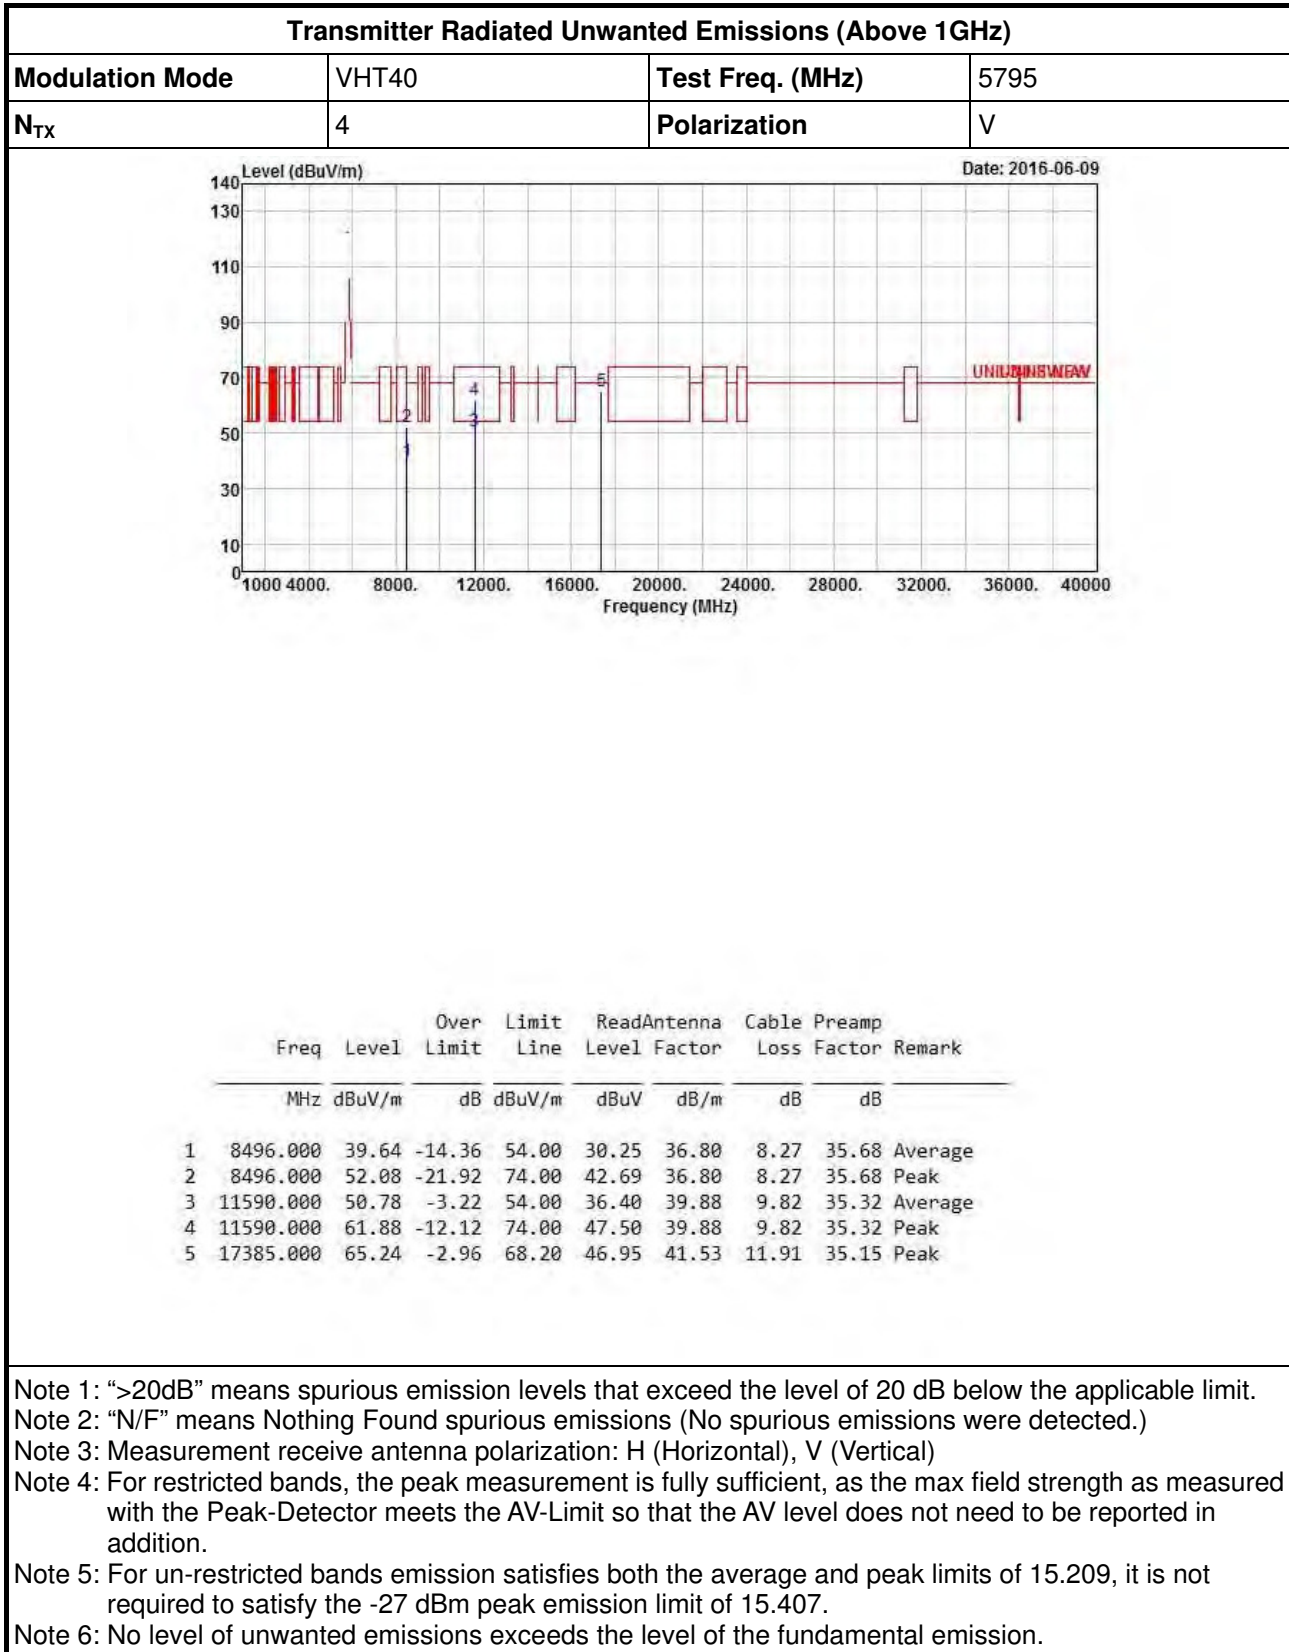



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5795
N _{TX}	4	Polarization	H

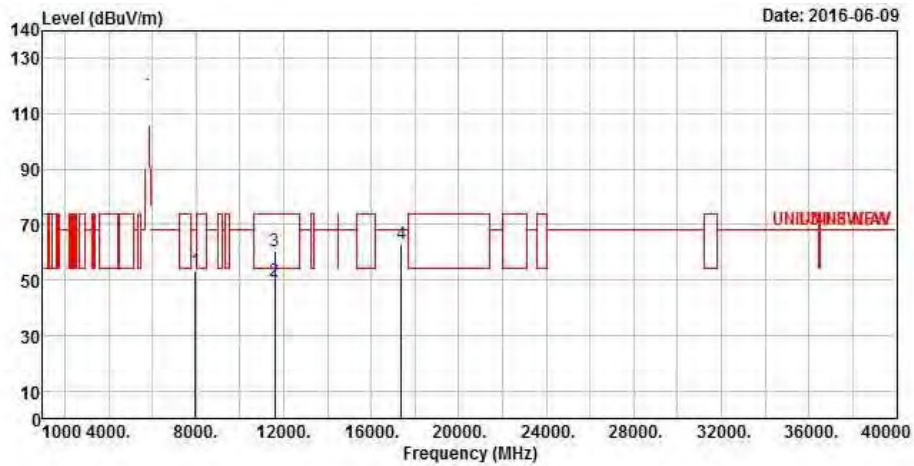


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7985.000	53.39	-14.81	68.20	43.85	37.18	7.98	35.62	Peak
2	11590.000	49.34	-4.66	54.00	34.96	39.88	9.82	35.32	Average
3	11590.000	60.25	-13.75	74.00	45.87	39.88	9.82	35.32	Peak
4	17385.000	62.98	-5.22	68.20	44.69	41.53	11.91	35.15	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5775
N _{TX}	4	Polarization	V

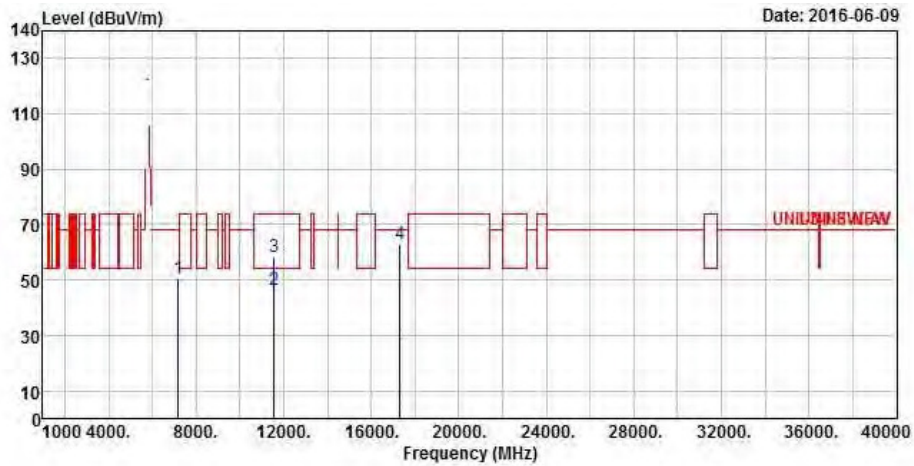


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7196.000	50.64	-17.56	68.20	42.68	35.81	7.56	35.41	Peak
2	11550.000	46.57	-7.43	54.00	32.10	39.98	9.79	35.30	Average
3	11550.000	58.57	-15.43	74.00	44.10	39.98	9.79	35.30	Peak
4	17325.000	62.93	-5.27	68.20	44.80	41.34	11.92	35.13	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

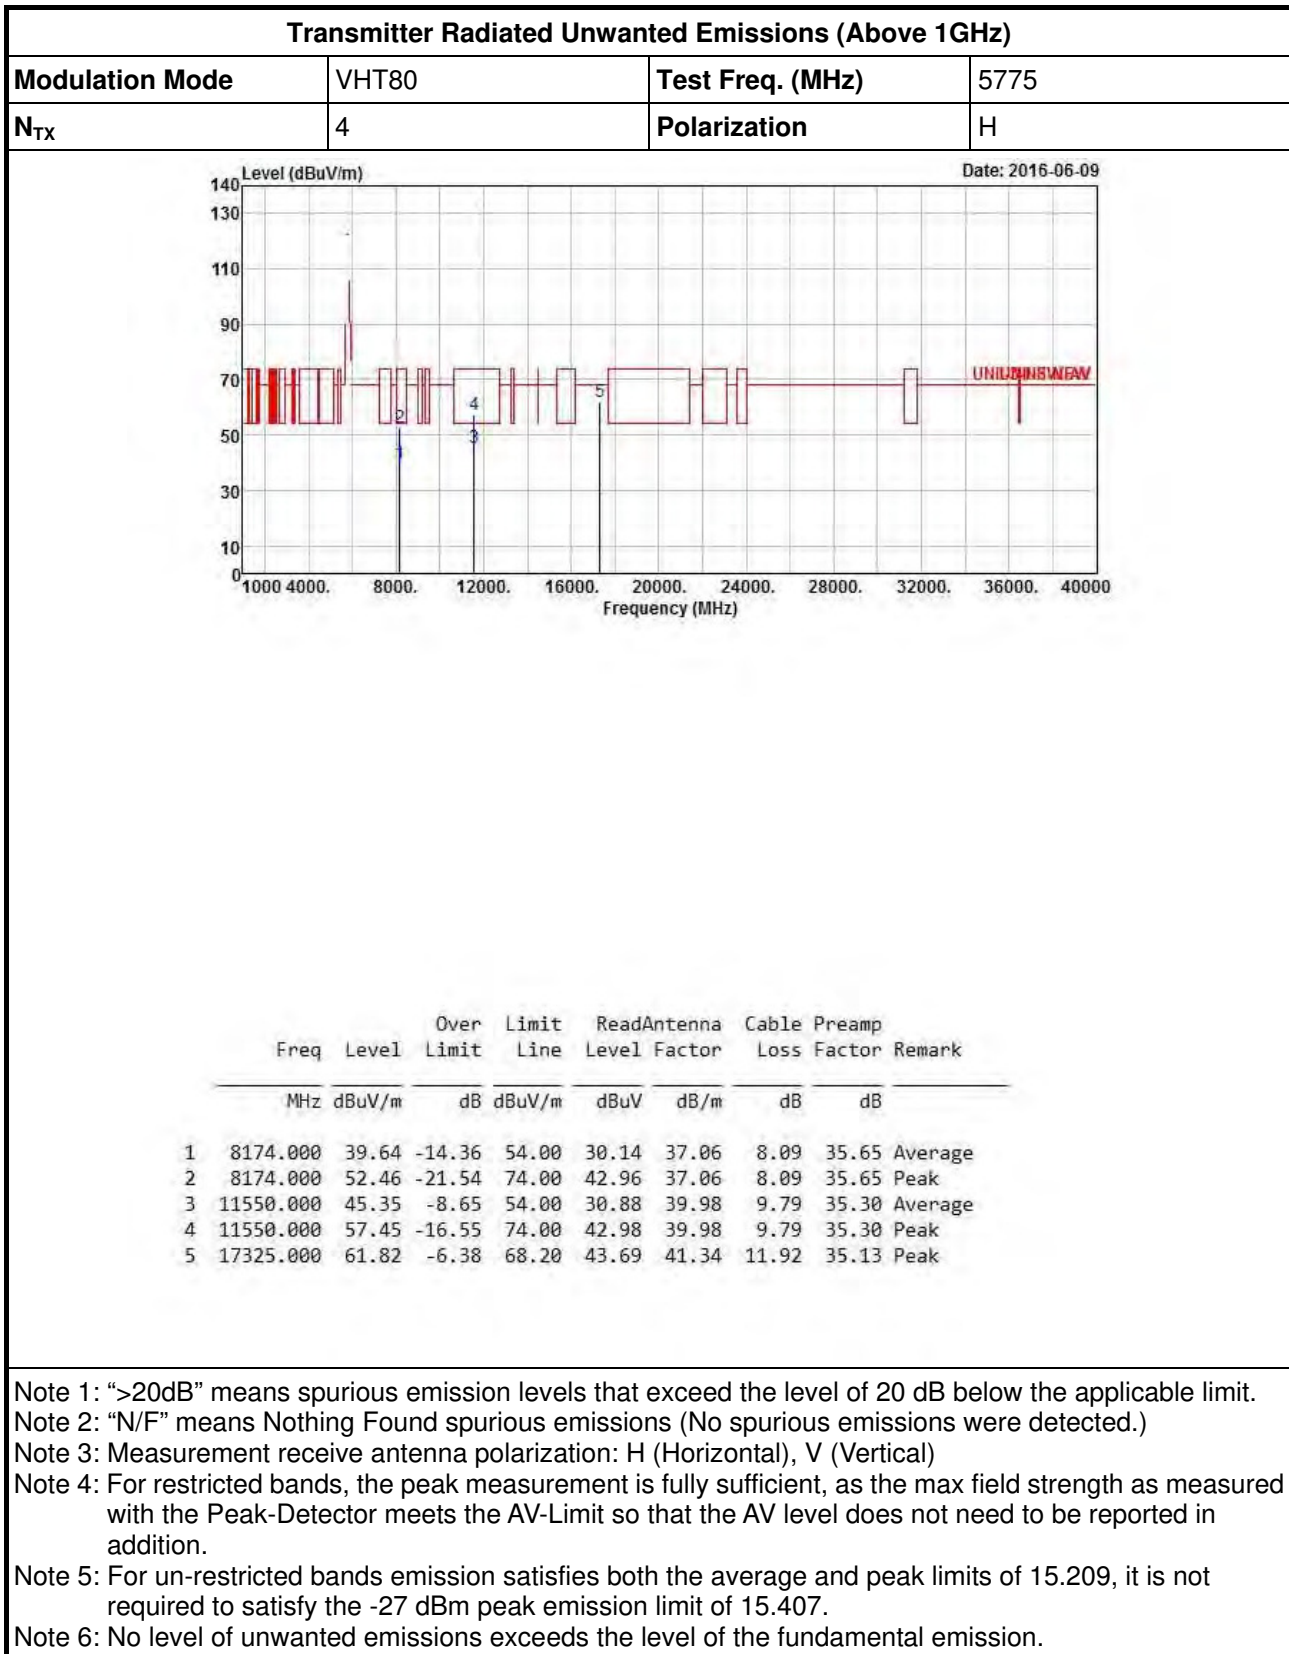

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5745
N_{TX}	4	Polarization	V

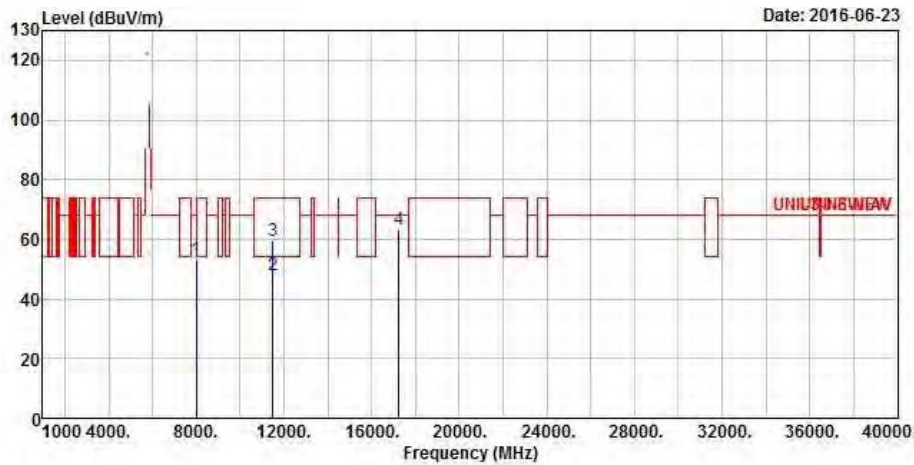


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8001.000	53.20	-15.00	68.20	43.63	37.20	8.00	35.63 Peak
2	11490.000	47.82	-6.18	54.00	33.26	40.10	9.74	35.28 Average
3	11490.000	59.30	-14.70	74.00	44.74	40.10	9.74	35.28 Peak
4	17235.000	63.24	-4.96	68.20	45.35	41.05	11.93	35.09 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5745
N_{TX}	4	Polarization	H

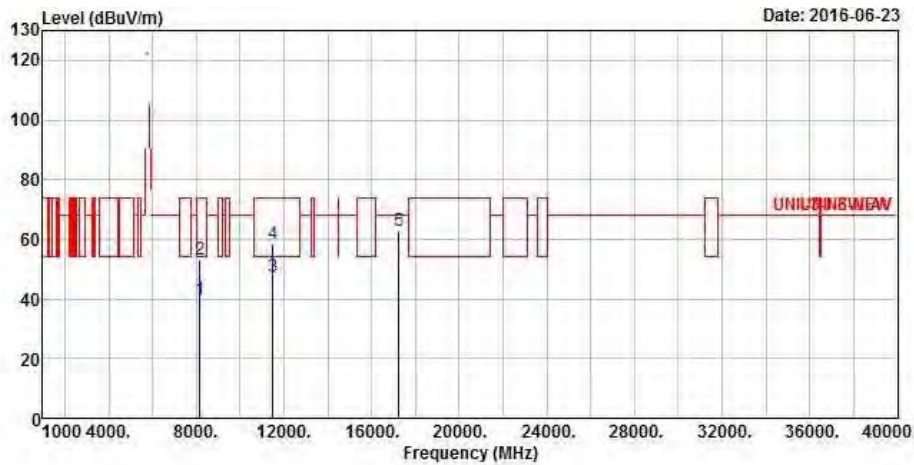


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8174.000	39.75	-14.25	54.00	30.25	37.06	8.09	35.65	Average
2	8174.000	53.19	-20.81	74.00	43.69	37.06	8.09	35.65	Peak
3	11490.000	47.52	-6.48	54.00	32.96	40.10	9.74	35.28	Average
4	11490.000	58.41	-15.59	74.00	43.85	40.10	9.74	35.28	Peak
5	17235.000	62.73	-5.47	68.20	44.84	41.05	11.93	35.09	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5785
N_{TX}	4	Polarization	V

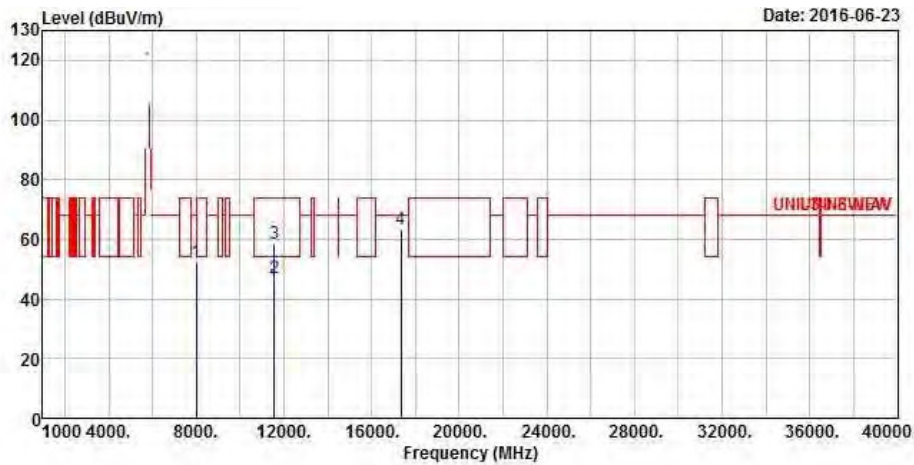


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8003.000	52.26	-15.94	68.20	42.69	37.20	8.00	35.63 Peak
2	11570.000	47.19	-6.81	54.00	32.78	39.93	9.79	35.31 Average
3	11570.000	58.50	-15.50	74.00	44.09	39.93	9.79	35.31 Peak
4	17355.000	63.47	-4.73	68.20	45.25	41.44	11.92	35.14 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5785
N_{TX}	4	Polarization	H

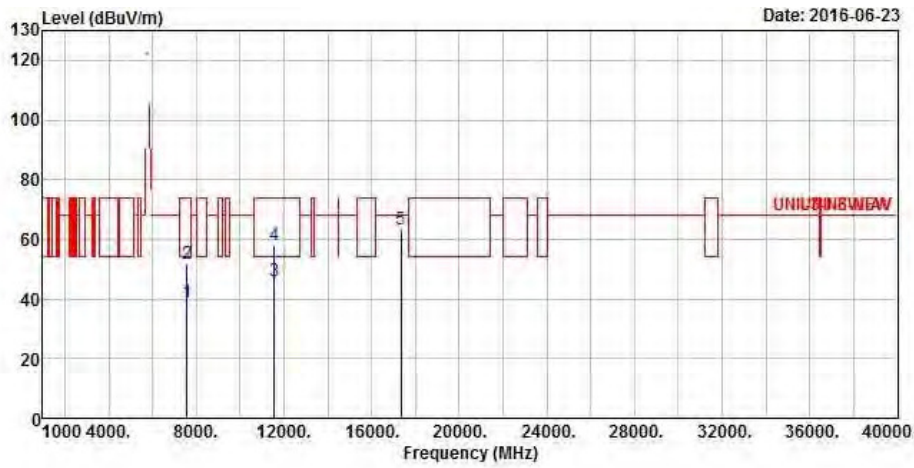

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7585.000	39.09	-14.91	54.00	30.14	36.70	7.72	35.47	Average
2	7585.000	51.64	-22.36	74.00	42.69	36.70	7.72	35.47	Peak
3	11570.000	46.15	-7.85	54.00	31.74	39.93	9.79	35.31	Average
4	11570.000	58.10	-15.90	74.00	43.69	39.93	9.79	35.31	Peak
5	17355.000	63.17	-5.03	68.20	44.95	41.44	11.92	35.14	Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

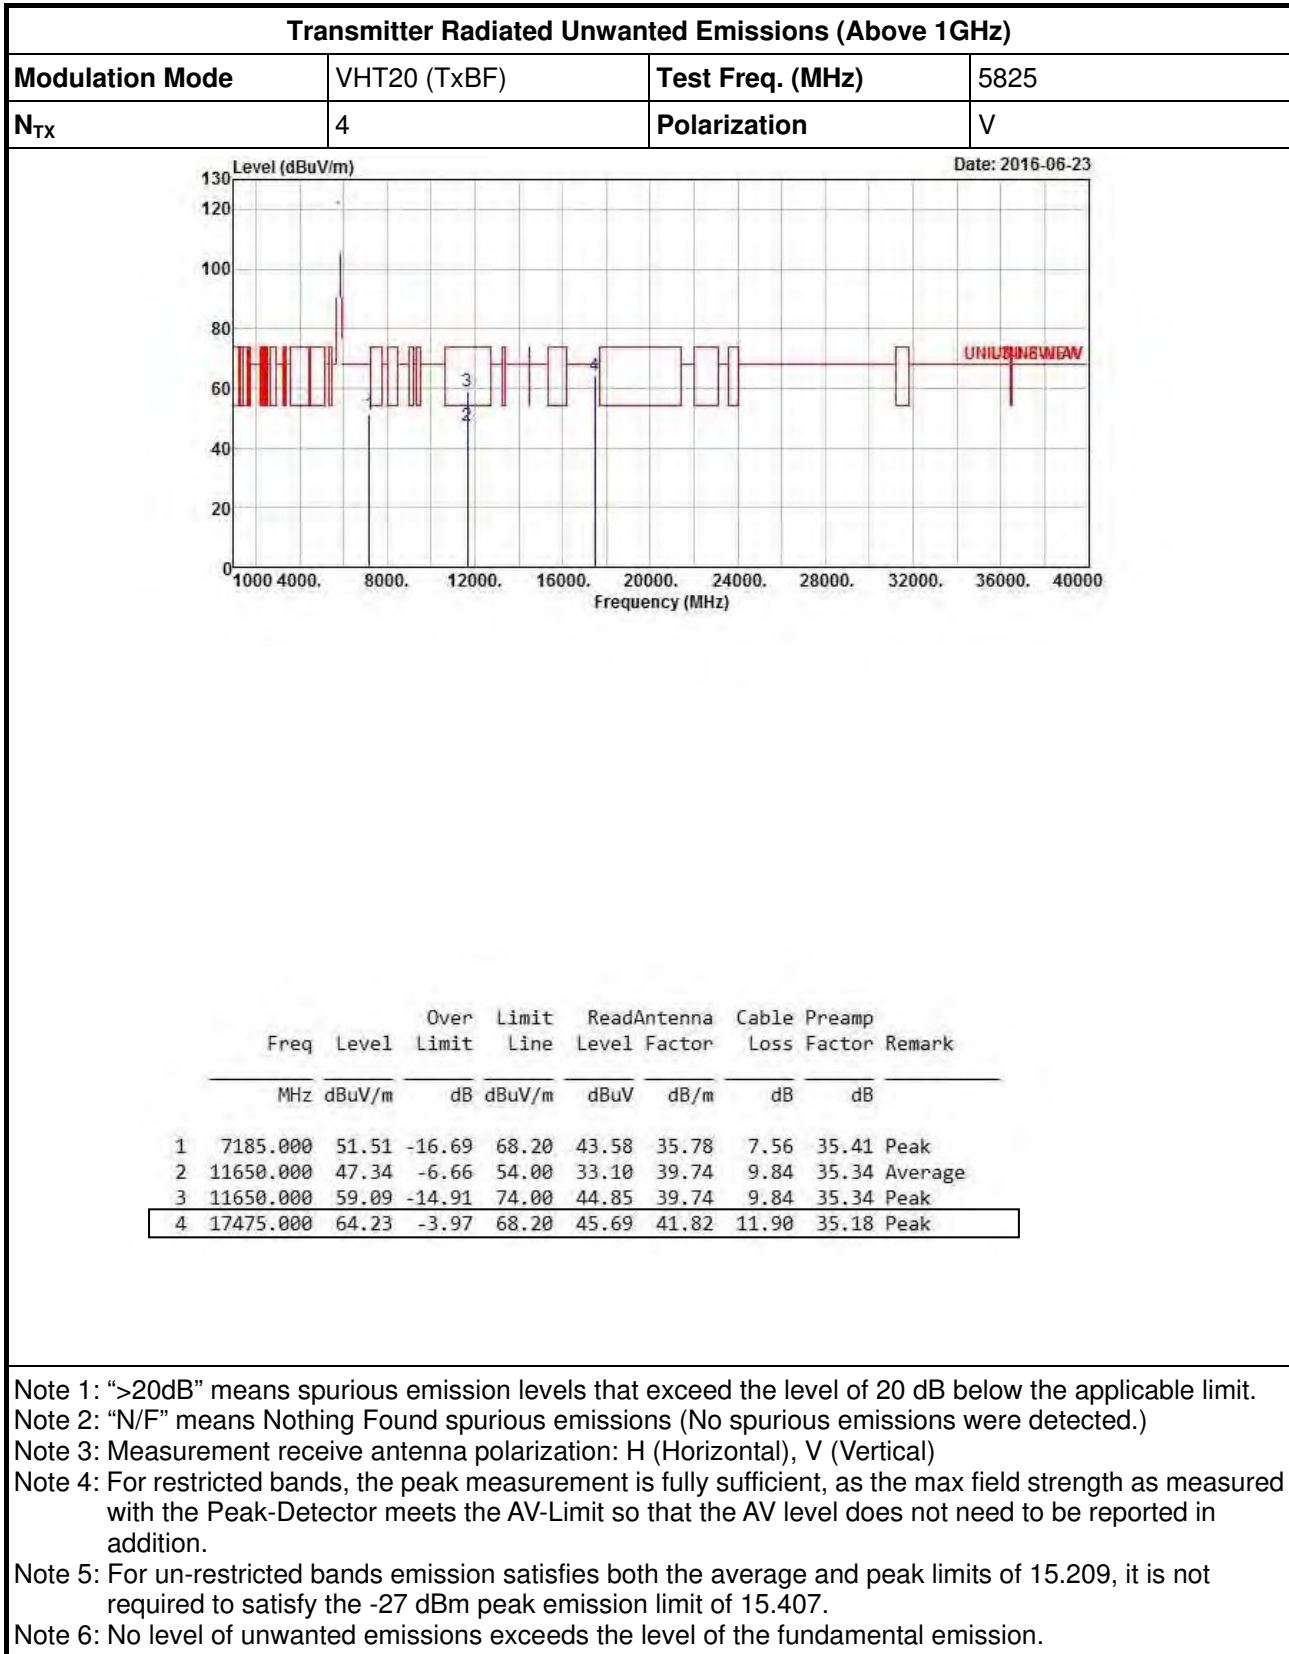

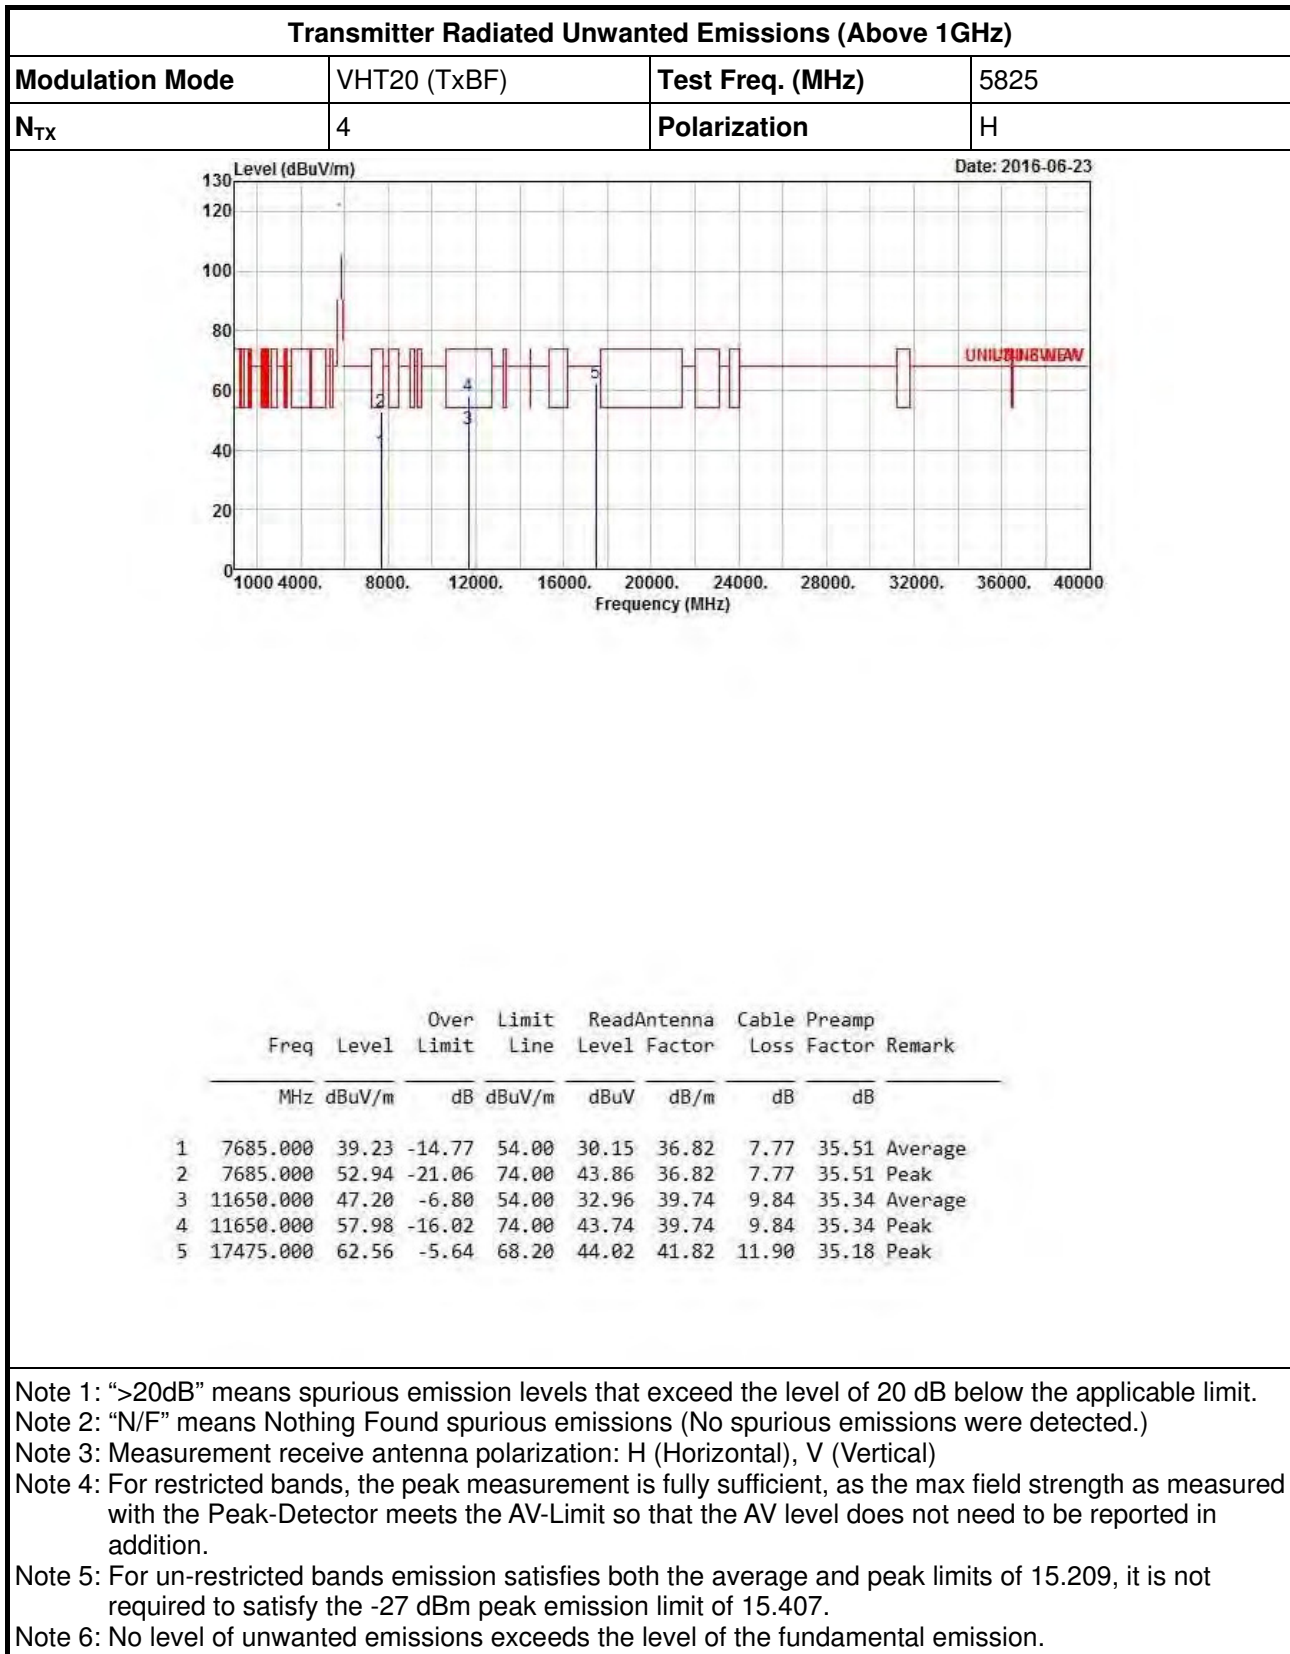

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40 (TxBF)	Test Freq. (MHz)	5755
N_{TX}	4	Polarization	V

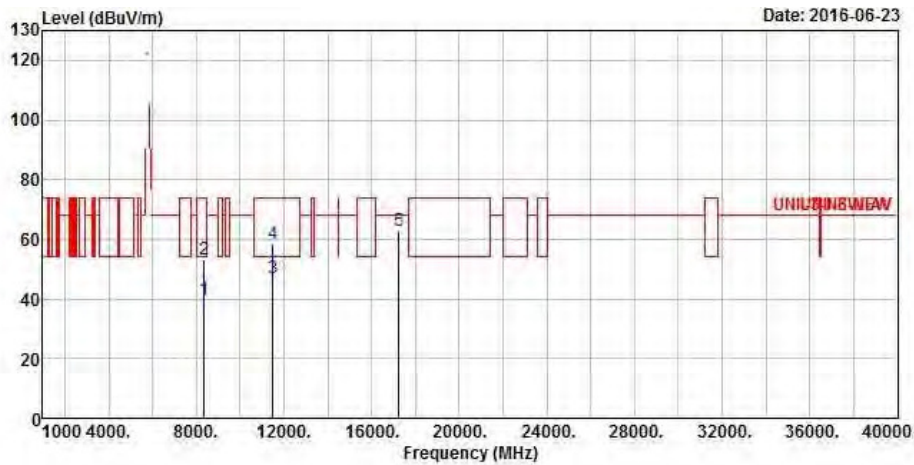


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	8374.000	39.58	-14.42	54.00	30.15	36.90	8.20	Average
2	8374.000	53.29	-20.71	74.00	43.86	36.90	8.20	Peak
3	11510.000	47.00	-7.00	54.00	32.46	40.08	9.74	Average
4	11510.000	58.54	-15.46	74.00	44.00	40.08	9.74	Peak
5	17265.000	62.85	-5.35	68.20	44.89	41.15	11.92	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40 (TxBF)	Test Freq. (MHz)	5755
N _{TX}	4	Polarization	H

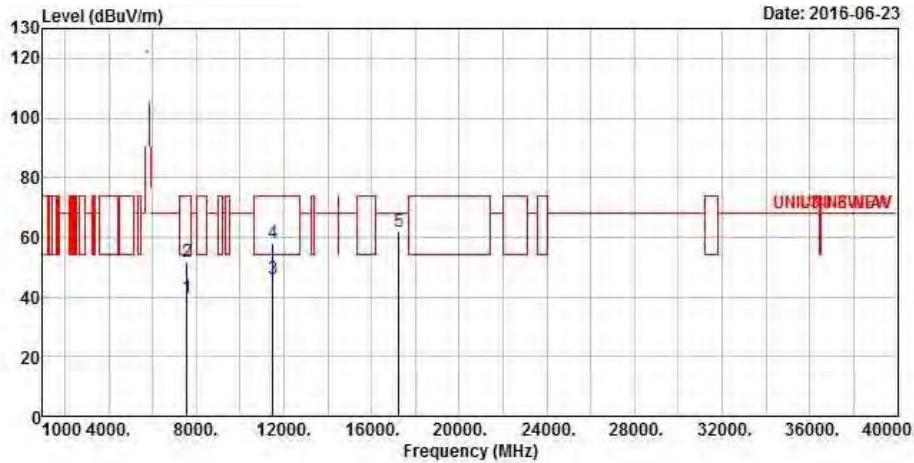


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	7584.000	39.64	-14.36	54.00	30.69	36.70	7.72	35.47 Average
2	7584.000	51.64	-22.36	74.00	42.69	36.70	7.72	35.47 Peak
3	11510.000	46.11	-7.89	54.00	31.57	40.08	9.74	35.28 Average
4	11510.000	58.27	-15.73	74.00	43.73	40.08	9.74	35.28 Peak
5	17265.000	61.82	-6.38	68.20	43.86	41.15	11.92	35.11 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40 (TxBF)	Test Freq. (MHz)	5795
N_{TX}	4	Polarization	V

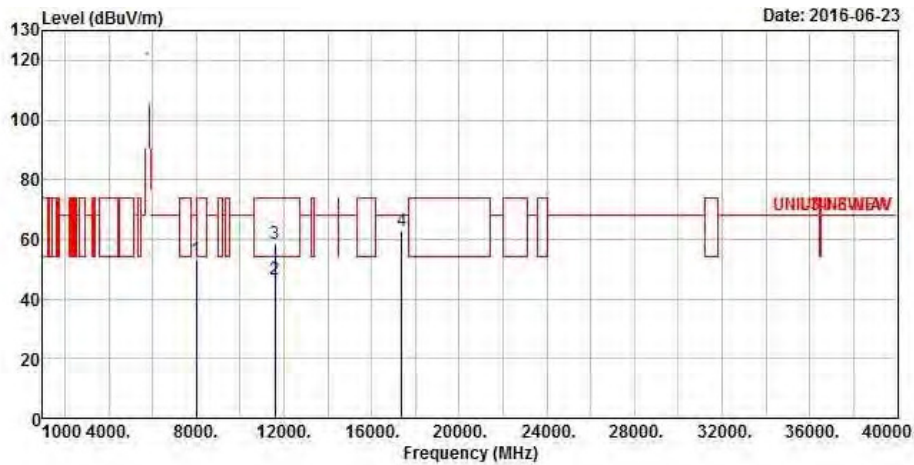


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8003.000	53.19	-15.01	68.20	43.62	37.20	8.00	35.63 Peak
2	11590.000	46.52	-7.48	54.00	32.14	39.88	9.82	35.32 Average
3	11590.000	58.74	-15.26	74.00	44.36	39.88	9.82	35.32 Peak
4	17385.000	62.65	-5.55	68.20	44.36	41.53	11.91	35.15 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

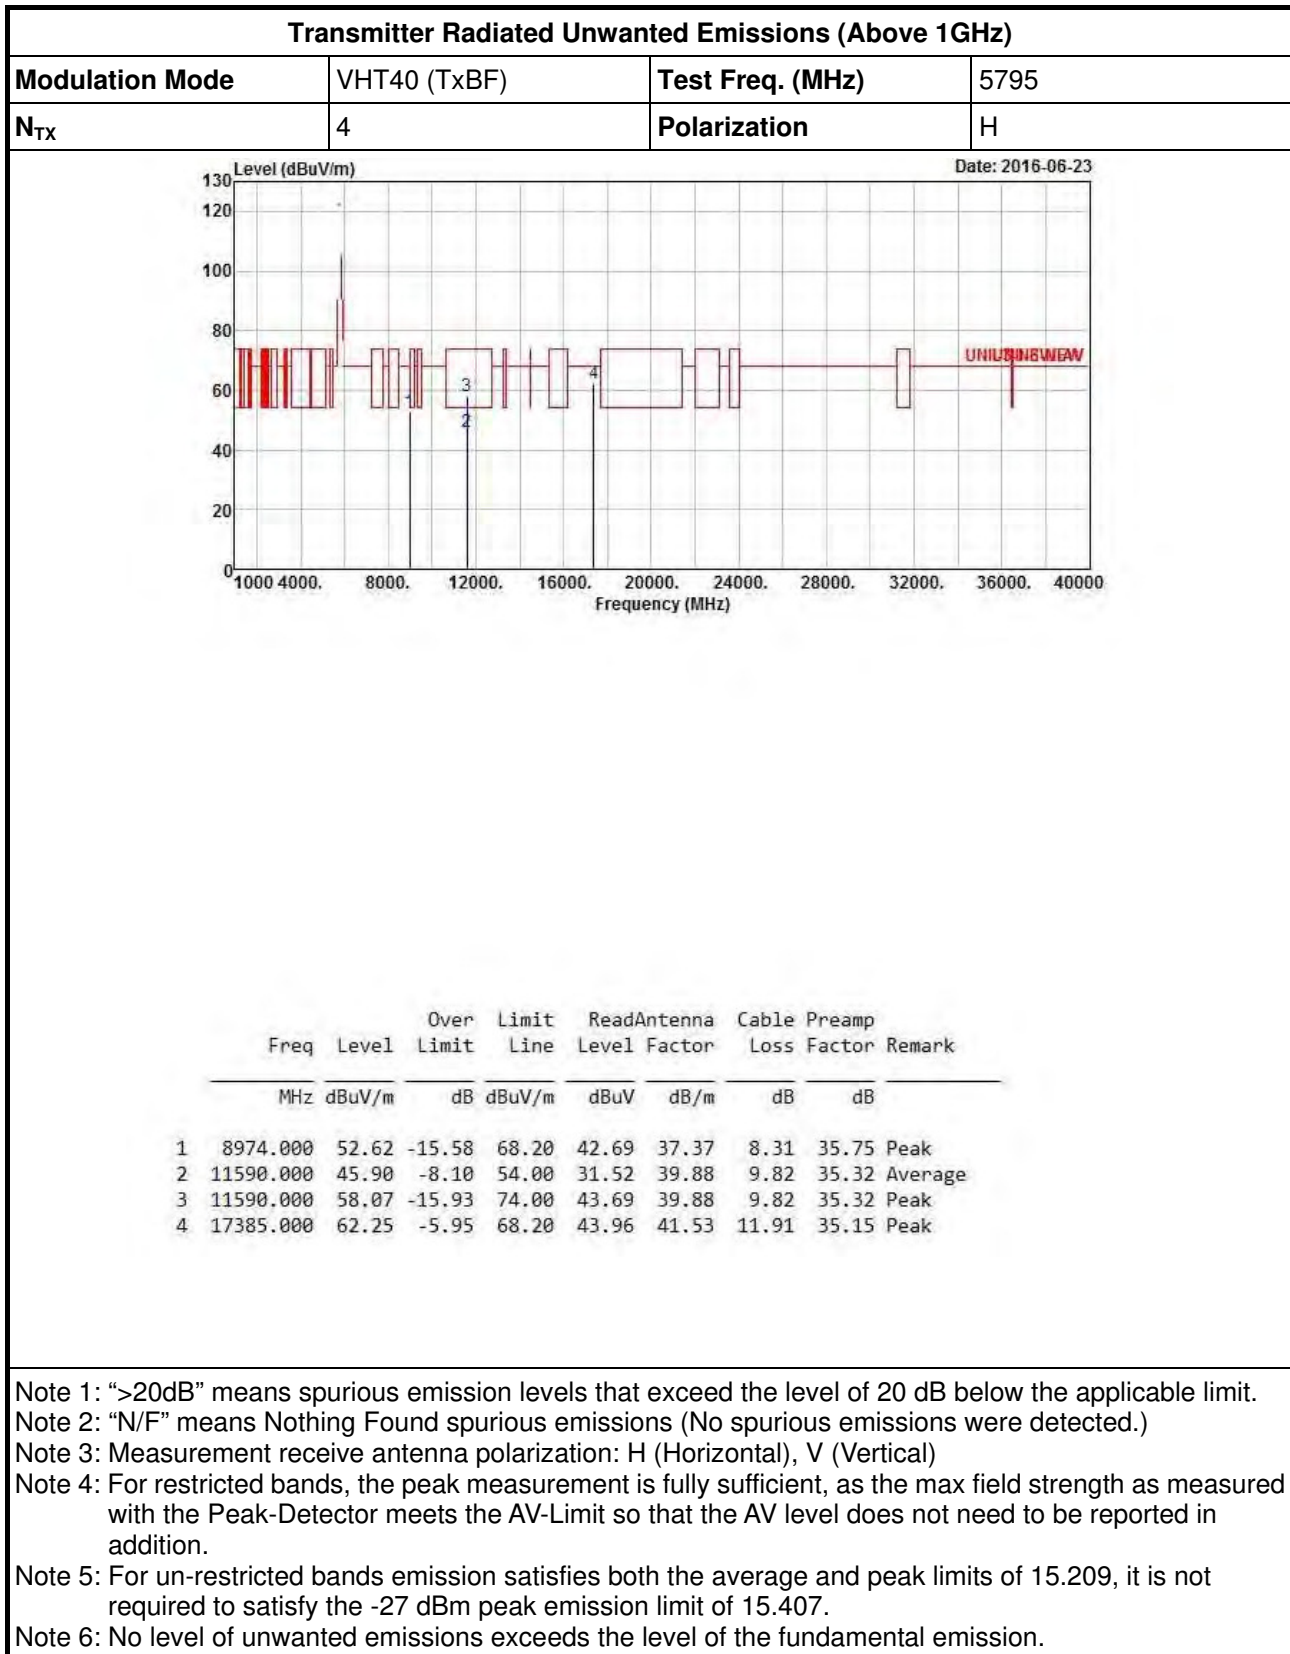

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80 (TxBF)	Test Freq. (MHz)	5775
N_{TX}	4	Polarization	V

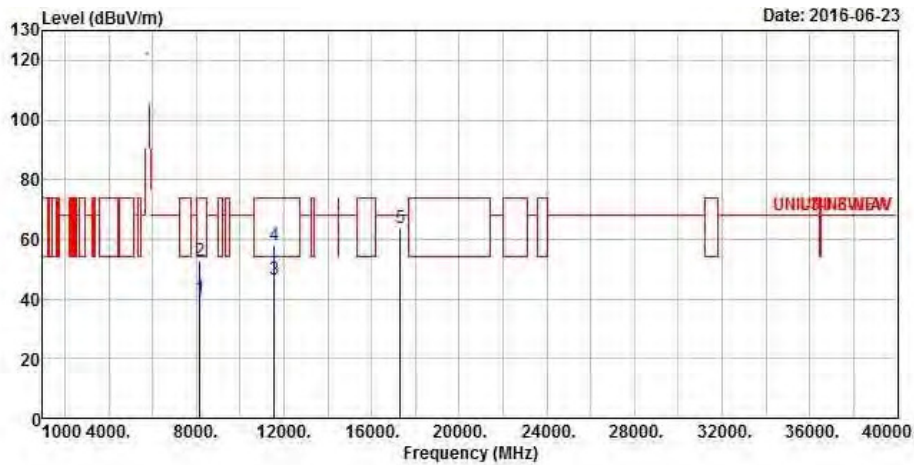


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	8174.000	40.19	-13.81	54.00	30.69	37.06	8.09	35.65 Average
2	8174.000	52.75	-21.25	74.00	43.25	37.06	8.09	35.65 Peak
3	11550.000	46.57	-7.43	54.00	32.10	39.98	9.79	35.30 Average
4	11550.000	58.05	-15.95	74.00	43.58	39.98	9.79	35.30 Peak
5	17325.000	63.70	-4.50	68.20	45.57	41.34	11.92	35.13 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80 (TxBF)	Test Freq. (MHz)	5775
N_{TX}	4	Polarization	H

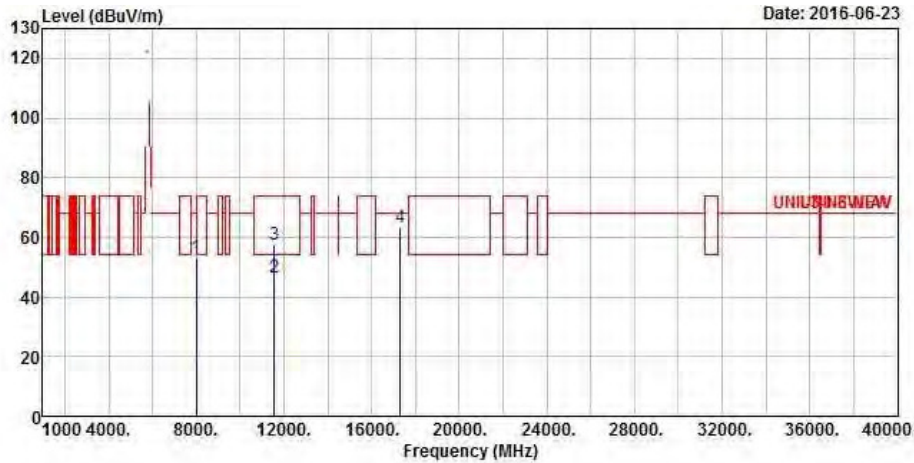


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8002.000	53.42	-14.78	68.20	43.85	37.20	8.00	35.63 Peak
2	11550.000	46.32	-7.68	54.00	31.85	39.98	9.79	35.30 Average
3	11550.000	57.43	-16.57	74.00	42.96	39.98	9.79	35.30 Peak
4	17325.000	63.09	-5.11	68.20	44.96	41.34	11.92	35.13 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	VHT80+80	Test Freq. (MHz)	5210+5775
N _{TX}	4	Polarization	V

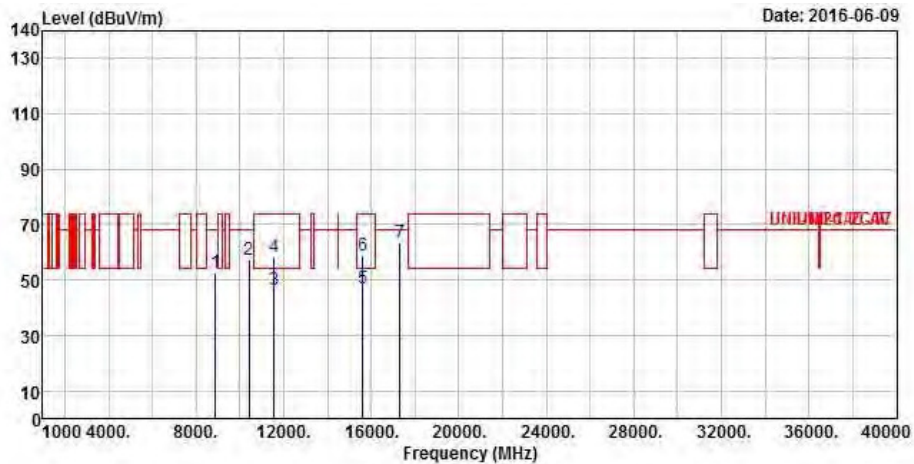


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8896.000	52.53	-15.67	68.20	42.69	37.28	8.30	35.74	Peak
2	10420.000	57.57	-10.63	68.20	44.10	39.57	9.46	35.56	Peak
3	11550.000	46.27	-7.73	54.00	31.80	39.98	9.79	35.30	Average
4	11550.000	58.27	-15.73	74.00	43.80	39.98	9.79	35.30	Peak
5	15630.000	46.90	-7.10	54.00	32.90	38.21	11.47	35.68	Average
6	15630.000	59.10	-14.90	74.00	45.10	38.21	11.47	35.68	Peak
7	17325.000	63.43	-4.77	68.20	45.30	41.34	11.92	35.13	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

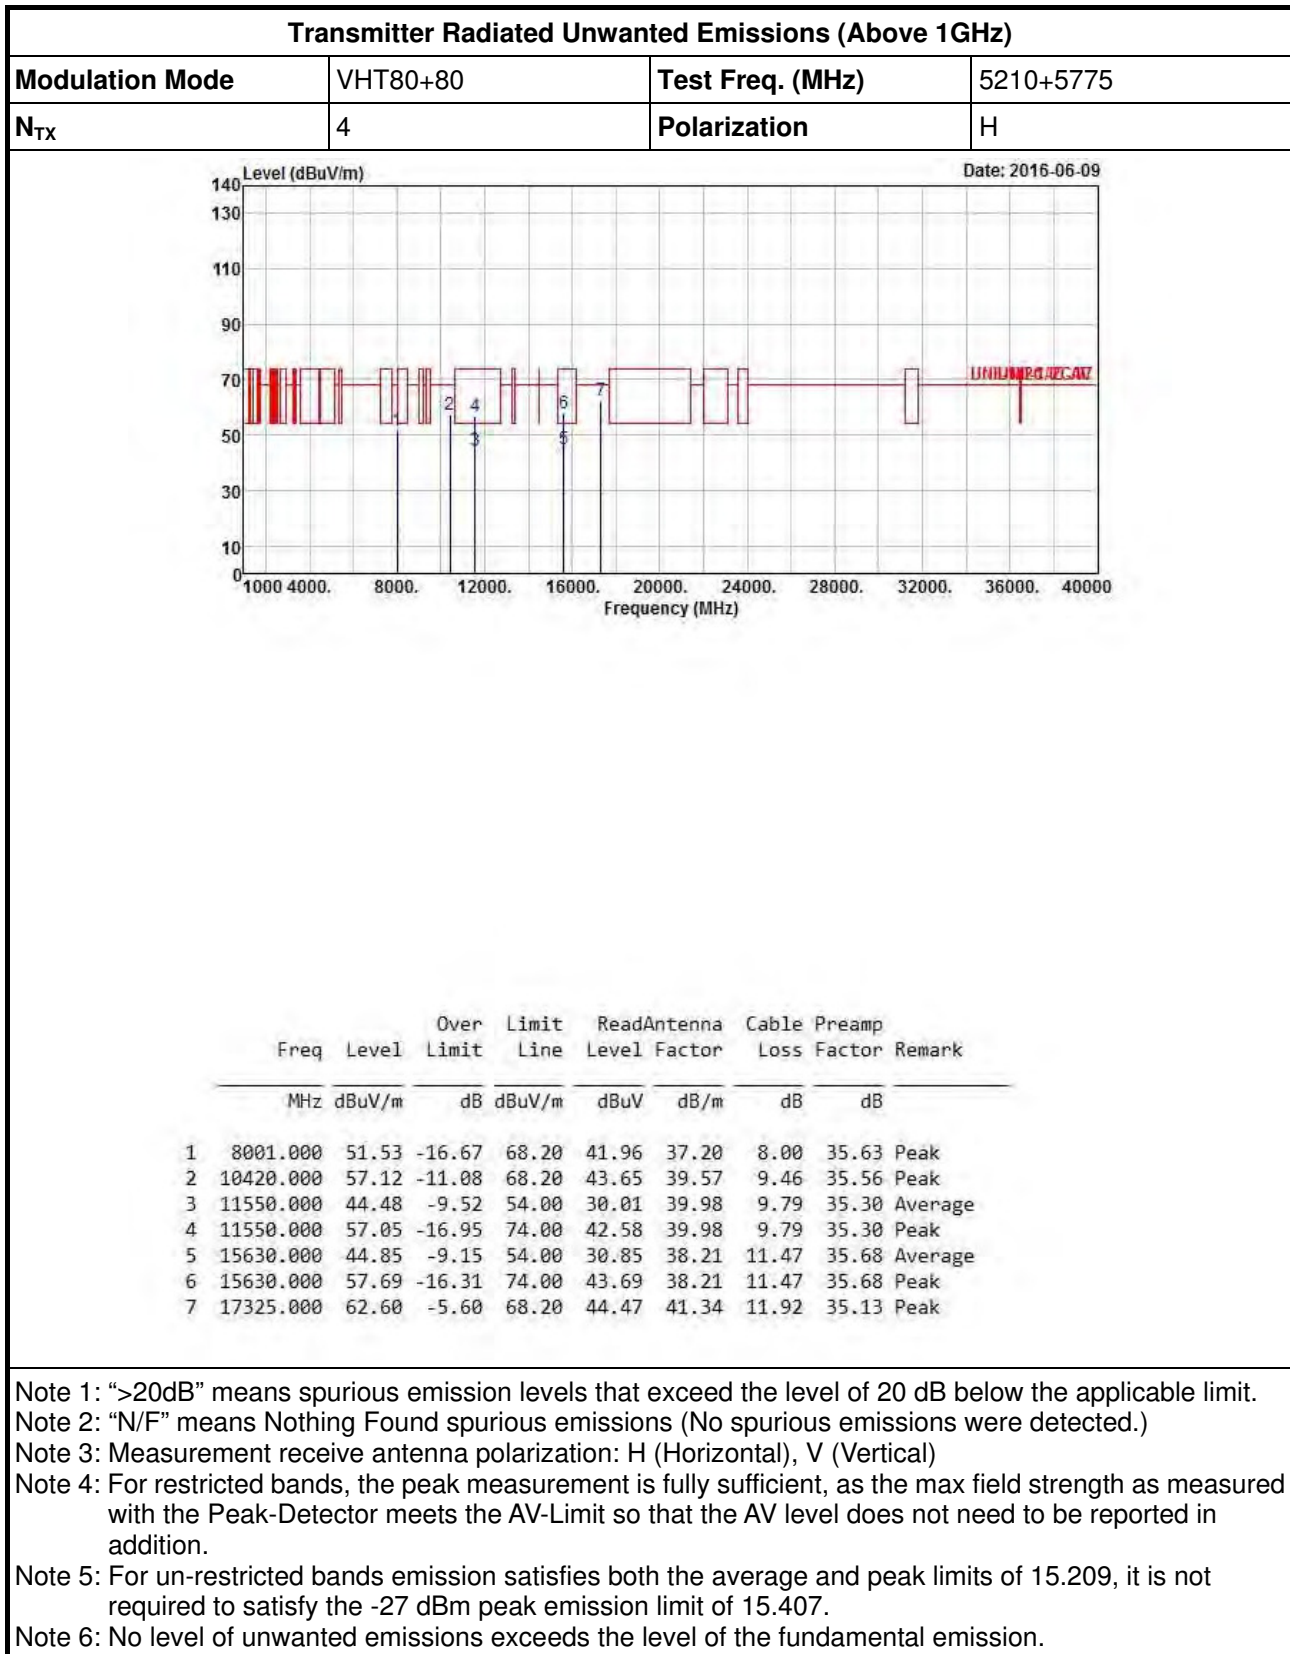

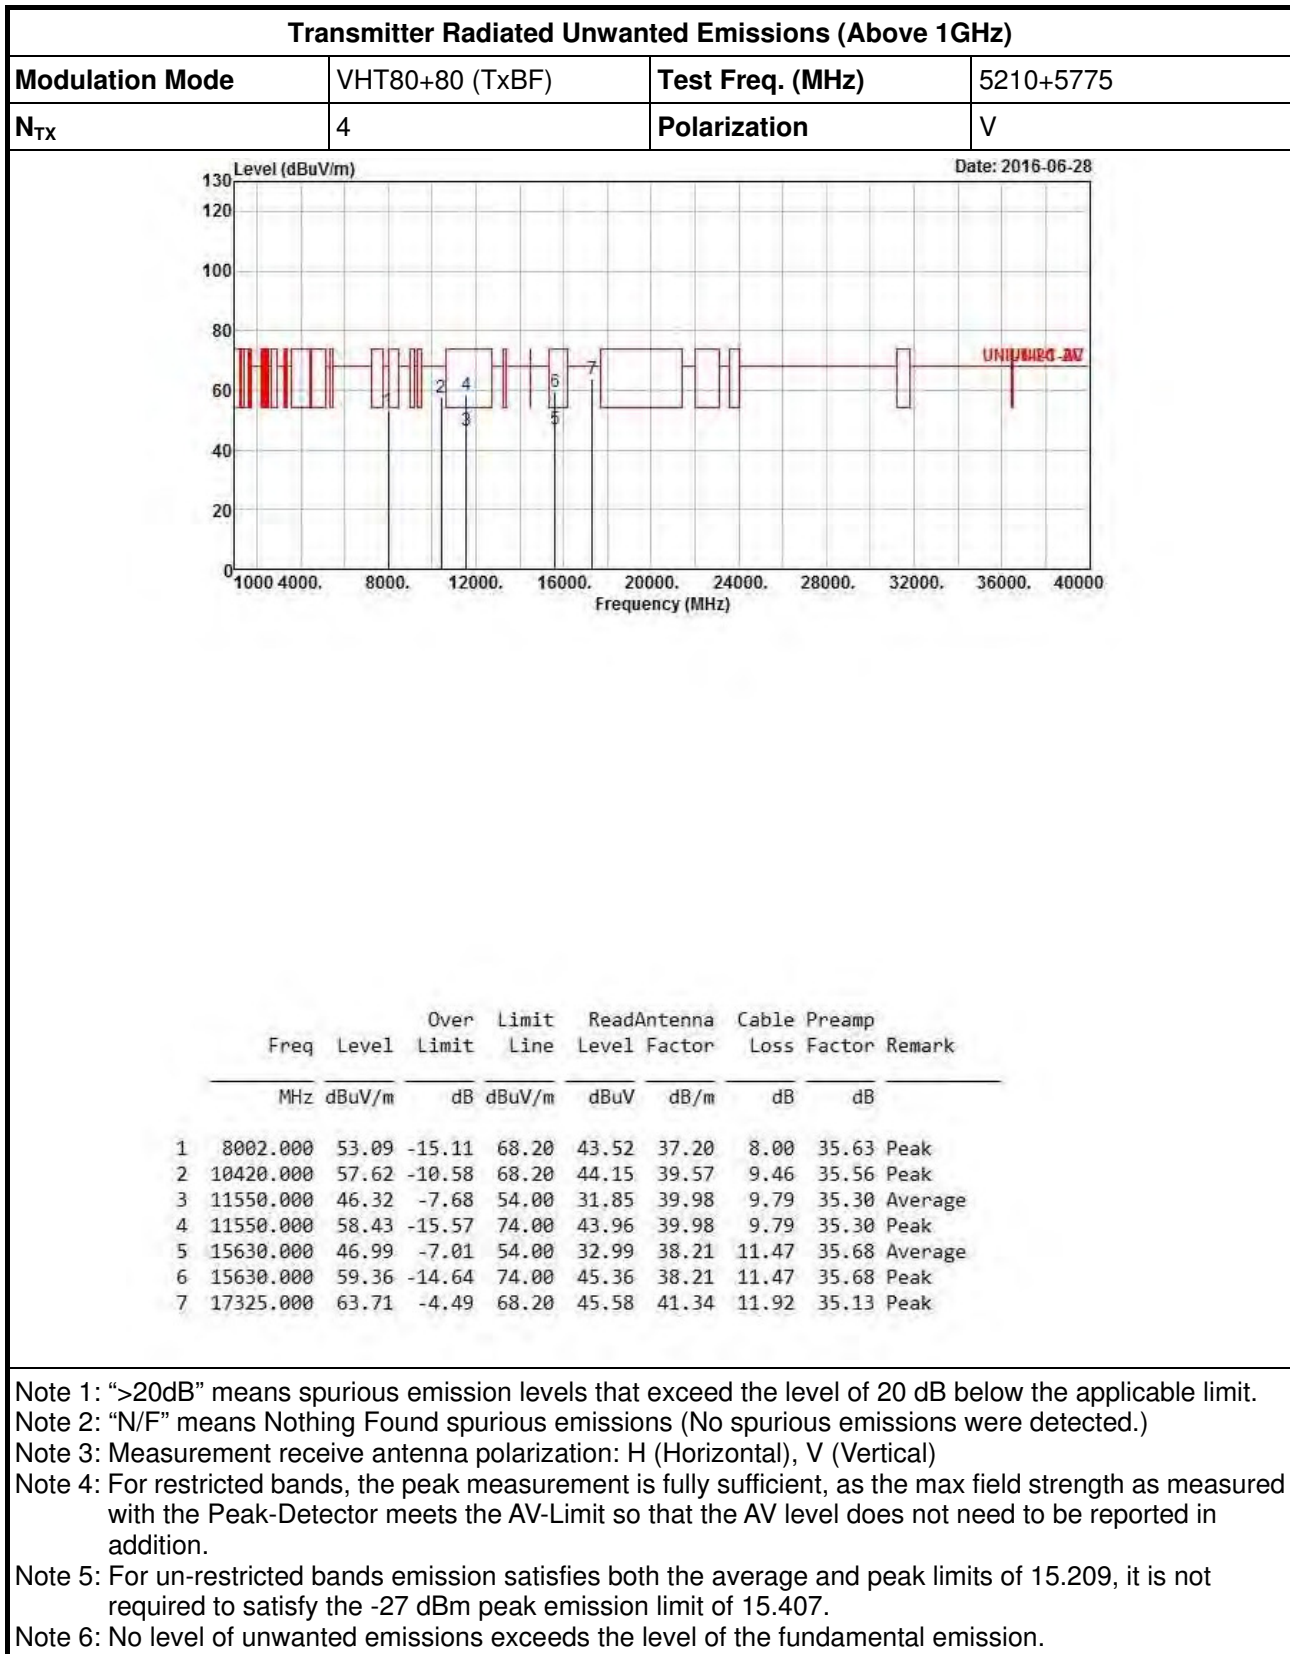

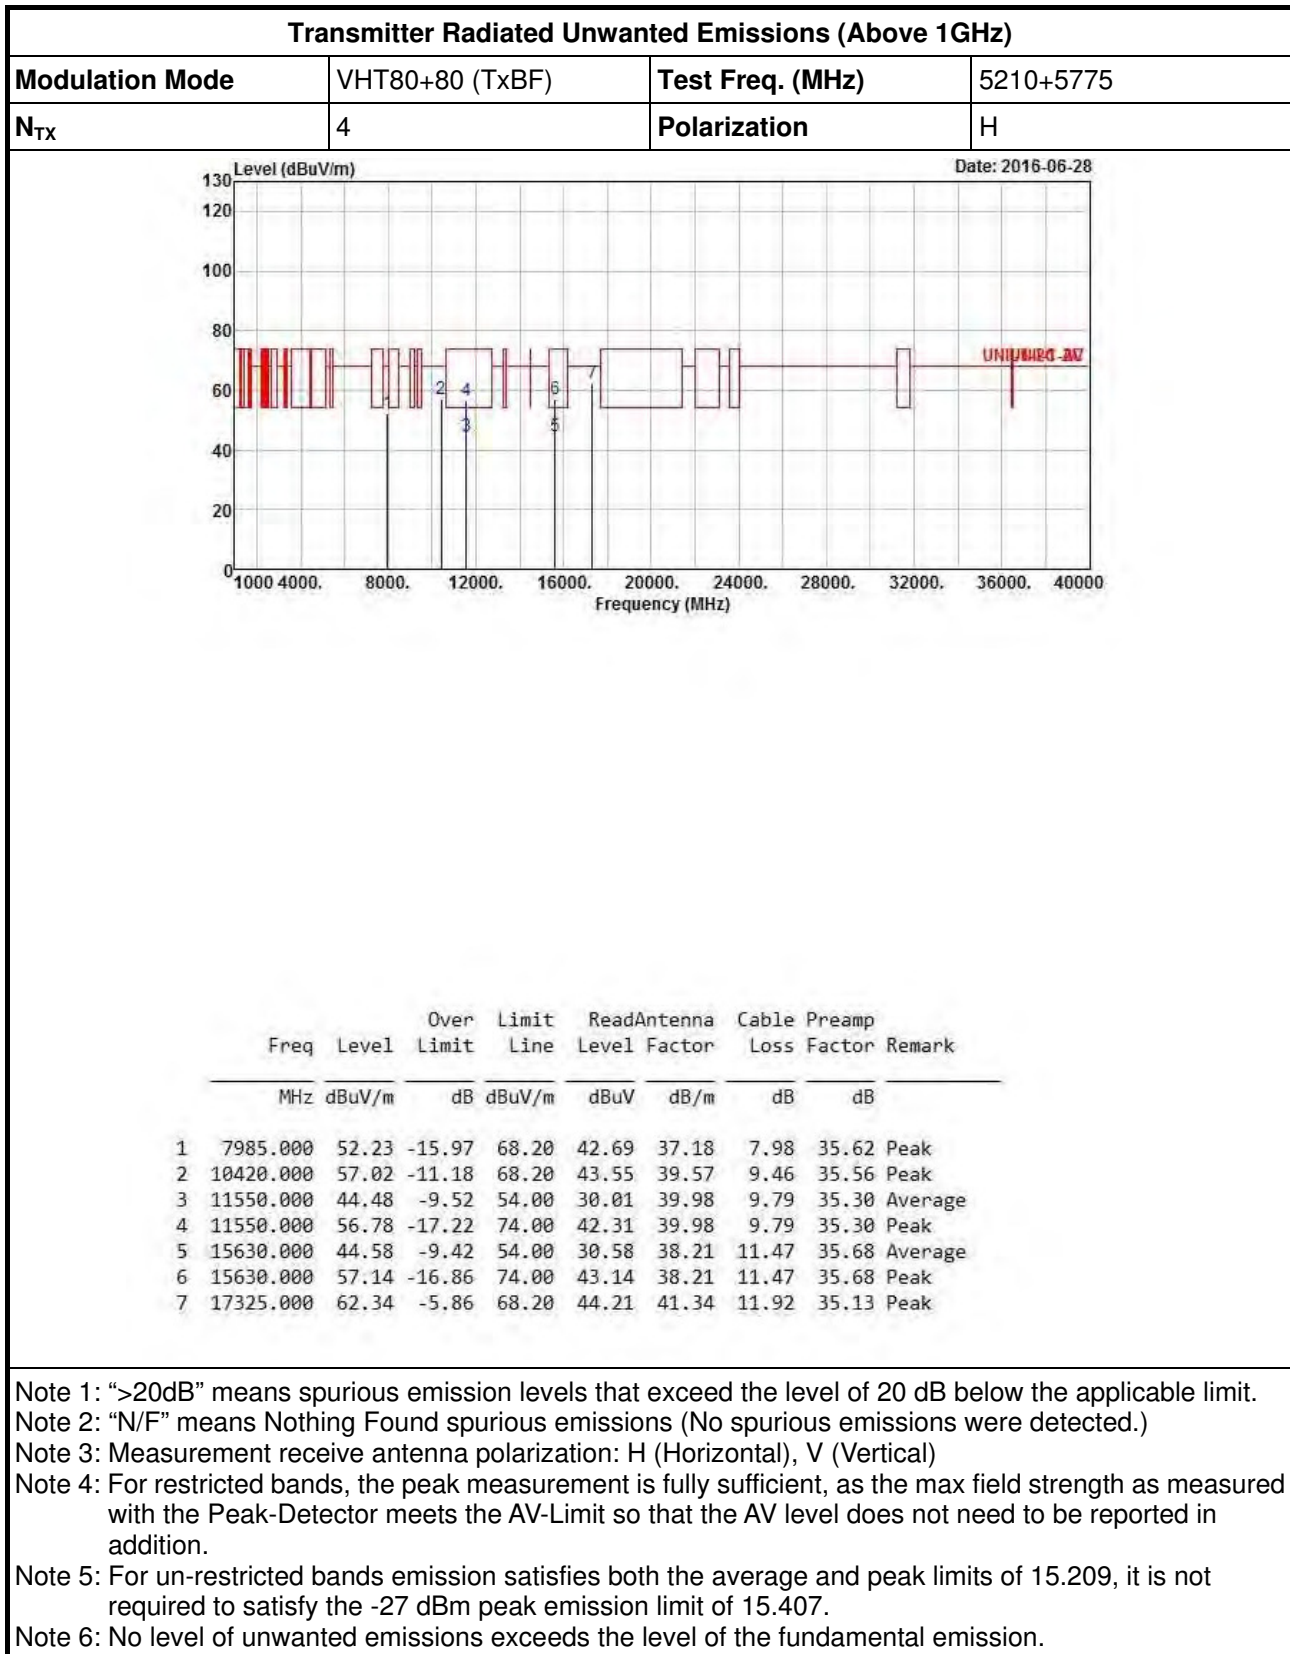



Summary

Mode	Result	Ch (Hz)	Center (Hz)	F1 (Hz)	Fh (Hz)	ppm	Limit (ppm)	Port	Remark
5.2G;11a;20;1;4;5200;M;T40,VN	Pass	5.2G	5.19994212G	NaN	NaN	11.131	20	1	5 min




Result

Mode	Result	Ch (Hz)	Center (Hz)	Fl (Hz)	Fh (Hz)	ppm	Limit (ppm)	Port	Remark
5.2G;11a;20;1;4;5200;M;TN,VN	Pass	5.2G	5.19998552G	NaN	NaN	2.784	20	1	0 min
5.2G;11a;20;1;4;5200;M;TN,VN	Pass	5.2G	5.19998548G	NaN	NaN	2.792	20	1	2 min
5.2G;11a;20;1;4;5200;M;TN,VN	Pass	5.2G	5.19998551G	NaN	NaN	2.787	20	1	5 min
5.2G;11a;20;1;4;5200;M;TN,VN	Pass	5.2G	5.19998548G	NaN	NaN	2.793	20	1	10 min
5.2G;11a;20;1;4;5200;M;TN,VL	Pass	5.2G	5.19998554G	NaN	NaN	2.78	20	1	0 min
5.2G;11a;20;1;4;5200;M;TN,VL	Pass	5.2G	5.19998557G	NaN	NaN	2.776	20	1	2 min
5.2G;11a;20;1;4;5200;M;TN,VL	Pass	5.2G	5.19998557G	NaN	NaN	2.775	20	1	5 min
5.2G;11a;20;1;4;5200;M;TN,VL	Pass	5.2G	5.19998557G	NaN	NaN	2.775	20	1	10 min
5.2G;11a;20;1;4;5200;M;TN,VH	Pass	5.2G	5.19998564G	NaN	NaN	2.762	20	1	0 min
5.2G;11a;20;1;4;5200;M;TN,VH	Pass	5.2G	5.19998564G	NaN	NaN	2.762	20	1	2 min
5.2G;11a;20;1;4;5200;M;TN,VH	Pass	5.2G	5.19998565G	NaN	NaN	2.759	20	1	5 min
5.2G;11a;20;1;4;5200;M;TN,VH	Pass	5.2G	5.19998551G	NaN	NaN	2.787	20	1	10 min
5.2G;11a;20;1;4;5200;M;T40,VN	Pass	5.2G	5.19994264G	NaN	NaN	11.031	20	1	0 min
5.2G;11a;20;1;4;5200;M;T40,VN	Pass	5.2G	5.19994244G	NaN	NaN	11.07	20	1	2 min
5.2G;11a;20;1;4;5200;M;T40,VN	Pass	5.2G	5.19994212G	NaN	NaN	11.131	20	1	5 min
5.2G;11a;20;1;4;5200;M;T40,VN	Pass	5.2G	5.19994222G	NaN	NaN	11.116	20	1	10 min
5.2G;11a;20;1;4;5200;M;T30,VN	Pass	5.2G	5.19998184G	NaN	NaN	3.493	20	1	0 min
5.2G;11a;20;1;4;5200;M;T30,VN	Pass	5.2G	5.19998154G	NaN	NaN	3.55	20	1	2 min
5.2G;11a;20;1;4;5200;M;T30,VN	Pass	5.2G	5.19998151G	NaN	NaN	3.555	20	1	5 min
5.2G;11a;20;1;4;5200;M;T30,VN	Pass	5.2G	5.19998148G	NaN	NaN	3.562	20	1	10 min
5.2G;11a;20;1;4;5200;M;T20,VN	Pass	5.2G	5.19998578G	NaN	NaN	2.734	20	1	0 min
5.2G;11a;20;1;4;5200;M;T20,VN	Pass	5.2G	5.19998571G	NaN	NaN	2.749	20	1	2 min
5.2G;11a;20;1;4;5200;M;T20,VN	Pass	5.2G	5.19998571G	NaN	NaN	2.749	20	1	5 min
5.2G;11a;20;1;4;5200;M;T20,VN	Pass	5.2G	5.19998566G	NaN	NaN	2.759	20	1	10 min
5.2G;11a;20;1;4;5200;M;T10,VN	Pass	5.2G	5.19999499G	NaN	NaN	0.964	20	1	0 min
5.2G;11a;20;1;4;5200;M;T10,VN	Pass	5.2G	5.19999486G	NaN	NaN	0.989	20	1	2 min
5.2G;11a;20;1;4;5200;M;T10,VN	Pass	5.2G	5.19999474G	NaN	NaN	1.011	20	1	5 min
5.2G;11a;20;1;4;5200;M;T10,VN	Pass	5.2G	5.19999476G	NaN	NaN	1.008	20	1	10 min
5.2G;11a;20;1;4;5200;M;T0,VN	Pass	5.2G	5.20001556G	NaN	NaN	2.992	20	1	0 min
5.2G;11a;20;1;4;5200;M;T0,VN	Pass	5.2G	5.20001538G	NaN	NaN	2.958	20	1	2 min
5.2G;11a;20;1;4;5200;M;T0,VN	Pass	5.2G	5.20001539G	NaN	NaN	2.96	20	1	5 min
5.2G;11a;20;1;4;5200;M;T0,VN	Pass	5.2G	5.2000154G	NaN	NaN	2.962	20	1	10 min



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Neutral
Operating Function	Adapter Mode		

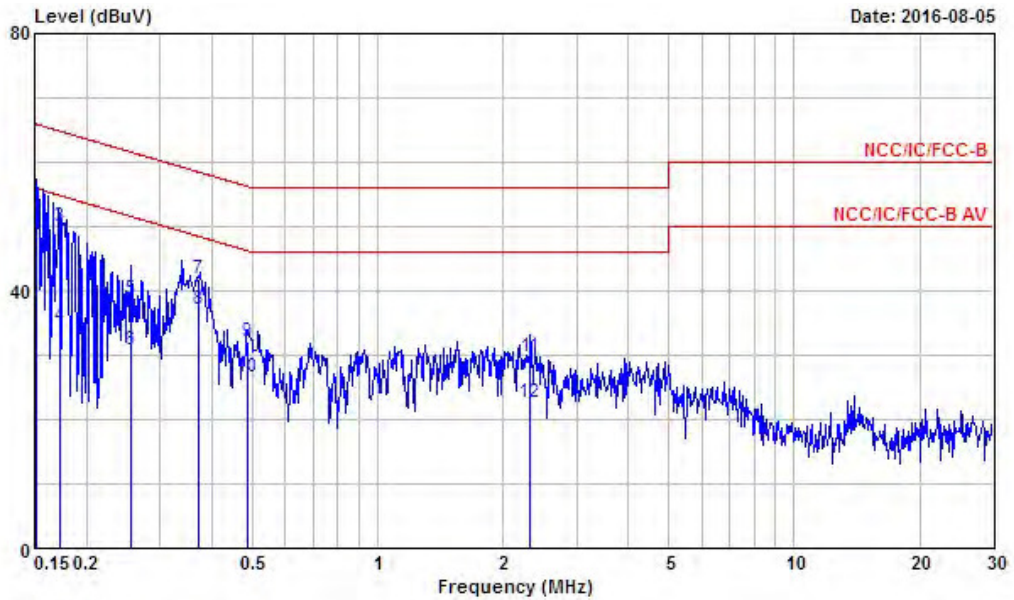

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1515980	36.50	-19.41	55.91	36.18	0.10	0.22	Average
2	0.1515980	52.43	-13.48	65.91	52.11	0.10	0.22	QP
3	0.1717680	49.97	-14.90	64.87	49.61	0.10	0.26	QP
4	0.1717680	34.36	-20.51	54.87	34.00	0.10	0.26	Average
5	0.2547970	38.57	-23.03	61.60	38.23	0.11	0.23	QP
6	0.2547970	30.88	-20.72	51.60	30.54	0.11	0.23	Average
7	0.3721190	41.87	-16.58	58.45	41.63	0.12	0.12	QP
8	0.3721190	37.16	-11.29	48.45	36.92	0.12	0.12	Average
9	0.4883180	32.02	-24.18	56.20	31.80	0.12	0.10	QP
10	0.4883180	26.64	-19.56	46.20	26.42	0.12	0.10	Average
11	2.320	29.73	-26.27	56.00	29.31	0.16	0.26	QP
12	2.320	22.55	-23.45	46.00	22.13	0.16	0.26	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)



AC Power-line Conducted Emissions Result																																																																																																																																	
Operating Mode	1	Power Phase	Line																																																																																																																														
Operating Function	Adapter Mode																																																																																																																																
Date: 2016-08-05																																																																																																																																	
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>Read Level</th> <th>LISN Factor</th> <th>Cable Loss</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>0.1564950</td><td>35.19</td><td>-20.46</td><td>55.65</td><td>34.85</td><td>0.11</td><td>0.23</td><td>Average</td></tr> <tr><td>2</td><td>0.1564950</td><td>52.15</td><td>-13.50</td><td>65.65</td><td>51.81</td><td>0.11</td><td>0.23</td><td>QP</td></tr> <tr><td>3</td><td>0.1721540</td><td>49.42</td><td>-15.44</td><td>64.86</td><td>49.05</td><td>0.11</td><td>0.26</td><td>QP</td></tr> <tr><td>4</td><td>0.1721540</td><td>33.82</td><td>-21.04</td><td>54.86</td><td>33.45</td><td>0.11</td><td>0.26</td><td>Average</td></tr> <tr><td>5</td><td>0.2602550</td><td>40.63</td><td>-20.79</td><td>61.42</td><td>40.30</td><td>0.11</td><td>0.22</td><td>QP</td></tr> <tr><td>6</td><td>0.2602550</td><td>32.81</td><td>-18.61</td><td>51.42</td><td>32.48</td><td>0.11</td><td>0.22</td><td>Average</td></tr> <tr><td>7</td><td>0.3736300</td><td>43.44</td><td>-14.98</td><td>58.42</td><td>43.20</td><td>0.12</td><td>0.12</td><td>QP</td></tr> <tr style="border: 2px solid black;"><td>8</td><td>0.3736300</td><td>37.89</td><td>-10.53</td><td>48.42</td><td>37.65</td><td>0.12</td><td>0.12</td><td>Average</td></tr> <tr><td>9</td><td>0.4889010</td><td>33.65</td><td>-22.54</td><td>56.19</td><td>33.43</td><td>0.12</td><td>0.10</td><td>QP</td></tr> <tr><td>10</td><td>0.4889010</td><td>27.90</td><td>-18.29</td><td>46.19</td><td>27.68</td><td>0.12</td><td>0.10</td><td>Average</td></tr> <tr><td>11</td><td>2.250</td><td>29.01</td><td>-26.99</td><td>56.00</td><td>28.59</td><td>0.15</td><td>0.27</td><td>QP</td></tr> <tr><td>12</td><td>2.250</td><td>23.53</td><td>-22.47</td><td>46.00</td><td>23.11</td><td>0.15</td><td>0.27</td><td>Average</td></tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark		MHz	dBuV	dB	dBuV	dBuV	dB	dB		1	0.1564950	35.19	-20.46	55.65	34.85	0.11	0.23	Average	2	0.1564950	52.15	-13.50	65.65	51.81	0.11	0.23	QP	3	0.1721540	49.42	-15.44	64.86	49.05	0.11	0.26	QP	4	0.1721540	33.82	-21.04	54.86	33.45	0.11	0.26	Average	5	0.2602550	40.63	-20.79	61.42	40.30	0.11	0.22	QP	6	0.2602550	32.81	-18.61	51.42	32.48	0.11	0.22	Average	7	0.3736300	43.44	-14.98	58.42	43.20	0.12	0.12	QP	8	0.3736300	37.89	-10.53	48.42	37.65	0.12	0.12	Average	9	0.4889010	33.65	-22.54	56.19	33.43	0.12	0.10	QP	10	0.4889010	27.90	-18.29	46.19	27.68	0.12	0.10	Average	11	2.250	29.01	-26.99	56.00	28.59	0.15	0.27	QP	12	2.250	23.53	-22.47	46.00	23.11	0.15	0.27	Average
	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark																																																																																																																									
	MHz	dBuV	dB	dBuV	dBuV	dB	dB																																																																																																																										
1	0.1564950	35.19	-20.46	55.65	34.85	0.11	0.23	Average																																																																																																																									
2	0.1564950	52.15	-13.50	65.65	51.81	0.11	0.23	QP																																																																																																																									
3	0.1721540	49.42	-15.44	64.86	49.05	0.11	0.26	QP																																																																																																																									
4	0.1721540	33.82	-21.04	54.86	33.45	0.11	0.26	Average																																																																																																																									
5	0.2602550	40.63	-20.79	61.42	40.30	0.11	0.22	QP																																																																																																																									
6	0.2602550	32.81	-18.61	51.42	32.48	0.11	0.22	Average																																																																																																																									
7	0.3736300	43.44	-14.98	58.42	43.20	0.12	0.12	QP																																																																																																																									
8	0.3736300	37.89	-10.53	48.42	37.65	0.12	0.12	Average																																																																																																																									
9	0.4889010	33.65	-22.54	56.19	33.43	0.12	0.10	QP																																																																																																																									
10	0.4889010	27.90	-18.29	46.19	27.68	0.12	0.10	Average																																																																																																																									
11	2.250	29.01	-26.99	56.00	28.59	0.15	0.27	QP																																																																																																																									
12	2.250	23.53	-22.47	46.00	23.11	0.15	0.27	Average																																																																																																																									
<p>Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)</p>																																																																																																																																	















< For Non-Beamforming >
Summary









Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.2G;11a;20;1;4	19.375M	16.442M	16M4D1D	18.9M	16.367M
5.2G;HT20;20;1,(M0-31);4	20.4M	17.641M	17M6D1D	19.95M	17.566M
5.2G;HT40;40;1,(M0-31);4	39.95M	36.182M	36M2D1D	39.25M	36.032M
5.2G;VHT20;20;1,(M0-8);4	20.525M	17.641M	17M6D1D	19.75M	17.566M
5.2G;VHT40;40;1,(M0-9);4	40.1M	36.232M	36M2D1D	39.2M	36.082M
5.2G;VHT80;80;1,(M0-9);4	80.2M	75.862M	75M9D1D	80M	75.762M
5.2G;VHT80+80;80;1,(M0-9);4	200M	194.203M	194MD1D	80M	75.662M
5.8G;11a;20;1;4	16.325M	16.467M	16M5D1D	16.275M	16.392M
5.8G;VHT20;20;1,(M0-8);4	17.575M	17.666M	17M7D1D	16.525M	17.591M
5.8G;VHT40;40;1,(M0-9);4	36.35M	36.182M	36M2D1D	35M	36.082M
5.8G;VHT80;80;1,(M0-9);4	76.4M	75.862M	75M9D1D	75.1M	75.662M
5.8G;VHT80+80;80;1,(M0-9);4	75.9M	196.002M	196MD1D	70.1M	75.662M



Result

Mode	Result	Limit	P1-N dB (Hz)	P1-OBW (Hz)	P2-N dB (Hz)	P2-OBW (Hz)	P3-N dB (Hz)	P3-OBW (Hz)	P4-N dB (Hz)	P4-OBW (Hz)
5.2G;11a;20;1;4;5180;L;TN,VN	Pass	Inf	18.975M	16.392M	19.35M	16.442M	19.05M	16.417M	19.375M	16.392M
5.2G;11a;20;1;4;5200;M;TN,VN	Pass	Inf	18.925M	16.392M	19.3M	16.417M	19.025M	16.417M	19.3M	16.417M
5.2G;11a;20;1;4;5240;H;TN,VN	Pass	Inf	18.9M	16.367M	19.2M	16.417M	19.2M	16.392M	19.325M	16.417M
5.2G;VHT20;20;1;(M0-8);4;5180;L;TN,VN	Pass	Inf	19.75M	17.591M	20.375M	17.641M	20.45M	17.591M	19.975M	17.591M
5.2G;VHT20;20;1;(M0-8);4;5200;M;TN,VN	Pass	Inf	19.925M	17.566M	20.425M	17.616M	20.325M	17.616M	20.3M	17.616M
5.2G;VHT20;20;1;(M0-8);4;5240;H;TN,VN	Pass	Inf	19.8M	17.566M	20.525M	17.591M	20.325M	17.591M	20.175M	17.591M
5.2G;VHT40;40;1;(M0-9);4;5190;L;TN,VN	Pass	Inf	40M	36.182M	39.8M	36.082M	39.75M	36.132M	39.2M	36.182M
5.2G;VHT40;40;1;(M0-9);4;5230;H;TN,VN	Pass	Inf	40.1M	36.132M	40.1M	36.082M	39.75M	36.232M	39.55M	36.132M
5.2G;VHT80;80;1;(M0-9);4;5210;S;TN,VN	Pass	Inf	80M	75.762M	80.1M	75.862M	80.1M	75.762M	80.2M	75.762M
5.2G;VHT80+80;80;1;(M0-9);4;5210;S;TN,VN	Pass	Inf	80M	75.762M	80.1M	75.662M	200M	121.739M	200M	194.203M
5.8G;11a;20;1;4;5745;L;TN,VN	Pass	500k	16.275M	16.442M	16.325M	16.417M	16.325M	16.467M	16.325M	16.392M
5.8G;11a;20;1;4;5785;M;TN,VN	Pass	500k	16.3M	16.392M	16.3M	16.442M	16.325M	16.442M	16.325M	16.417M
5.8G;11a;20;1;4;5825;H;TN,VN	Pass	500k	16.3M	16.442M	16.3M	16.442M	16.325M	16.442M	16.325M	16.417M
5.8G;VHT20;20;1;(M0-8);4;5745;L;TN,VN	Pass	500k	17.575M	17.641M	17.55M	17.616M	17.575M	17.641M	16.525M	17.591M
5.8G;VHT20;20;1;(M0-8);4;5785;M;TN,VN	Pass	500k	17.225M	17.591M	17.575M	17.641M	17.575M	17.641M	17.55M	17.616M
5.8G;VHT20;20;1;(M0-8);4;5825;H;TN,VN	Pass	500k	17.15M	17.666M	17.525M	17.641M	17.575M	17.666M	17.55M	17.616M
5.8G;VHT40;40;1;(M0-9);4;5755;L;TN,VN	Pass	500k	36.35M	36.182M	36.35M	36.182M	35M	36.182M	35.05M	36.182M
5.8G;VHT40;40;1;(M0-9);4;5795;H;TN,VN	Pass	500k	36.3M	36.082M	36.1M	36.132M	36.25M	36.082M	35.65M	36.132M
5.8G;VHT80;80;1;(M0-9);4;5775;S;TN,VN	Pass	500k	76M	75.762M	76M	75.862M	76.4M	75.662M	75.1M	75.662M
5.8G;VHT80+80;80;1;(M0-9);4;5775;S;TN,VN	Pass	500k	70.1M	173.013M	75.4M	196.002M	75.9M	75.662M	75.7M	75.762M

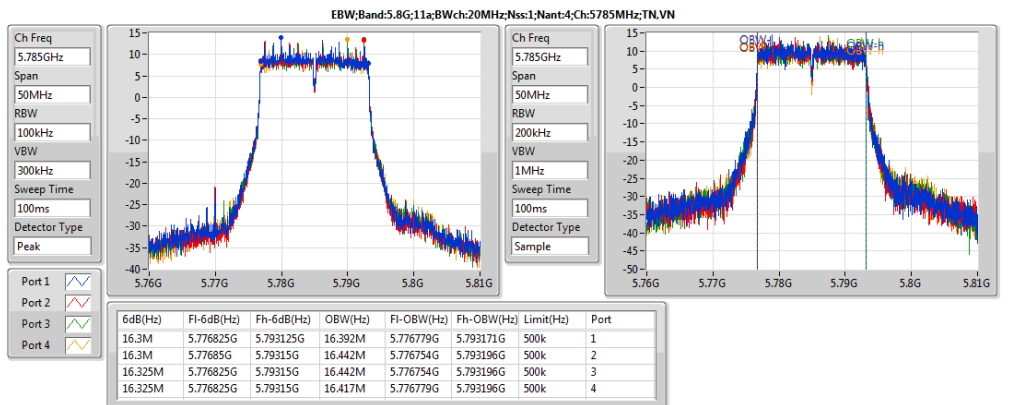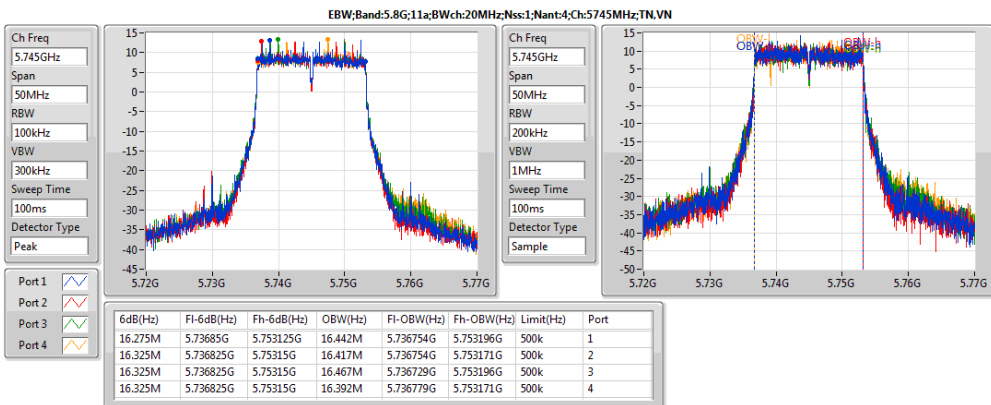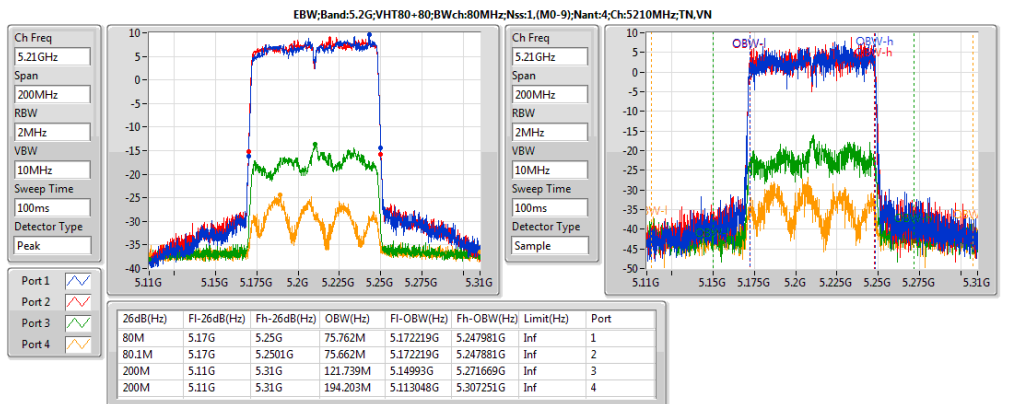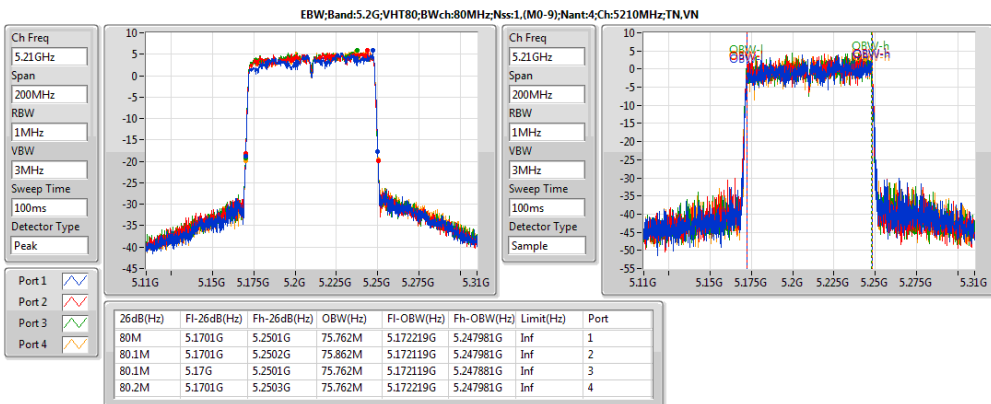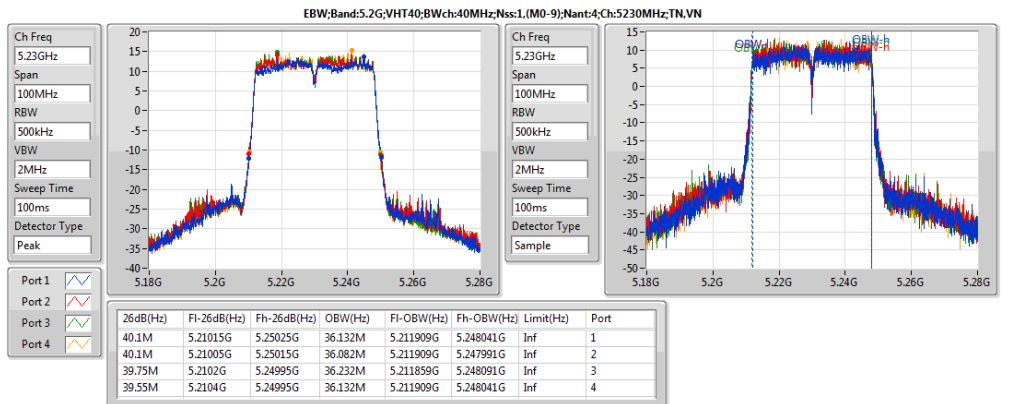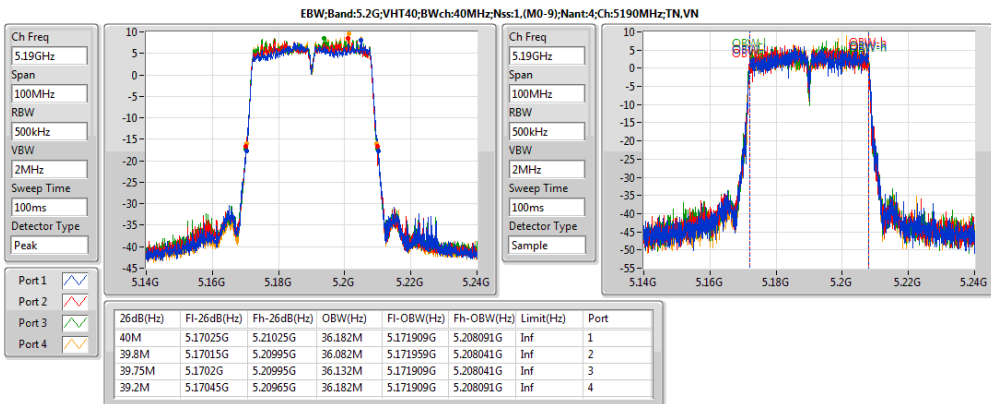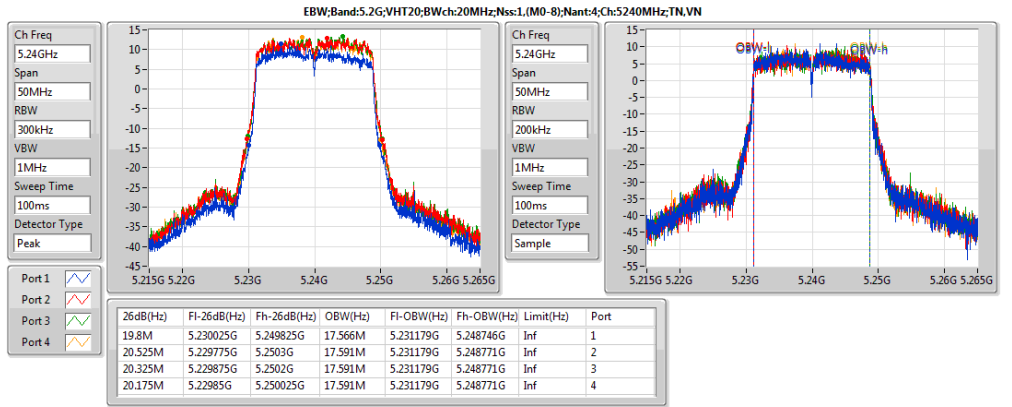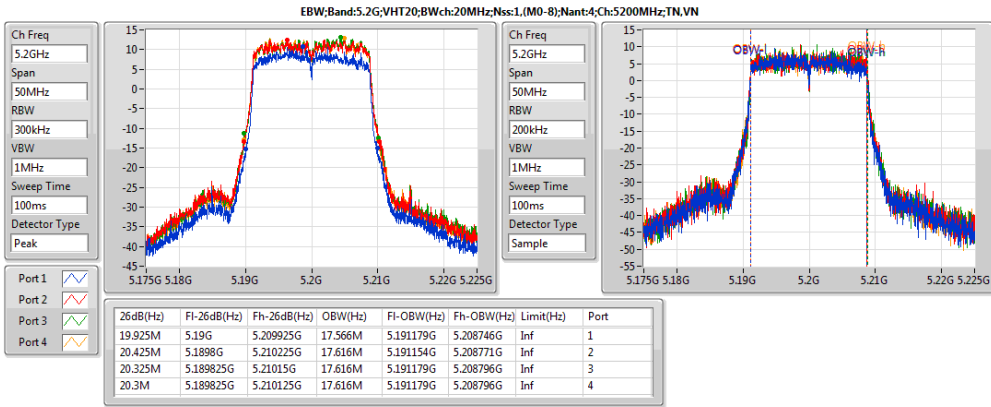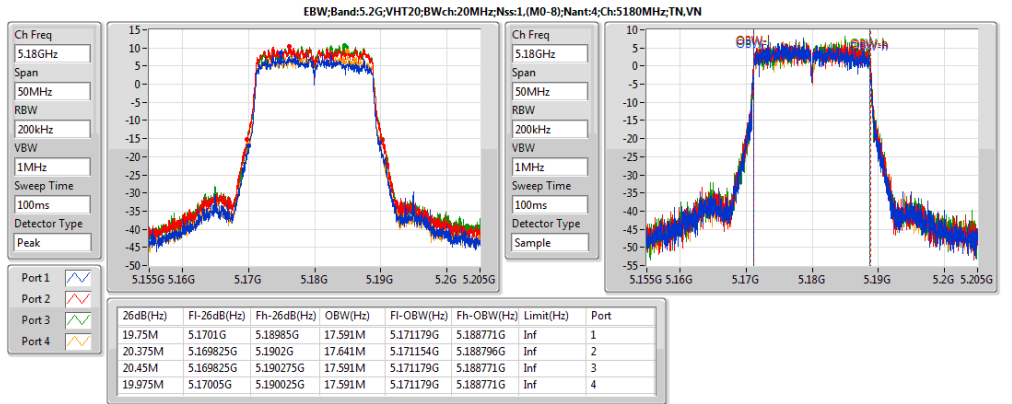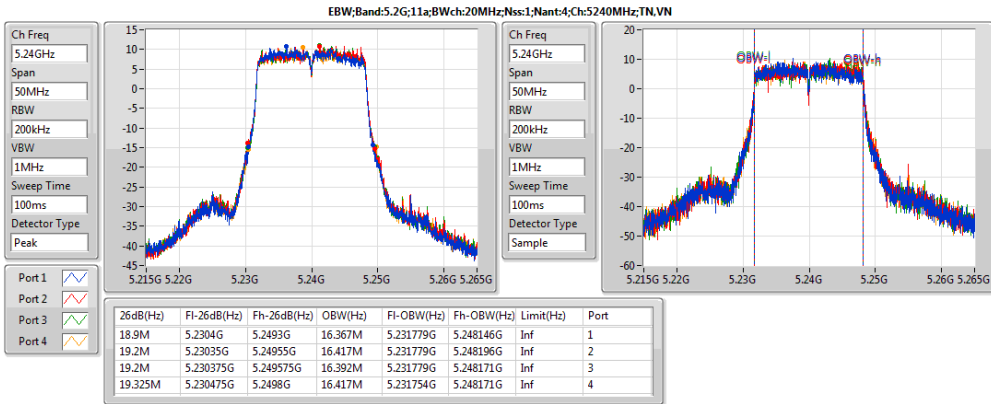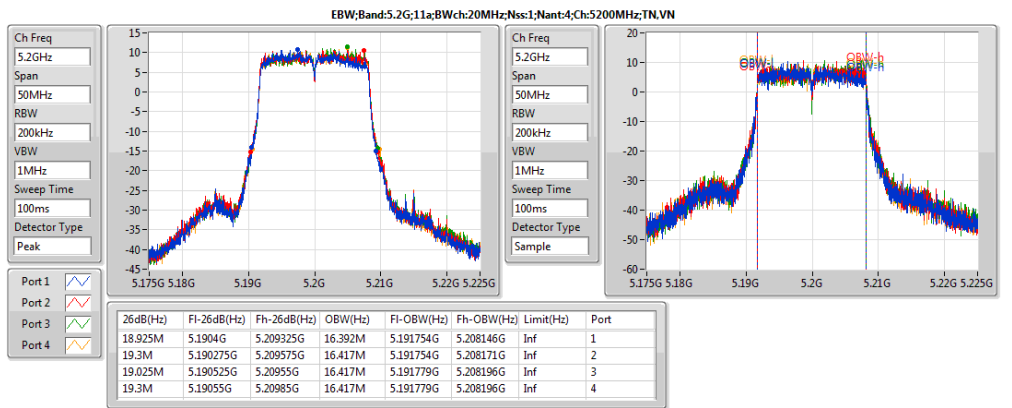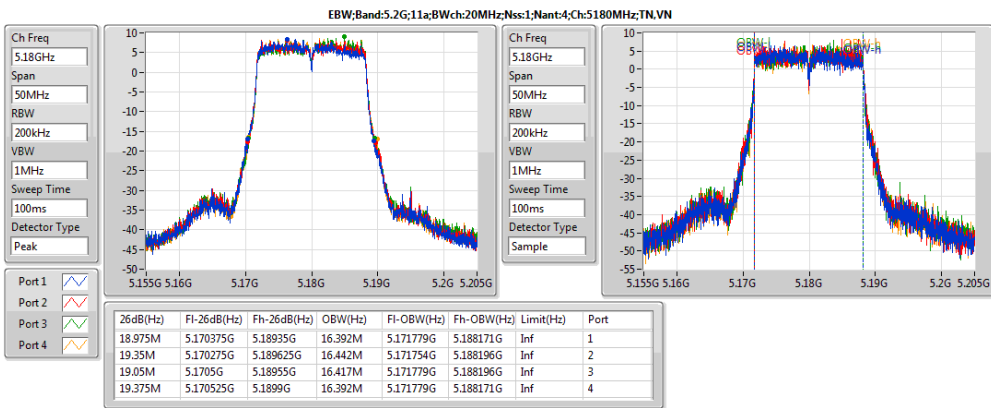

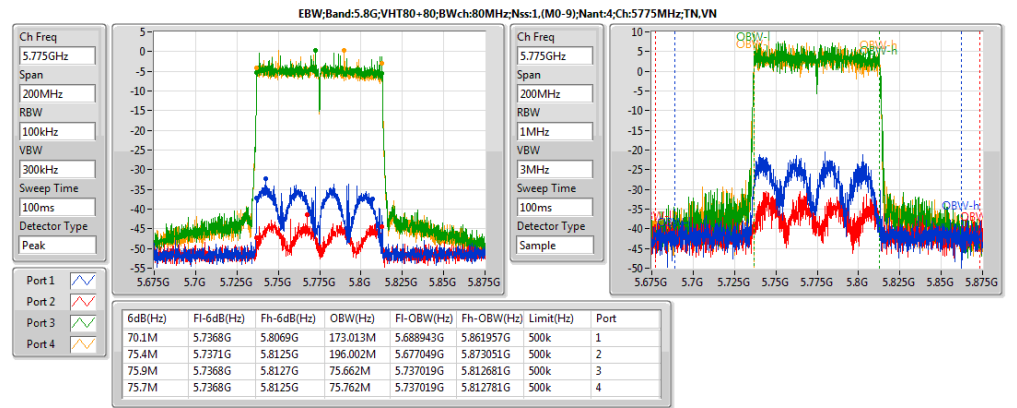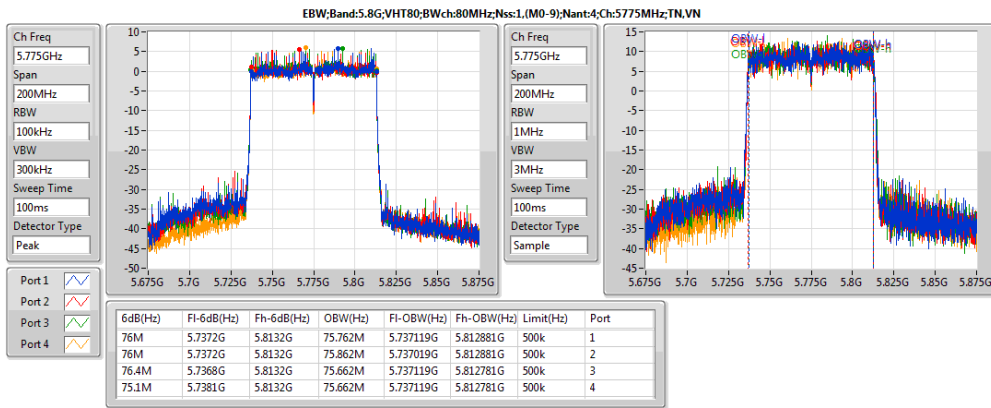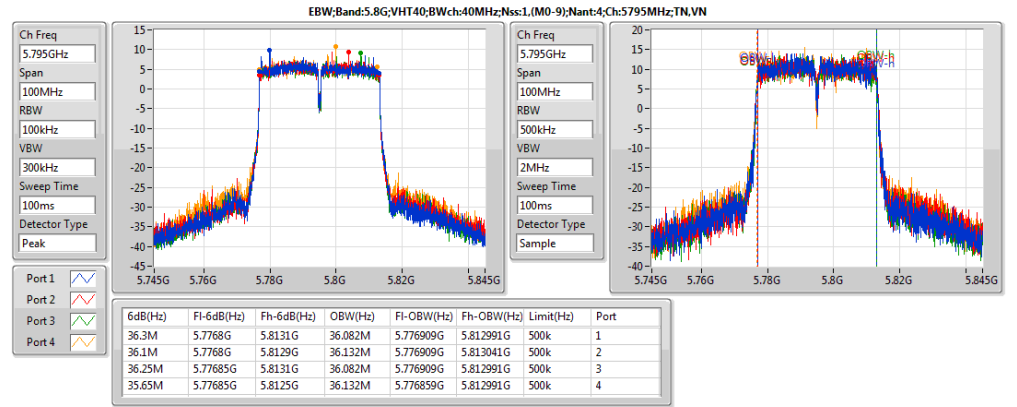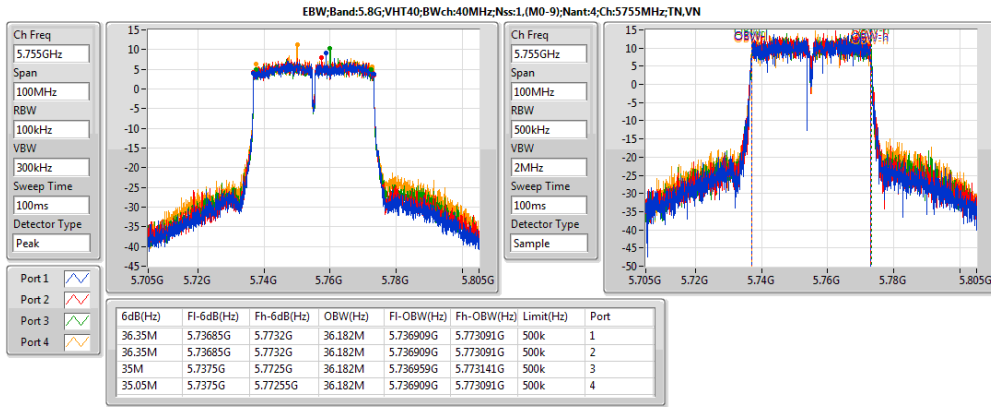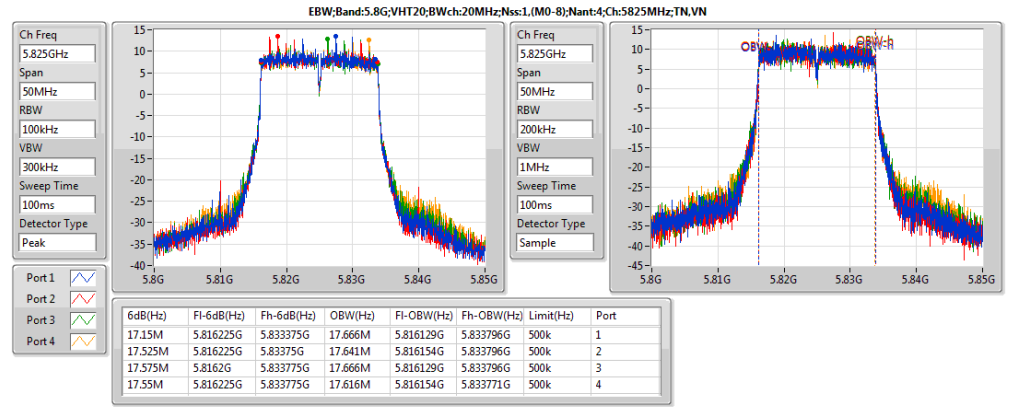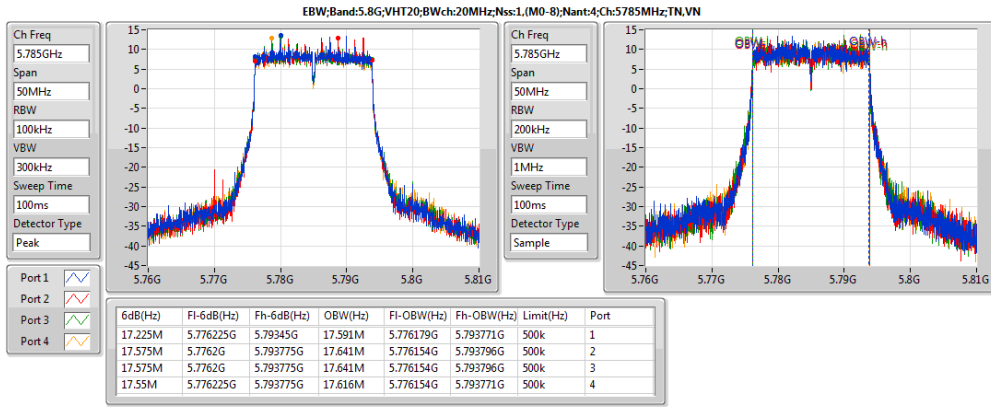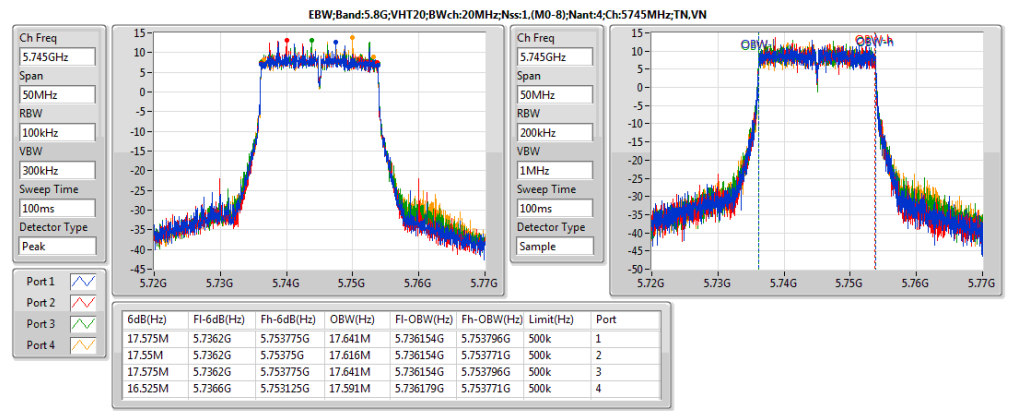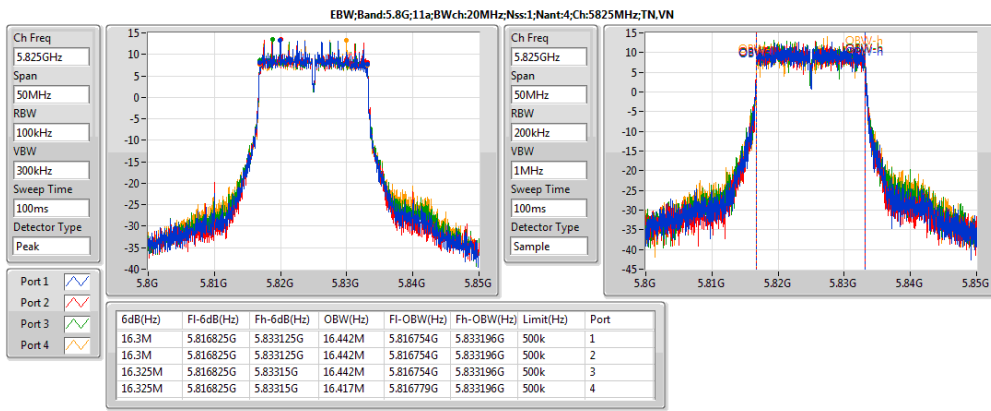













**< For Beamforming >
Summary**



Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.2G;VHT20,BF;20;1,(M0-8);4	31M	17.766M	17M8D1D	21.225M	17.666M
5.2G;VHT40,BF;40;1,(M0-9);4	44.8M	36.332M	36M3D1D	39.85M	36.182M
5.2G;VHT80,BF;80;1,(M0-9);4	85.4M	76.162M	76M2D1D	83.1M	75.962M
5.8G;VHT20,BF;20;1,(M0-8);4	15.675M	17.766M	17M8D1D	12.5M	17.666M
5.8G;VHT40,BF;40;1,(M0-9);4	35.9M	36.382M	36M4D1D	29.35M	36.232M
5.8G;VHT80,BF;80;1,(M0-9);4	71.3M	76.262M	76M3D1D	67.9M	75.562M
5.2G;VHT80+80,BF;80;1,(M0);2(1,2)	83.6M	76.162M	76M2D1D	81.6M	75.862M
5.8G;VHT80+80,BF;80;1,(M0);2(3,4)	71.6M	75.962M	76M0D1D	70.6M	75.762M



Result

Mode	Result	Limit	P1-N dB (Hz)	P1-OBW (Hz)	P2-N dB (Hz)	P2-OBW (Hz)	P3-N dB (Hz)	P3-OBW (Hz)	P4-N dB (Hz)	P4-OBW (Hz)
5.2G;VHT20,BF;20;1,(M0-8);4;5180;L;TN,VN	Pass	Inf	21.725M	17.691M	21.475M	17.716M	24.425M	17.666M	31M	17.766M
5.2G;VHT20,BF;20;1,(M0-8);4;5200;M;TN,VN	Pass	Inf	24.775M	17.691M	26.875M	17.691M	25.9M	17.666M	29.55M	17.666M
5.2G;VHT20,BF;20;1,(M0-8);4;5240;H;TN,VN	Pass	Inf	26.25M	17.716M	26.85M	17.716M	21.225M	17.666M	21.975M	17.716M
5.2G;VHT40,BF;40;1,(M0-9);4;5190;L;TN,VN	Pass	Inf	40.6M	36.232M	39.85M	36.232M	40.75M	36.282M	40.05M	36.182M
5.2G;VHT40,BF;40;1,(M0-9);4;5230;H;TN,VN	Pass	Inf	42.55M	36.282M	42.15M	36.332M	44.8M	36.282M	42.3M	36.282M
5.2G;VHT80,BF;80;1,(M0-9);4;5210;S;TN,VN	Pass	Inf	85.4M	75.962M	83.1M	75.962M	84.1M	75.962M	83.6M	76.162M
5.8G;VHT20,BF;20;1,(M0-8);4;5745;L;TN,VN	Pass	500k	12.5M	17.716M	13.65M	17.766M	15.125M	17.691M	15.25M	17.741M
5.8G;VHT20,BF;20;1,(M0-8);4;5785;M;TN,VN	Pass	500k	13.9M	17.716M	15M	17.741M	15.675M	17.691M	14.975M	17.741M
5.8G;VHT20,BF;20;1,(M0-8);4;5825;H;TN,VN	Pass	500k	13.625M	17.741M	13.95M	17.741M	13.15M	17.691M	13.9M	17.666M
5.8G;VHT40,BF;40;1,(M0-9);4;5755;L;TN,VN	Pass	500k	35.4M	36.332M	35.05M	36.282M	32.5M	36.282M	29.35M	36.282M
5.8G;VHT40,BF;40;1,(M0-9);4;5795;H;TN,VN	Pass	500k	35.9M	36.382M	34.65M	36.282M	32.55M	36.232M	33.75M	36.332M
5.8G;VHT80,BF;80;1,(M0-9);4;5775;S;TN,VN	Pass	500k	71.2M	76.262M	69.4M	75.862M	67.9M	75.762M	71.3M	75.562M
5.2G;VHT80+80,BF;80;1,(M0);2(1,2);5210;S;TN,VN	Pass	Inf	83.6M	76.162M	81.6M	75.862M				
5.8G;VHT80+80,BF;80;1,(M0);2(3,4);5775;S;TN,VN	Pass	500k					70.6M	75.762M	71.6M	75.962M

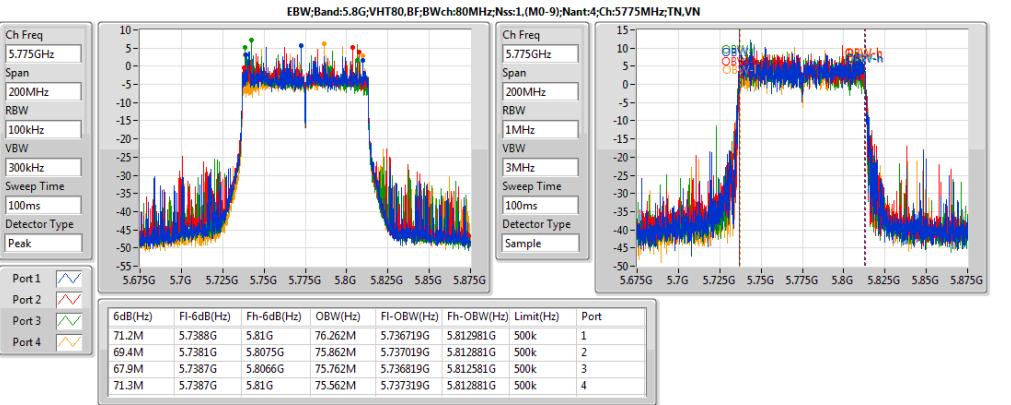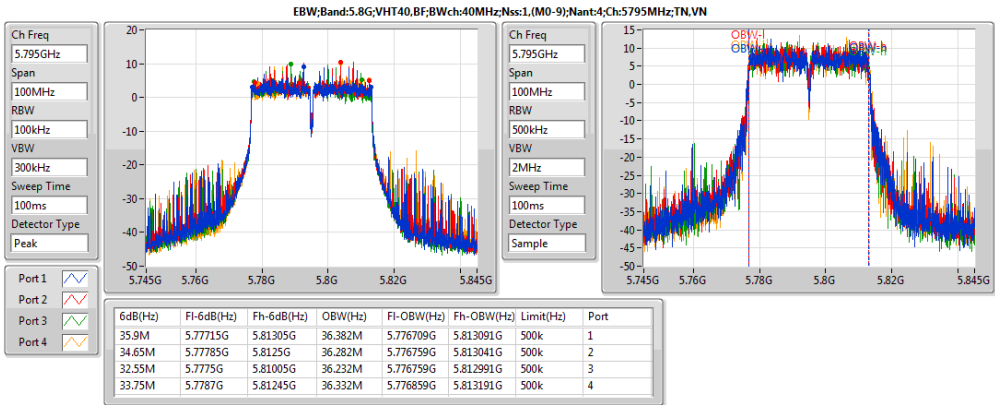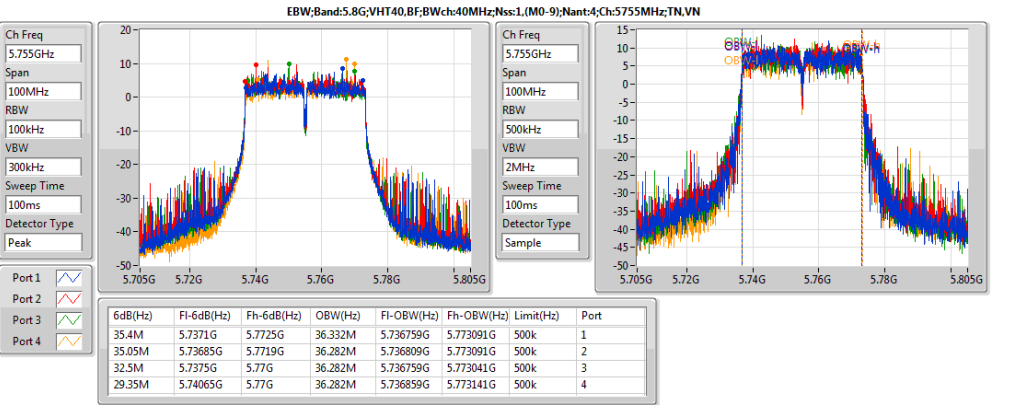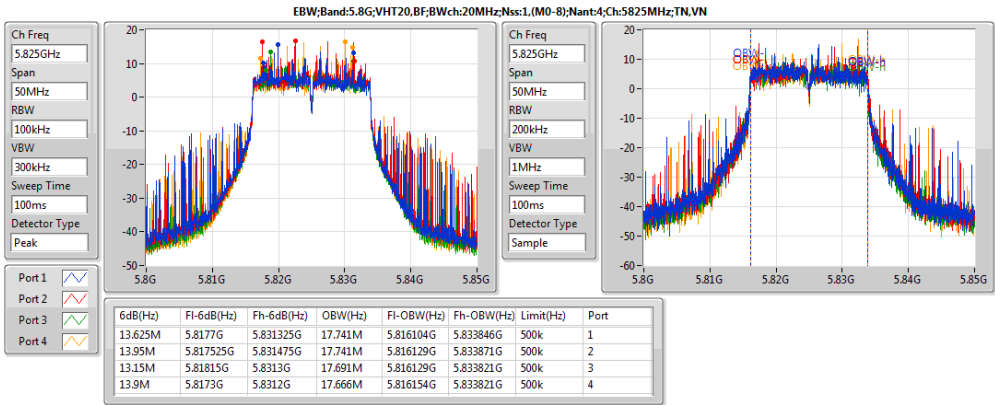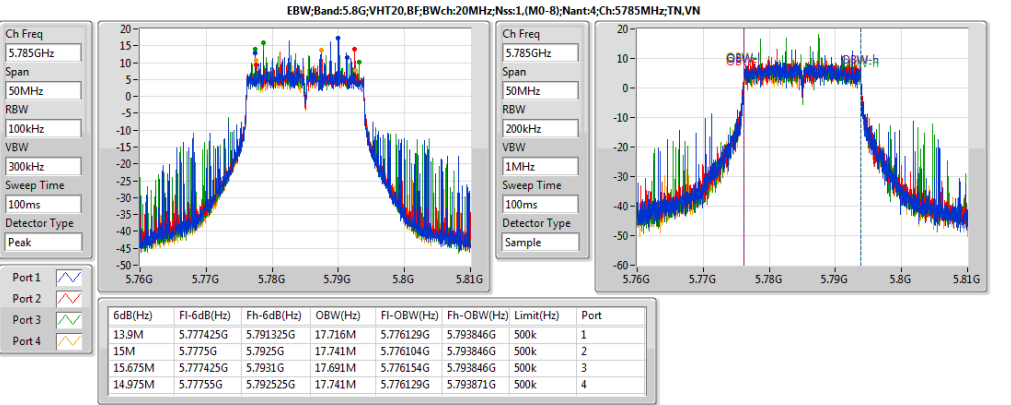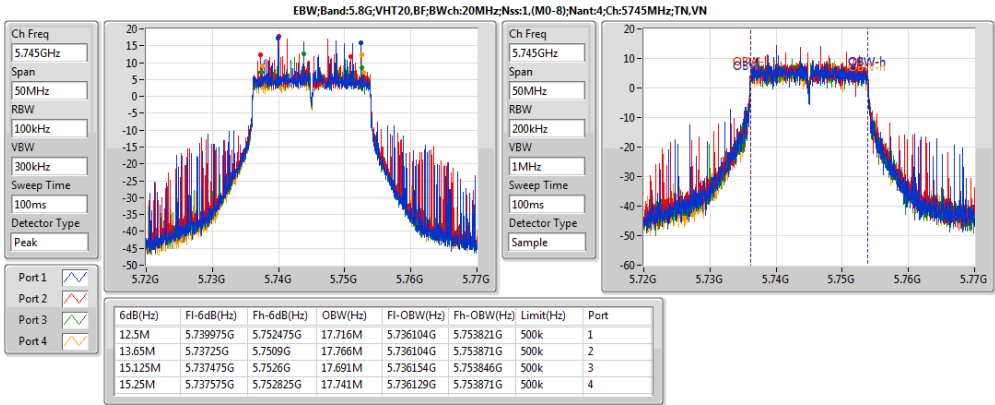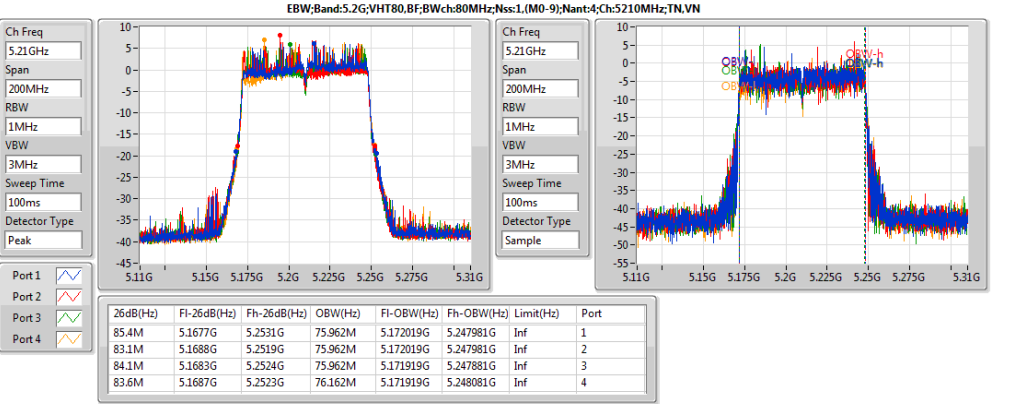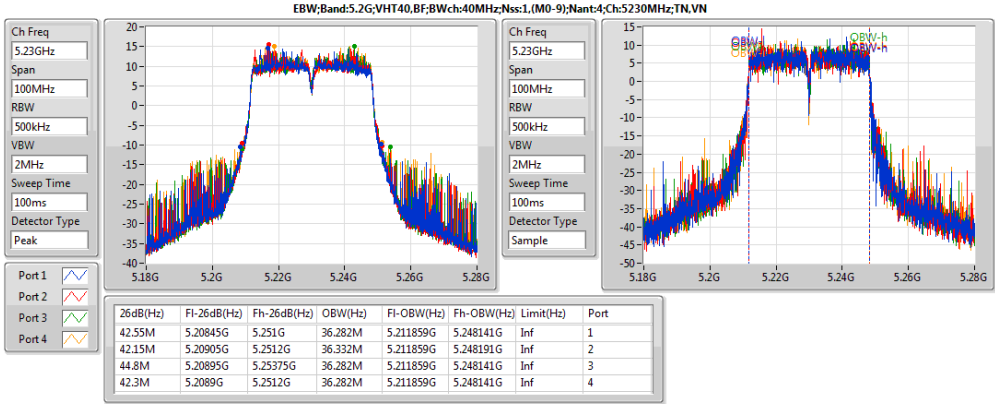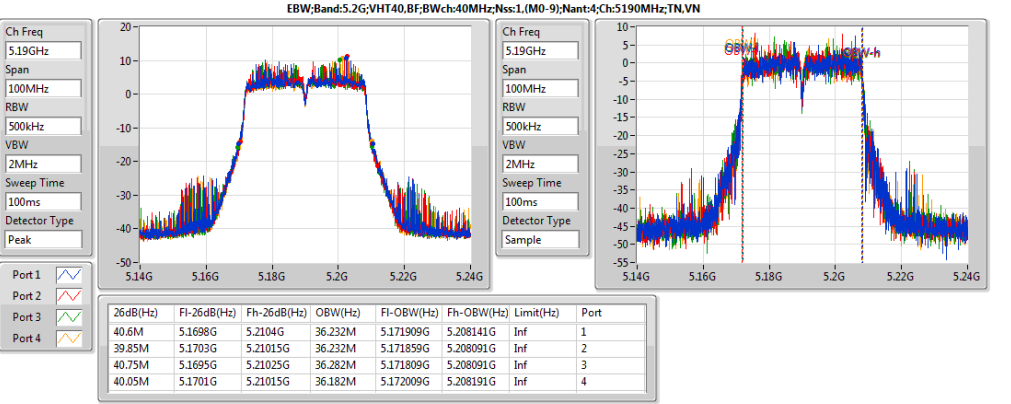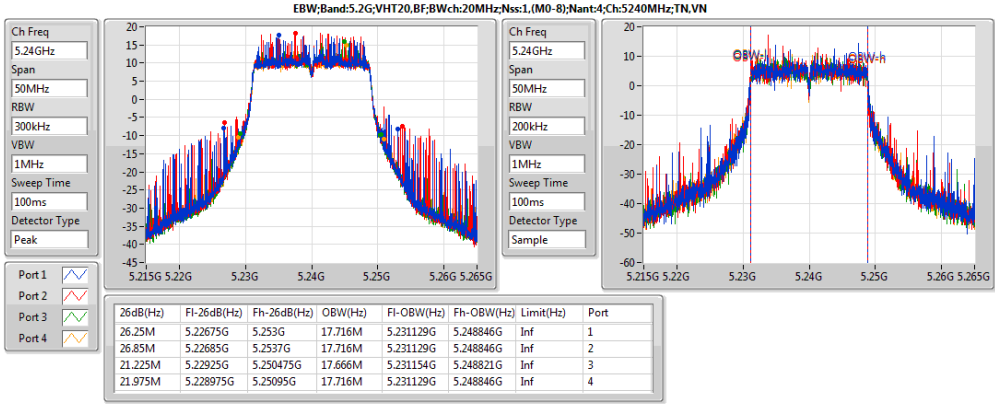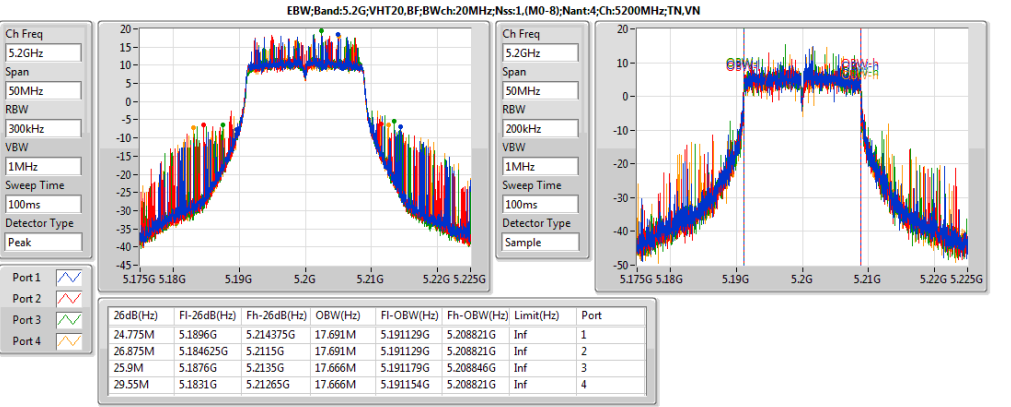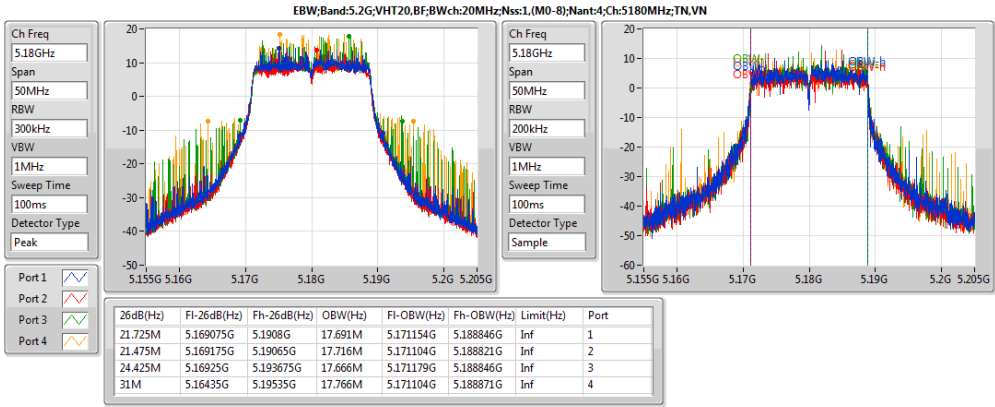

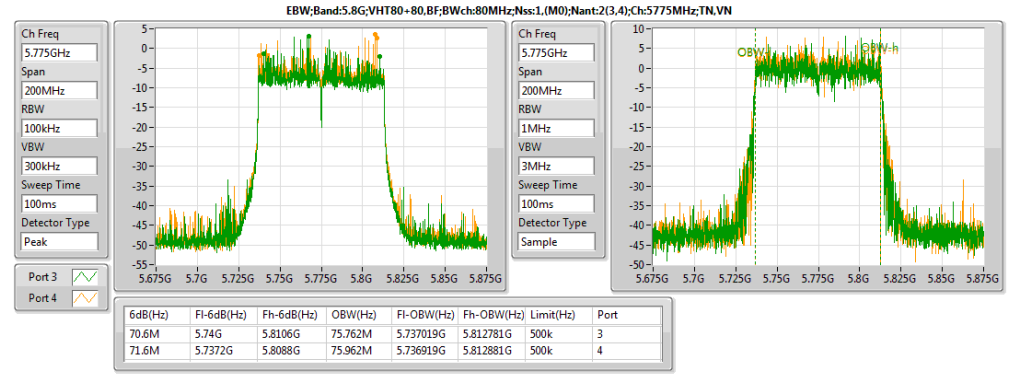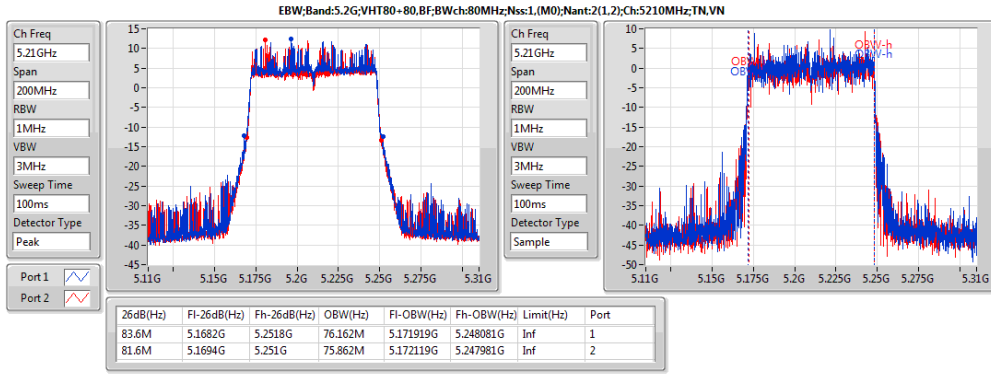



< For Non-Beamforming >
Summary

Mode	Sum (dBm)	Sum (W)	EIRP (dBm)	EIRP (W)
5.2G;11a;20;1;4	26.93	0.49317	29.23	0.83753
5.2G;HT20;20;1,(M0-31);4	26.95	0.49545	29.25	0.8414
5.2G;HT40;40;1,(M0-31);4	28.45	0.69984	30.75	1.1885
5.2G;VHT20;20;1,(M0-8);4	26.98	0.49888	29.28	0.84723
5.2G;VHT40;40;1,(M0-9);4	28.51	0.70958	30.81	1.20504
5.2G;VHT80;80;1,(M0-9);4	19.66	0.09247	21.96	0.15704
5.2G;VHT80+80;80;1,(M0-9);4	22.61	0.18239	24.91	0.30974
5.8G;11a;20;1;4	29.77	0.94842	33.37	2.1727
5.8G;HT20;20;1,(M0-31);4	29.58	0.90782	33.18	2.0797
5.8G;HT40;40;1,(M0-31);4	29.60	0.91201	33.20	2.0893
5.8G;VHT20;20;1,(M0-8);4	29.61	0.91411	33.21	2.09411
5.8G;VHT40;40;1,(M0-9);4	29.64	0.92045	33.24	2.10863
5.8G;VHT80;80;1,(M0-9);4	27.79	0.60117	31.39	1.37721
5.8G;VHT80+80;80;1,(M0-9);4	22.63	0.18323	26.23	0.41976



Result

Mode	Result	DG (dBi)	EIRP (dBm)	EIRP Lim. (dBm)	Sum (dBm)	Sum Lim. (dBm)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)
5.2G;11a;20;1;4;5180;L;TN,VN	Pass	2.30	27.40	36.00	25.10	30.00	18.79	19.13	19.17	19.23
5.2G;11a;20;1;4;5200;M;TN,VN	Pass	2.30	29.23	36.00	26.93	30.00	20.53	20.92	21.11	21.05
5.2G;11a;20;1;4;5240;H;TN,VN	Pass	2.30	28.93	36.00	26.63	30.00	20.47	20.78	20.73	20.46
5.2G;HT20;20;1;(M0-31);4;5180;L;TN,VN	Pass	2.30	26.94	36.00	24.64	30.00	18.26	18.67	18.69	18.83
5.2G;HT20;20;1;(M0-31);4;5200;M;TN,VN	Pass	2.30	29.03	36.00	26.73	30.00	20.31	20.80	21.07	20.60
5.2G;HT20;20;1;(M0-31);4;5240;H;TN,VN	Pass	2.30	29.25	36.00	26.95	30.00	20.78	21.12	21.05	20.77
5.2G;HT40;40;1;(M0-31);4;5190;L;TN,VN	Pass	2.30	24.98	36.00	22.68	30.00	16.43	16.75	16.79	16.66
5.2G;HT40;40;1;(M0-31);4;5230;H;TN,VN	Pass	2.30	30.75	36.00	28.45	30.00	22.10	22.67	22.64	22.29
5.2G;VHT20;20;1;(M0-8);4;5180;L;TN,VN	Pass	2.30	26.96	36.00	24.66	30.00	18.39	18.62	18.84	18.71
5.2G;VHT20;20;1;(M0-8);4;5200;M;TN,VN	Pass	2.30	29.07	36.00	26.77	30.00	20.36	20.79	21.01	20.82
5.2G;VHT20;20;1;(M0-8);4;5240;H;TN,VN	Pass	2.30	29.28	36.00	26.98	30.00	20.80	21.09	21.16	20.80
5.2G;VHT40;40;1;(M0-9);4;5190;L;TN,VN	Pass	2.30	25.06	36.00	22.76	30.00	16.47	16.82	16.91	16.74
5.2G;VHT40;40;1;(M0-9);4;5230;H;TN,VN	Pass	2.30	30.81	36.00	28.51	30.00	22.07	22.71	22.63	22.50
5.2G;VHT80;80;1;(M0-9);4;5210;S;TN,VN	Pass	2.30	21.96	36.00	19.66	30.00	13.25	13.75	13.86	13.67
5.2G;VHT80+80;80;1;(M0-9);4;5210;S;TN,VN	Pass	2.30	24.91	36.00	22.61	30.00	16.55	16.84	16.71	16.22
5.8G;11a;20;1;4;5745;L;TN,VN	Pass	3.60	33.30	36.00	29.70	30.00	23.57	23.65	23.73	23.75
5.8G;11a;20;1;4;5785;M;TN,VN	Pass	3.60	33.37	36.00	29.77	30.00	23.94	23.76	23.66	23.63
5.8G;11a;20;1;4;5825;H;TN,VN	Pass	3.60	33.32	36.00	29.72	30.00	23.73	23.69	23.75	23.61
5.8G;HT20;20;1;(M0-31);4;5745;L;TN,VN	Pass	3.60	33.13	36.00	29.53	30.00	23.15	23.55	23.64	23.68
5.8G;HT20;20;1;(M0-31);4;5785;M;TN,VN	Pass	3.60	33.17	36.00	29.57	30.00	23.69	23.36	23.54	23.61
5.8G;HT20;20;1;(M0-31);4;5825;H;TN,VN	Pass	3.60	33.18	36.00	29.58	30.00	23.60	23.55	23.55	23.54
5.8G;HT40;40;1;(M0-31);4;5755;L;TN,VN	Pass	3.60	33.20	36.00	29.60	30.00	23.45	23.66	23.52	23.68
5.8G;HT40;40;1;(M0-31);4;5795;H;TN,VN	Pass	3.60	33.15	36.00	29.55	30.00	23.57	23.62	23.36	23.57
5.8G;VHT20;20;1;(M0-8);4;5745;L;TN,VN	Pass	3.60	33.16	36.00	29.56	30.00	23.36	23.49	23.67	23.63
5.8G;VHT20;20;1;(M0-8);4;5785;M;TN,VN	Pass	3.60	33.21	36.00	29.61	30.00	23.69	23.65	23.56	23.47
5.8G;VHT20;20;1;(M0-8);4;5825;H;TN,VN	Pass	3.60	33.20	36.00	29.60	30.00	23.55	23.54	23.69	23.53
5.8G;VHT40;40;1;(M0-9);4;5755;L;TN,VN	Pass	3.60	33.24	36.00	29.64	30.00	23.42	23.71	23.54	23.80
5.8G;VHT40;40;1;(M0-9);4;5795;H;TN,VN	Pass	3.60	33.16	36.00	29.56	30.00	23.62	23.58	23.40	23.55
5.8G;VHT80;80;1;(M0-9);4;5775;S;TN,VN	Pass	3.60	31.39	36.00	27.79	30.00	21.76	21.70	21.90	21.72
5.8G;VHT80+80;80;1;(M0-9);4;5775;S;TN,VN	Pass	3.60	26.23	36.00	22.63	30.00	16.52	16.84	16.68	16.39



< For Beamforming >
Summary

Mode	Sum (dBm)	Sum (W)	EIRP (dBm)	EIRP (W)
5.2G;VHT20,BF;20;1,(M0-8);4	26.82	0.48084	35.14	3.26588
5.2G;VHT40,BF;40;1,(M0-9);4	25.92	0.39084	34.24	2.65461
5.2G;VHT80,BF;80;1,(M0-9);4	15.95	0.03936	24.27	0.2673
5.8G;VHT20,BF;20;1,(M0-8);4	26.28	0.42462	35.90	3.89045
5.8G;VHT40,BF;40;1,(M0-9);4	26.30	0.42658	35.92	3.90841
5.8G;VHT80,BF;80;1,(M0-9);4	24.16	0.26062	33.78	2.38781
5.2G;VHT80+80,BF;80;1,(M0);2(1,2)	18.68	0.07379	23.99	0.25061
5.8G;VHT80+80,BF;80;1,(M0);2(3,4)	18.47	0.07031	25.08	0.32211



Result

Mode	Result	DG (dBi)	EIRP (dBm)	EIRP Lim. (dBm)	Sum (dBm)	Sum Lim. (dBm)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)
5.2G;VHT20,BF;20;1,(M0-8);4;5180;L;TN,VN	Pass	8.32	34.23	Inf	25.91	27.68	19.74	18.62	20.71	20.23
5.2G;VHT20,BF;20;1,(M0-8);4;5200;M;TN,VN	Pass	8.32	35.14	Inf	26.82	27.68	21.38	21.45	20.41	19.74
5.2G;VHT20,BF;20;1,(M0-8);4;5240;H;TN,VN	Pass	8.32	35.01	Inf	26.69	27.68	21.62	21.56	19.72	19.30
5.2G;VHT40,BF;40;1,(M0-9);4;5190;L;TN,VN	Pass	8.32	28.77	Inf	20.45	27.68	14.64	14.16	14.22	14.65
5.2G;VHT40,BF;40;1,(M0-9);4;5230;H;TN,VN	Pass	8.32	34.24	Inf	25.92	27.68	19.98	19.87	19.65	20.09
5.2G;VHT80,BF;80;1,(M0-9);4;5210;S;TN,VN	Pass	8.32	24.27	Inf	15.95	27.68	10.89	9.27	9.40	9.95
5.8G;VHT20,BF;20;1,(M0-8);4;5745;L;TN,VN	Pass	9.62	35.76	Inf	26.14	26.38	20.78	20.29	19.63	19.69
5.8G;VHT20,BF;20;1,(M0-8);4;5785;M;TN,VN	Pass	9.62	35.90	Inf	26.28	26.38	19.85	19.59	21.24	20.17
5.8G;VHT20,BF;20;1,(M0-8);4;5825;H;TN,VN	Pass	9.62	35.75	Inf	26.13	26.38	20.88	20.97	19.29	18.91
5.8G;VHT40,BF;40;1,(M0-9);4;5755;L;TN,VN	Pass	9.62	35.90	Inf	26.28	26.38	20.58	20.82	19.72	19.82
5.8G;VHT40,BF;40;1,(M0-9);4;5795;H;TN,VN	Pass	9.62	35.92	Inf	26.30	26.38	20.12	20.66	20.29	20.03
5.8G;VHT80,BF;80;1,(M0-9);4;5775;S;TN,VN	Pass	9.62	33.78	Inf	24.16	26.38	18.51	18.62	17.84	17.46
5.2G;VHT80+80,BF;80;1,(M0);2(1,2);5210;S;TN,VN	Pass	5.31	23.99	Inf	18.68	30.00	16.06	15.23		
5.8G;VHT80+80,BF;80;1,(M0);2(3,4);5775;S;TN,VN	Pass	6.61	25.08	Inf	18.47	29.39			15.67	15.23























< For Non-Beamforming >
Summary

Mode	PD (dBm/RBW)	EIRP.PD (dBm/RBW)
5.2G;11a;20;1;4	14.36	22.68
5.2G;HT20;20;1,(M0-31);4	14.60	22.92
5.2G;HT40;40;1,(M0-31);4	6.86	15.18
5.2G;VHT20;20;1,(M0-8);4	14.62	22.94
5.2G;VHT40;40;1,(M0-9);4	12.86	21.18
5.2G;VHT80;80;1,(M0-9);4	1.18	9.50
5.2G;VHT80+80;80;1,(M0-9);4	6.13	14.45
5.8G;11a;20;1;4	16.04	25.66
5.8G;VHT20;20;1,(M0-8);4	15.97	25.59
5.8G;VHT40;40;1,(M0-9);4	12.88	22.50
5.8G;VHT80;80;1,(M0-9);4	8.25	17.87
5.8G;VHT80+80;80;1,(M0-9);4	4.38	14.00

Result

Mode	Result	Meas.RBW (Hz)	Lim.RBW (Hz)	BWCF (dB)	DG (dBi)	Sum.Max (dBm/RBW)	PD (dBm/RBW)	PD.Limit (dBm/RBW)	EIRP.PD (dBm/RBW)	EIRP.PD.Li m (dBm/RBW)	P1 (dBm/RBW)	P2 (dBm/RBW)	P3 (dBm/RBW)	P4 (dBm/RBW)
5.2G;11a;20;1;4;5180;L;TN,VN	Pass	1M	1M	0.00	8.32	11.93	11.93	14.68	20.25	Inf	5.97	5.83	6.32	6.07
5.2G;11a;20;1;4;5200;M;TN,VN	Pass	1M	1M	0.00	8.32	14.36	14.36	14.68	22.68	Inf	8.31	8.28	8.74	8.42
5.2G;11a;20;1;4;5240;H;TN,VN	Pass	1M	1M	0.00	8.32	14.26	14.26	14.68	22.58	Inf	8.17	8.42	8.59	7.95
5.2G;VHT20;20;1;(M0-8);4;5180;L;TN,VN	Pass	1M	1M	0.00	8.32	11.90	11.90	14.68	20.22	Inf	6.31	6.21	6.71	6.46
5.2G;VHT20;20;1;(M0-8);4;5200;M;TN,VN	Pass	1M	1M	0.00	8.32	14.34	14.34	14.68	22.66	Inf	8.67	8.54	9.19	8.79
5.2G;VHT20;20;1;(M0-8);4;5240;H;TN,VN	Pass	1M	1M	0.00	8.32	14.62	14.62	14.68	22.94	Inf	8.90	9.02	9.39	8.81
5.2G;VHT40;40;1;(M0-9);4;5190;L;TN,VN	Pass	1M	1M	0.00	8.32	6.89	6.89	14.68	15.21	Inf	1.09	1.02	1.54	0.95
5.2G;VHT40;40;1;(M0-9);4;5230;H;TN,VN	Pass	1M	1M	0.00	8.32	12.86	12.86	14.68	21.18	Inf	7.00	7.19	7.27	6.90
5.2G;VHT80;80;1;(M0-9);4;5210;S;TN,VN	Pass	1M	1M	0.00	8.32	1.18	1.18	14.68	9.50	Inf	-4.64	-4.72	-4.52	-4.52
5.2G;VHT80+80;80;1;(M0-9);4;5210;S;TN,VN	Pass	1M	1M	0.00	8.32	6.13	6.13	14.68	14.45	Inf	4.18	4.31	-19.65	-34.32
5.8G;11a;20;1;4;5745;L;TN,VN	Pass	500k	500k	0.00	9.62	15.96	15.96	26.38	25.58	32.38	9.92	10.07	9.99	9.99
5.8G;11a;20;1;4;5785;M;TN,VN	Pass	500k	500k	0.00	9.62	16.04	16.04	26.38	25.66	32.38	10.37	10.06	9.94	9.99
5.8G;11a;20;1;4;5825;H;TN,VN	Pass	500k	500k	0.00	9.62	16.02	16.02	26.38	25.64	32.38	10.18	10.07	10.07	9.89
5.8G;VHT20;20;1;(M0-8);4;5745;L;TN,VN	Pass	500k	500k	0.00	9.62	15.95	15.95	26.38	25.57	32.38	10.30	10.37	10.21	10.35
5.8G;VHT20;20;1;(M0-8);4;5785;M;TN,VN	Pass	500k	500k	0.00	9.62	15.97	15.97	26.38	25.59	32.38	11.00	10.43	10.13	10.28
5.8G;VHT20;20;1;(M0-8);4;5825;H;TN,VN	Pass	500k	500k	0.00	9.62	15.83	15.83	26.38	25.45	32.38	10.57	10.13	10.33	10.35
5.8G;VHT40;40;1;(M0-9);4;5755;L;TN,VN	Pass	500k	500k	0.00	9.62	12.77	12.77	26.38	22.39	32.38	6.59	6.82	6.77	6.85
5.8G;VHT40;40;1;(M0-9);4;5795;H;TN,VN	Pass	500k	500k	0.00	9.62	12.88	12.88	26.38	22.50	32.38	6.94	6.92	6.81	6.92
5.8G;VHT80;80;1;(M0-9);4;5775;S;TN,VN	Pass	500k	500k	0.00	9.62	8.25	8.25	26.38	17.87	32.38	2.38	2.19	2.36	2.24
5.8G;VHT80+80;80;1;(M0-9);4;5775;S;TN,VN	Pass	500k	500k	0.00	9.62	4.38	4.38	26.38	14.00	32.38	-28.61	-38.79	2.73	3.01

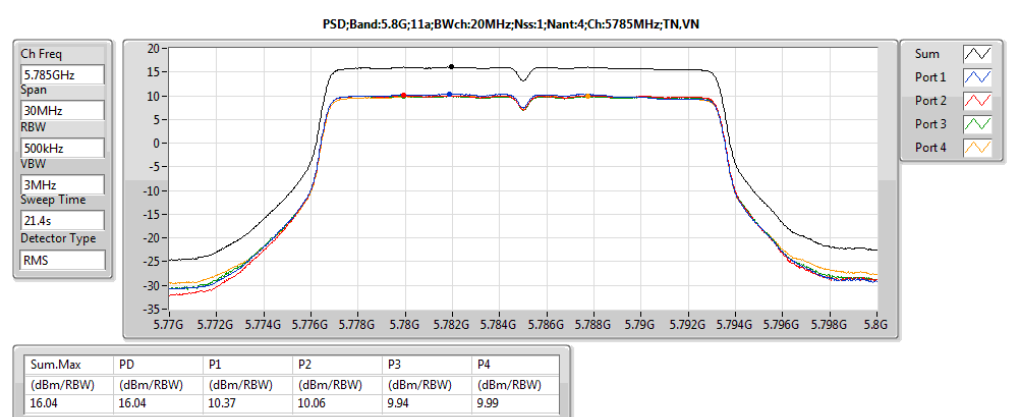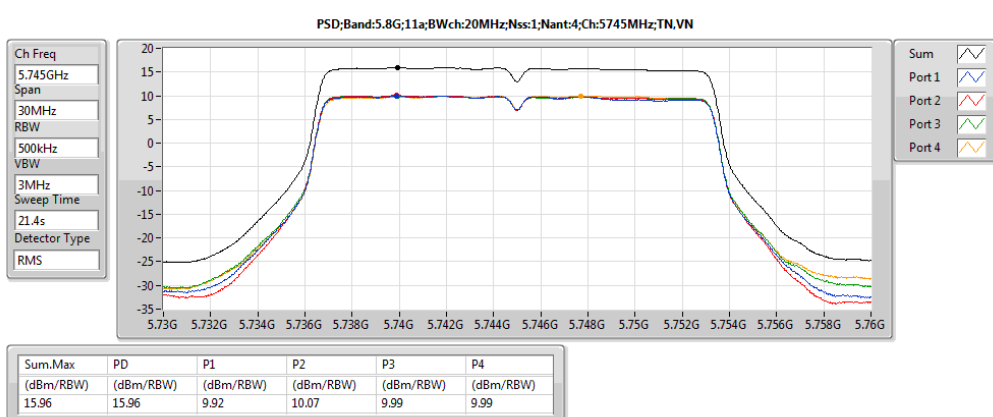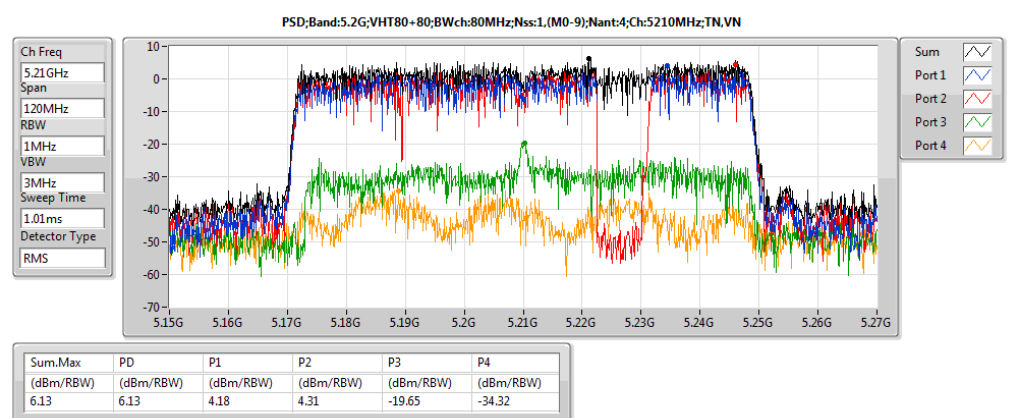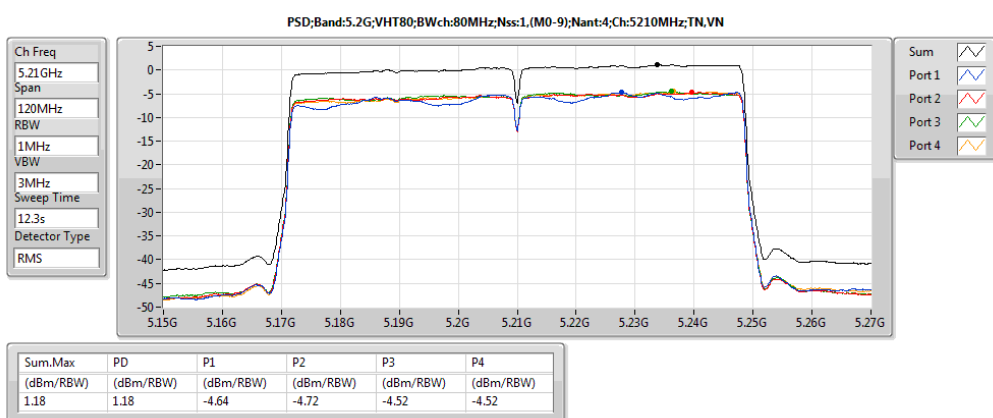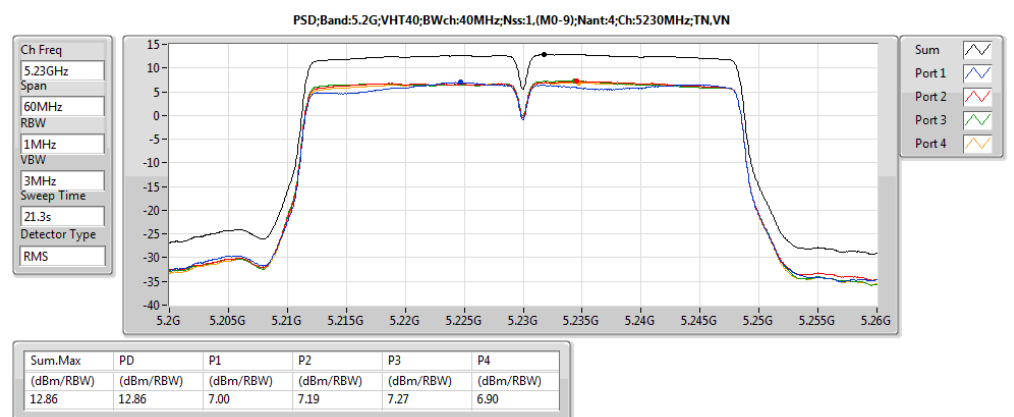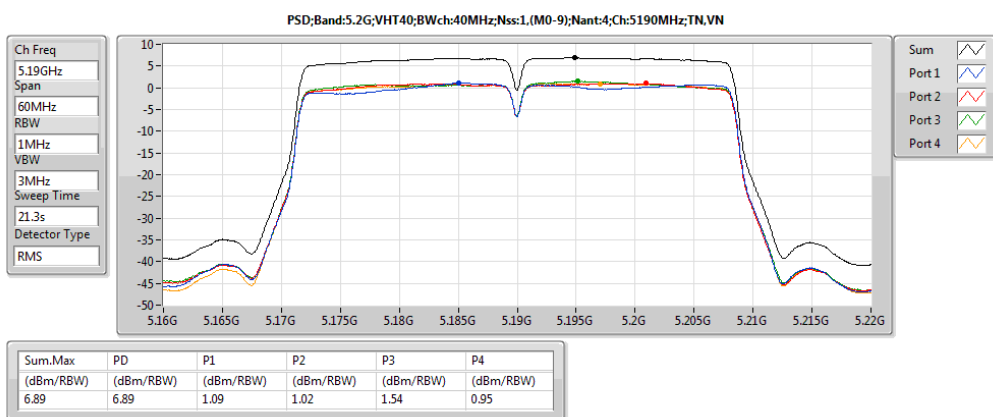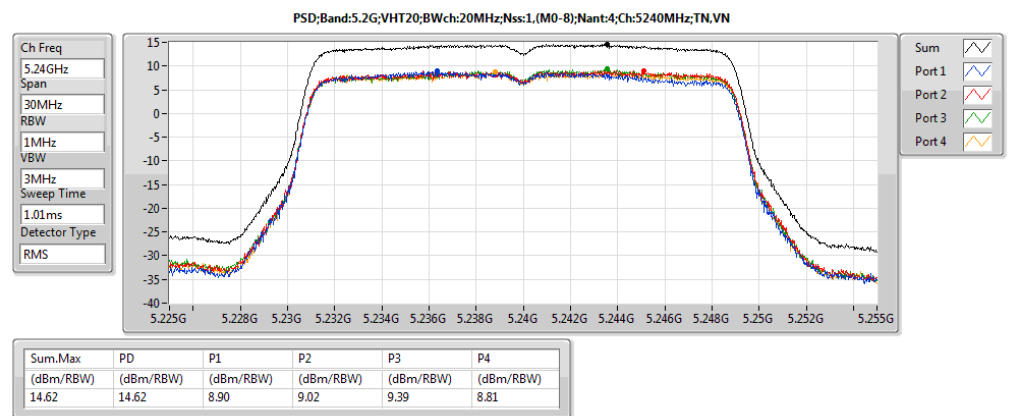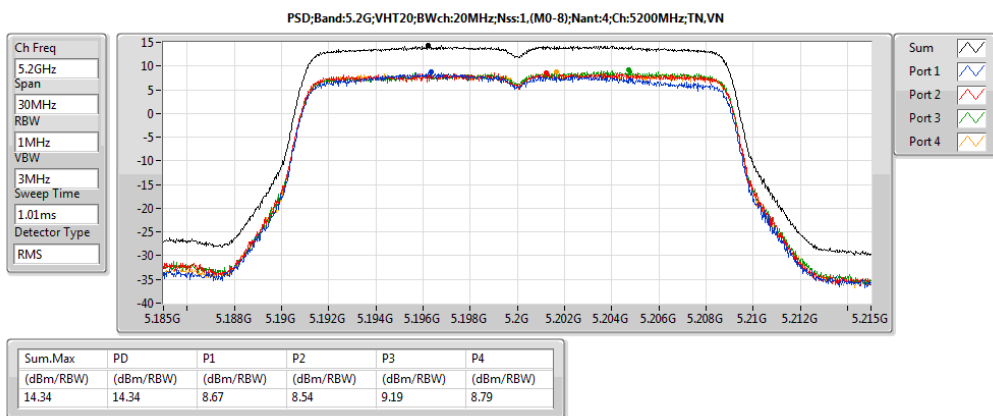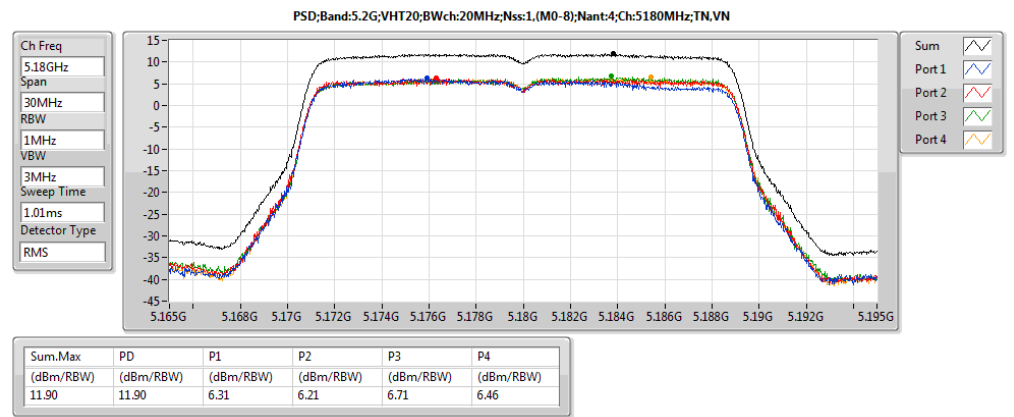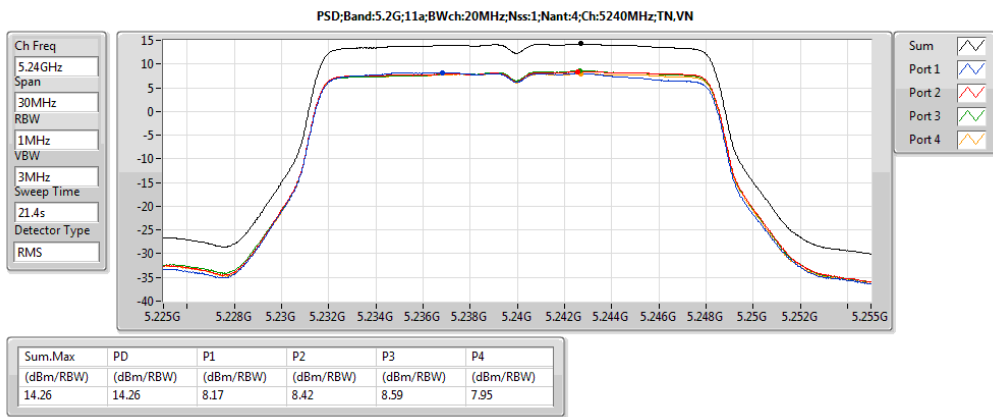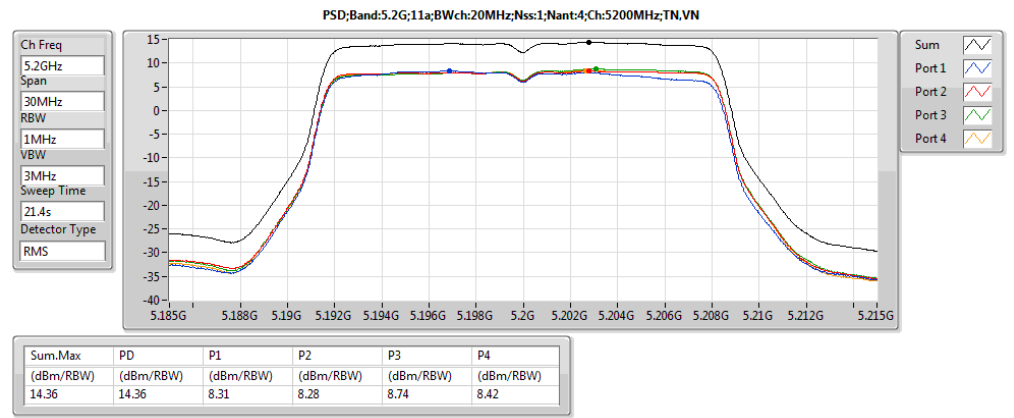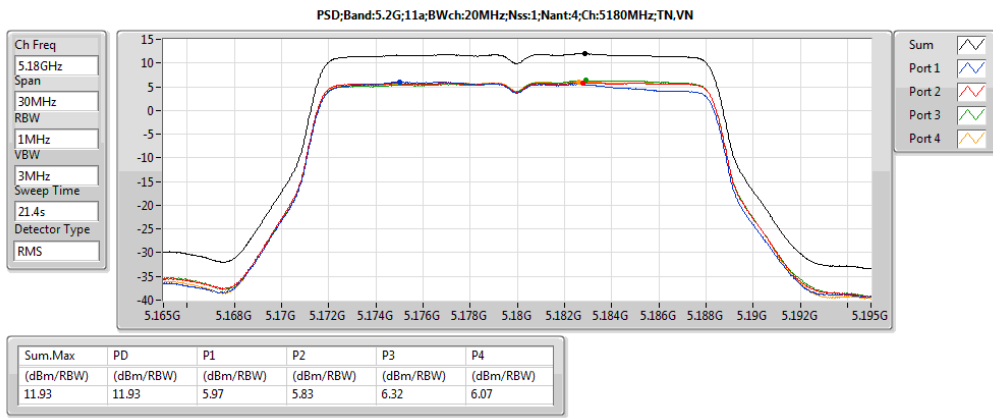

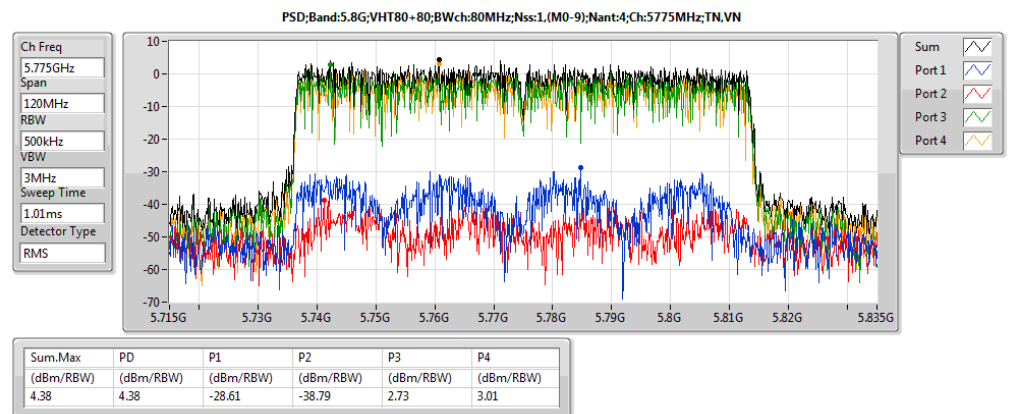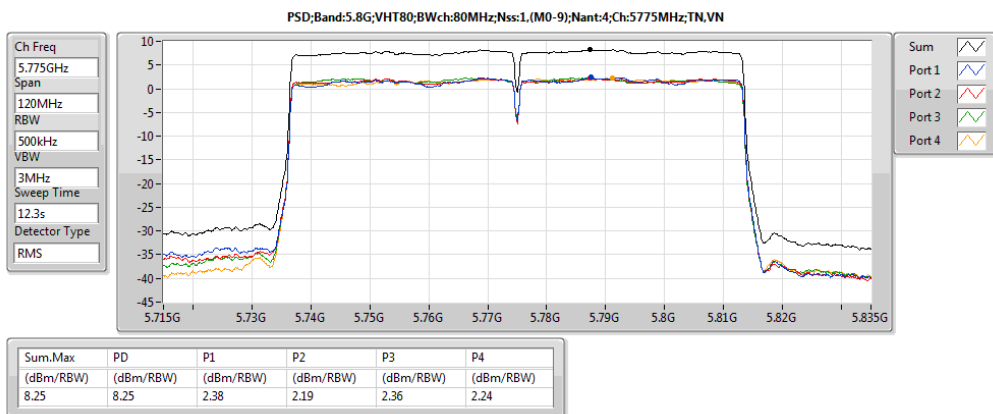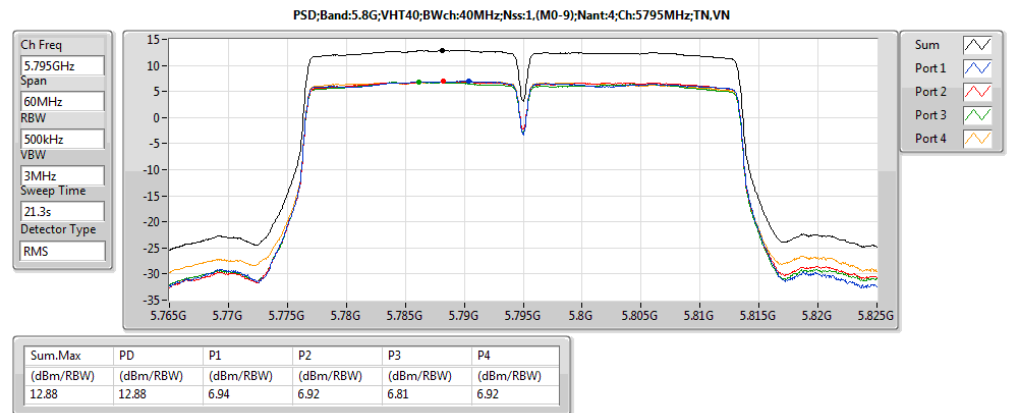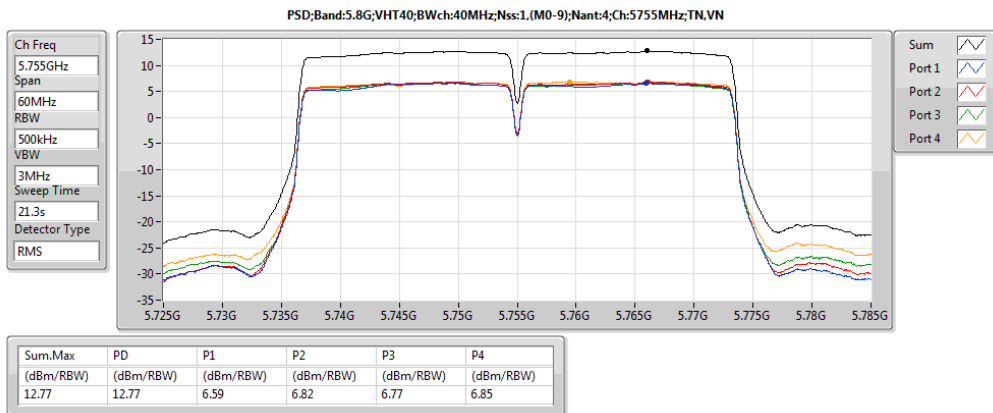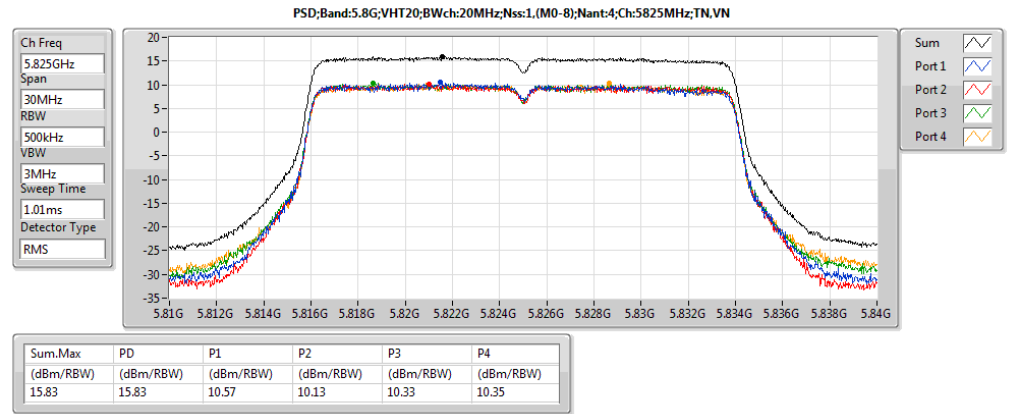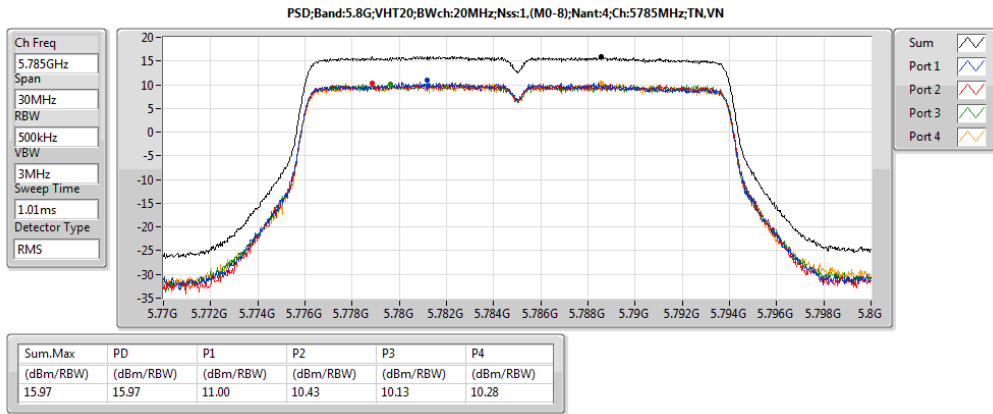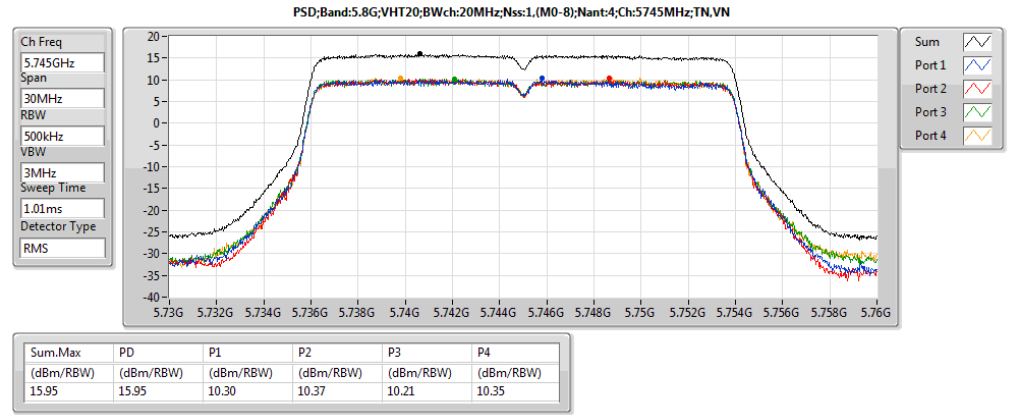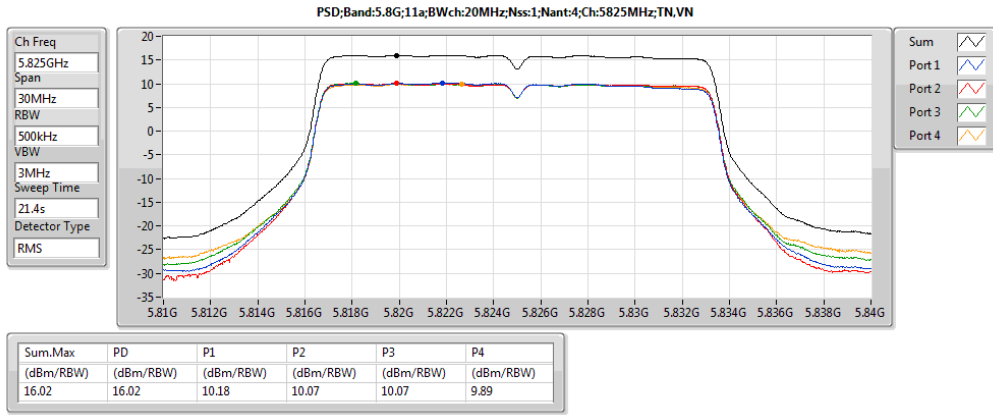

















< For Beamforming >
Summary

Mode	PD (dBm/RBW)	EIRP.PD (dBm/RBW)
5.2G;VHT20,BF;20;1,(M0-8);4	14.67	22.99
5.2G;VHT40,BF;40;1,(M0-9);4	10.22	18.54
5.2G;VHT80,BF;80;1,(M0-9);4	-3.05	5.27
5.8G;VHT20,BF;20;1,(M0-8);4	11.82	21.44
5.8G;VHT40,BF;40;1,(M0-9);4	9.65	19.28
5.8G;VHT80,BF;80;1,(M0-9);4	3.54	13.16
5.2G;VHT80+80,BF;80;1,(M0);2(1,2)	-0.21	5.10
5.8G;VHT80+80,BF;80;1,(M0);2(3,4)	-2.91	3.70

Result

Mode	Result	Meas.RBW (Hz)	Lim.RBW (Hz)	BWCF (dB)	DG (dBi)	Sum.Max (dBm/RBW)	PD (dBm/RBW)	PD.Limit (dBm/RBW)	EIRP.PD (dBm/RBW)	EIRP.PD.Li m (dBm/RBW)	P1 (dBm/RBW)	P2 (dBm/RBW)	P3 (dBm/RBW)	P4 (dBm/RBW)
5.2G;VHT20,BF;20;1,(M0-8);4;5180;L;TN,VN	Pass	1M	1M	0.00	8.32	12.00	12.00	14.68	20.32	Inf	6.87	5.91	6.70	6.50
5.2G;VHT20,BF;20;1,(M0-8);4;5200;M;TN,VN	Pass	1M	1M	0.00	8.32	14.67	14.67	14.68	22.99	Inf	9.16	9.16	8.98	8.80
5.2G;VHT20,BF;20;1,(M0-8);4;5240;H;TN,VN	Pass	1M	1M	0.00	8.32	14.66	14.66	14.68	22.98	Inf	9.31	9.00	8.98	8.72
5.2G;VHT40,BF;40;1,(M0-9);4;5190;L;TN,VN	Pass	1M	1M	0.00	8.32	3.60	3.60	14.68	11.92	Inf	-1.52	-1.85	-1.57	-1.81
5.2G;VHT40,BF;40;1,(M0-9);4;5230;H;TN,VN	Pass	1M	1M	0.00	8.32	10.22	10.22	14.68	18.54	Inf	4.90	4.69	4.76	4.79
5.2G;VHT80,BF;80;1,(M0-9);4;5210;S;TN,VN	Pass	1M	1M	0.00	8.32	-3.05	-3.05	14.68	5.27	Inf	-8.08	-9.01	-8.69	-8.81
5.8G;VHT20,BF;20;1,(M0-8);4;5745;L;TN,VN	Pass	500k	500k	0.00	9.62	11.63	11.63	26.38	21.25	32.38	6.02	6.49	6.28	5.61
5.8G;VHT20,BF;20;1,(M0-8);4;5785;M;TN,VN	Pass	500k	500k	0.00	9.62	11.82	11.82	26.38	21.44	32.38	6.58	6.65	6.36	6.13
5.8G;VHT20,BF;20;1,(M0-8);4;5825;H;TN,VN	Pass	500k	500k	0.00	9.62	11.53	11.53	26.38	21.15	32.38	6.53	6.35	6.01	5.52
5.8G;VHT40,BF;40;1,(M0-9);4;5755;L;TN,VN	Pass	500k	500k	0.00	9.62	9.57	9.57	26.38	19.19	32.38	3.89	4.77	4.27	4.30
5.8G;VHT40,BF;40;1,(M0-9);4;5795;H;TN,VN	Pass	500k	500k	0.00	9.62	9.65	9.65	26.38	19.28	32.38	3.78	4.85	4.32	4.37
5.8G;VHT80,BF;80;1,(M0-9);4;5775;S;TN,VN	Pass	500k	500k	0.00	9.62	3.54	3.54	26.38	13.16	32.38	-1.00	-1.68	-1.76	-2.56
5.2G;VHT80+80,BF;80;1,(M0);2(1,2);5210;S;TN,VN	Pass	1M	1M	0.00	5.31	-0.21	-0.21	17.00	5.10	Inf	-2.80	-3.14		
5.8G;VHT80+80,BF;80;1,(M0);2(3,4);5775;S;TN,VN	Pass	500k	500k	0.00	6.61	-2.91	-2.91	29.39	3.70	35.39			-6.26	-5.41

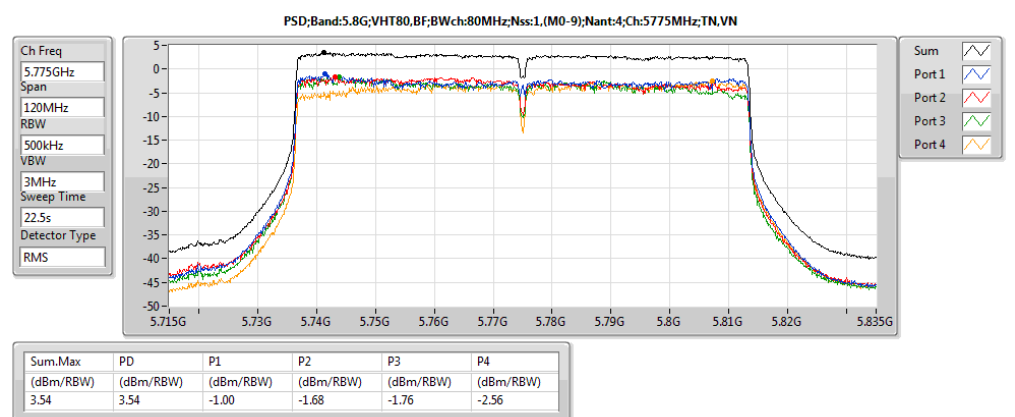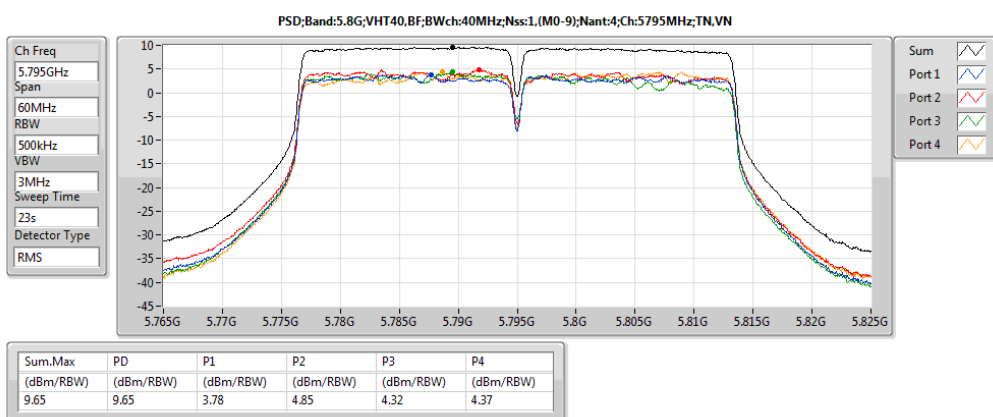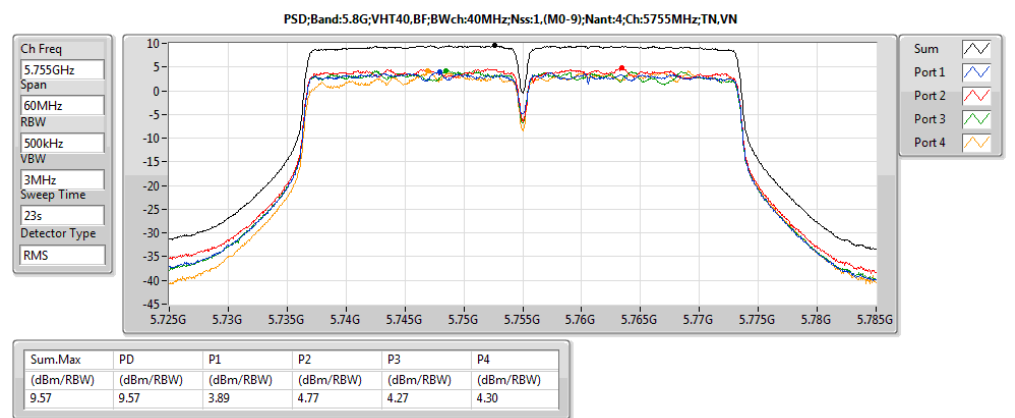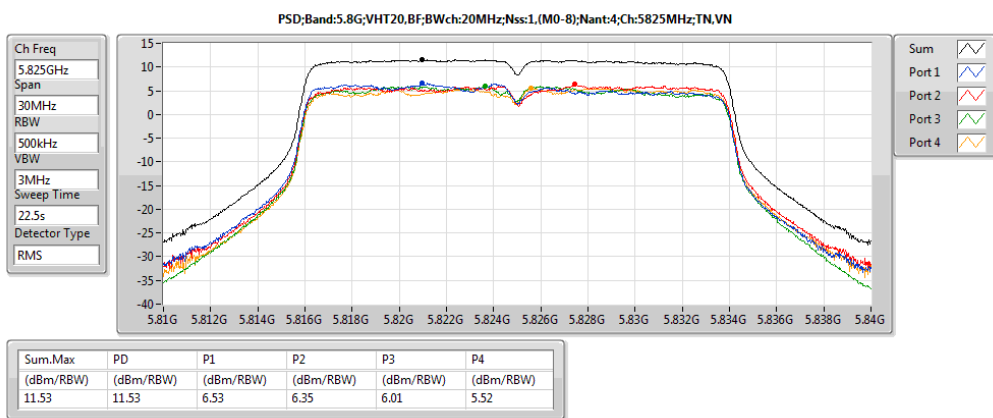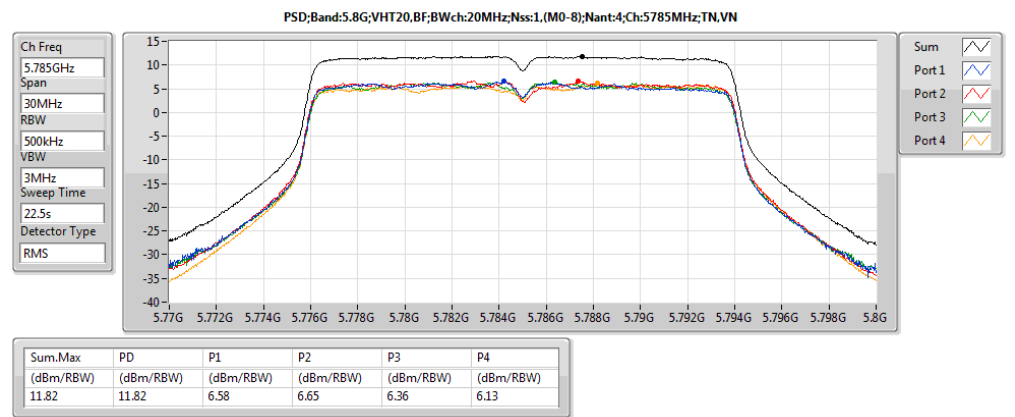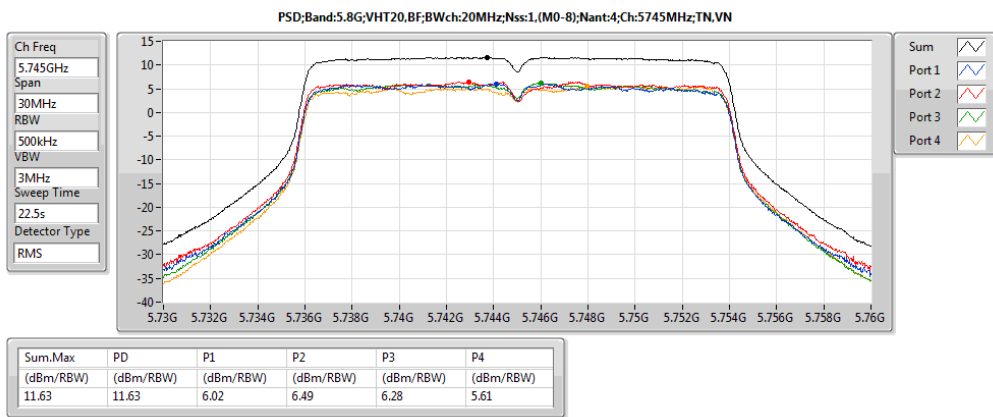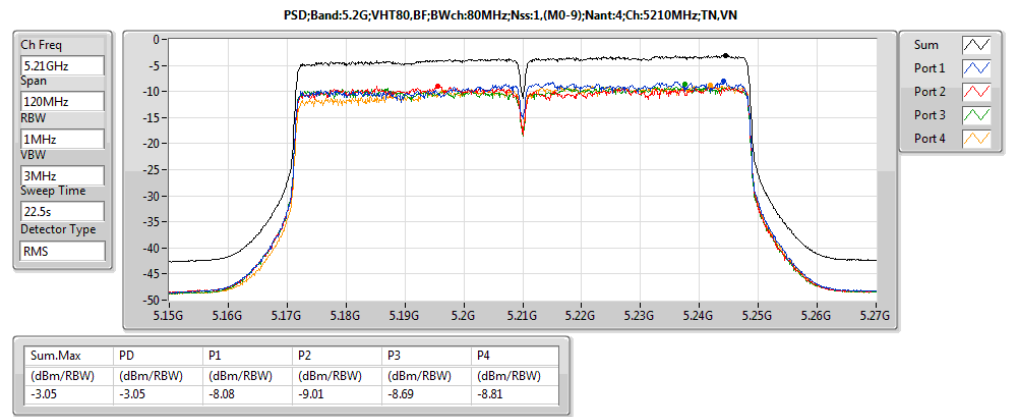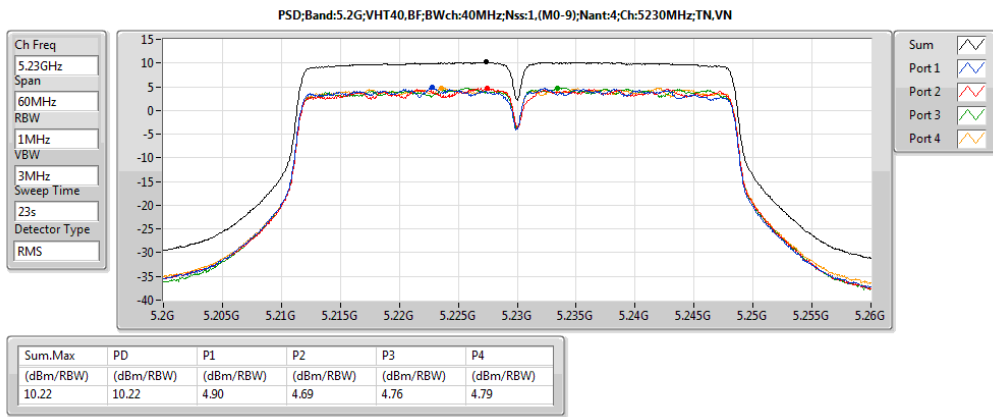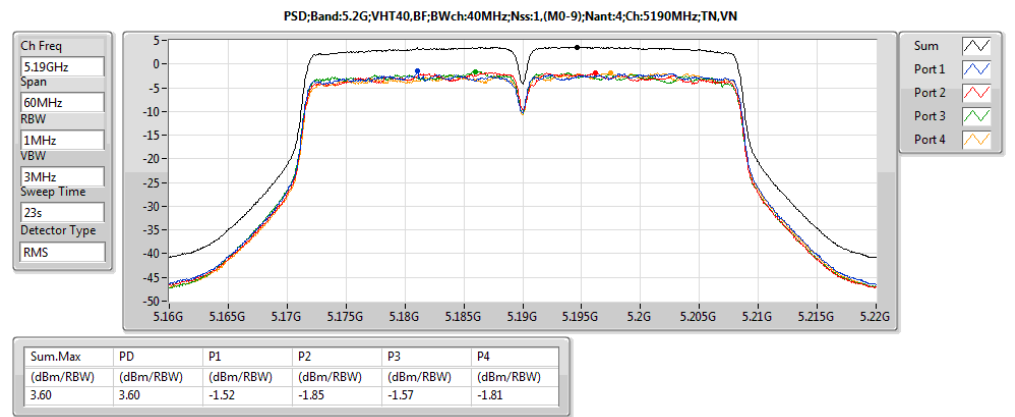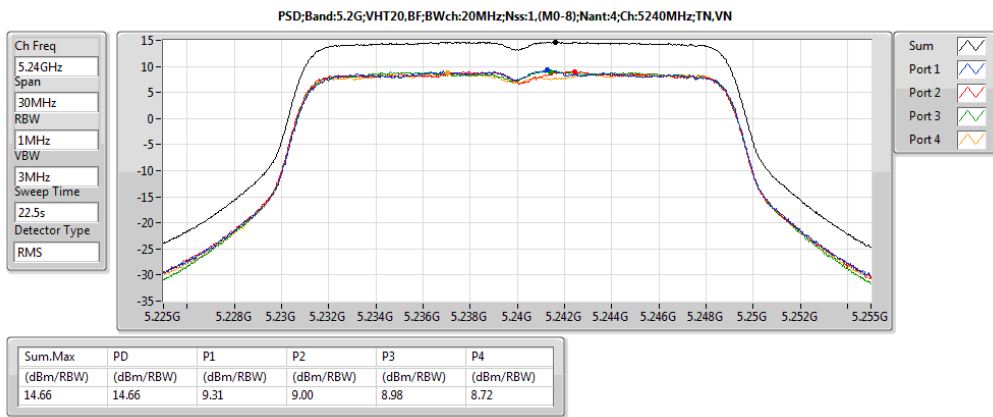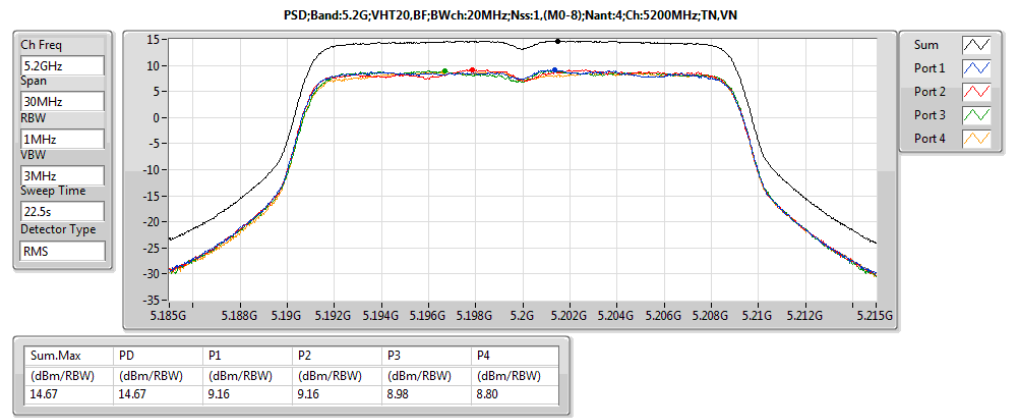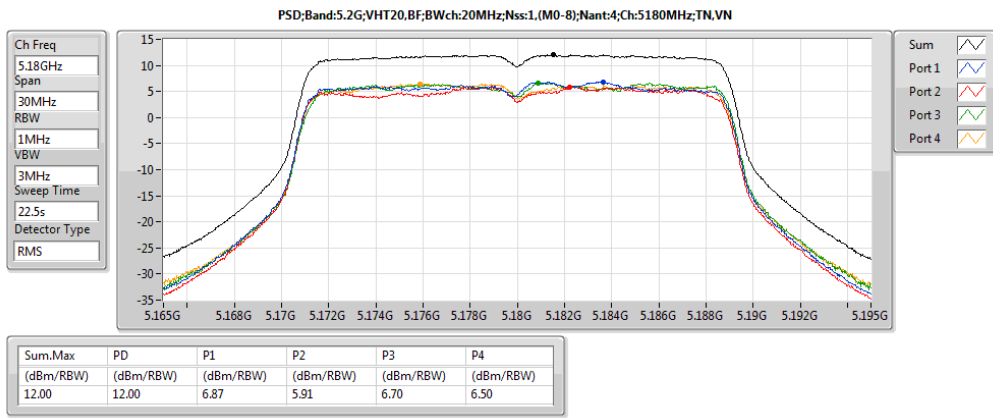

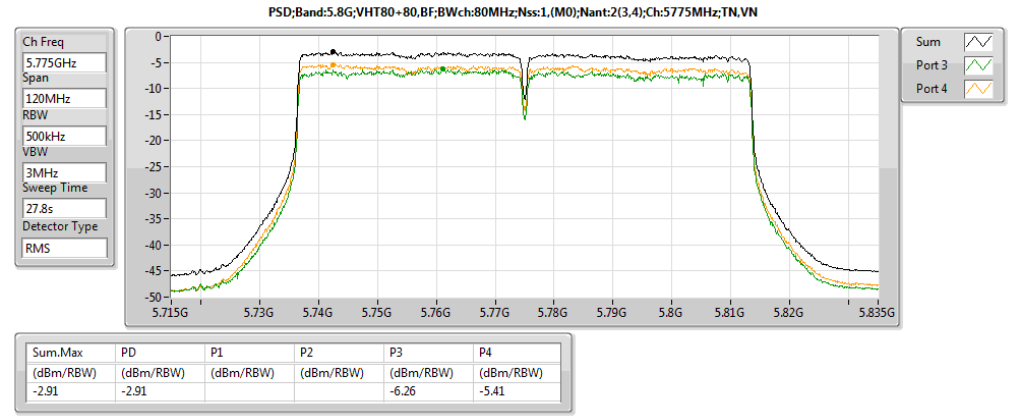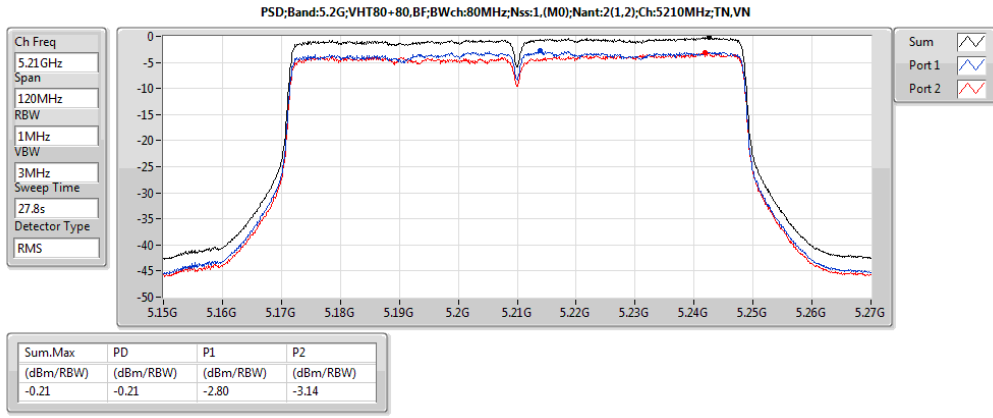



Transmitter Radiated Bandedge Emissions (with Antenna)

U-NII 5150-5250MHz Transmitter Radiated Bandedge (with Antenna) for Non-Beamforming										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
11a	4	5180	3	5147.000	65.66	74	5147.000	53.59	54	V
11a	4	5240	3	5134.800	61.79	74	5140.800	50.77	54	V
VHT20	4	5180	3	5146.000	65.90	74	5146.600	53.61	54	V
VHT20	4	5240	3	5137.800	63.13	74	5149.800	51.93	54	V
VHT40	4	5190	3	5145.100	63.93	74	5146.640	52.96	54	V
VHT40	4	5230	3	5149.800	62.64	74	5149.800	53.35	54	V
VHT80	4	5210	3	5146.800	58.14	74	5146.800	53.18	54	V
VHT80+80	4	5210	3	5148.600	65.36	74	5148.600	53.41	54	V

Note 1: Measurement worst emissions of receive antenna polarization.

U-NII 5725-5850MHz Transmitter Radiated Bandedge (with Antenna) for Non-Beamforming							
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Pol.
11a	4	5745	3	5645.540	59.94	68.2	V
11a	4	5825	3	5945.140	58.95	68.2	V
VHT20	4	5745	3	5640.080	64.18	68.2	V
VHT20	4	5825	3	5929.480	64.52	68.2	V
VHT40	4	5755	3	5642.980	67.87	68.2	V
VHT40	4	5795	3	5933.080	67.34	68.2	V
VHT80	4	5775	3	5643.850	66.52	68.2	V
VHT80+80	4	5775	3	5948.050	57.91	68.2	V

Note 1: Measurement worst emissions of receive antenna polarization.





U-NII 5150-5250MHz Transmitter Radiated Bandedge (with Antenna) for Beamforming										
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
VHT20	4	5180	3	5146.800	68.27	74	5145.600	53.35	54	V
VHT20	4	5240	3	5371.200	58.66	74	5148.600	47.85	54	V
VHT40	4	5190	3	5145.540	73.83	74	5146.200	53.12	54	V
VHT40	4	5230	3	5140.800	67.58	74	5148.000	49.72	54	V
VHT80	4	5210	3	5145.600	65.58	74	5145.000	53.11	54	V
VHT80+80	4	5210	3	5147.400	70.16	74	5146.200	53.38	54	V


Note 1: Measurement worst emissions of receive antenna polarization.


U-NII 5725-5850MHz Transmitter Radiated Bandedge (with Antenna) for Beamforming							
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Pol.
VHT20	4	5745	3	5644.500	59.60	68.2	V
VHT20	4	5825	3	5925.430	59.23	68.2	V
VHT40	4	5755	3	5647.320	61.39	68.2	V
VHT40	4	5795	3	5941.000	58.77	68.2	V
VHT80	4	5775	3	5636.700	68.05	68.2	V
VHT80+80	4	5775	3	5641.250	59.18	68.2	V


Note 1: Measurement worst emissions of receive antenna polarization.

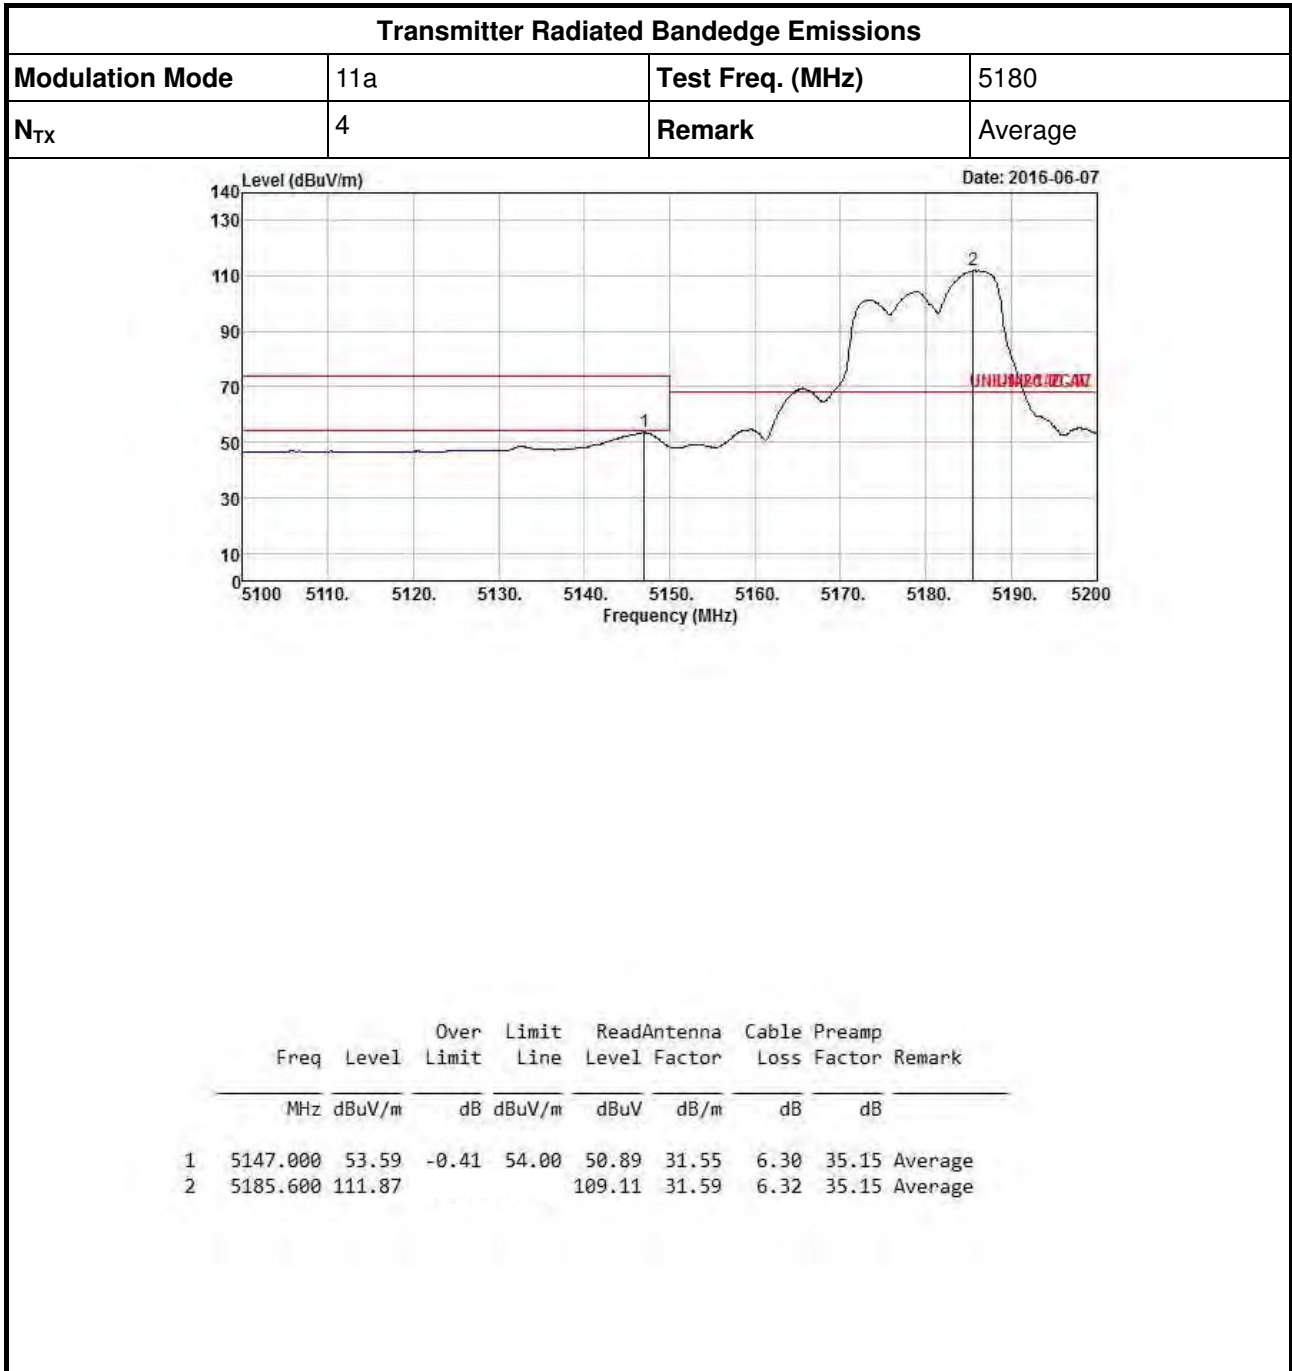


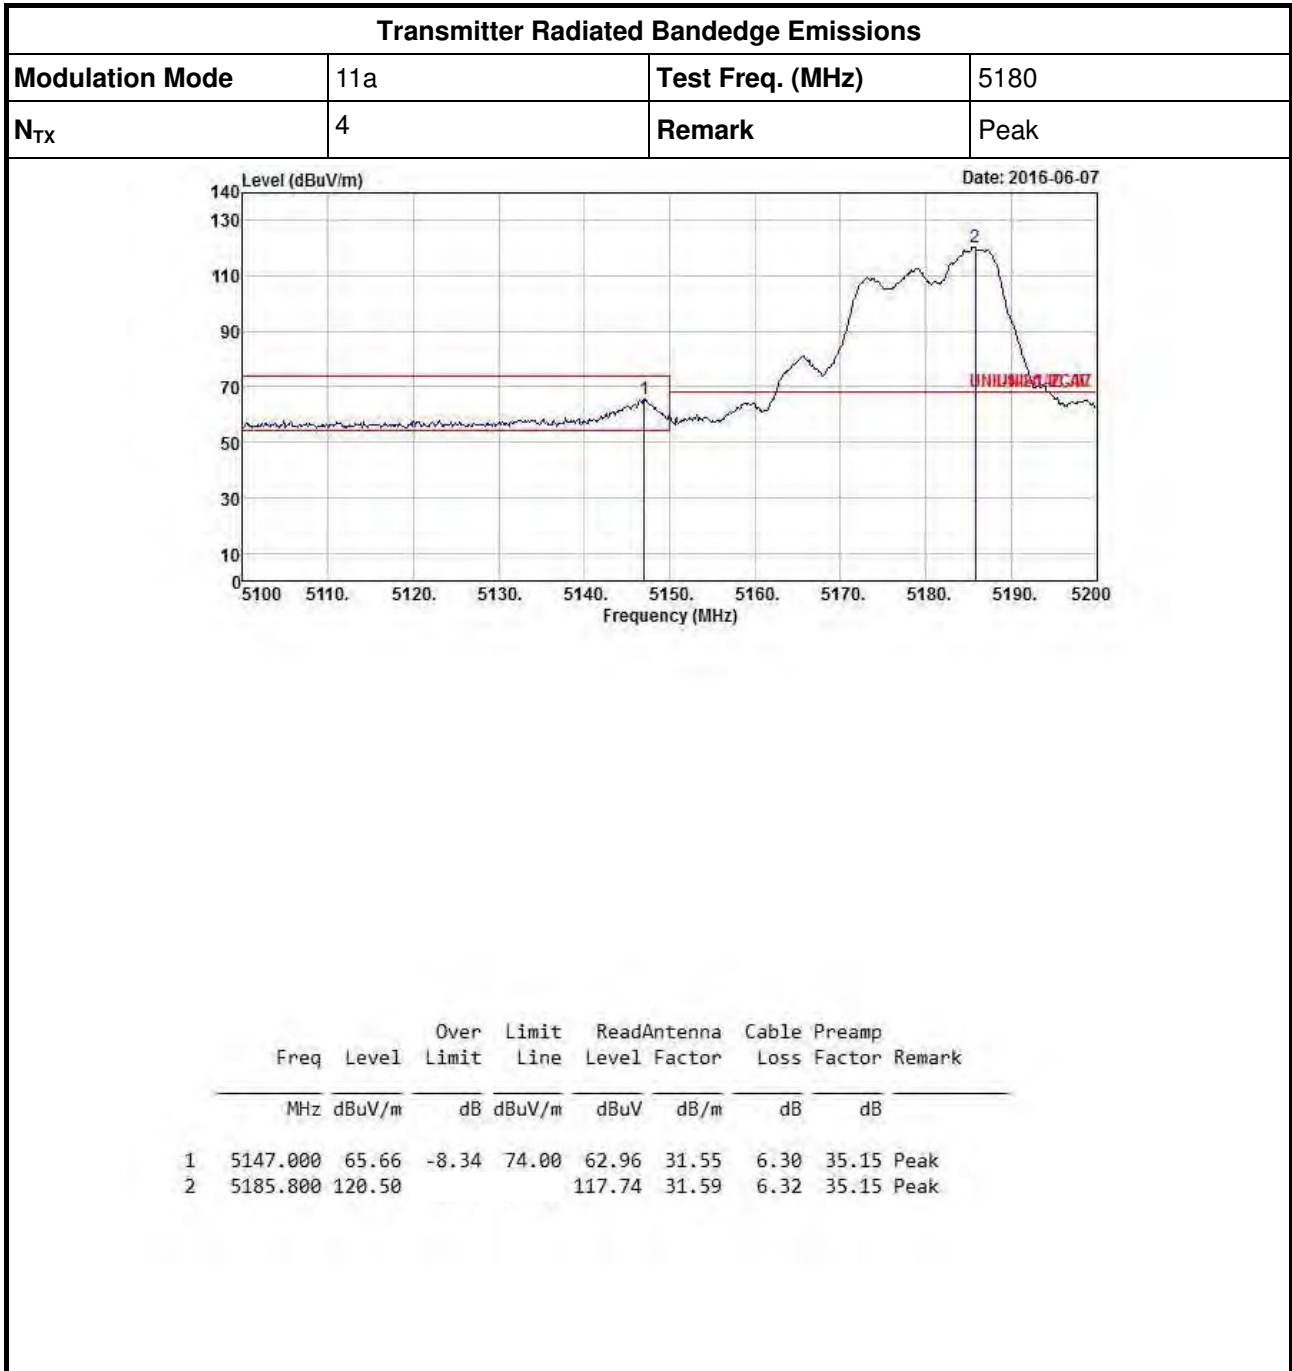


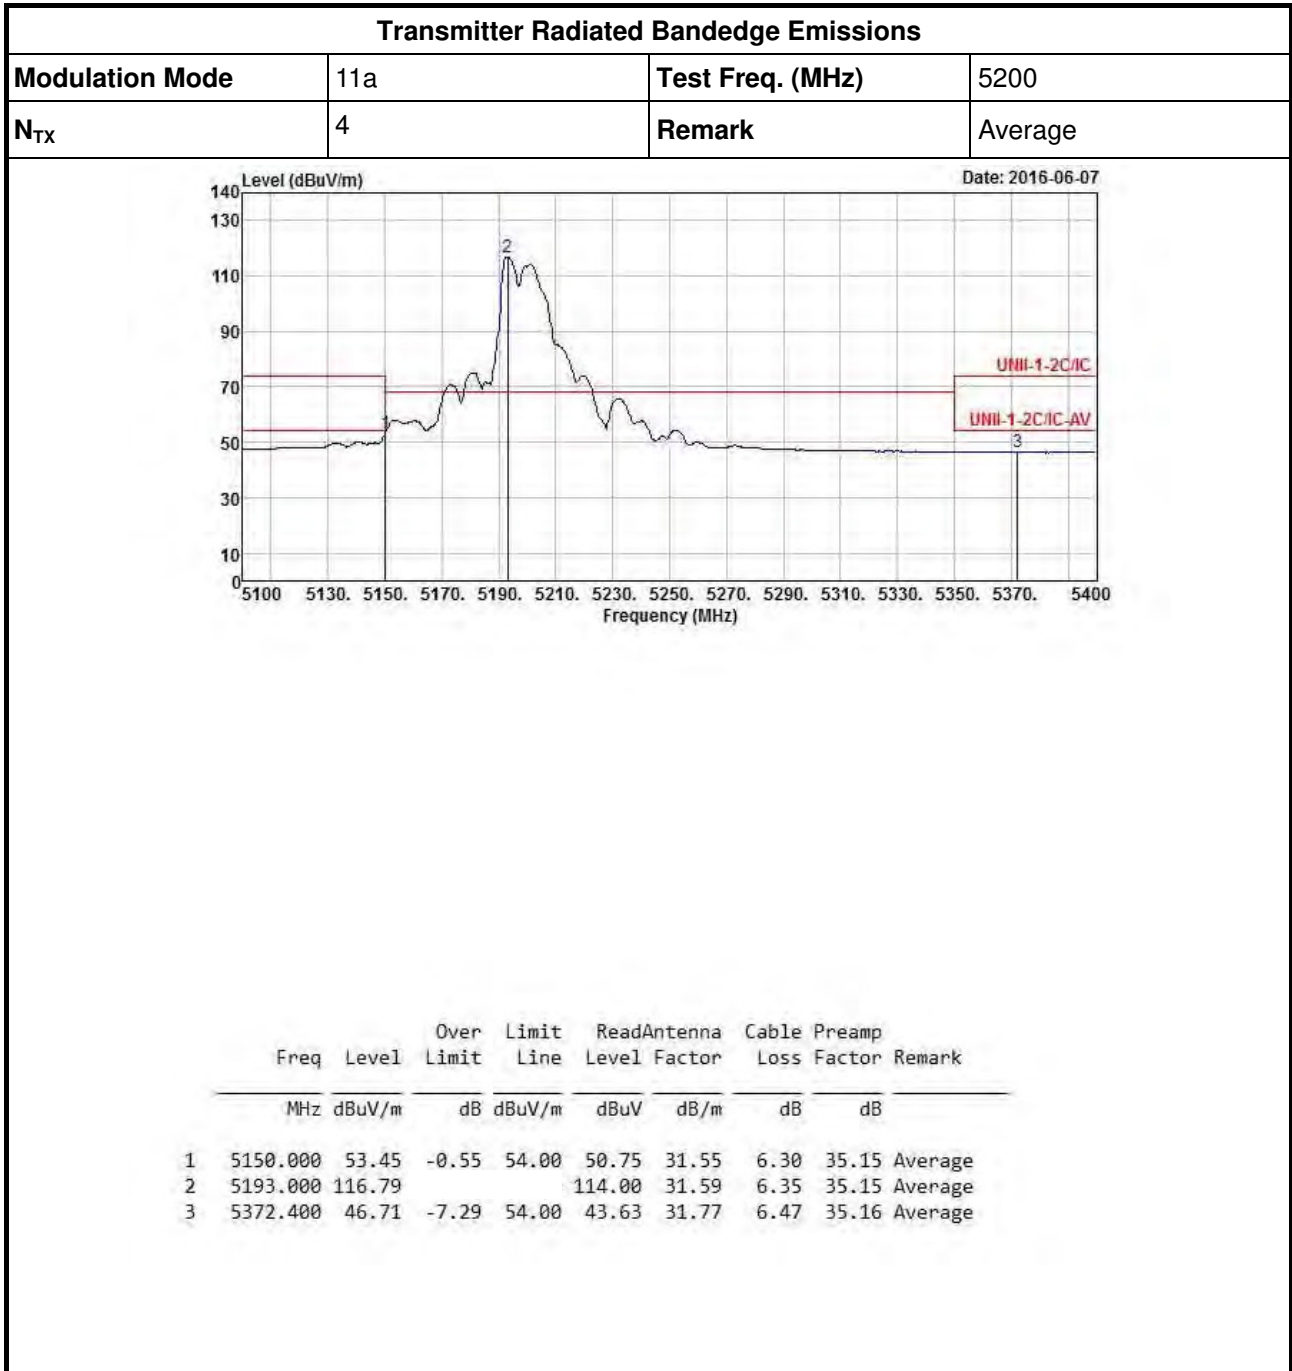


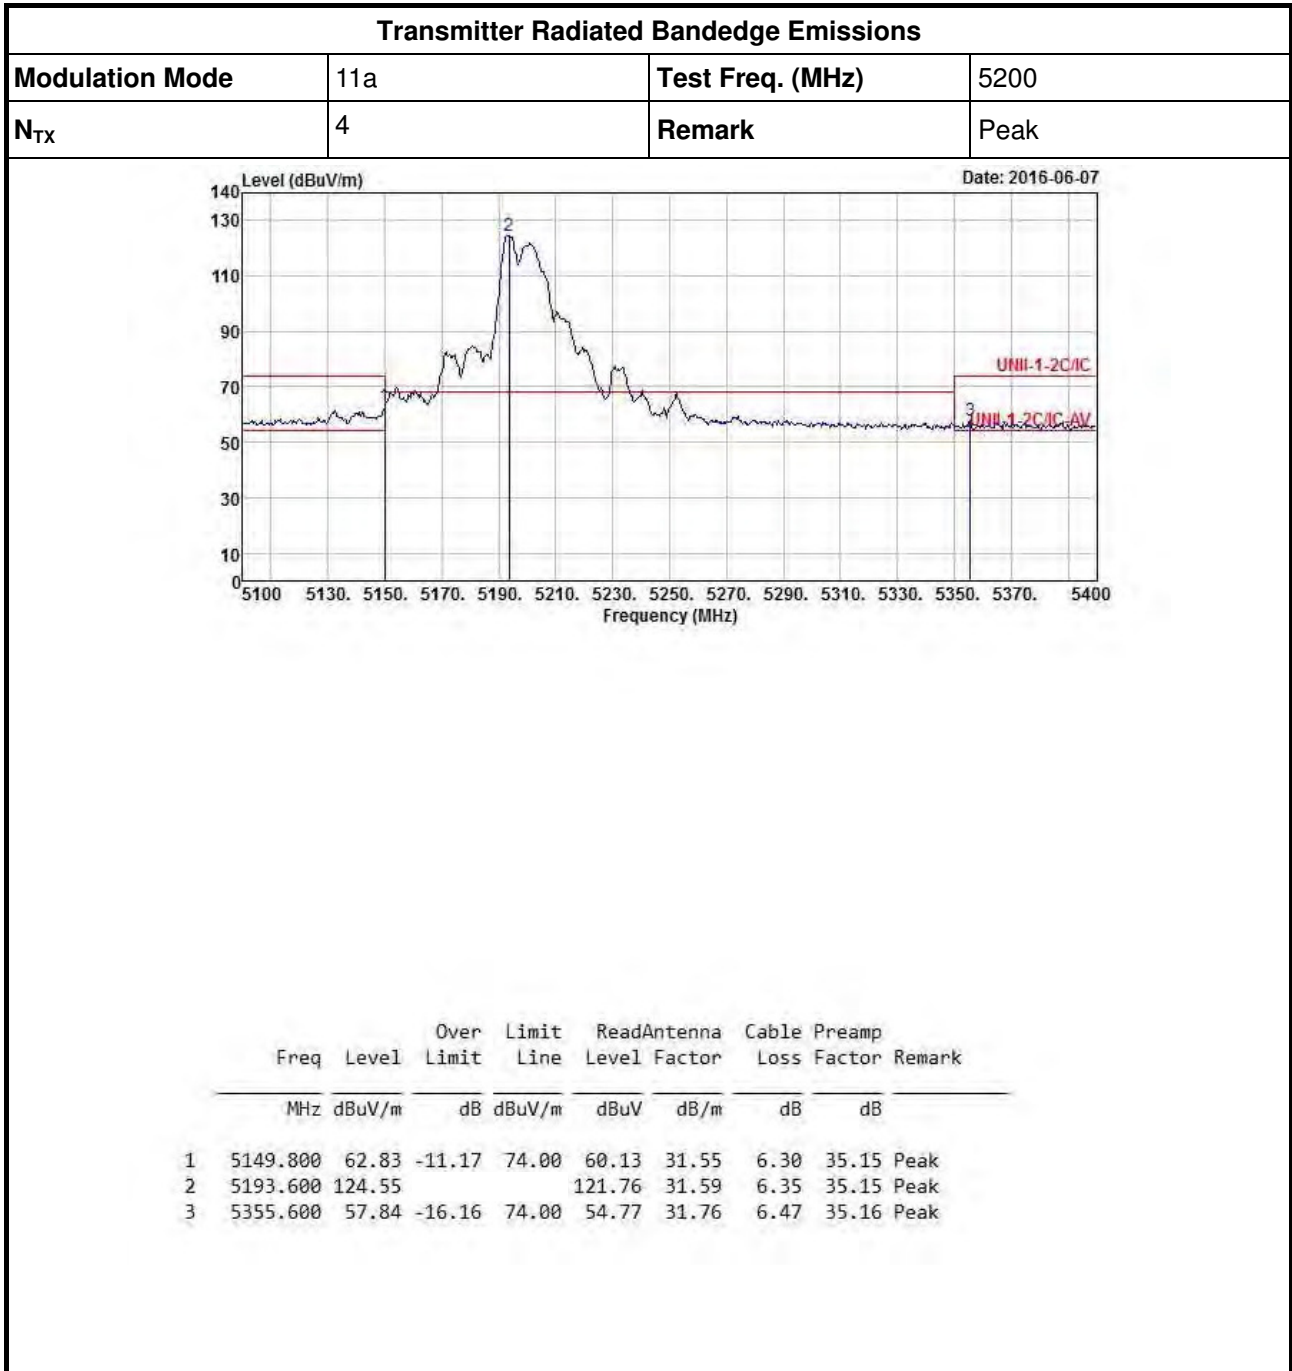


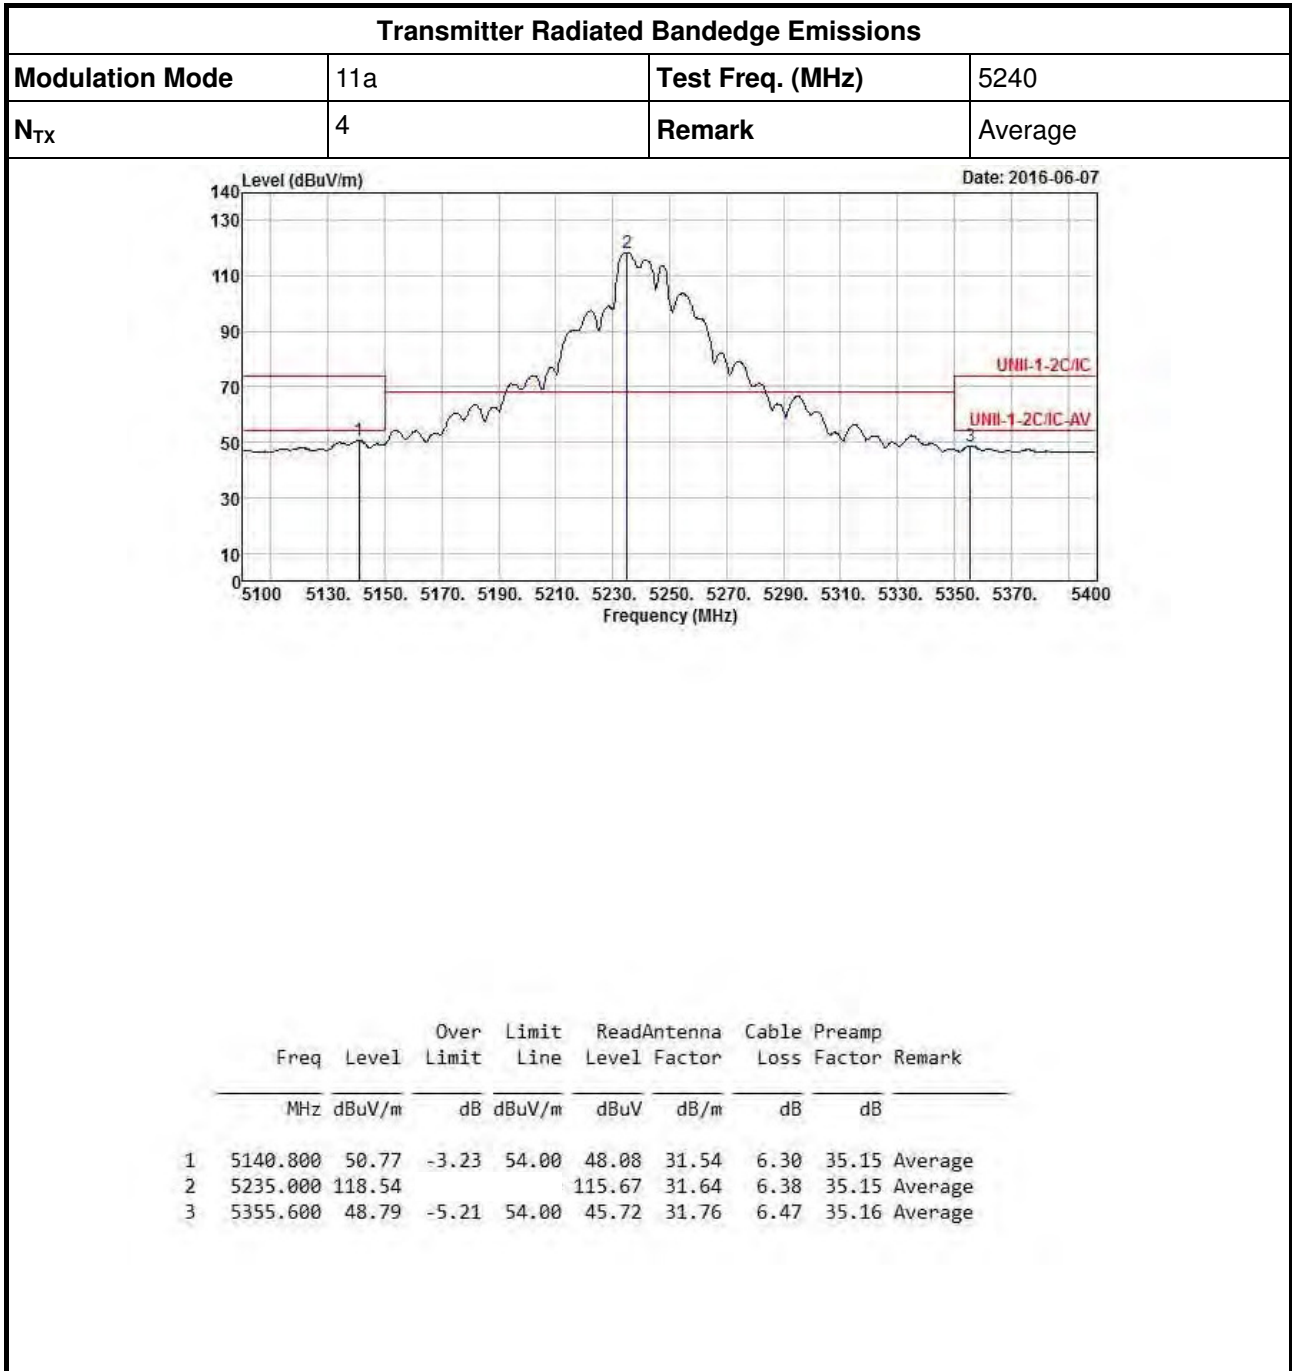


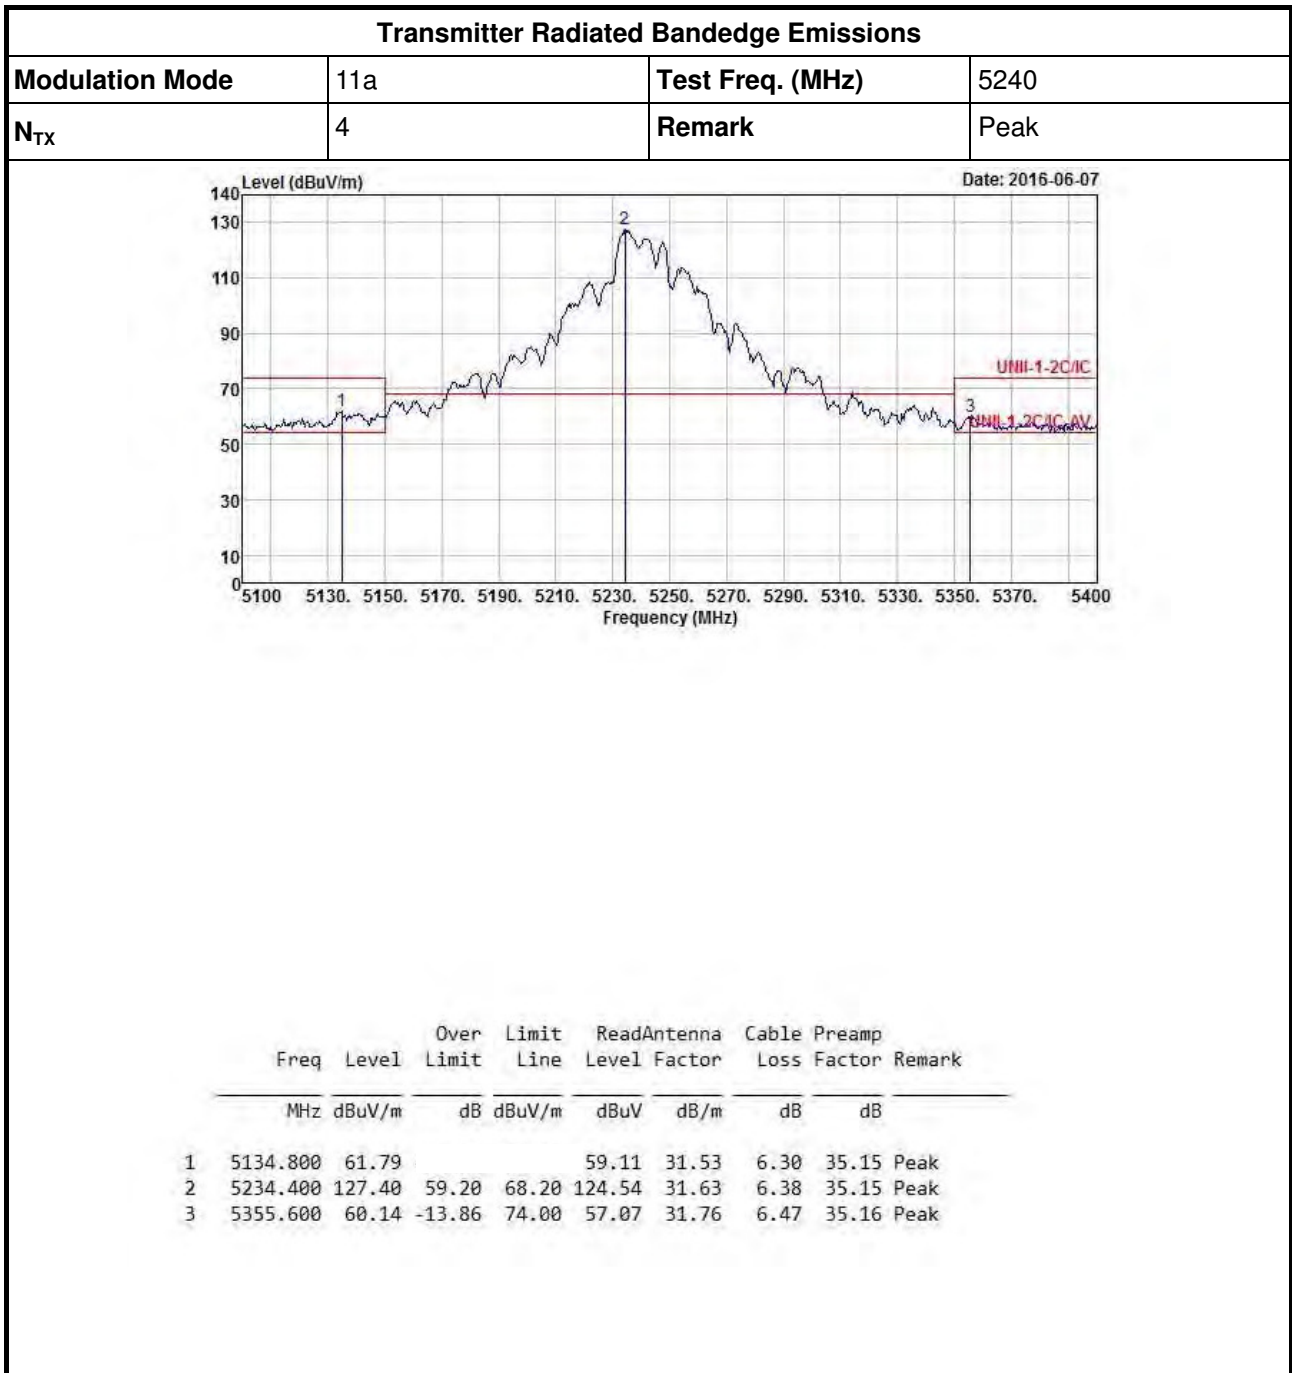


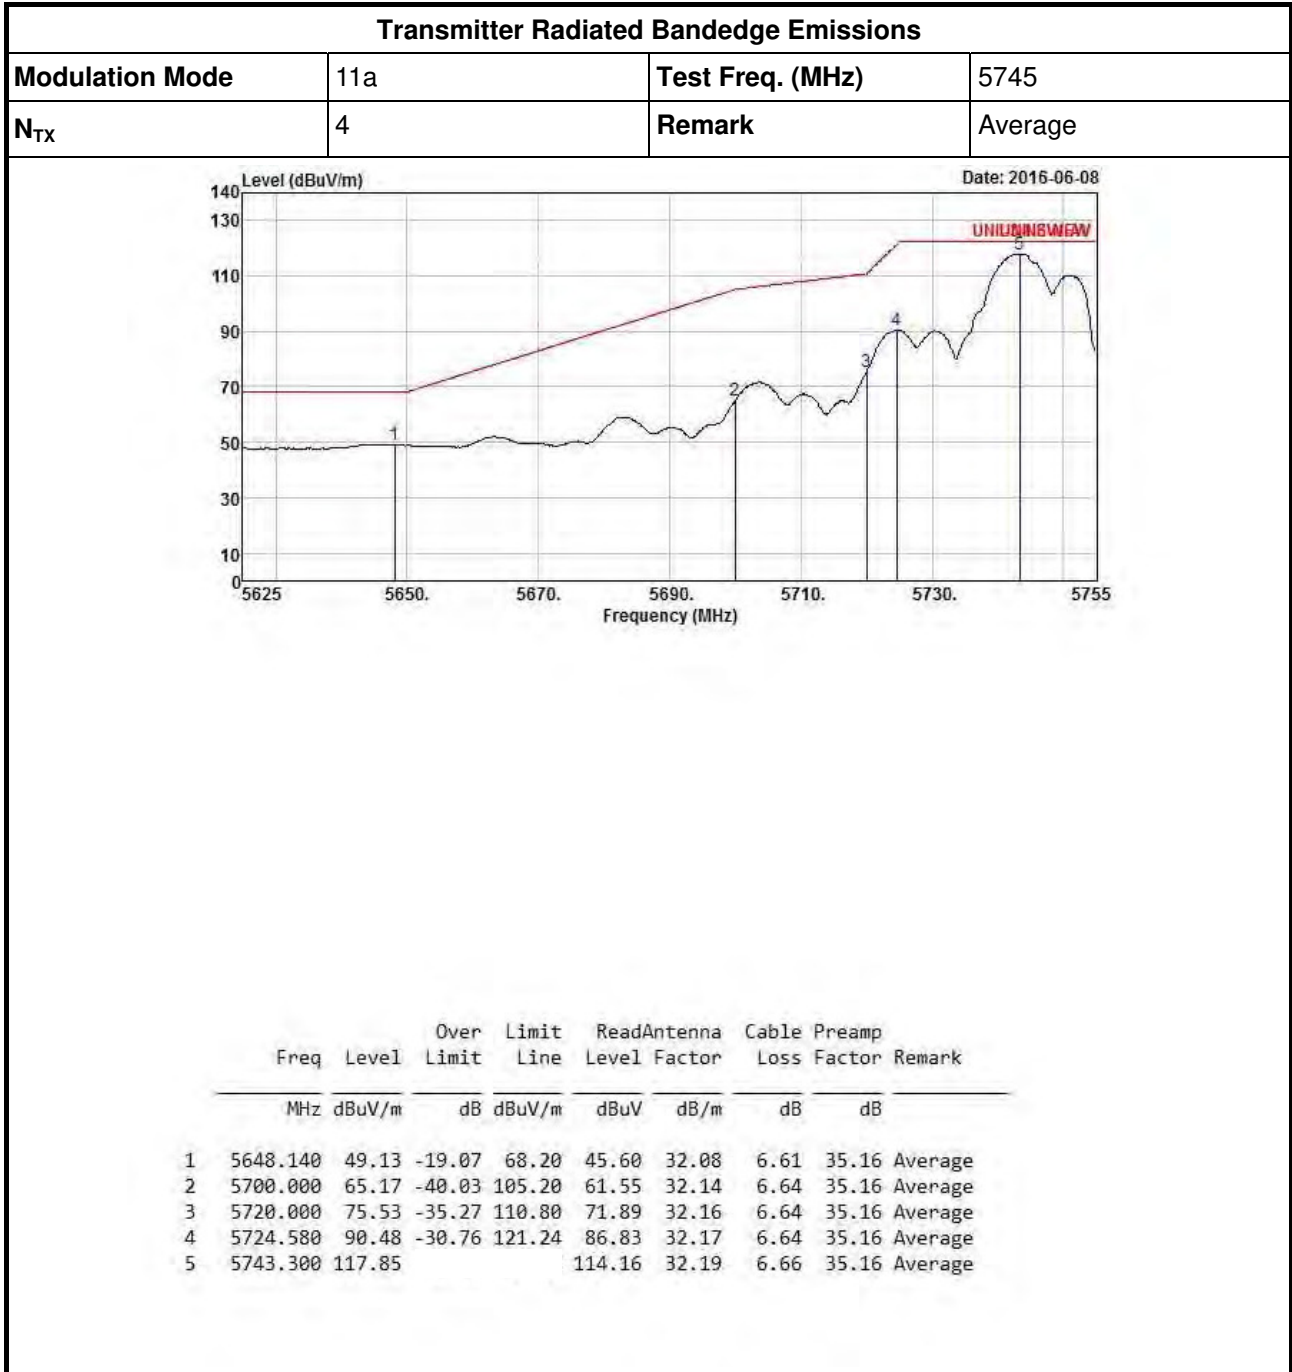


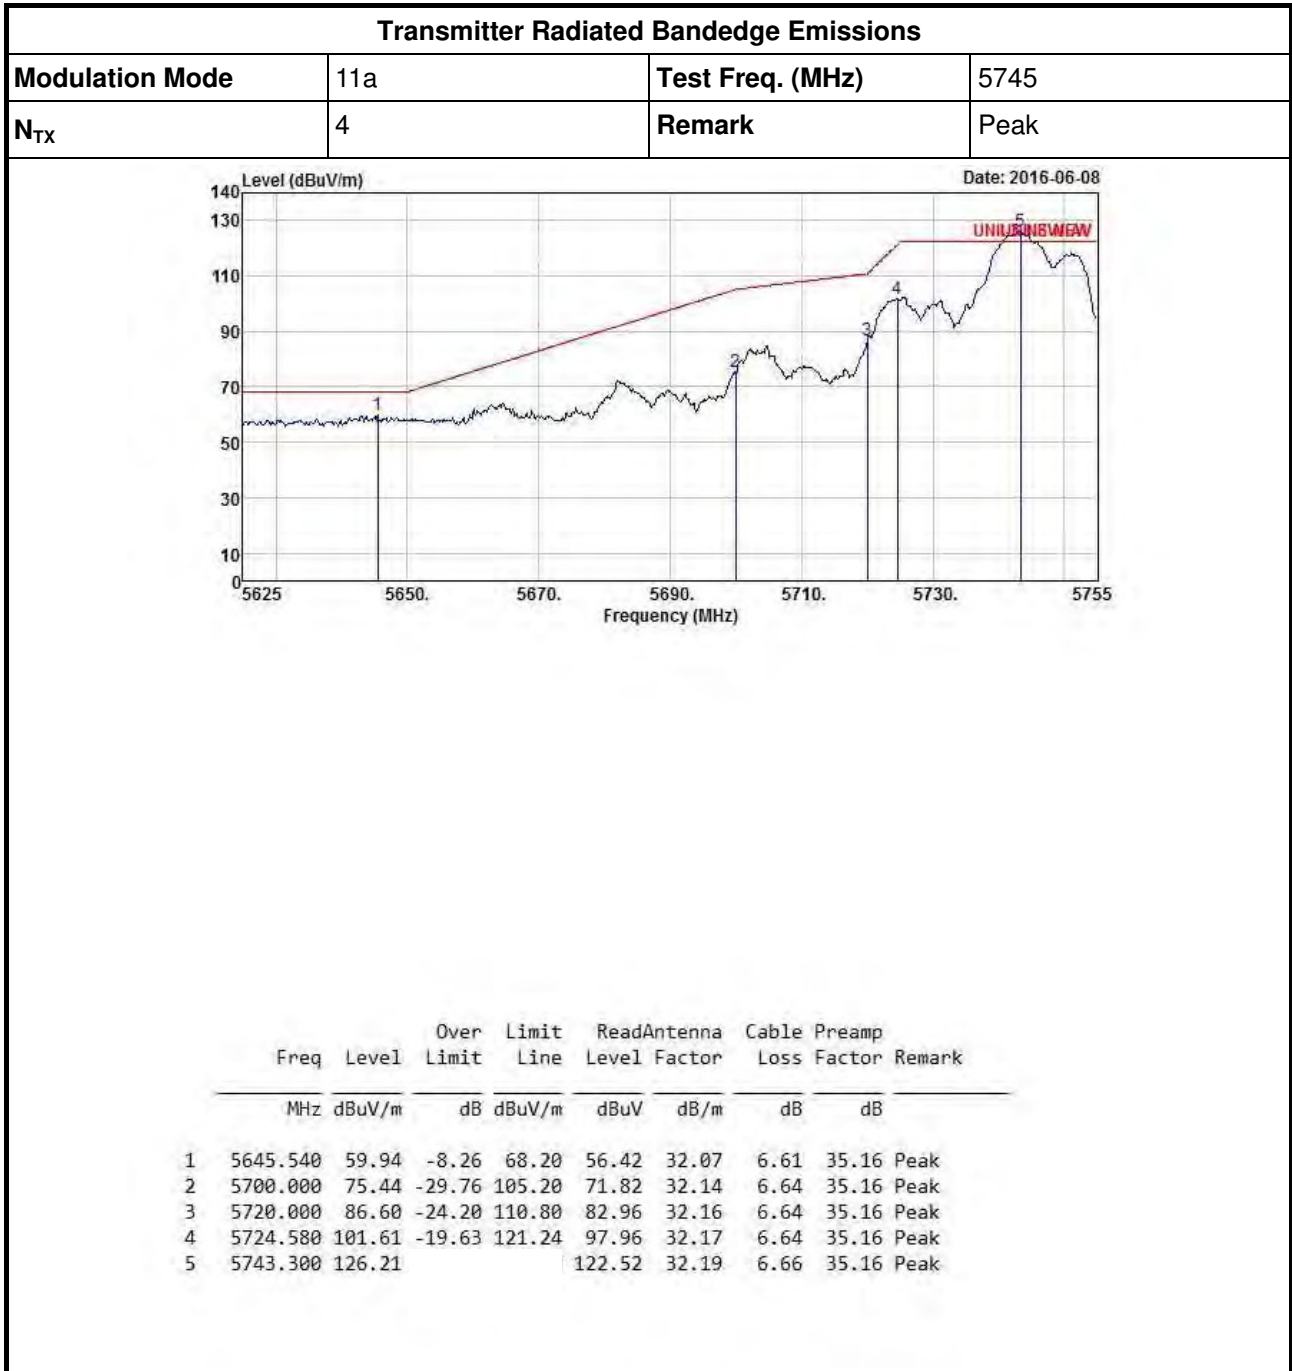


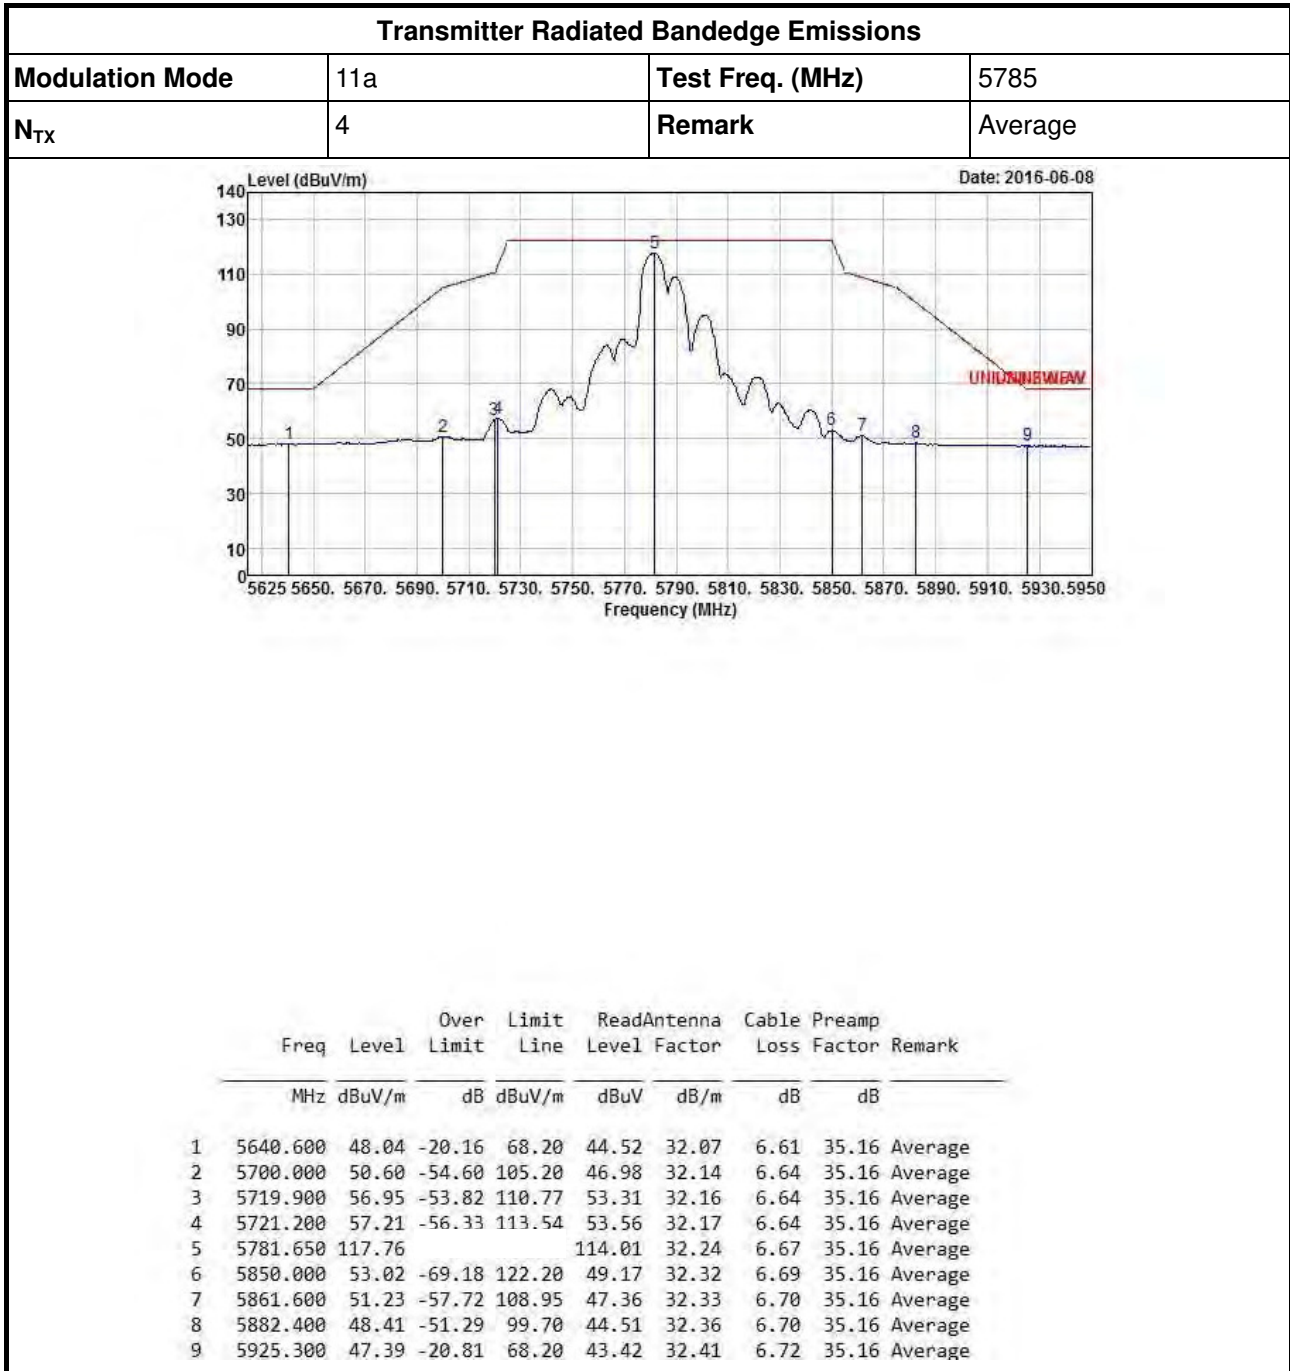


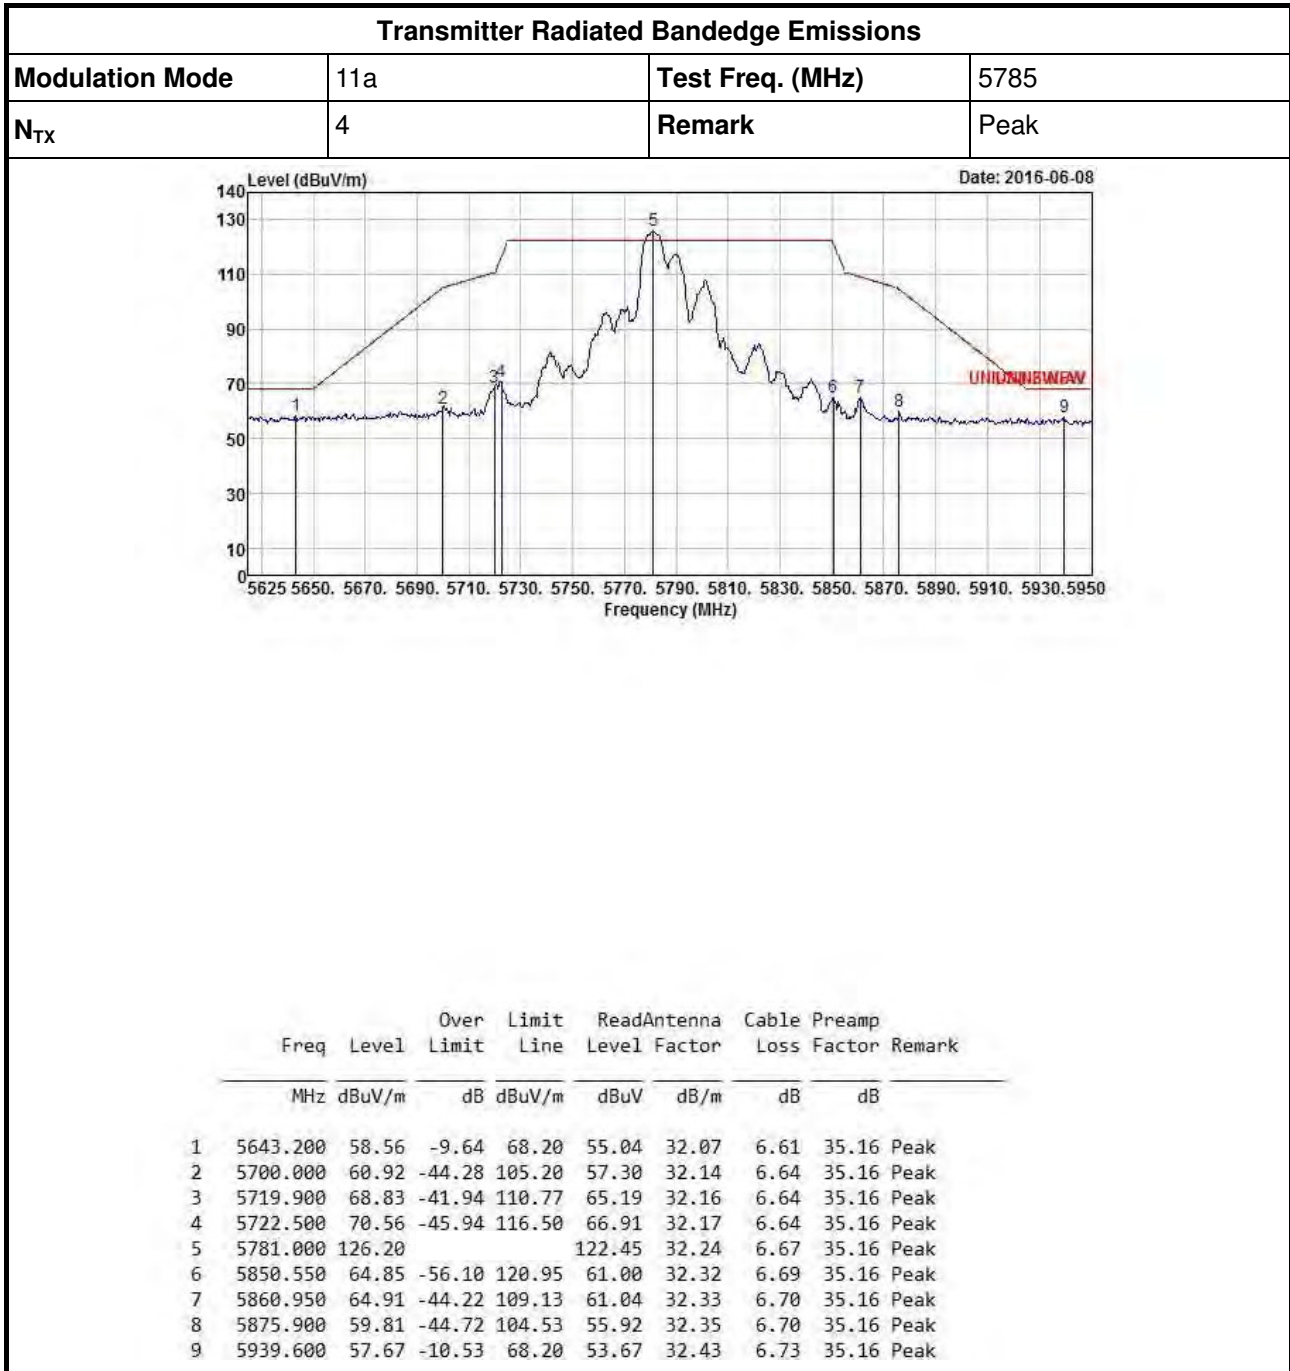


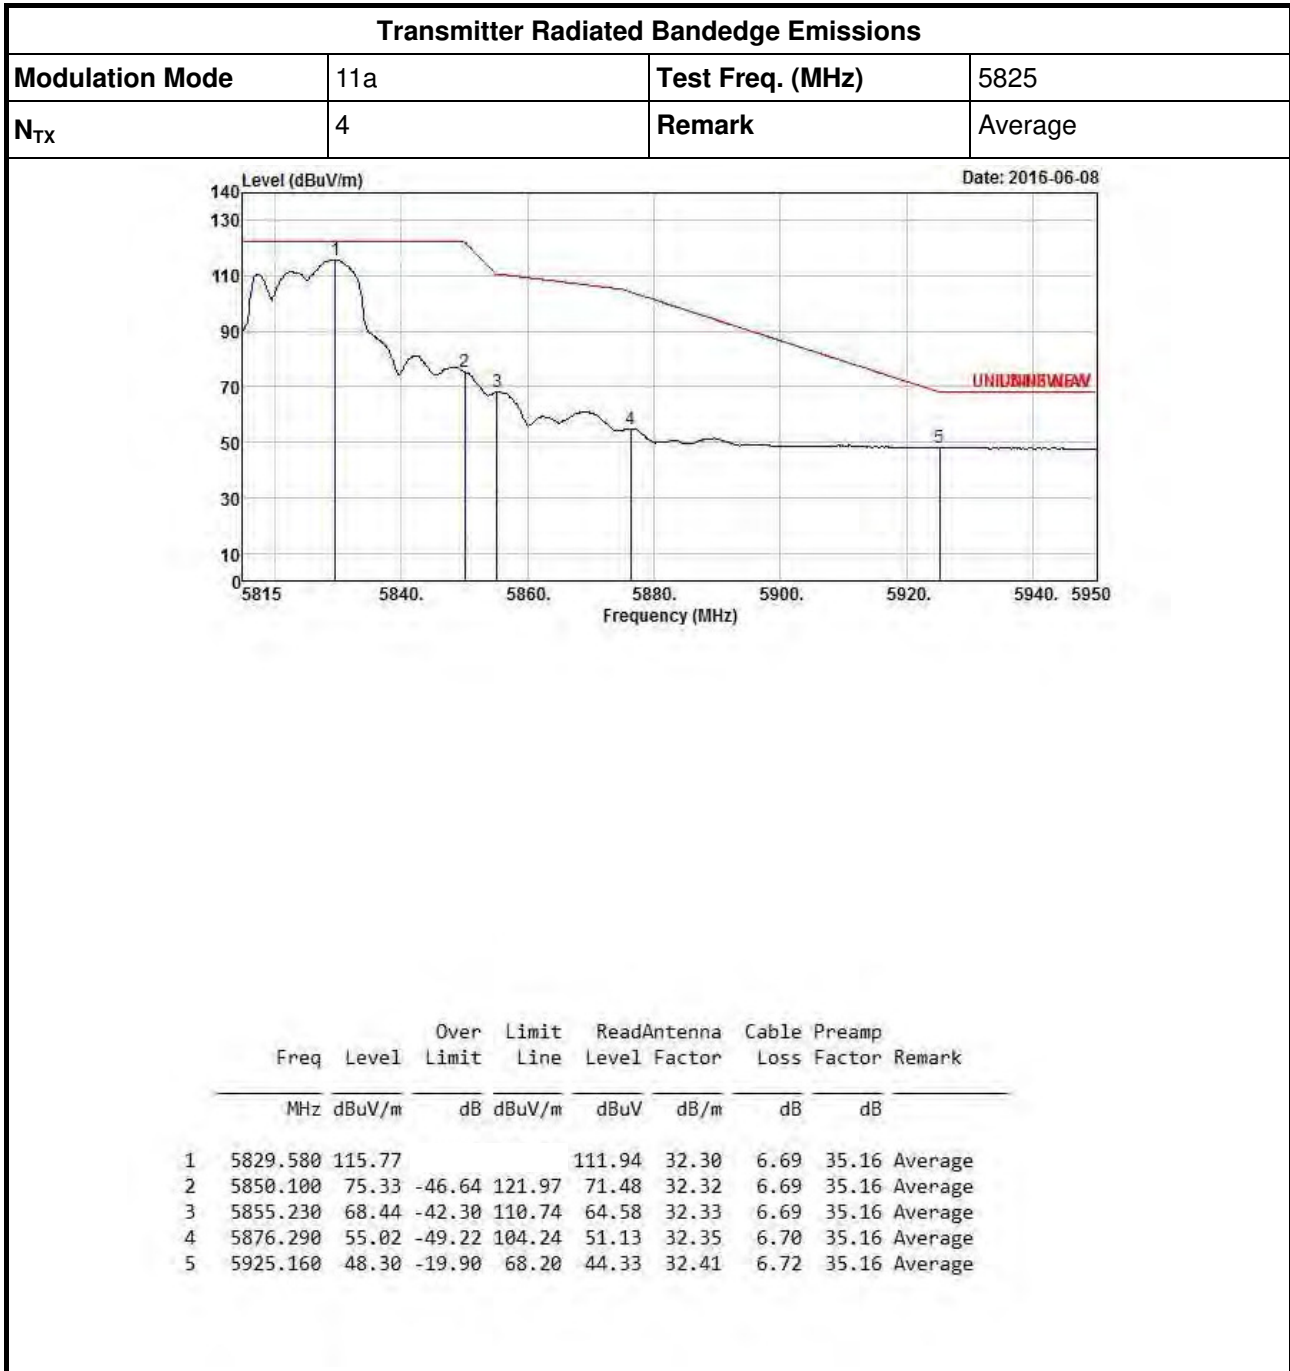


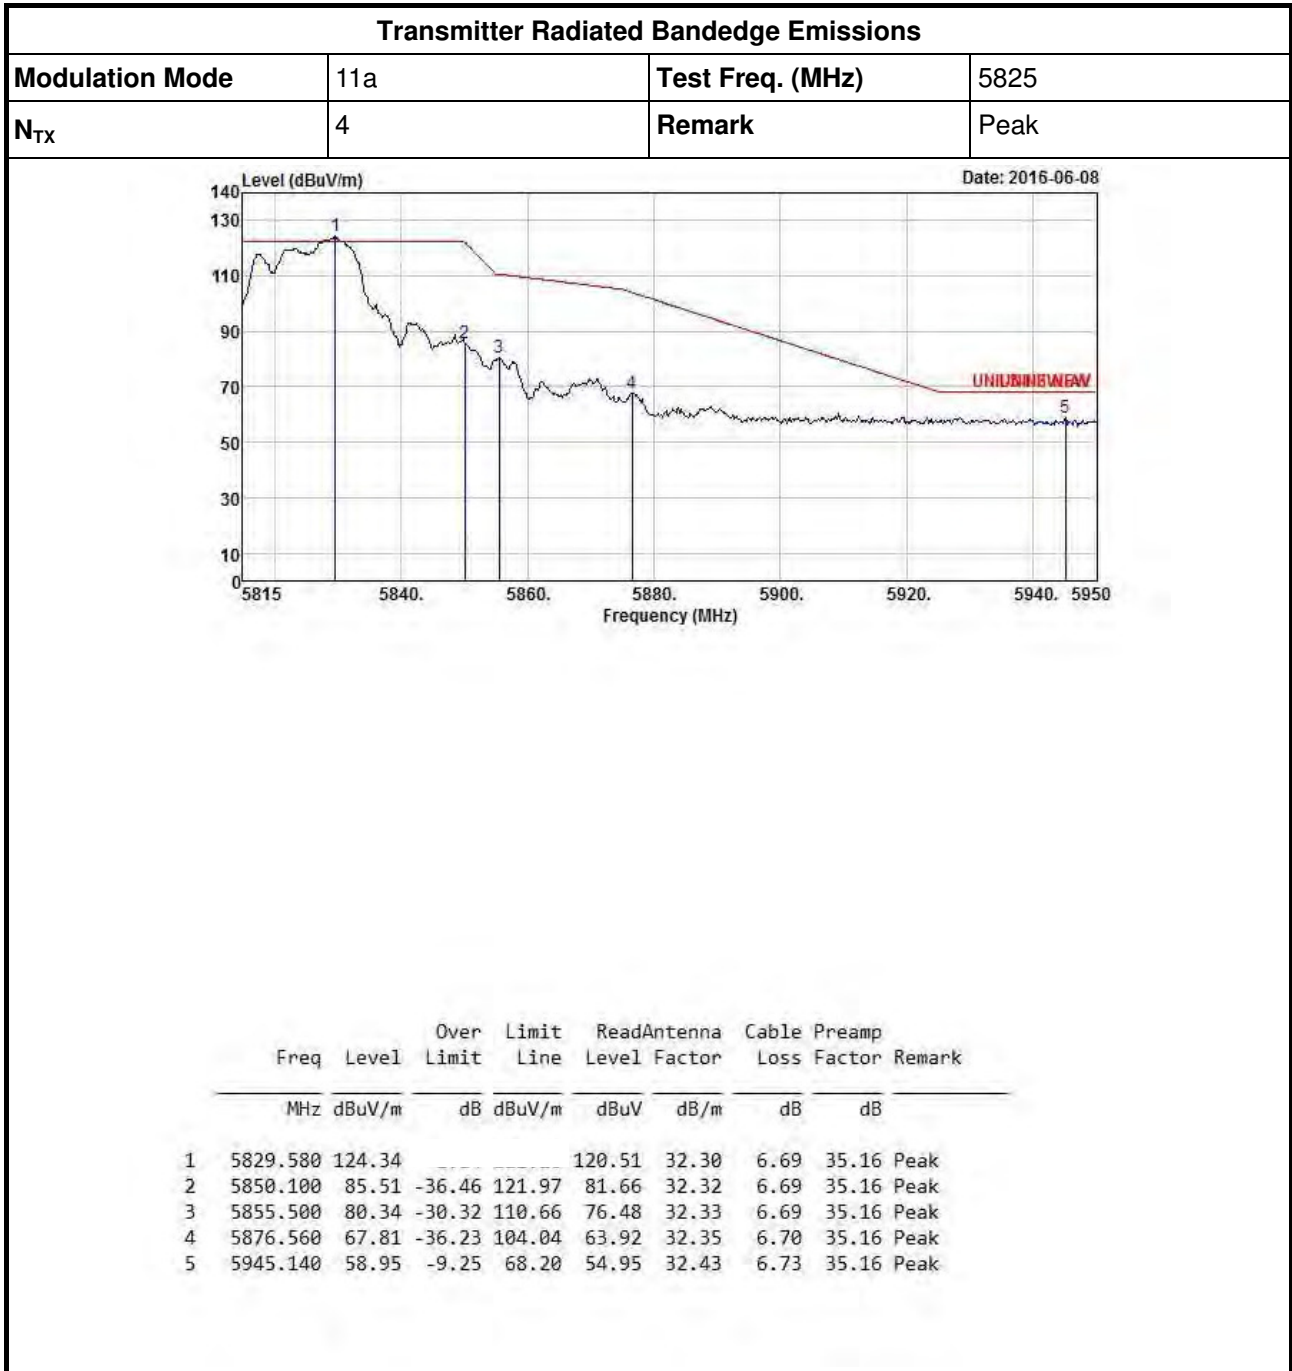


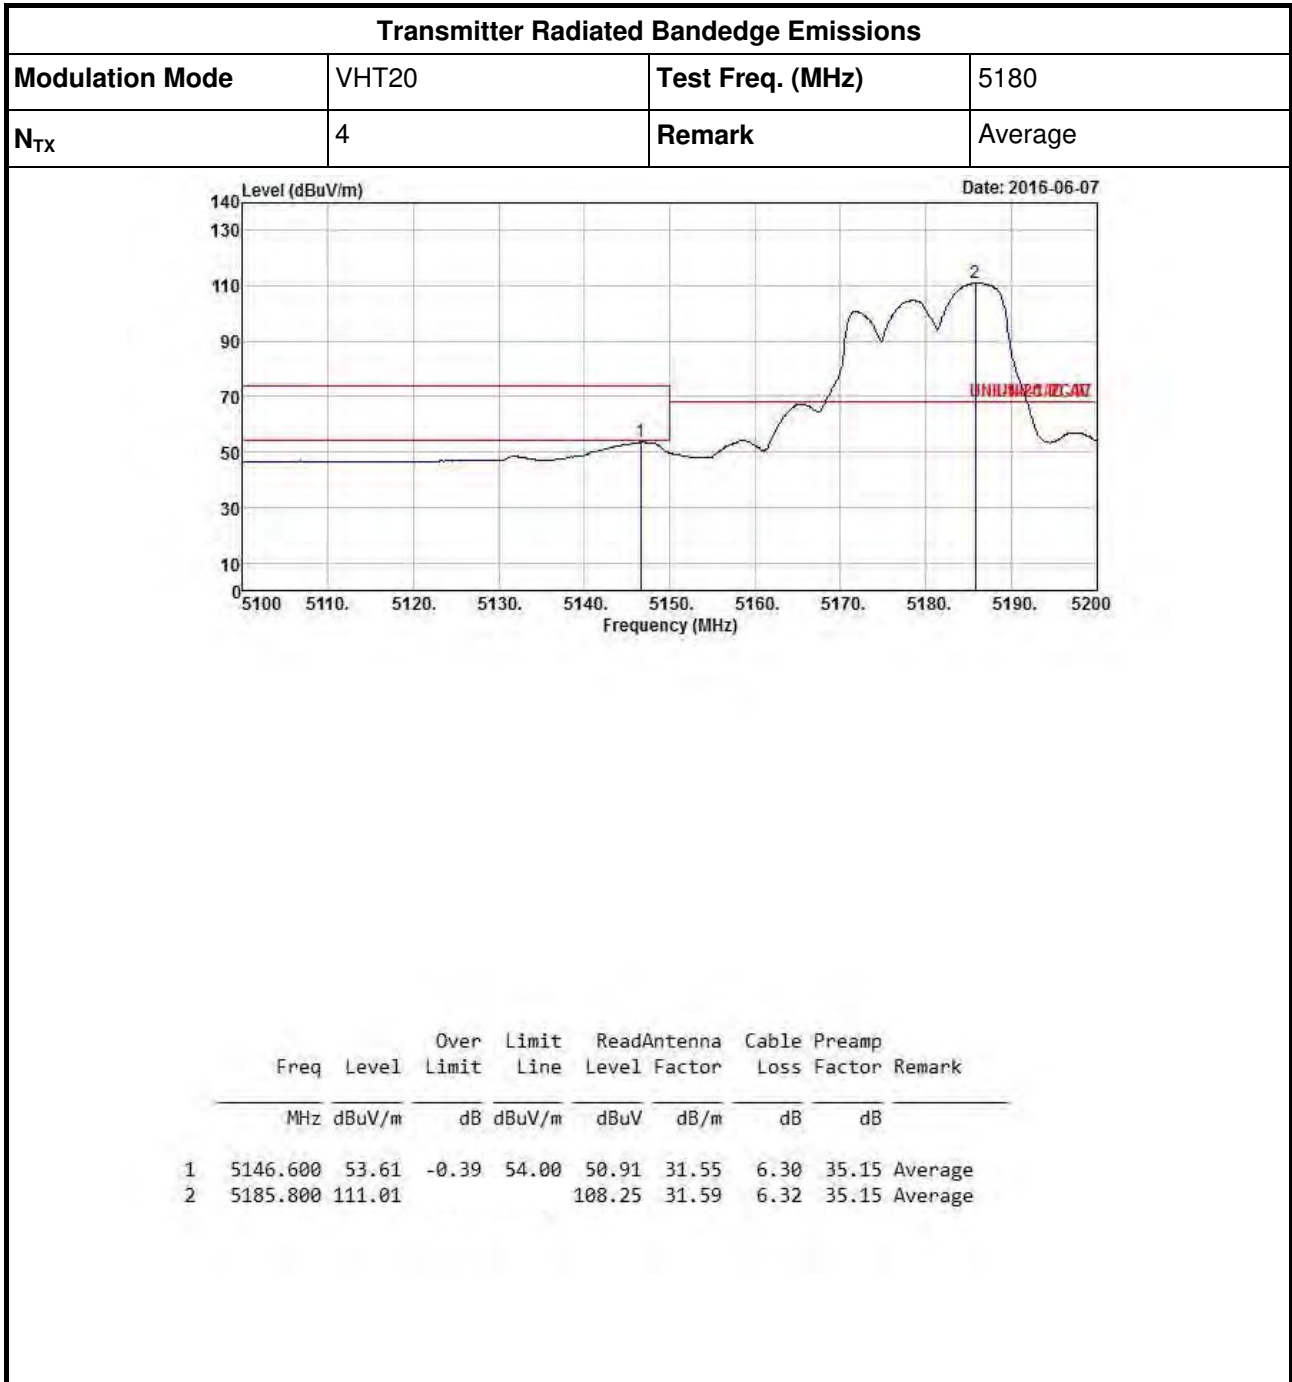


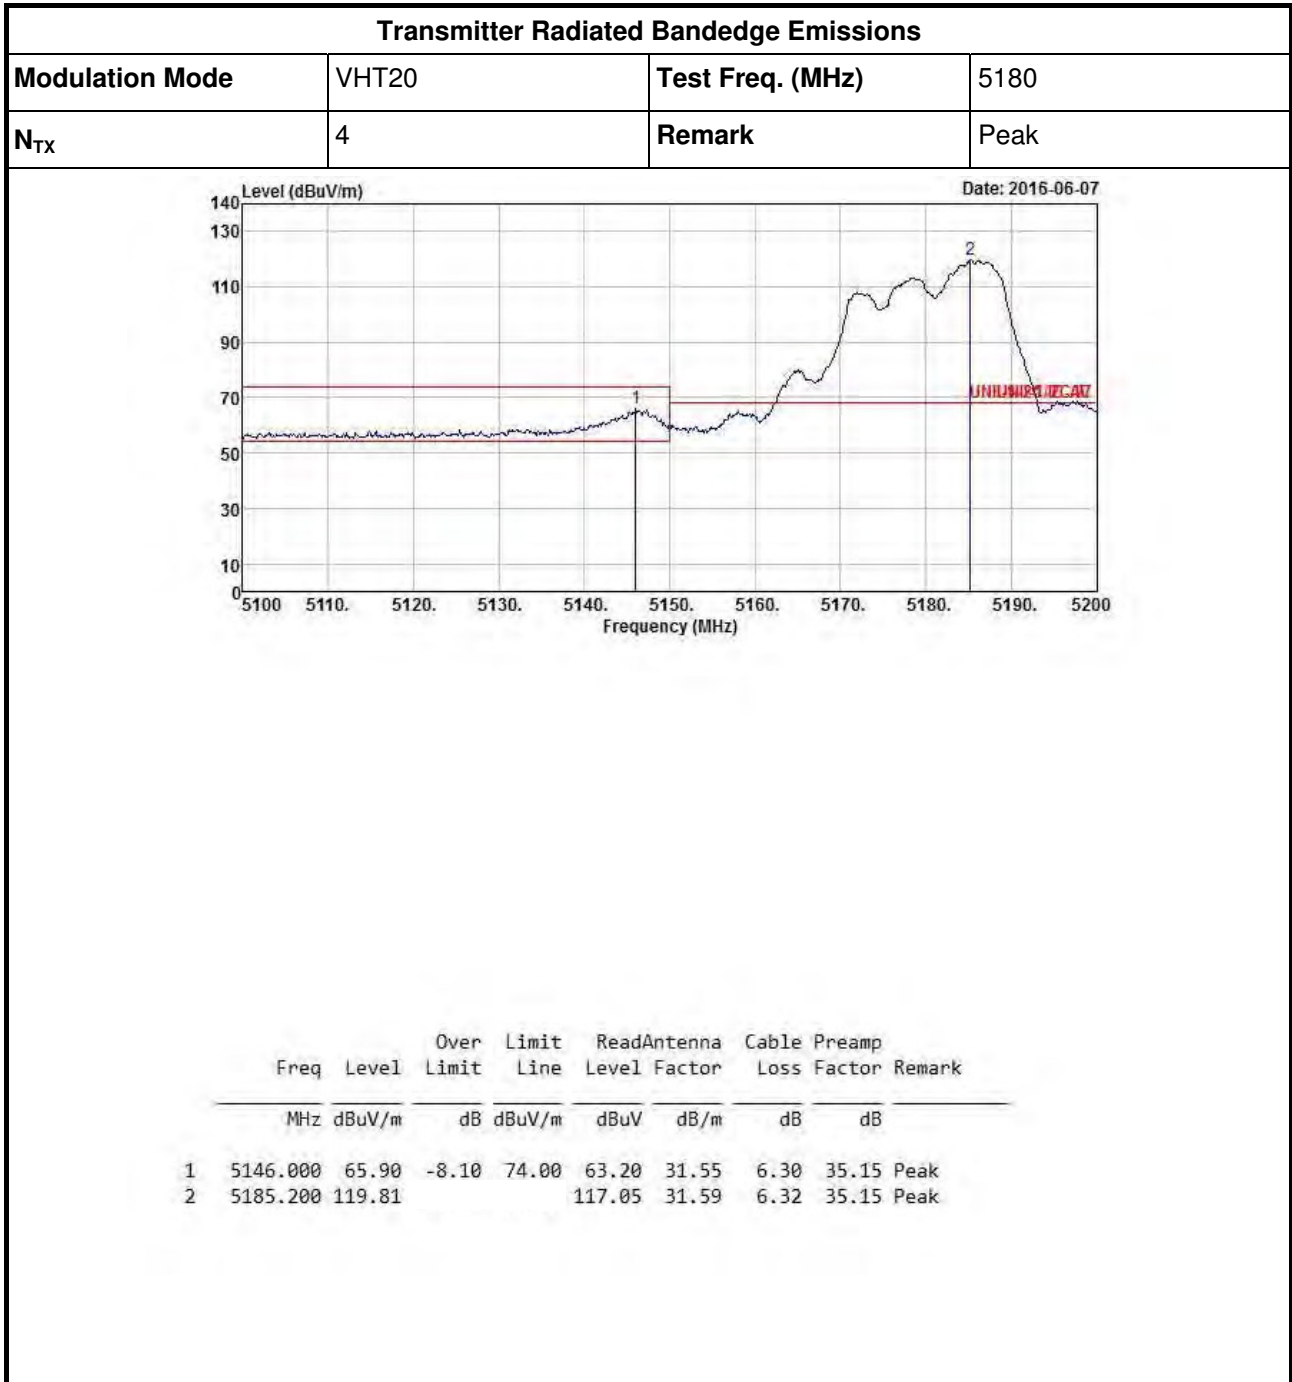


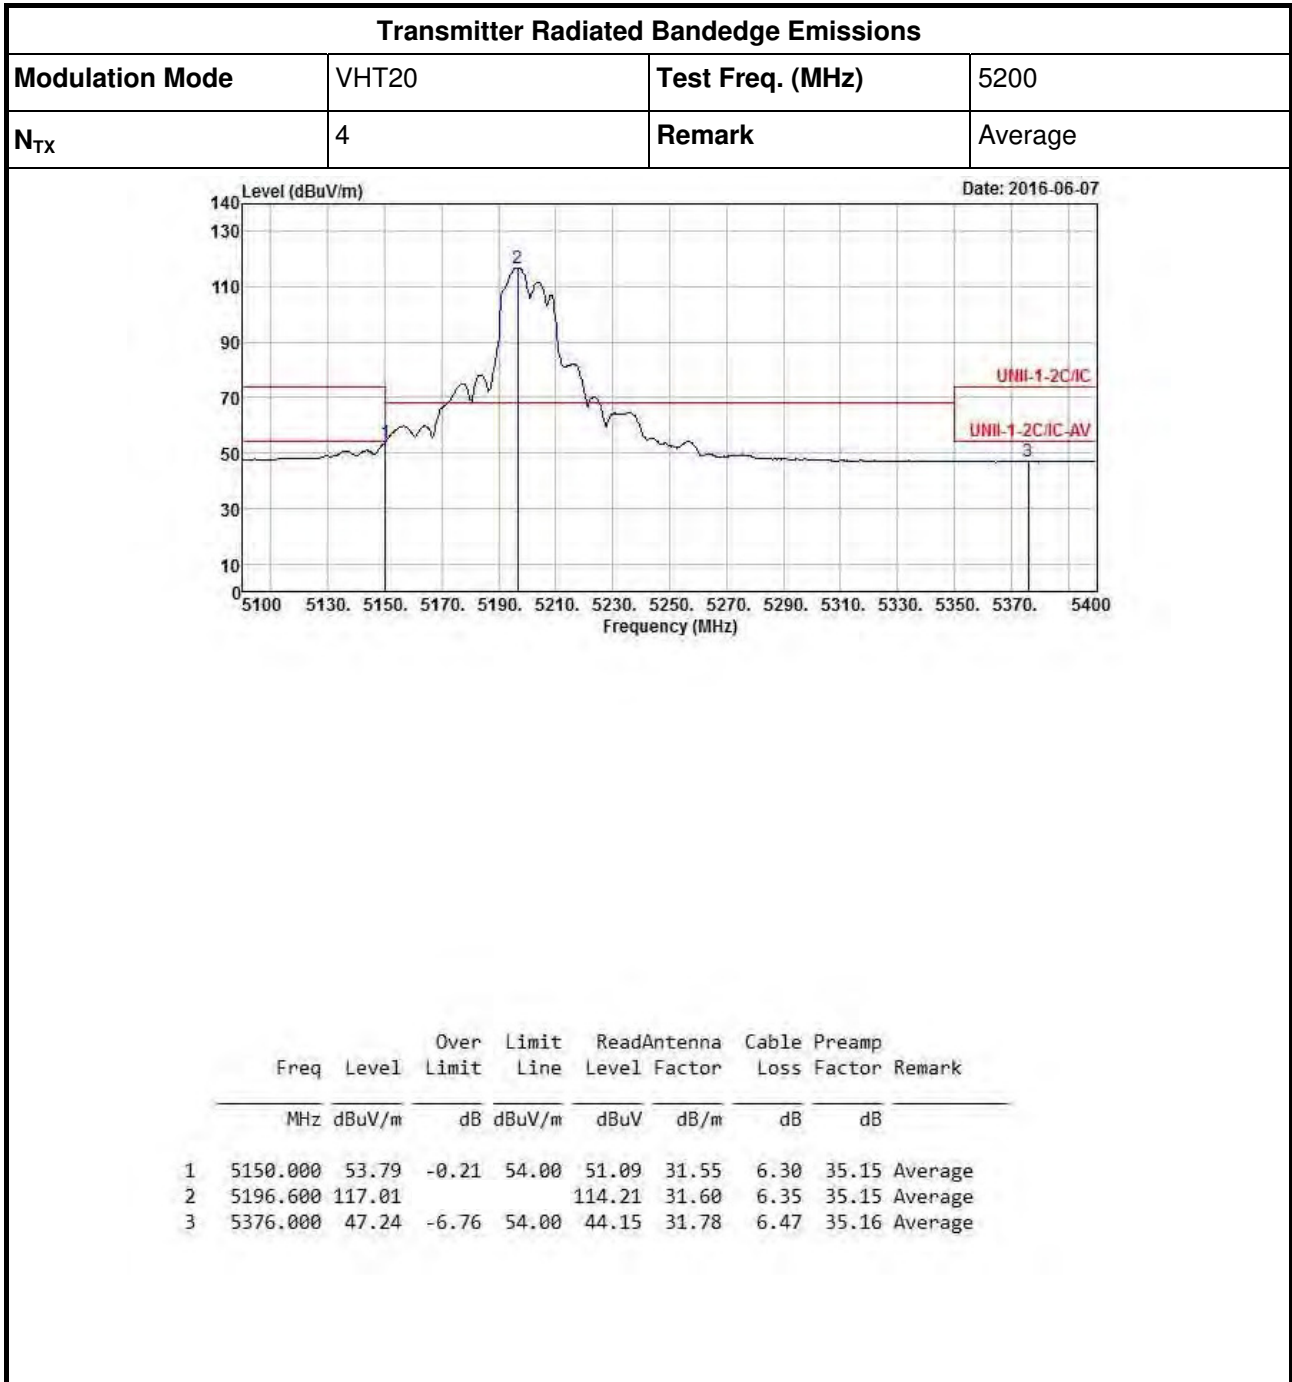


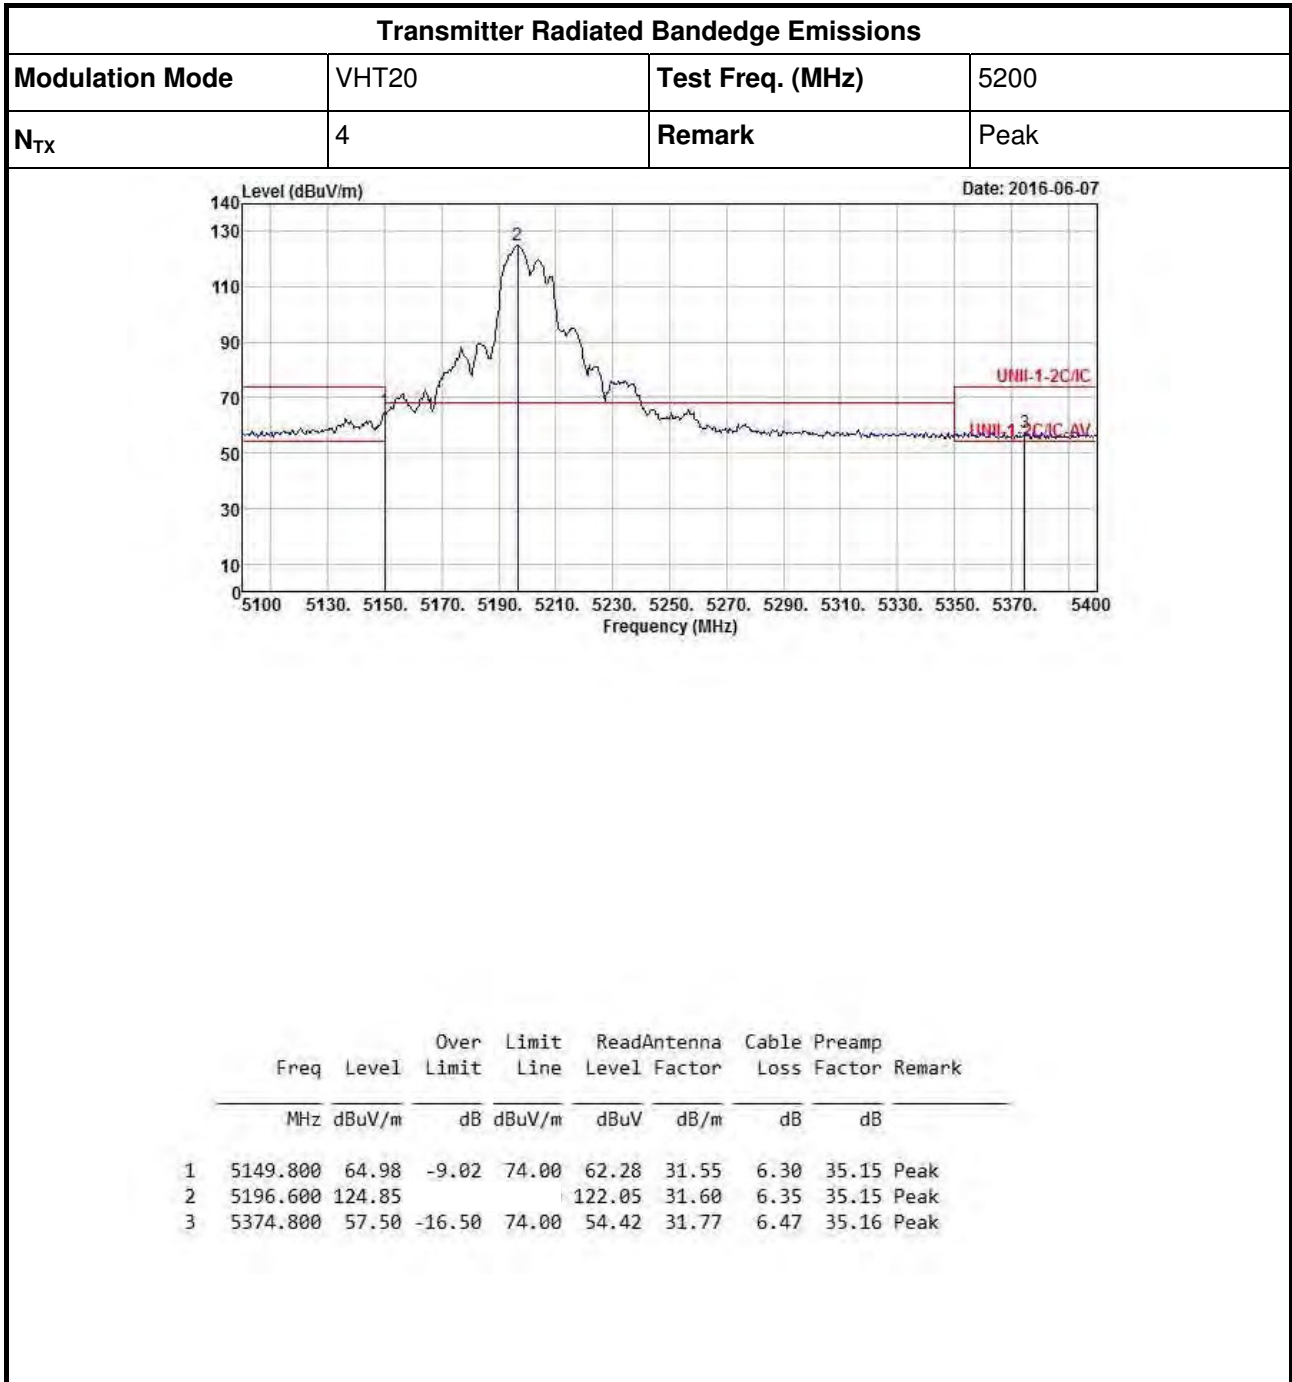


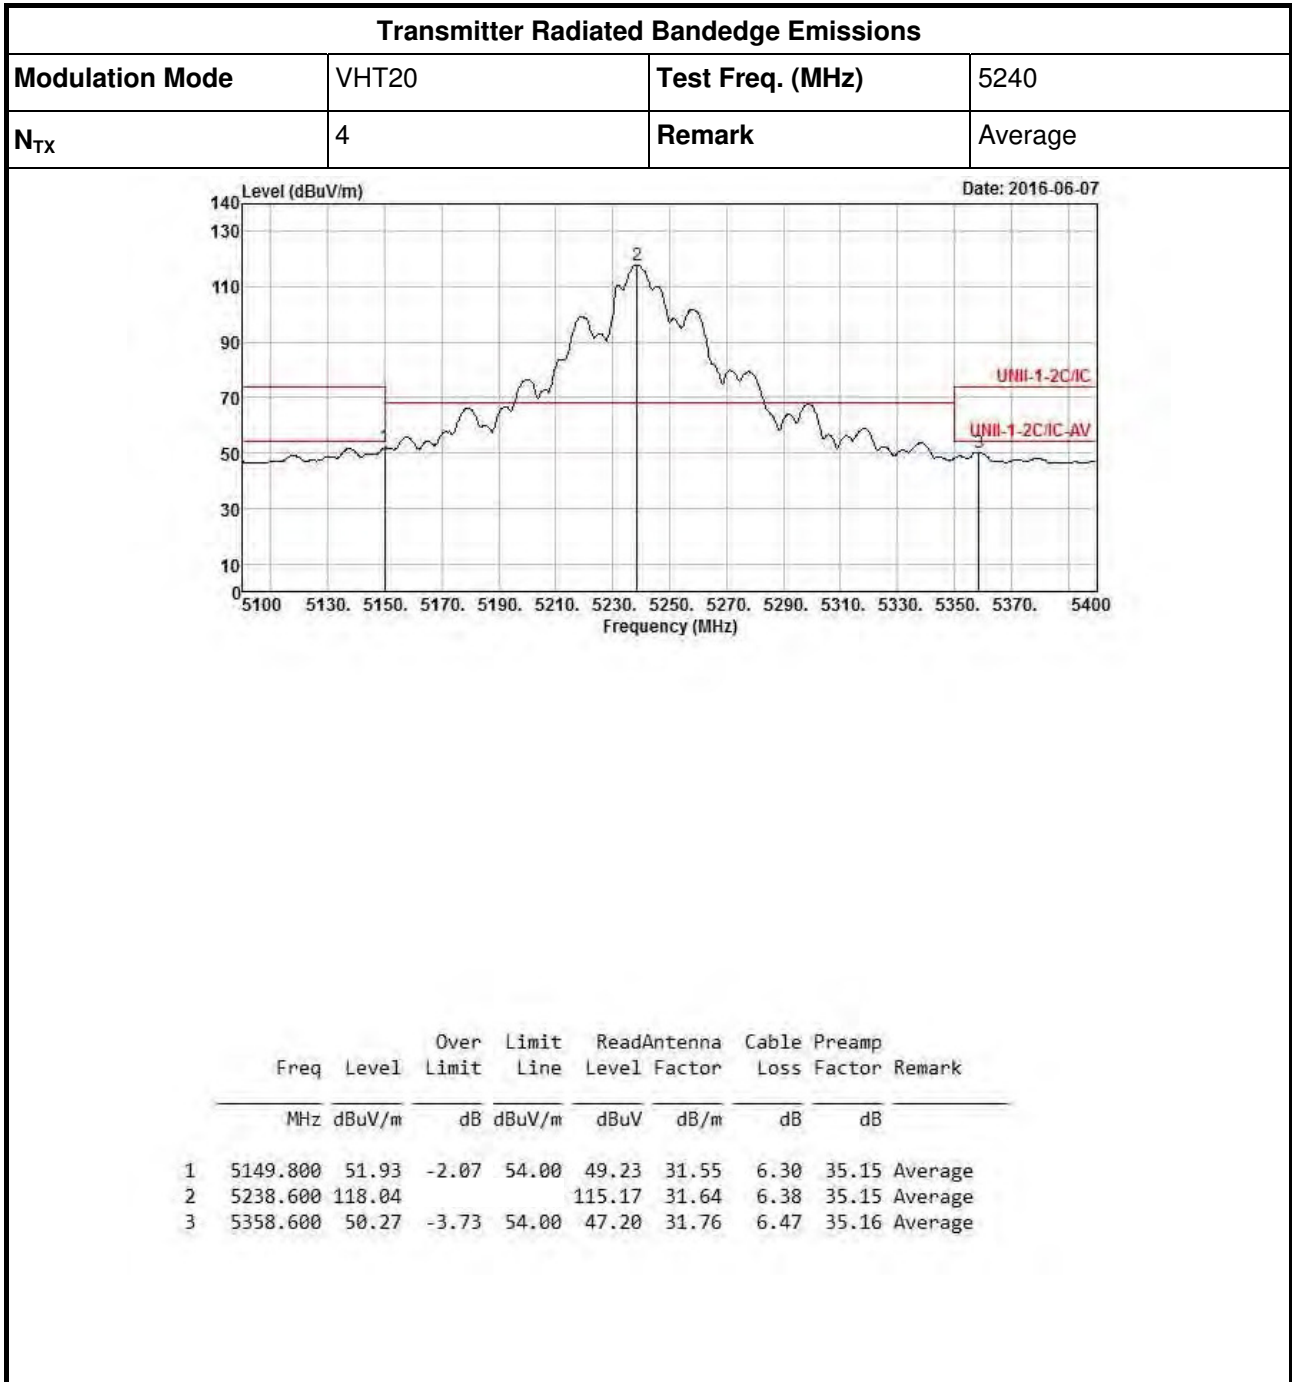


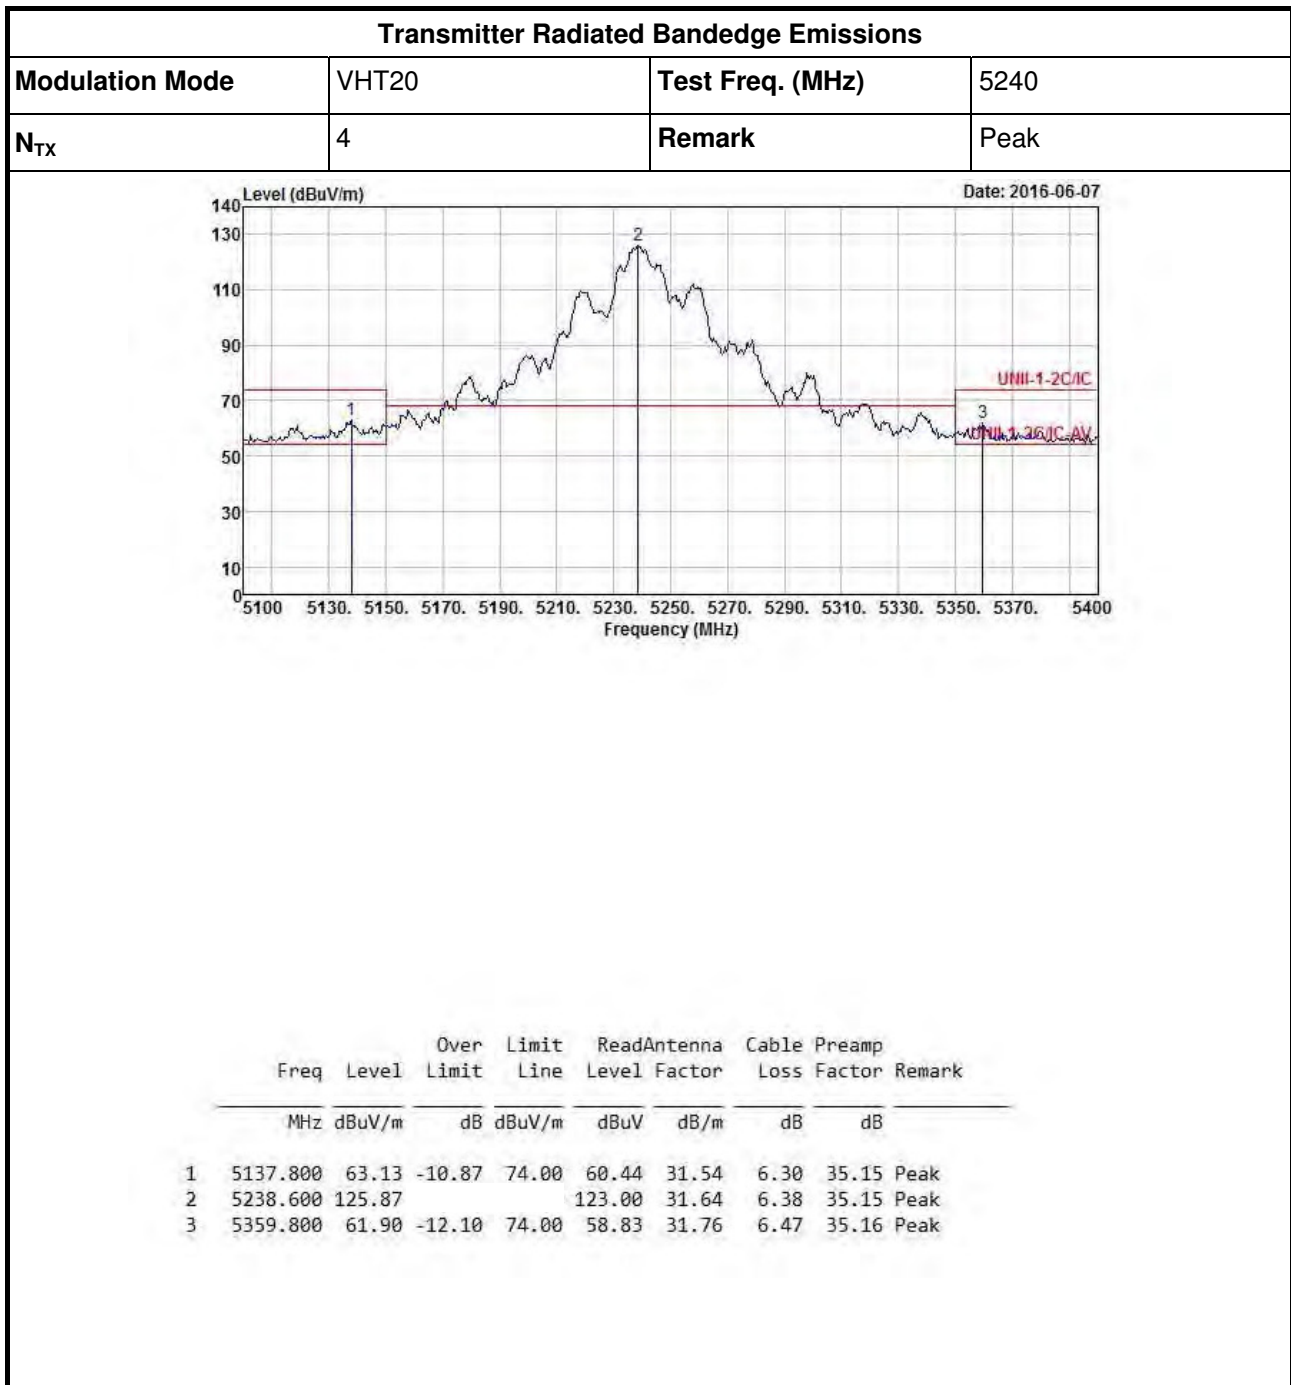


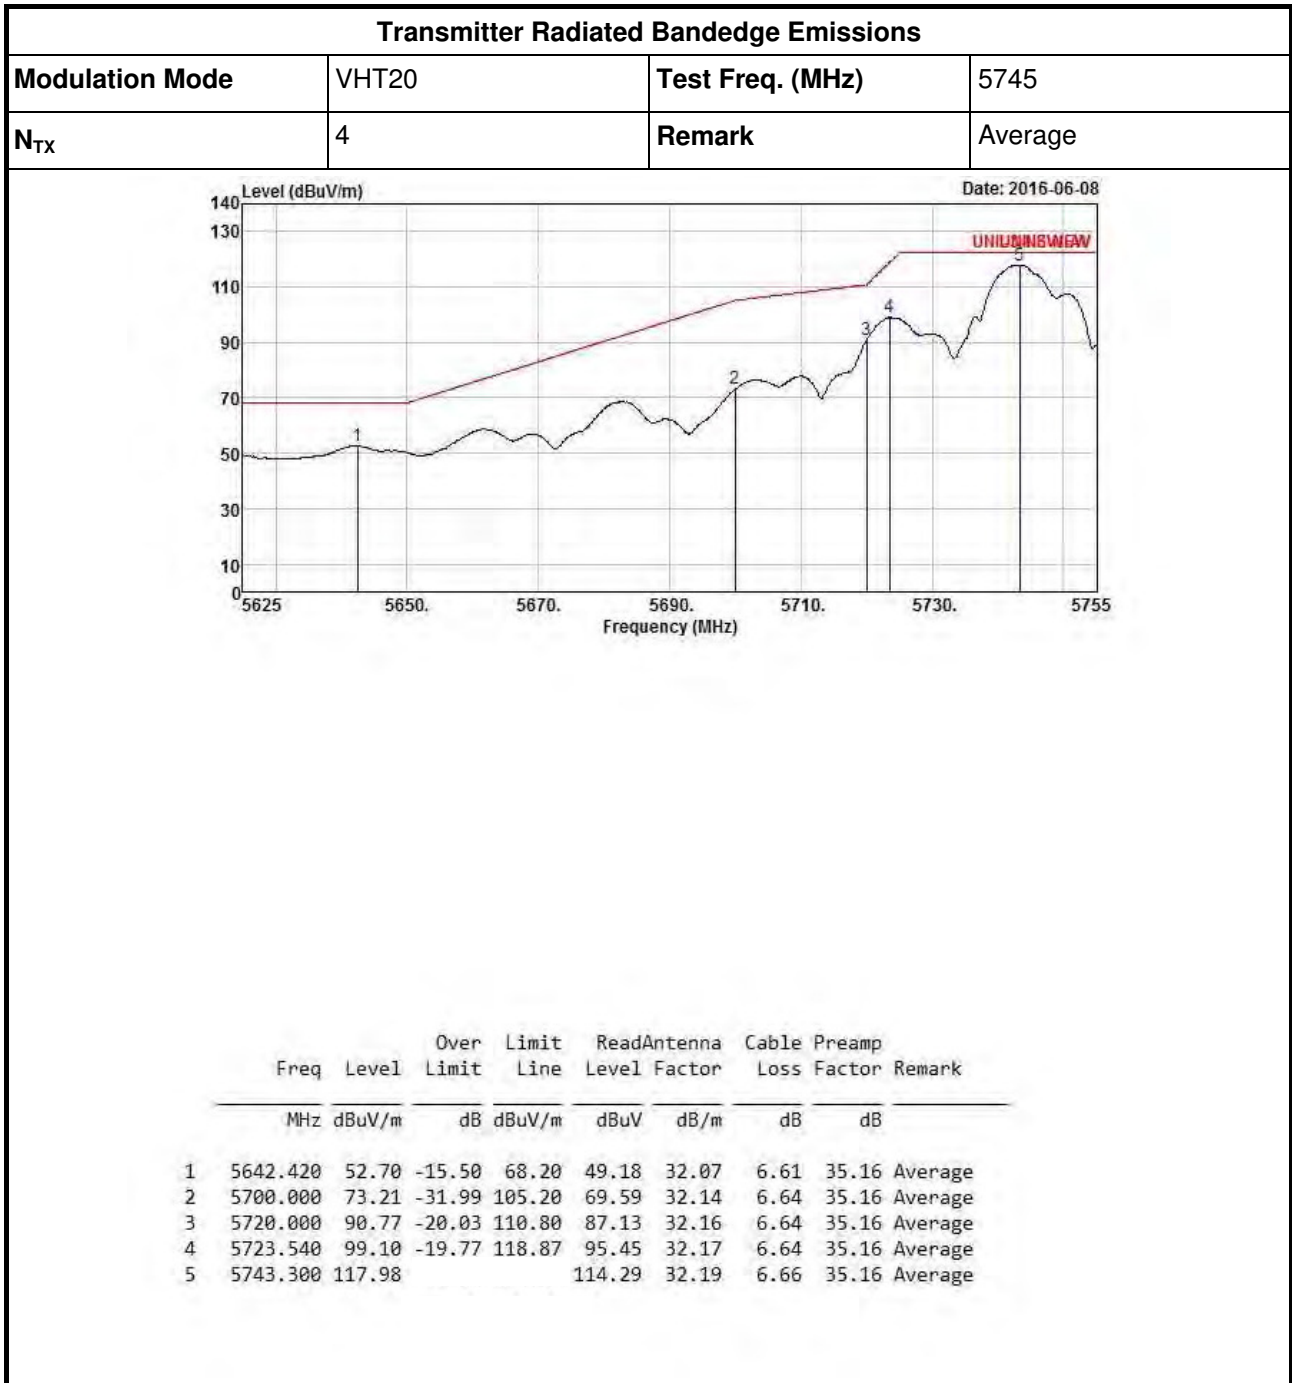


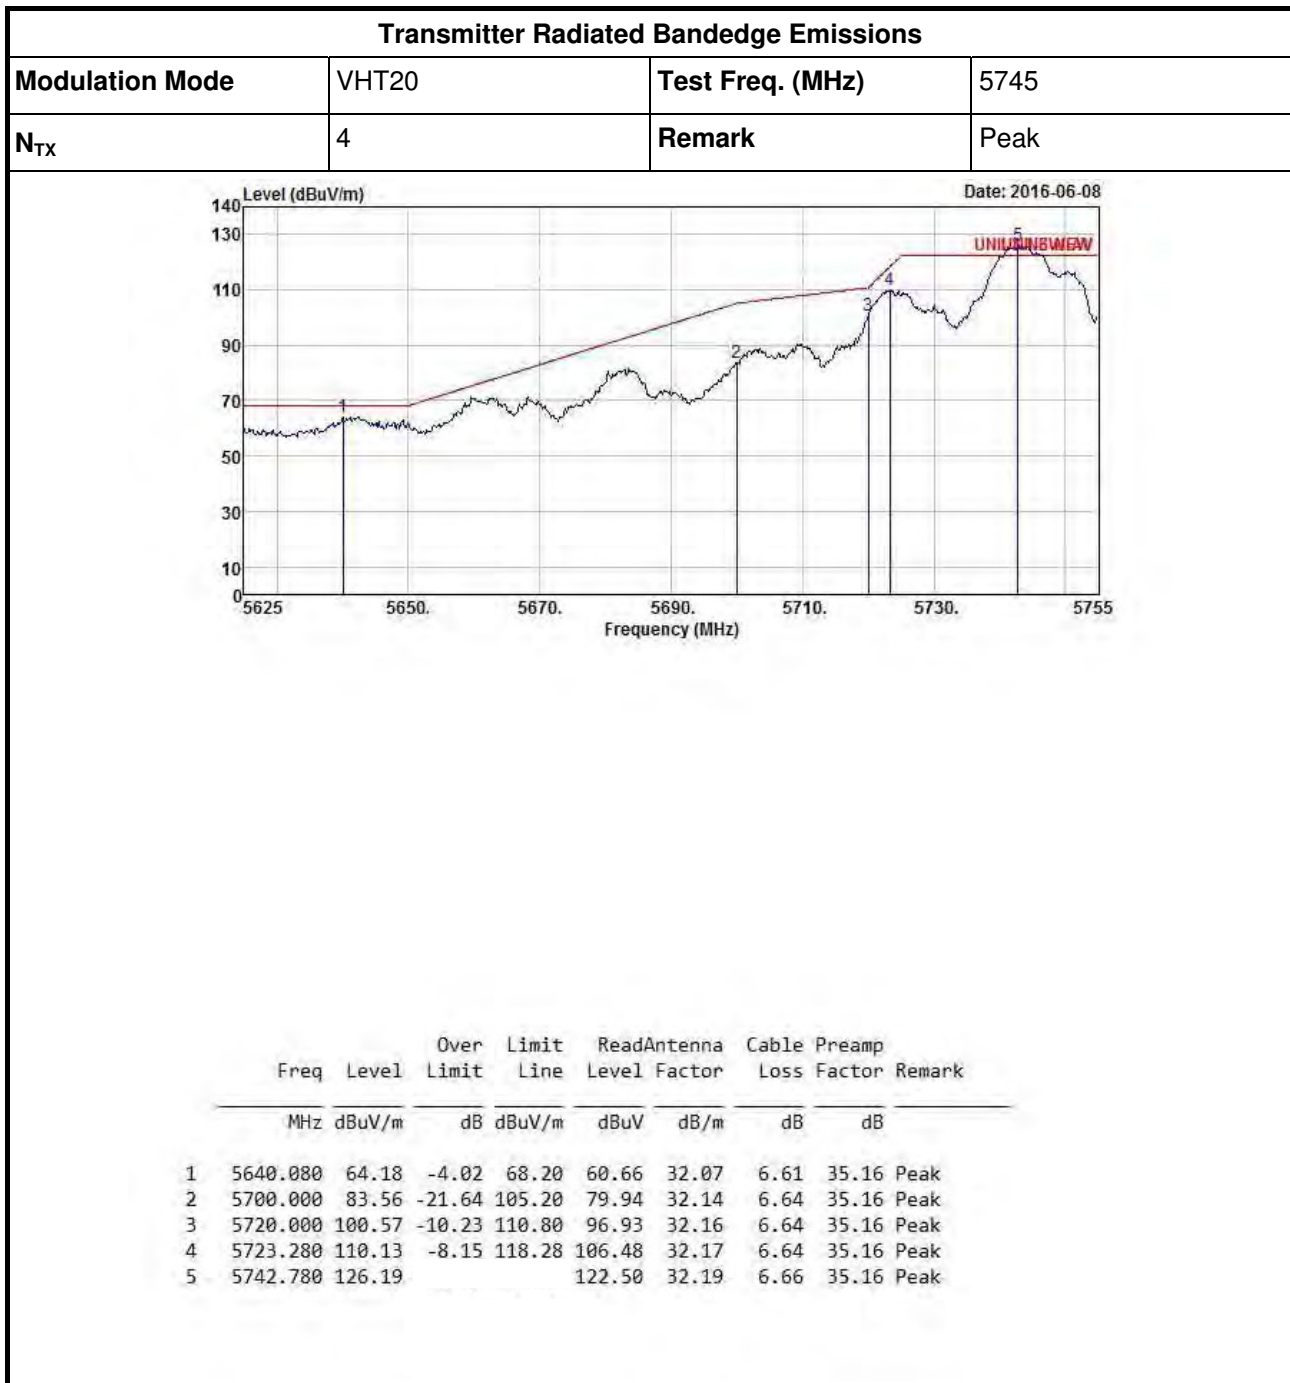


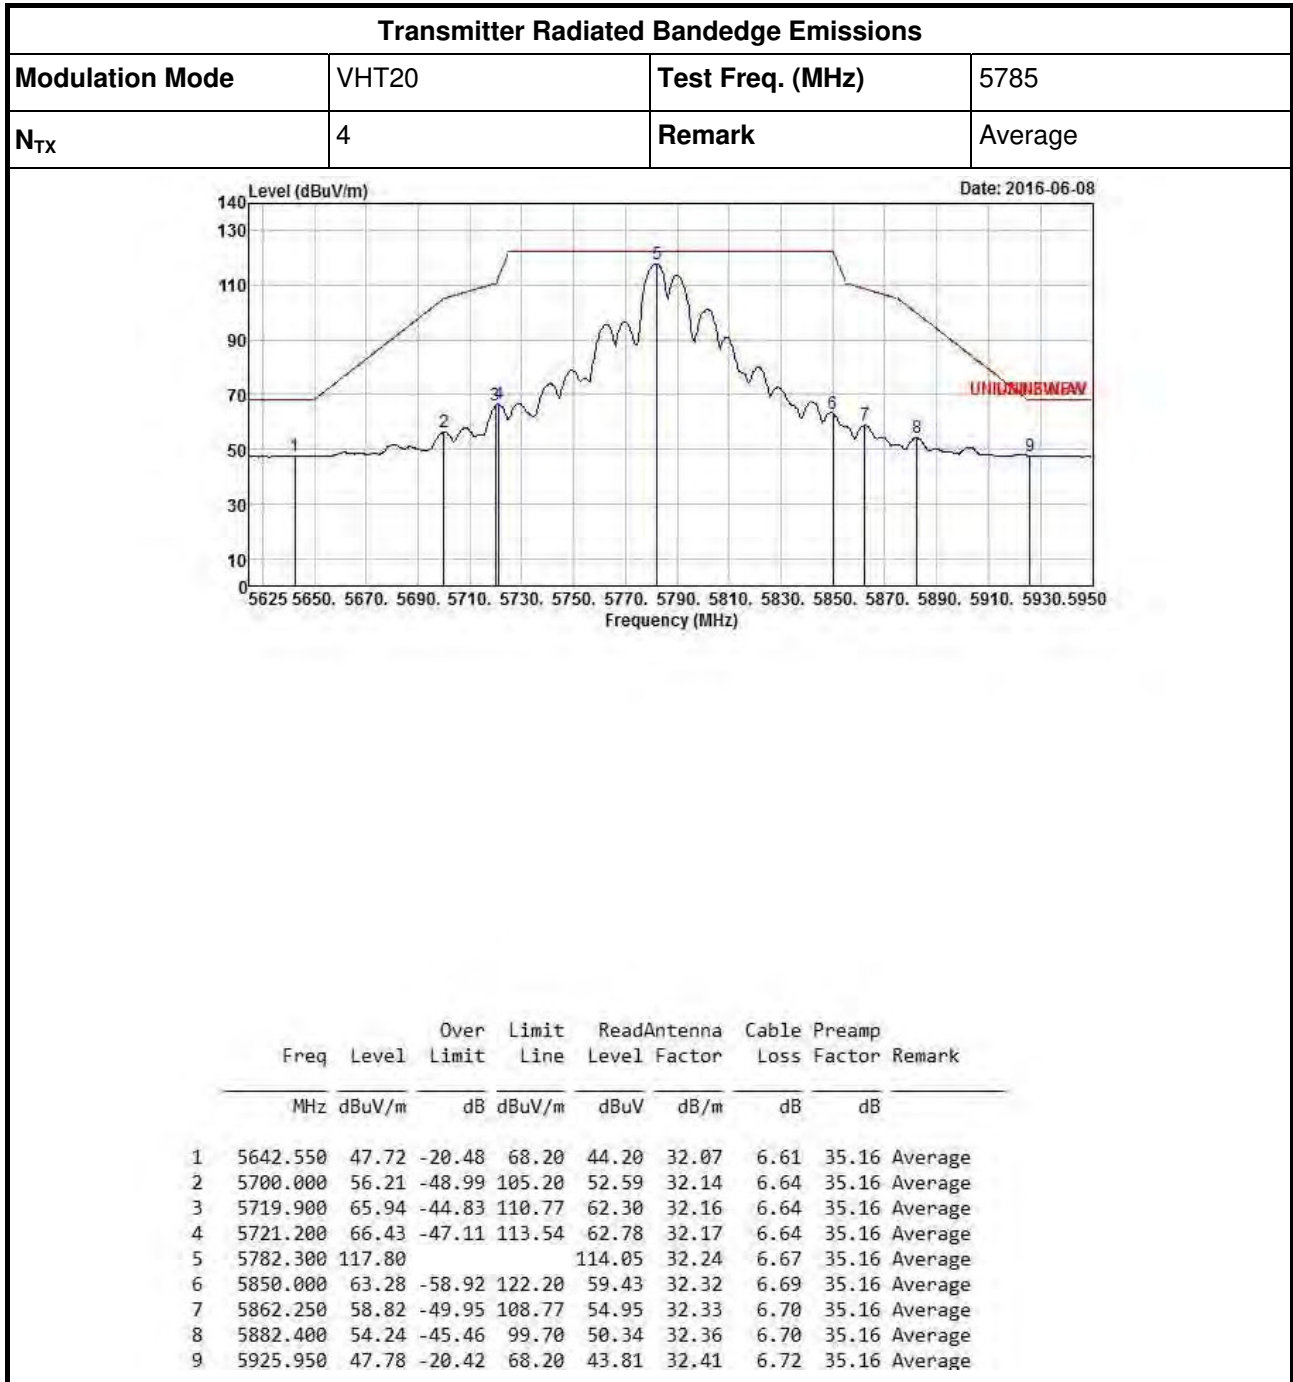


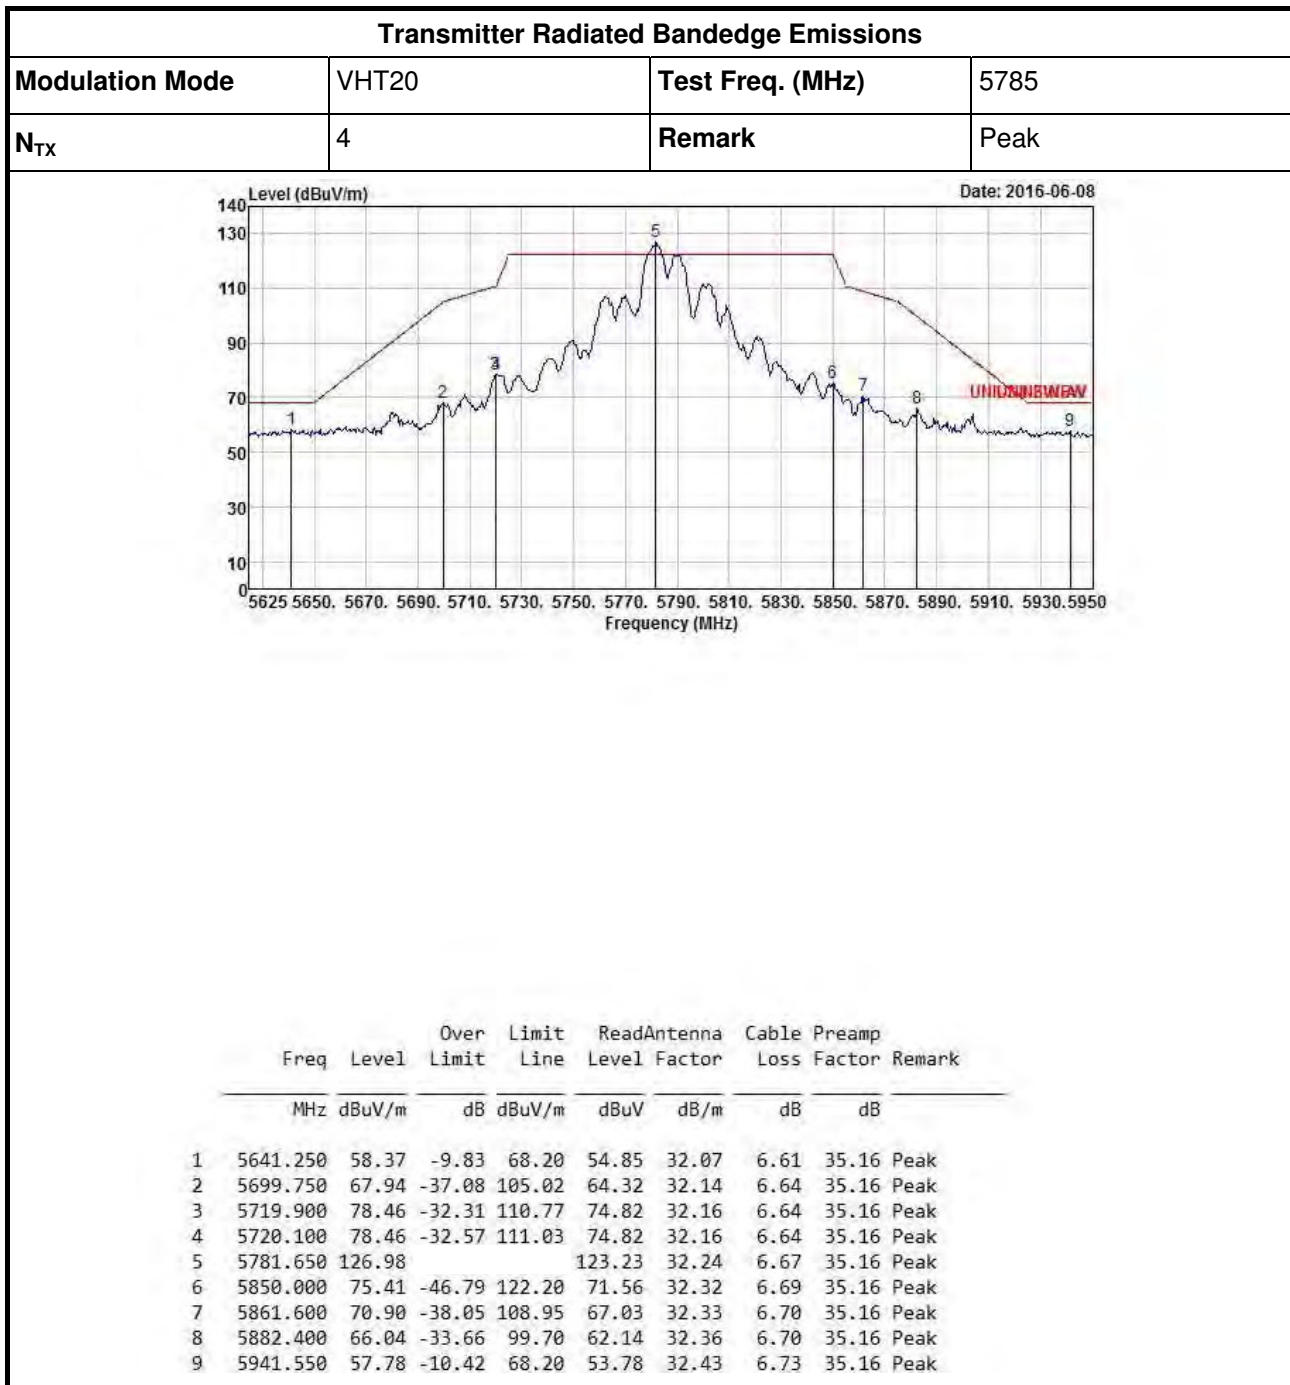


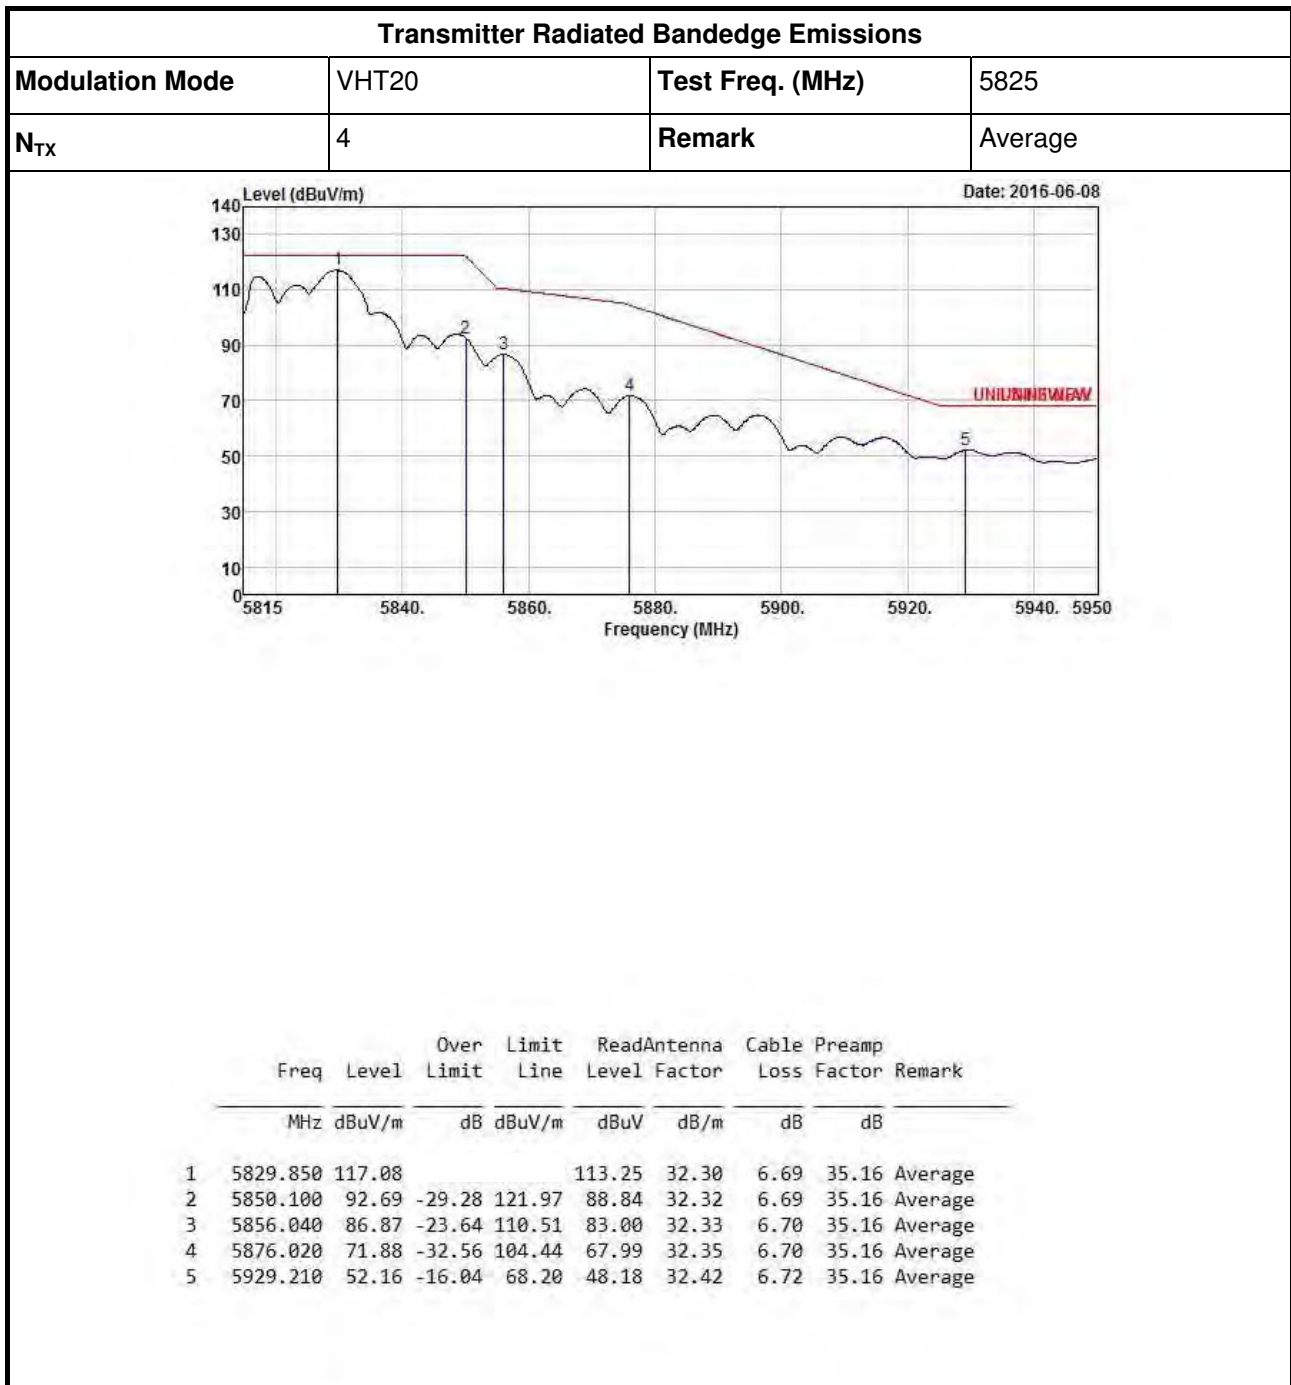


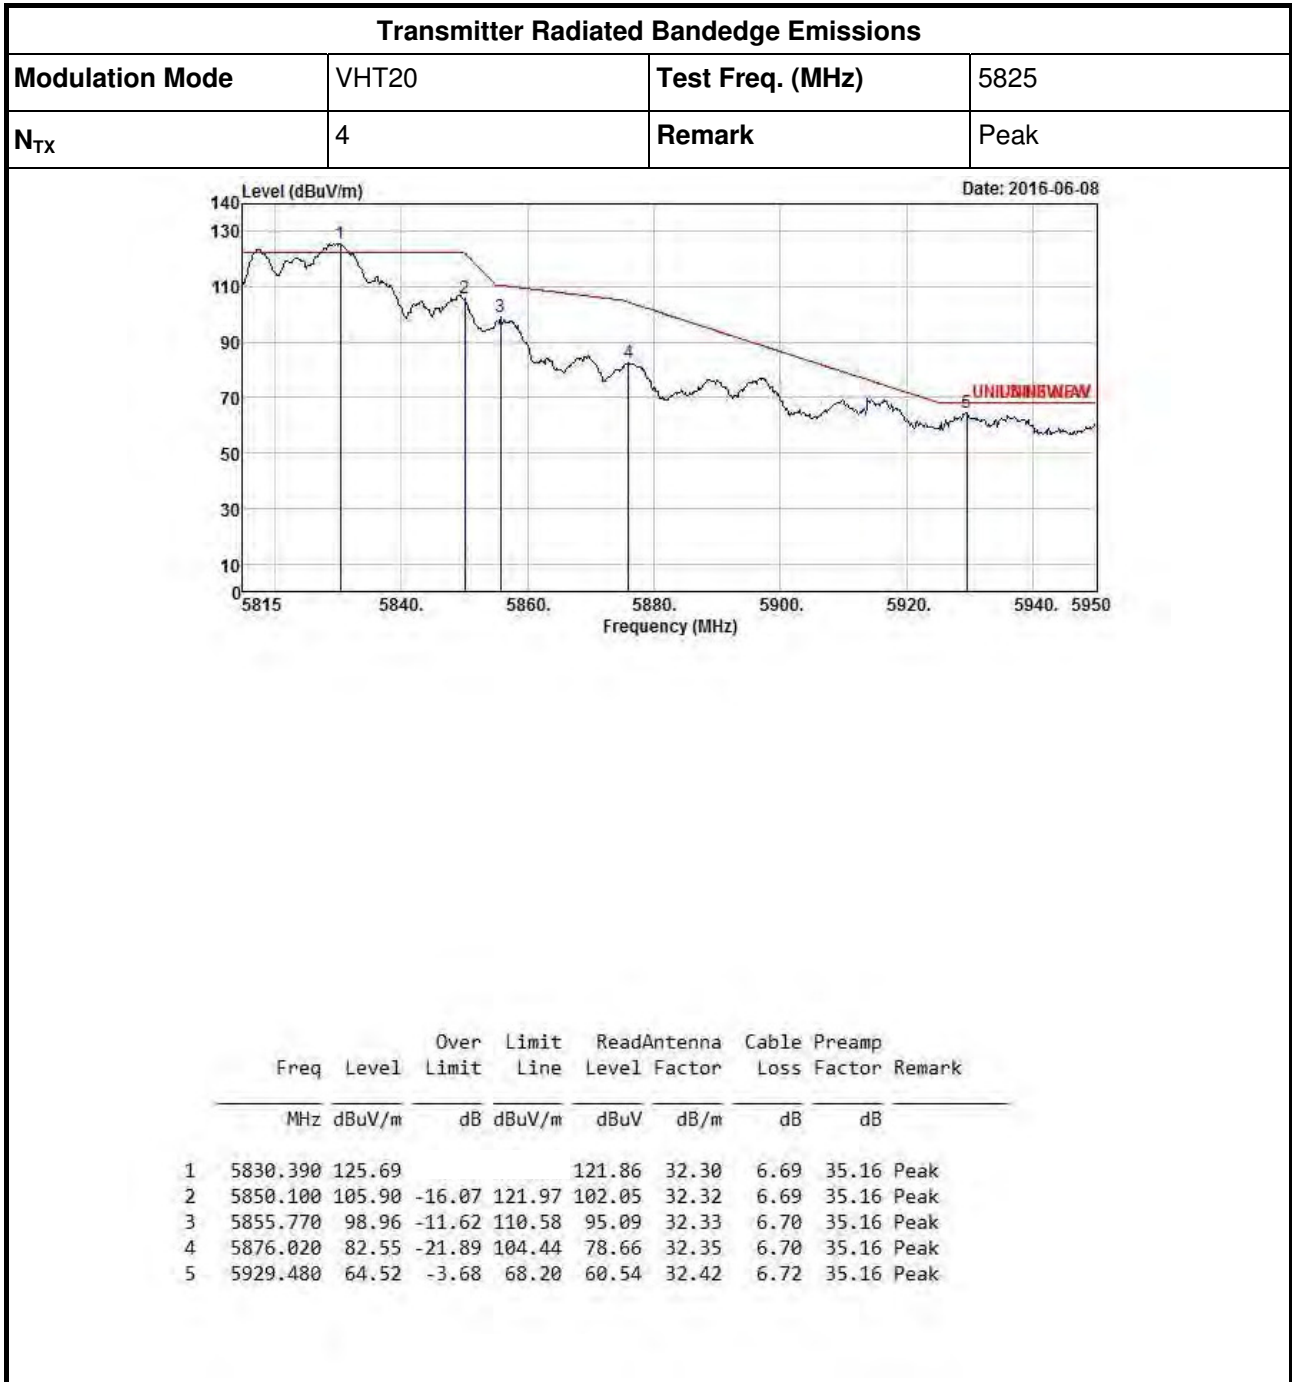


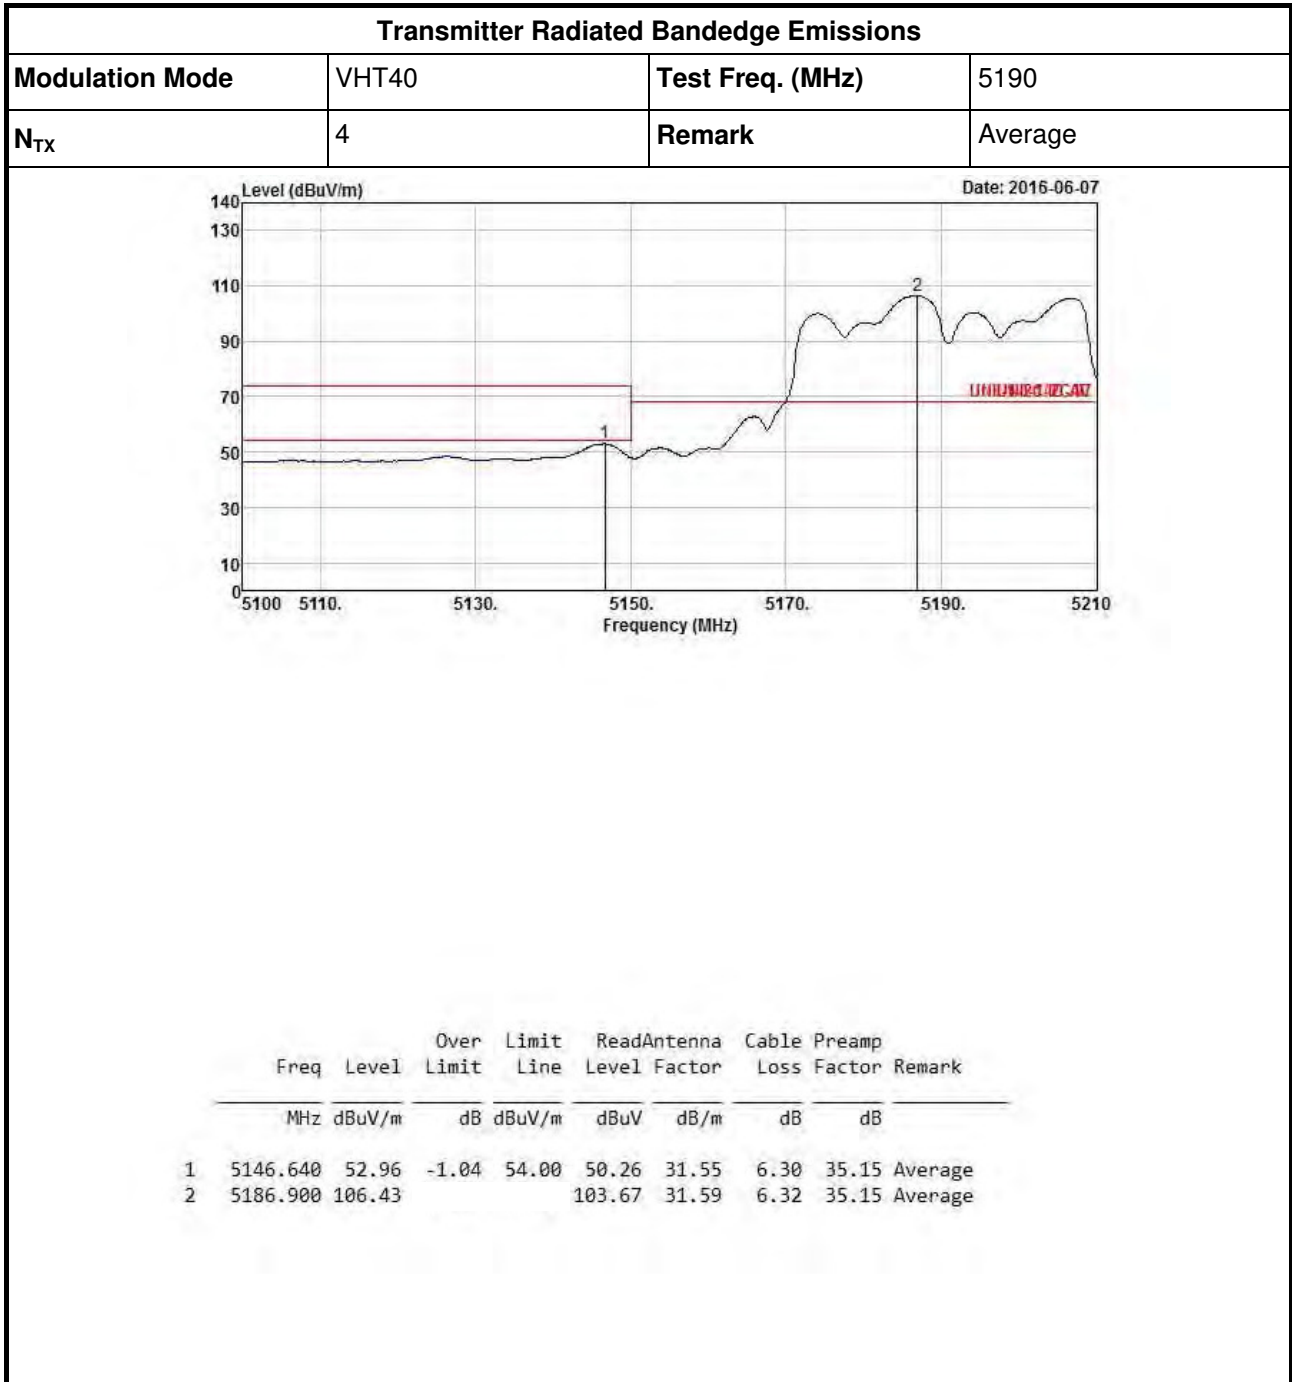


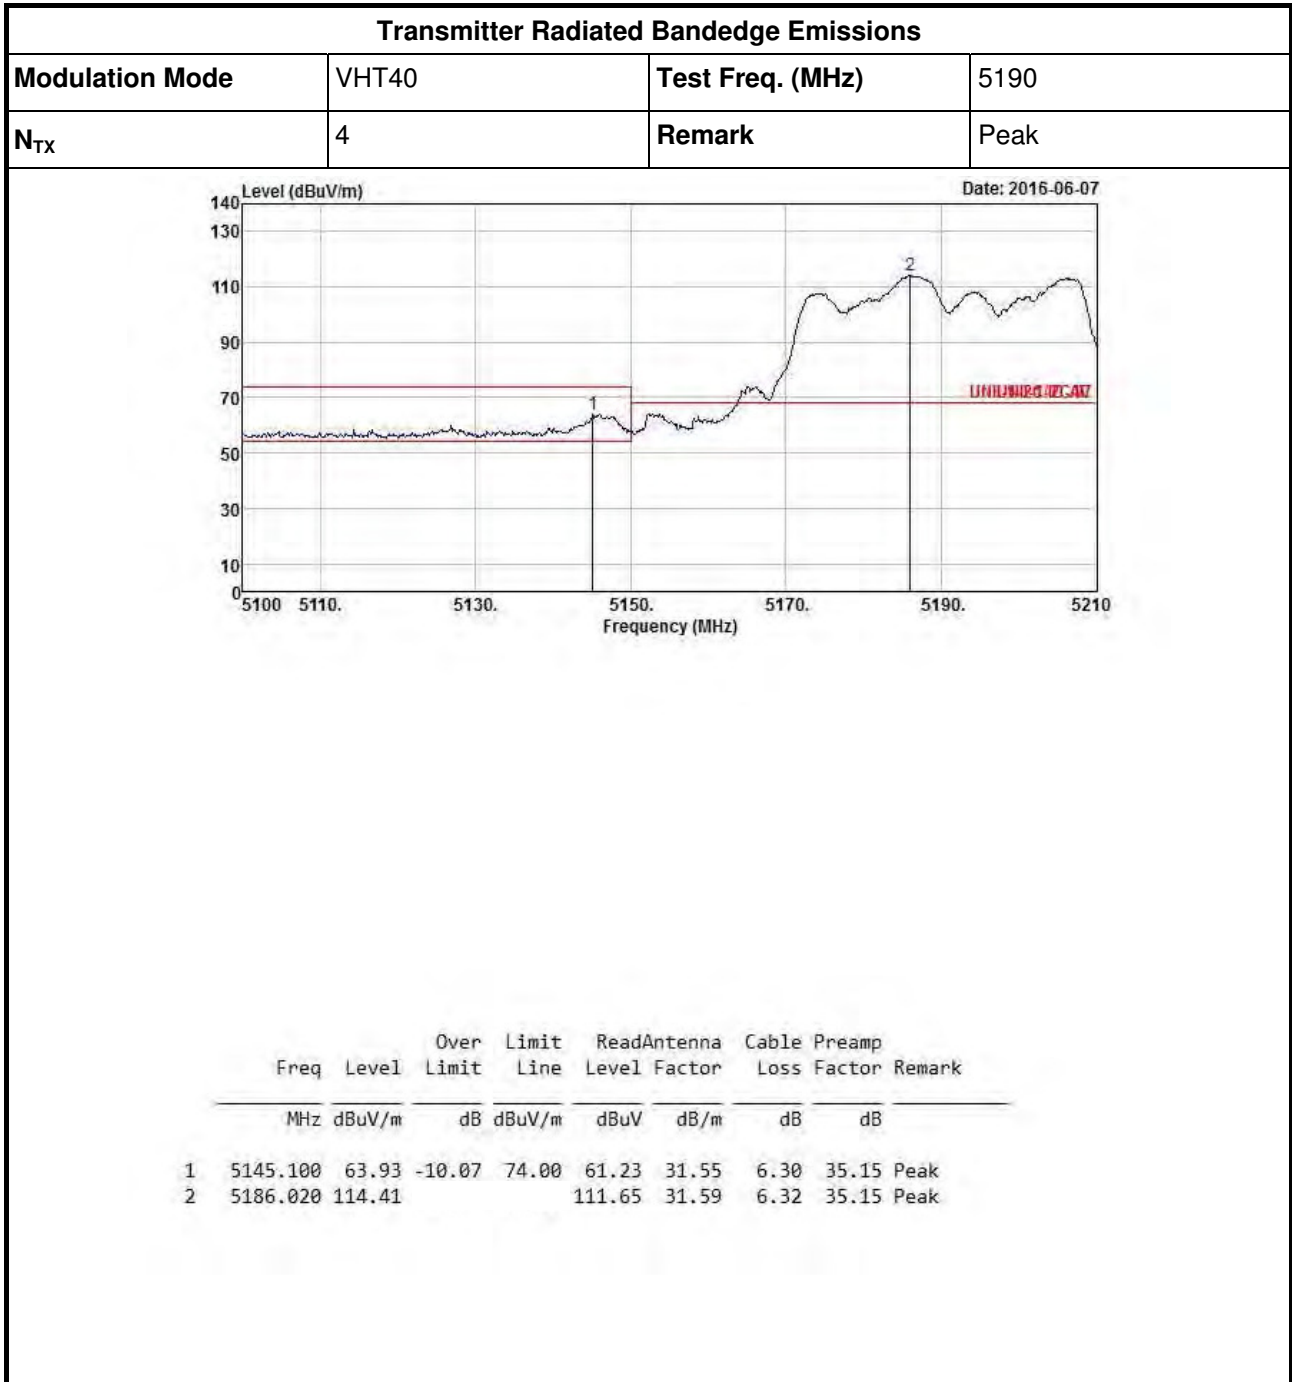


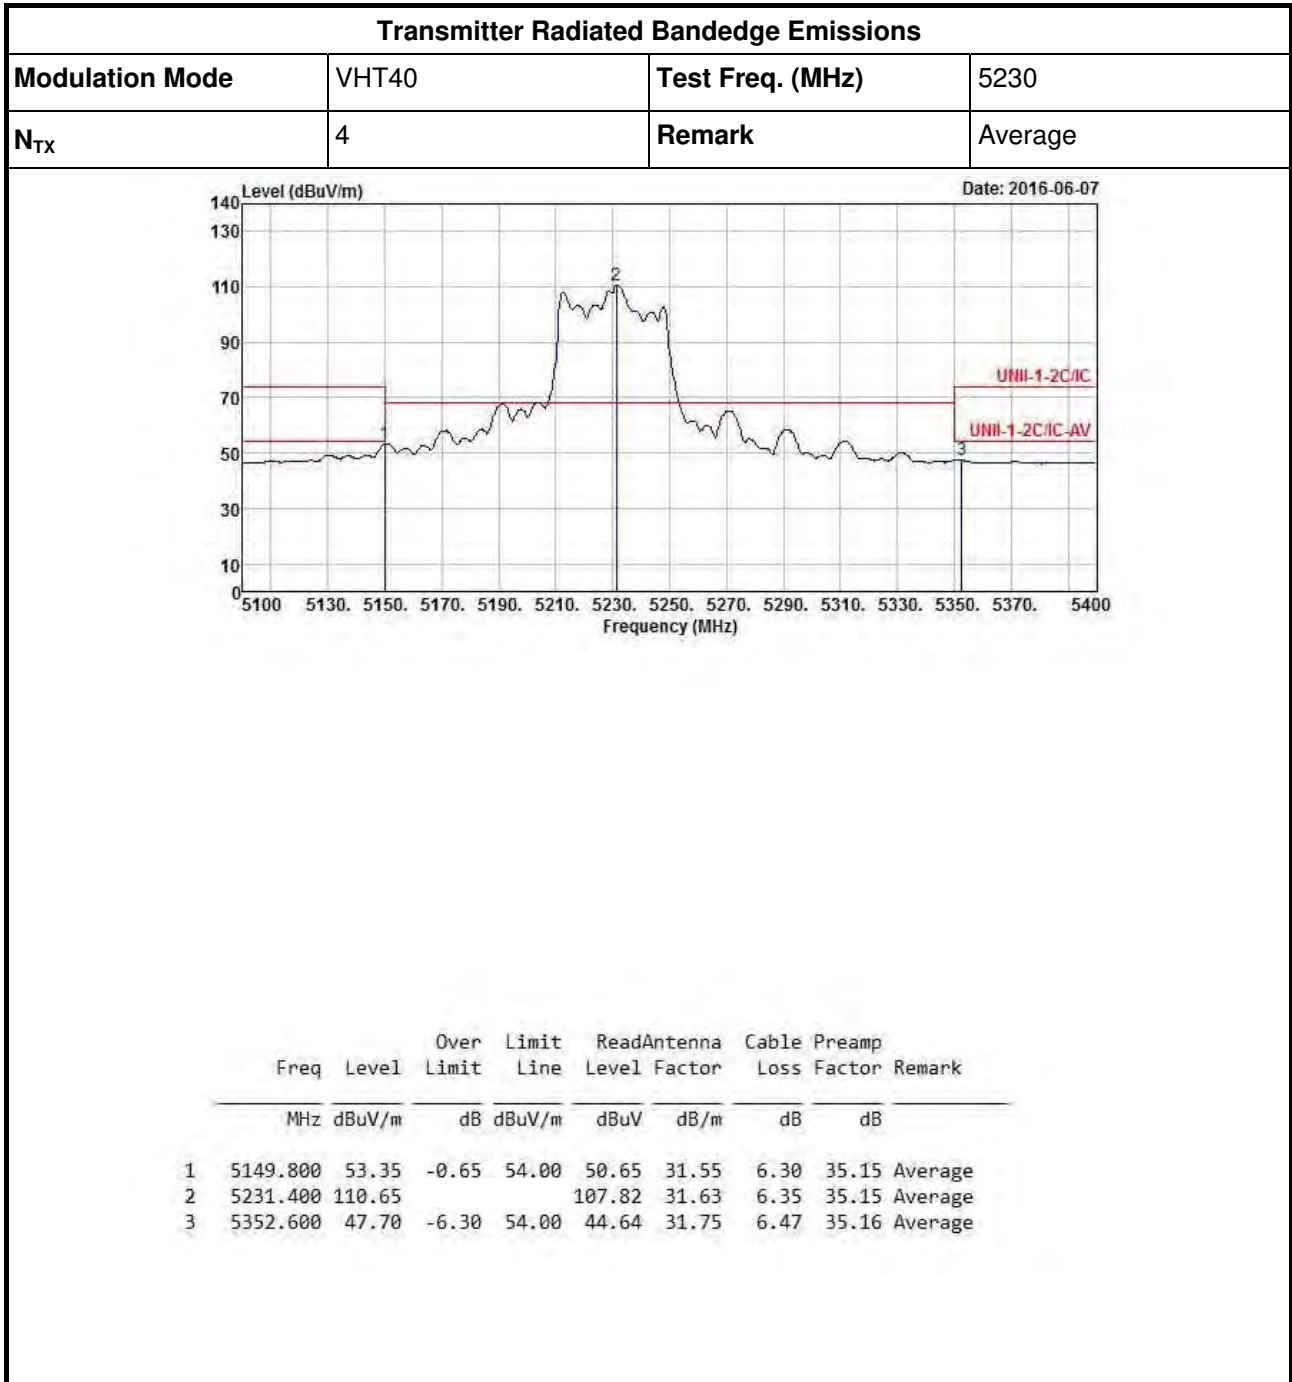


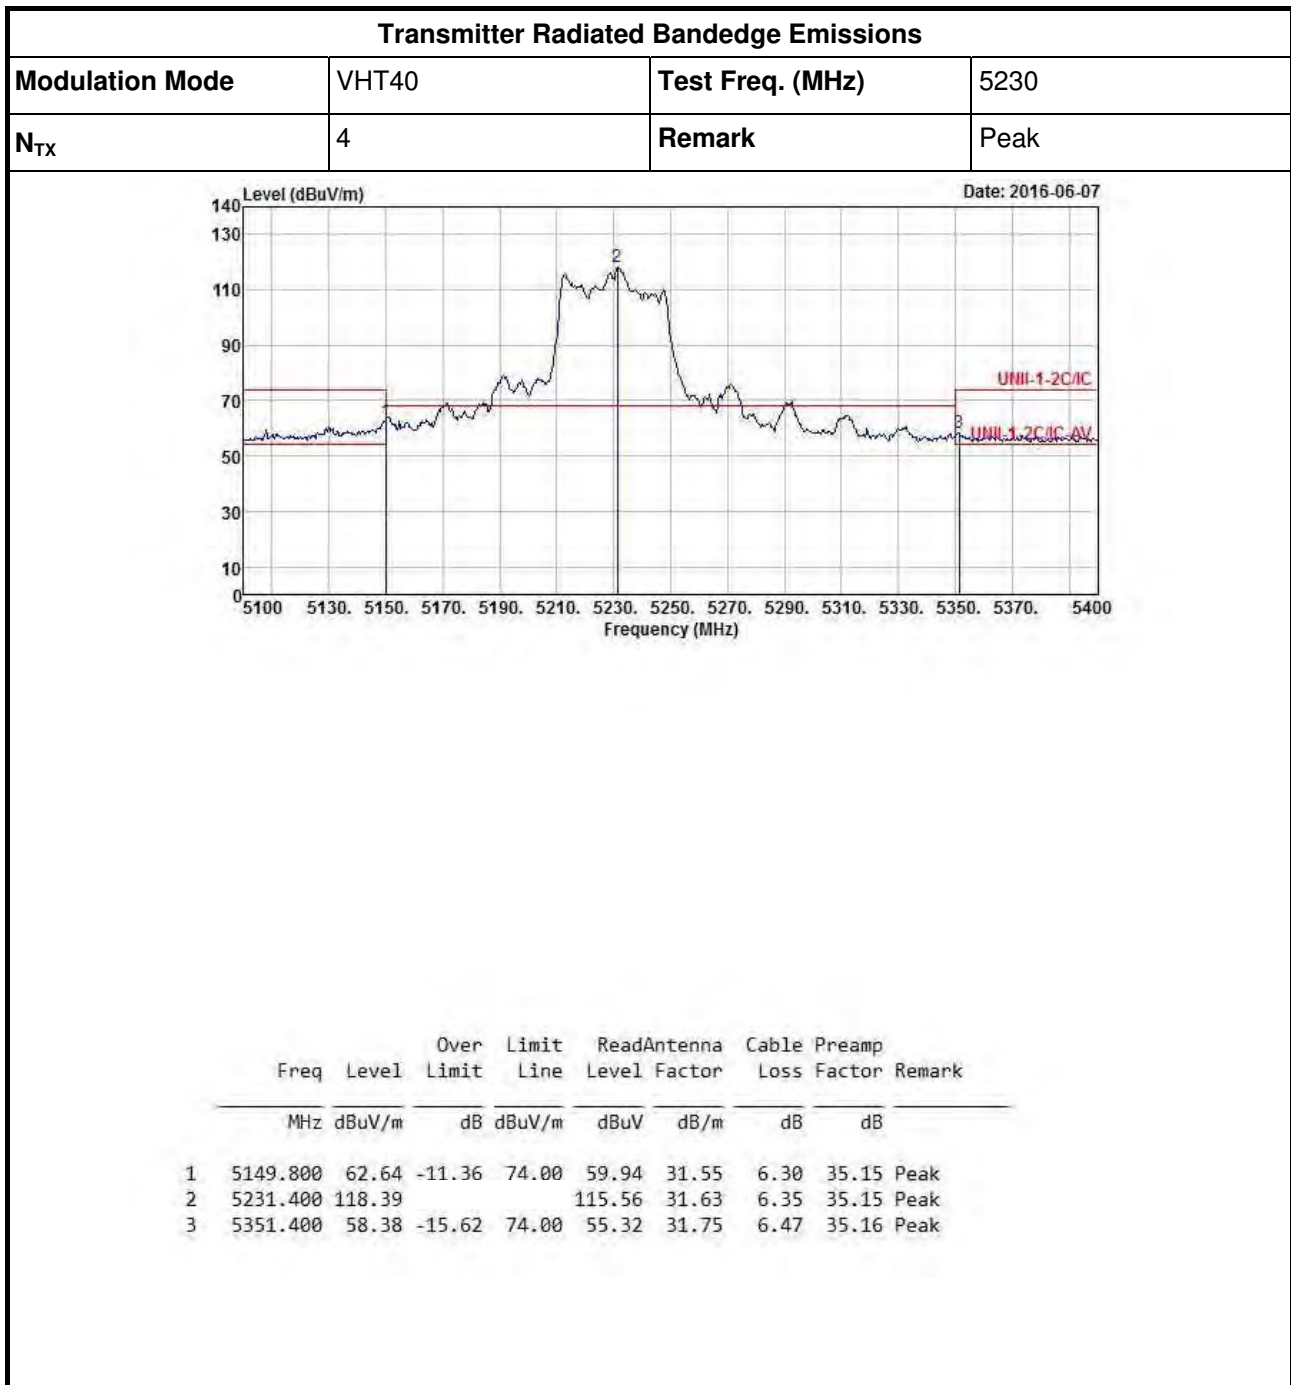


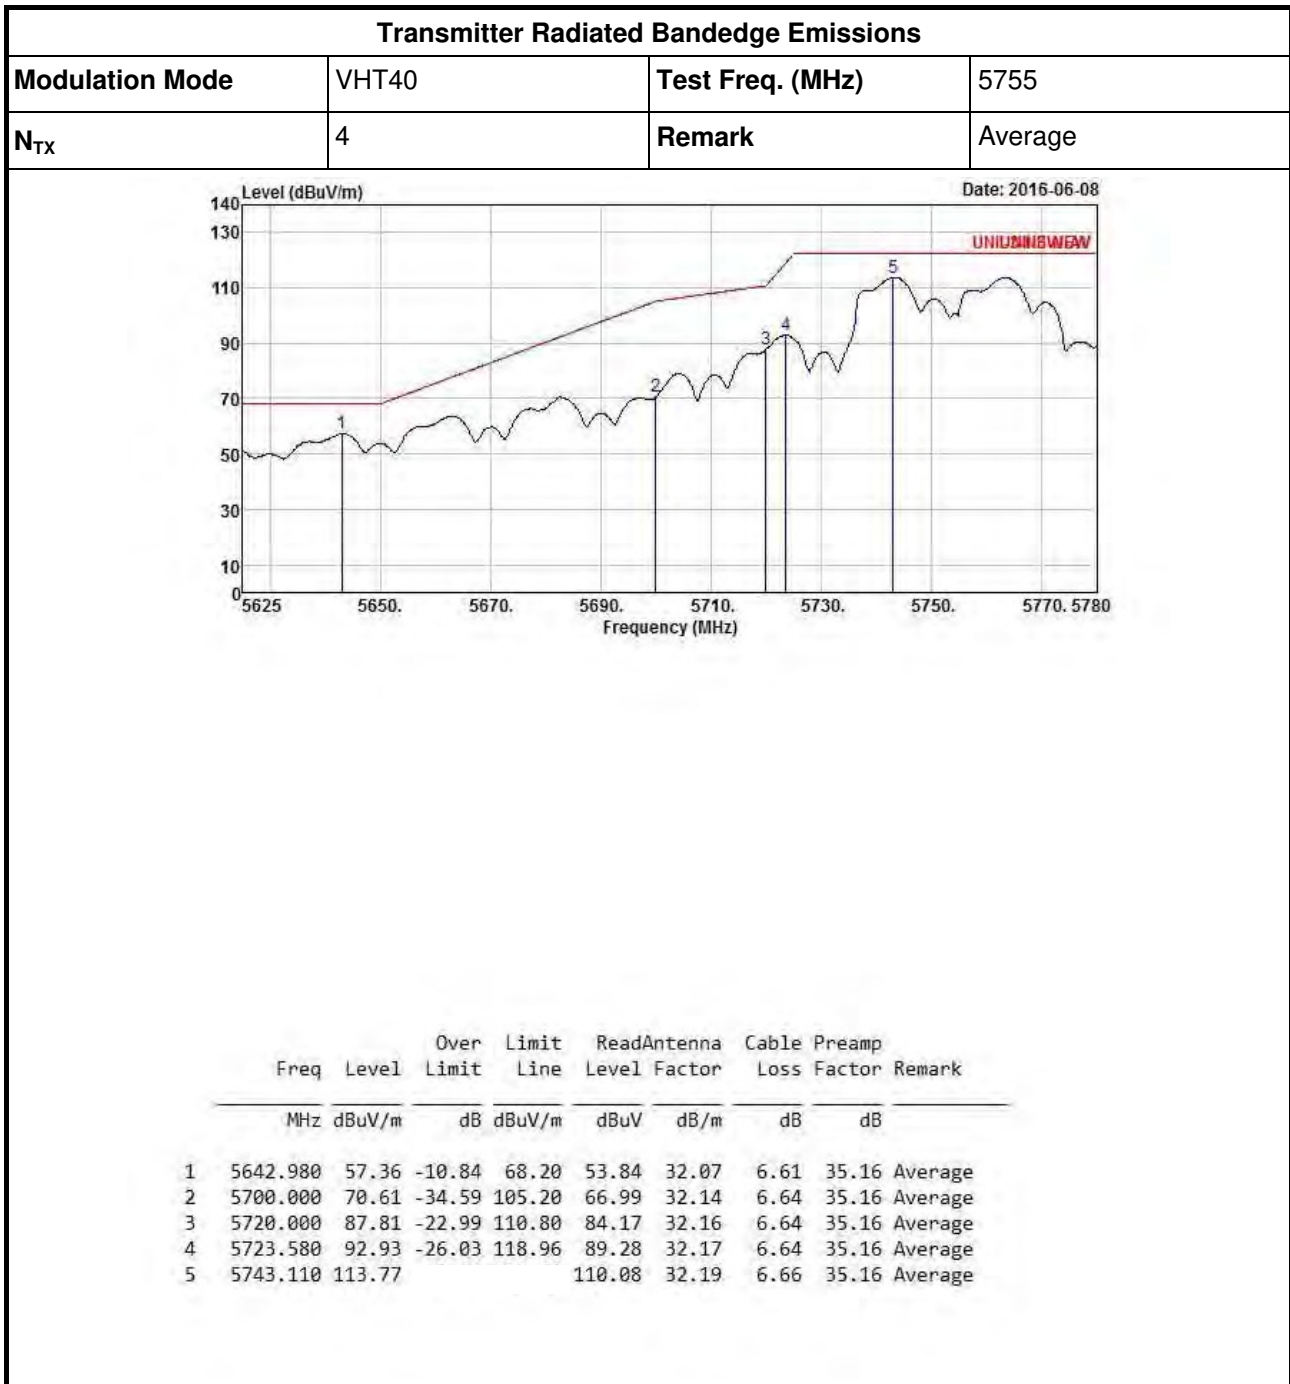


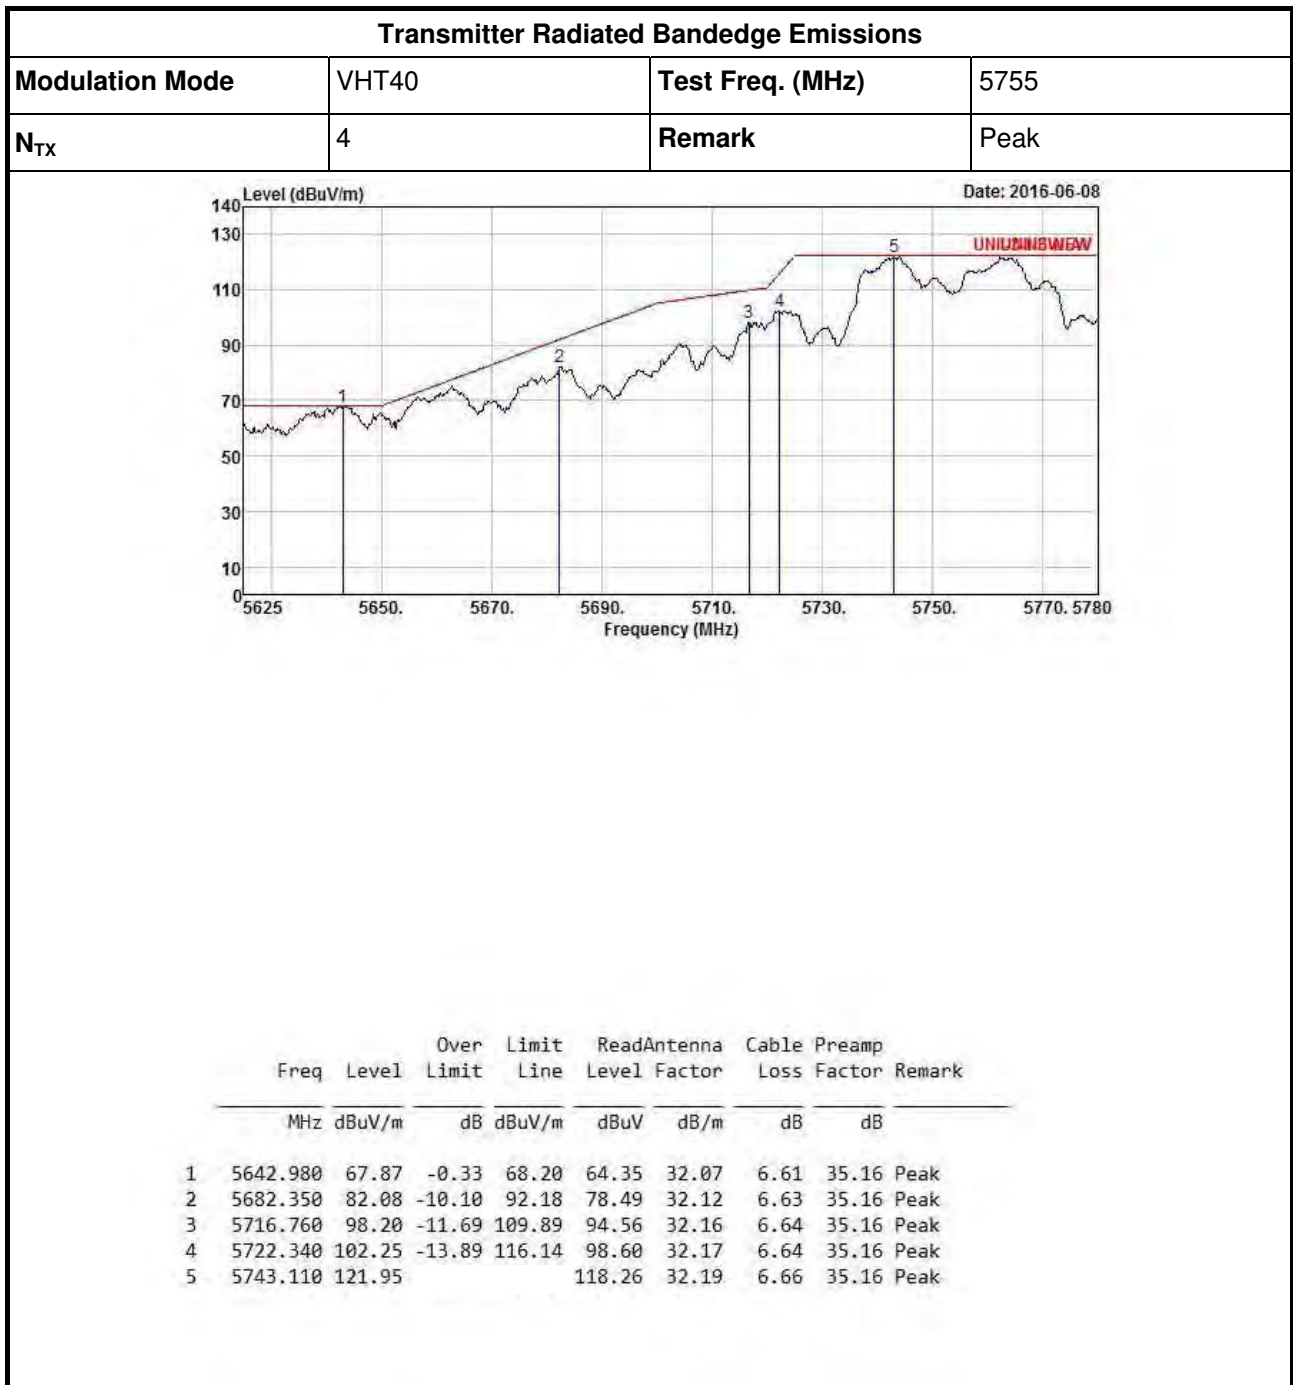


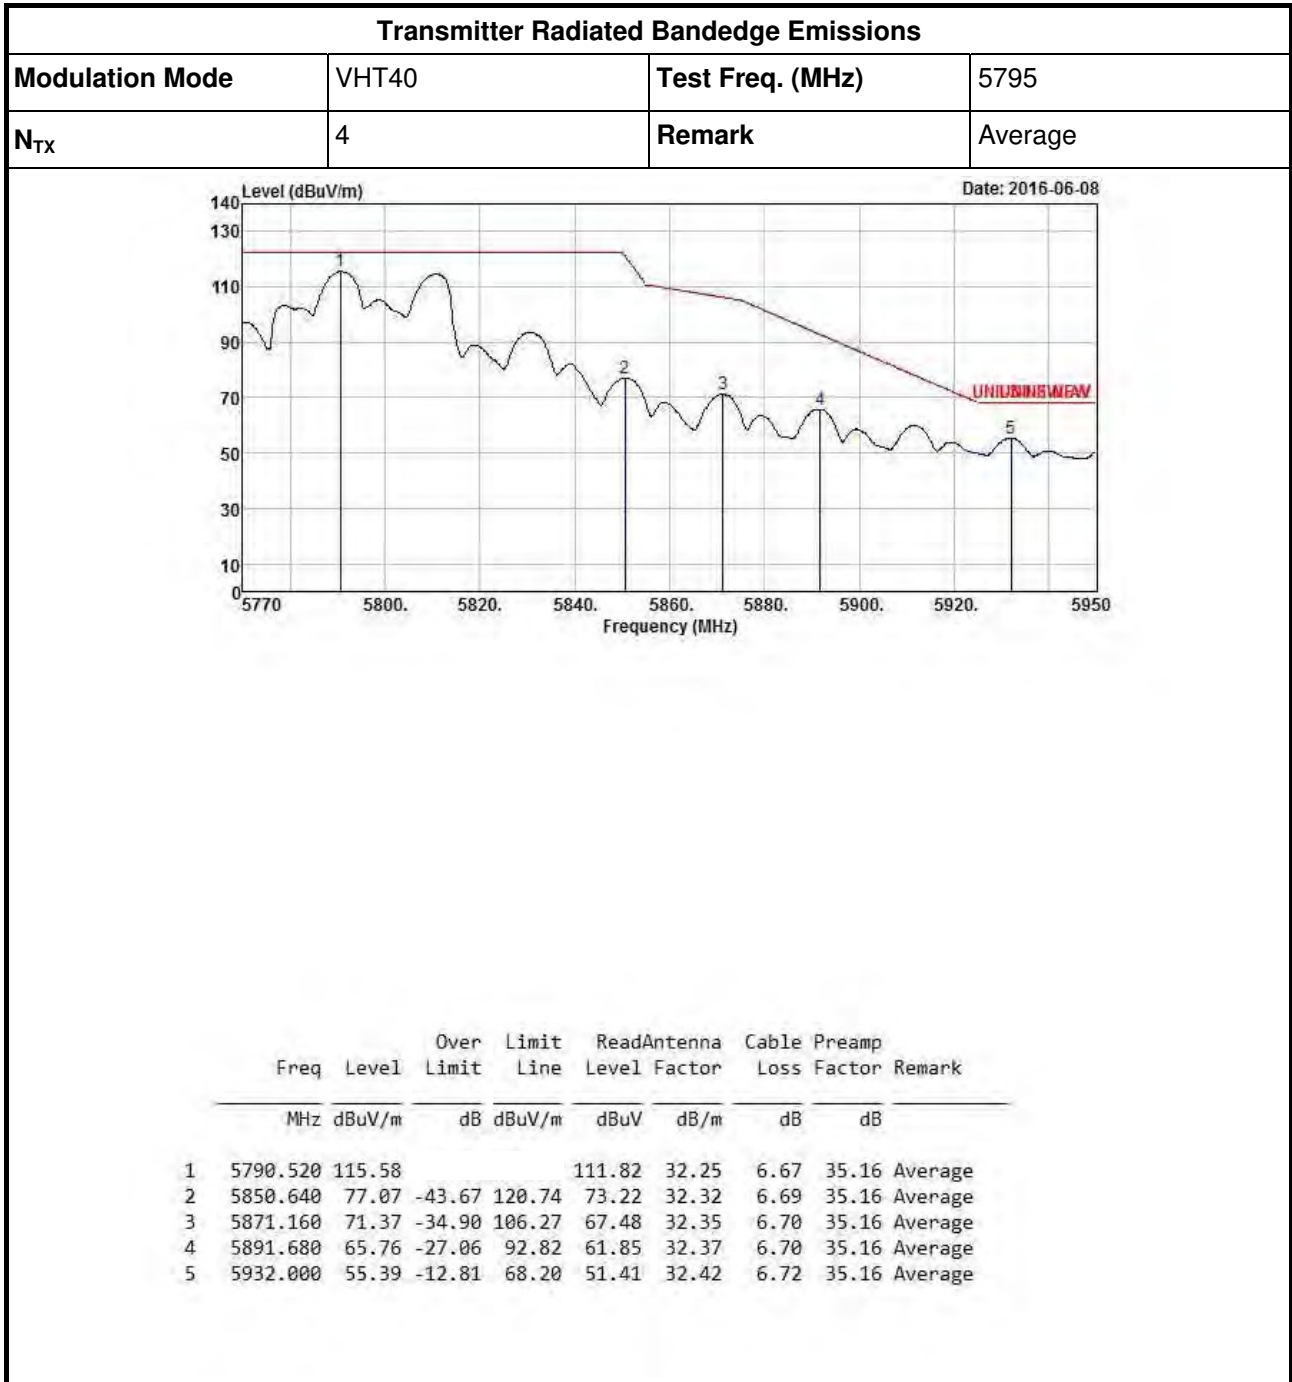


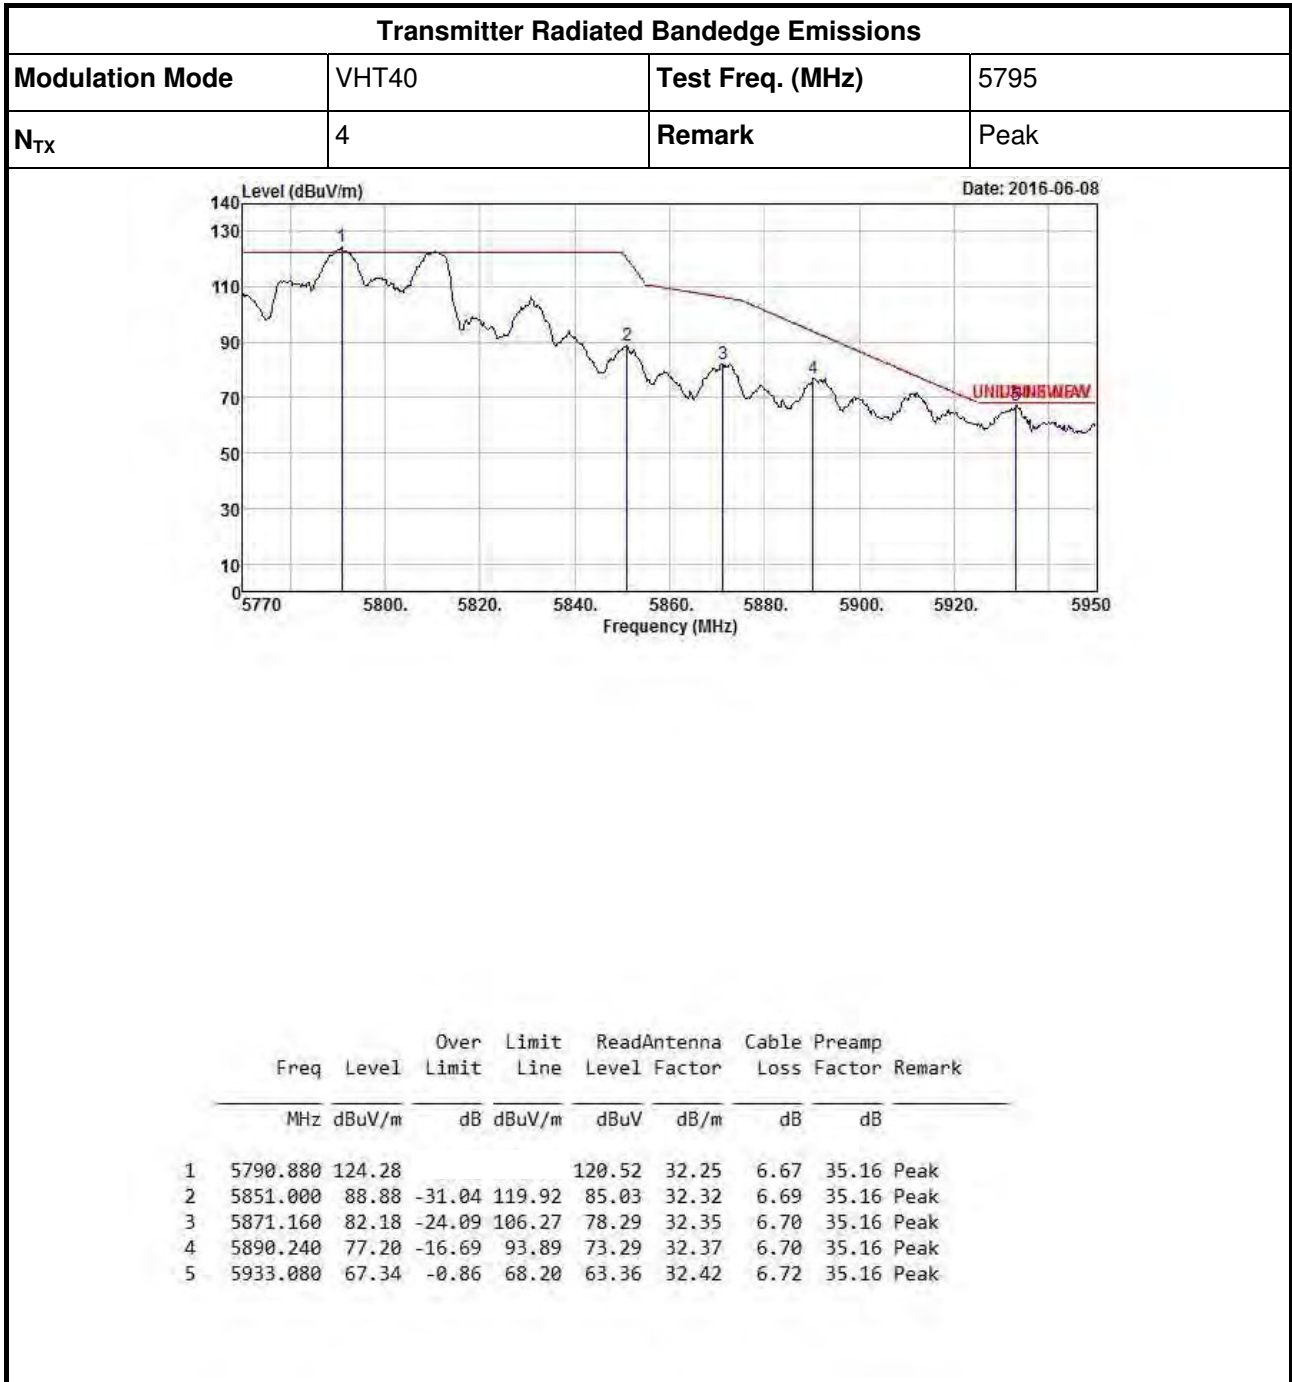


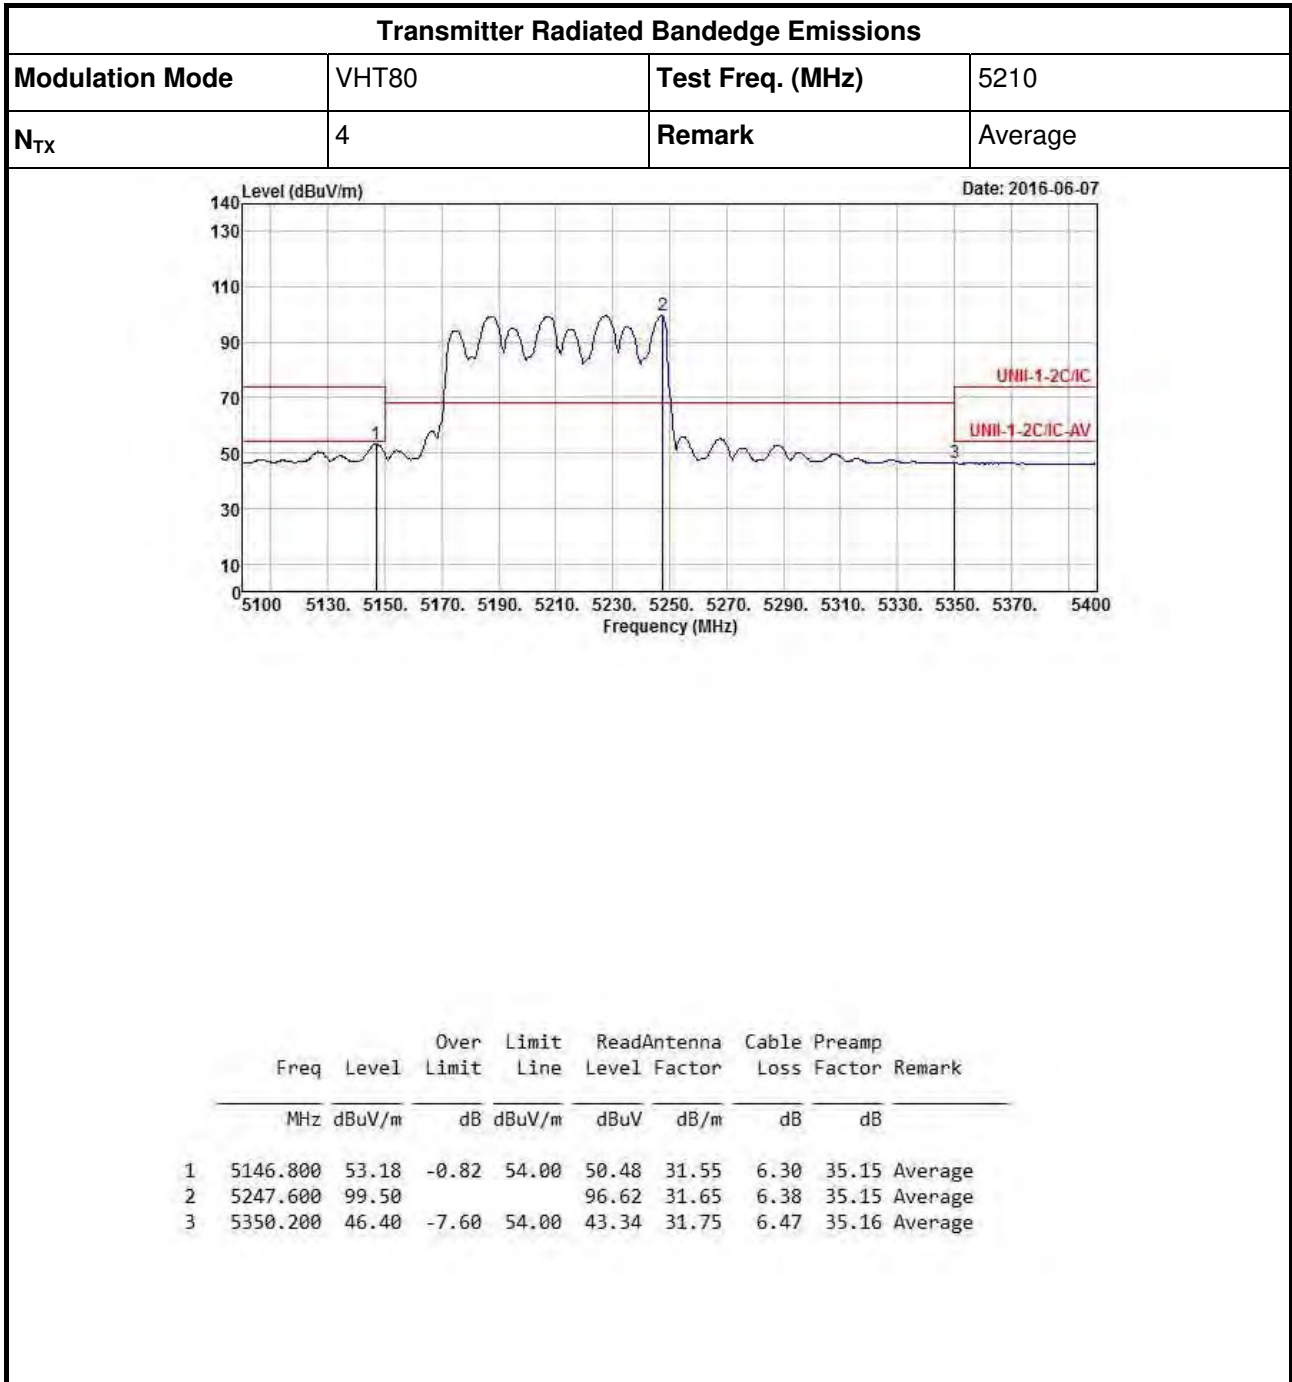


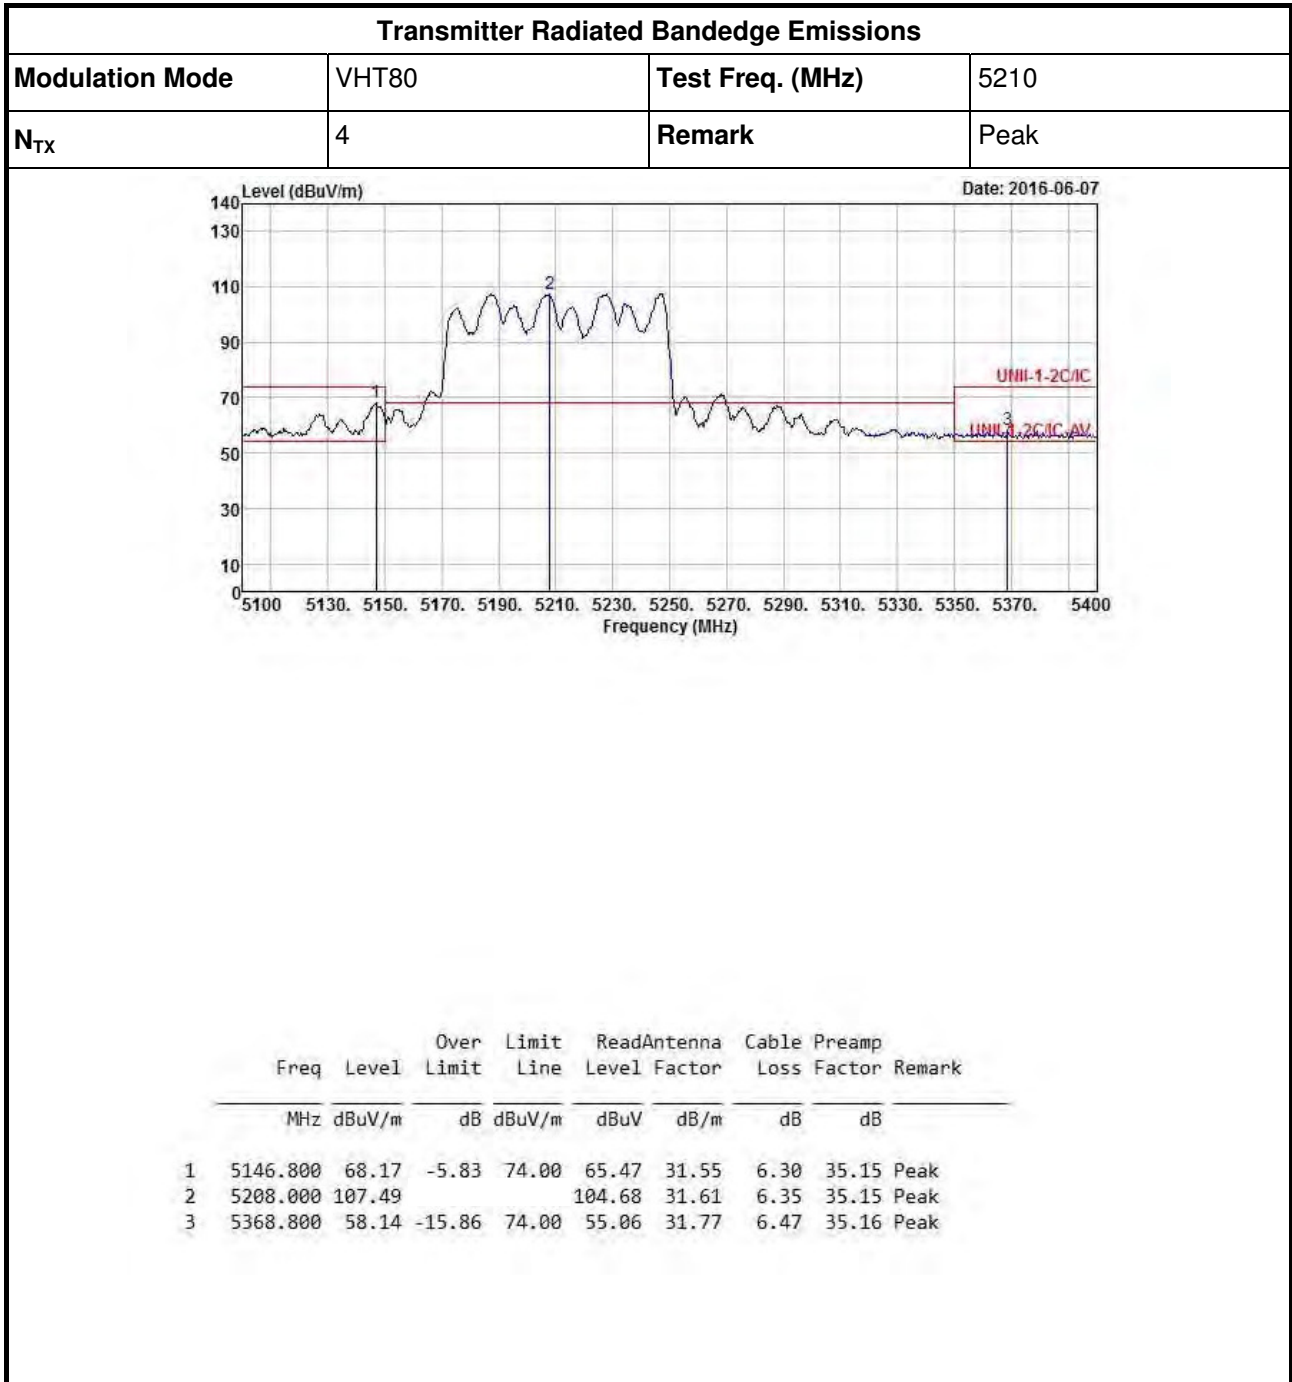


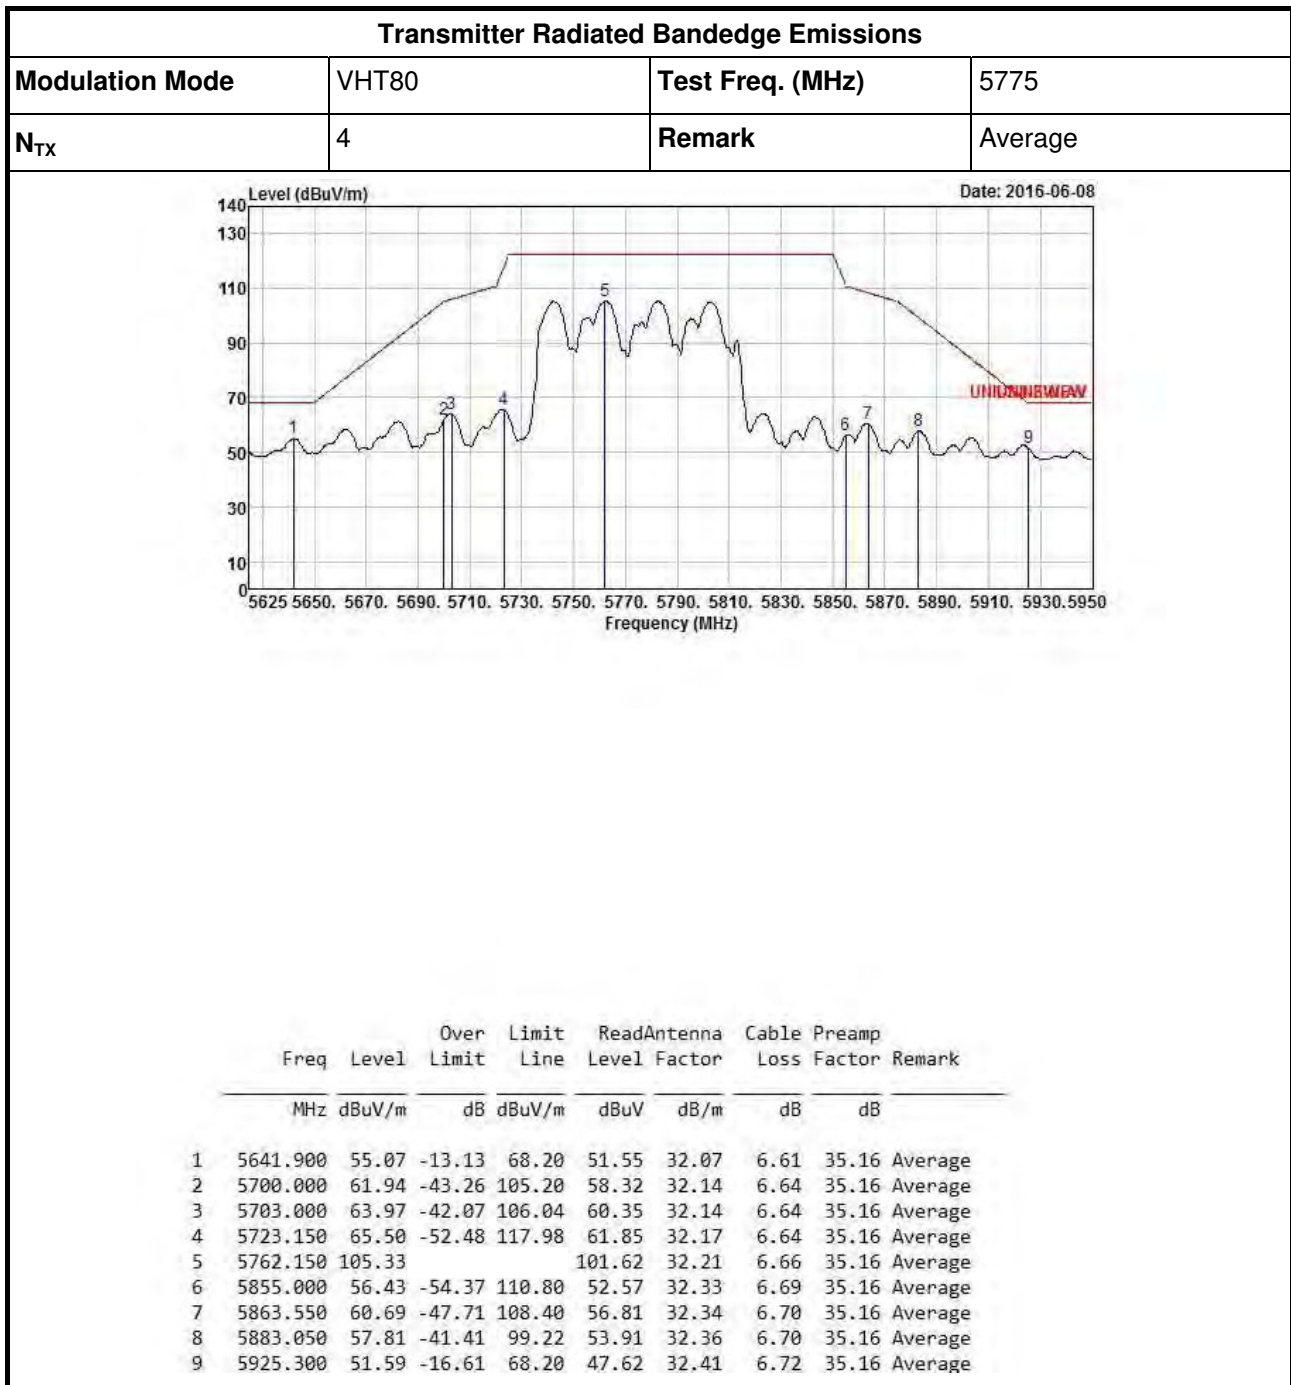


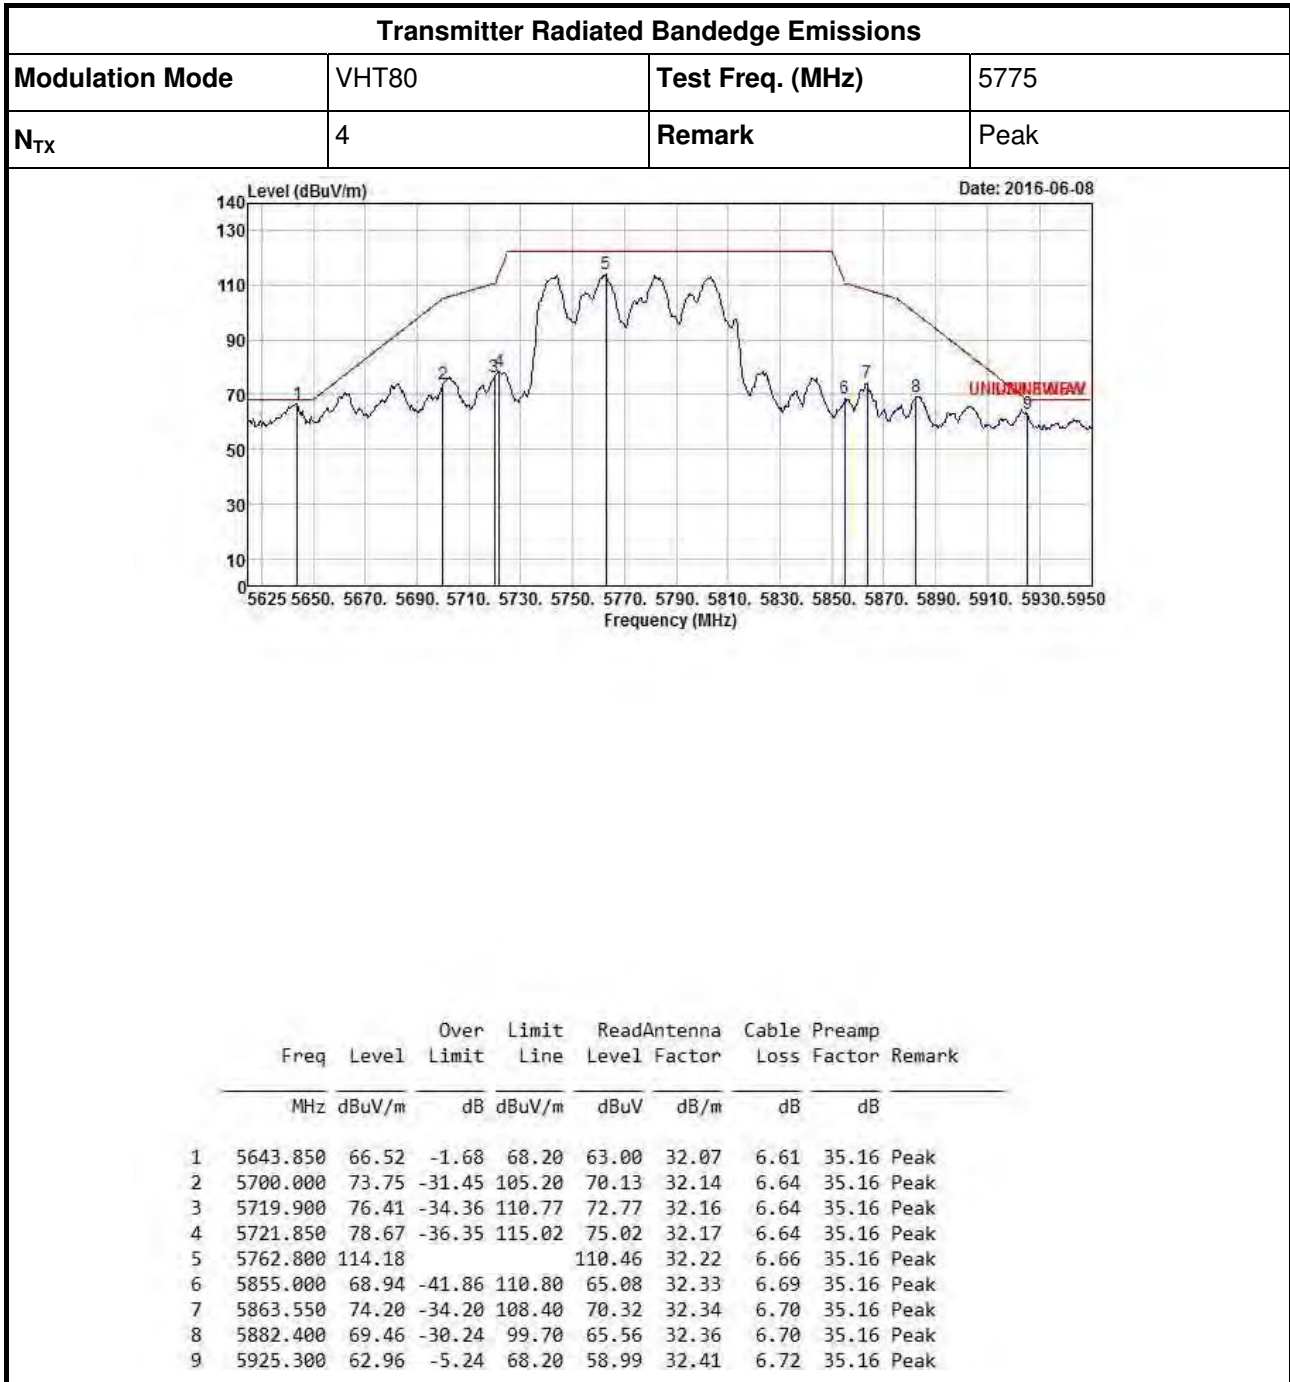


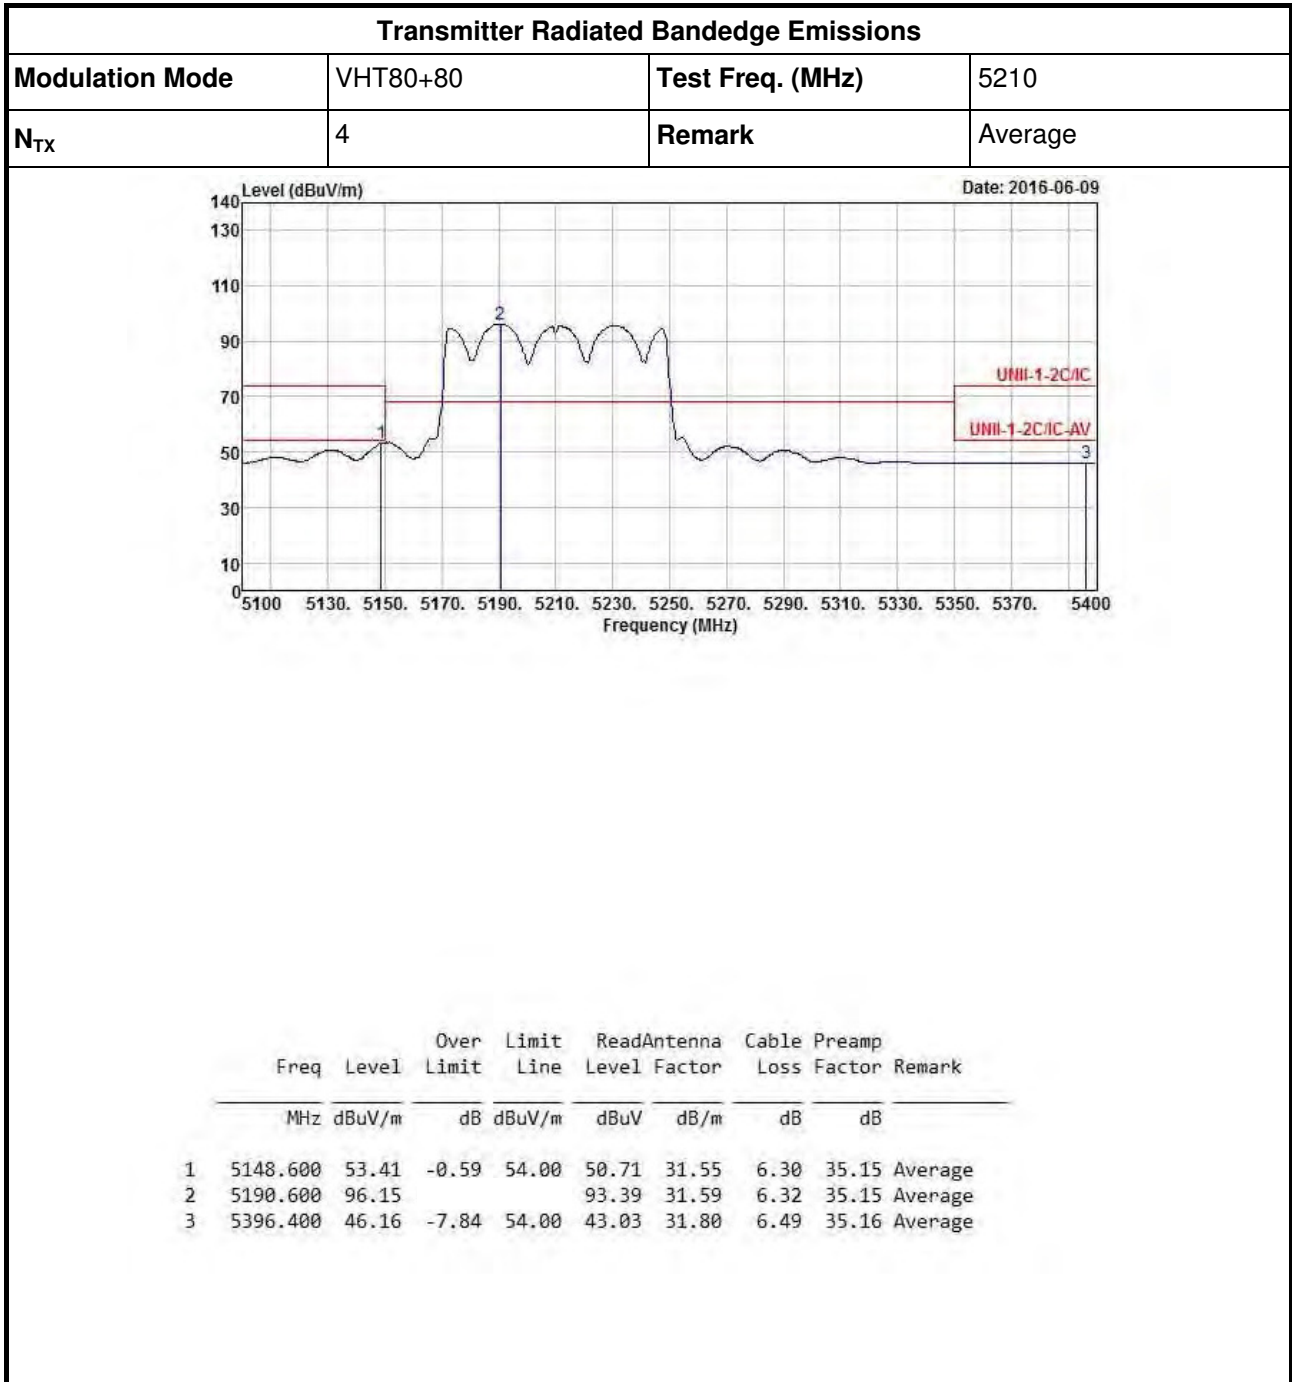


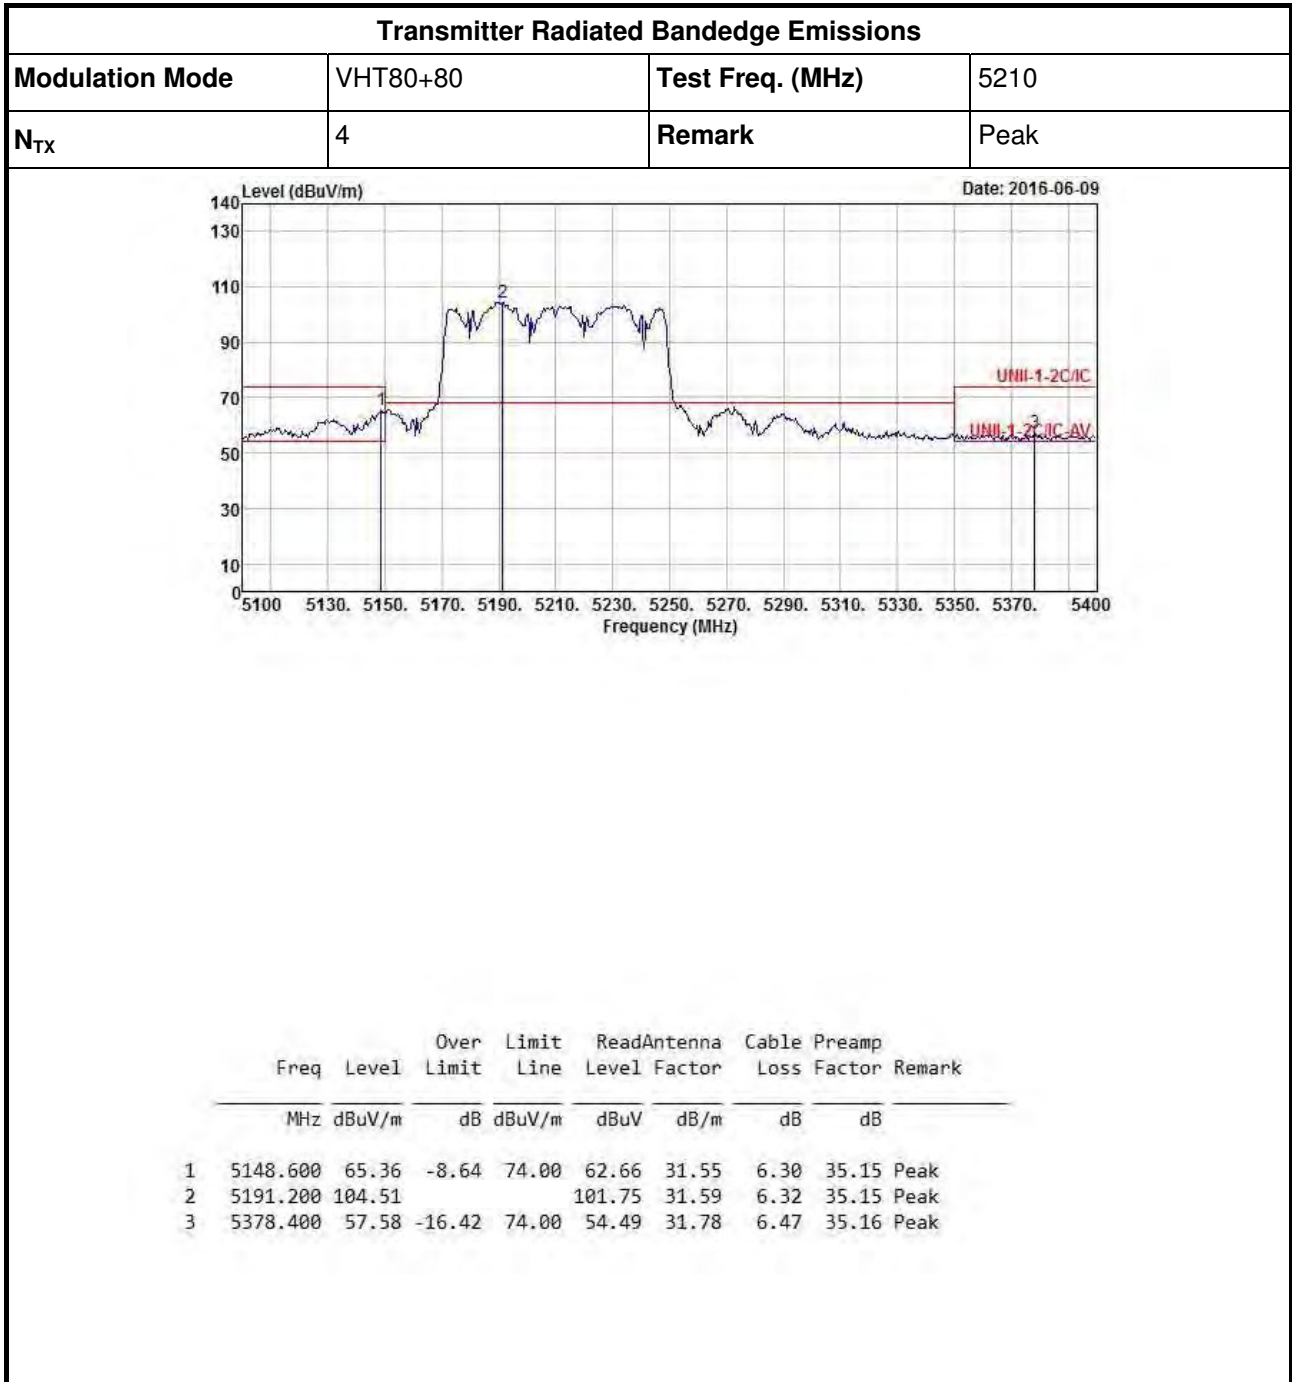


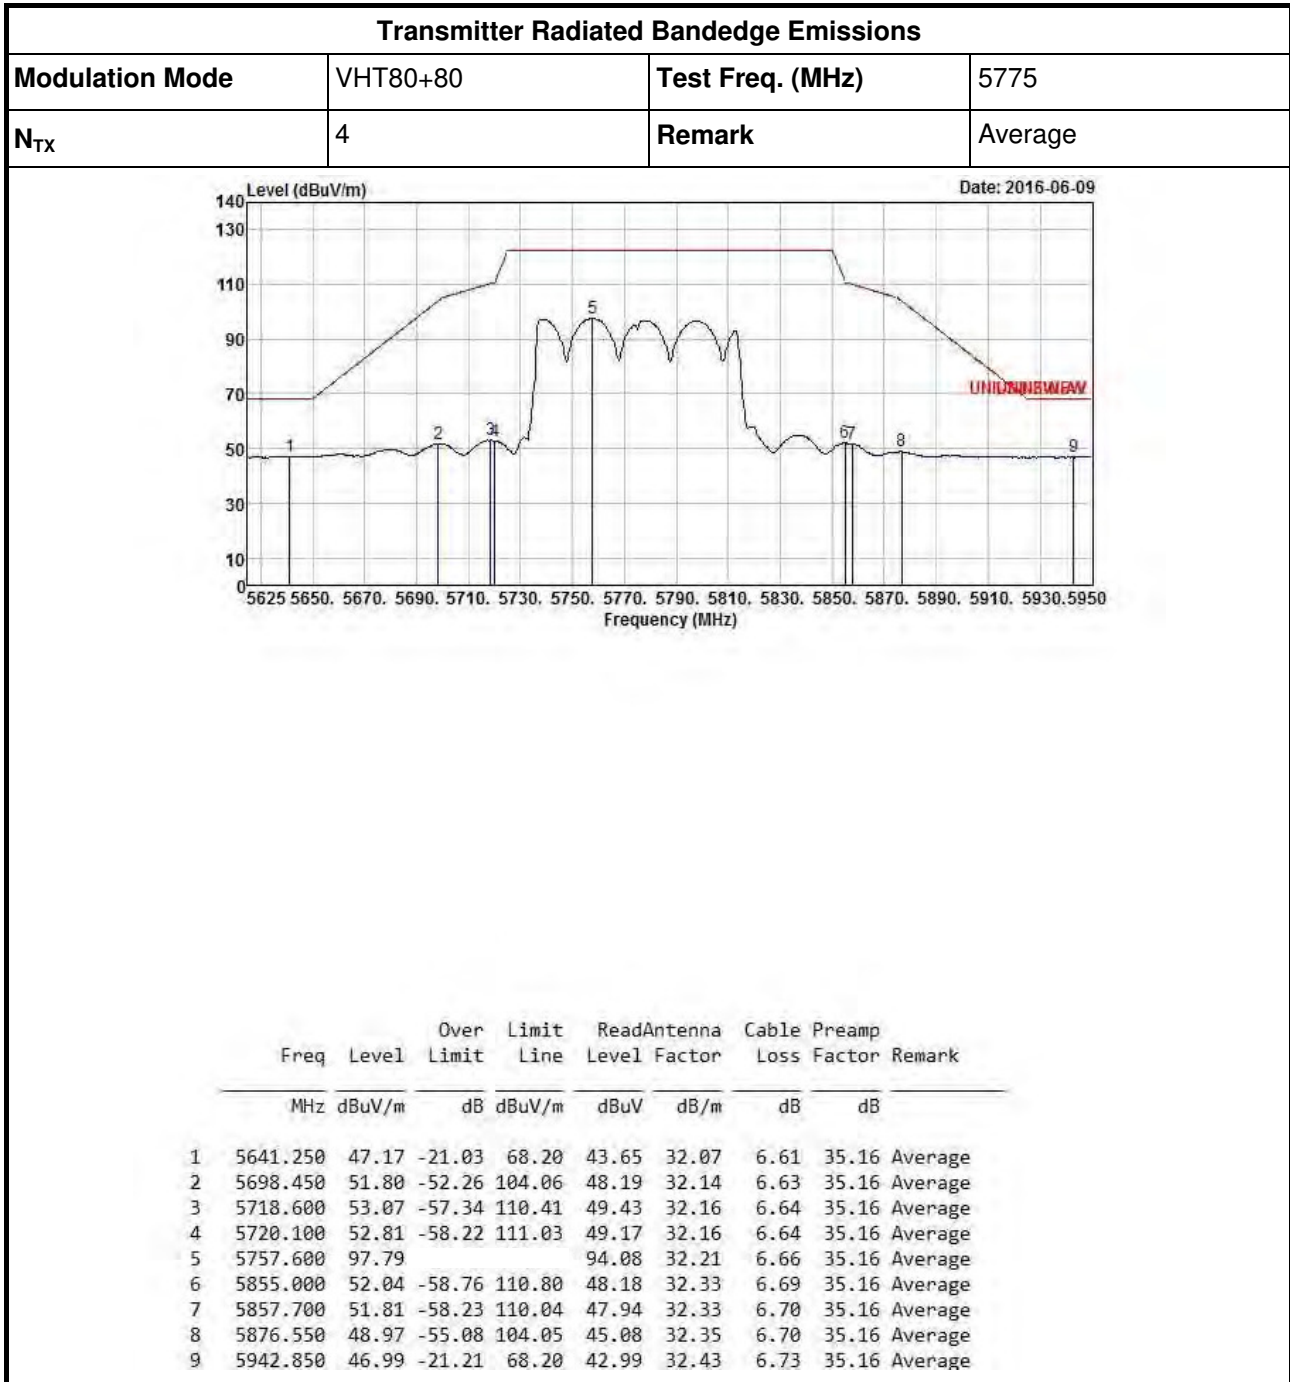


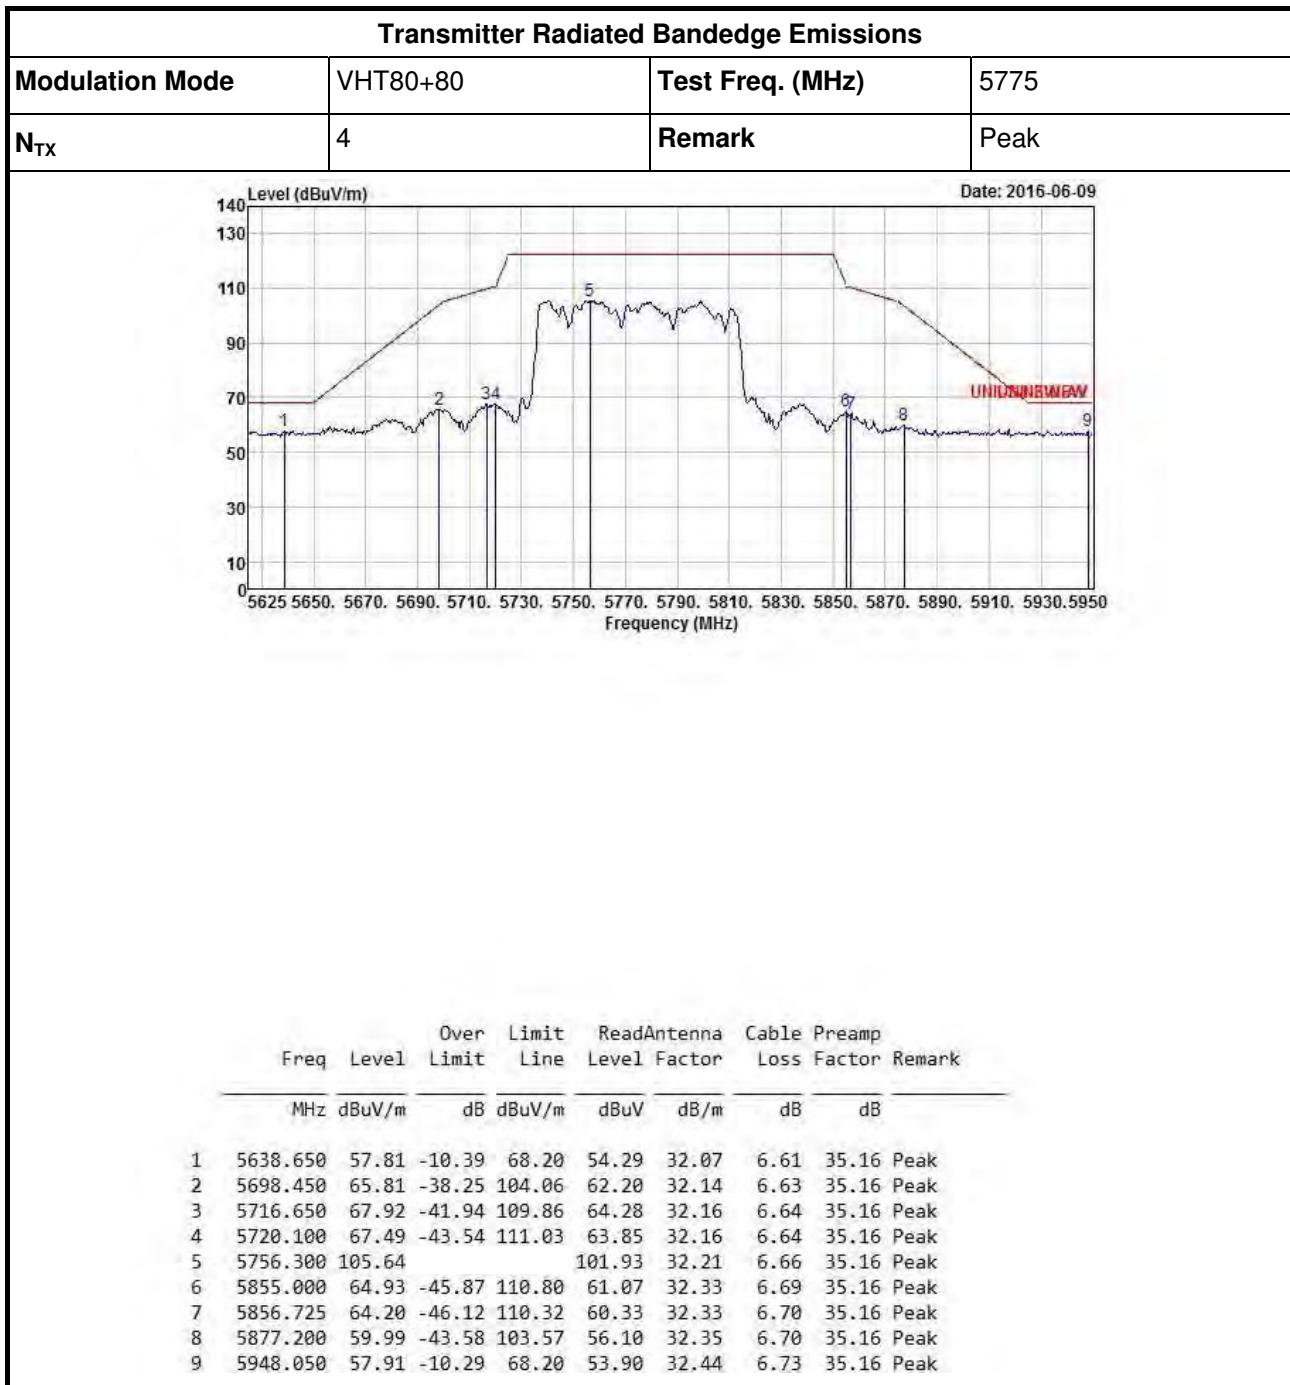


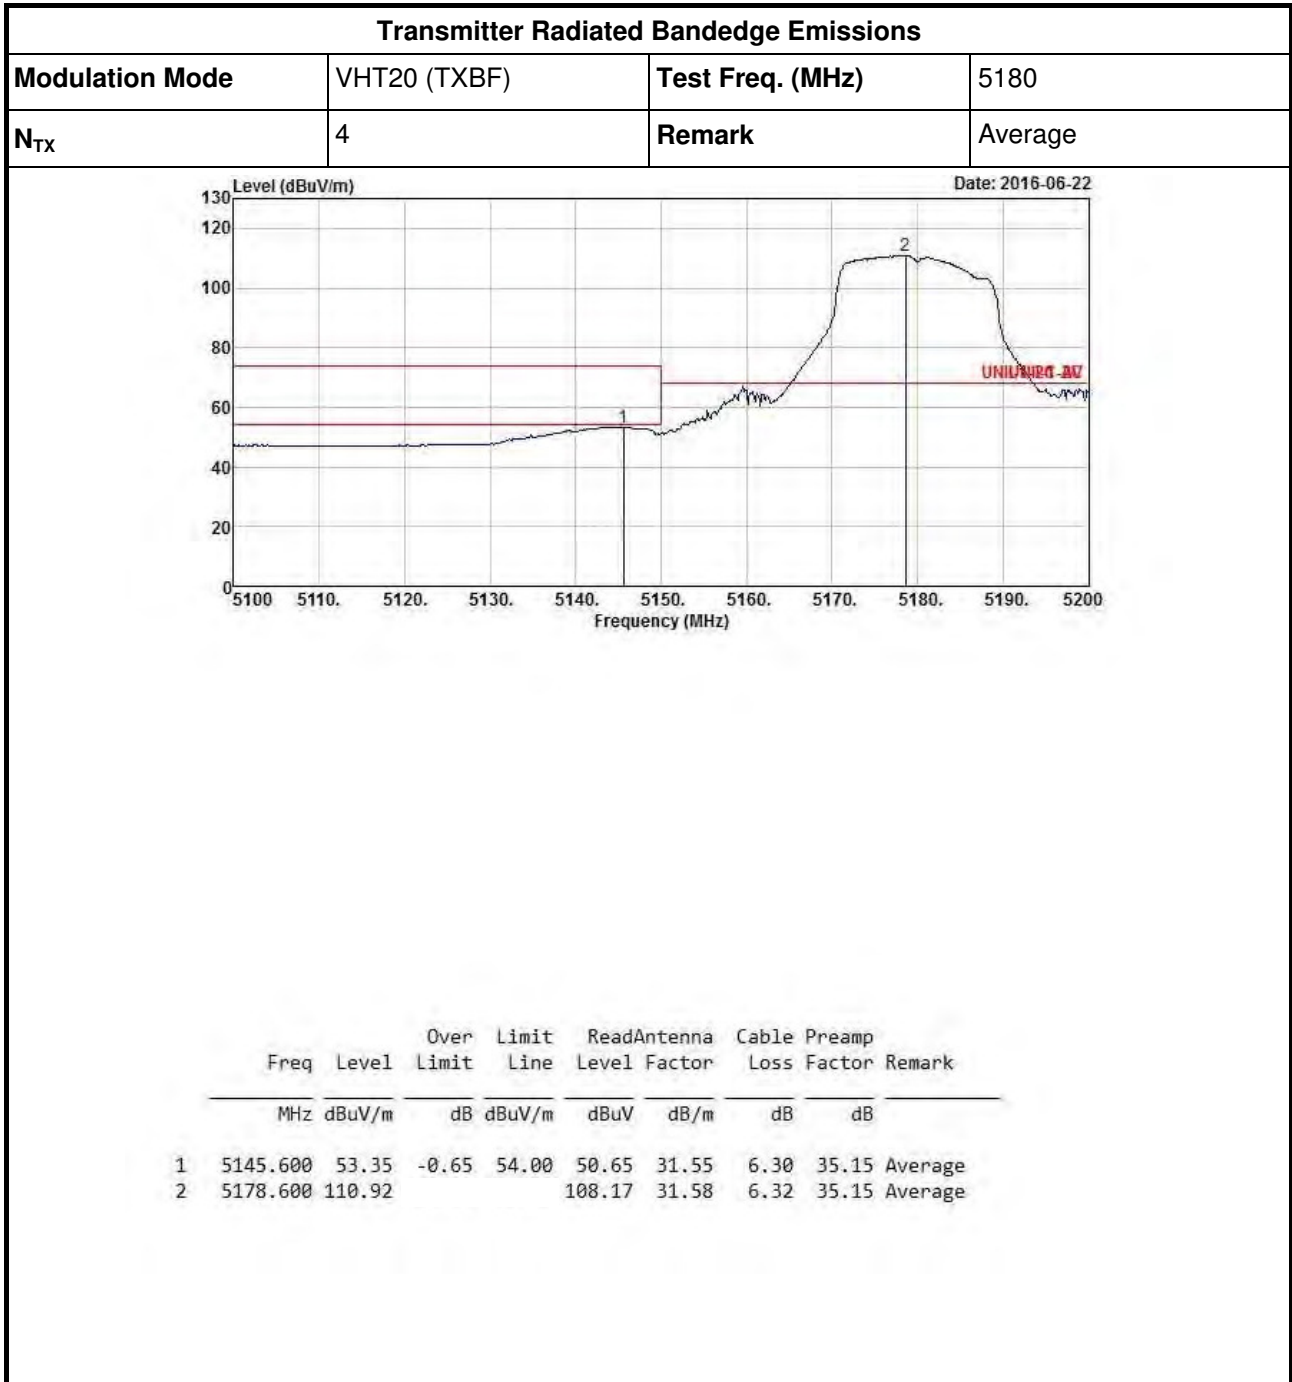


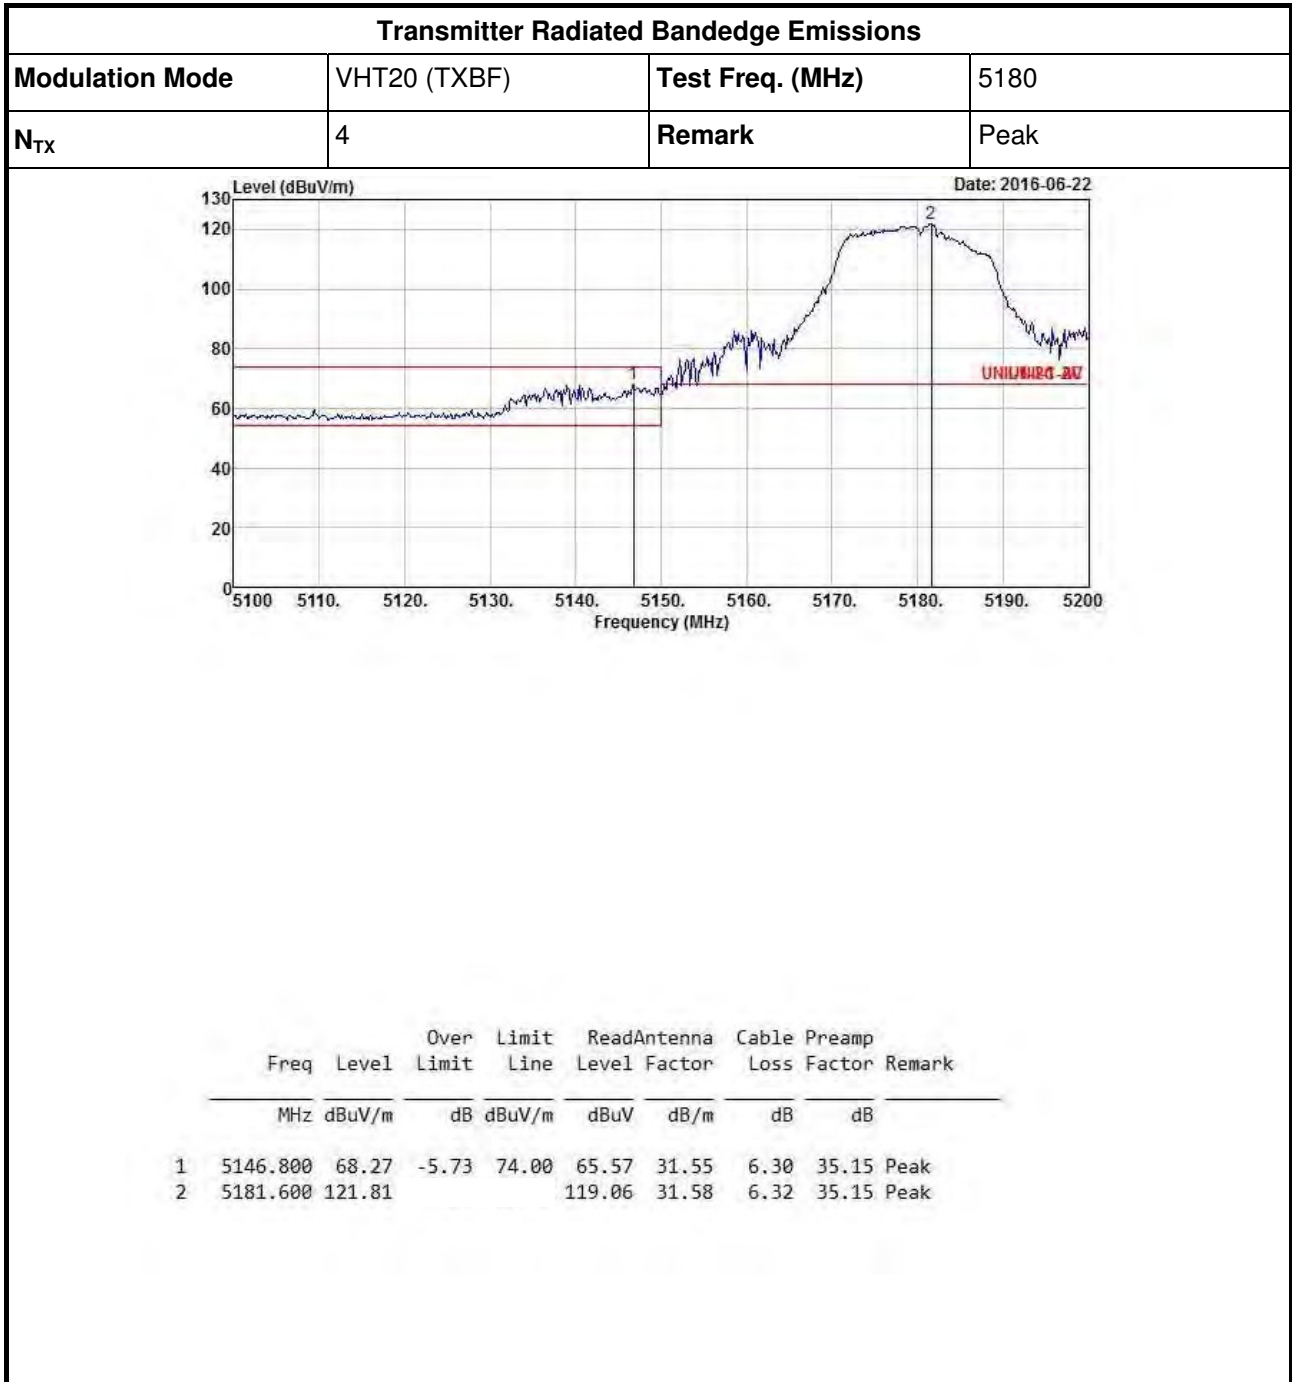


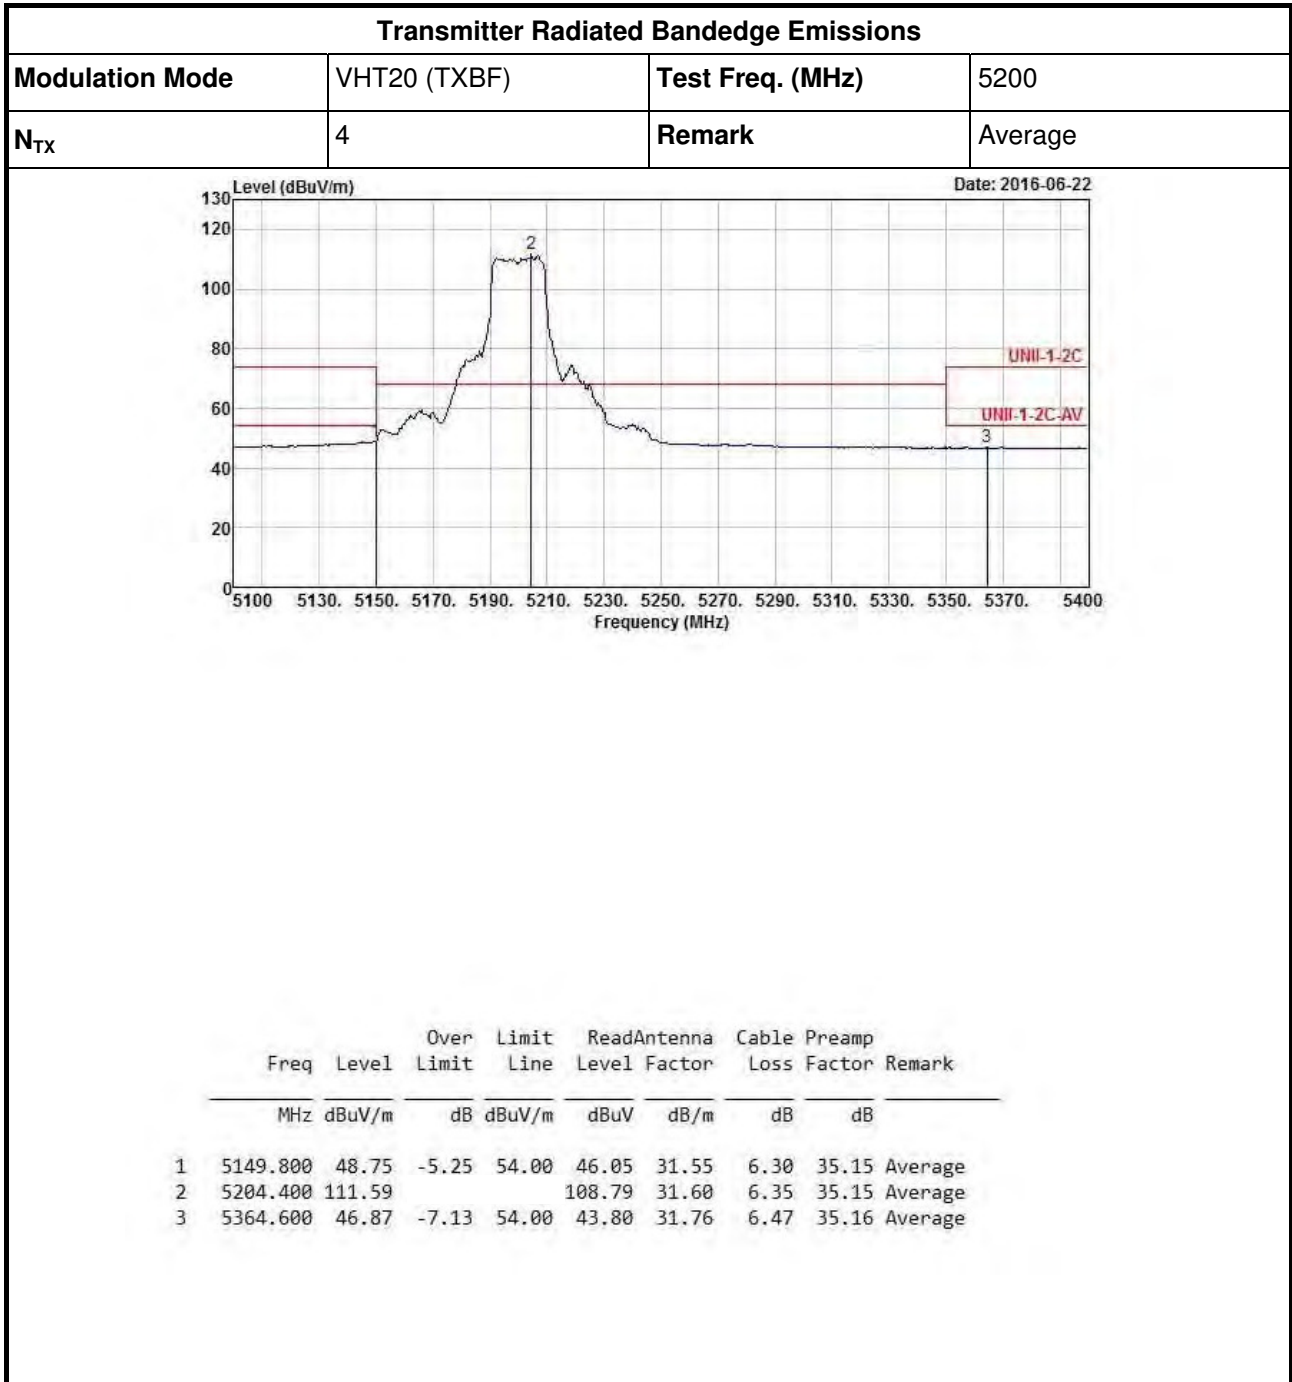


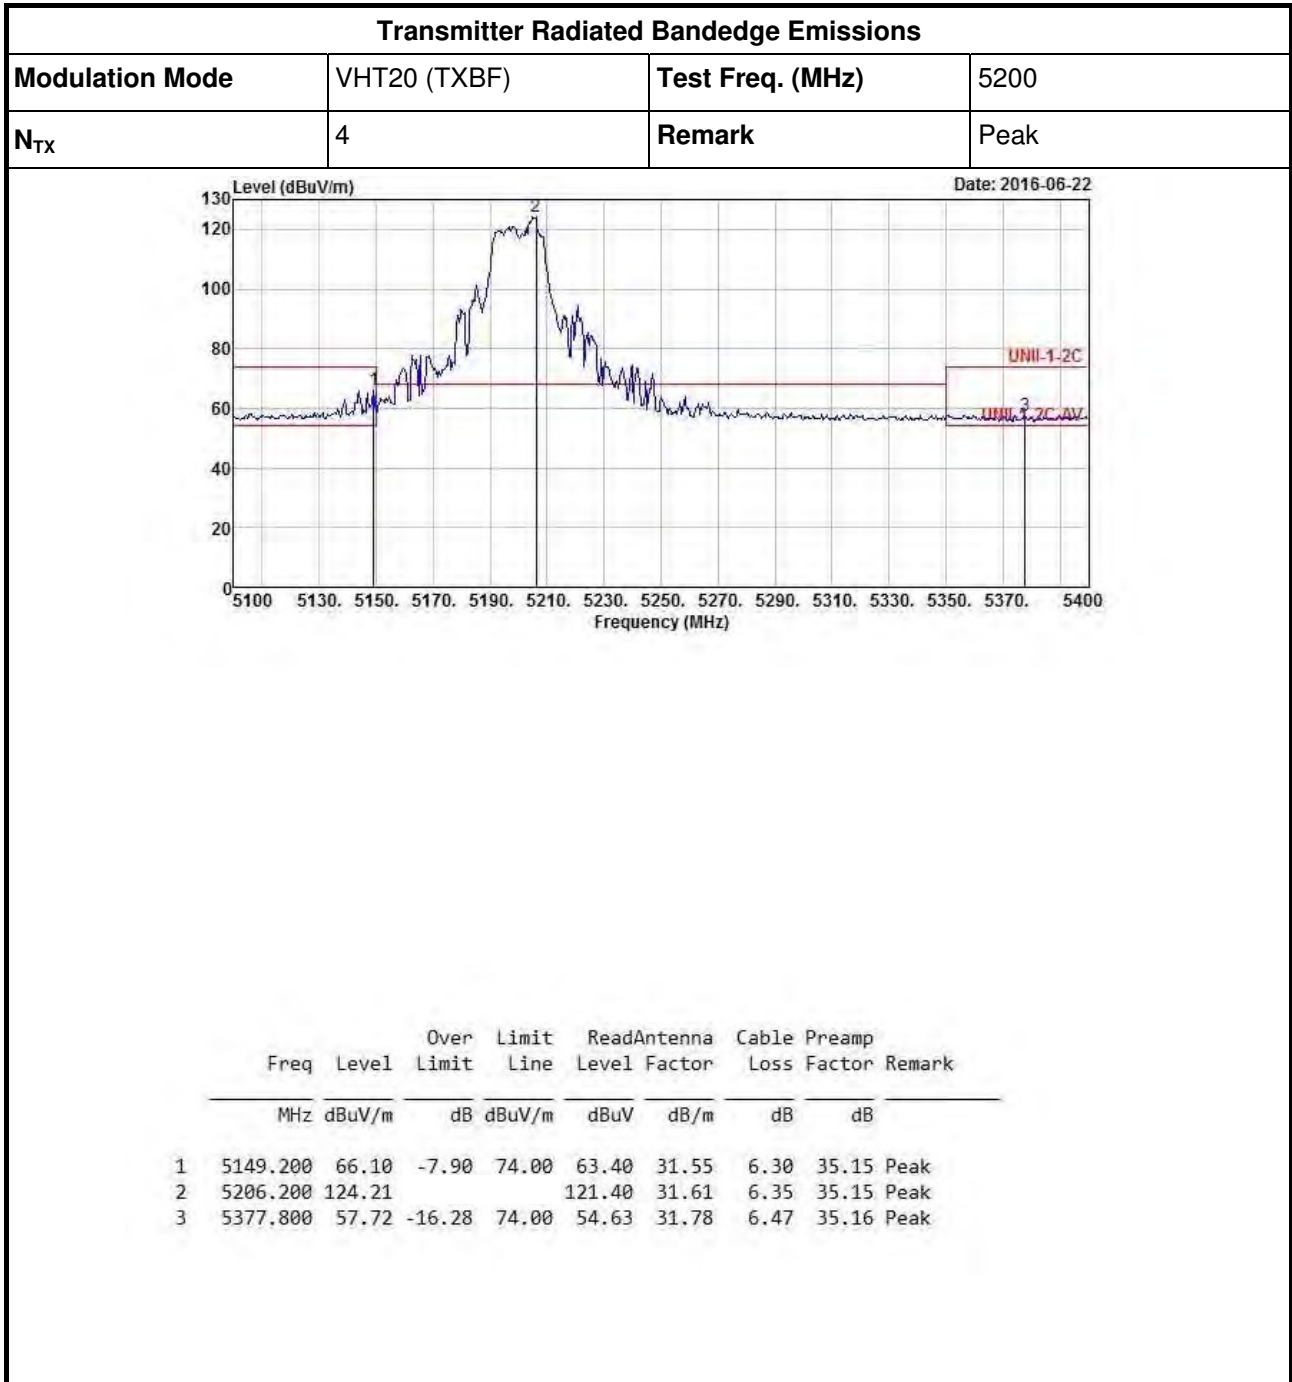


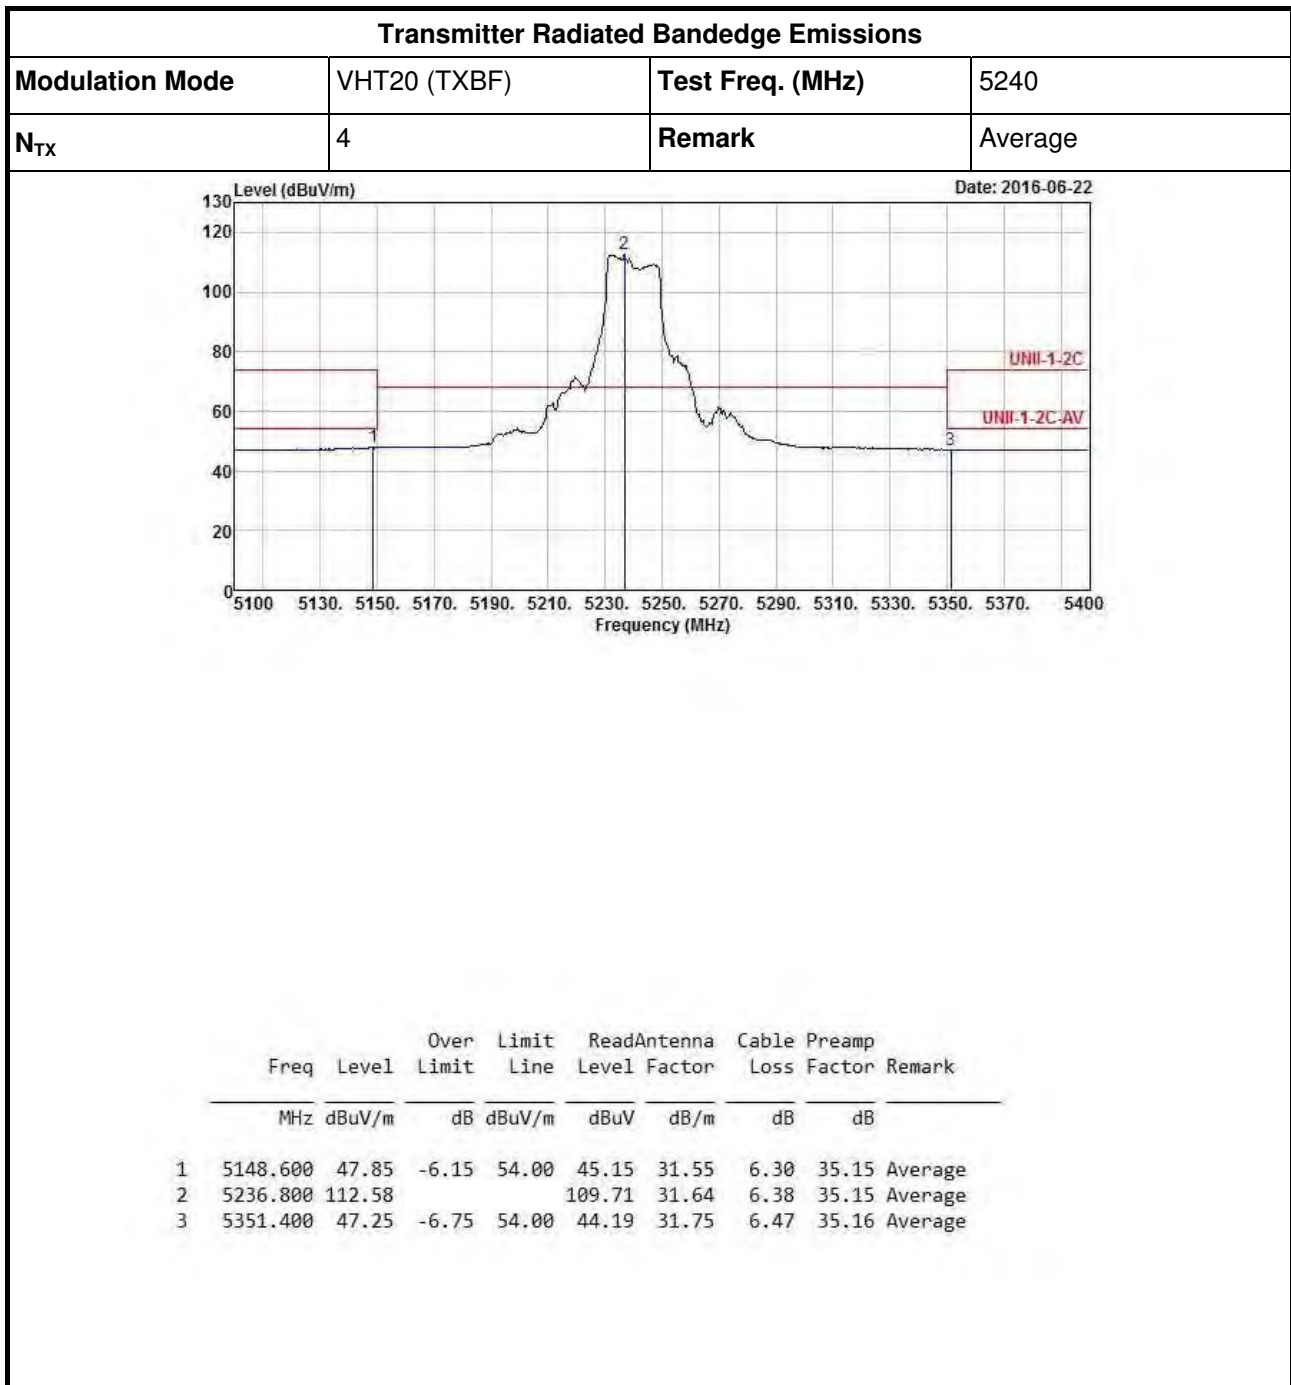


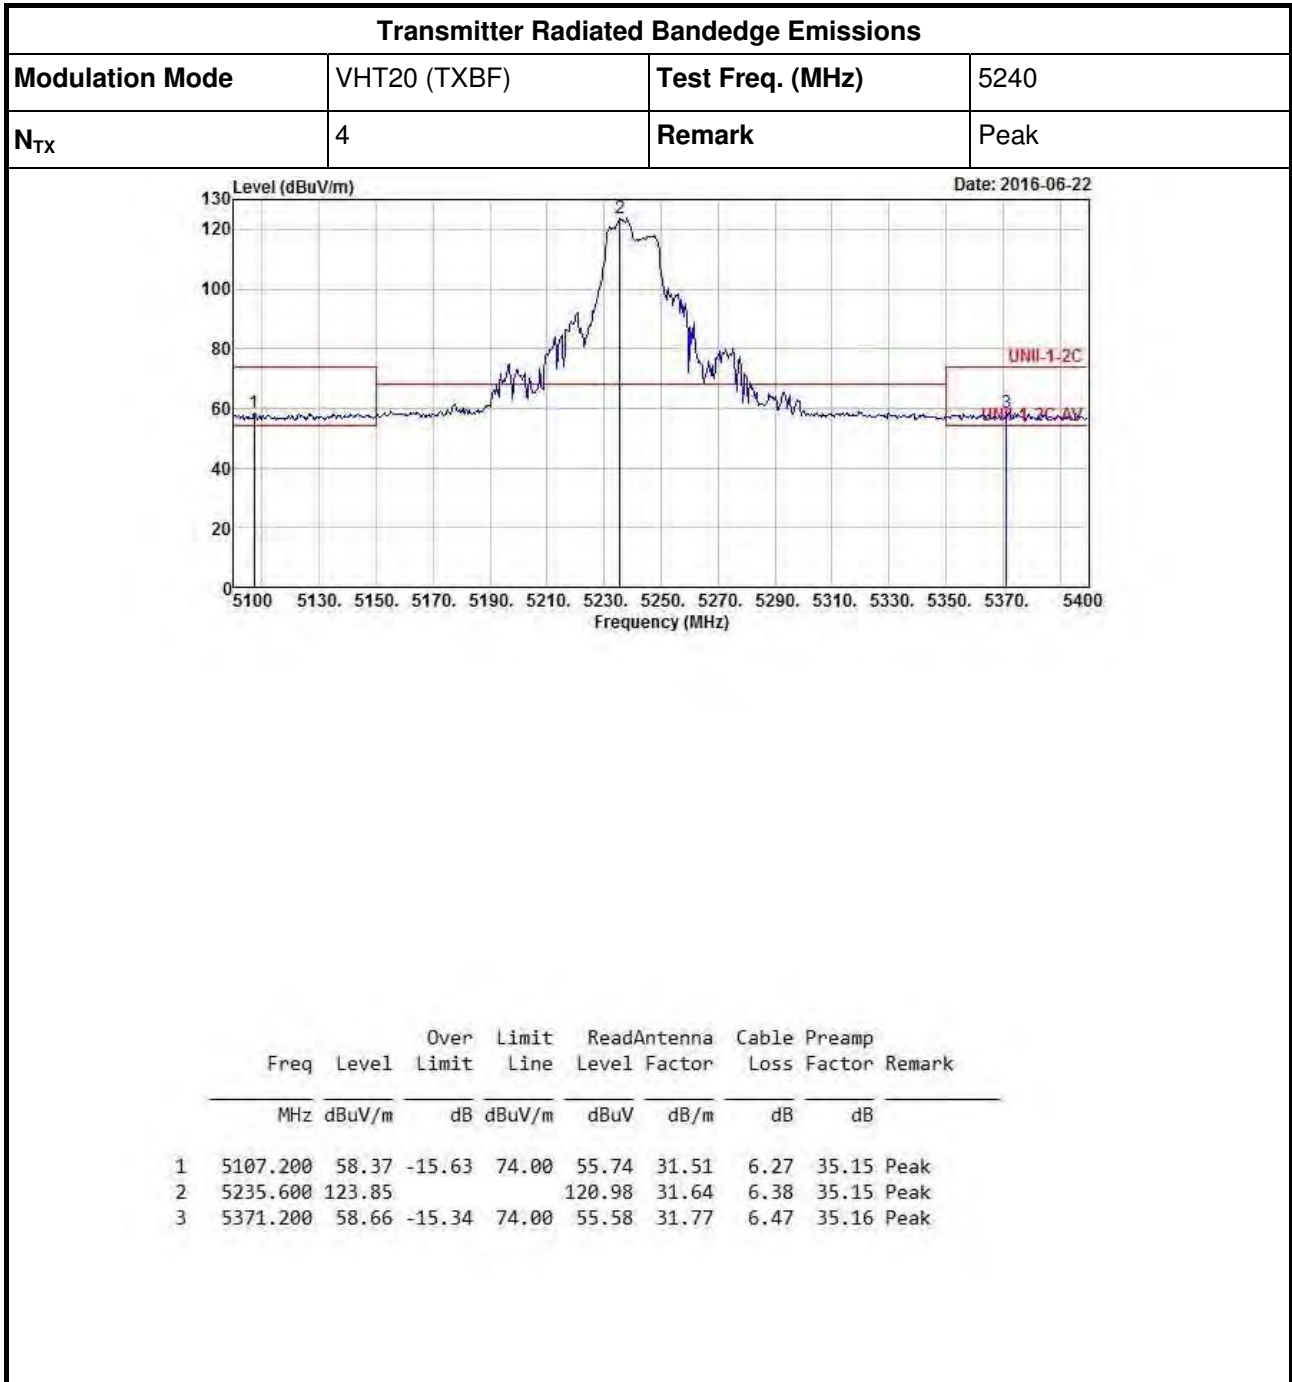


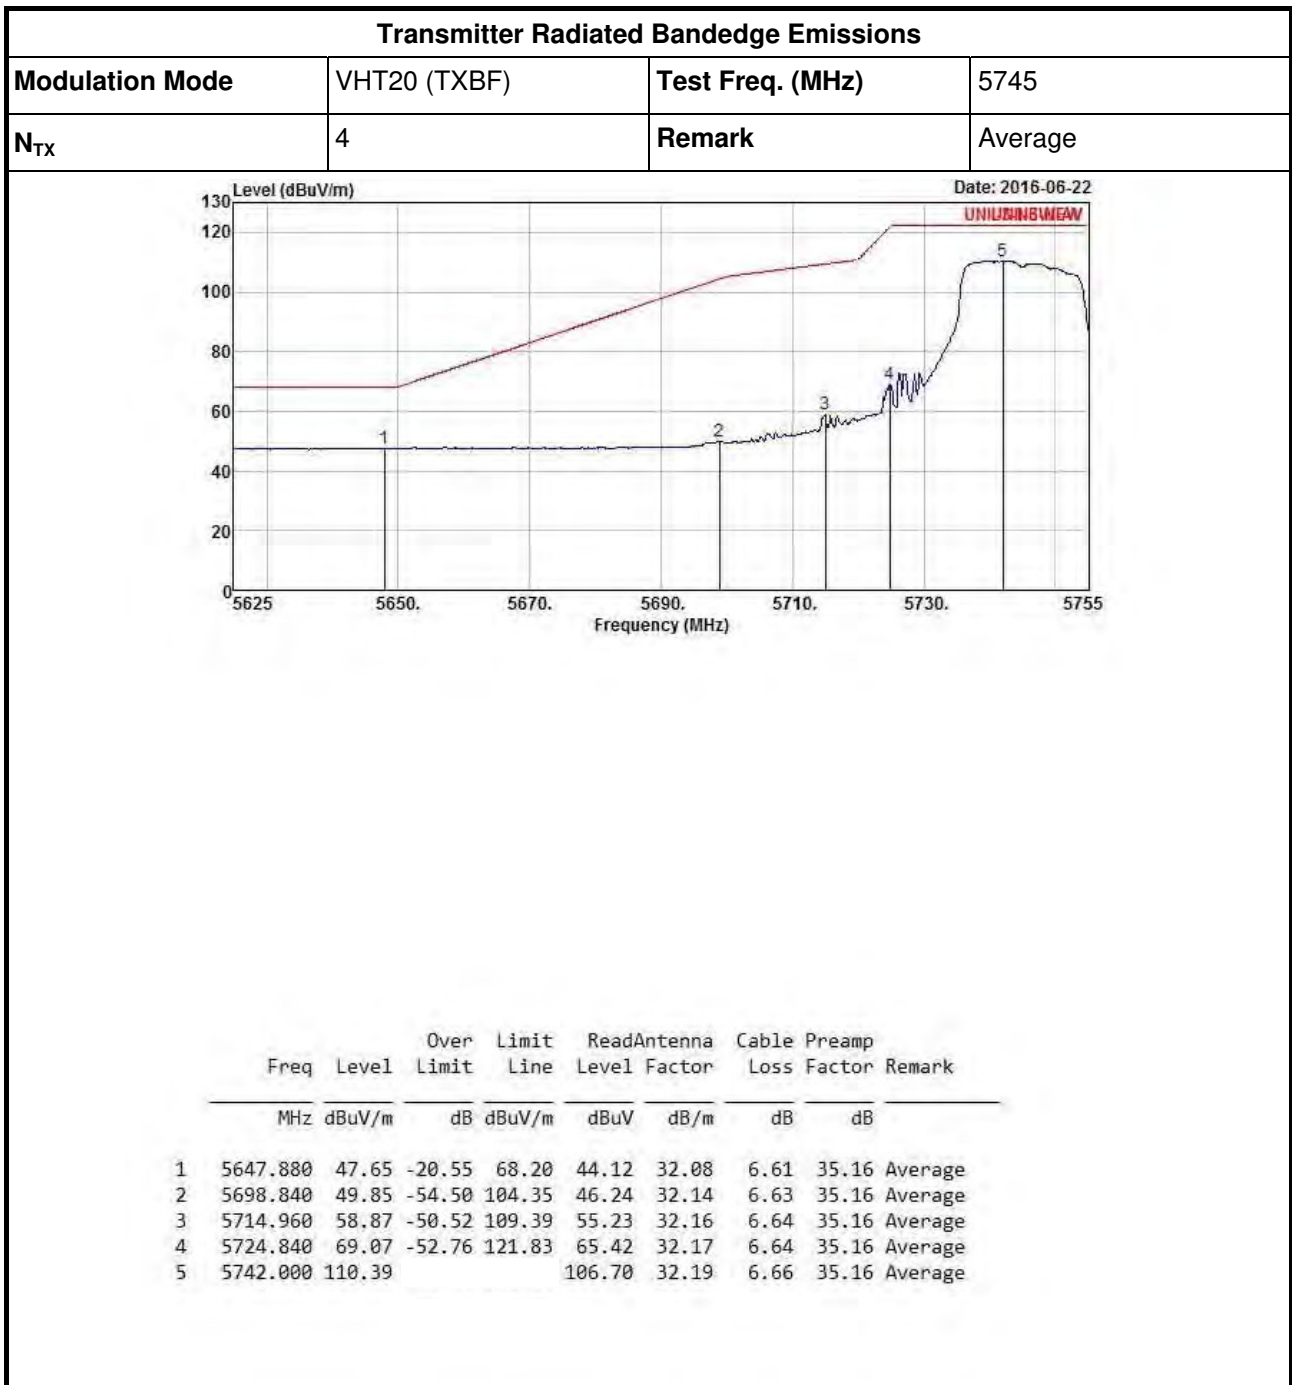


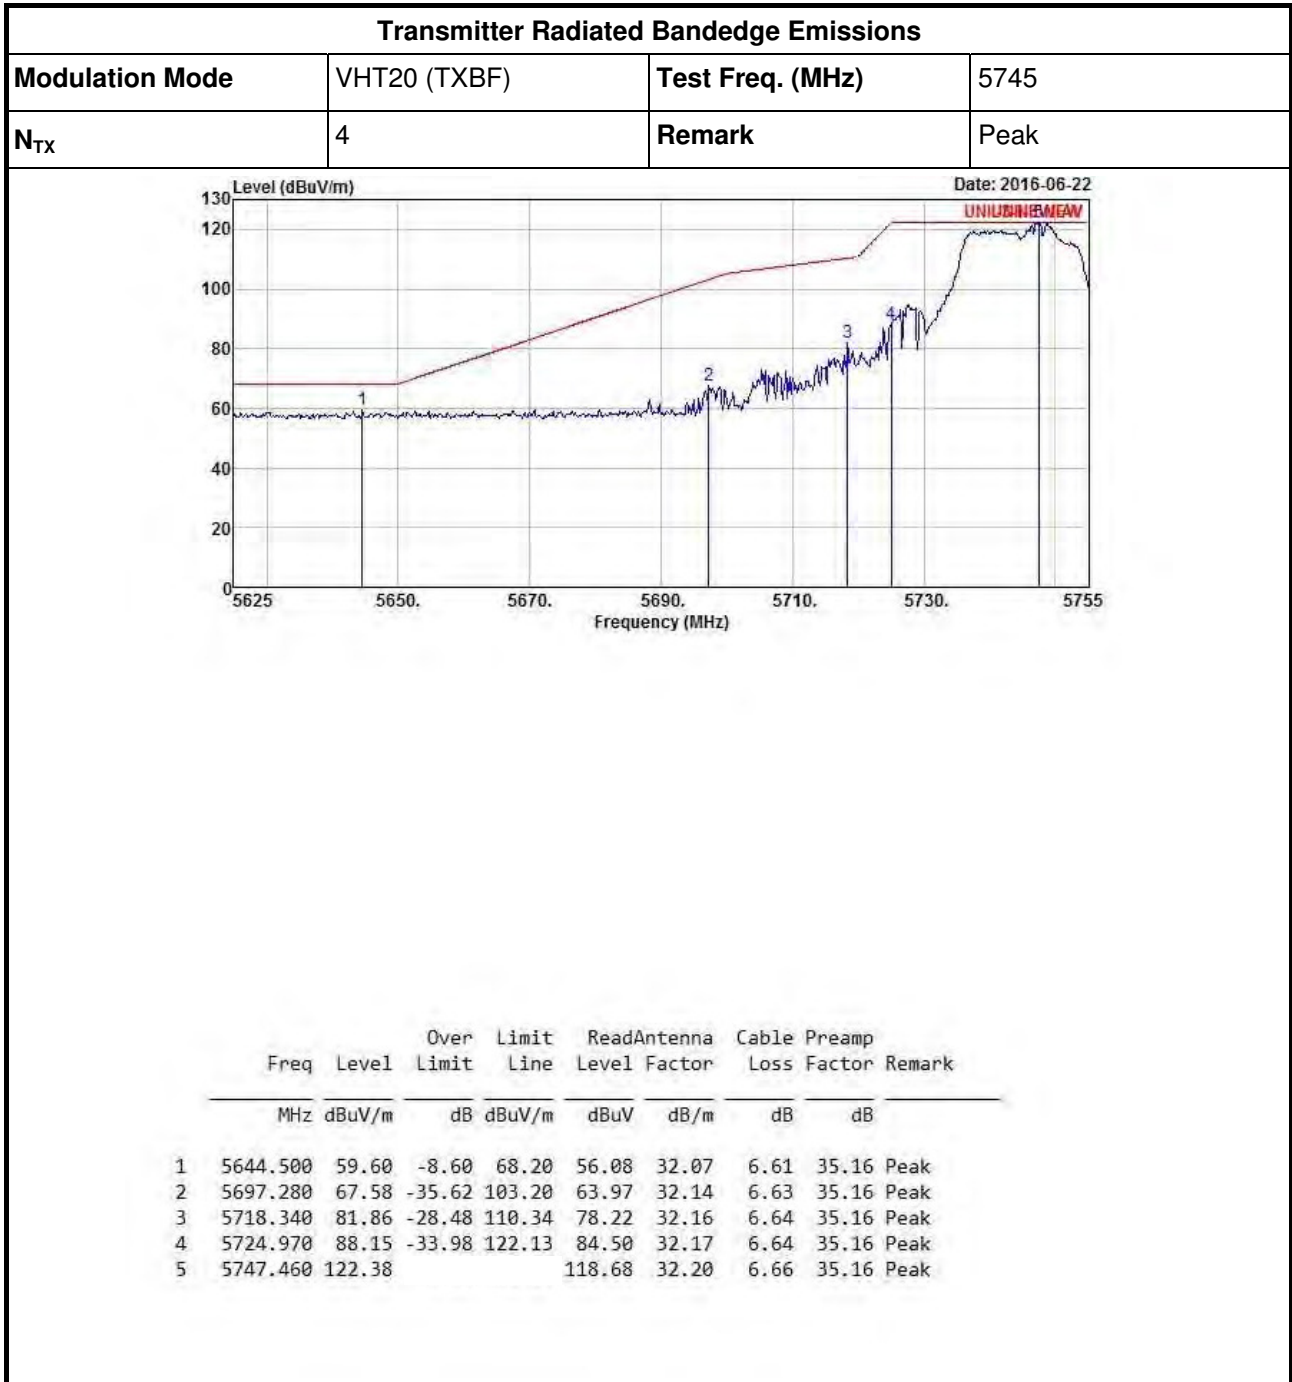


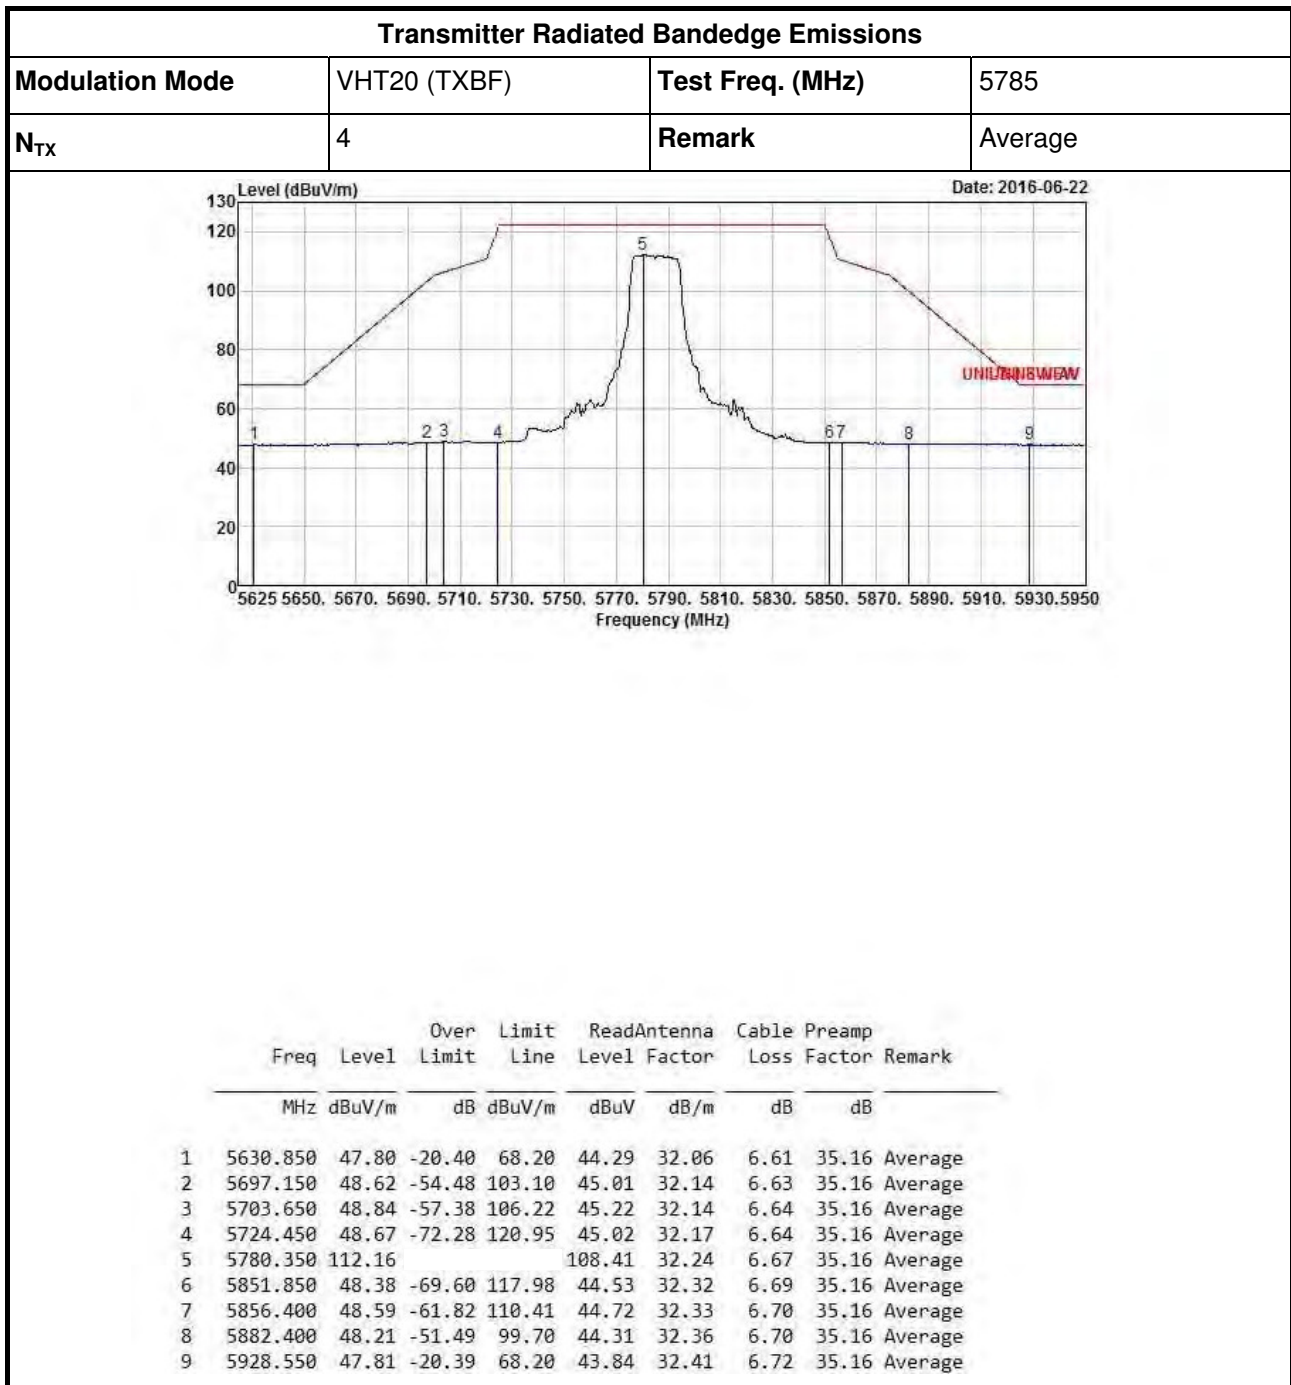


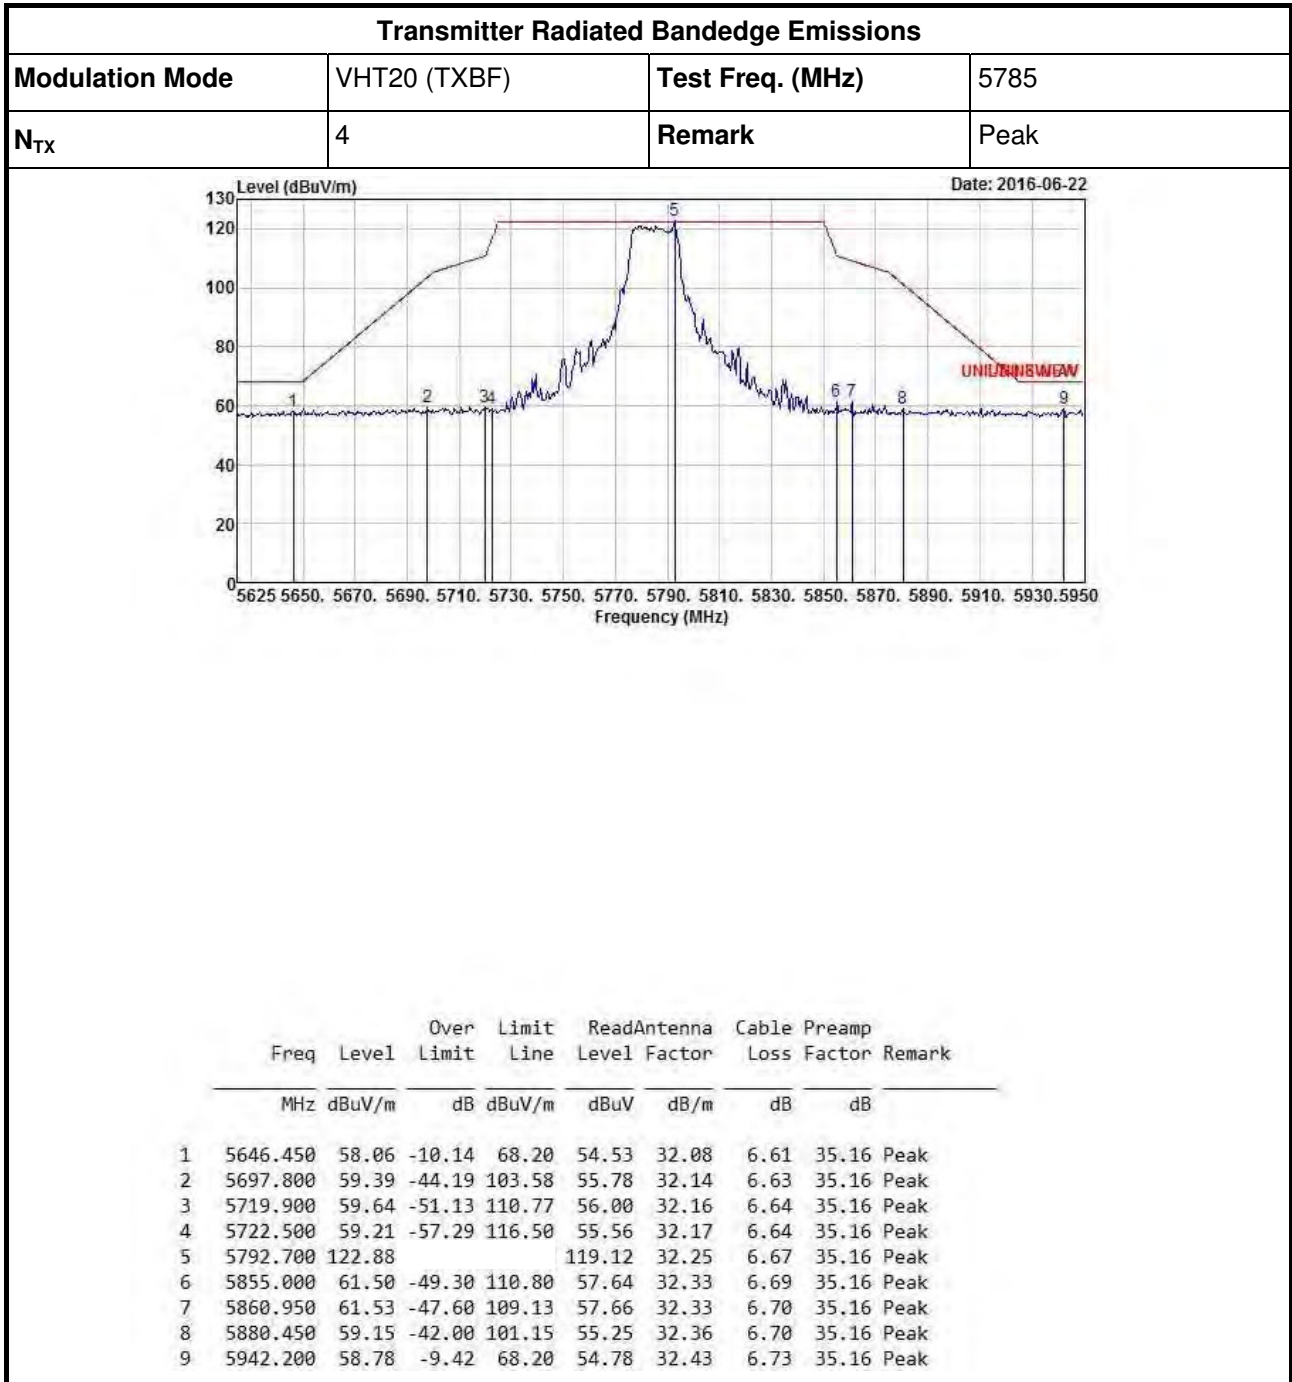


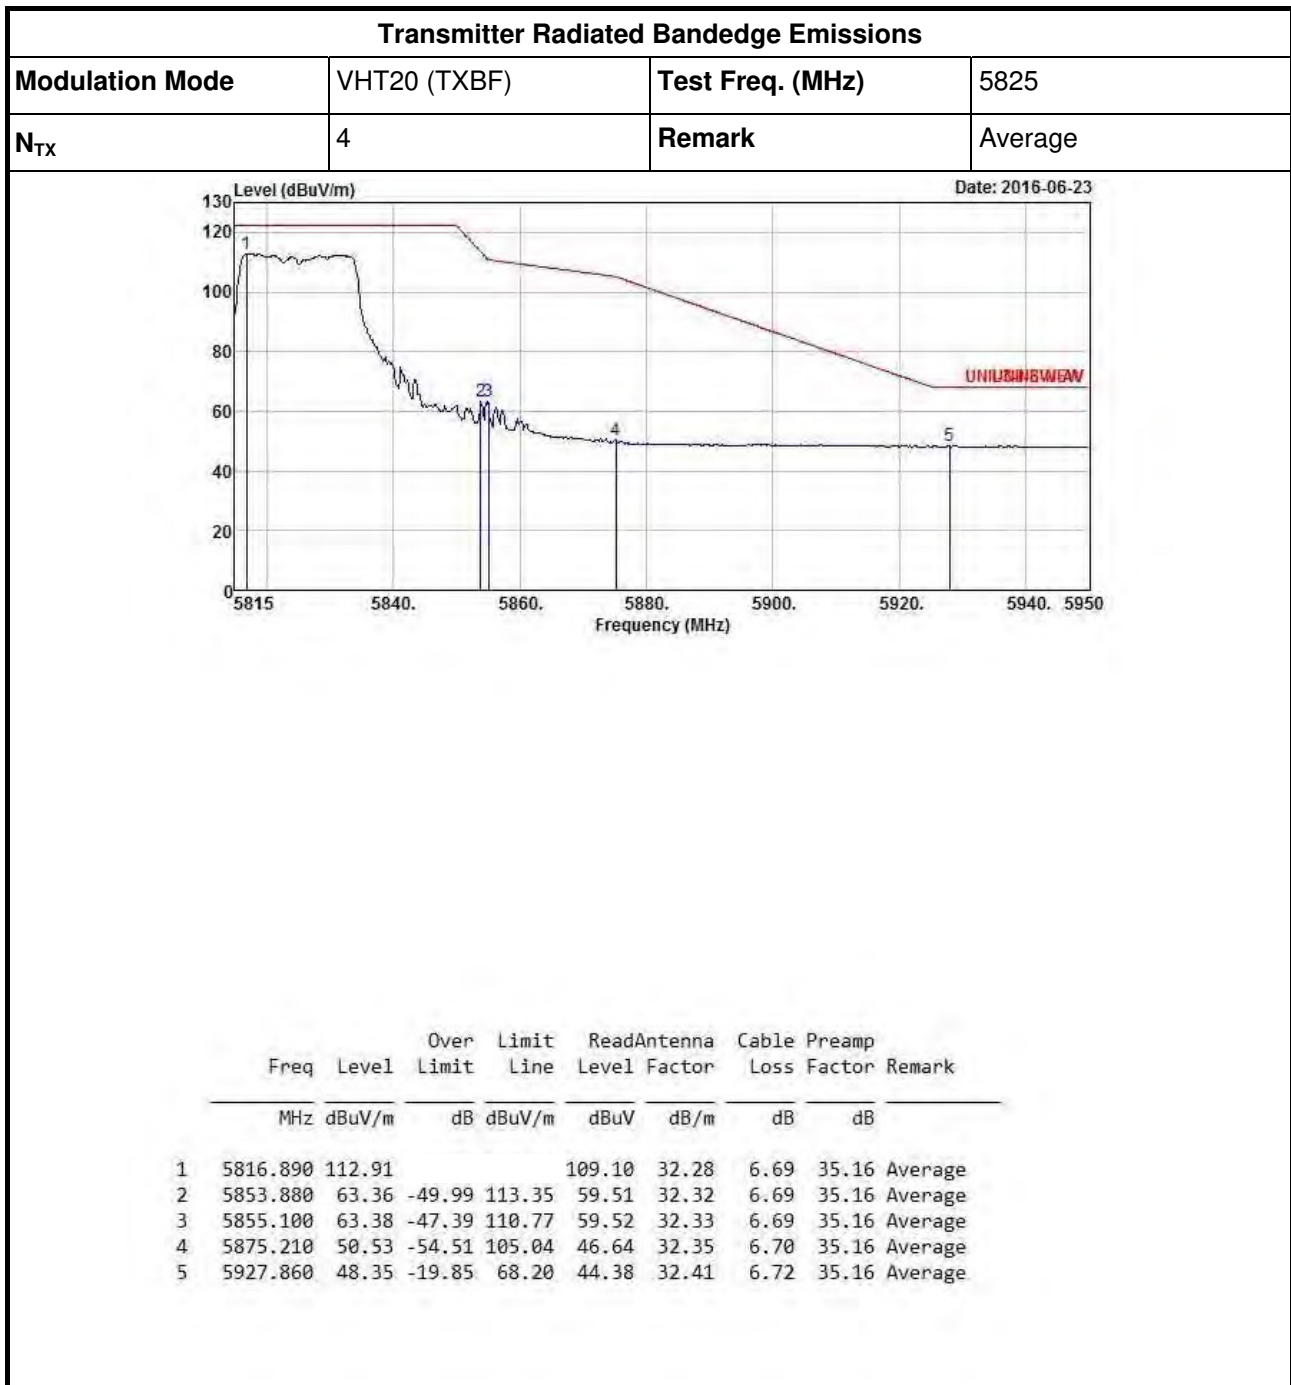


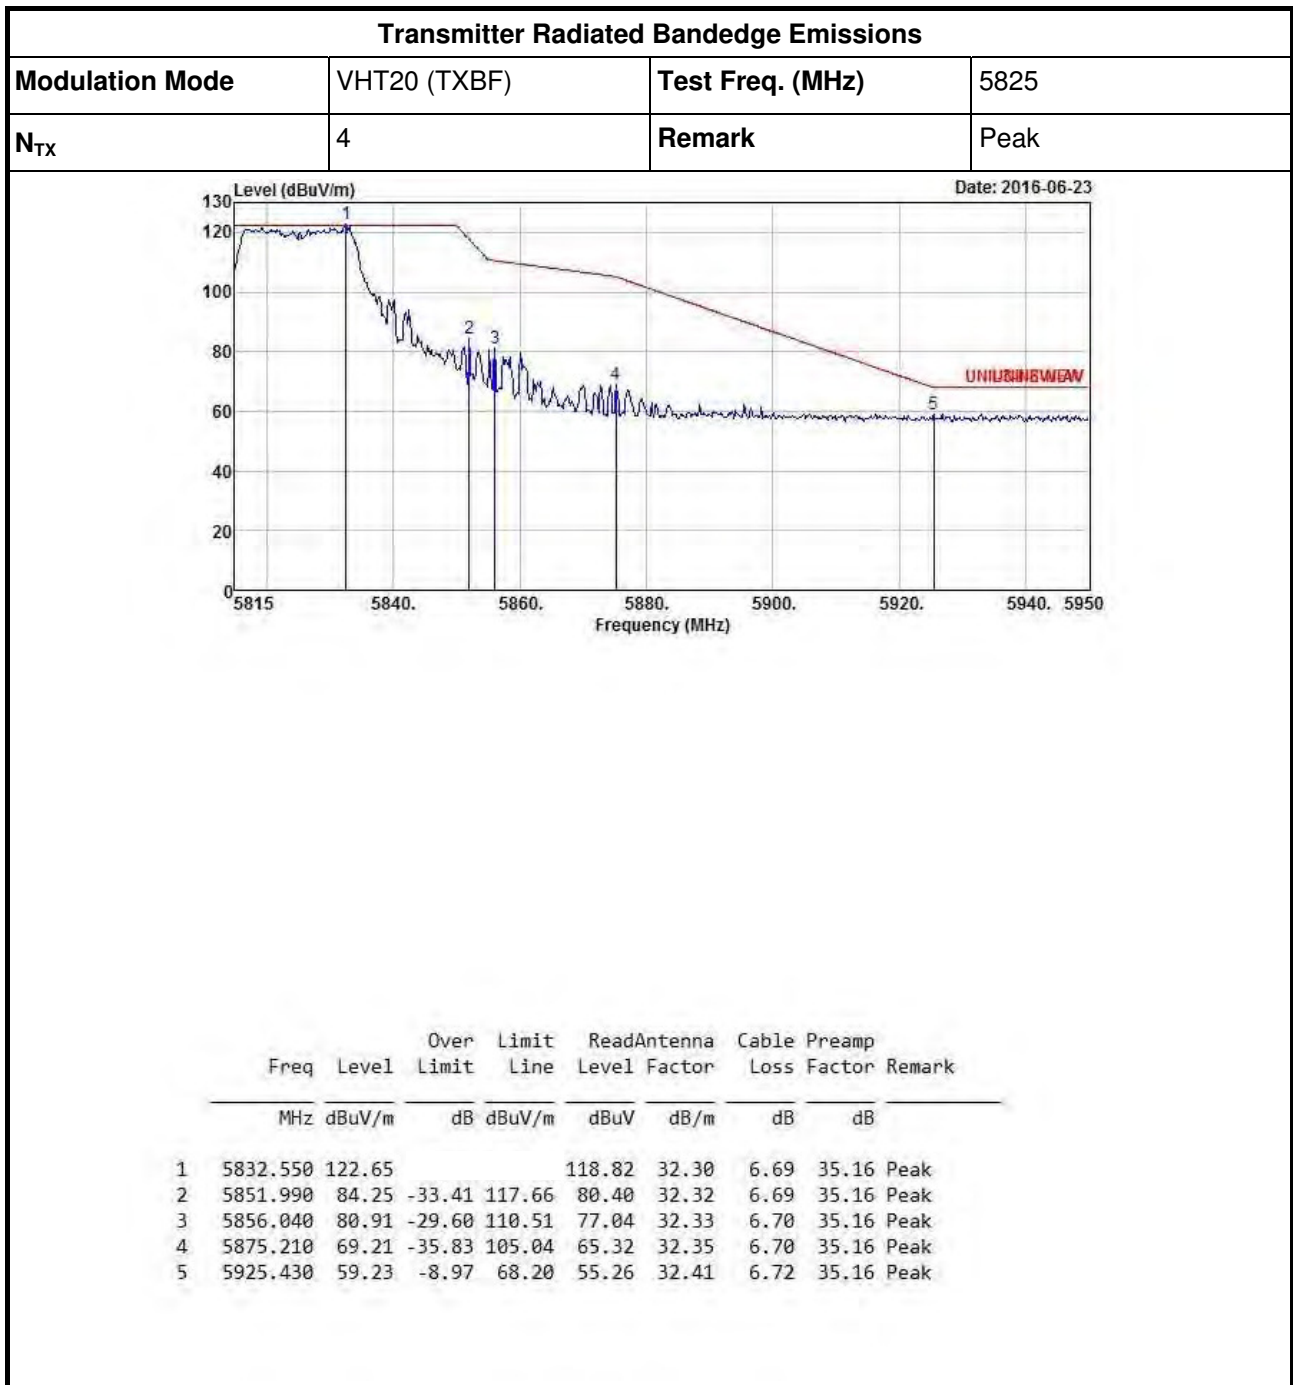


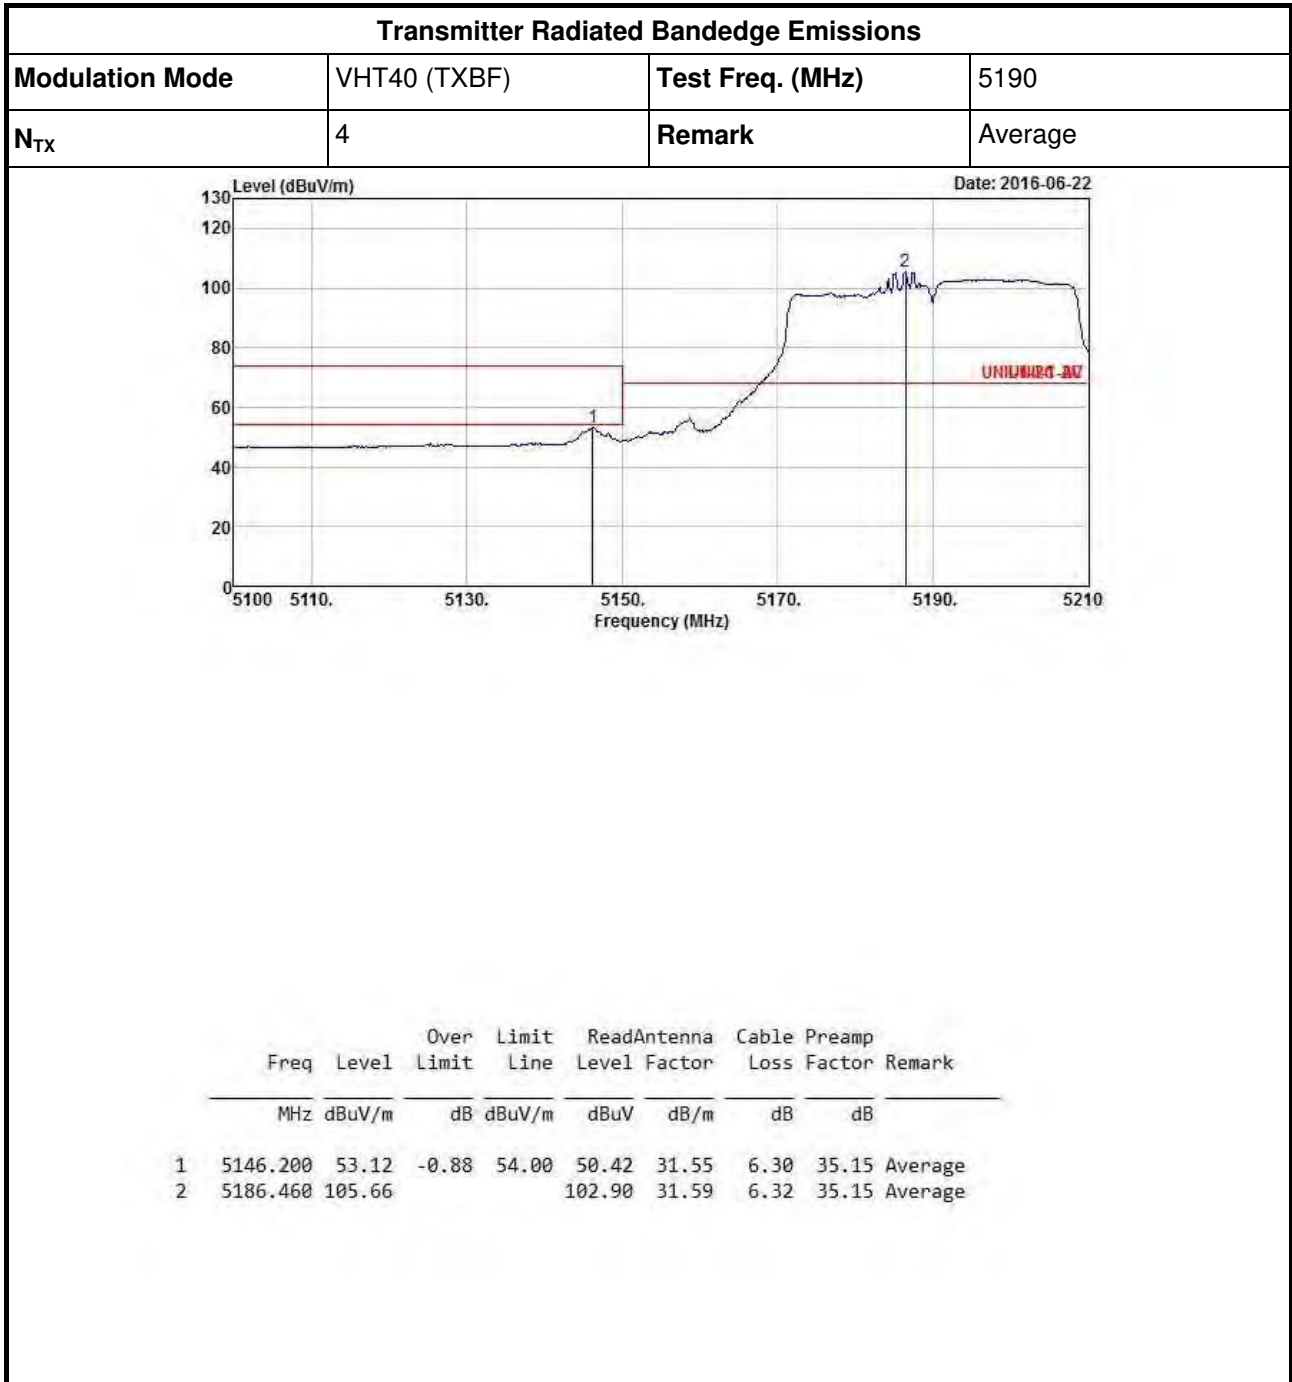


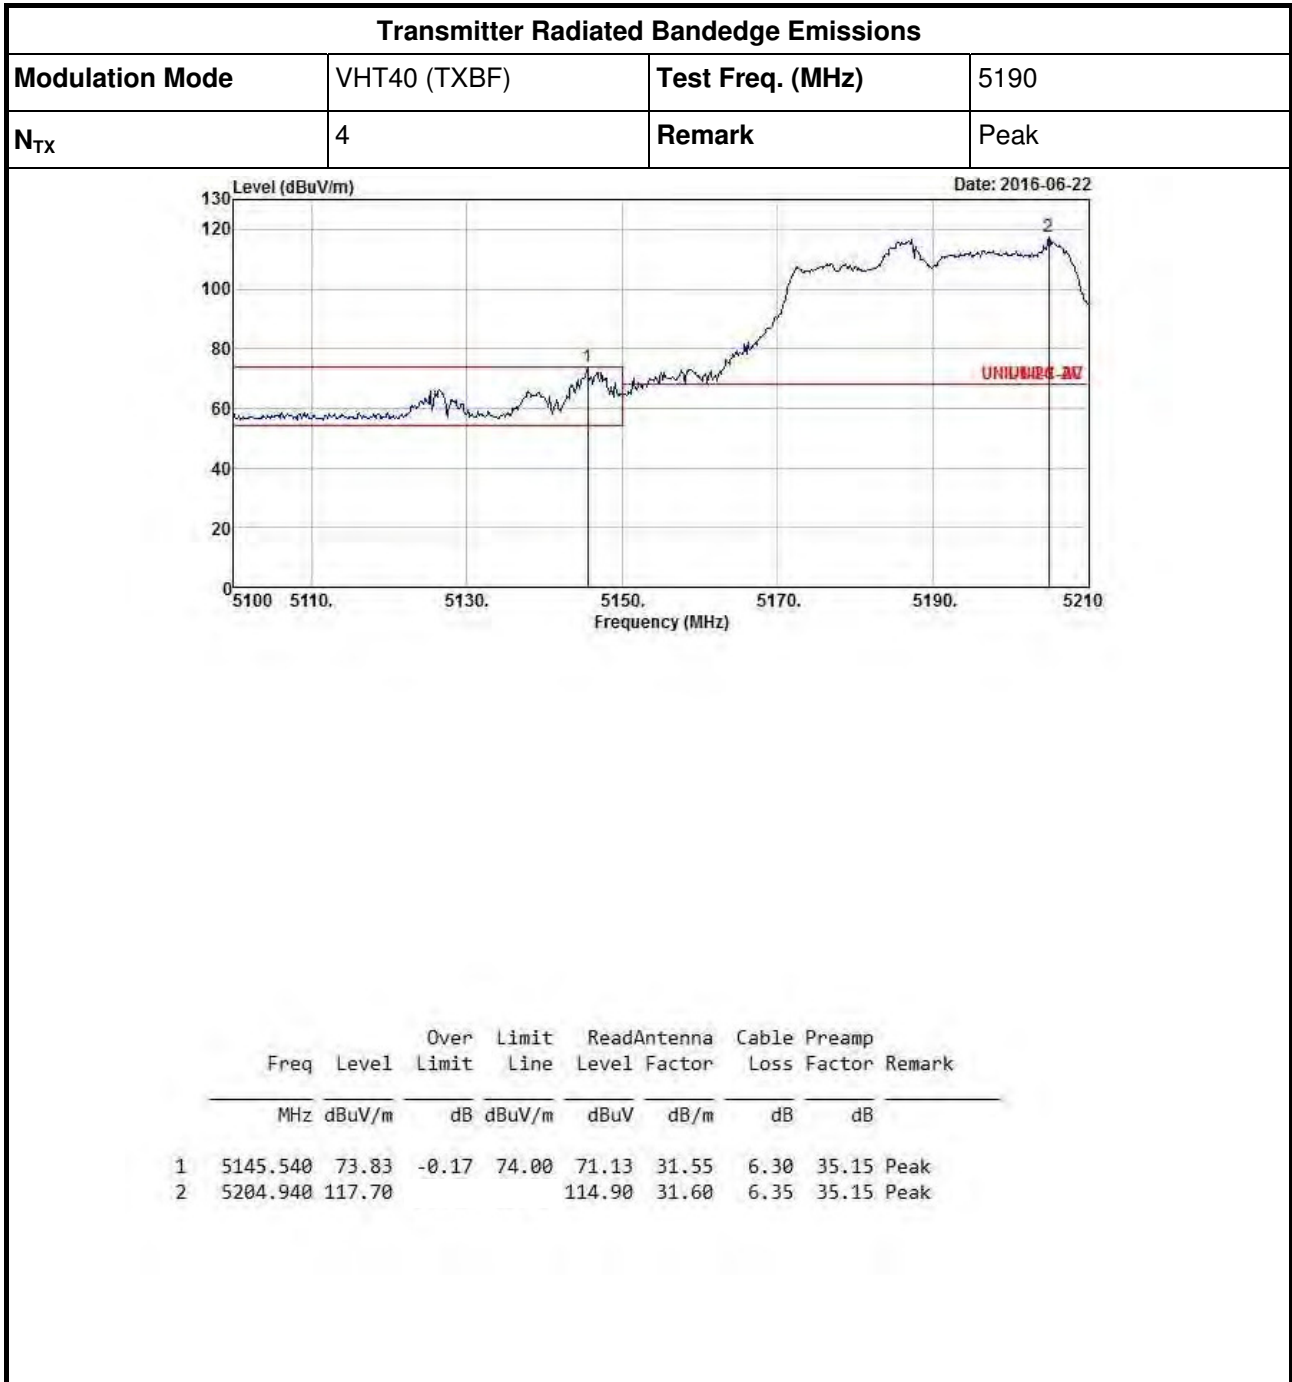


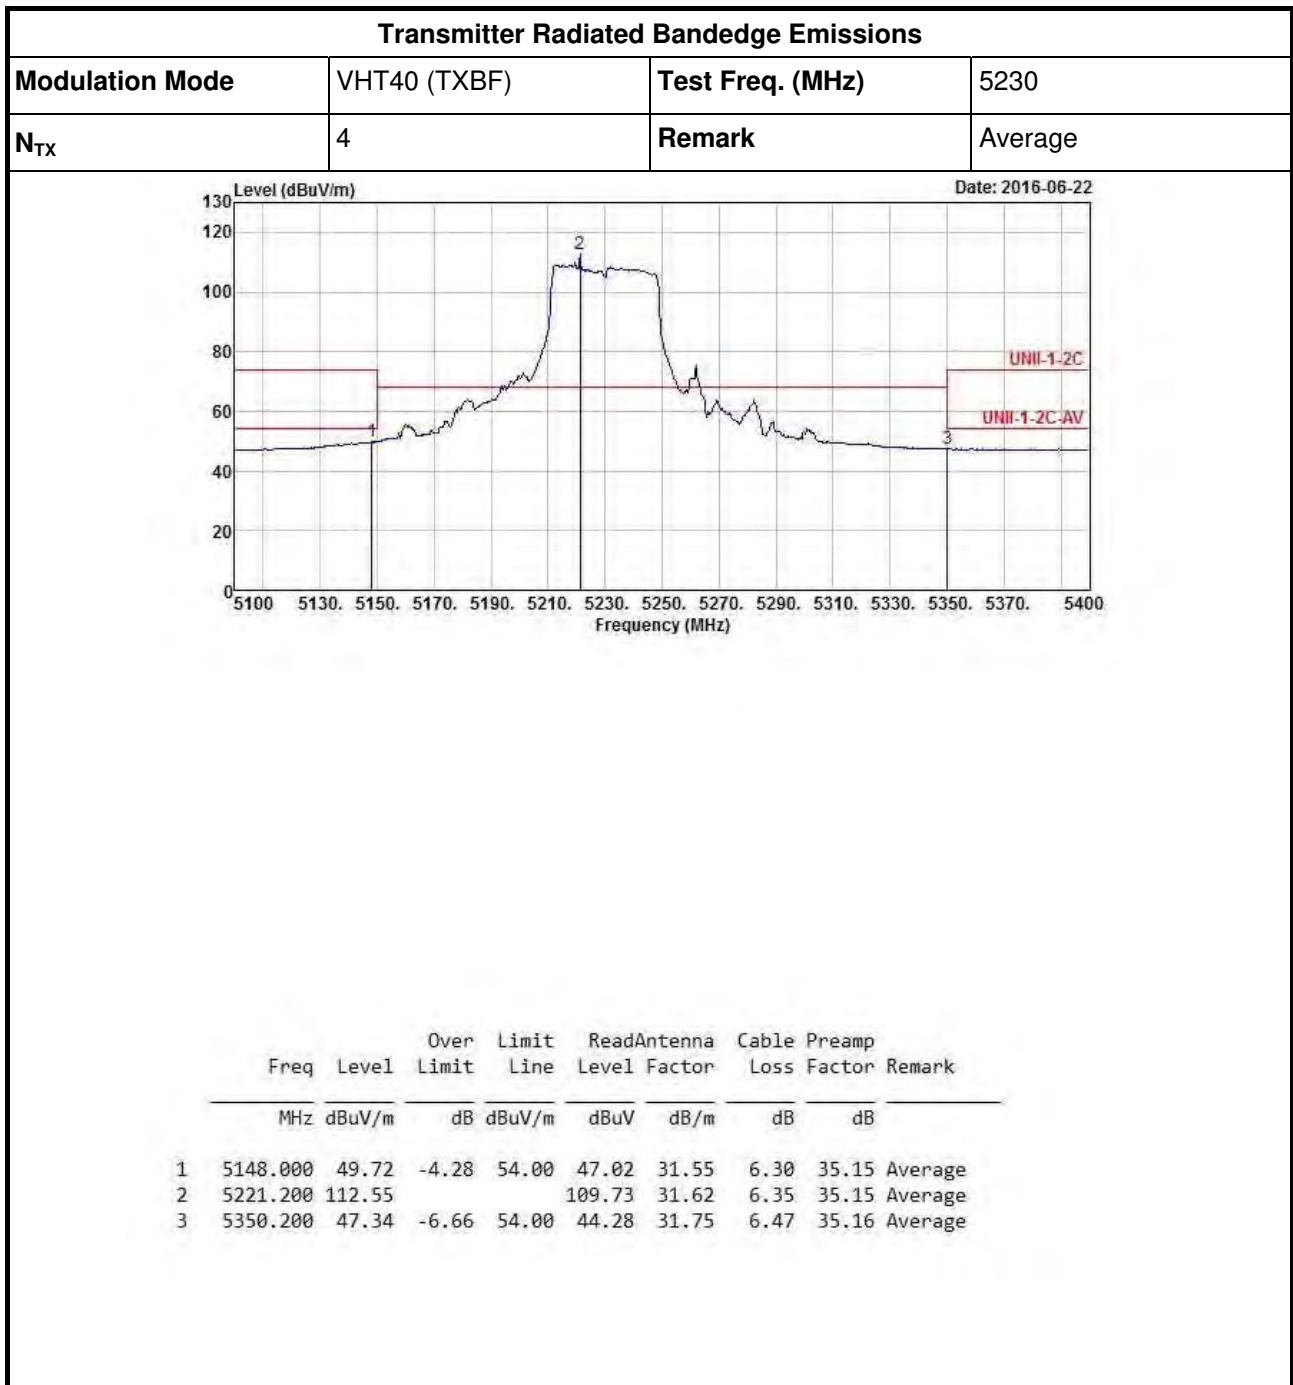


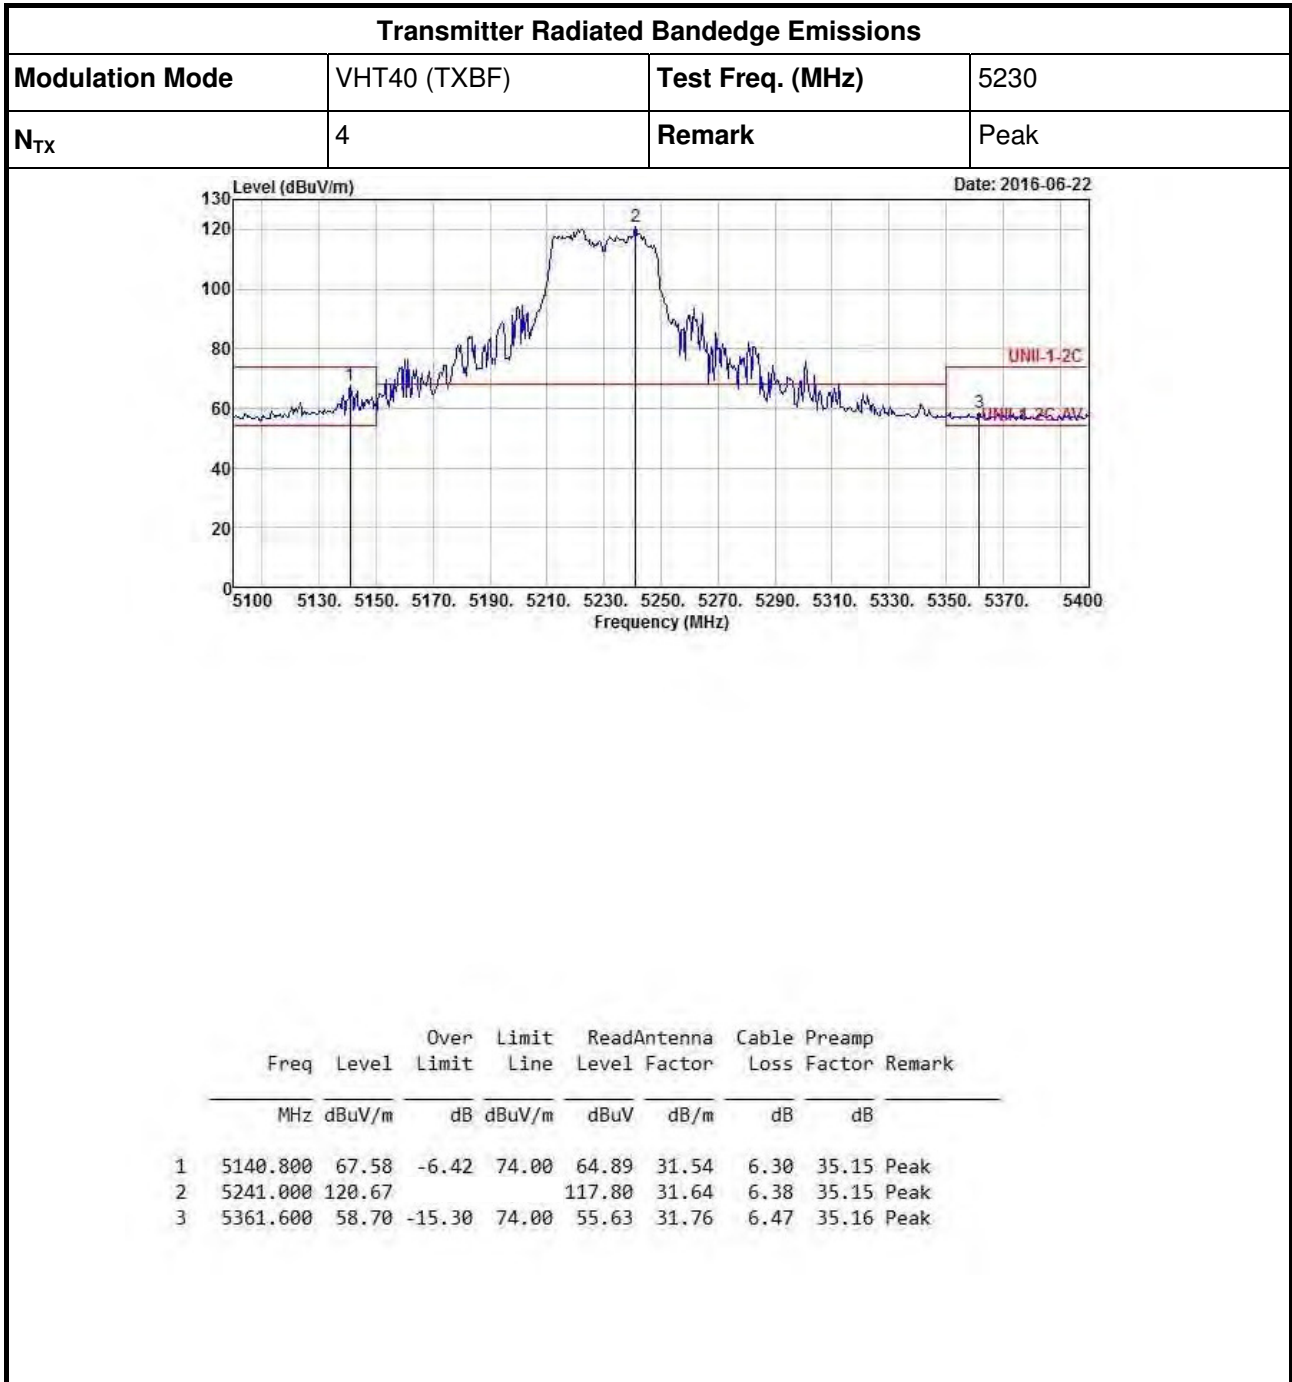

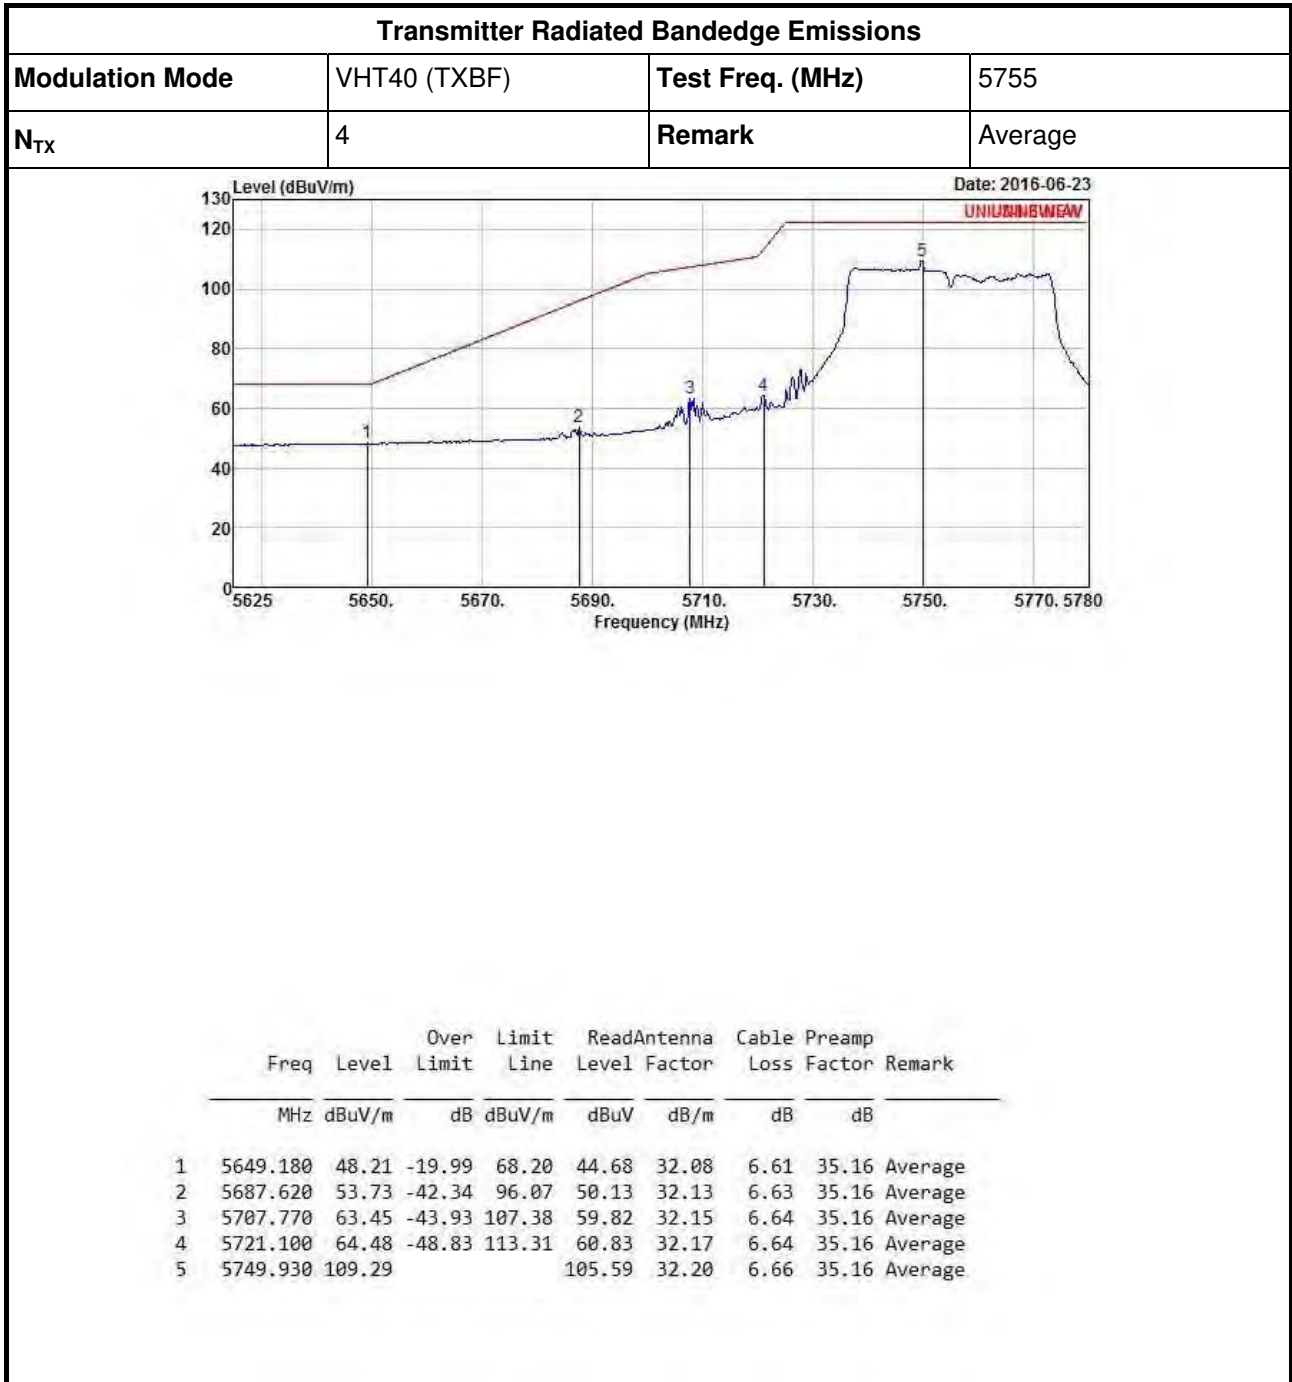

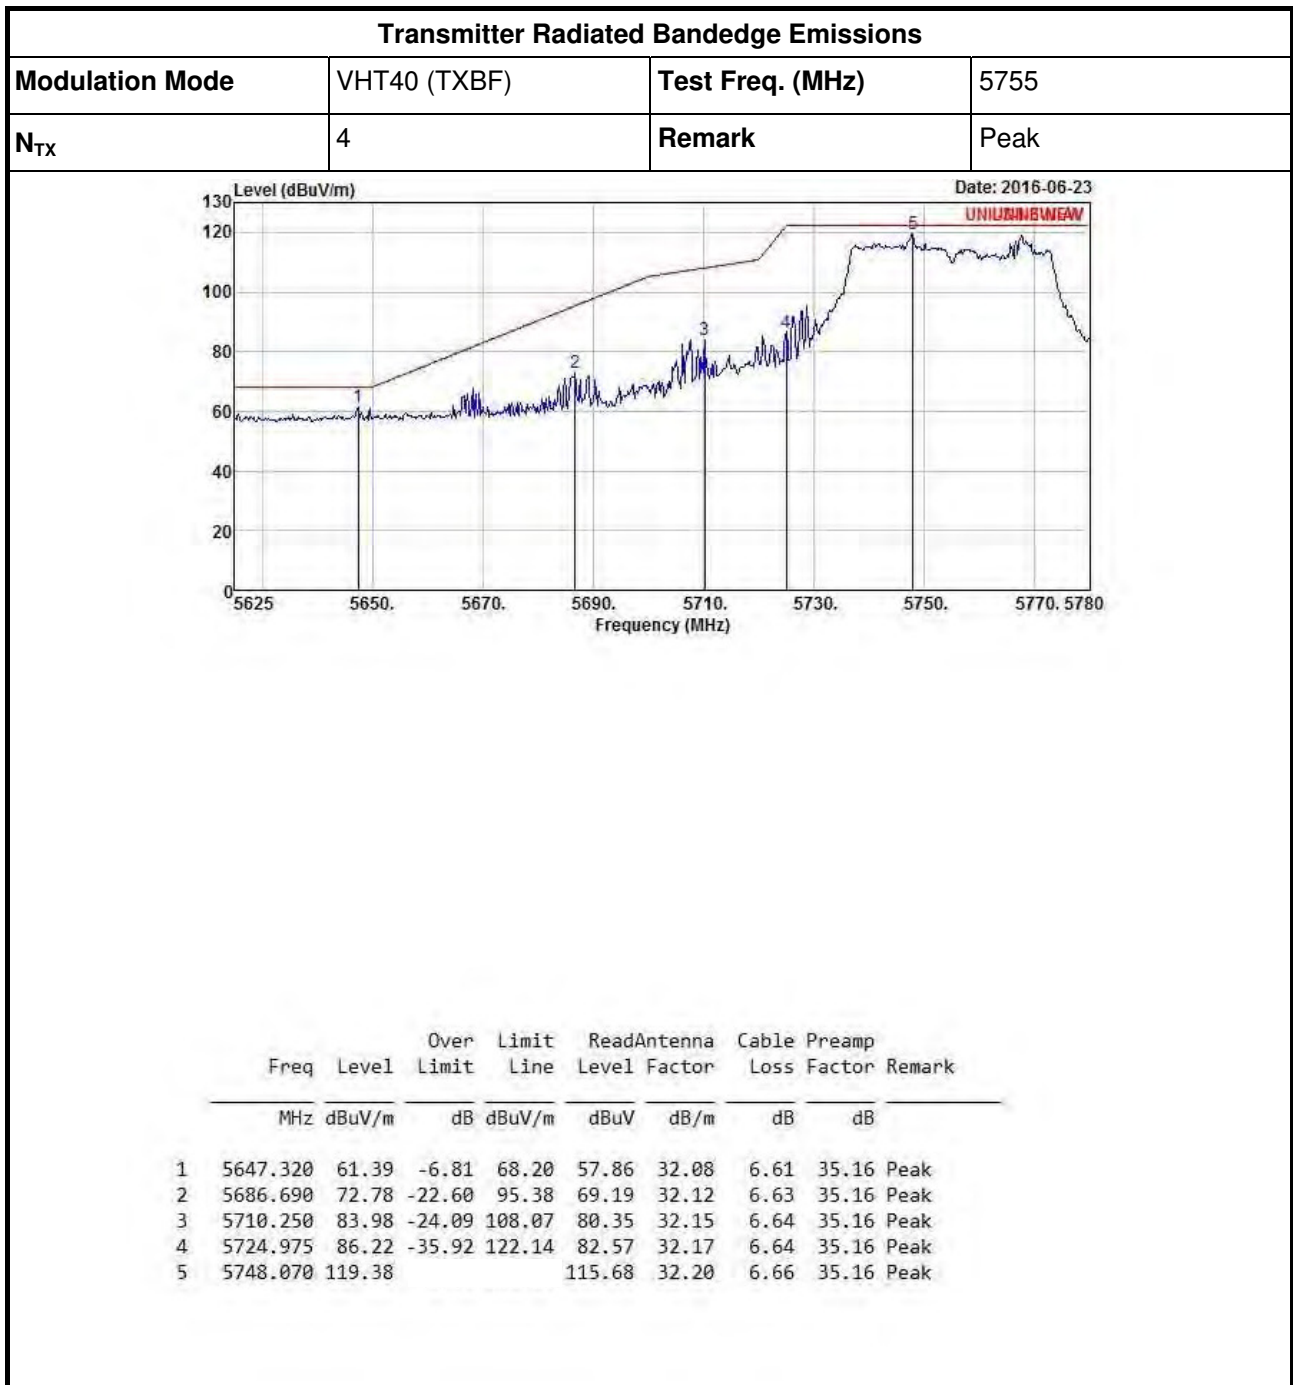


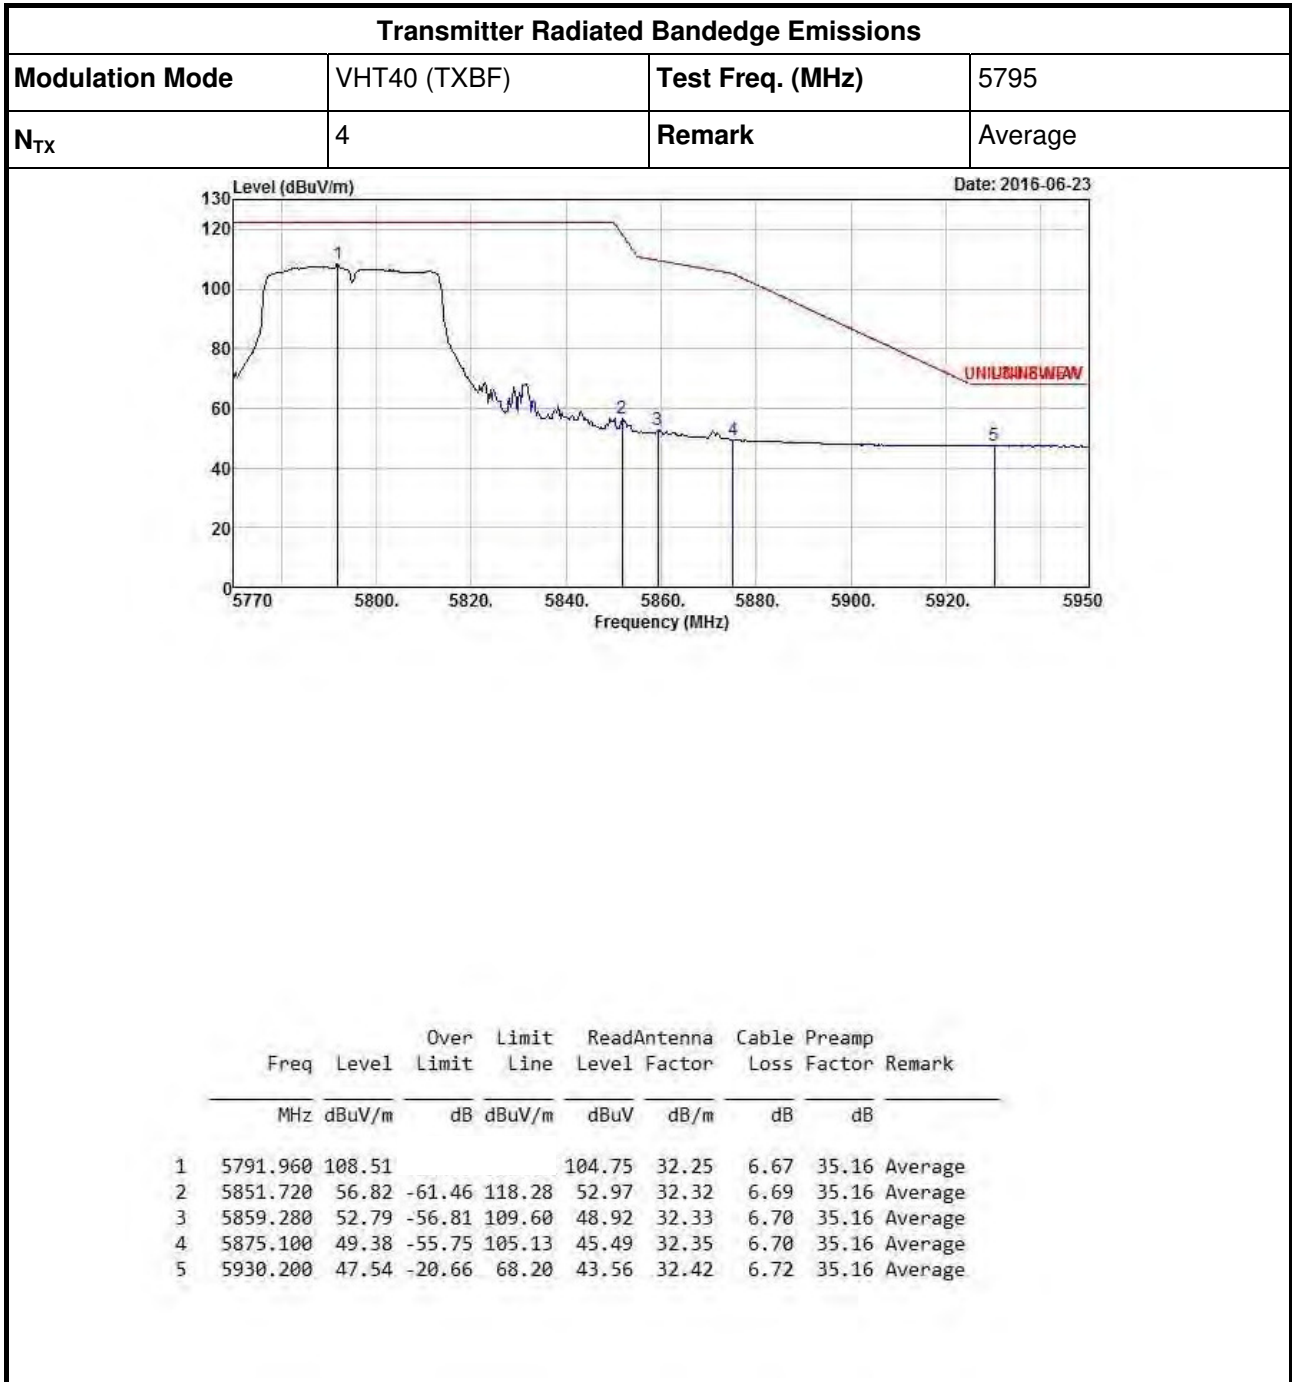

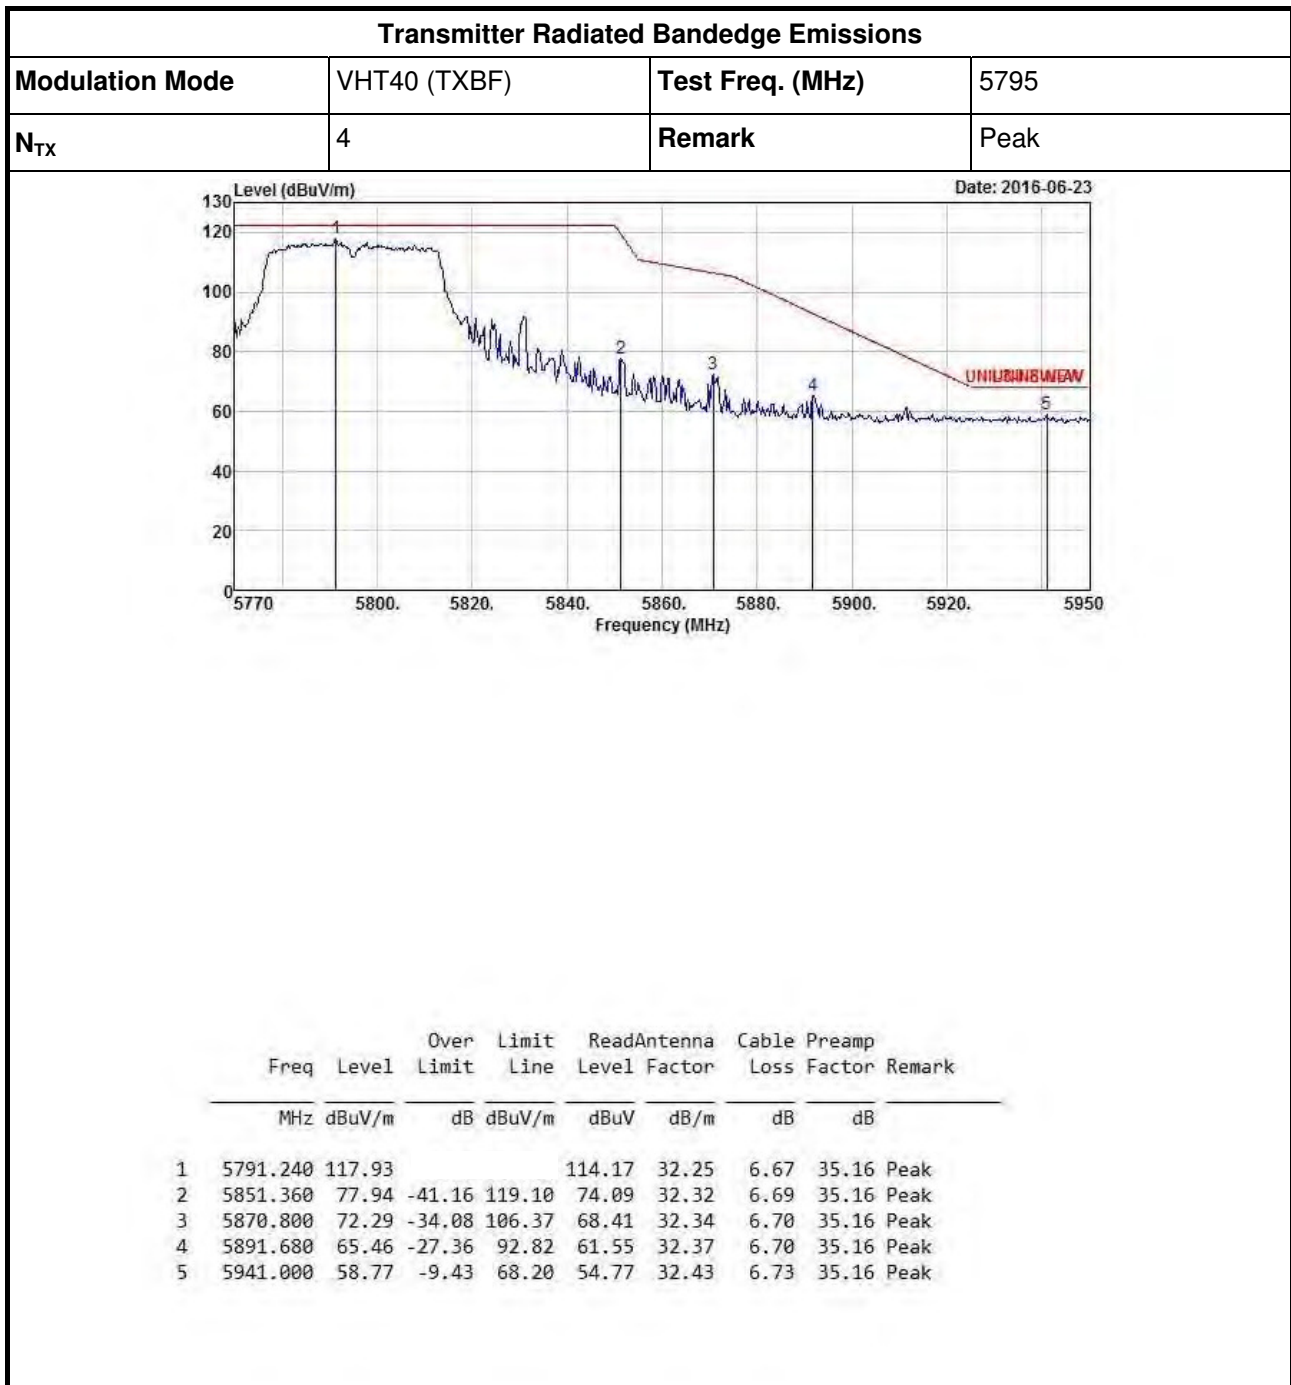






Modulation Mode	VHT80 (TxBF)	Test Freq. (MHz)	5210
N _{TX}	4	Remark	Average

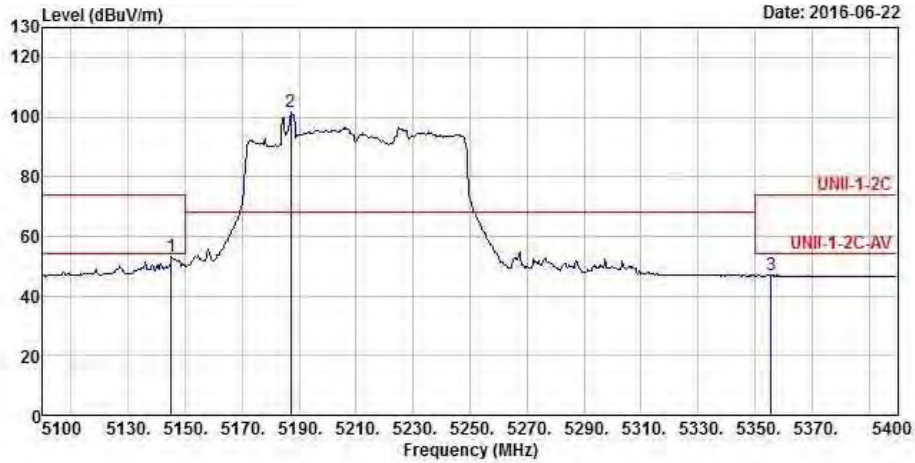



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	5145.000	53.11	-0.89	54.00	50.41	31.55	6.30	35.15 Average
2	5187.000	101.88			99.12	31.59	6.32	35.15 Average
3	5355.600	46.93	-7.07	54.00	43.86	31.76	6.47	35.16 Average

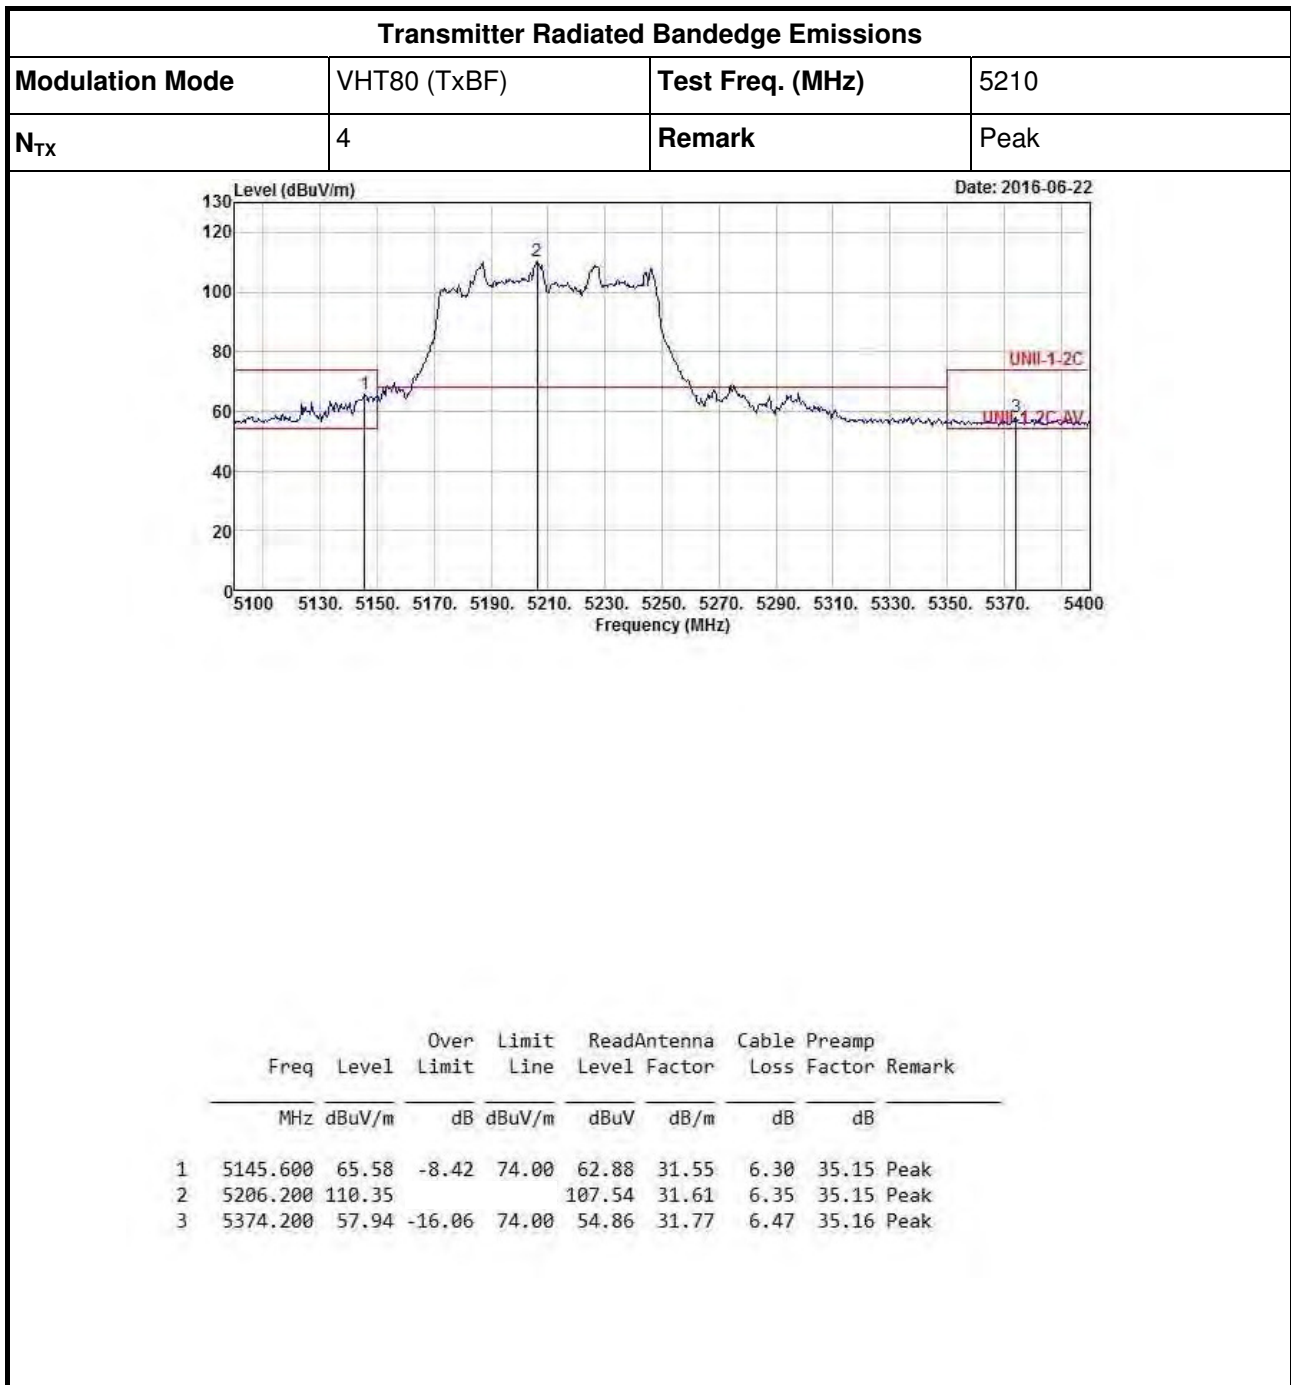


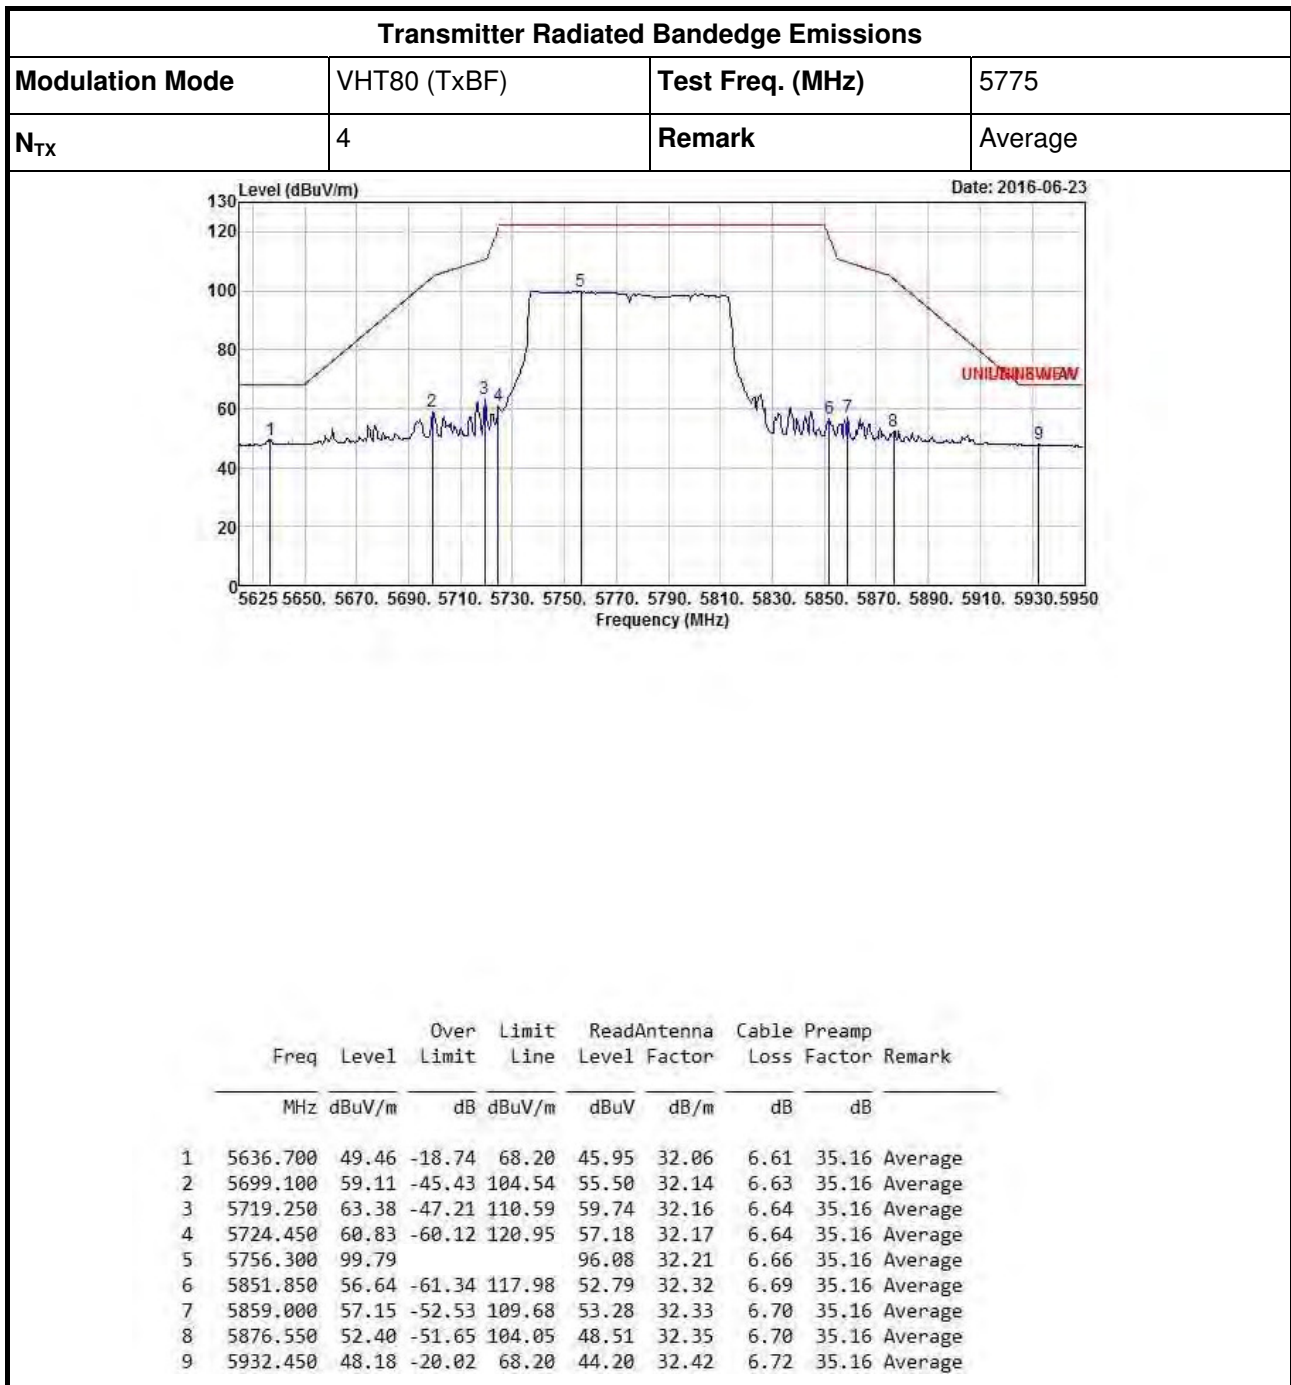


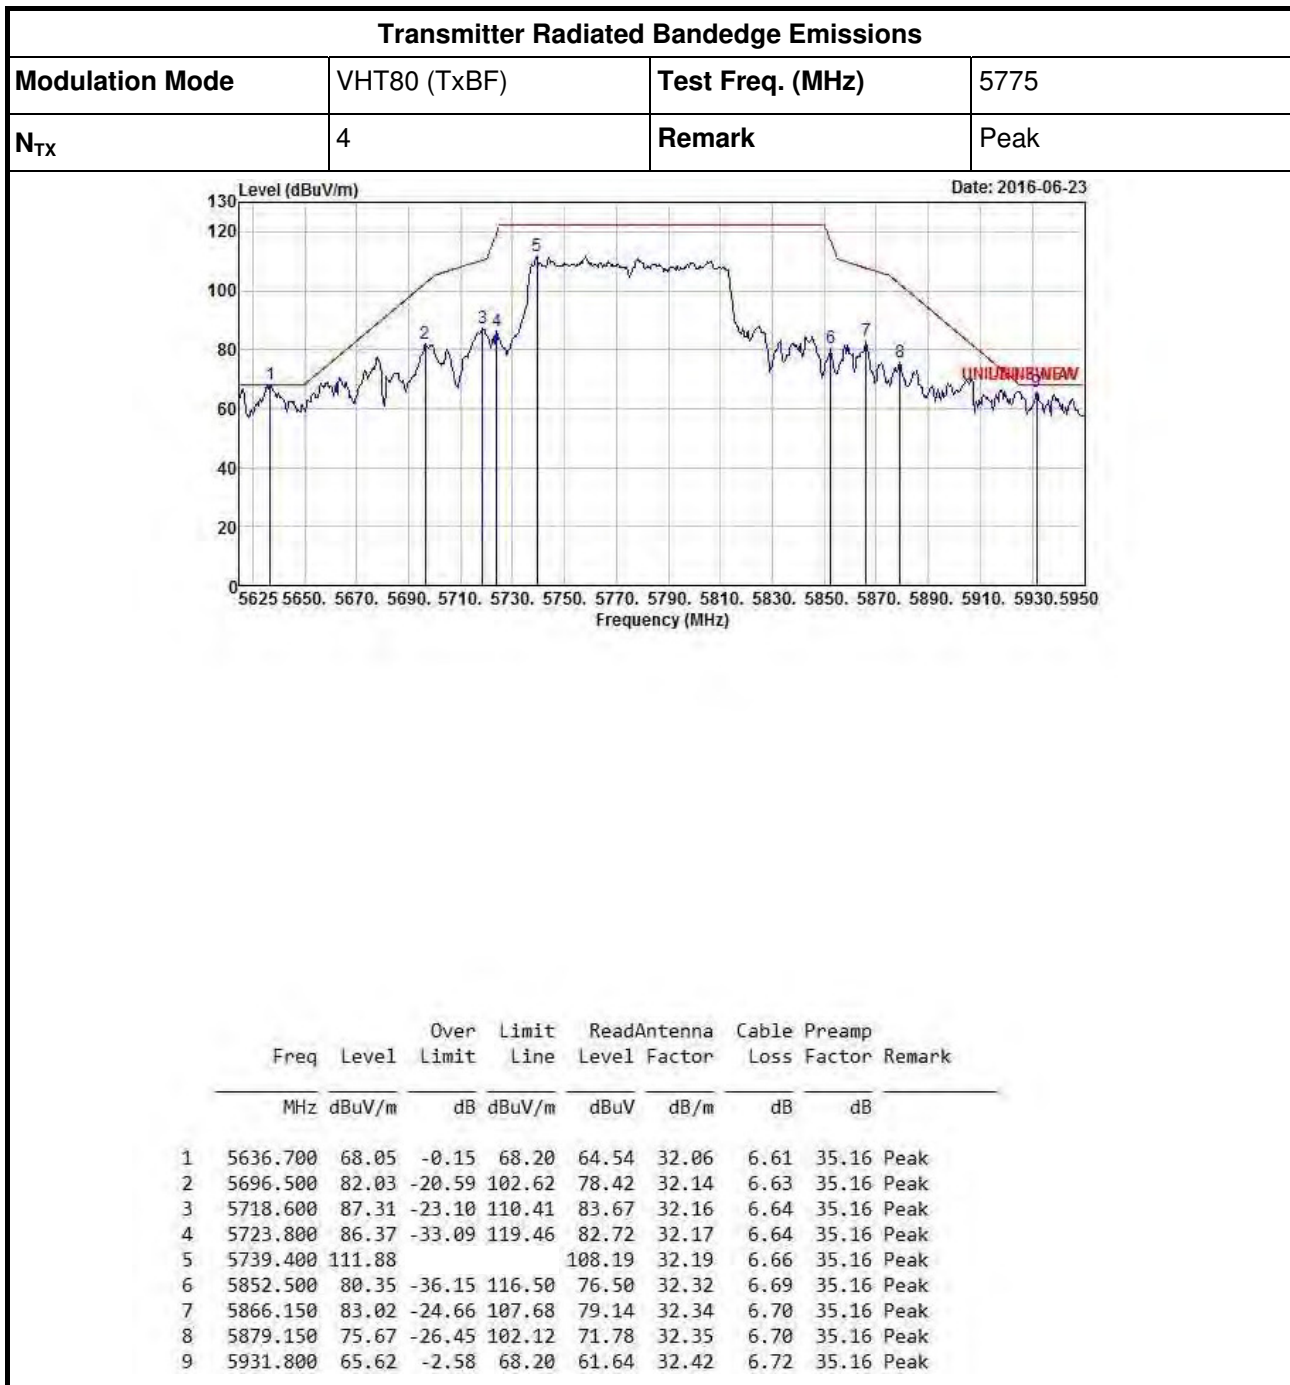

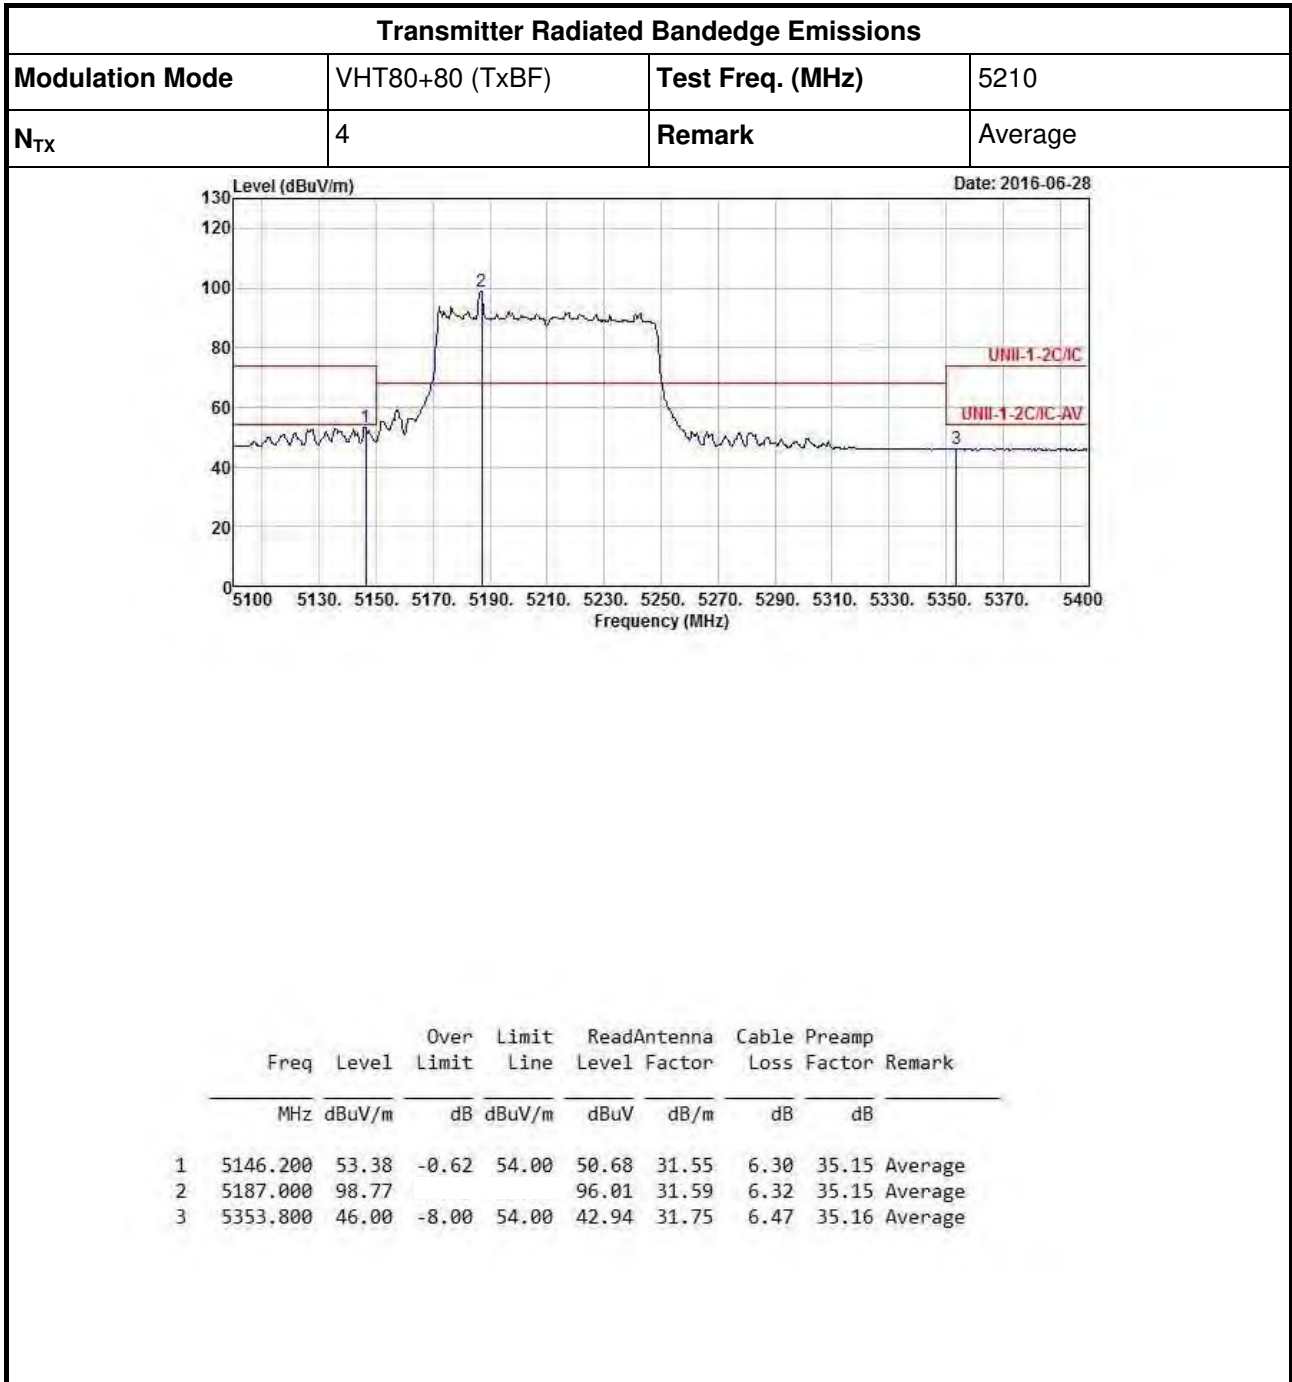

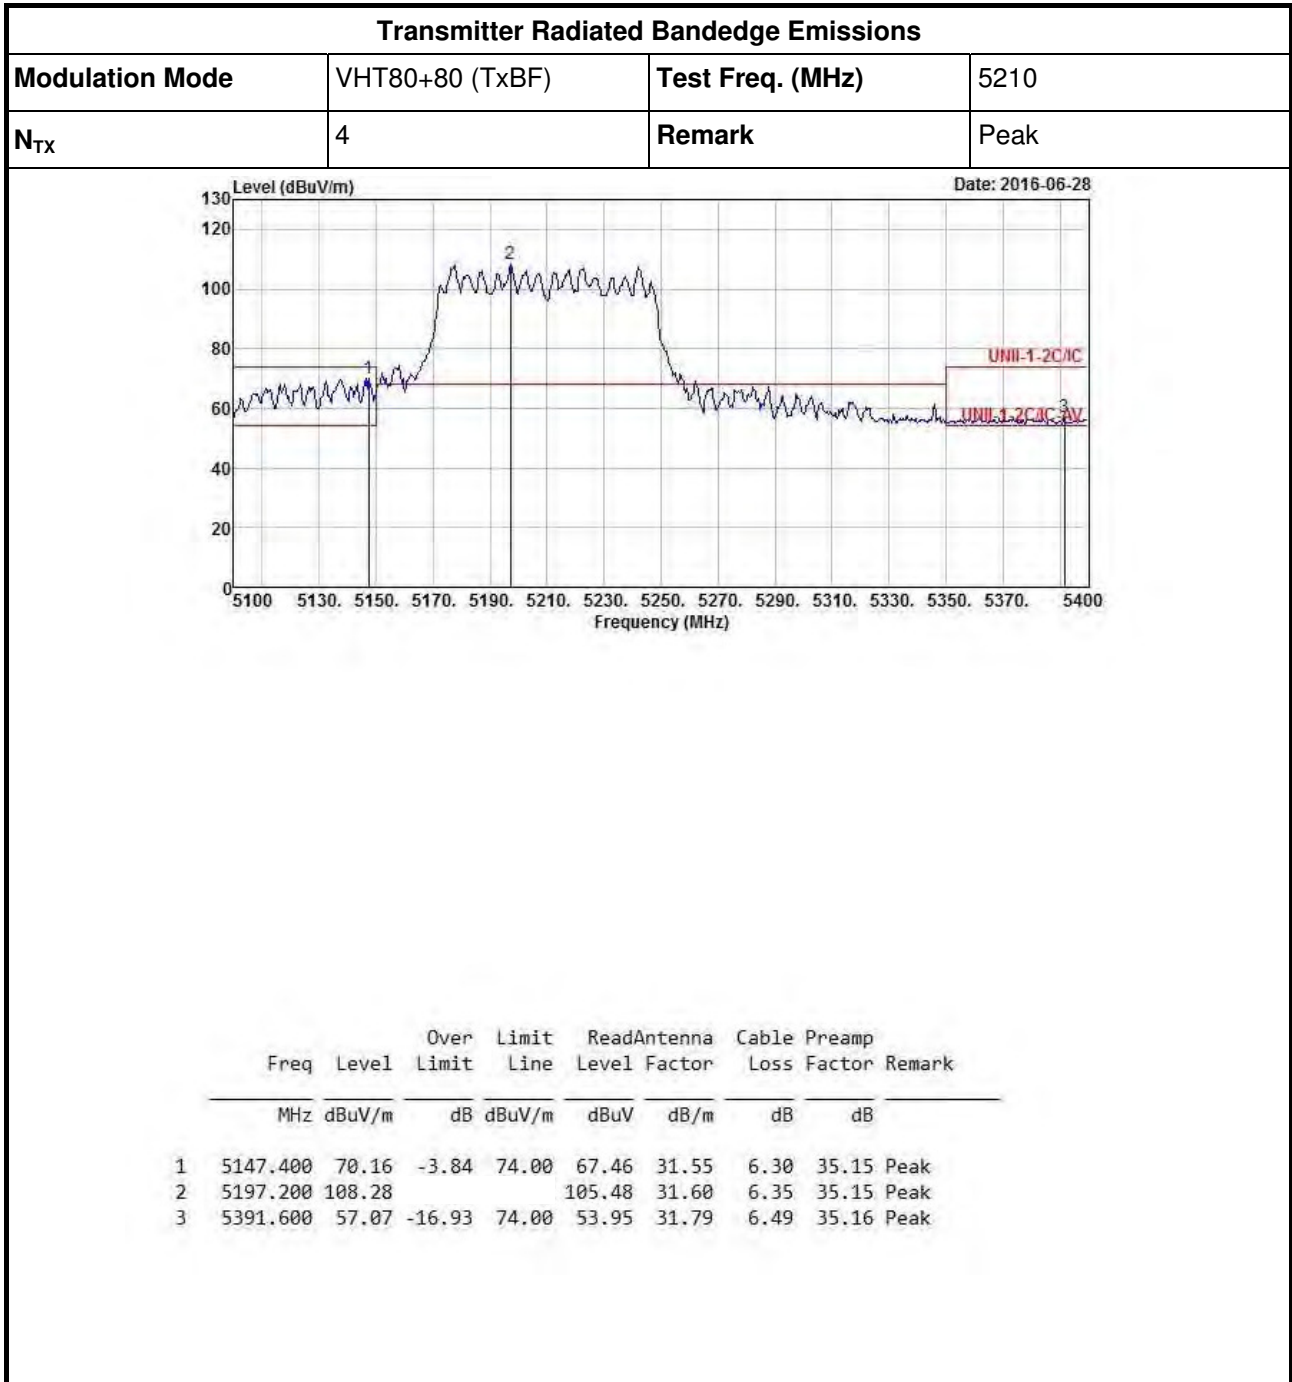


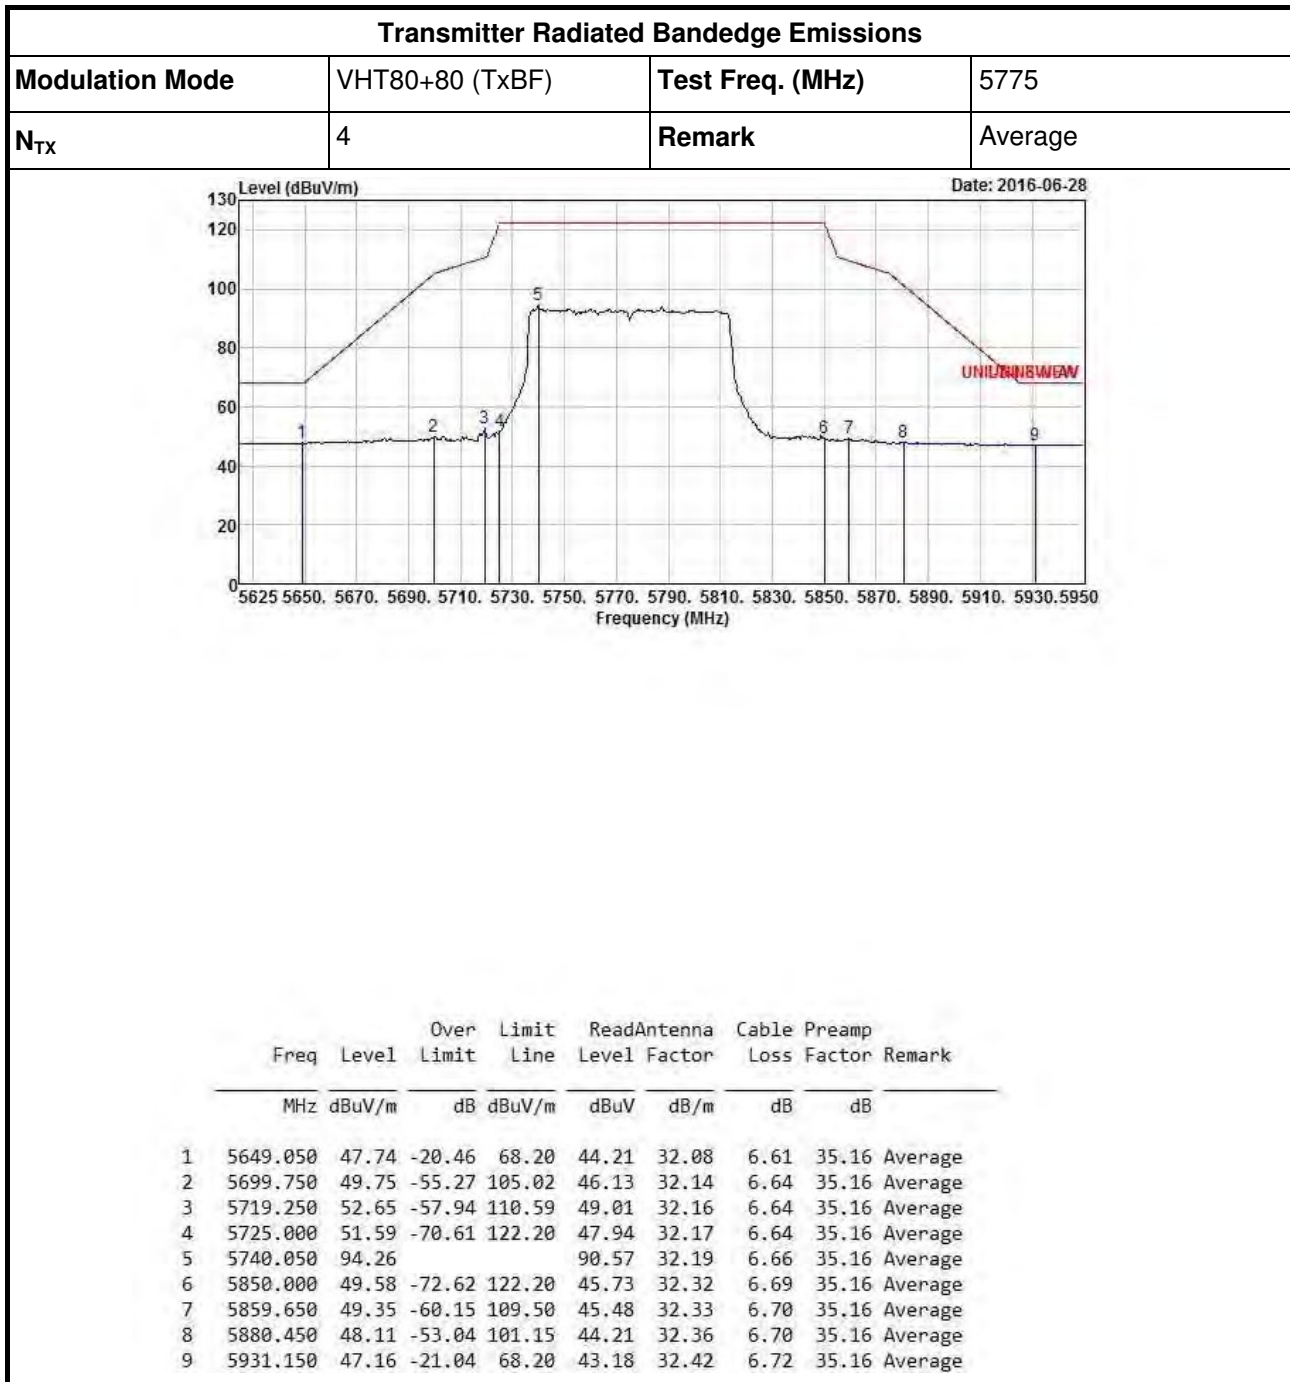

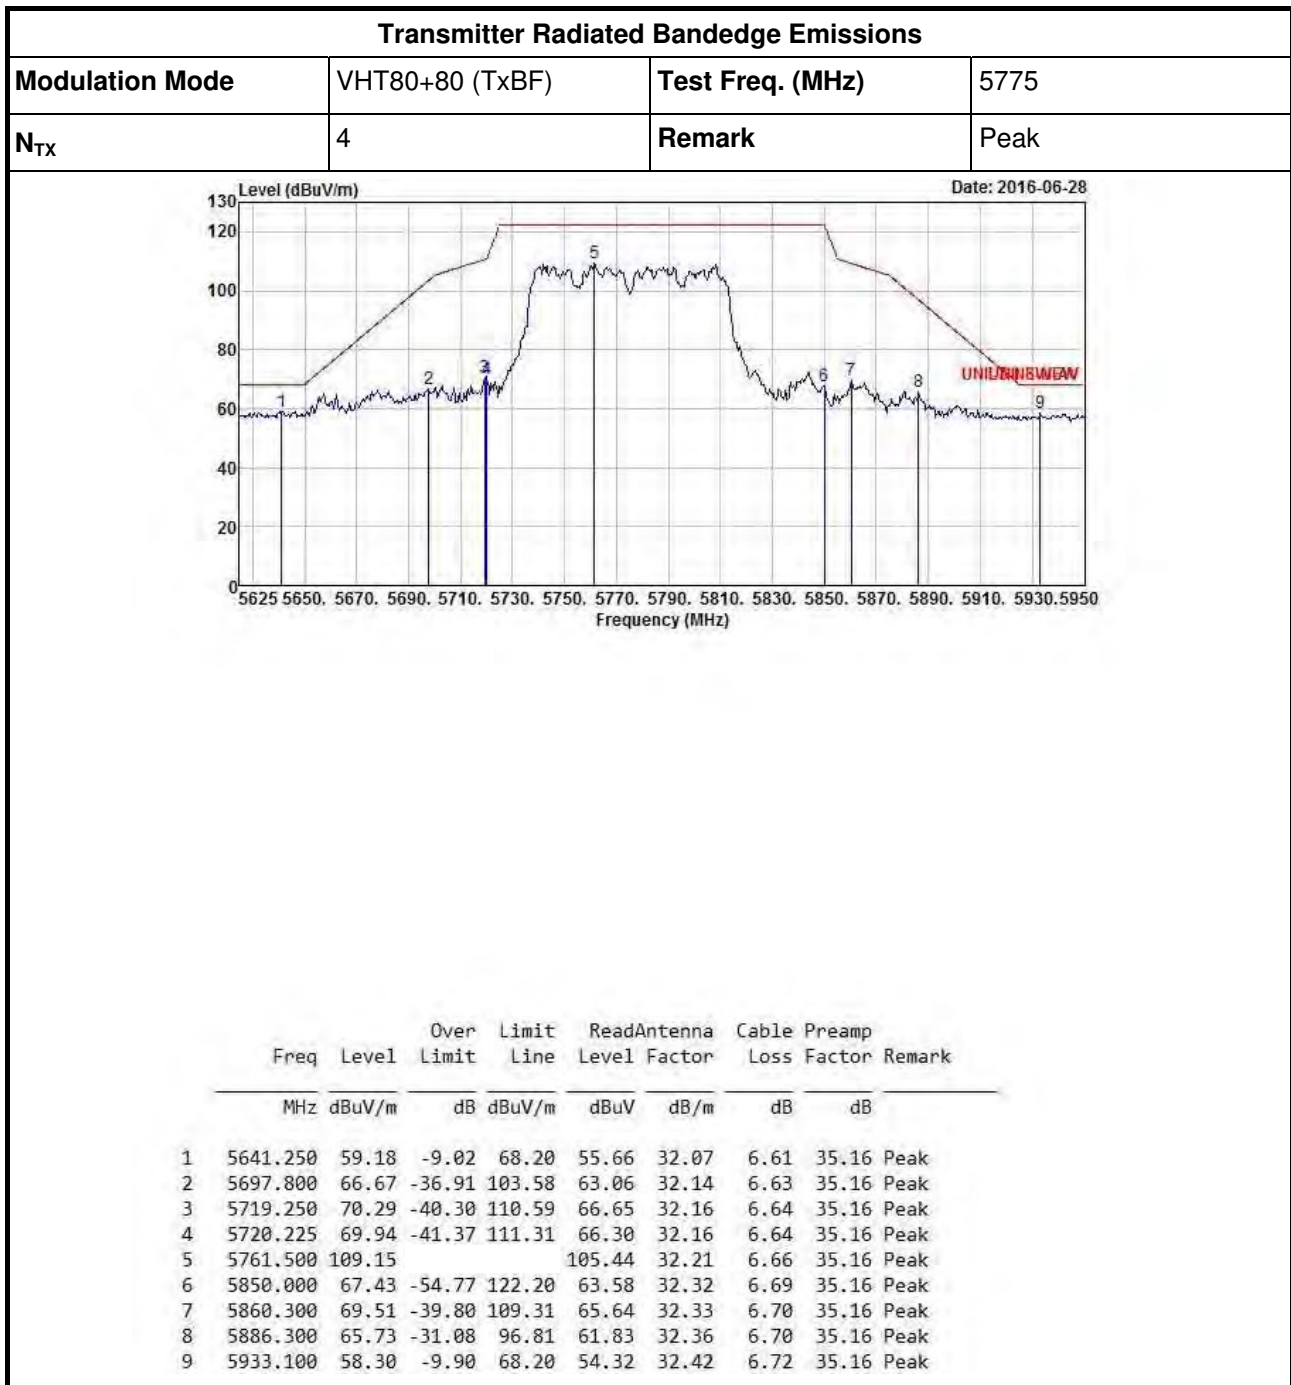




Transmitter Radiated Unwanted Emissions (Below 1GHz)

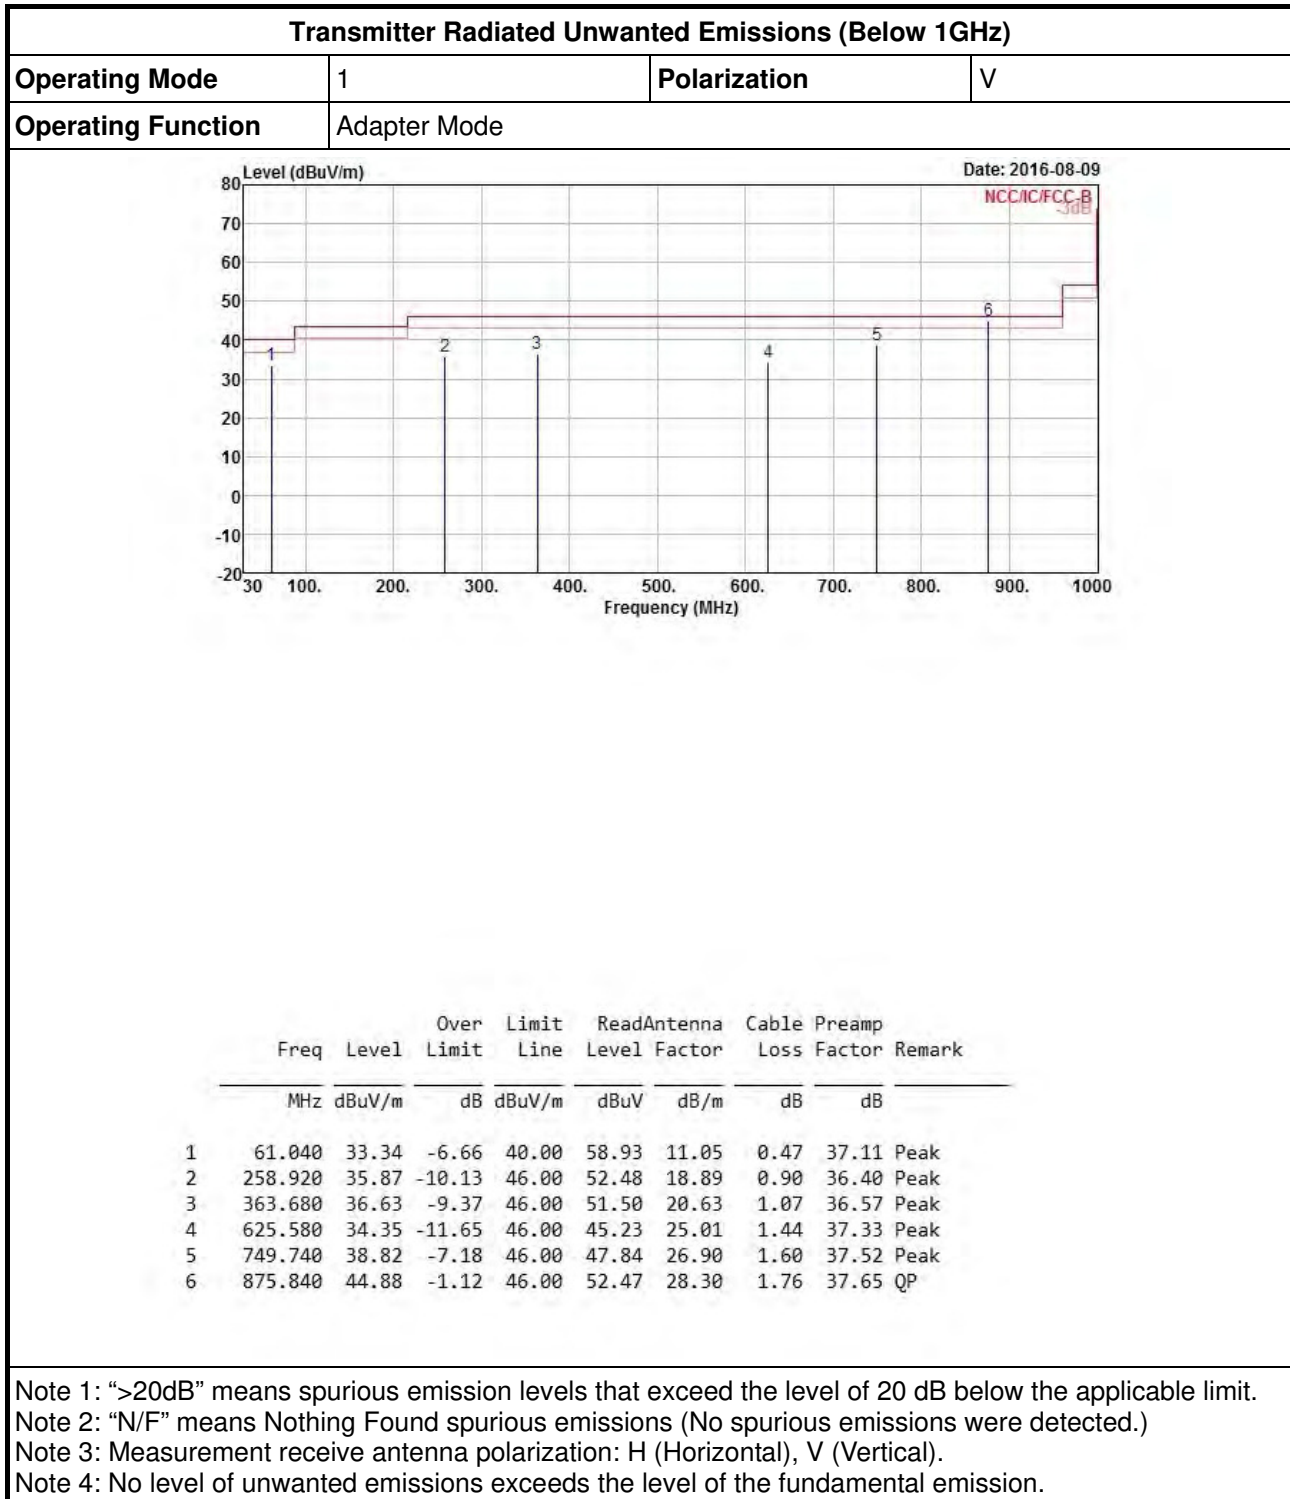




Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	H
Operating Function	Adapter Mode		

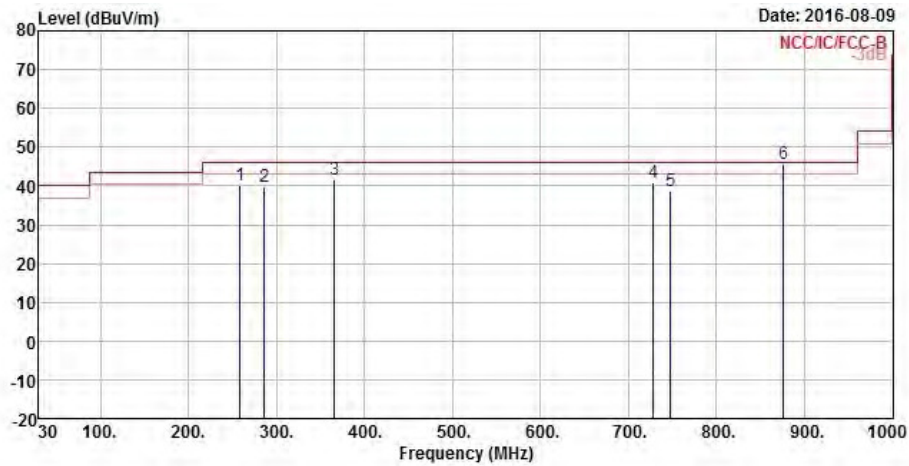

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	258.920	40.04	-5.96	46.00	56.65	18.89	0.90	36.40	Peak
2	286.080	39.60	-6.40	46.00	56.54	18.52	0.94	36.40	Peak
3	365.620	41.51	-4.49	46.00	56.34	20.67	1.07	36.57	Peak
4	728.400	41.06	-4.94	46.00	50.47	26.51	1.58	37.50	Peak
5	747.800	38.80	-7.20	46.00	47.85	26.86	1.60	37.51	Peak
6	875.840	45.82	-0.18	46.00	53.41	28.30	1.76	37.65	QP


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

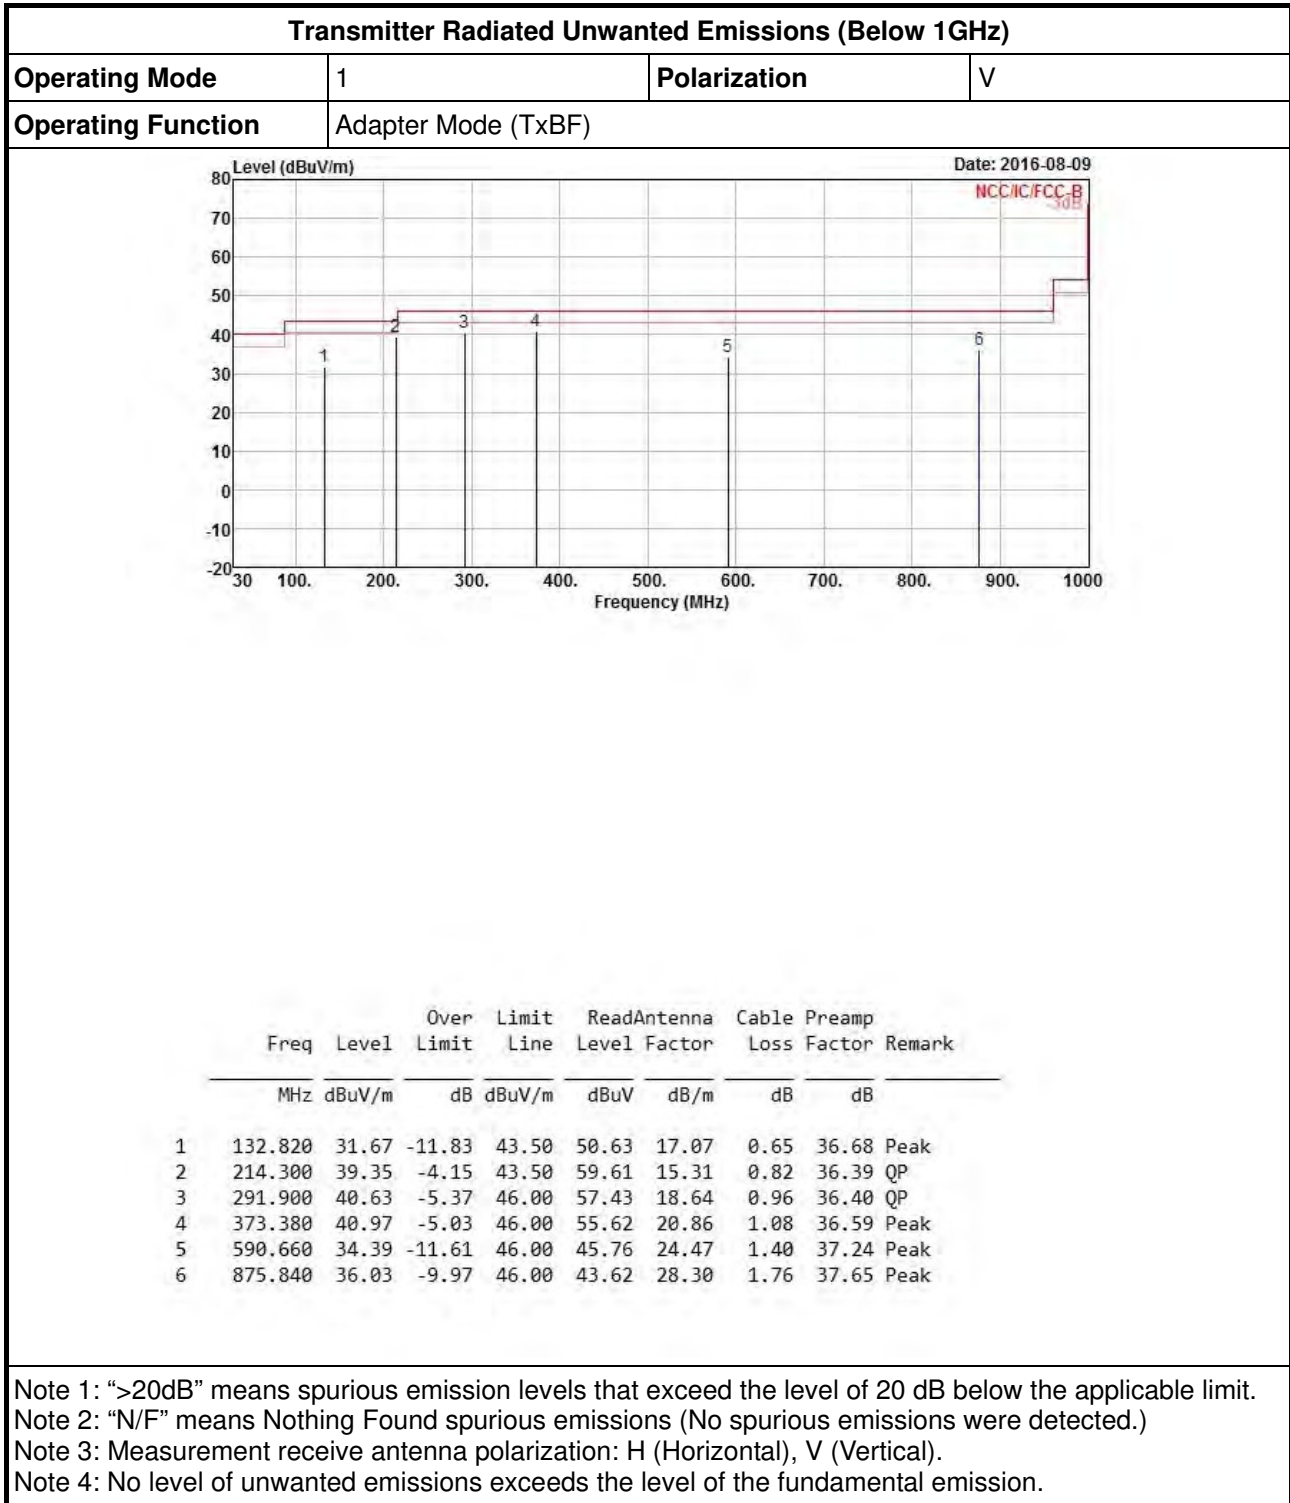



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	H
Operating Function	Adapter Mode (TxBF)		

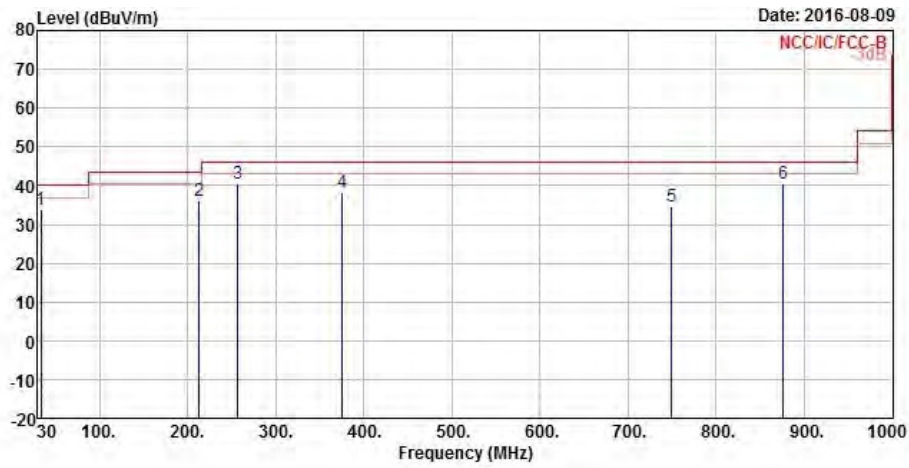


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	33.880	33.71	-6.29	40.00	47.94	22.80	0.34	37.37	Peak
2	213.330	36.10	-7.40	43.50	56.35	15.33	0.81	36.39	Peak
3	256.980	40.37	-5.63	46.00	57.18	18.70	0.89	36.40	QP
4	375.320	38.46	-7.54	46.00	53.07	20.91	1.08	36.60	Peak
5	749.740	34.46	-11.54	46.00	43.48	26.90	1.60	37.52	Peak
6	875.840	40.66	-5.34	46.00	48.25	28.30	1.76	37.65	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz


Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a	Test Freq. (MHz)	5180
N _{TX}	4	Polarization	V

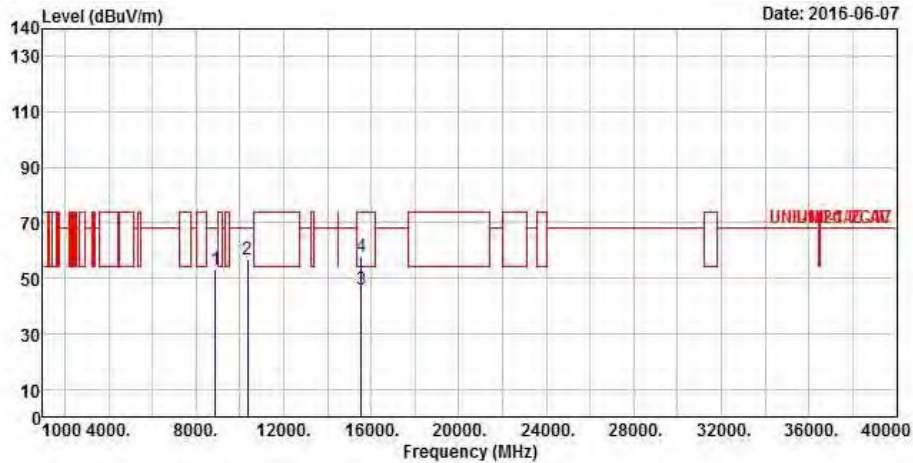



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8873.000	53.08	-15.12	68.20	43.26	37.25	8.30	35.73	Peak
2	10360.000	57.03	-11.17	68.20	43.75	39.48	9.41	35.61	Peak
3	15540.000	46.23	-7.77	54.00	31.91	38.41	11.54	35.63	Average
4	15540.000	57.71	-16.29	74.00	43.39	38.41	11.54	35.63	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

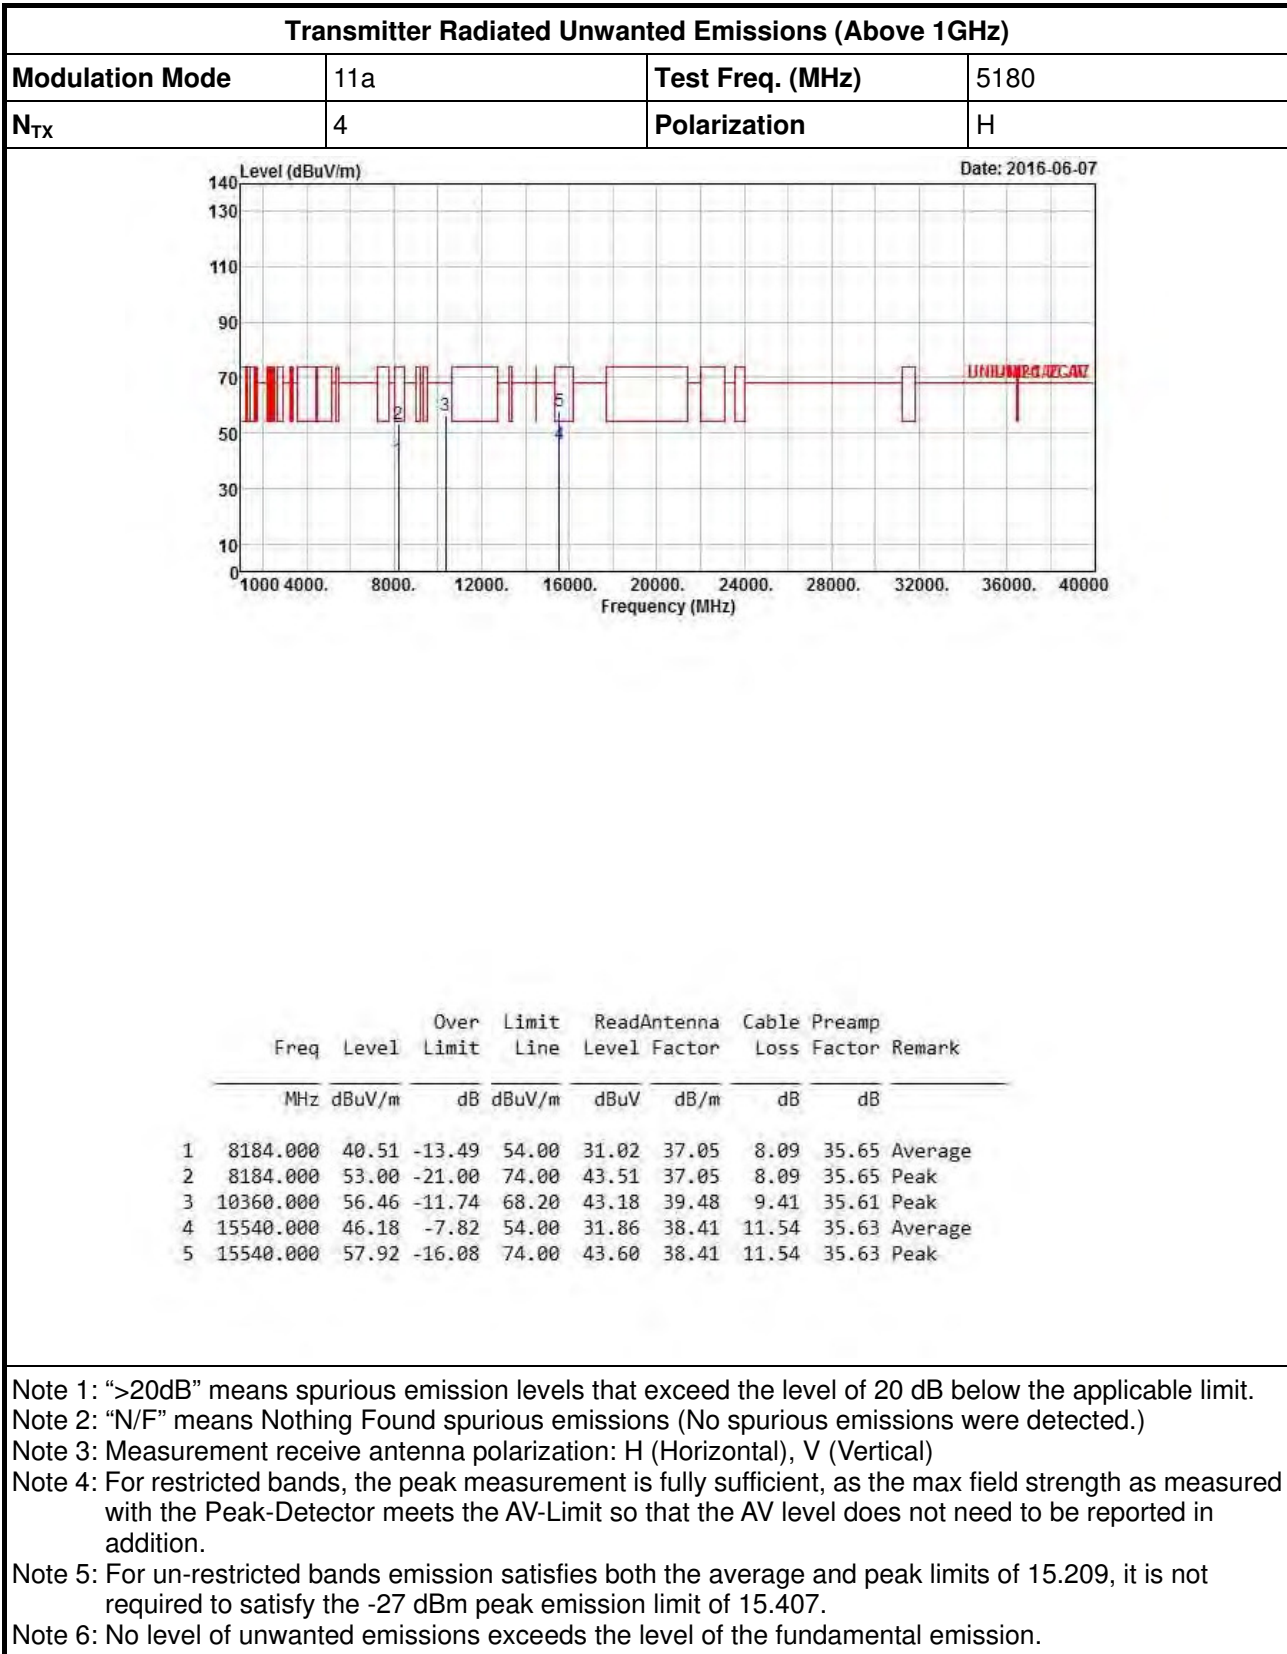

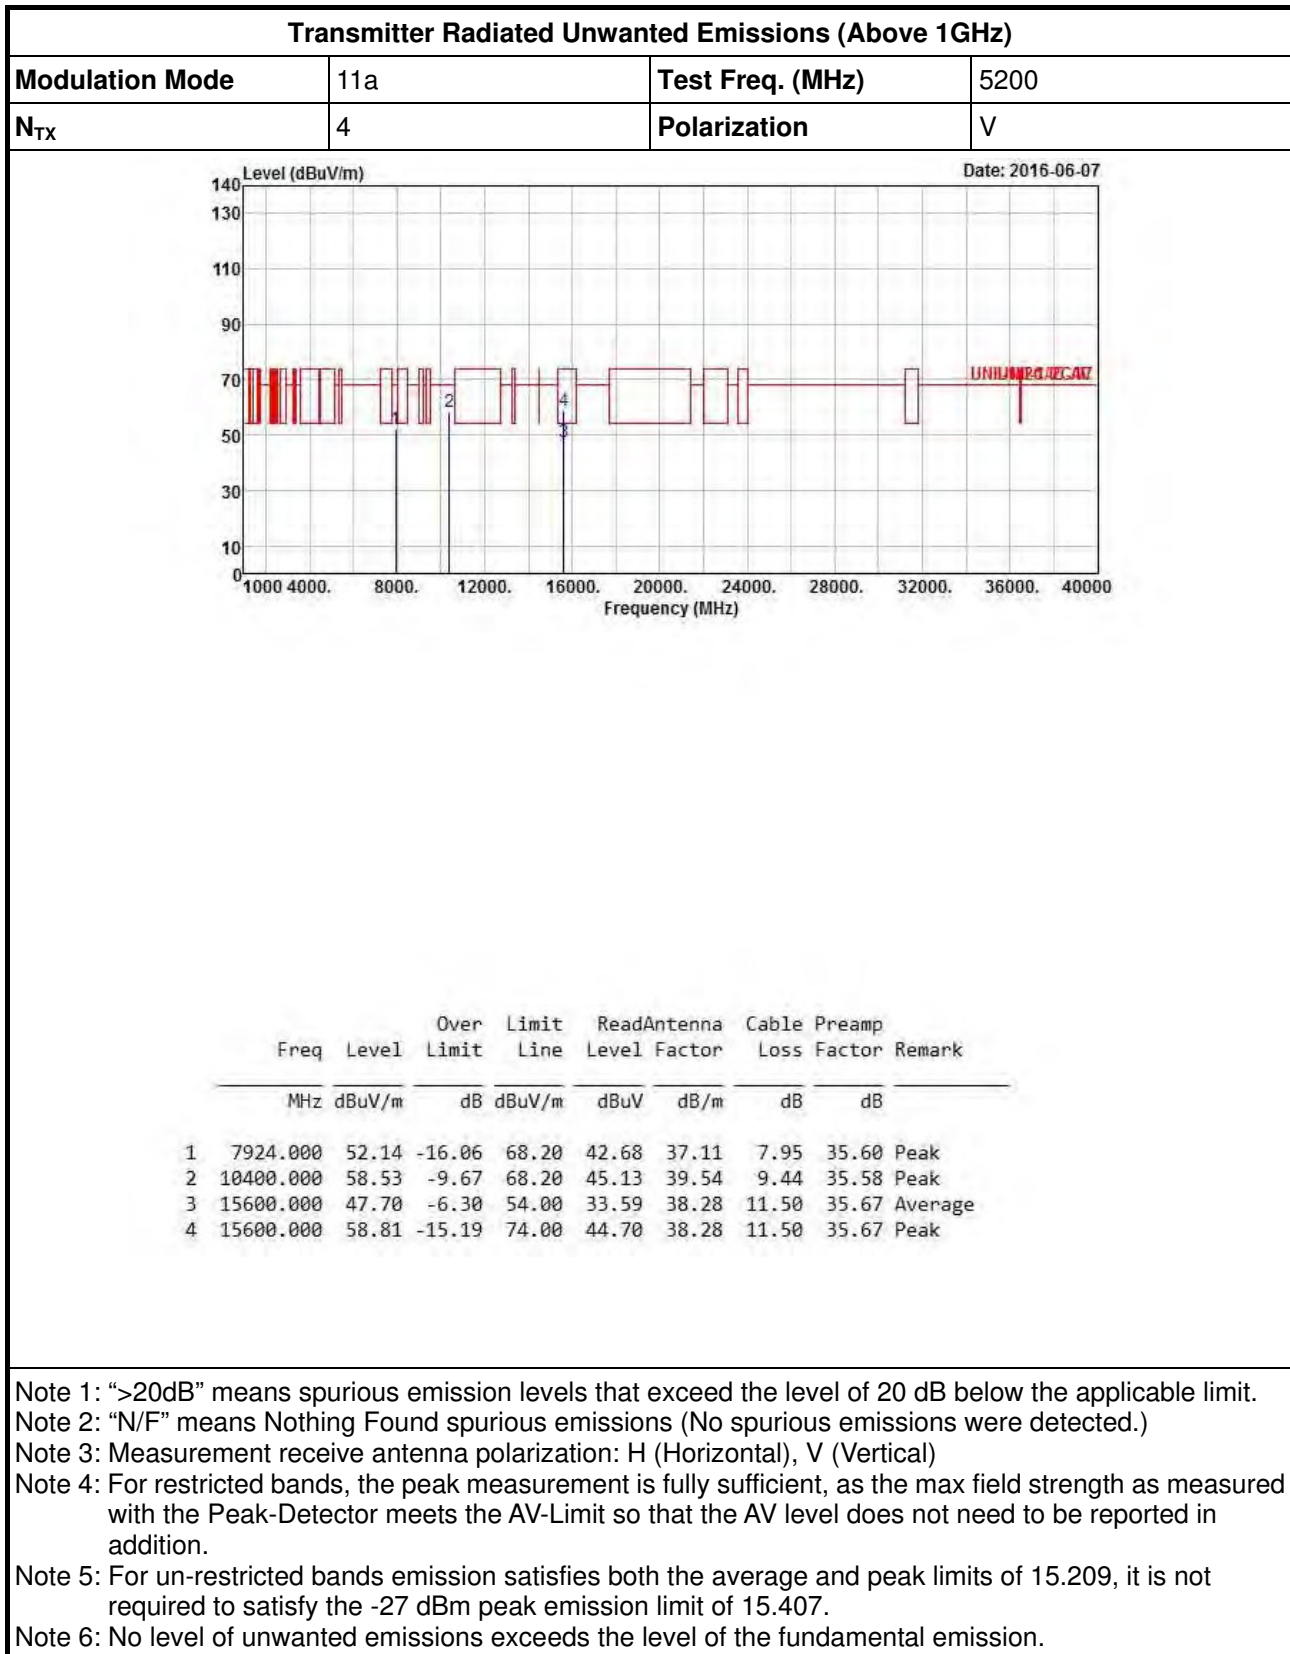


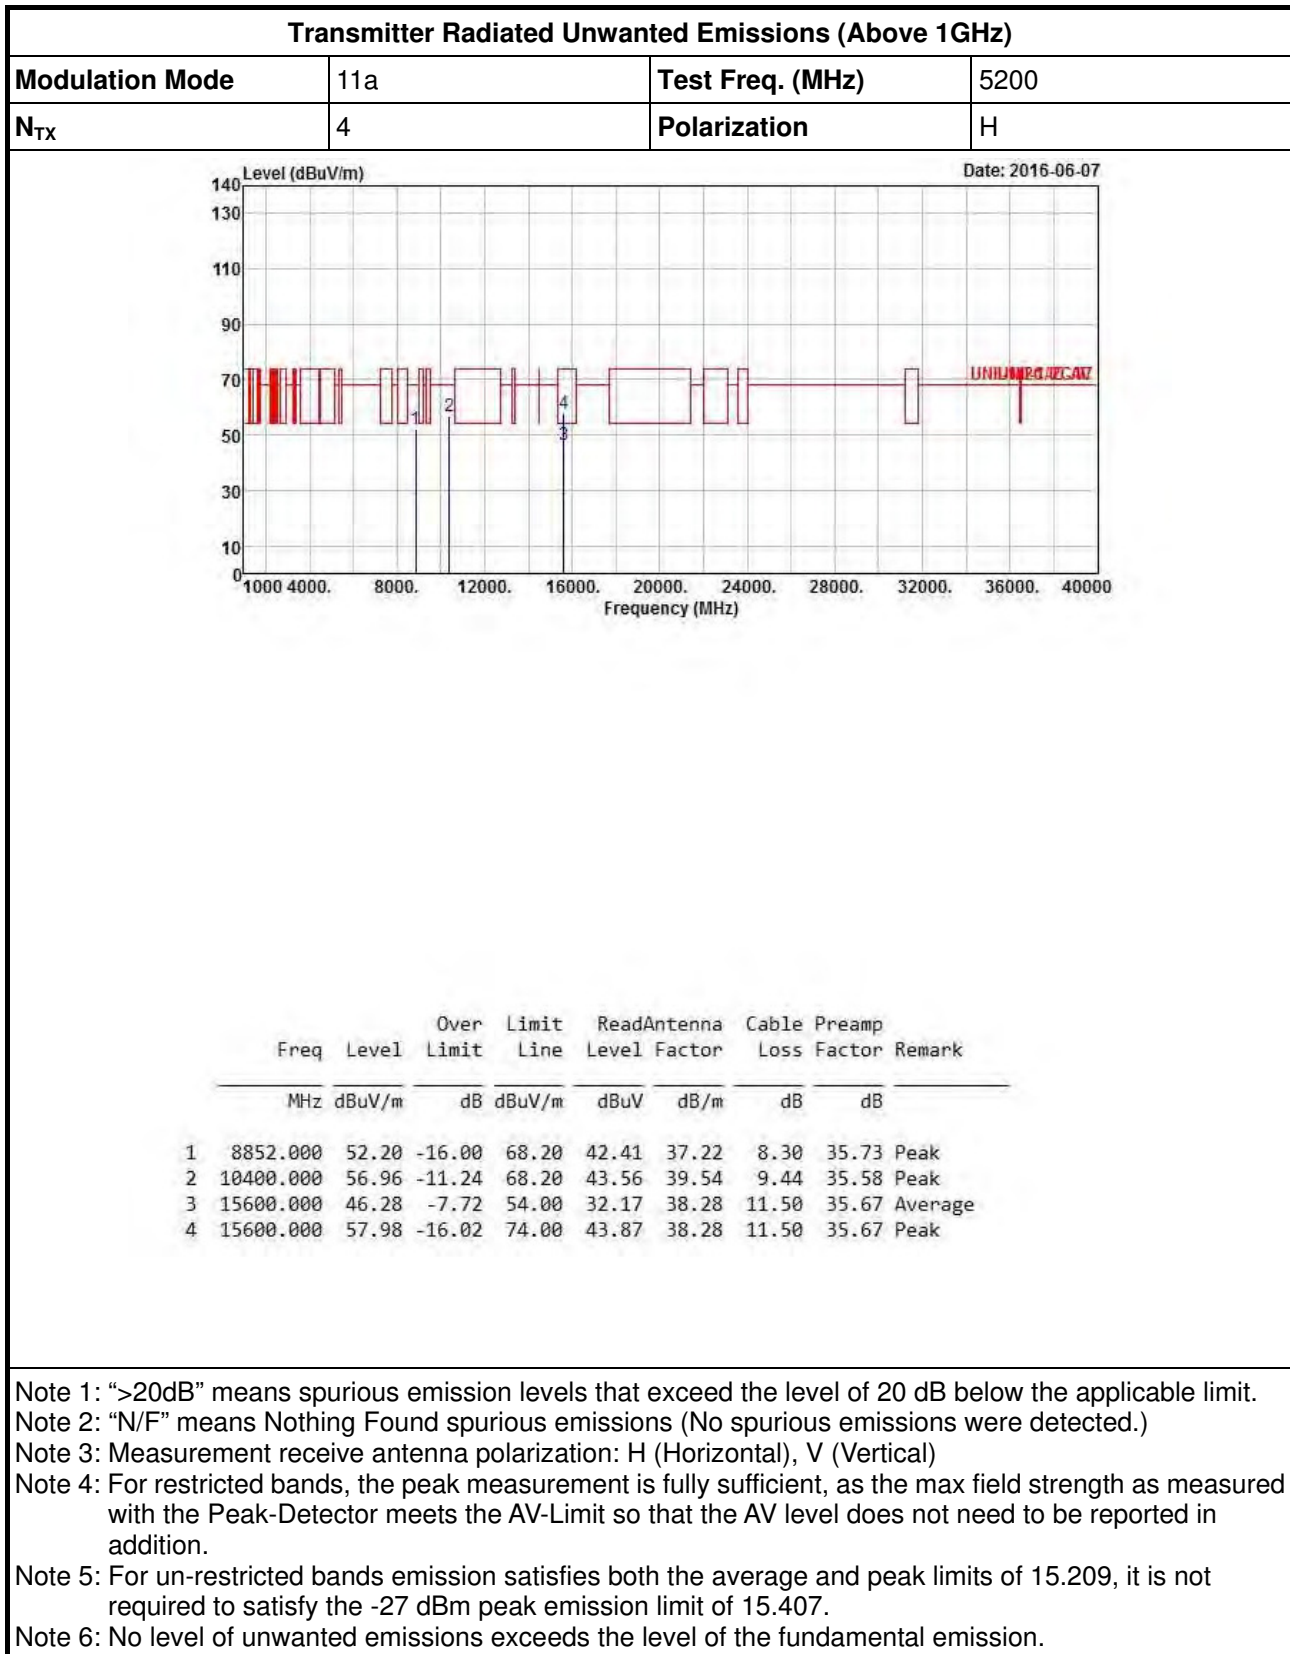

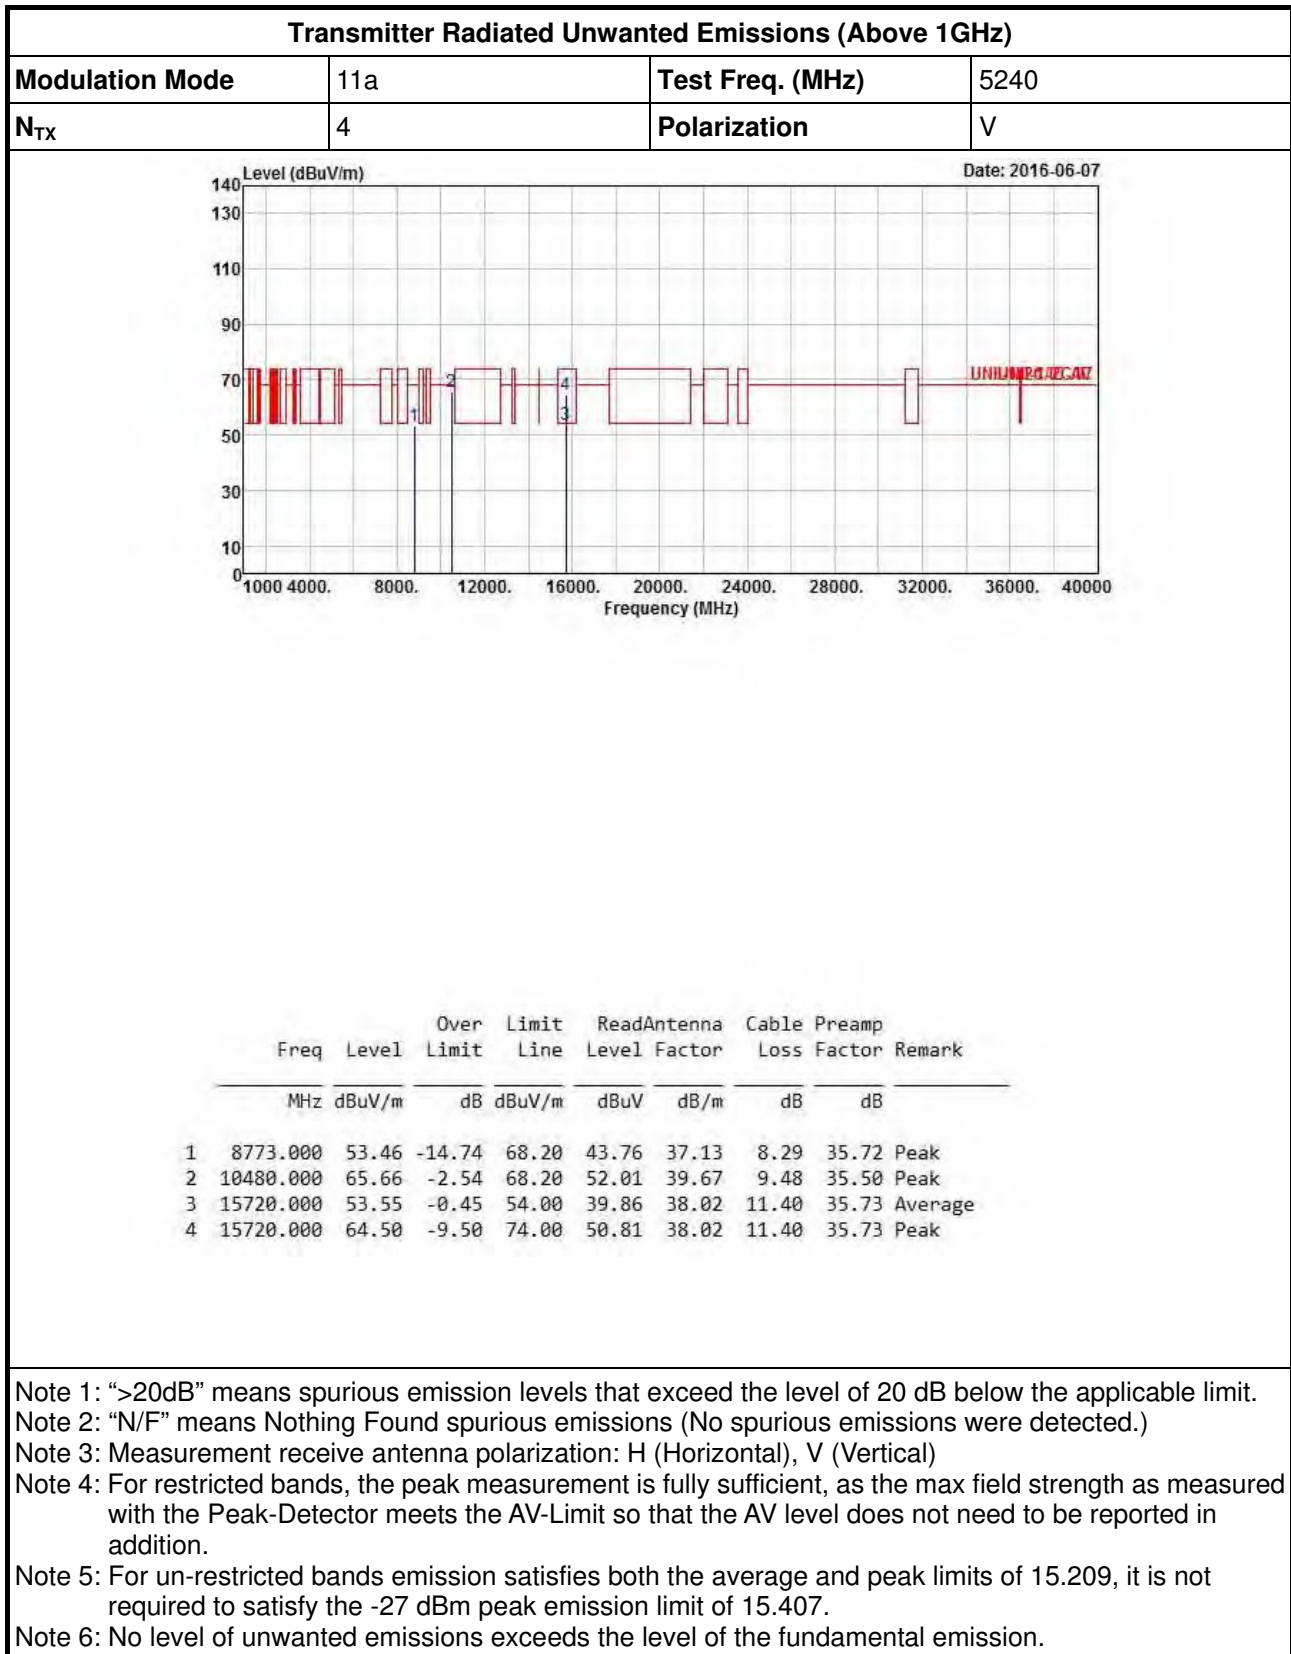




Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a	Test Freq. (MHz)	5240
N _{TX}	4	Polarization	H

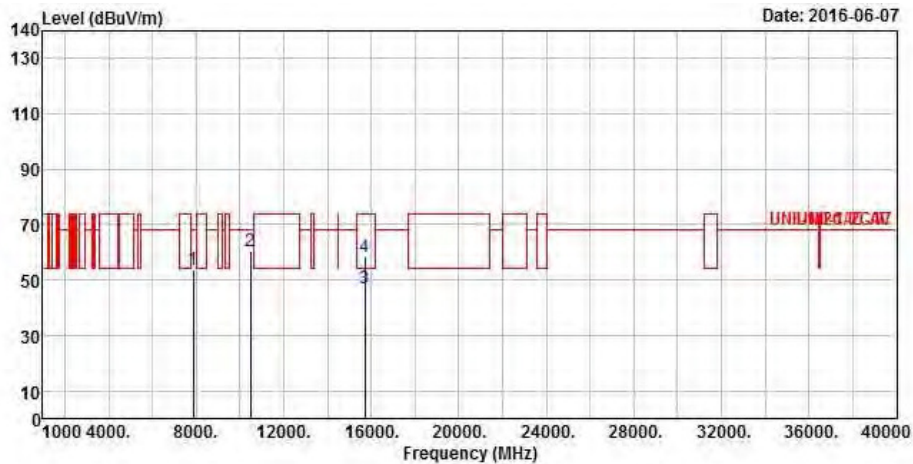


	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7882.000	53.63	-14.57	68.20	44.26	37.06	7.90	35.59 Peak
2	10480.000	60.36	-7.84	68.20	46.71	39.67	9.48	35.50 Peak
3	15720.000	47.13	-6.87	54.00	33.44	38.02	11.40	35.73 Average
4	15720.000	58.38	-15.62	74.00	44.69	38.02	11.40	35.73 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

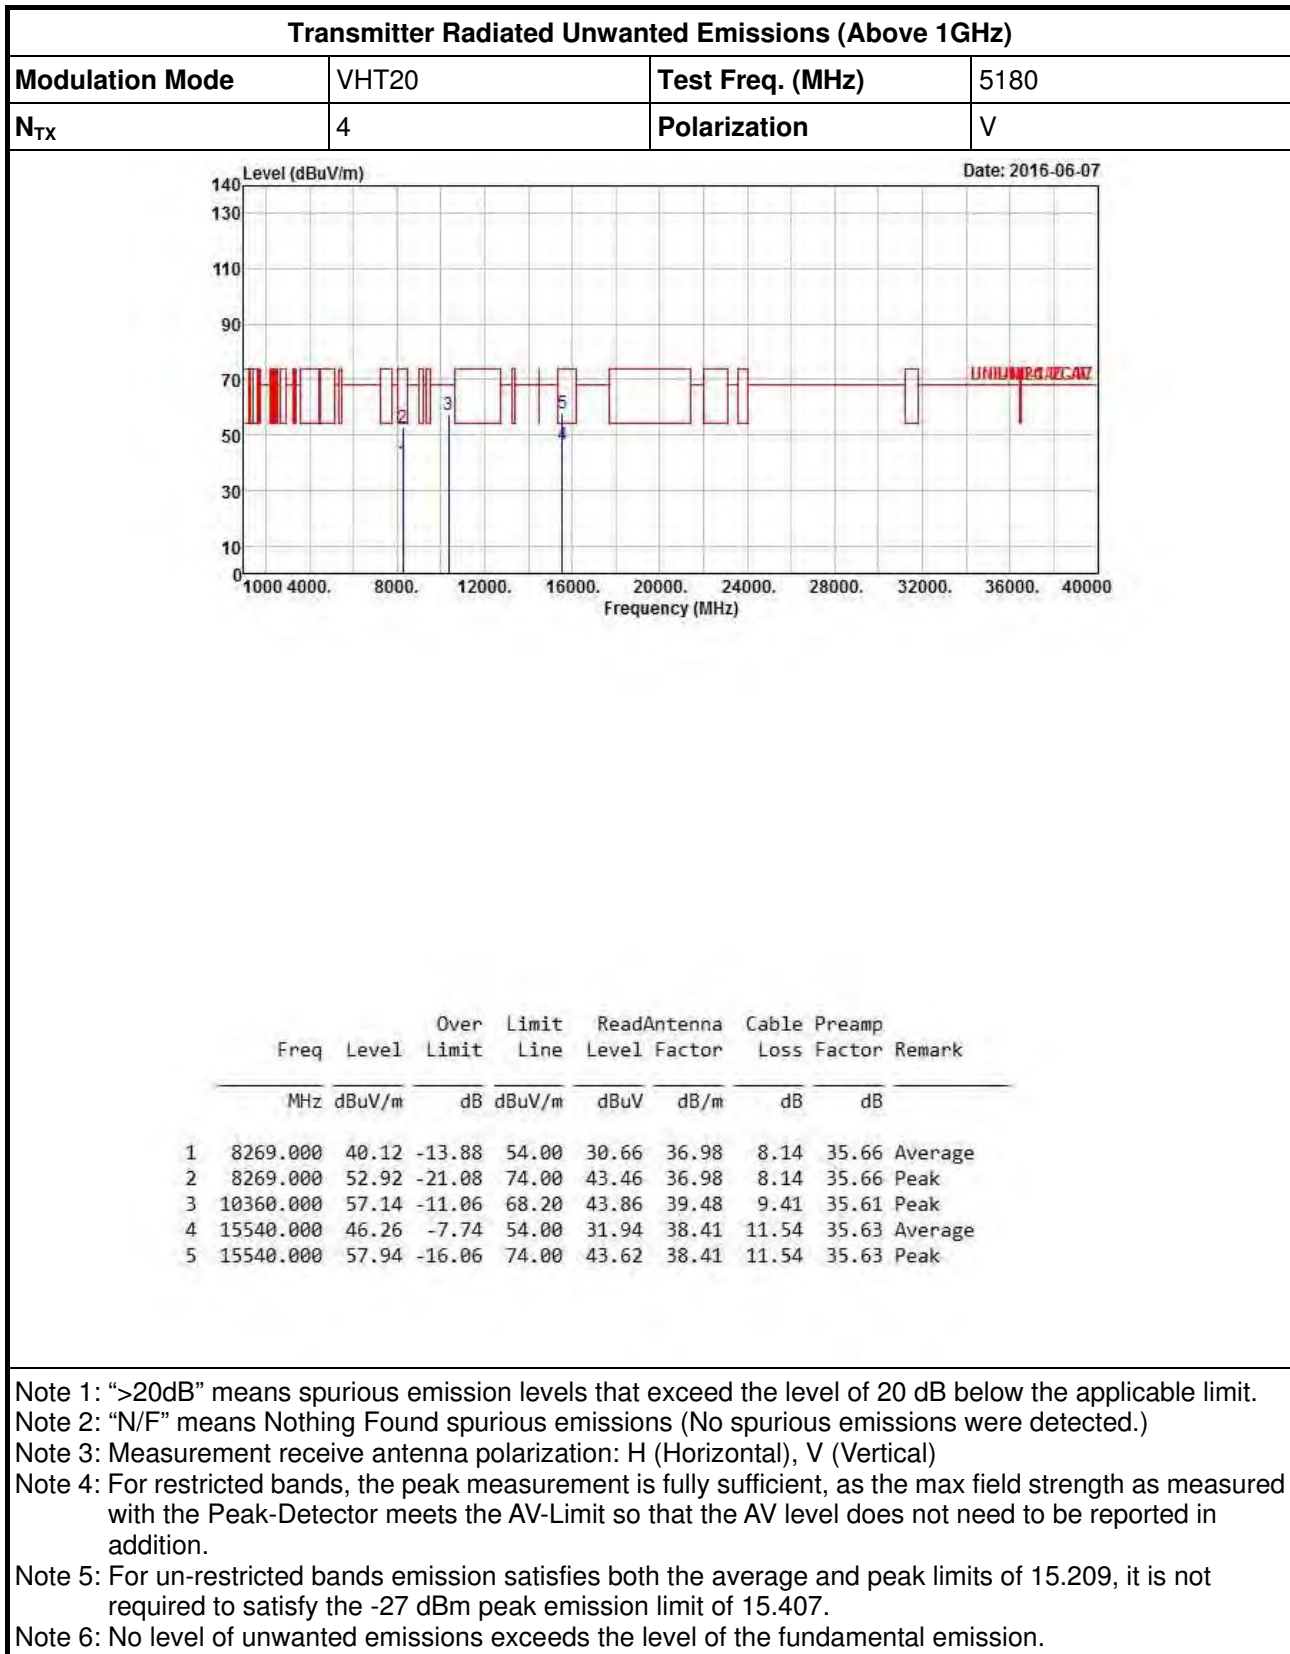


Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	VHT20	Test Freq. (MHz)	5180
N _{TX}	4	Polarization	H

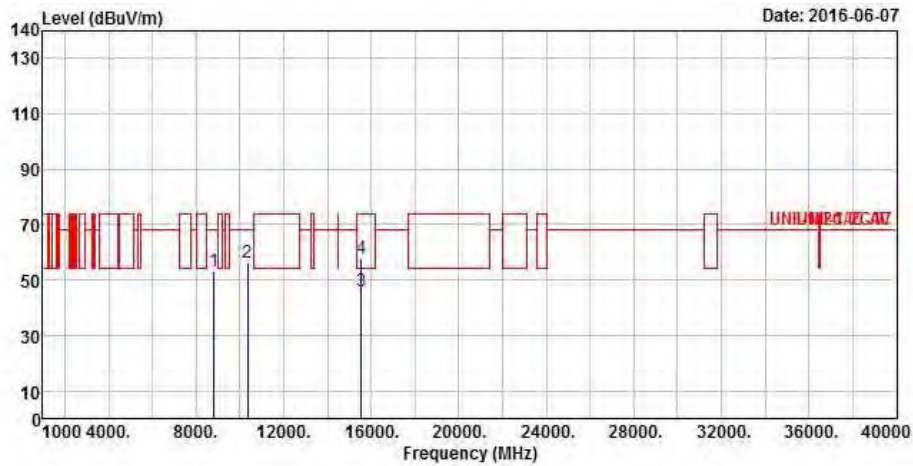

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8829.000	53.23	-14.97	68.20	43.47	37.19	8.30	35.73	Peak
2	10360.000	56.48	-11.72	68.20	43.20	39.48	9.41	35.61	Peak
3	15540.000	45.92	-8.08	54.00	31.60	38.41	11.54	35.63	Average
4	15540.000	57.87	-16.13	74.00	43.55	38.41	11.54	35.63	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

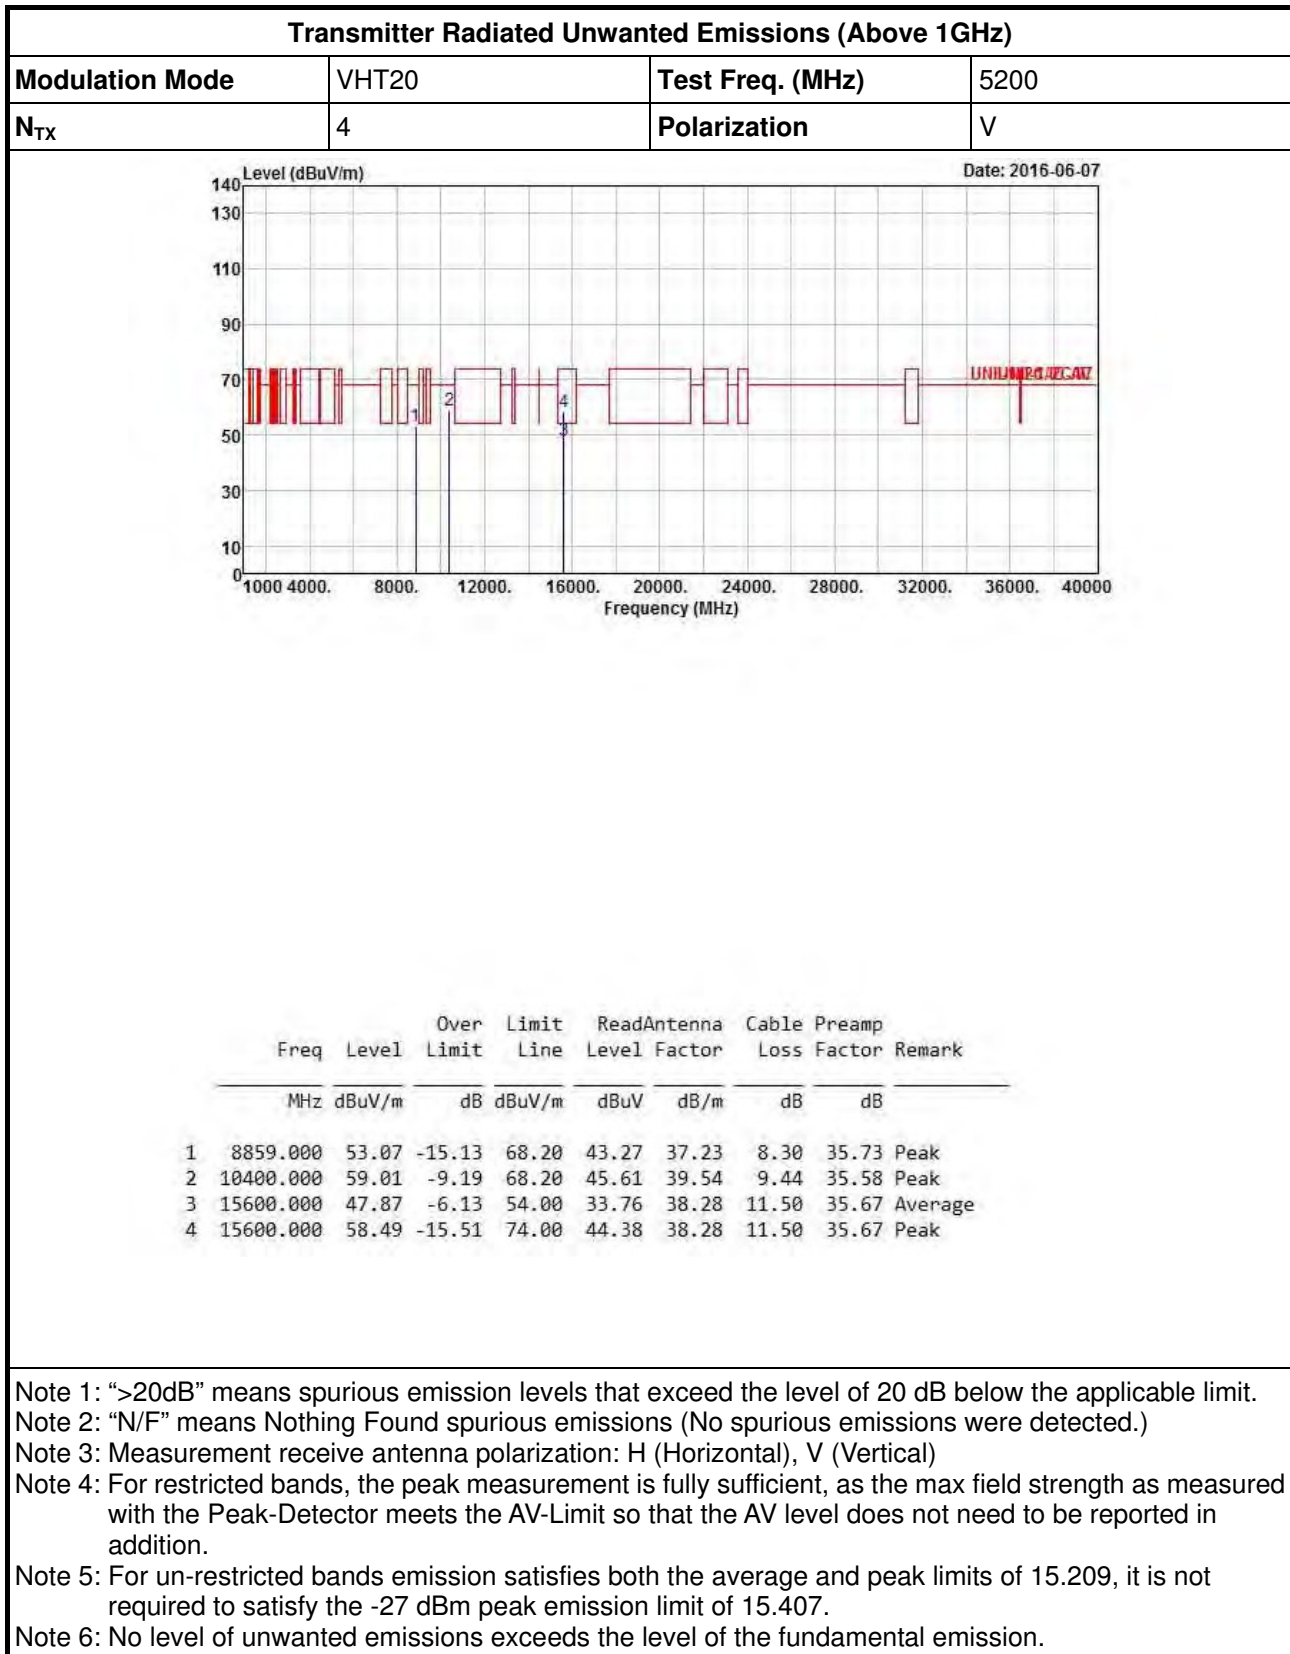




Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5200
N _{TX}	4	Polarization	H

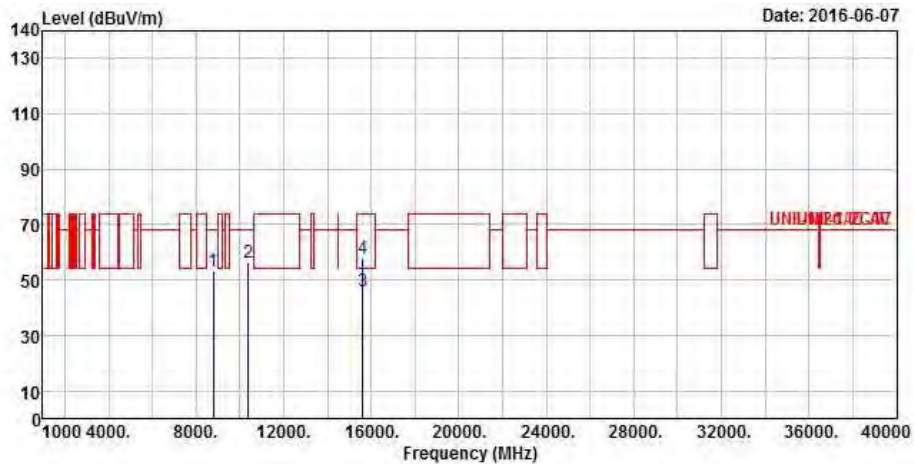


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8773.000	53.29	-14.91	68.20	43.59	37.13	8.29	35.72	Peak
2	10400.000	56.20	-12.00	68.20	42.80	39.54	9.44	35.58	Peak
3	15600.000	45.92	-8.08	54.00	31.81	38.28	11.50	35.67	Average
4	15600.000	57.82	-16.18	74.00	43.71	38.28	11.50	35.67	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

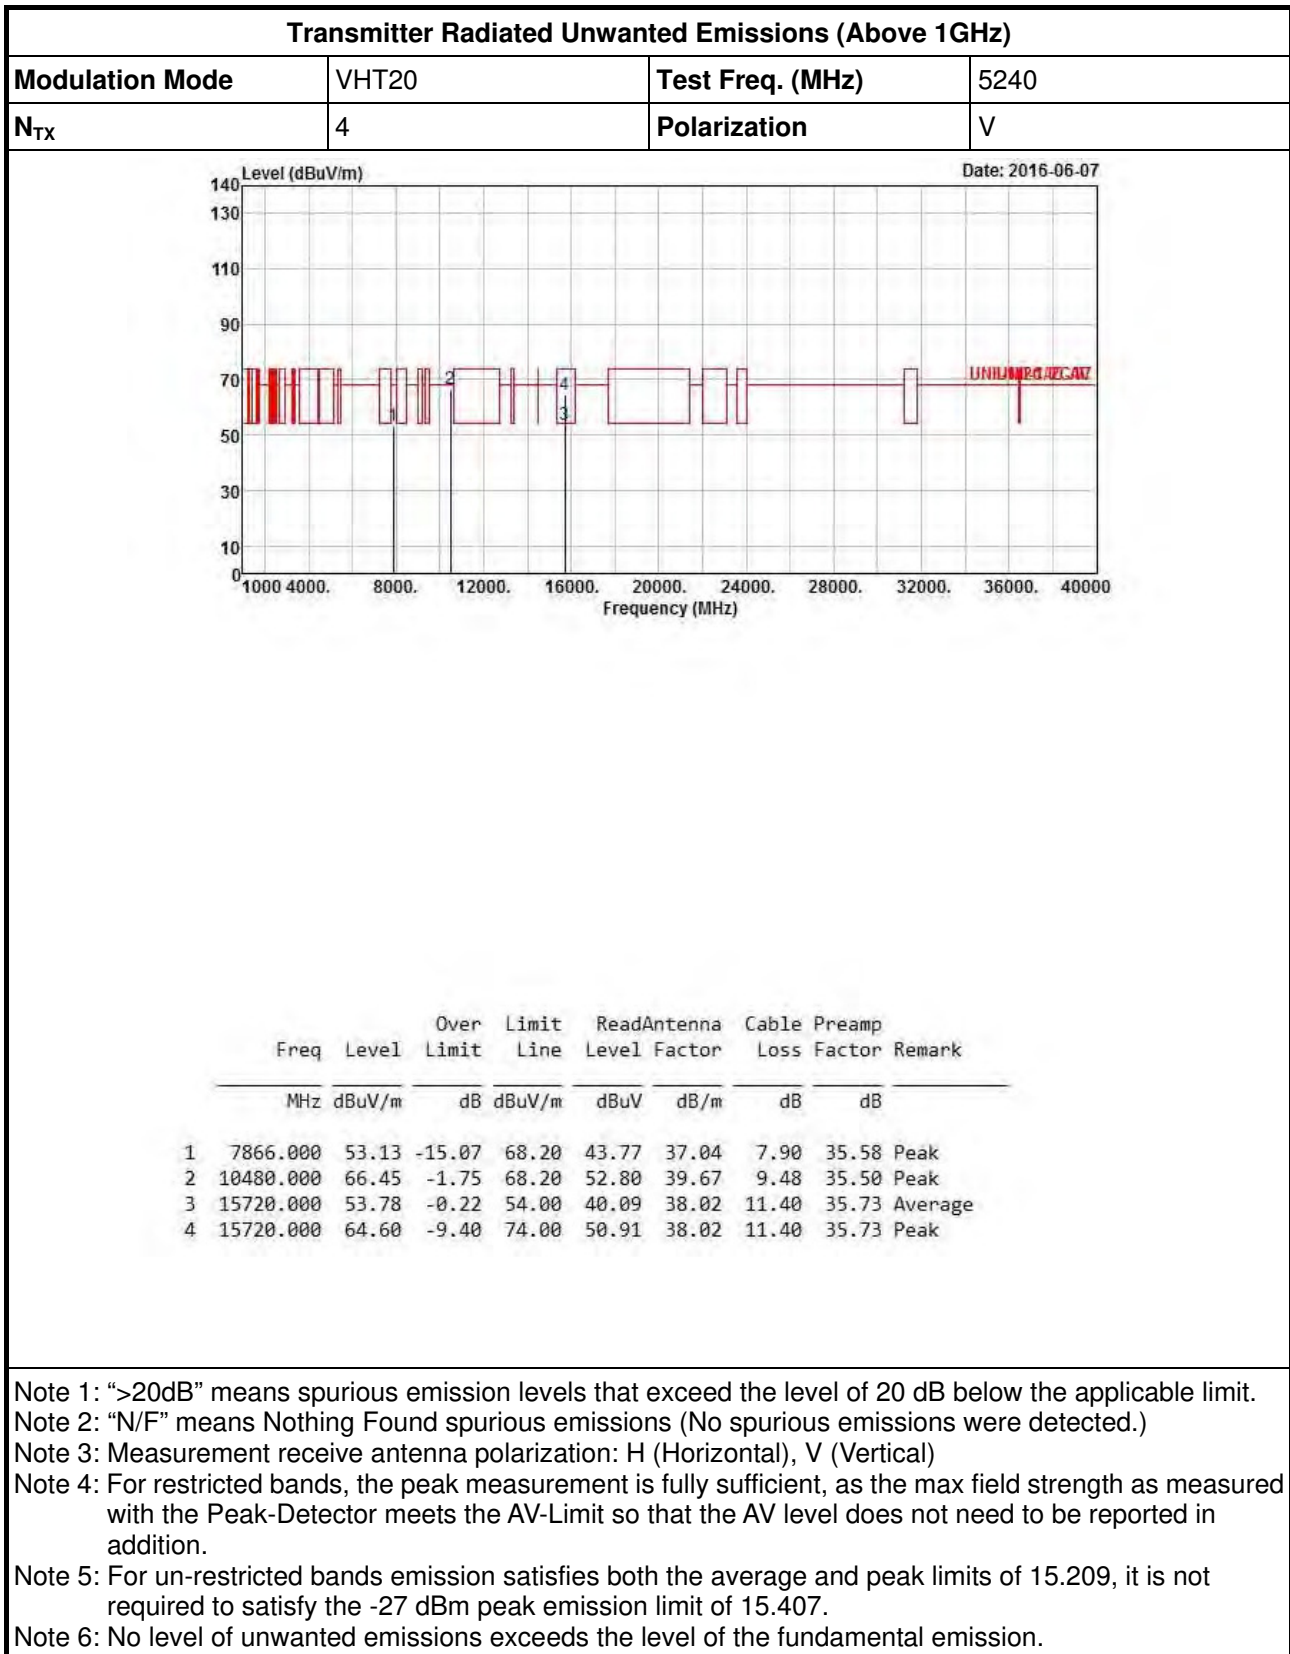





Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	VHT20	Test Freq. (MHz)	5240
N _{TX}	4	Polarization	H

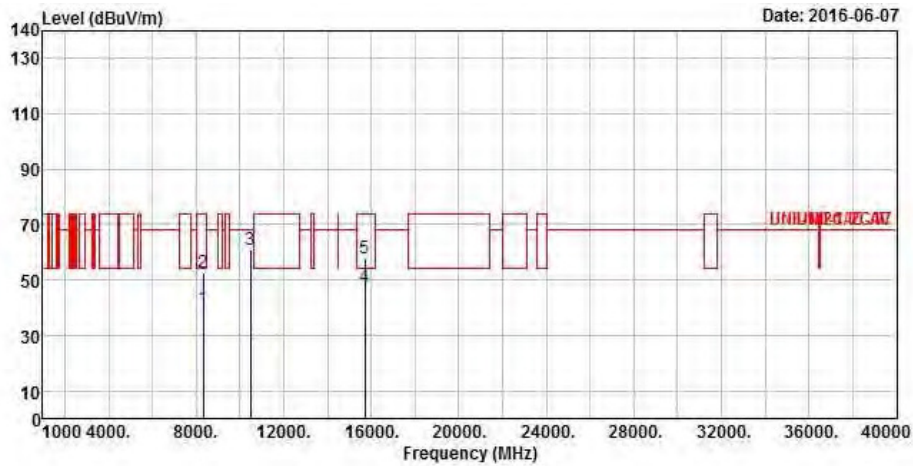



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8321.000	40.03	-13.97	54.00	30.57	36.94	8.18	35.66	Average
2	8321.000	52.95	-21.05	74.00	43.49	36.94	8.18	35.66	Peak
3	10480.000	60.95	-7.25	68.20	47.30	39.67	9.48	35.50	Peak
4	15720.000	47.51	-6.49	54.00	33.82	38.02	11.40	35.73	Average
5	15720.000	57.98	-16.02	74.00	44.29	38.02	11.40	35.73	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

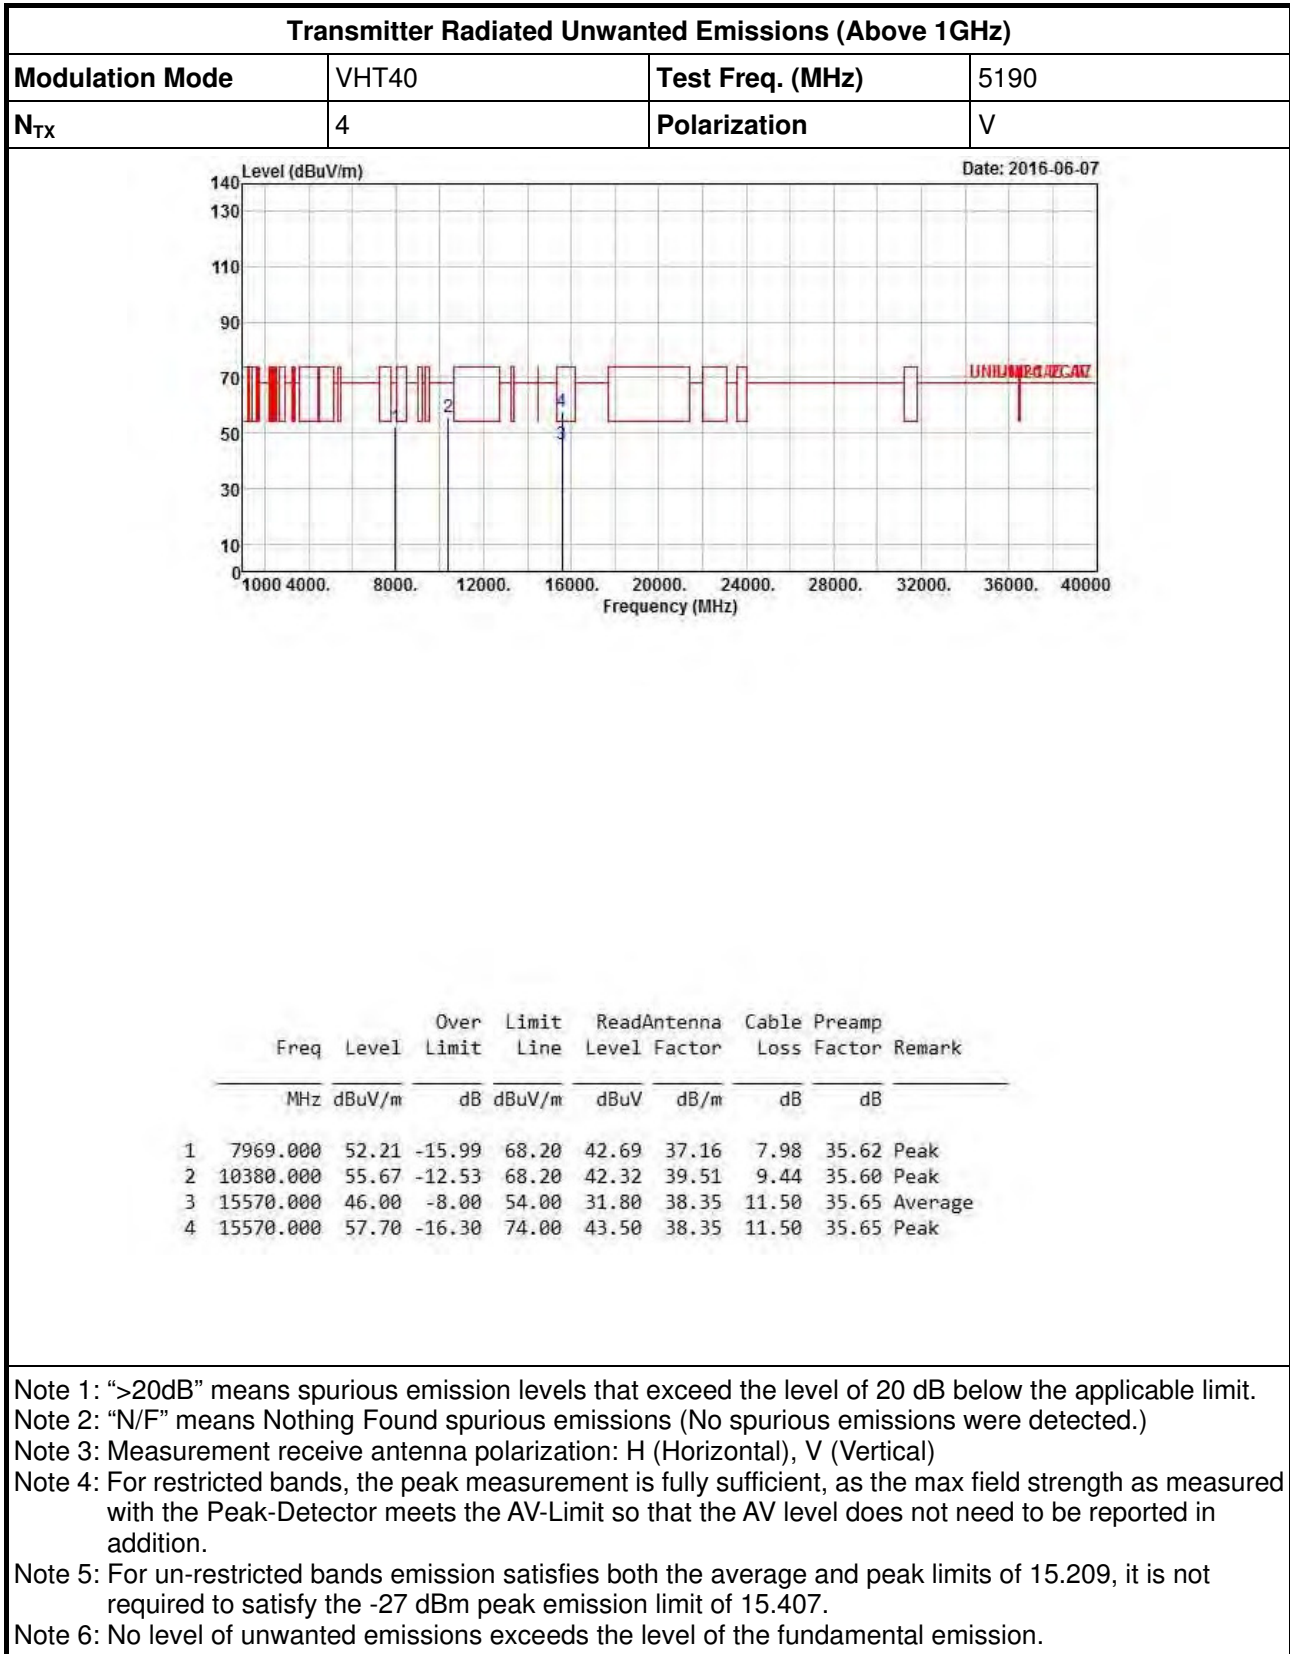

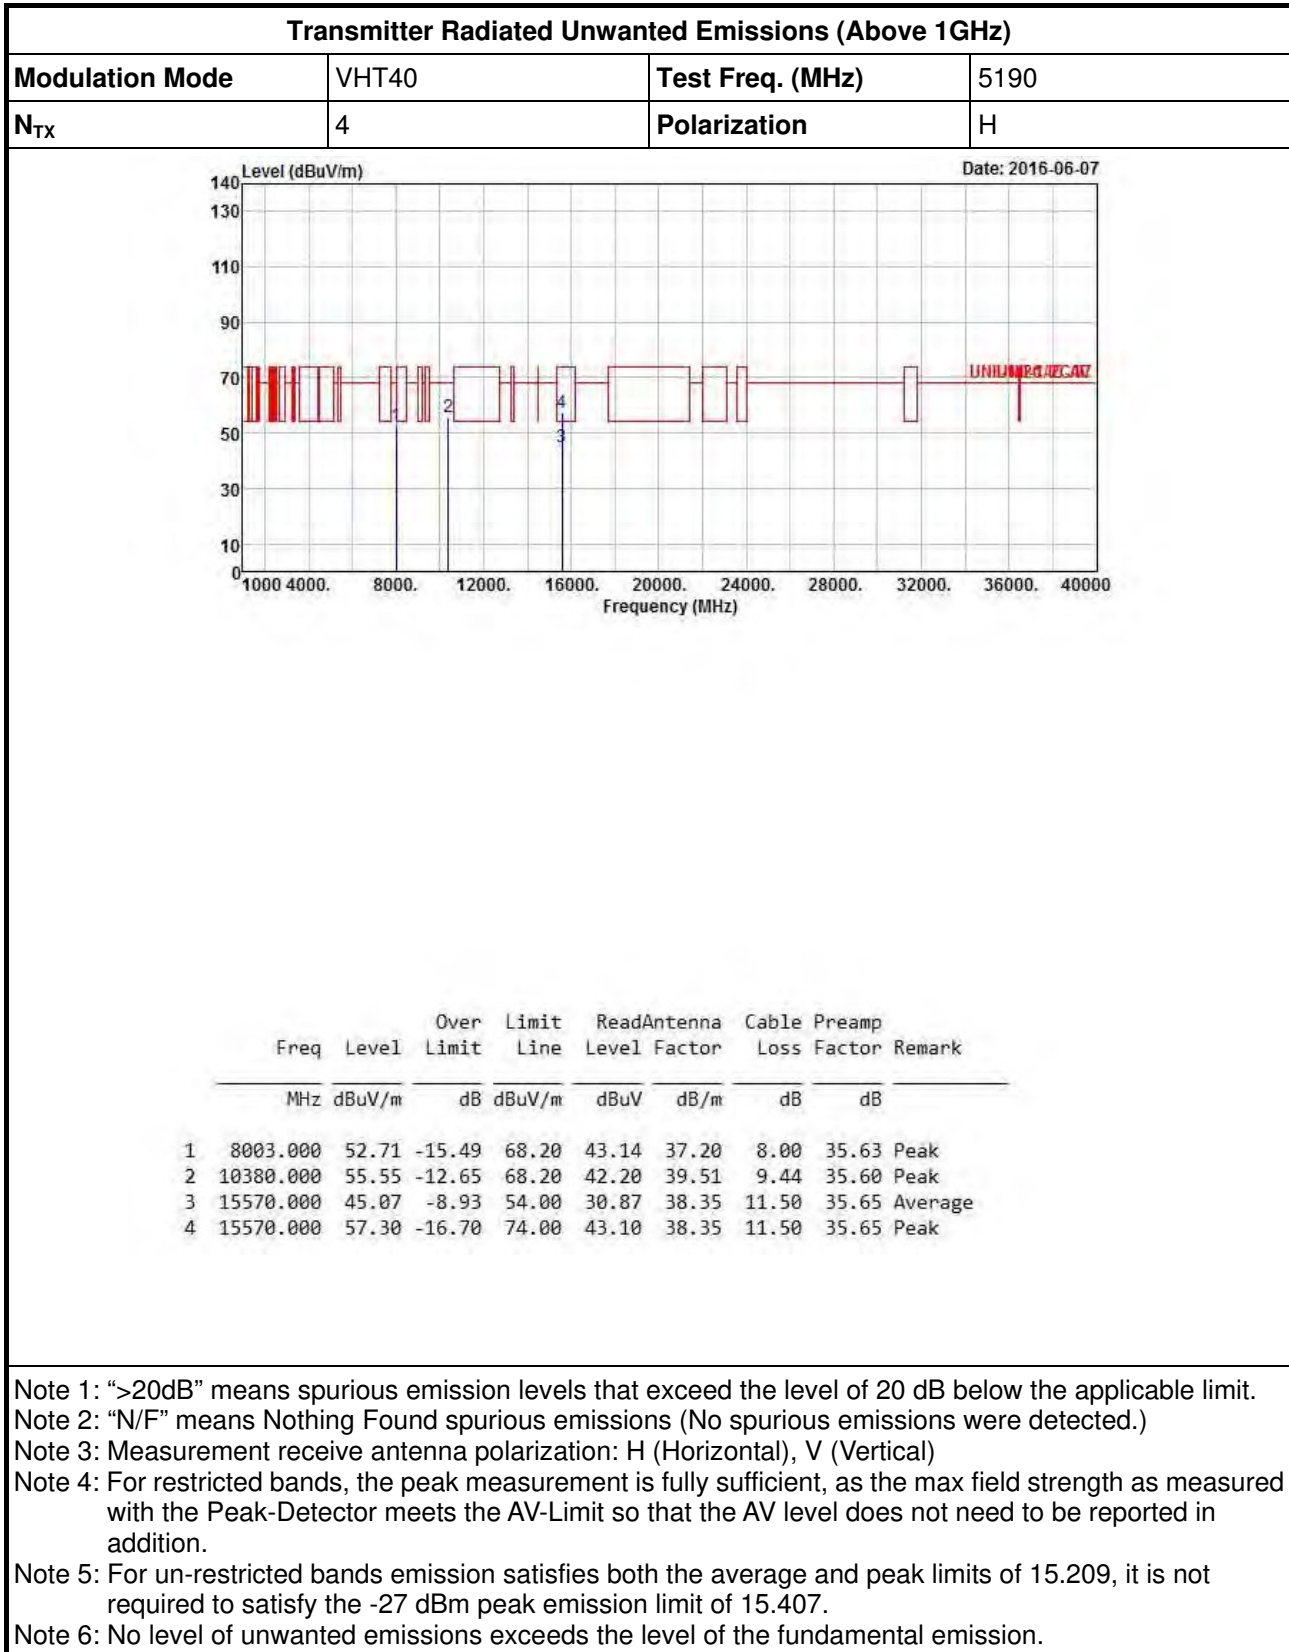

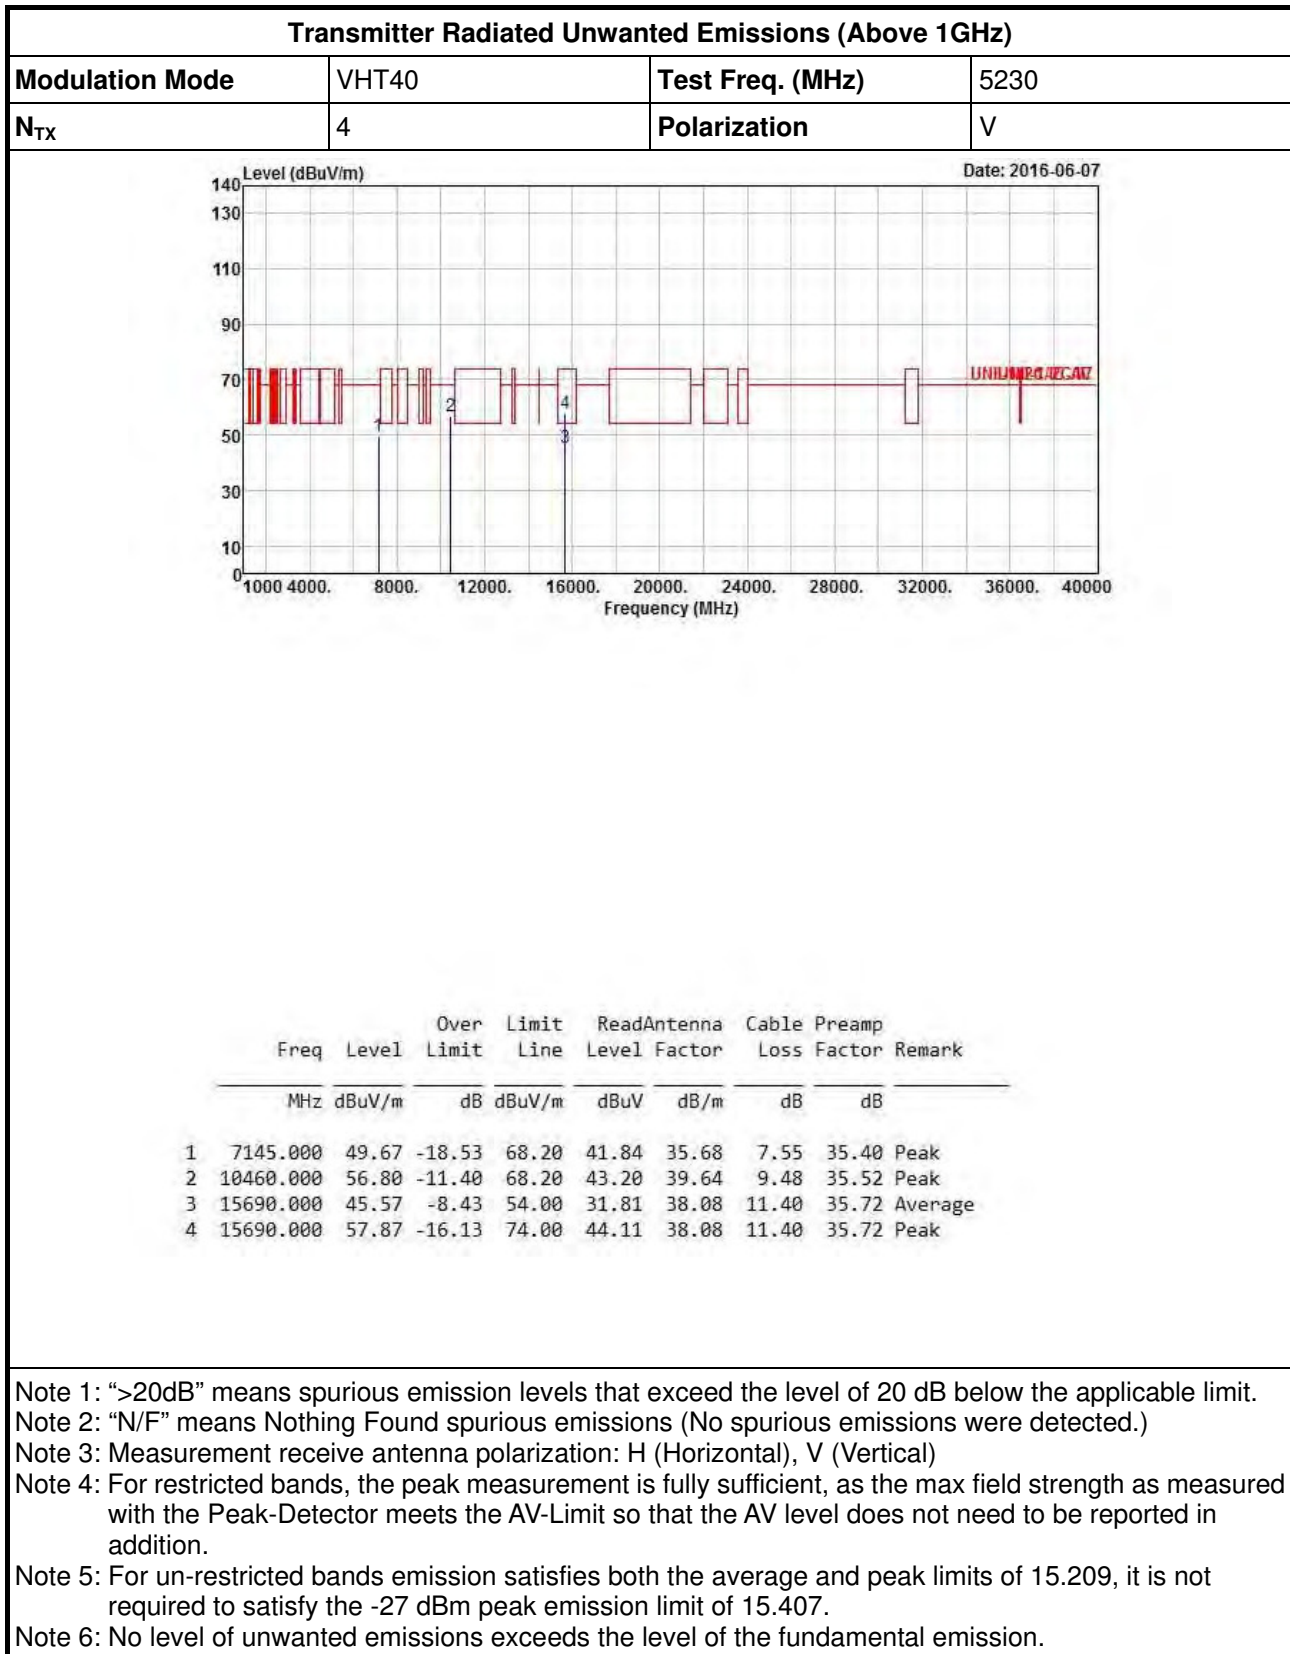


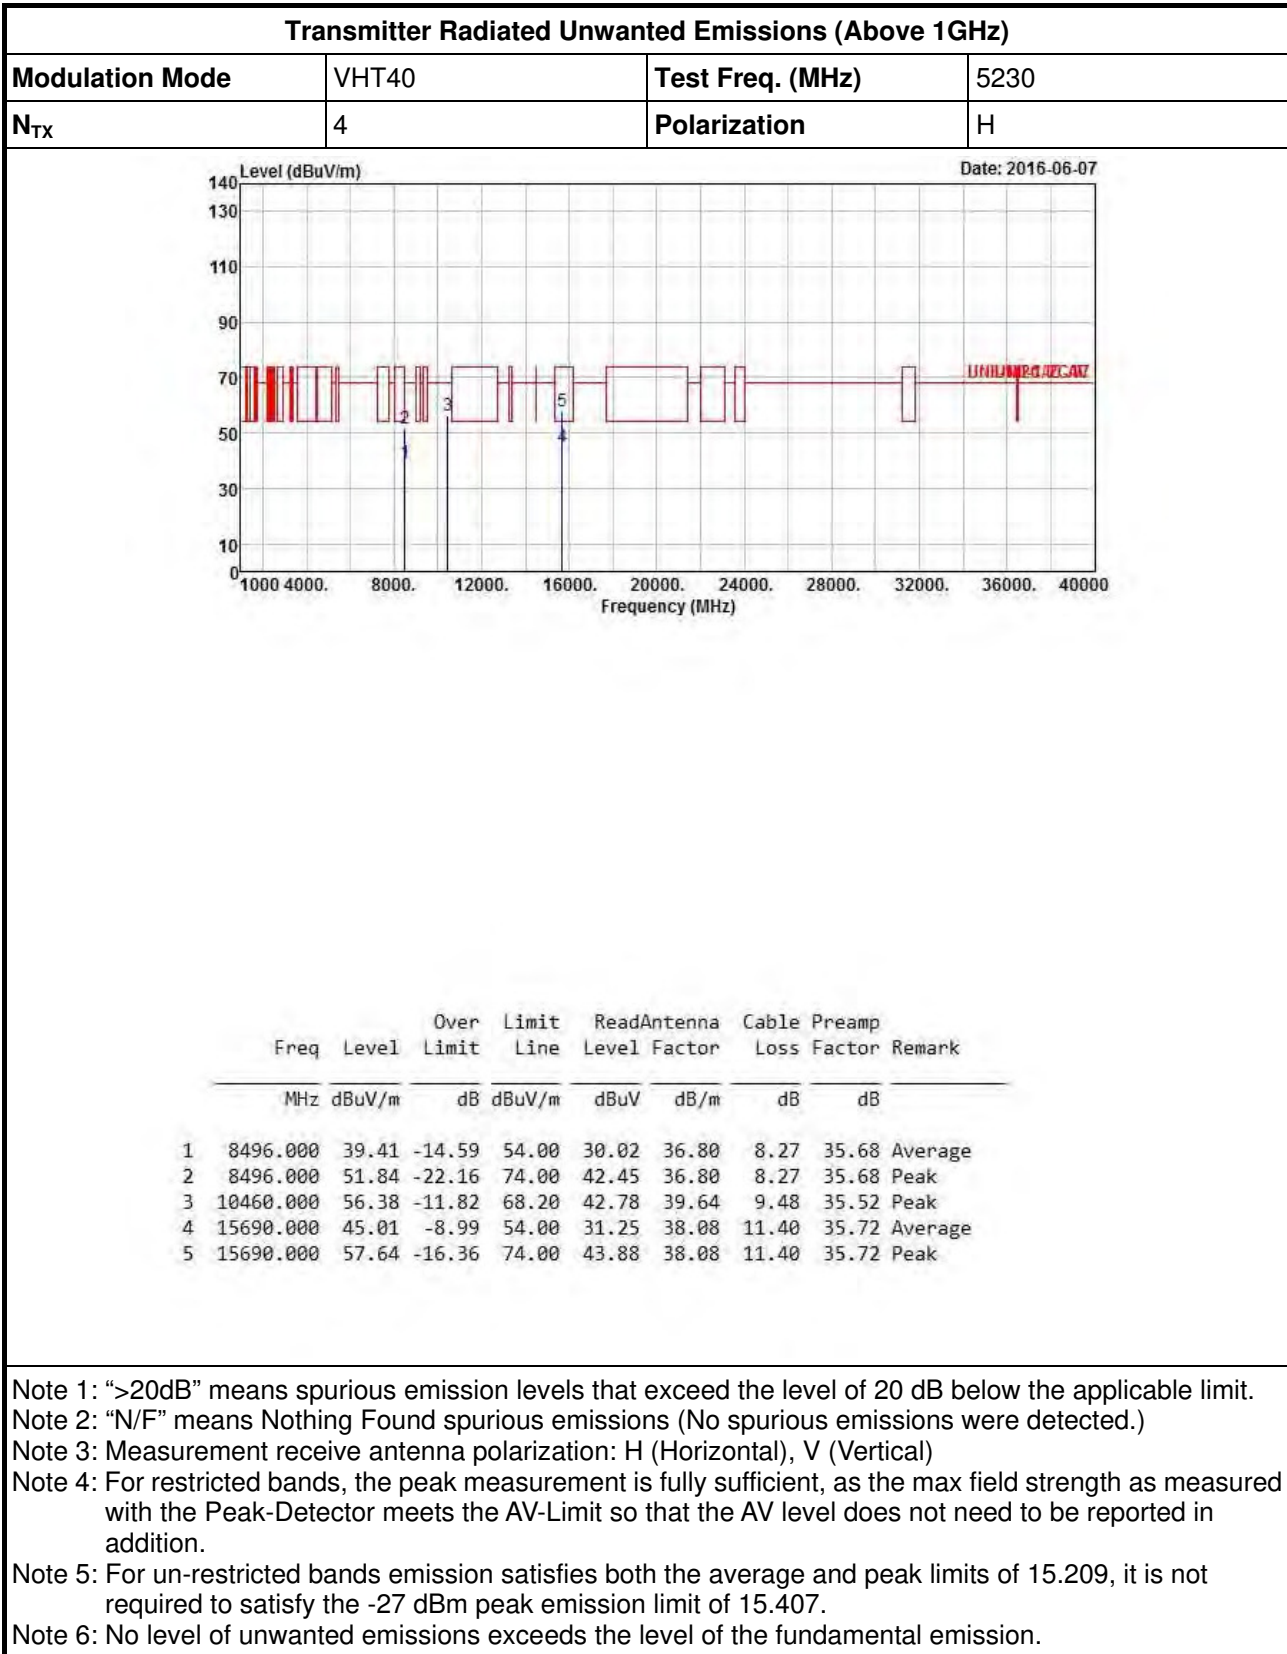




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	VHT80	Test Freq. (MHz)	5210
N _{TX}	4	Polarization	V

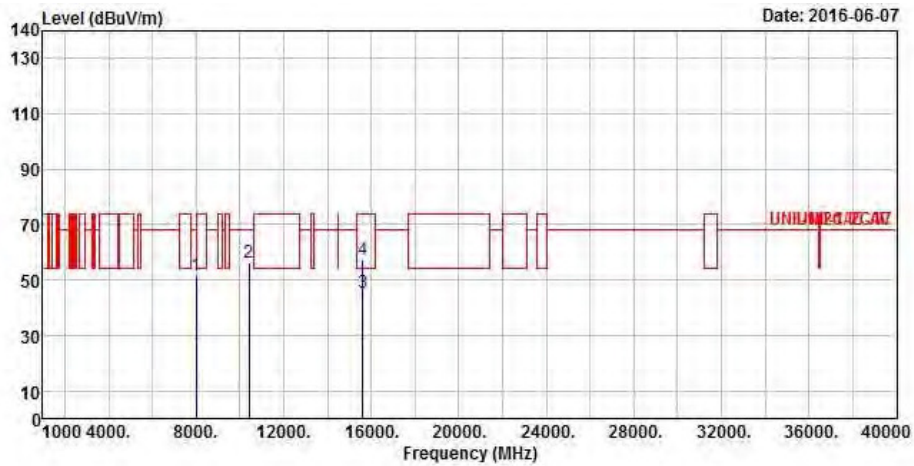

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7999.000	51.91	-16.29	68.20	42.36	37.20	7.98	35.63	Peak
2	10420.000	56.37	-11.83	68.20	42.90	39.57	9.46	35.56	Peak
3	15630.000	45.70	-8.30	54.00	31.70	38.21	11.47	35.68	Average
4	15630.000	57.40	-16.60	74.00	43.40	38.21	11.47	35.68	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

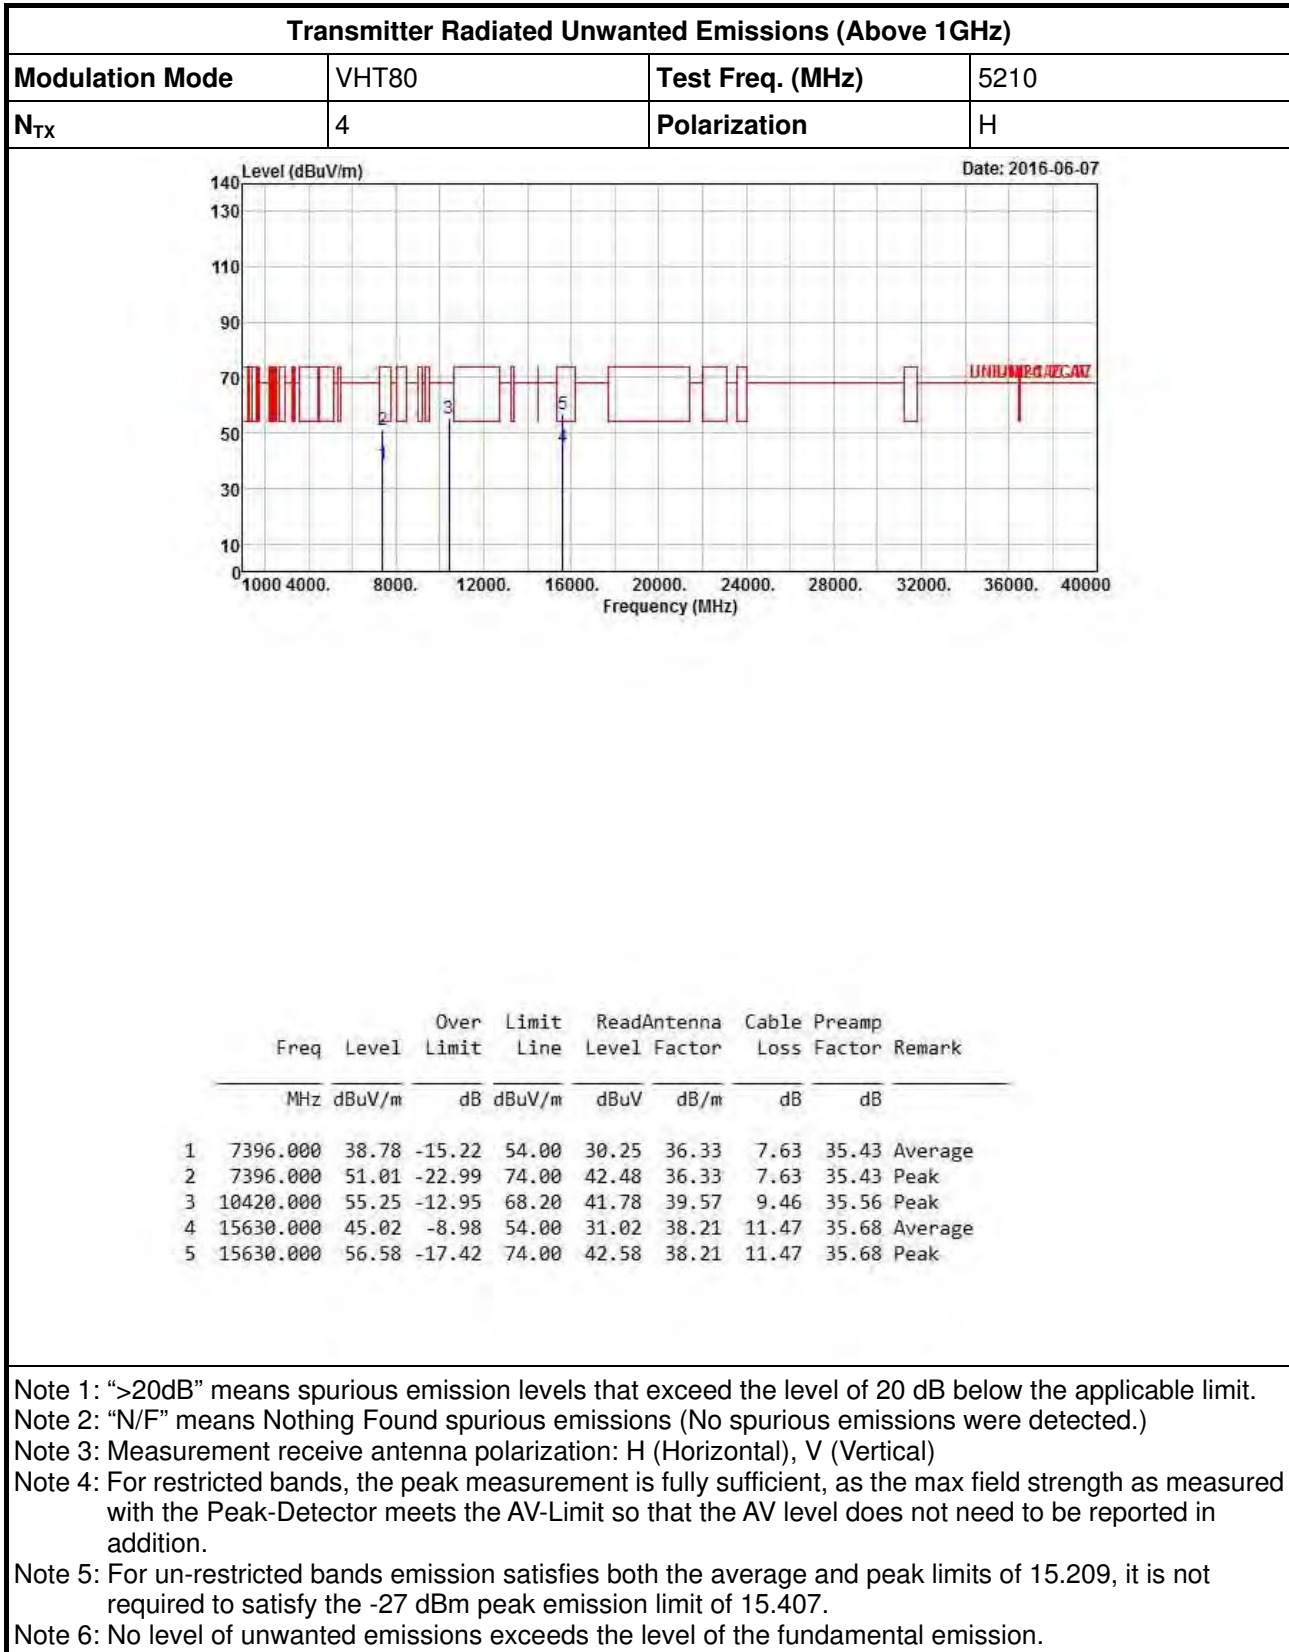


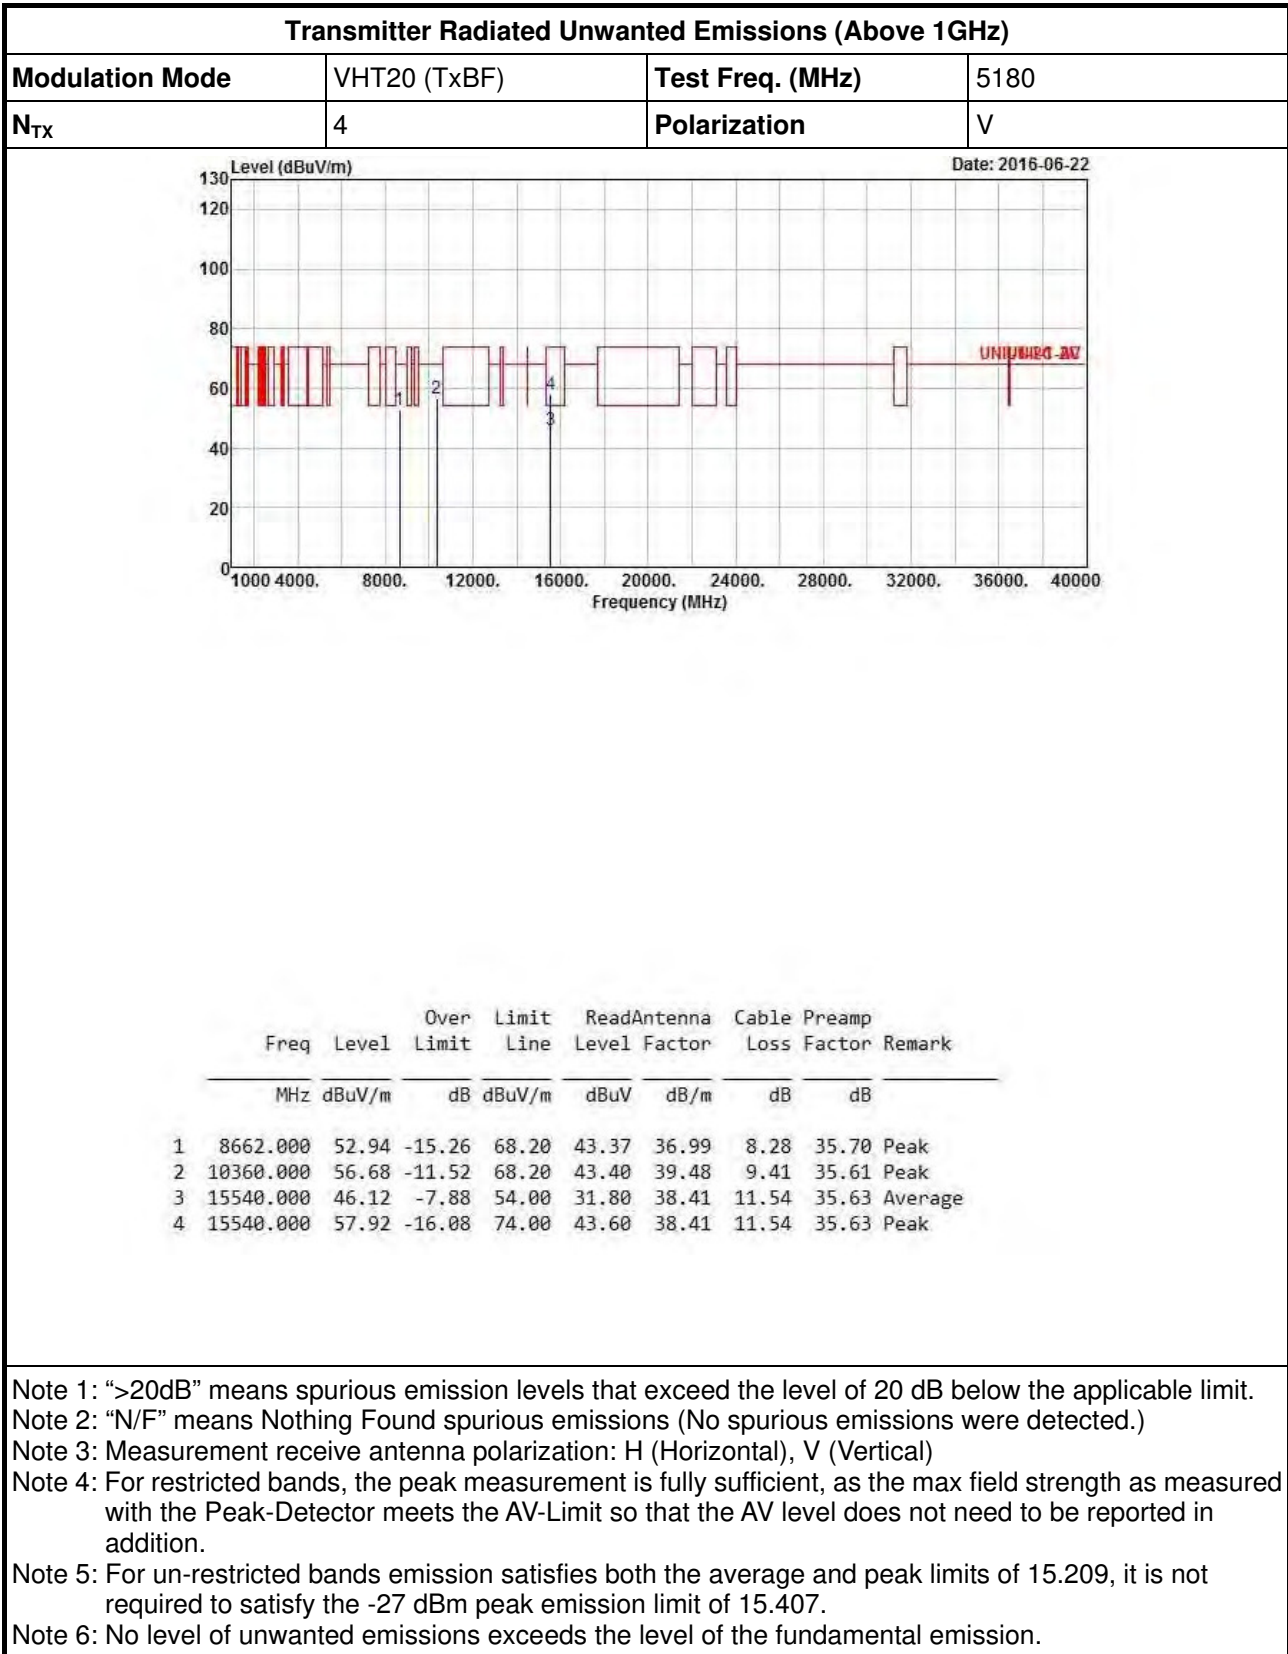



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5180
N _{TX}	4	Polarization	H

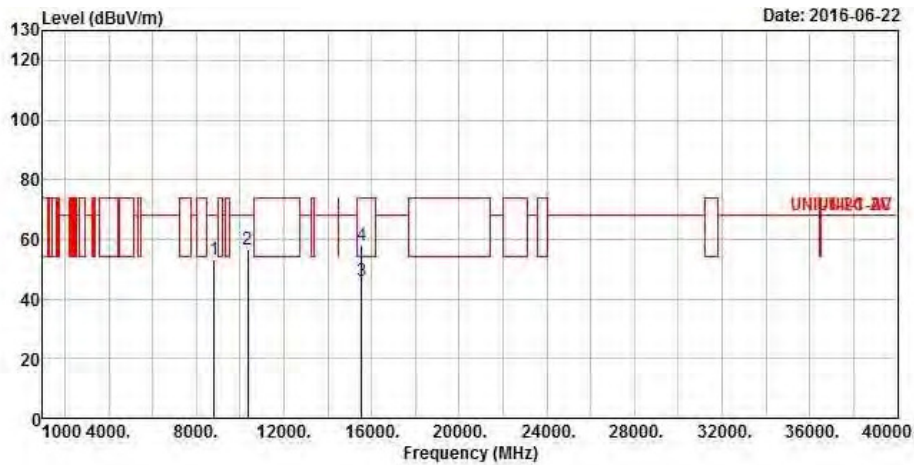


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8815.000	53.15	-15.05	68.20	43.40	37.18	8.29	35.72	Peak
2	10360.000	56.78	-11.42	68.20	43.50	39.48	9.41	35.61	Peak
3	15540.000	46.27	-7.73	54.00	31.95	38.41	11.54	35.63	Average
4	15540.000	57.90	-16.10	74.00	43.58	38.41	11.54	35.63	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5200
N _{TX}	4	Polarization	V

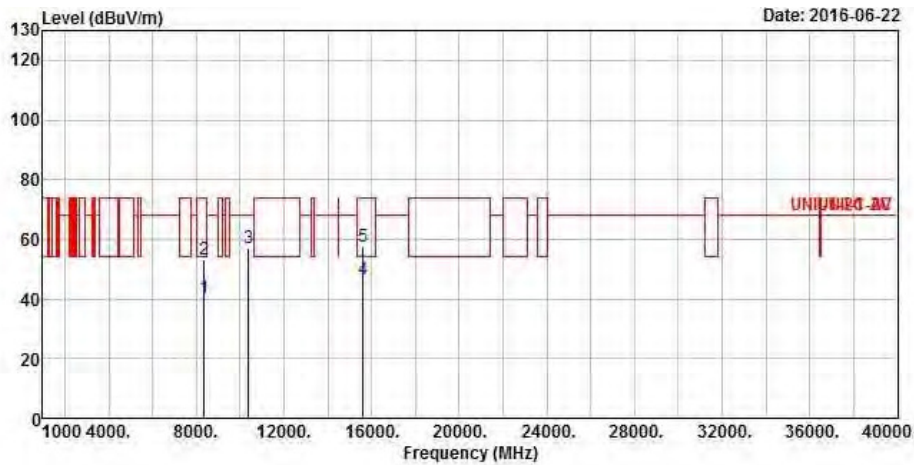


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	8371.000	40.50	-13.50	54.00	31.07	36.90	8.20	Average
2	8371.000	53.16	-20.84	74.00	43.73	36.90	8.20	Peak
3	10400.000	57.10	-11.10	68.20	43.70	39.54	9.44	Peak
4	15600.000	46.42	-7.58	54.00	32.31	38.28	11.50	Average
5	15600.000	57.80	-16.20	74.00	43.69	38.28	11.50	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5200
N _{TX}	4	Polarization	H

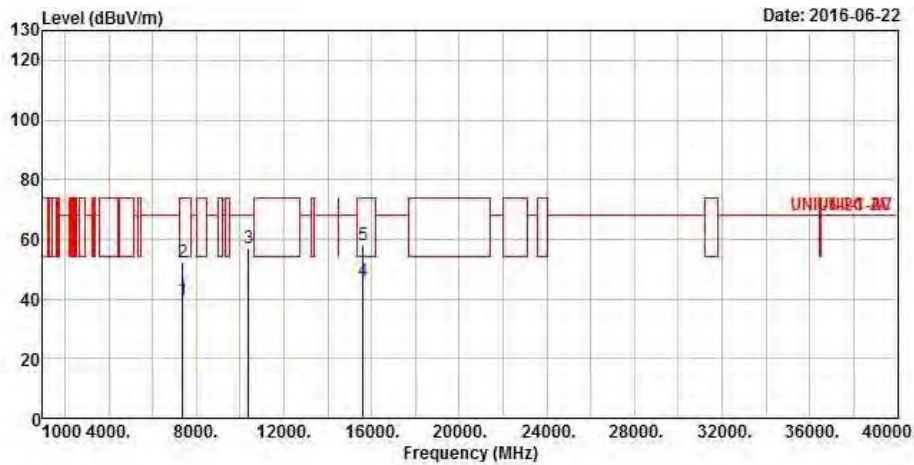


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7366.000	39.69	-14.31	54.00	31.26	36.25	7.61	35.43	Average
2	7366.000	52.50	-21.50	74.00	44.07	36.25	7.61	35.43	Peak
3	10400.000	57.08	-11.12	68.20	43.68	39.54	9.44	35.58	Peak
4	15600.000	46.23	-7.77	54.00	32.12	38.28	11.50	35.67	Average
5	15600.000	57.97	-16.03	74.00	43.86	38.28	11.50	35.67	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5240
N _{TX}	4	Polarization	V

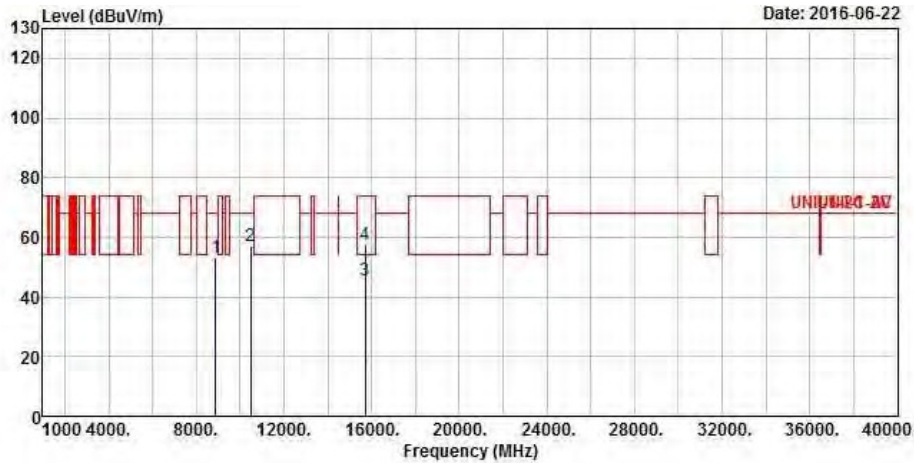

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8873.000	53.31	-14.89	68.20	43.49	37.25	8.30	35.73 Peak
2	10480.000	57.10	-11.10	68.20	43.45	39.67	9.48	35.50 Peak
3	15720.000	45.63	-8.37	54.00	31.94	38.02	11.40	35.73 Average
4	15720.000	57.63	-16.37	74.00	43.94	38.02	11.40	35.73 Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

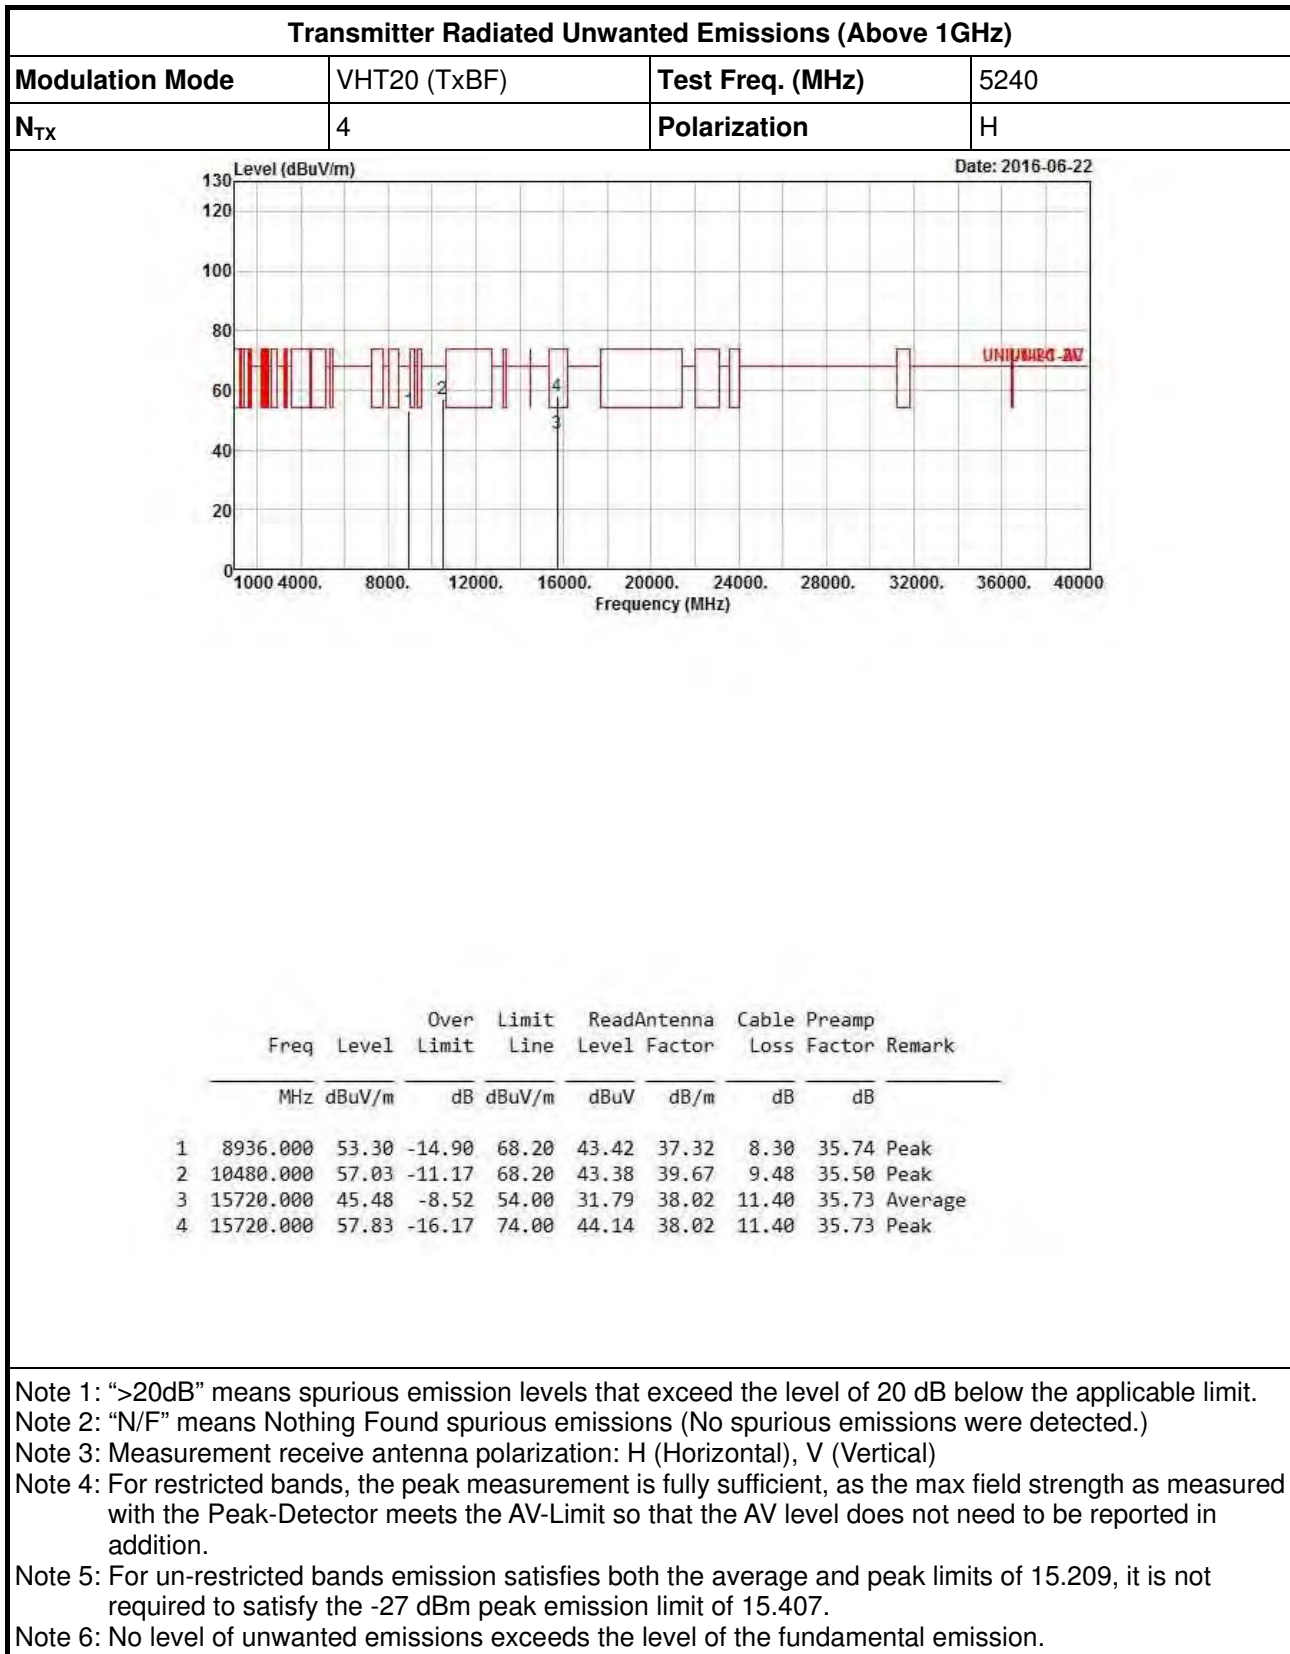



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5190
N _{TX}	4	Polarization	V

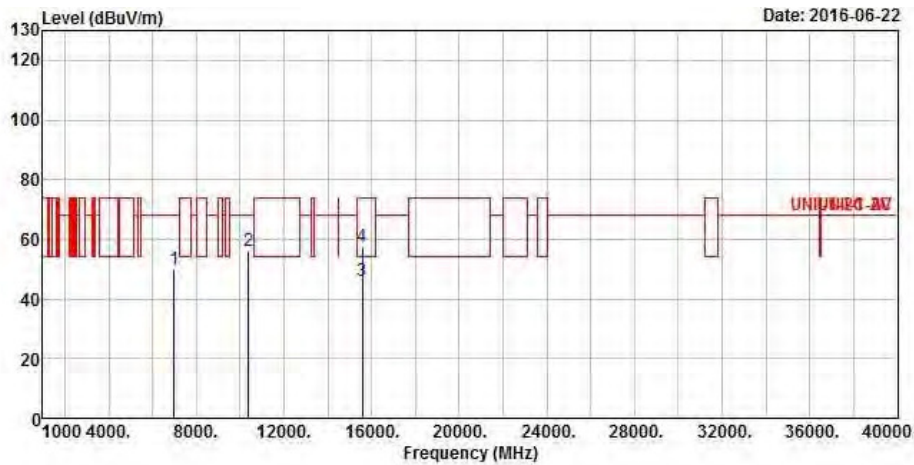


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7002.000	50.10	-18.10	68.20	42.69	35.31	7.49	35.39 Peak
2	10380.000	56.02	-12.18	68.20	42.67	39.51	9.44	35.60 Peak
3	15570.000	45.92	-8.08	54.00	31.72	38.35	11.50	35.65 Average
4	15570.000	57.51	-16.49	74.00	43.31	38.35	11.50	35.65 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5190
N _{TX}	4	Polarization	H

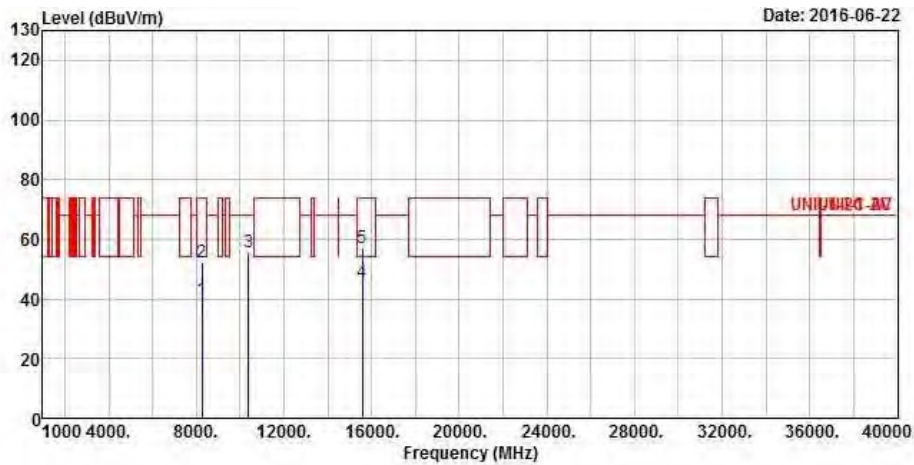


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8265.000	39.72	-14.28	54.00	30.25	36.99	8.14	35.66	Average
2	8265.000	52.16	-21.84	74.00	42.69	36.99	8.14	35.66	Peak
3	10380.000	55.49	-12.71	68.20	42.14	39.51	9.44	35.60	Peak
4	15570.000	45.45	-8.55	54.00	31.25	38.35	11.50	35.65	Average
5	15570.000	57.22	-16.78	74.00	43.02	38.35	11.50	35.65	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40 (TxBF)	Test Freq. (MHz)	5230
N _{TX}	4	Polarization	V

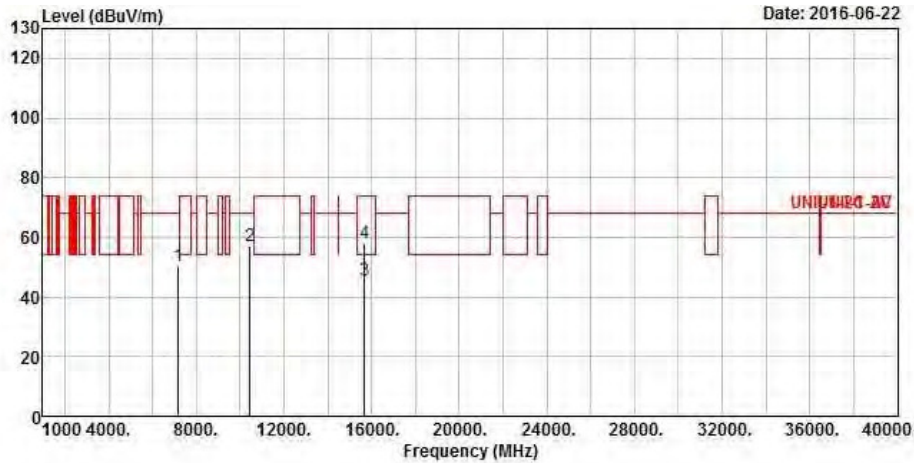


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7185.000	50.51	-17.69	68.20	42.58	35.78	7.56	35.41	Peak
2	10460.000	57.29	-10.91	68.20	43.69	39.64	9.48	35.52	Peak
3	15690.000	45.79	-8.21	54.00	32.03	38.08	11.40	35.72	Average
4	15690.000	58.08	-15.92	74.00	44.32	38.08	11.40	35.72	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40 (TxBF)	Test Freq. (MHz)	5230
N _{TX}	4	Polarization	H

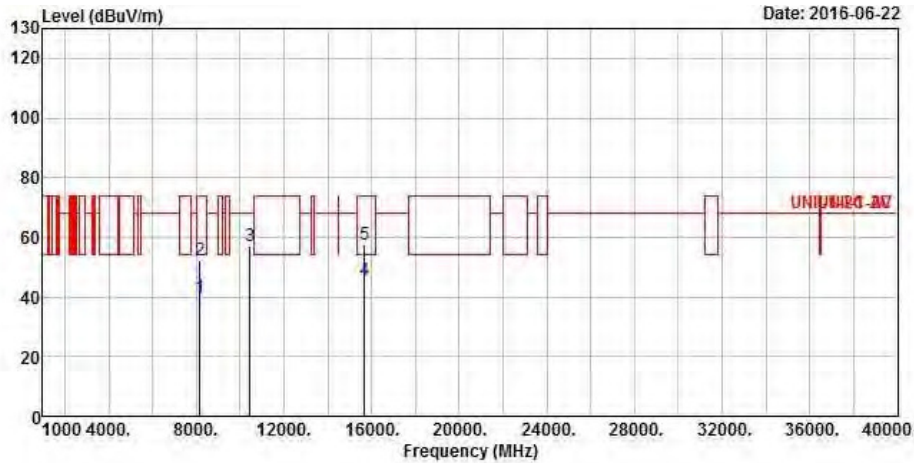


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	8174.000	39.75	-14.25	54.00	30.25	37.06	8.09	Average
2	8174.000	52.48	-21.52	74.00	42.98	37.06	8.09	Peak
3	10460.000	56.85	-11.35	68.20	43.25	39.64	9.48	Peak
4	15690.000	45.35	-8.65	54.00	31.59	38.08	11.40	Average
5	15690.000	57.55	-16.45	74.00	43.79	38.08	11.40	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80 (TxBF)	Test Freq. (MHz)	5210
N _{TX}	4	Polarization	V

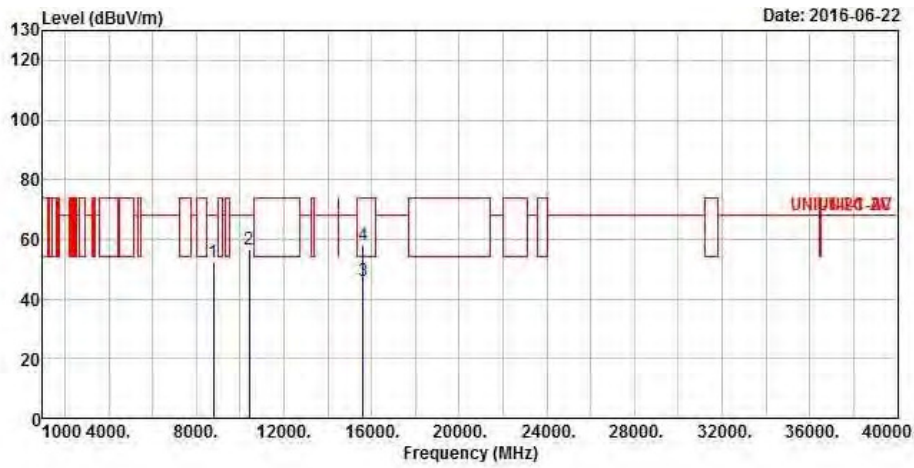


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8785.000	52.40	-15.80	68.20	42.69	37.14	8.29	35.72 Peak
2	10420.000	56.64	-11.56	68.20	43.17	39.57	9.46	35.56 Peak
3	15630.000	45.90	-8.10	54.00	31.90	38.21	11.47	35.68 Average
4	15630.000	57.94	-16.06	74.00	43.94	38.21	11.47	35.68 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80 (TxBF)	Test Freq. (MHz)	5210
N _{TX}	4	Polarization	H

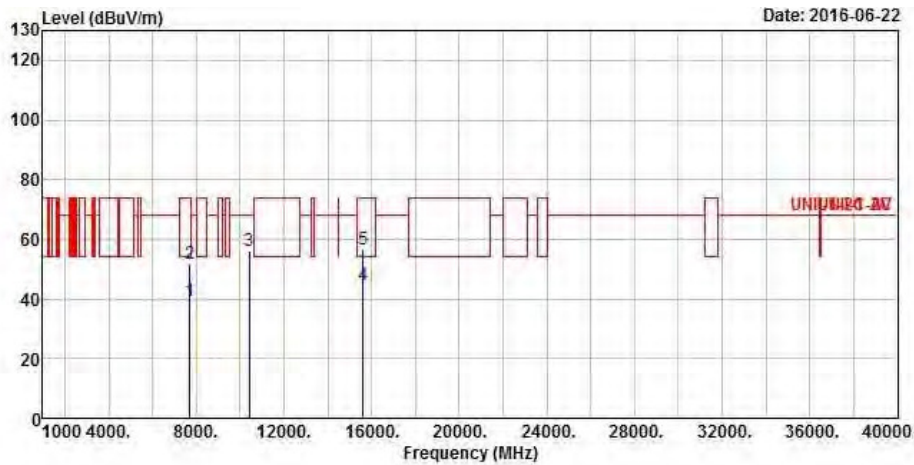


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7696.000	39.26	-14.74	54.00	30.13	36.84	7.80	35.51	Average
2	7696.000	51.80	-22.20	74.00	42.67	36.84	7.80	35.51	Peak
3	10420.000	56.32	-11.88	68.20	42.85	39.57	9.46	35.56	Peak
4	15630.000	44.58	-9.42	54.00	30.58	38.21	11.47	35.68	Average
5	15630.000	56.78	-17.22	74.00	42.78	38.21	11.47	35.68	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5725-5850MHz

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11a	Test Freq. (MHz)	5745
N_{TX}	4	Polarization	V

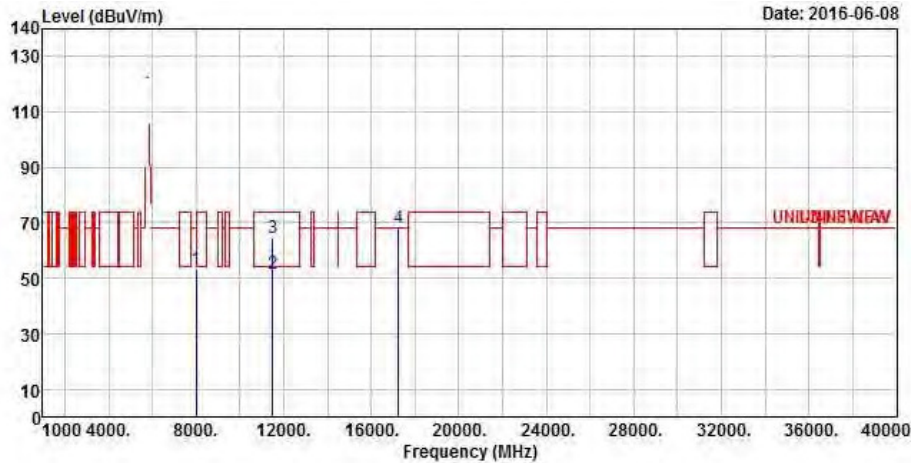


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8002.000	53.08	-15.12	68.20	43.51	37.20	8.00	35.63	Peak
2	11490.000	51.41	-2.59	54.00	36.85	40.10	9.74	35.28	Average
3	11490.000	64.34	-9.66	74.00	49.78	40.10	9.74	35.28	Peak
4	17235.000	68.05	-0.15	68.20	50.16	41.05	11.93	35.09	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	11a	Test Freq. (MHz)	5745
N _{TX}	4	Polarization	H

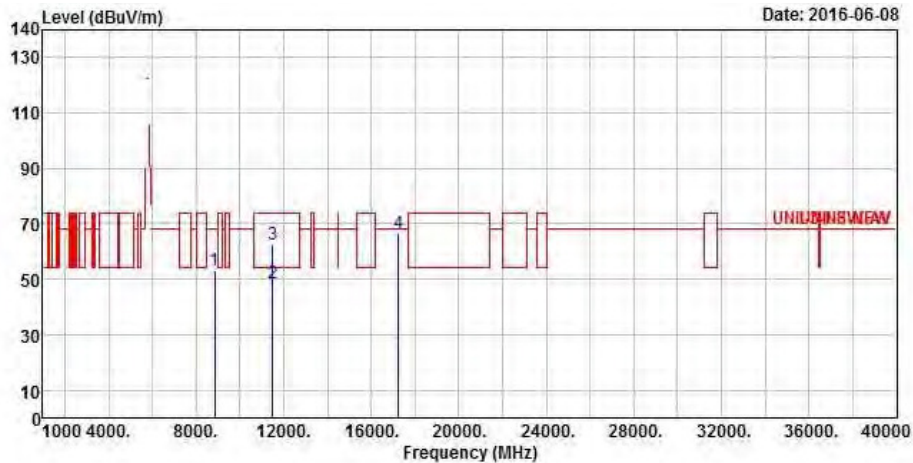



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	8866.000	53.06	-15.14	68.20	43.25	37.24	8.30	35.73 Peak
2	11490.000	48.81	-5.19	54.00	34.25	40.10	9.74	35.28 Average
3	11490.000	62.72	-11.28	74.00	48.16	40.10	9.74	35.28 Peak
4	17235.000	66.84	-1.36	68.20	48.95	41.05	11.93	35.09 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

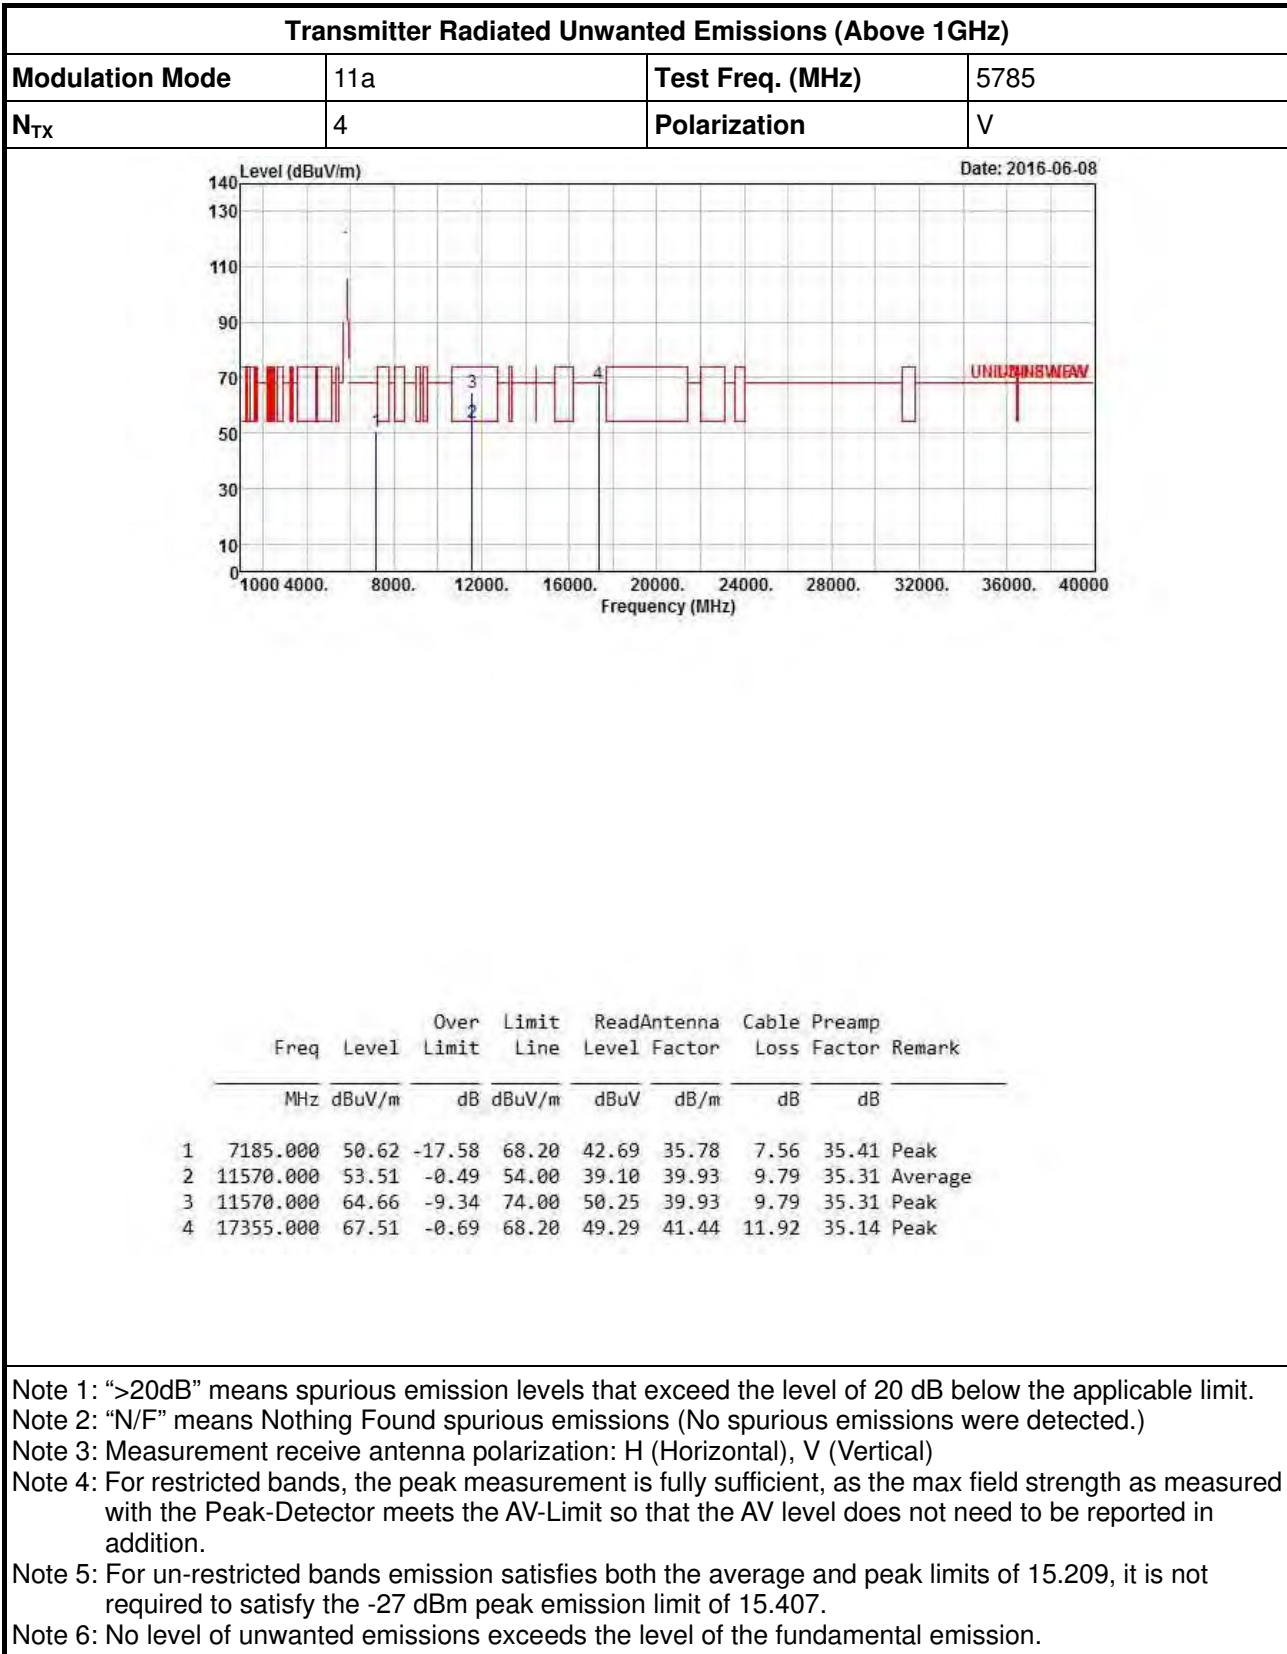

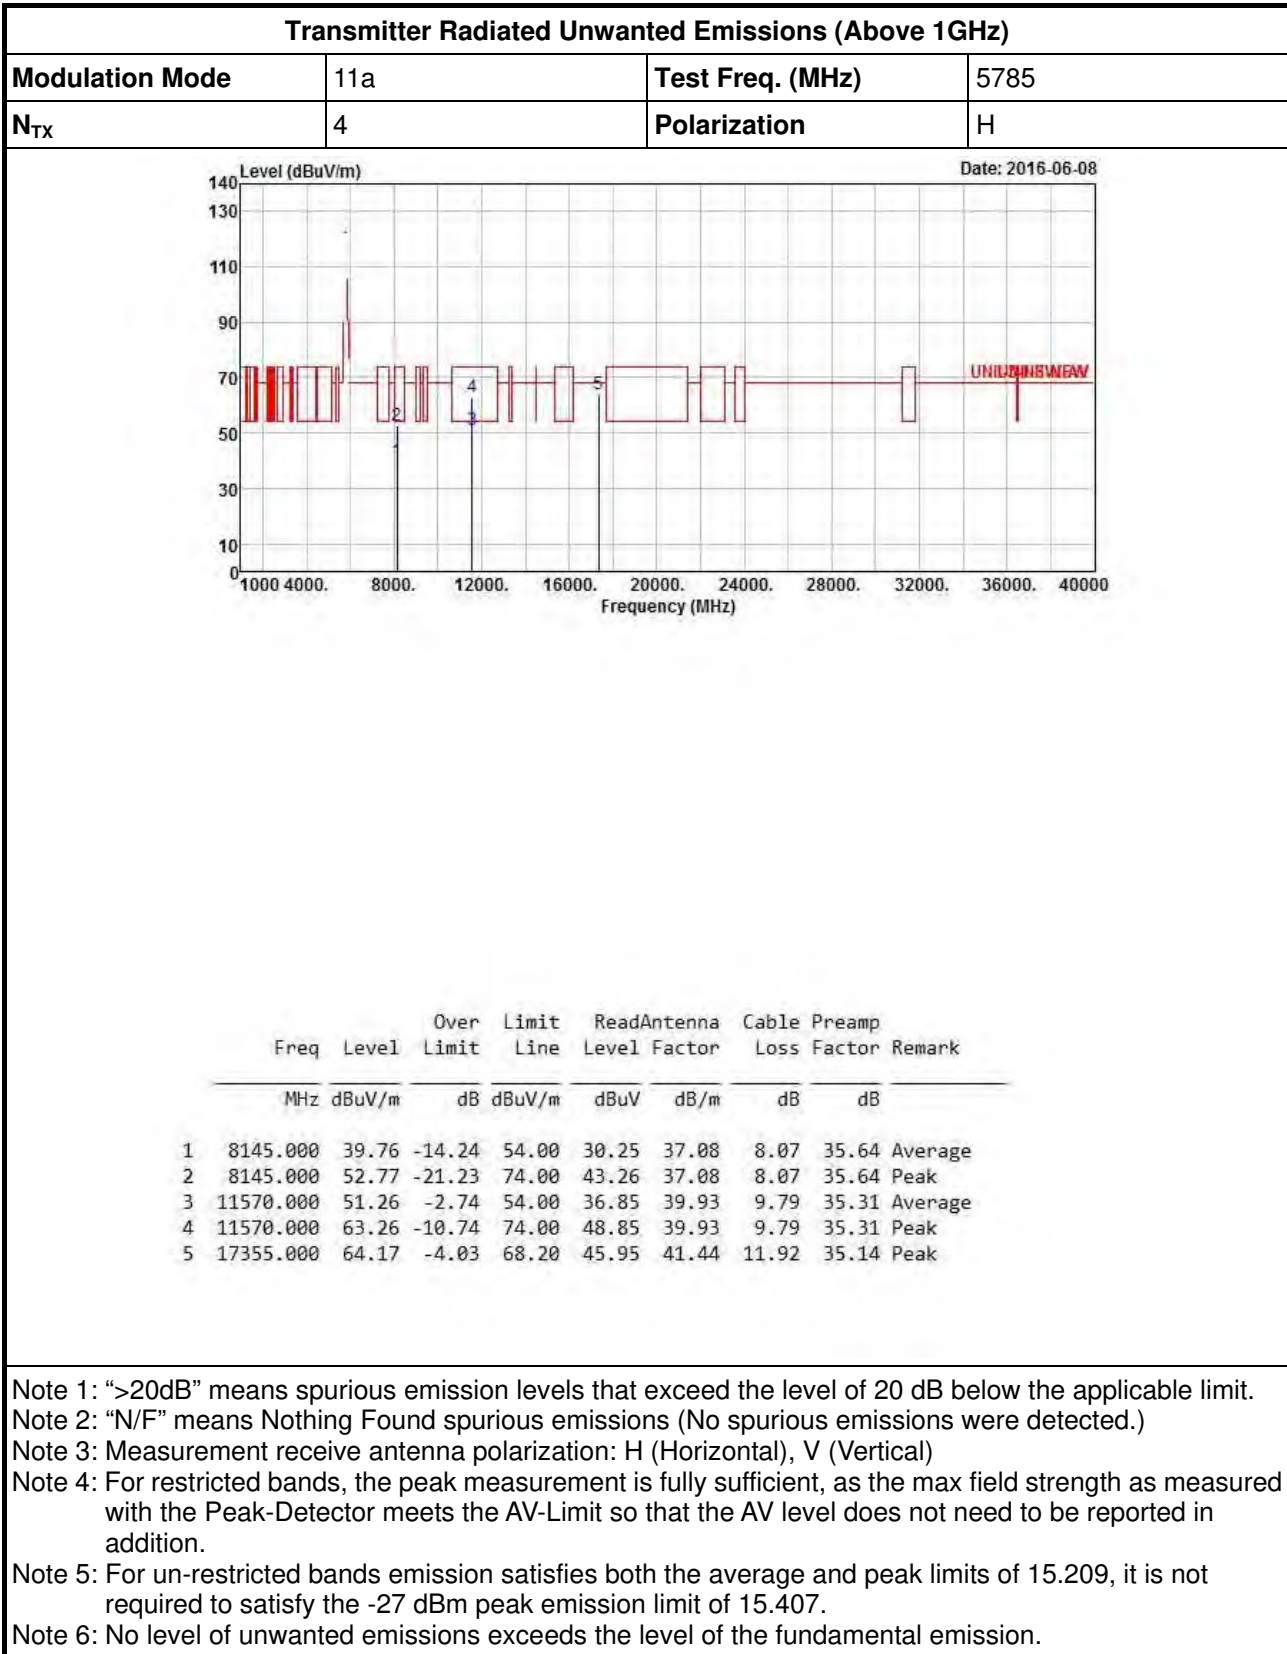

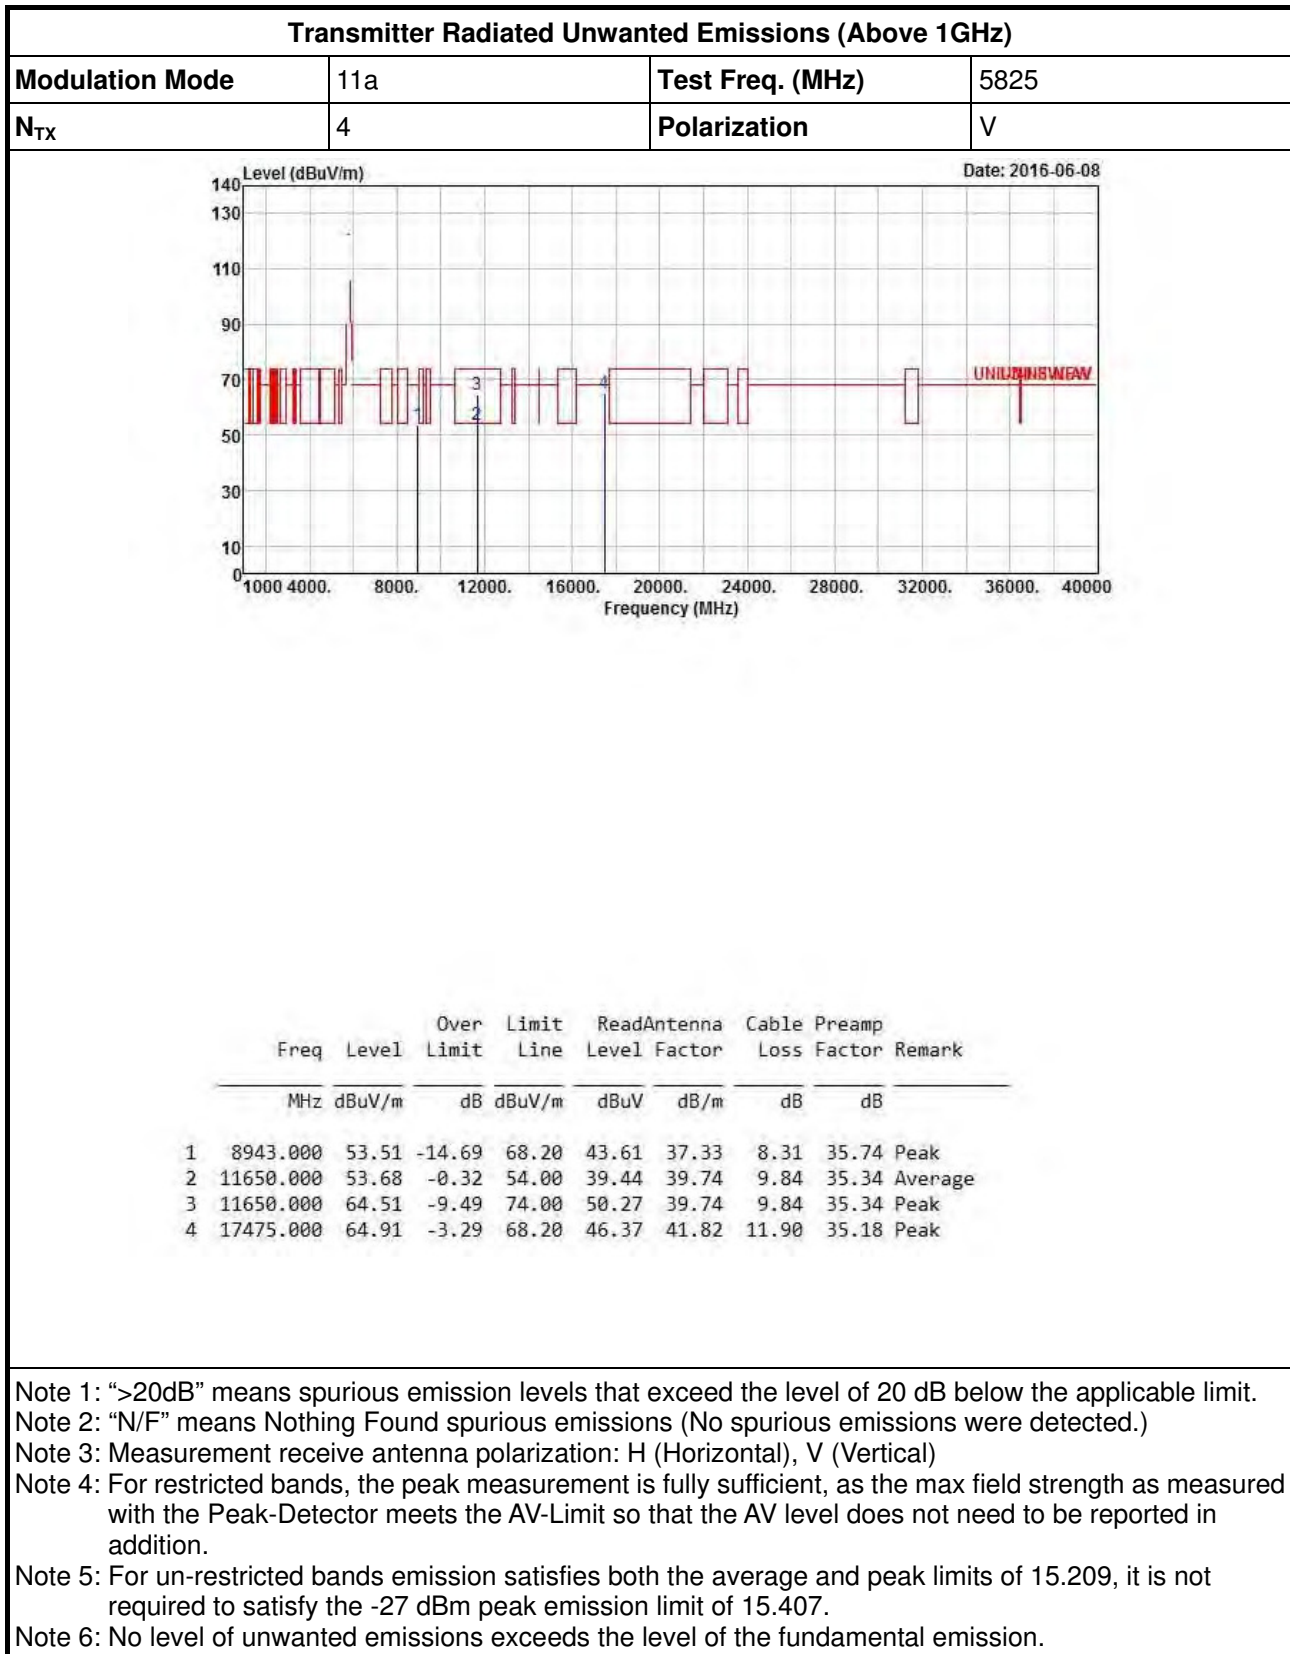


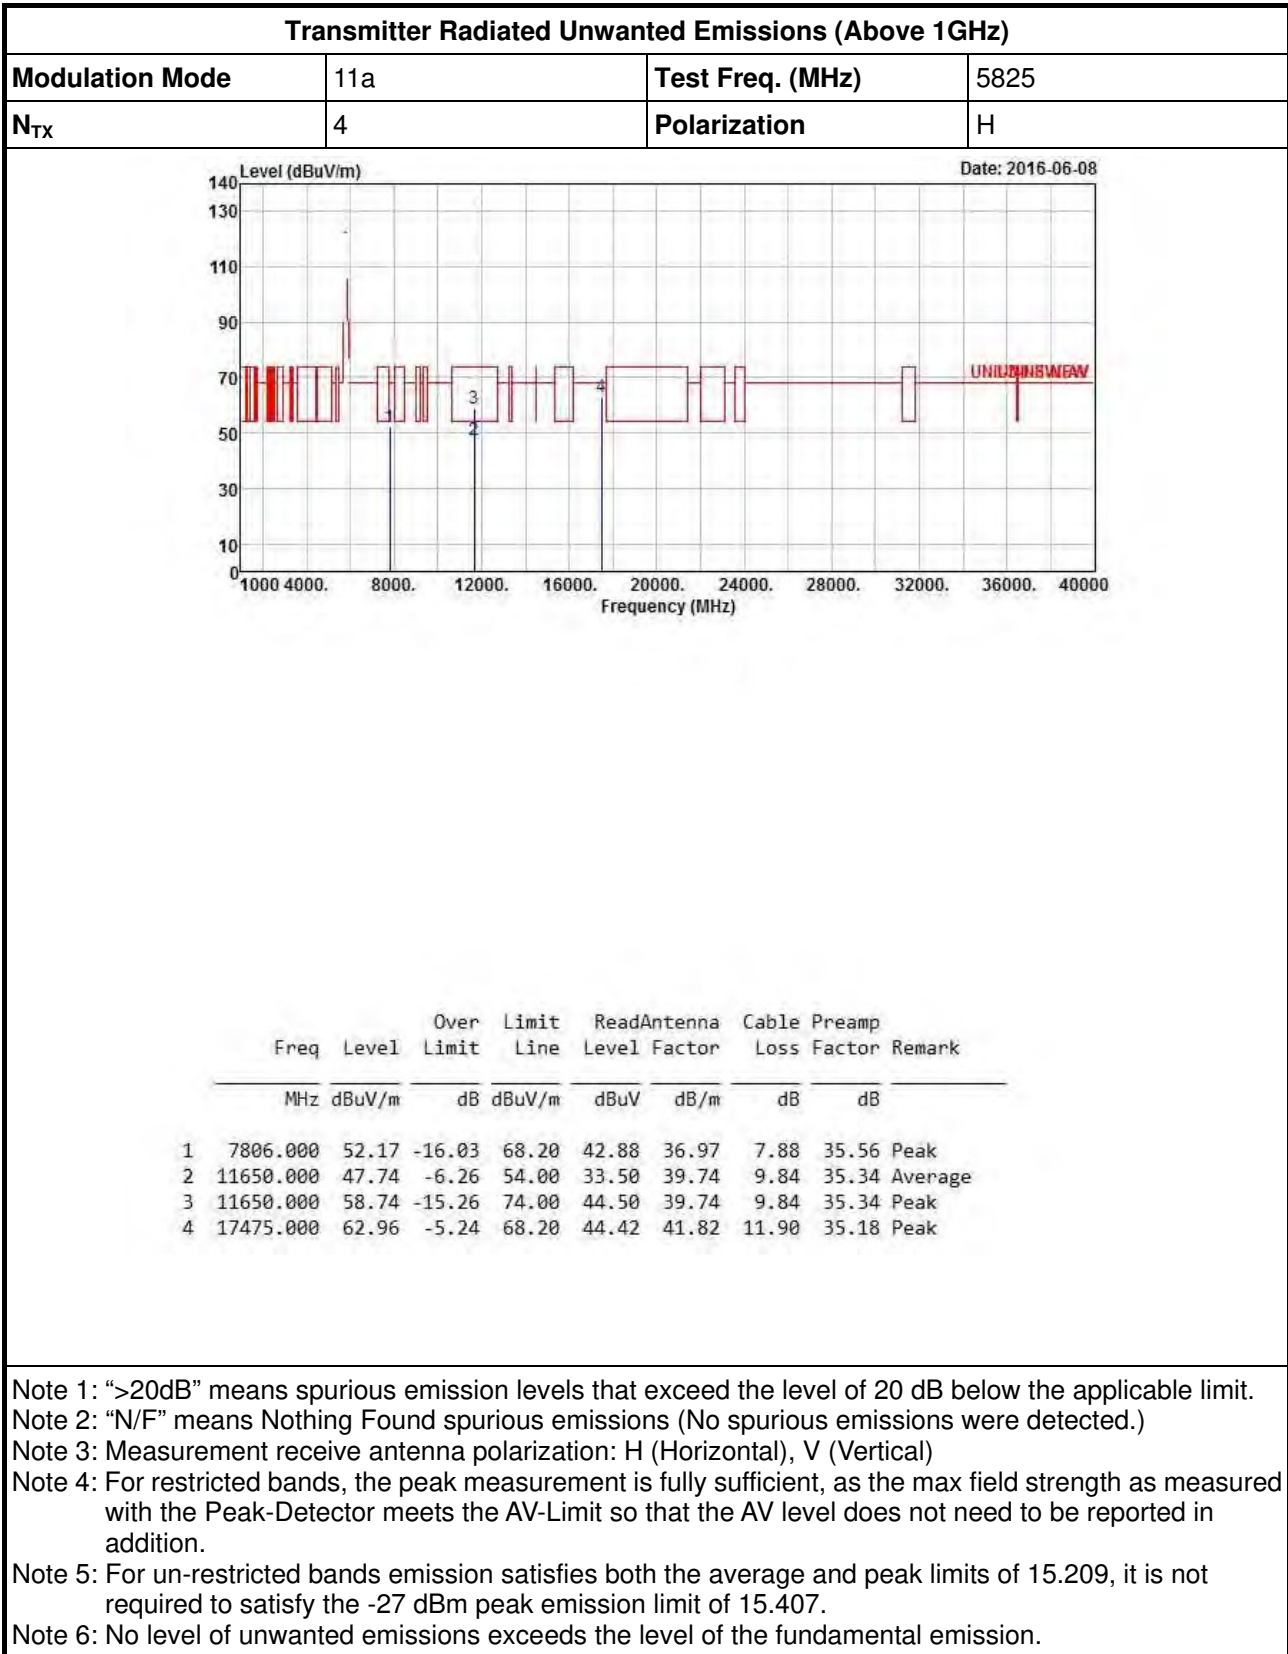



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5745
N _{TX}	4	Polarization	V

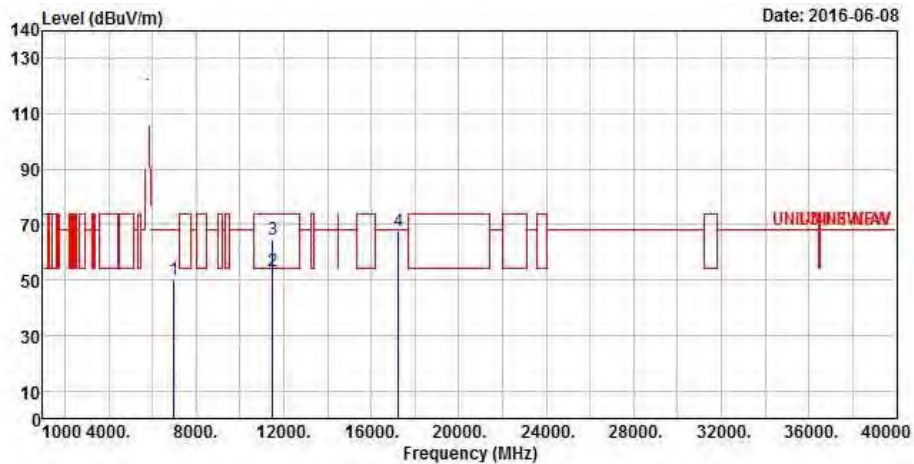


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7005.000	50.10	-18.10	68.20	42.69	35.31	7.49	35.39	Peak
2	11490.000	53.06	-0.94	54.00	38.50	40.10	9.74	35.28	Average
3	11490.000	64.63	-9.37	74.00	50.07	40.10	9.74	35.28	Peak
4	17235.000	67.58	-0.62	68.20	49.69	41.05	11.93	35.09	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	VHT20	Test Freq. (MHz)	5745
N _{TX}	4	Polarization	H

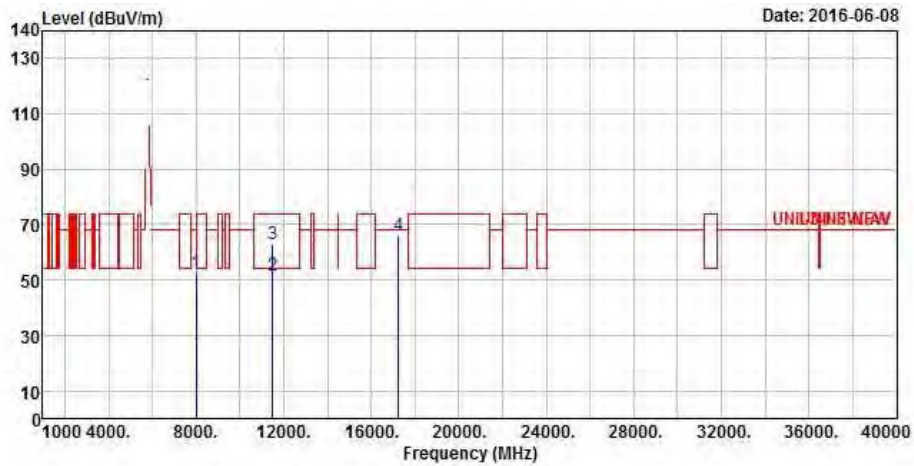


	Freq	Level	Over Limit	Limit	ReadAntenna	Cable Preamp	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7999.000	52.57	-15.63	68.20	43.02	37.20	7.98	35.63	Peak
2	11490.000	51.41	-2.59	54.00	36.85	40.10	9.74	35.28	Average
3	11490.000	63.25	-10.75	74.00	48.69	40.10	9.74	35.28	Peak
4	17235.000	66.13	-2.07	68.20	48.24	41.05	11.93	35.09	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

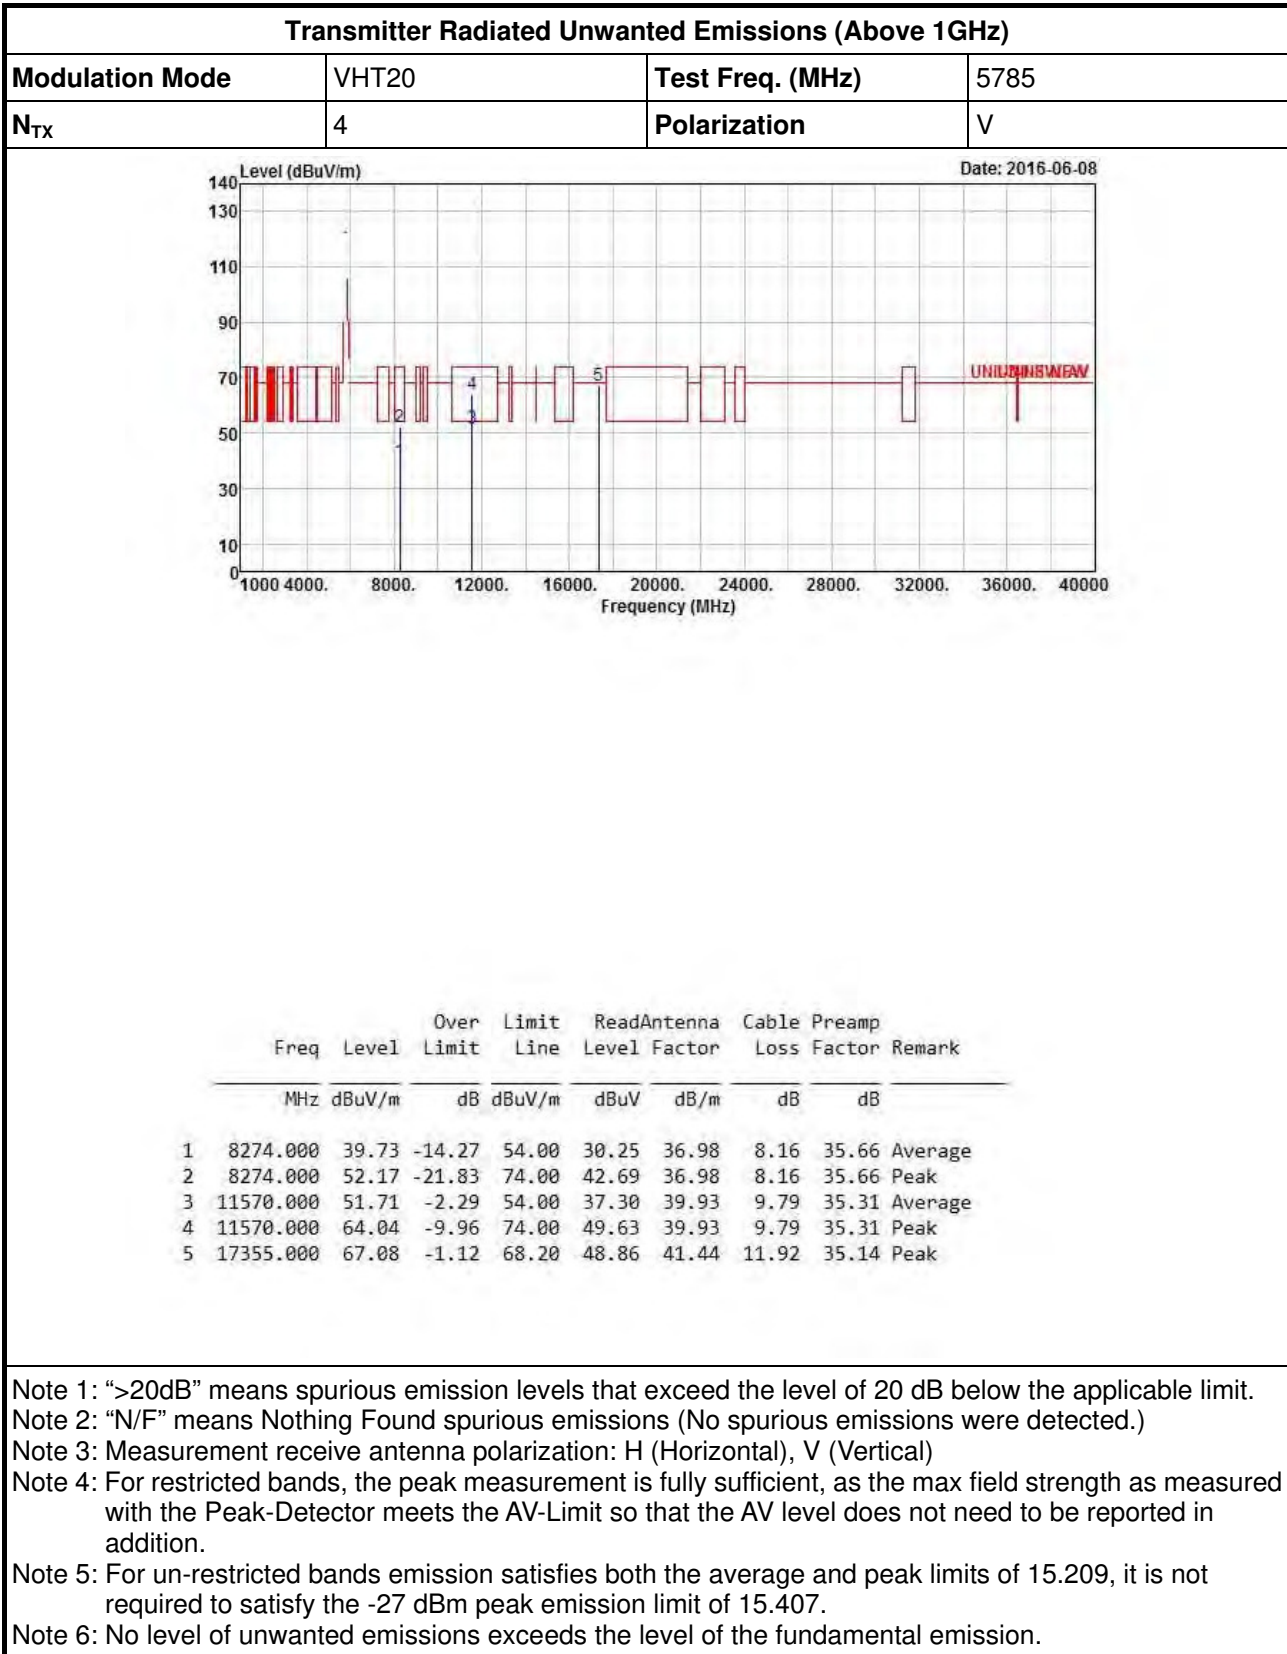

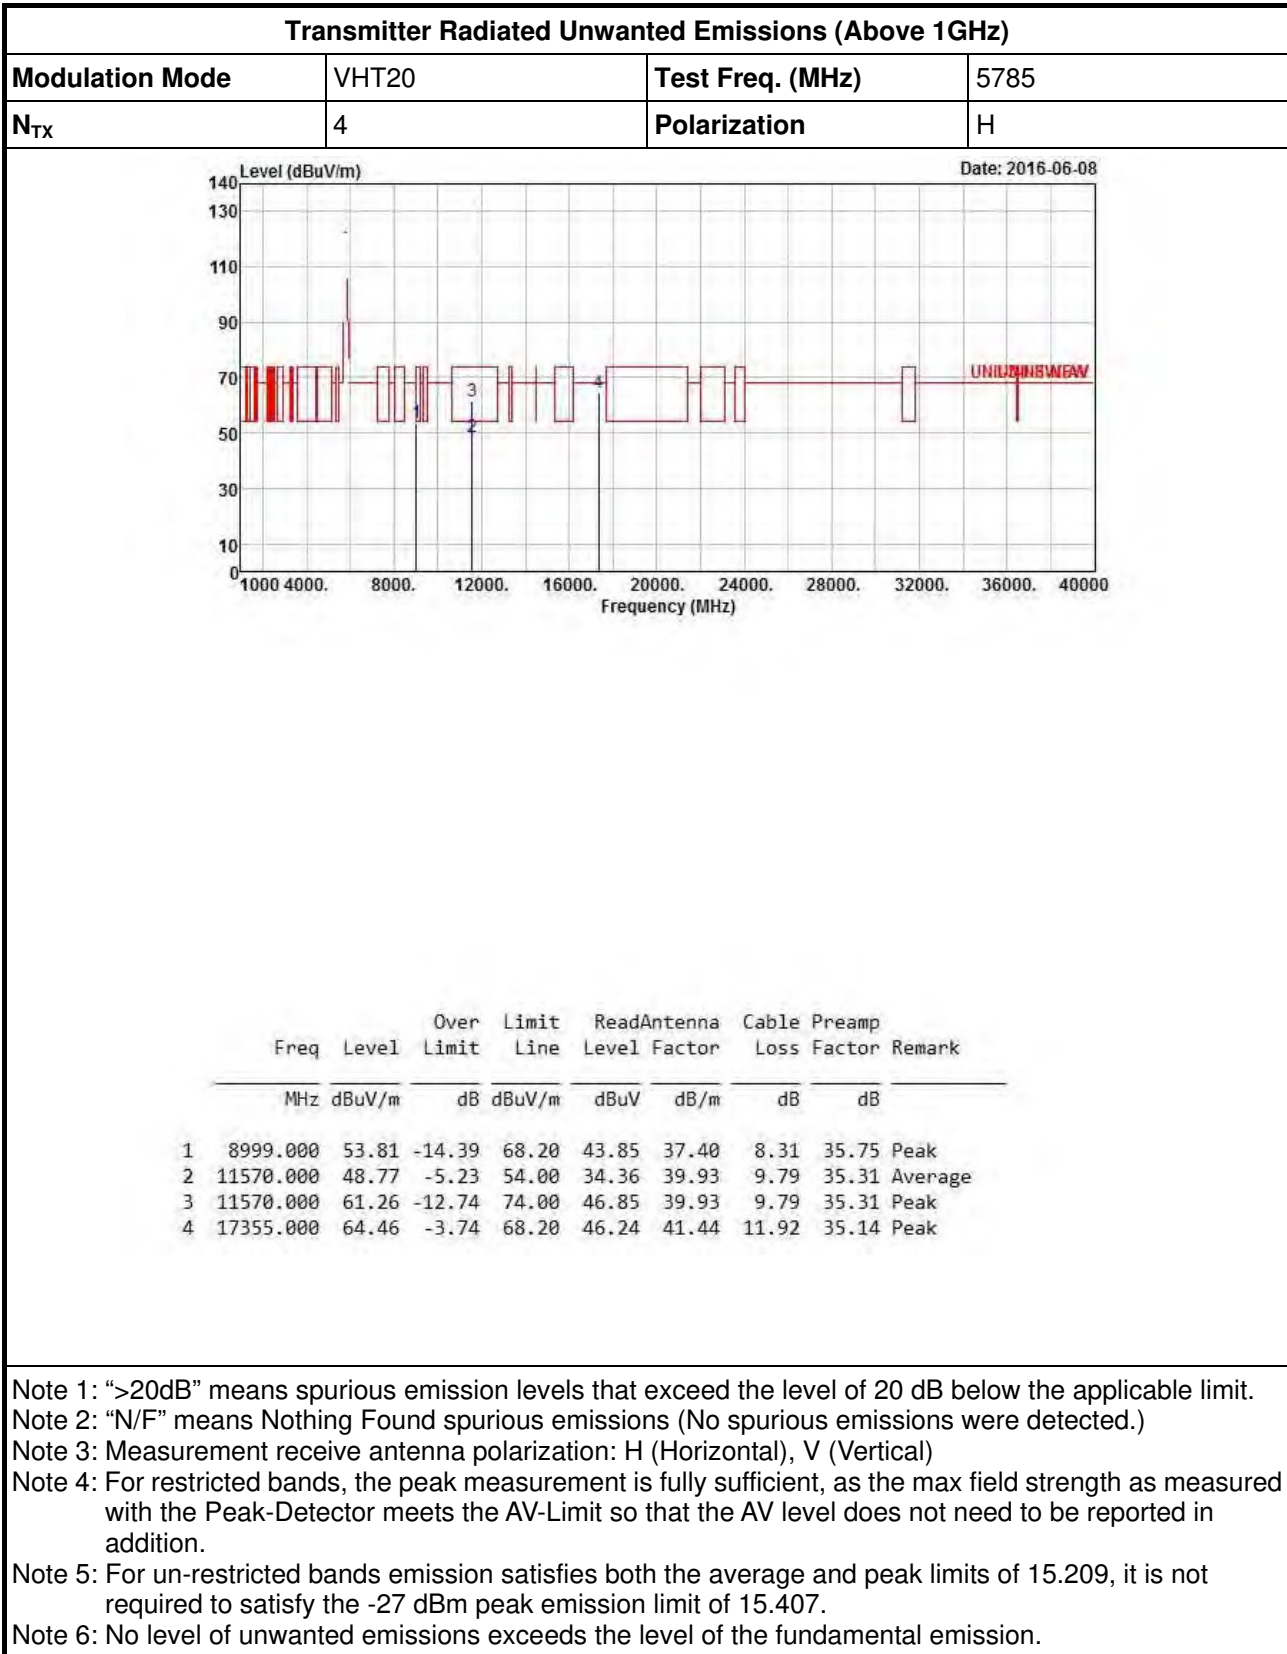


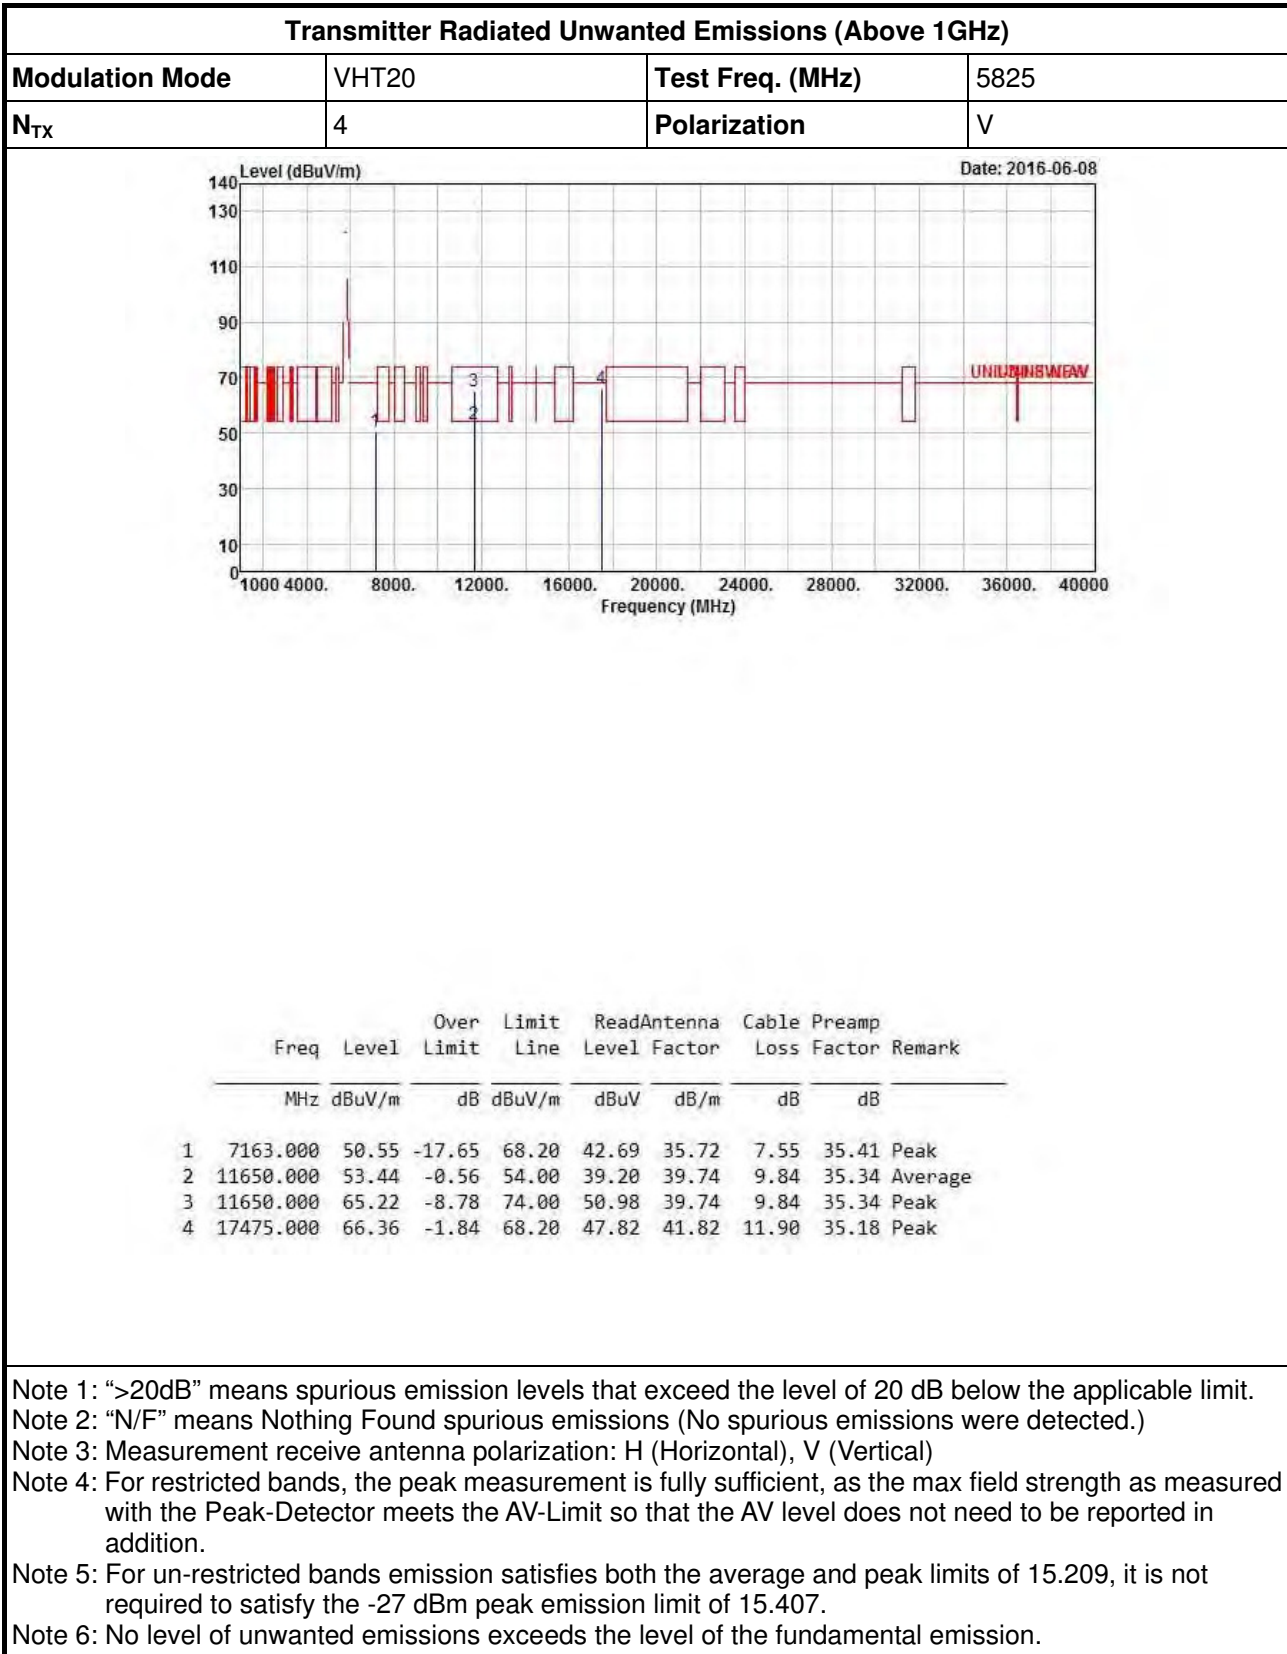




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	VHT20	Test Freq. (MHz)	5825
N _{TX}	4	Polarization	H

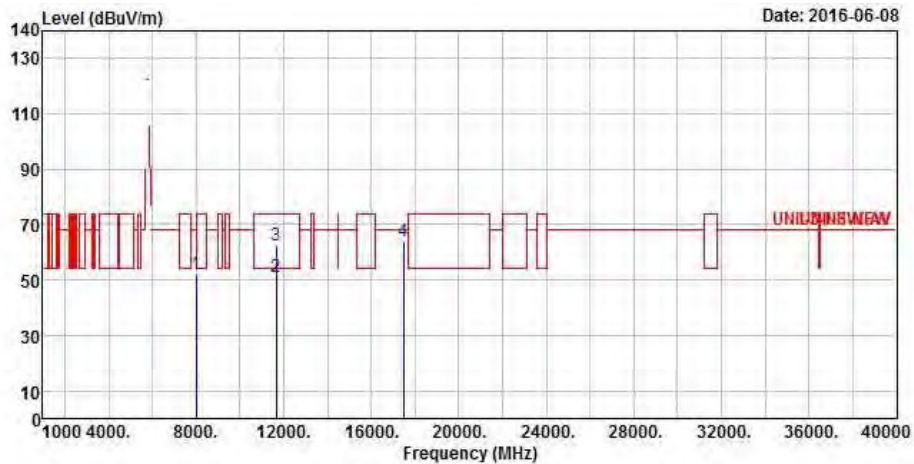



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8003.000	52.26	-15.94	68.20	42.69	37.20	8.00	35.63	Peak
2	11650.000	51.09	-2.91	54.00	36.85	39.74	9.84	35.34	Average
3	11650.000	62.39	-11.61	74.00	48.15	39.74	9.84	35.34	Peak
4	17475.000	64.23	-3.97	68.20	45.69	41.82	11.90	35.18	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

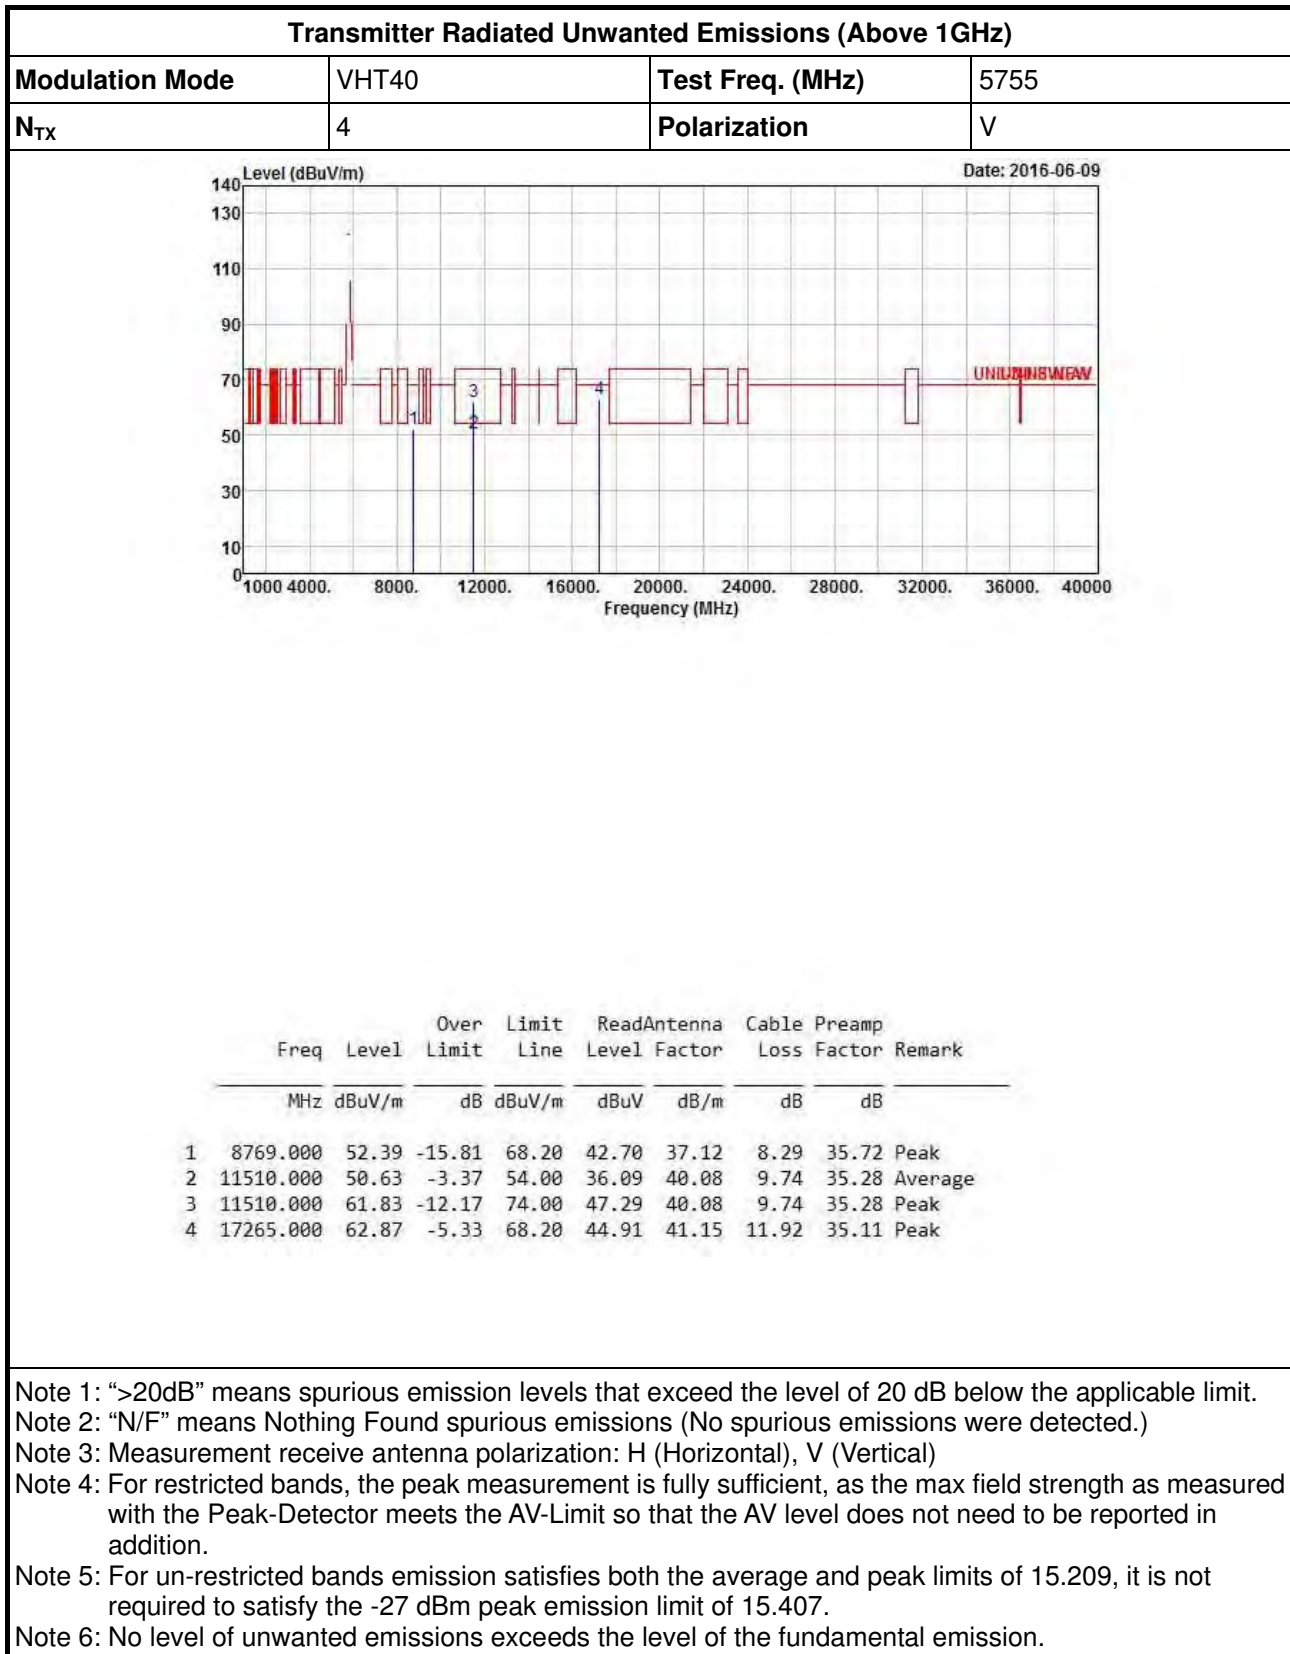

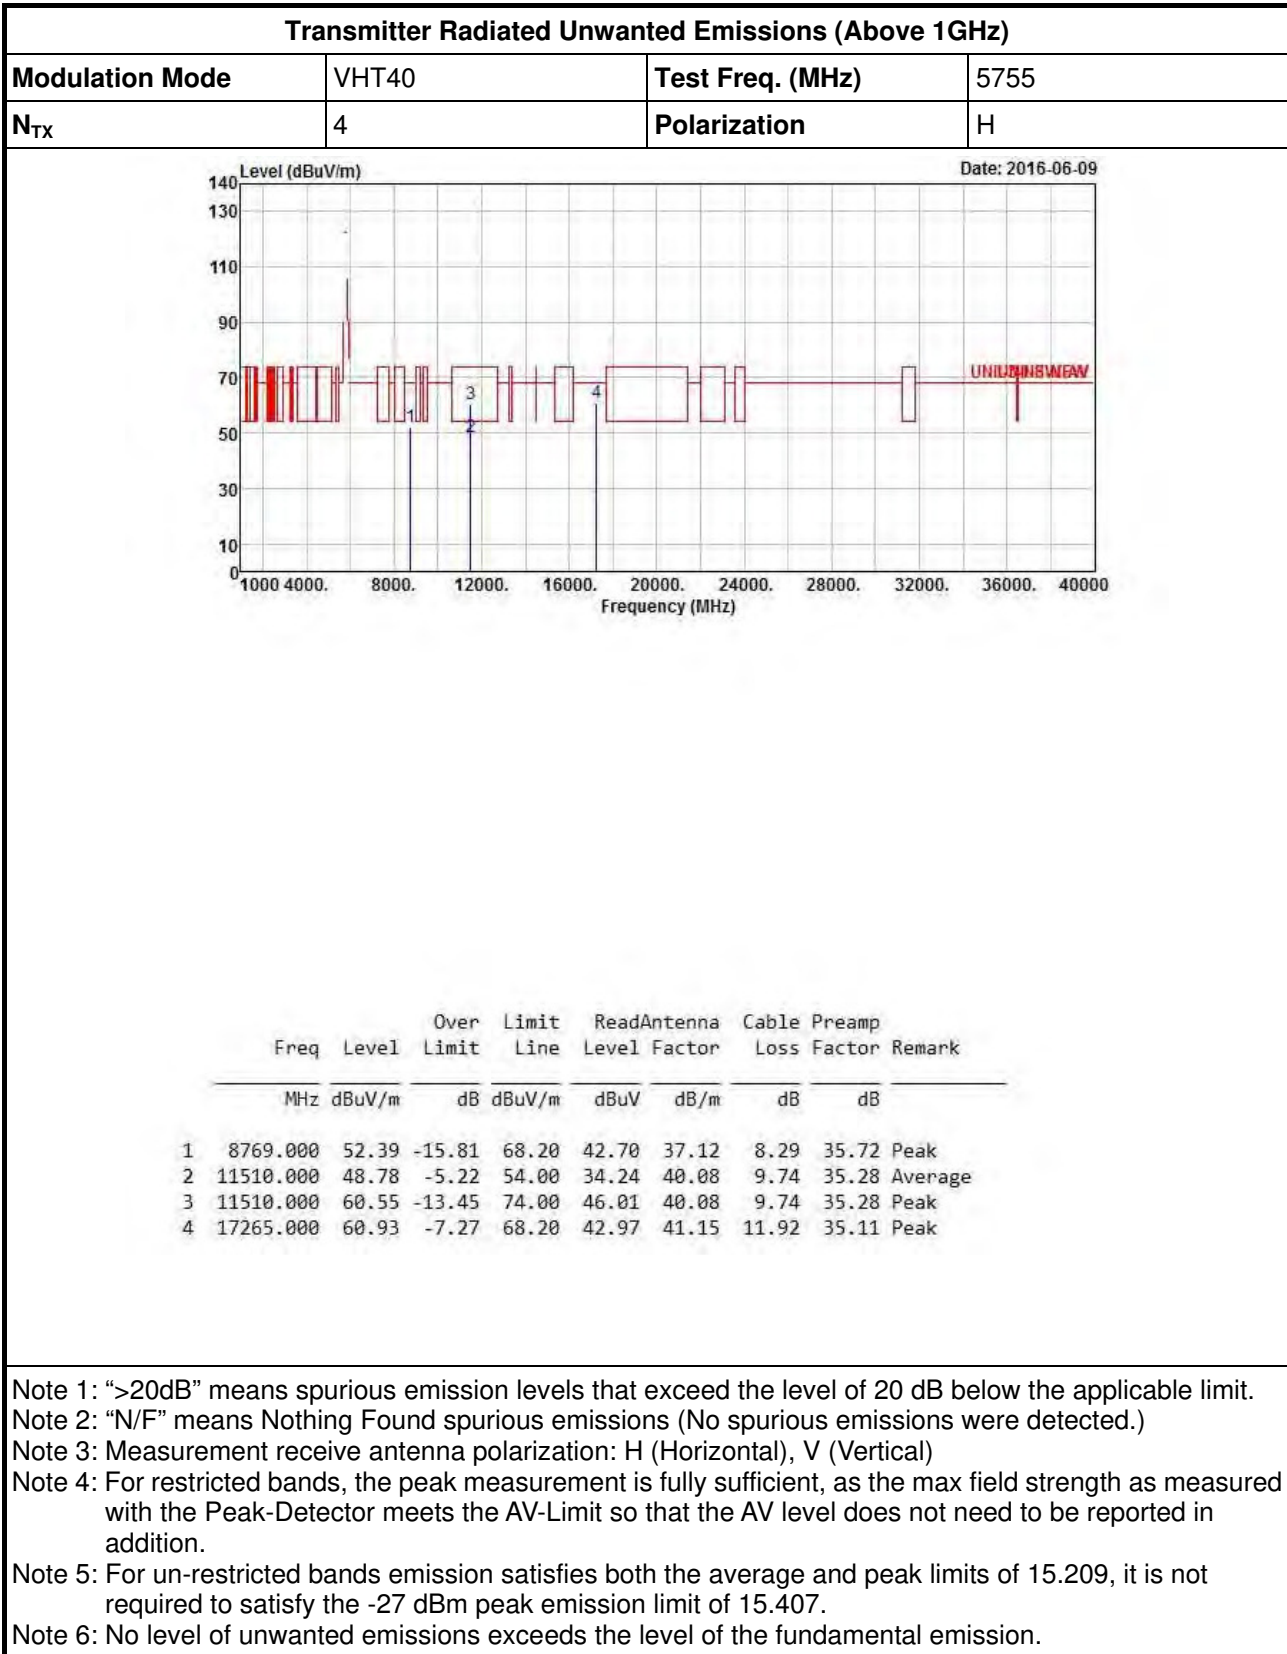

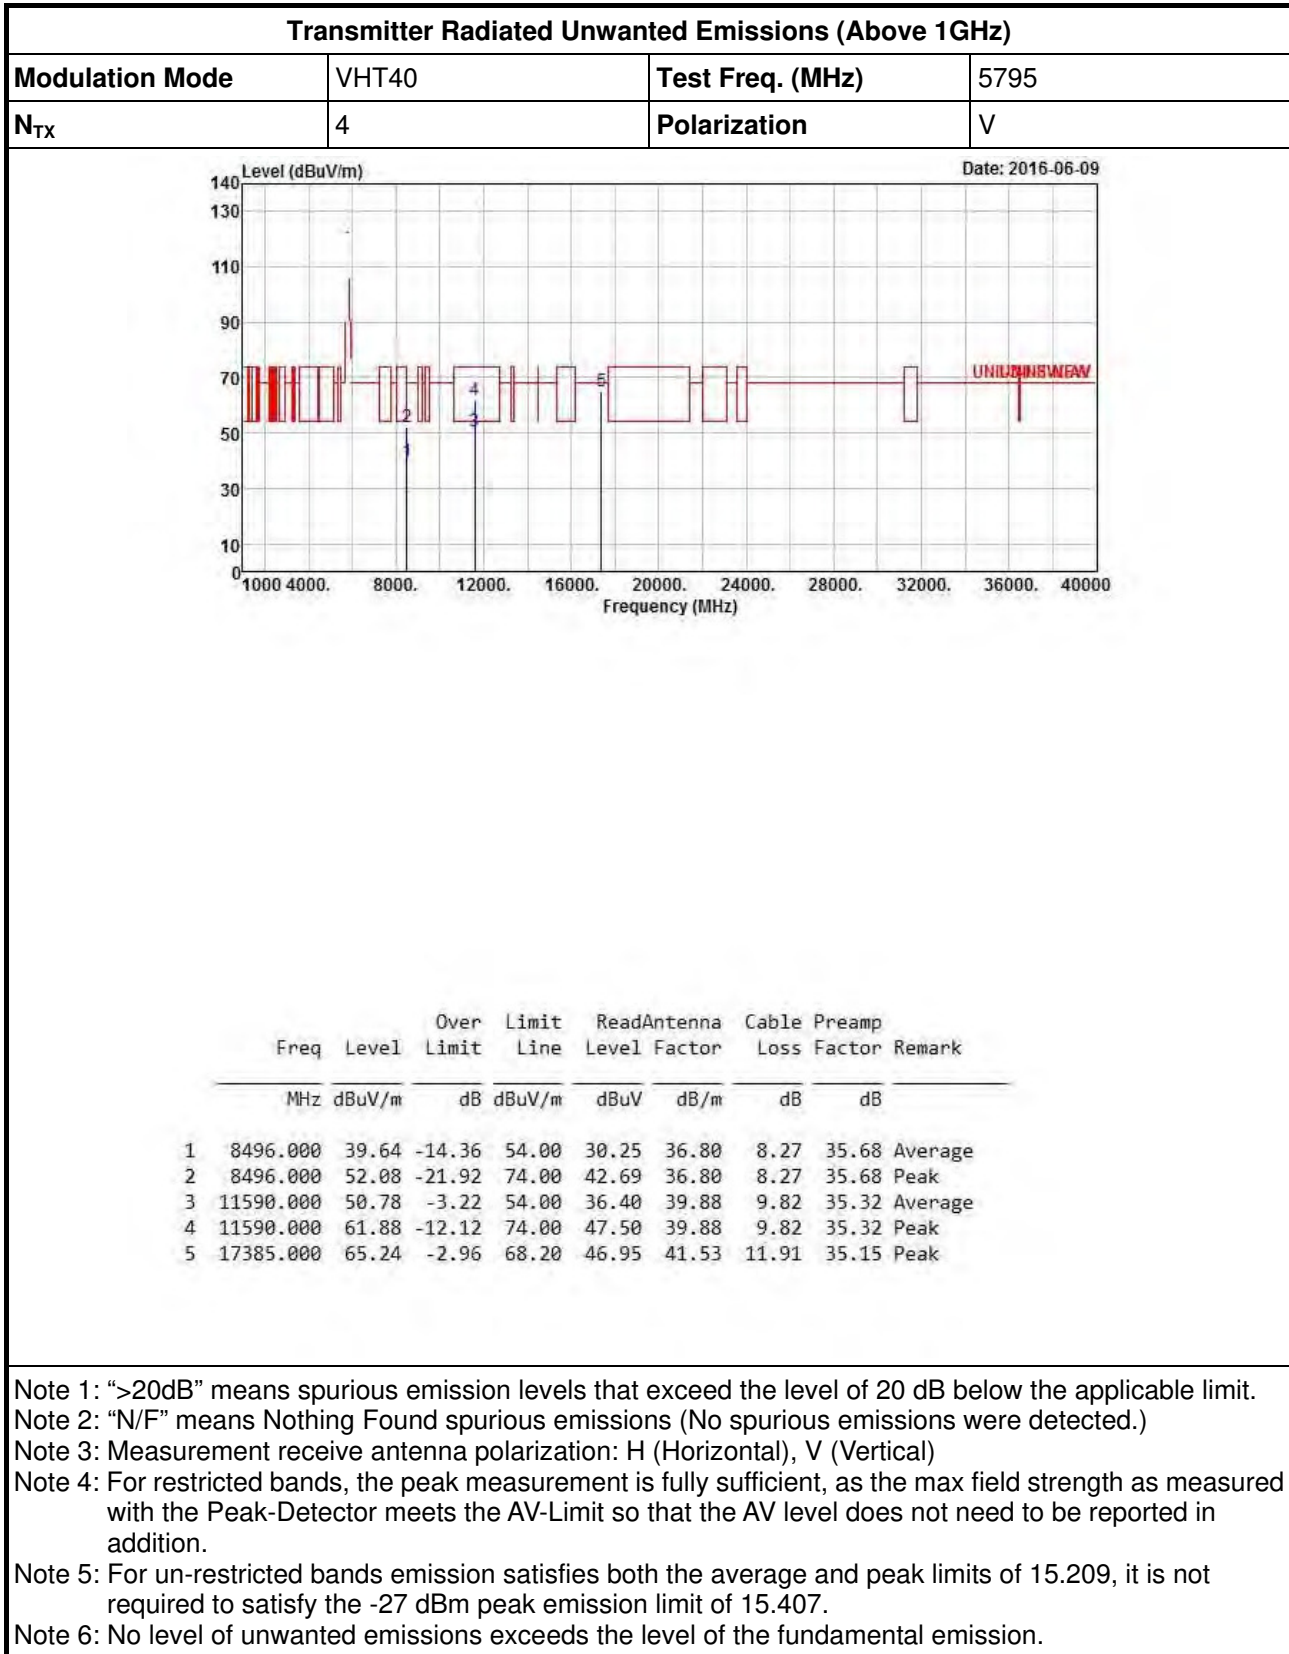


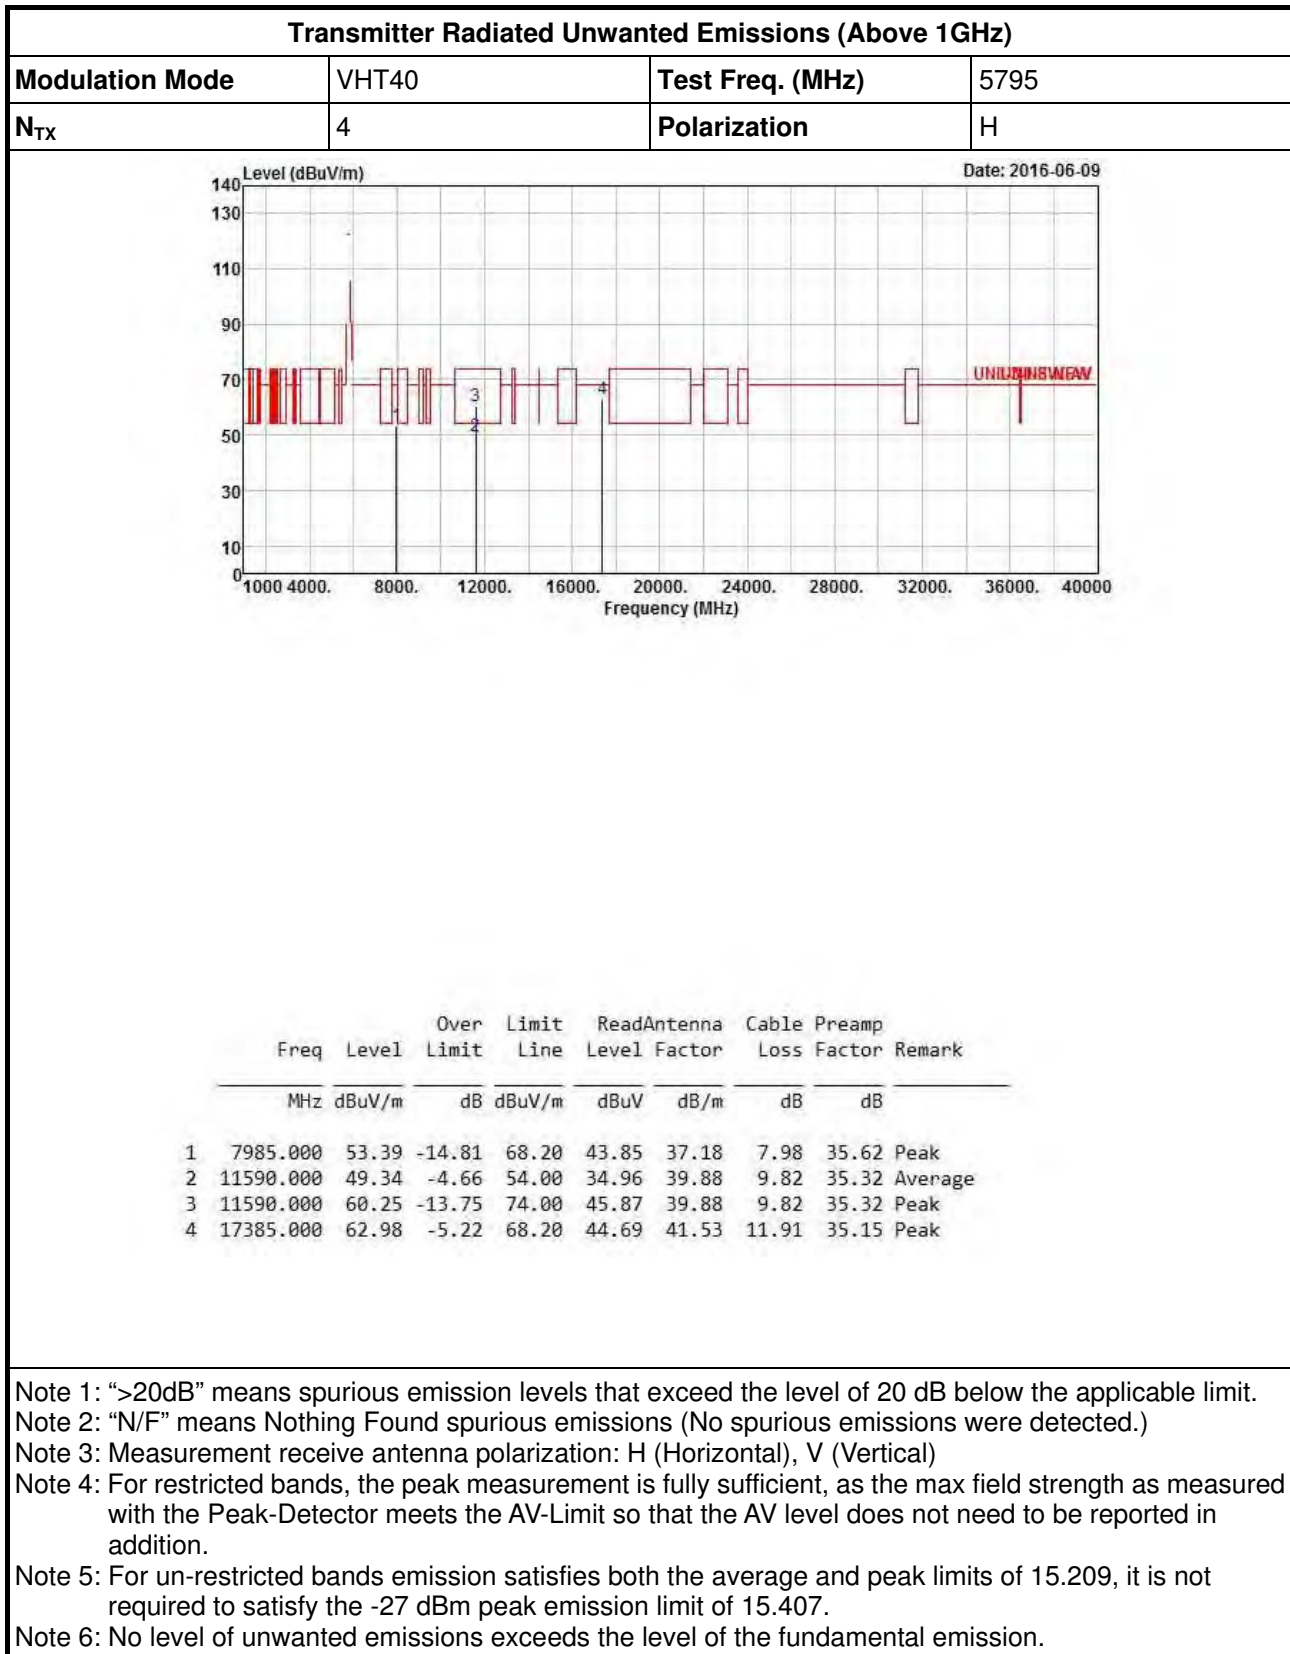




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	VHT80	Test Freq. (MHz)	5775
N _{TX}	4	Polarization	V

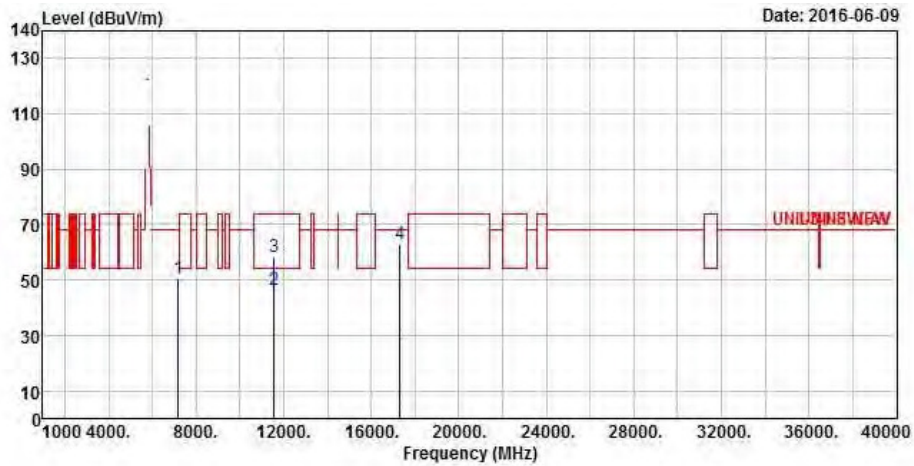

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7196.000	50.64	-17.56	68.20	42.68	35.81	7.56	35.41	Peak
2	11550.000	46.57	-7.43	54.00	32.10	39.98	9.79	35.30	Average
3	11550.000	58.57	-15.43	74.00	44.10	39.98	9.79	35.30	Peak
4	17325.000	62.93	-5.27	68.20	44.80	41.34	11.92	35.13	Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

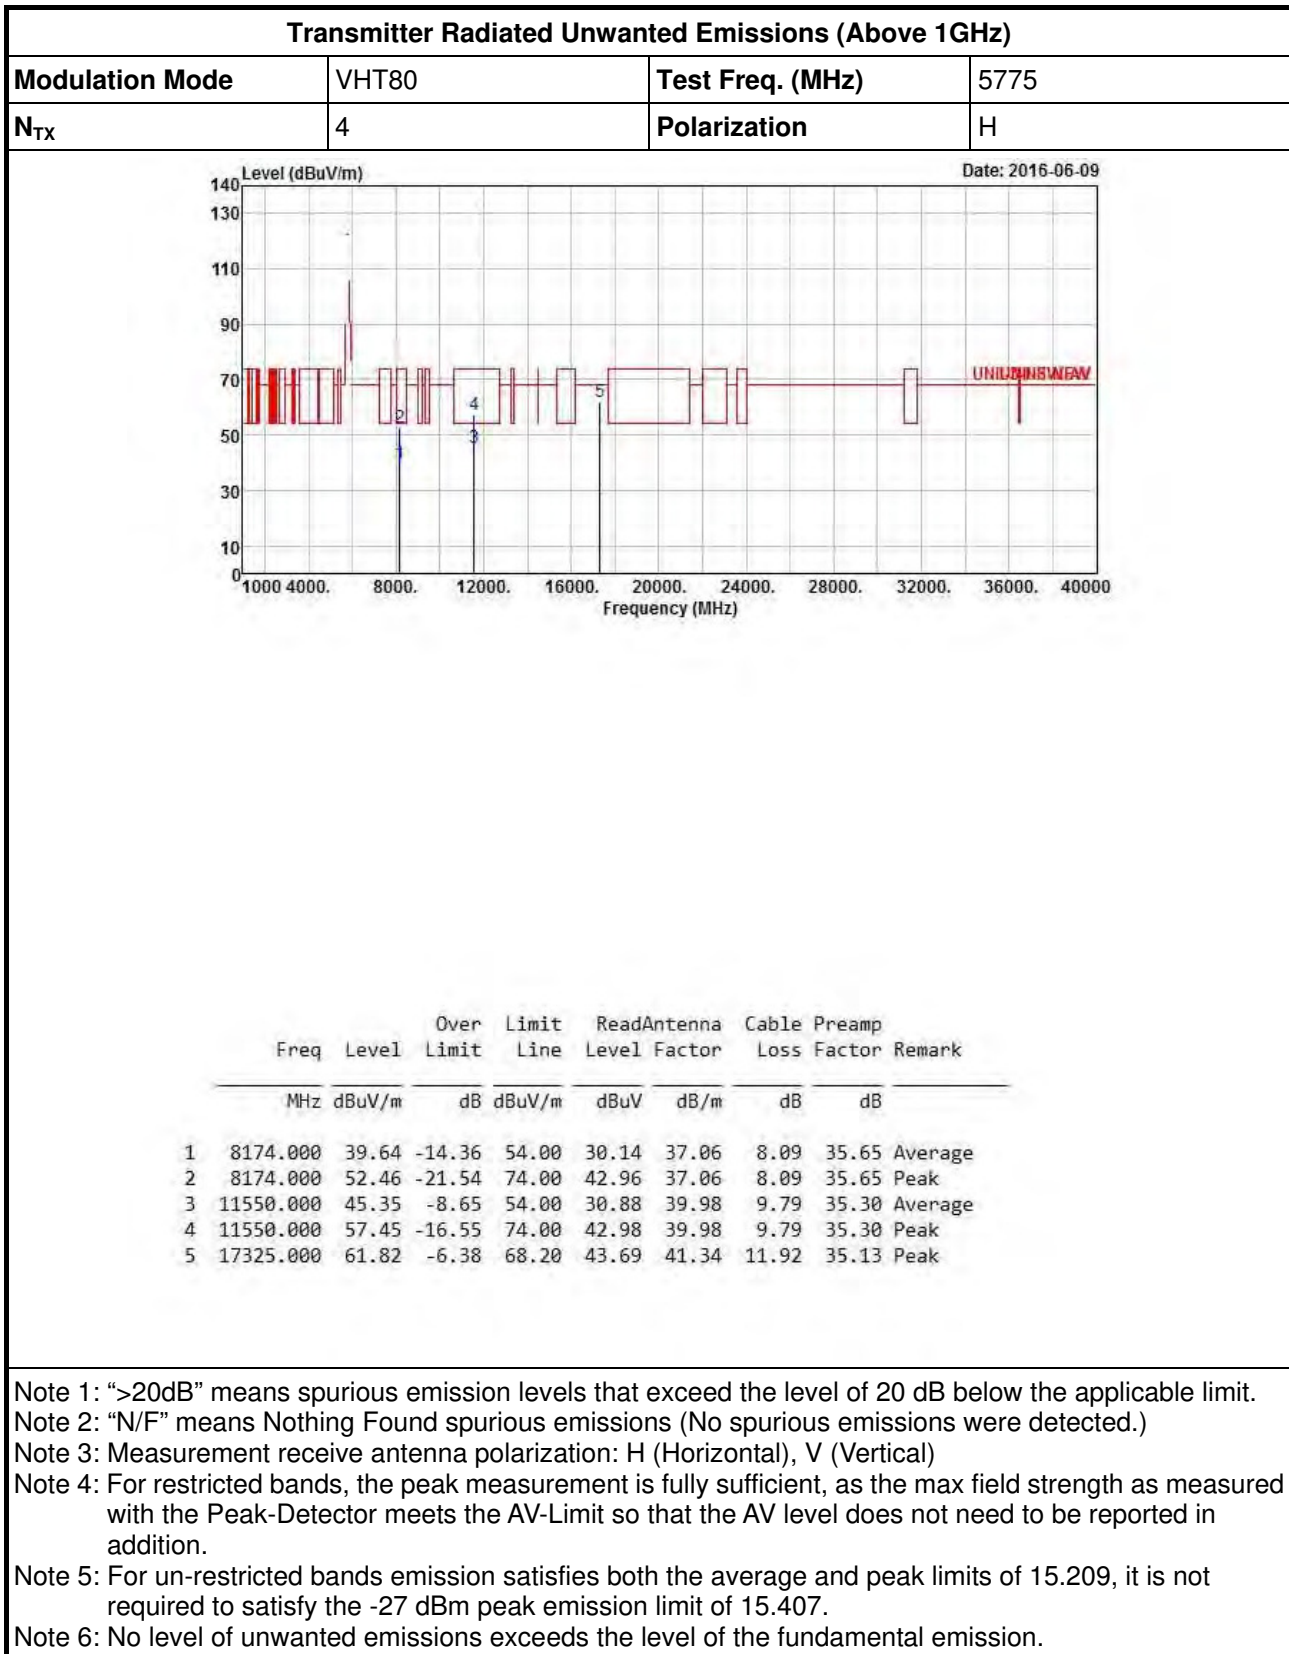

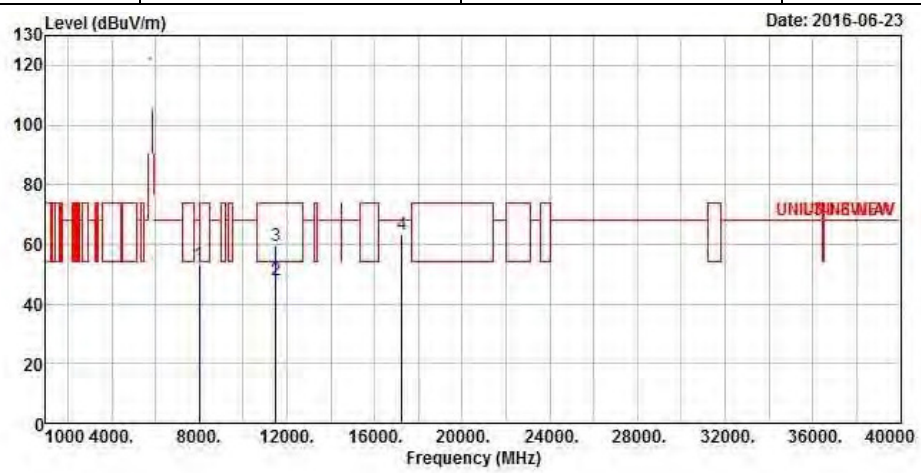Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																									
Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5745																																																						
N _{TX}	4	Polarization	V																																																						
<div style="display: flex; justify-content: space-between;"> <div>  </div> <div style="text-align: right;">Date: 2016-06-23</div> </div>																																																									
<table border="1" style="width: 100%; border-collapse: collapse; margin-top: 20px;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>8001.000</td> <td>53.20</td> <td>-15.00</td> <td>68.20</td> <td>43.63</td> <td>37.20</td> <td>8.00</td> <td>35.63 Peak</td> </tr> <tr> <td>2</td> <td>11490.000</td> <td>47.82</td> <td>-6.18</td> <td>54.00</td> <td>33.26</td> <td>40.10</td> <td>9.74</td> <td>35.28 Average</td> </tr> <tr> <td>3</td> <td>11490.000</td> <td>59.30</td> <td>-14.70</td> <td>74.00</td> <td>44.74</td> <td>40.10</td> <td>9.74</td> <td>35.28 Peak</td> </tr> <tr> <td>4</td> <td>17235.000</td> <td>63.24</td> <td>-4.96</td> <td>68.20</td> <td>45.35</td> <td>41.05</td> <td>11.93</td> <td>35.09 Peak</td> </tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	8001.000	53.20	-15.00	68.20	43.63	37.20	8.00	35.63 Peak	2	11490.000	47.82	-6.18	54.00	33.26	40.10	9.74	35.28 Average	3	11490.000	59.30	-14.70	74.00	44.74	40.10	9.74	35.28 Peak	4	17235.000	63.24	-4.96	68.20	45.35	41.05	11.93	35.09 Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark																																																	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																	
1	8001.000	53.20	-15.00	68.20	43.63	37.20	8.00	35.63 Peak																																																	
2	11490.000	47.82	-6.18	54.00	33.26	40.10	9.74	35.28 Average																																																	
3	11490.000	59.30	-14.70	74.00	44.74	40.10	9.74	35.28 Peak																																																	
4	17235.000	63.24	-4.96	68.20	45.35	41.05	11.93	35.09 Peak																																																	
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407. Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</p>																																																									

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5745
N_{TX}	4	Polarization	H

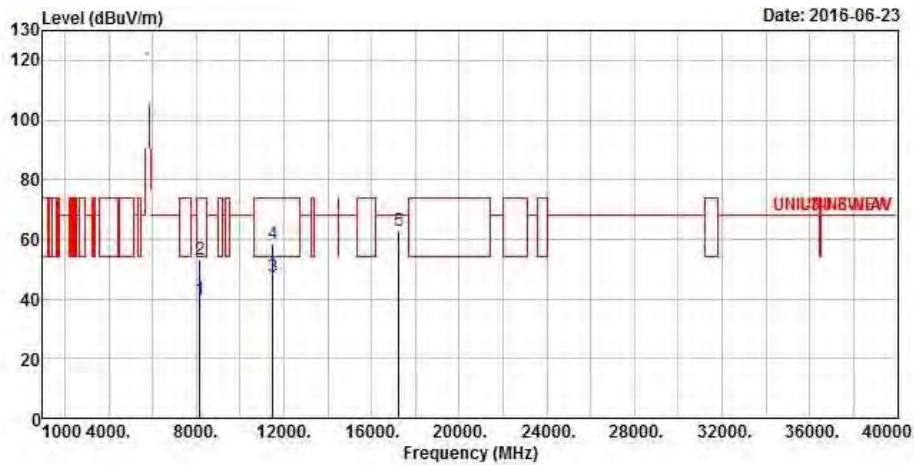


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8174.000	39.75	-14.25	54.00	30.25	37.06	8.09	35.65	Average
2	8174.000	53.19	-20.81	74.00	43.69	37.06	8.09	35.65	Peak
3	11490.000	47.52	-6.48	54.00	32.96	40.10	9.74	35.28	Average
4	11490.000	58.41	-15.59	74.00	43.85	40.10	9.74	35.28	Peak
5	17235.000	62.73	-5.47	68.20	44.84	41.05	11.93	35.09	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5785
N_{TX}	4	Polarization	V

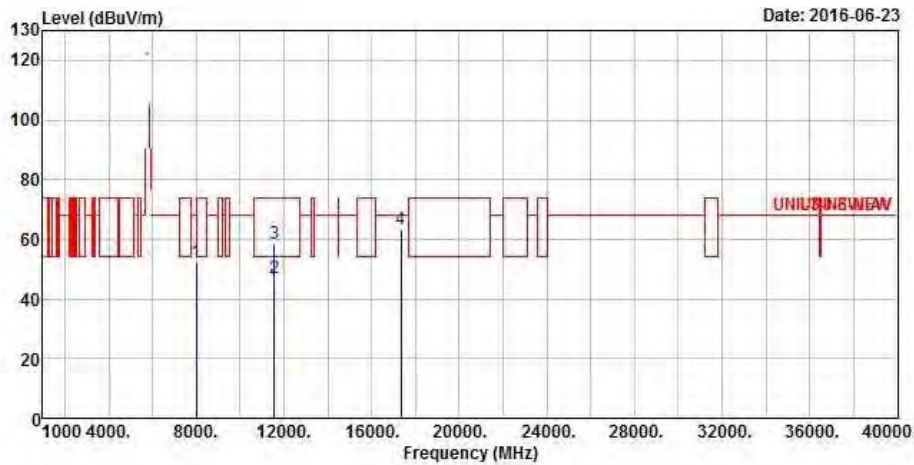


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8003.000	52.26	-15.94	68.20	42.69	37.20	8.00	35.63 Peak
2	11570.000	47.19	-6.81	54.00	32.78	39.93	9.79	35.31 Average
3	11570.000	58.50	-15.50	74.00	44.09	39.93	9.79	35.31 Peak
4	17355.000	63.47	-4.73	68.20	45.25	41.44	11.92	35.14 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	VHT20 (TxBF)	Test Freq. (MHz)	5785
N _{TX}	4	Polarization	H

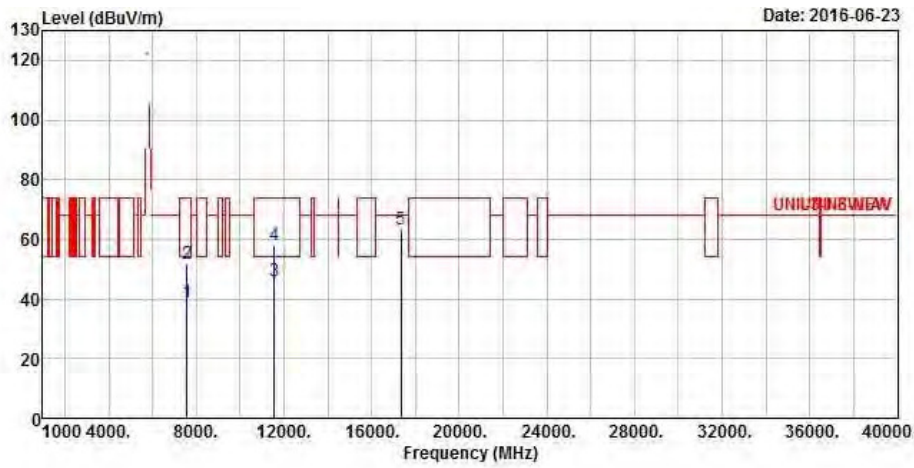

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7585.000	39.09	-14.91	54.00	30.14	36.70	7.72	35.47	Average
2	7585.000	51.64	-22.36	74.00	42.69	36.70	7.72	35.47	Peak
3	11570.000	46.15	-7.85	54.00	31.74	39.93	9.79	35.31	Average
4	11570.000	58.10	-15.90	74.00	43.69	39.93	9.79	35.31	Peak
5	17355.000	63.17	-5.03	68.20	44.95	41.44	11.92	35.14	Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

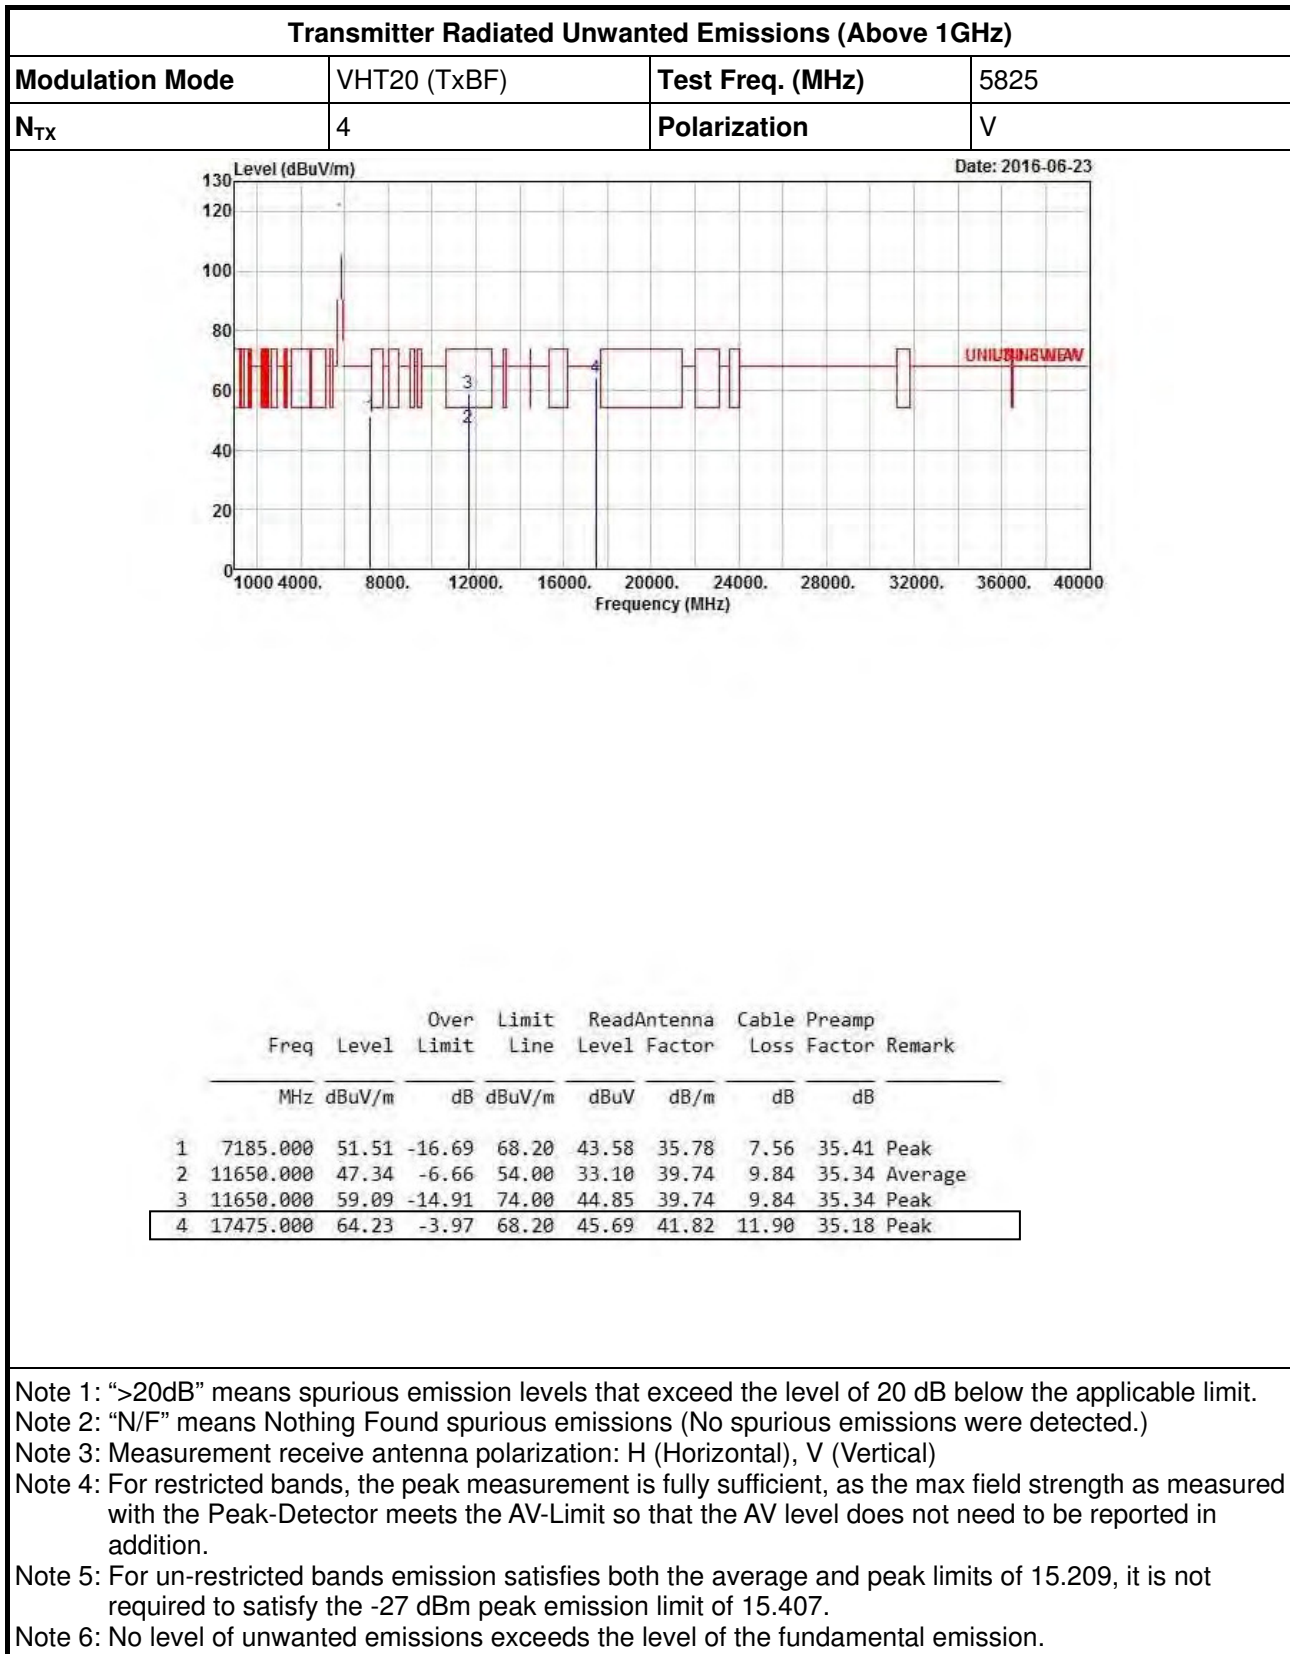

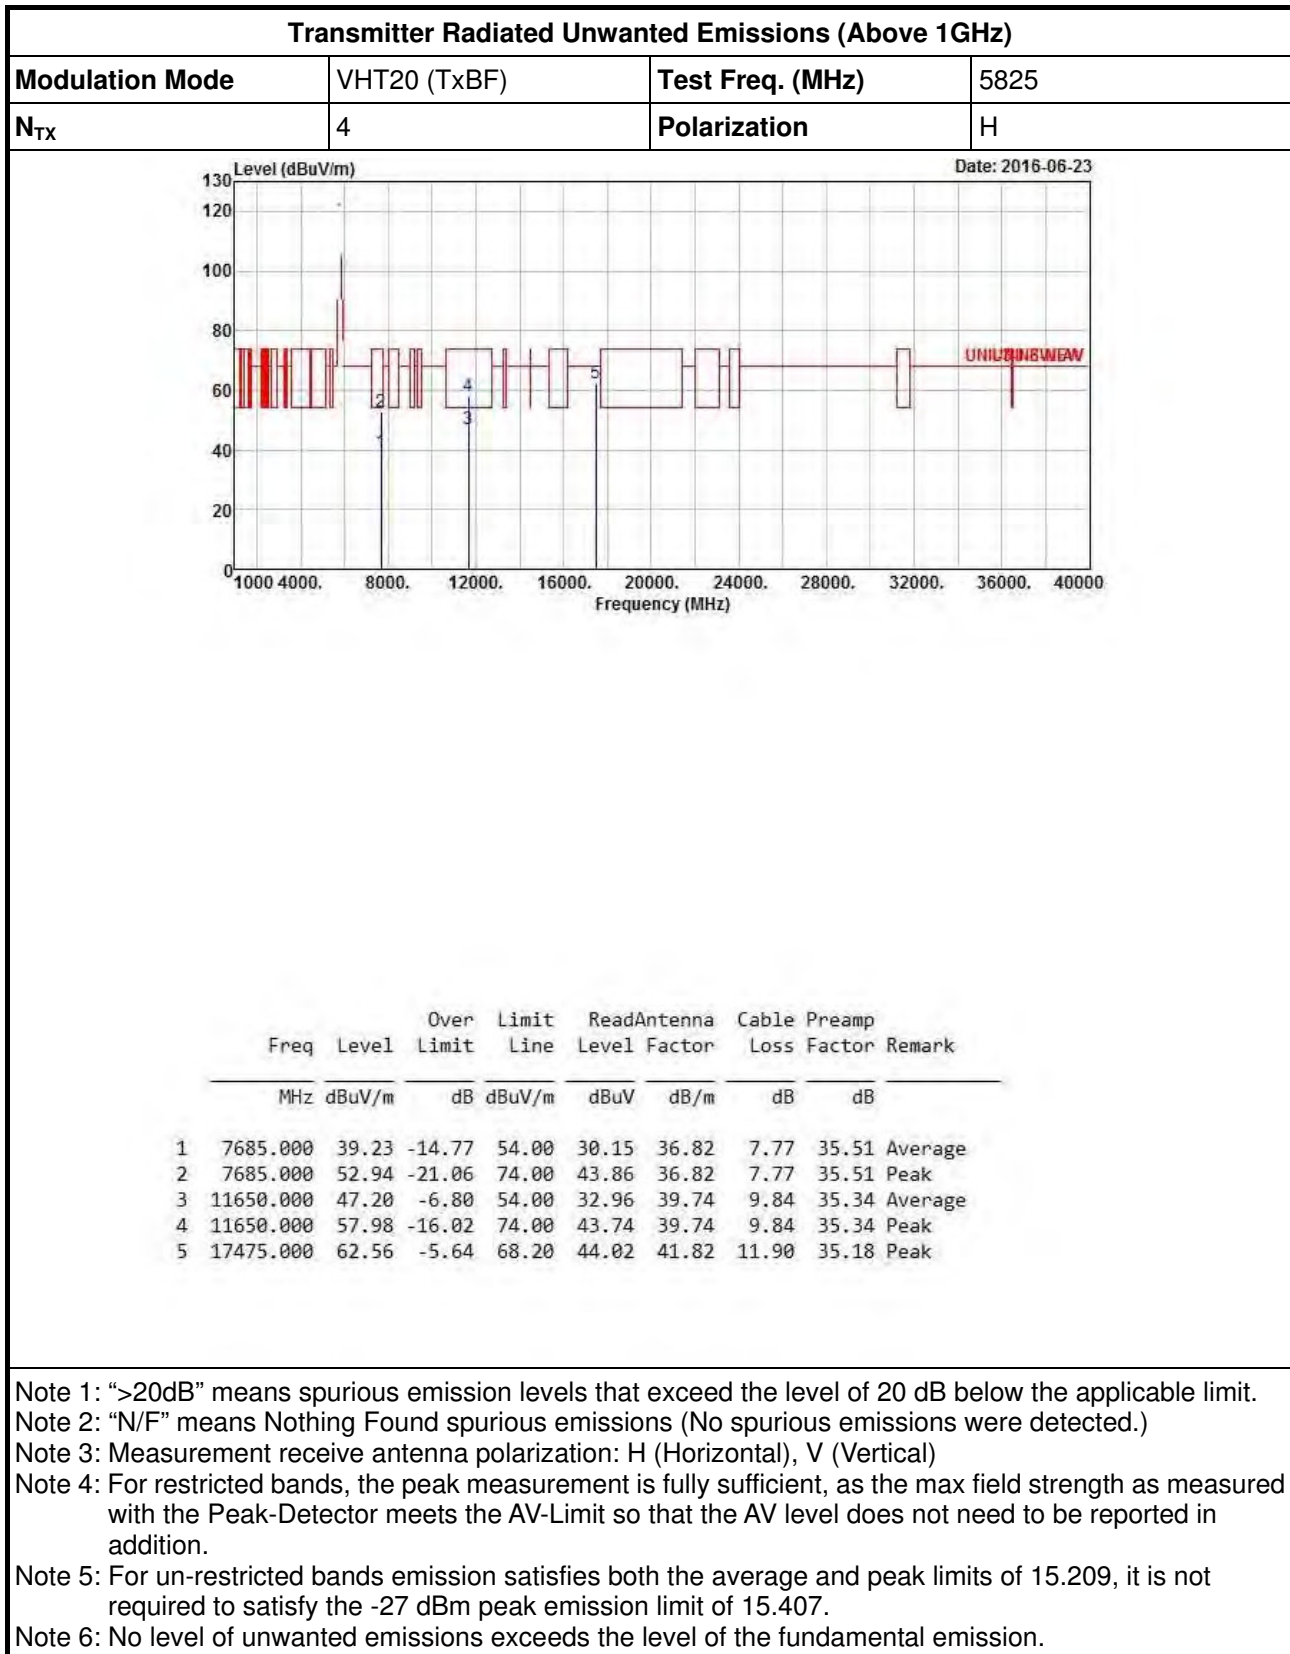

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40 (TxBF)	Test Freq. (MHz)	5755
N_{TX}	4	Polarization	V

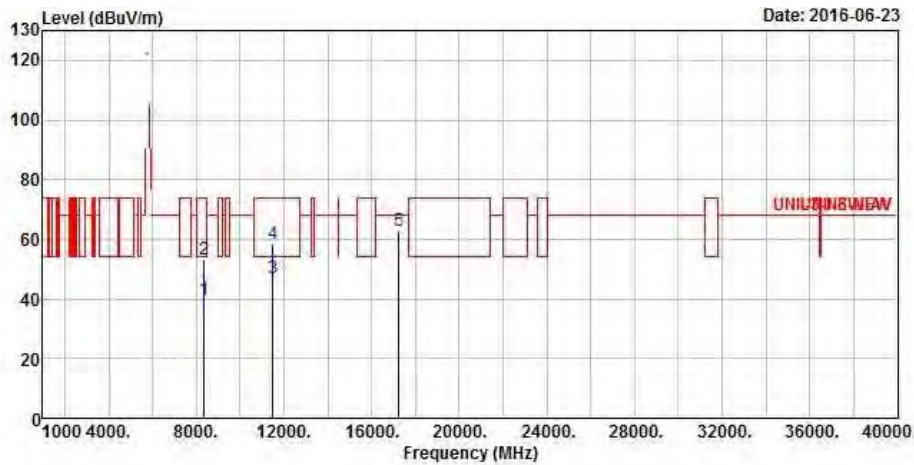


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	8374.000	39.58	-14.42	54.00	30.15	36.90	8.20	Average
2	8374.000	53.29	-20.71	74.00	43.86	36.90	8.20	Peak
3	11510.000	47.00	-7.00	54.00	32.46	40.08	9.74	Average
4	11510.000	58.54	-15.46	74.00	44.00	40.08	9.74	Peak
5	17265.000	62.85	-5.35	68.20	44.89	41.15	11.92	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40 (TxBF)	Test Freq. (MHz)	5755
N _{TX}	4	Polarization	H

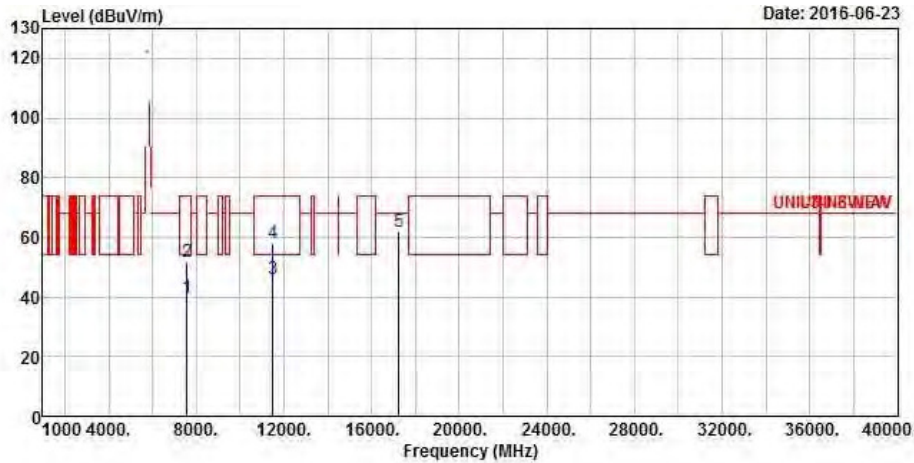


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7584.000	39.64	-14.36	54.00	30.69	36.70	7.72	35.47 Average
2	7584.000	51.64	-22.36	74.00	42.69	36.70	7.72	35.47 Peak
3	11510.000	46.11	-7.89	54.00	31.57	40.08	9.74	35.28 Average
4	11510.000	58.27	-15.73	74.00	43.73	40.08	9.74	35.28 Peak
5	17265.000	61.82	-6.38	68.20	43.86	41.15	11.92	35.11 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40 (TxBF)	Test Freq. (MHz)	5795
N_{TX}	4	Polarization	V

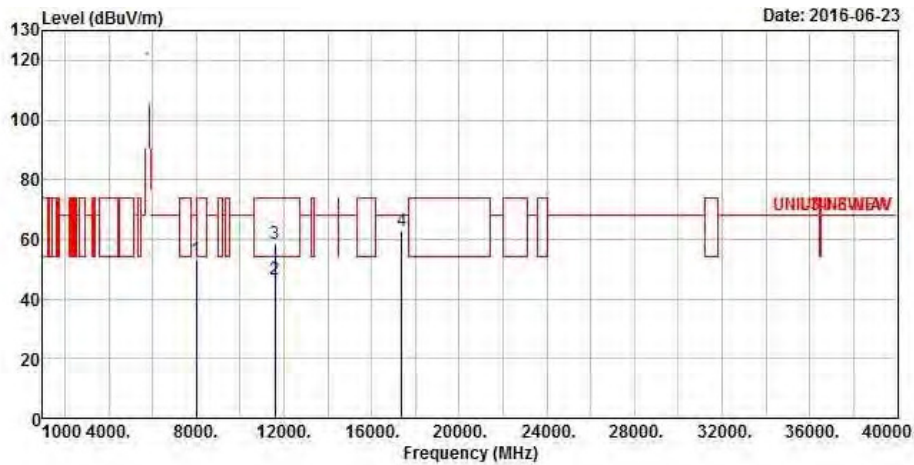


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8003.000	53.19	-15.01	68.20	43.62	37.20	8.00	35.63 Peak
2	11590.000	46.52	-7.48	54.00	32.14	39.88	9.82	35.32 Average
3	11590.000	58.74	-15.26	74.00	44.36	39.88	9.82	35.32 Peak
4	17385.000	62.65	-5.55	68.20	44.36	41.53	11.91	35.15 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40 (TxBF)	Test Freq. (MHz)	5795
N_{TX}	4	Polarization	H

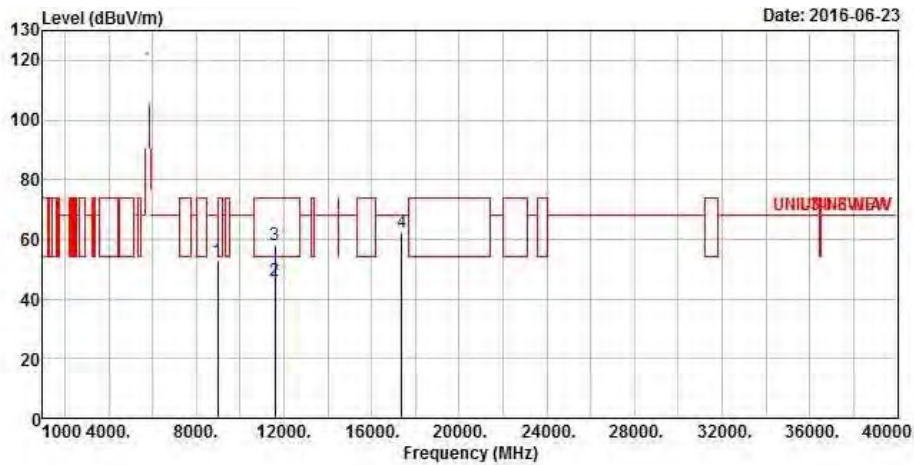


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8974.000	52.62	-15.58	68.20	42.69	37.37	8.31	35.75 Peak
2	11590.000	45.90	-8.10	54.00	31.52	39.88	9.82	35.32 Average
3	11590.000	58.07	-15.93	74.00	43.69	39.88	9.82	35.32 Peak
4	17385.000	62.25	-5.95	68.20	43.96	41.53	11.91	35.15 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80 (TxBF)	Test Freq. (MHz)	5775
N_{TX}	4	Polarization	V

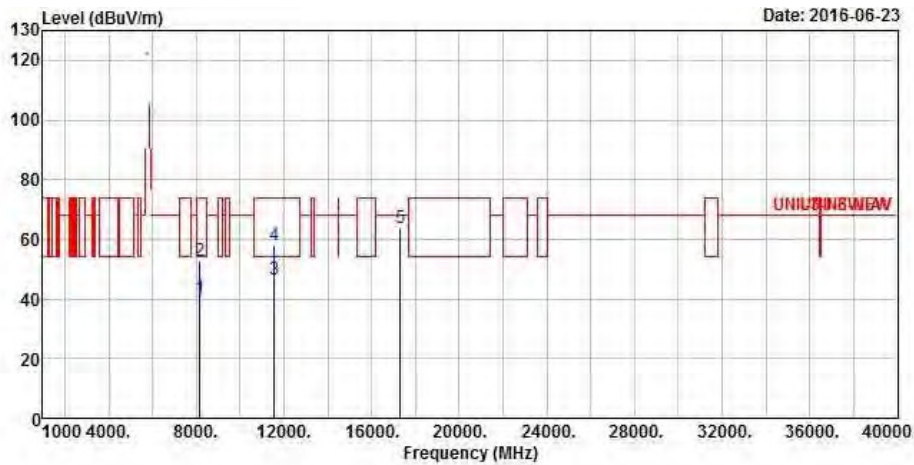


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	
1	8174.000	40.19	-13.81	54.00	30.69	37.06	8.09	35.65 Average
2	8174.000	52.75	-21.25	74.00	43.25	37.06	8.09	35.65 Peak
3	11550.000	46.57	-7.43	54.00	32.10	39.98	9.79	35.30 Average
4	11550.000	58.05	-15.95	74.00	43.58	39.98	9.79	35.30 Peak
5	17325.000	63.70	-4.50	68.20	45.57	41.34	11.92	35.13 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80 (TxBF)	Test Freq. (MHz)	5775
N_{TX}	4	Polarization	H

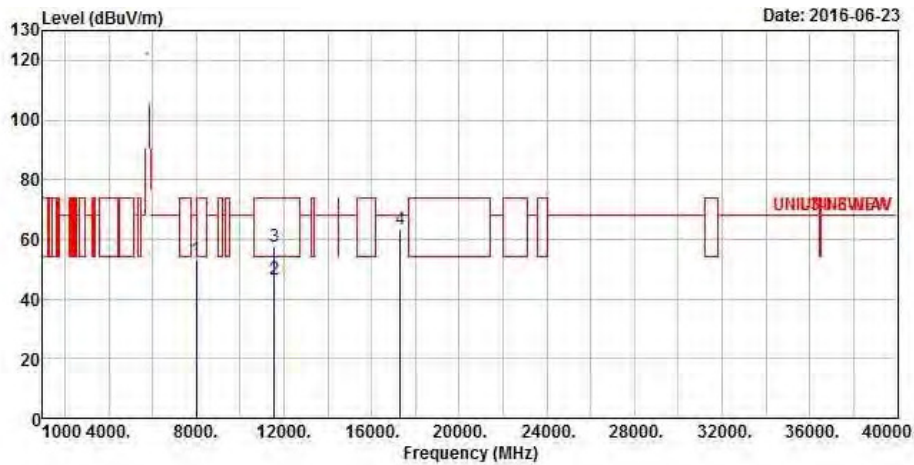


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8002.000	53.42	-14.78	68.20	43.85	37.20	8.00	35.63 Peak
2	11550.000	46.32	-7.68	54.00	31.85	39.98	9.79	35.30 Average
3	11550.000	57.43	-16.57	74.00	42.96	39.98	9.79	35.30 Peak
4	17325.000	63.09	-5.11	68.20	44.96	41.34	11.92	35.13 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.




Transmitter Radiated Unwanted Emissions (Above 1GHz)


Modulation Mode	VHT80+80	Test Freq. (MHz)	5210+5775
N _{TX}	4	Polarization	V

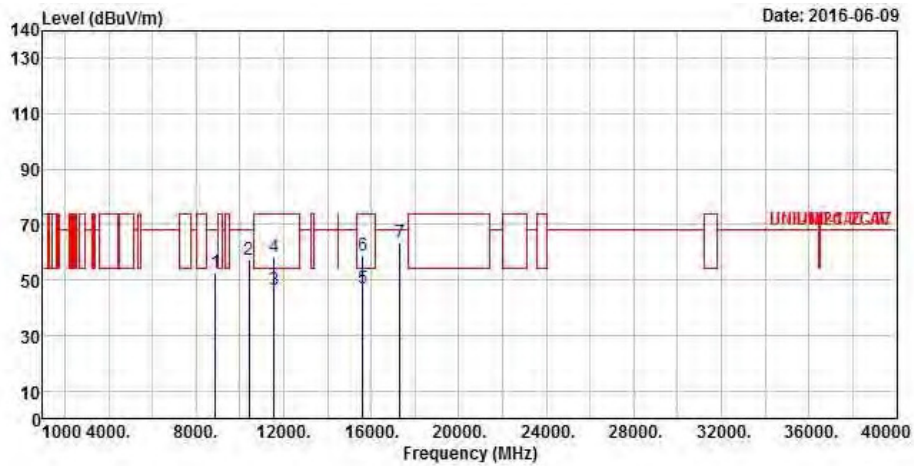


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8896.000	52.53	-15.67	68.20	42.69	37.28	8.30	35.74	Peak
2	10420.000	57.57	-10.63	68.20	44.10	39.57	9.46	35.56	Peak
3	11550.000	46.27	-7.73	54.00	31.80	39.98	9.79	35.30	Average
4	11550.000	58.27	-15.73	74.00	43.80	39.98	9.79	35.30	Peak
5	15630.000	46.90	-7.10	54.00	32.90	38.21	11.47	35.68	Average
6	15630.000	59.10	-14.90	74.00	45.10	38.21	11.47	35.68	Peak
7	17325.000	63.43	-4.77	68.20	45.30	41.34	11.92	35.13	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

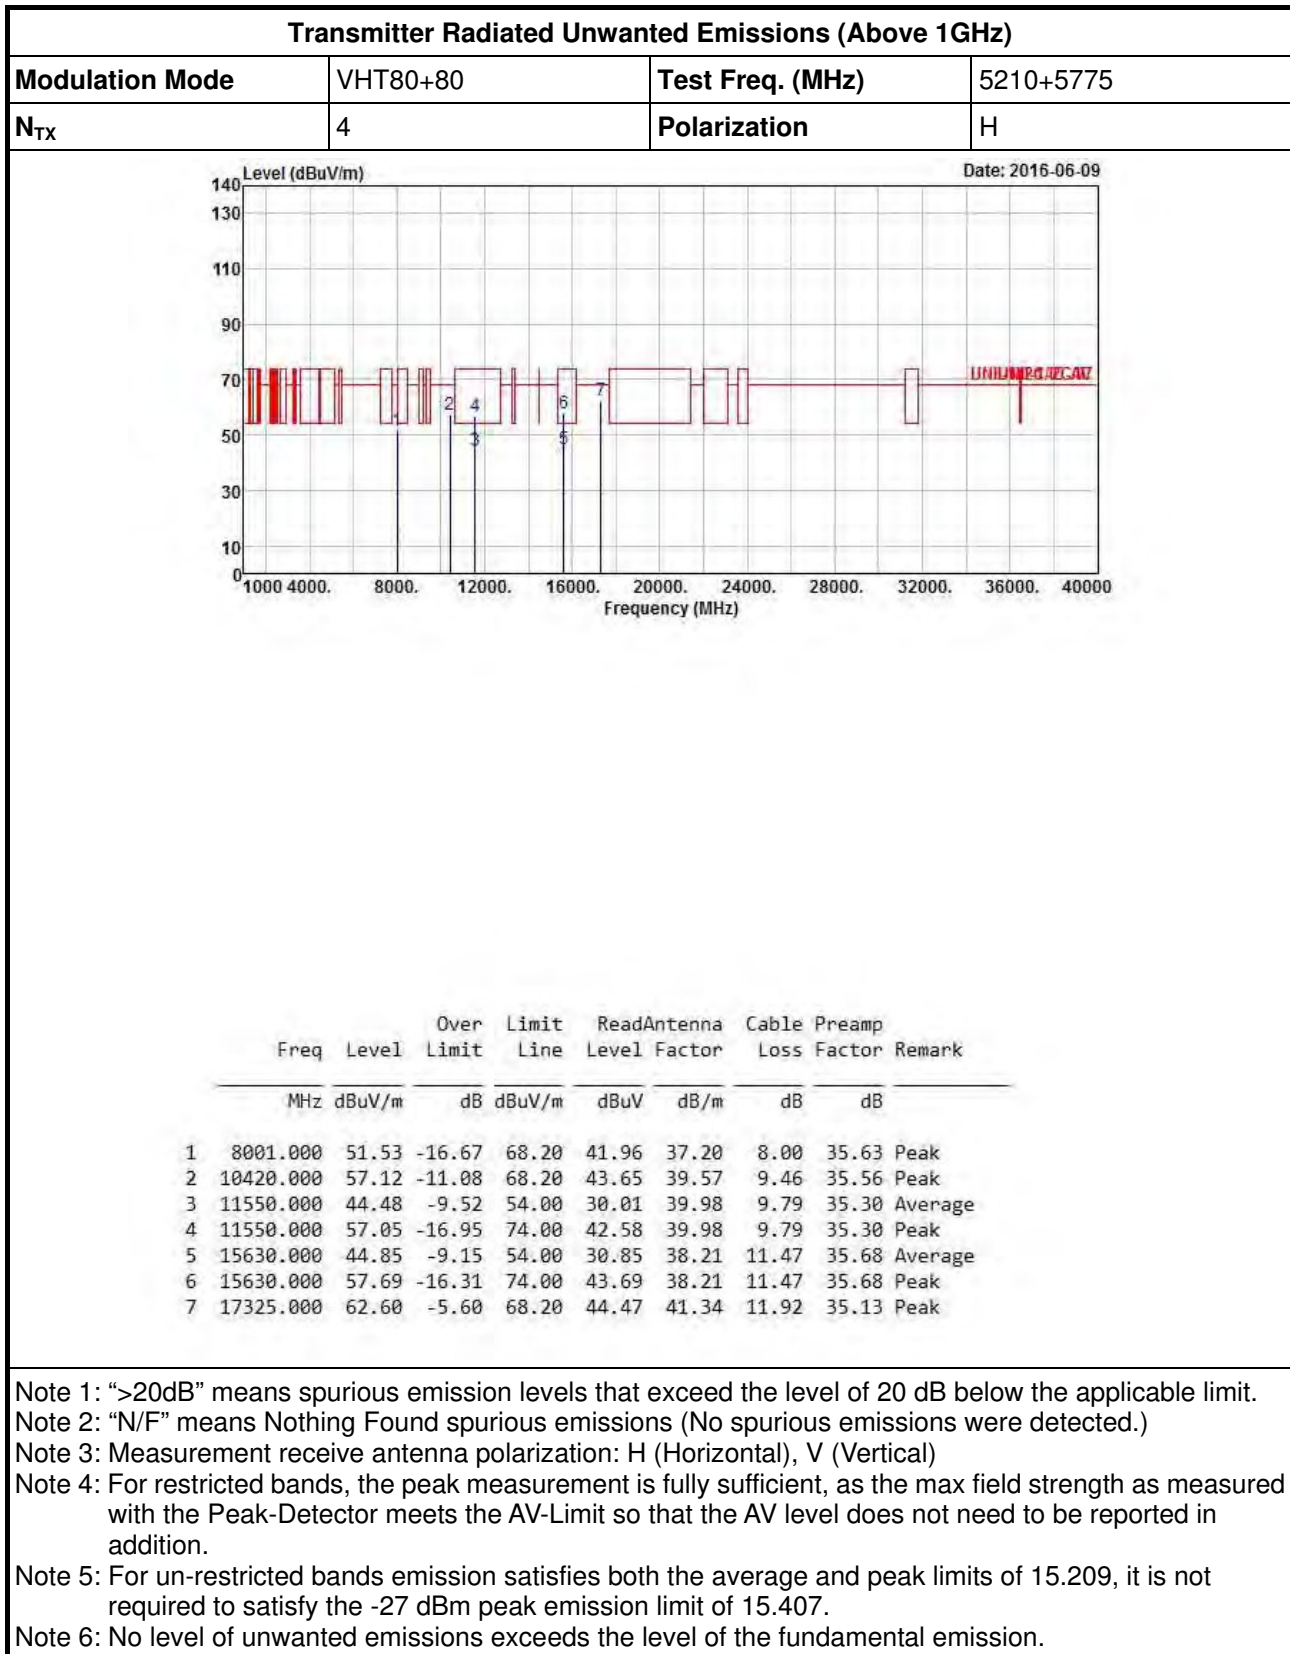

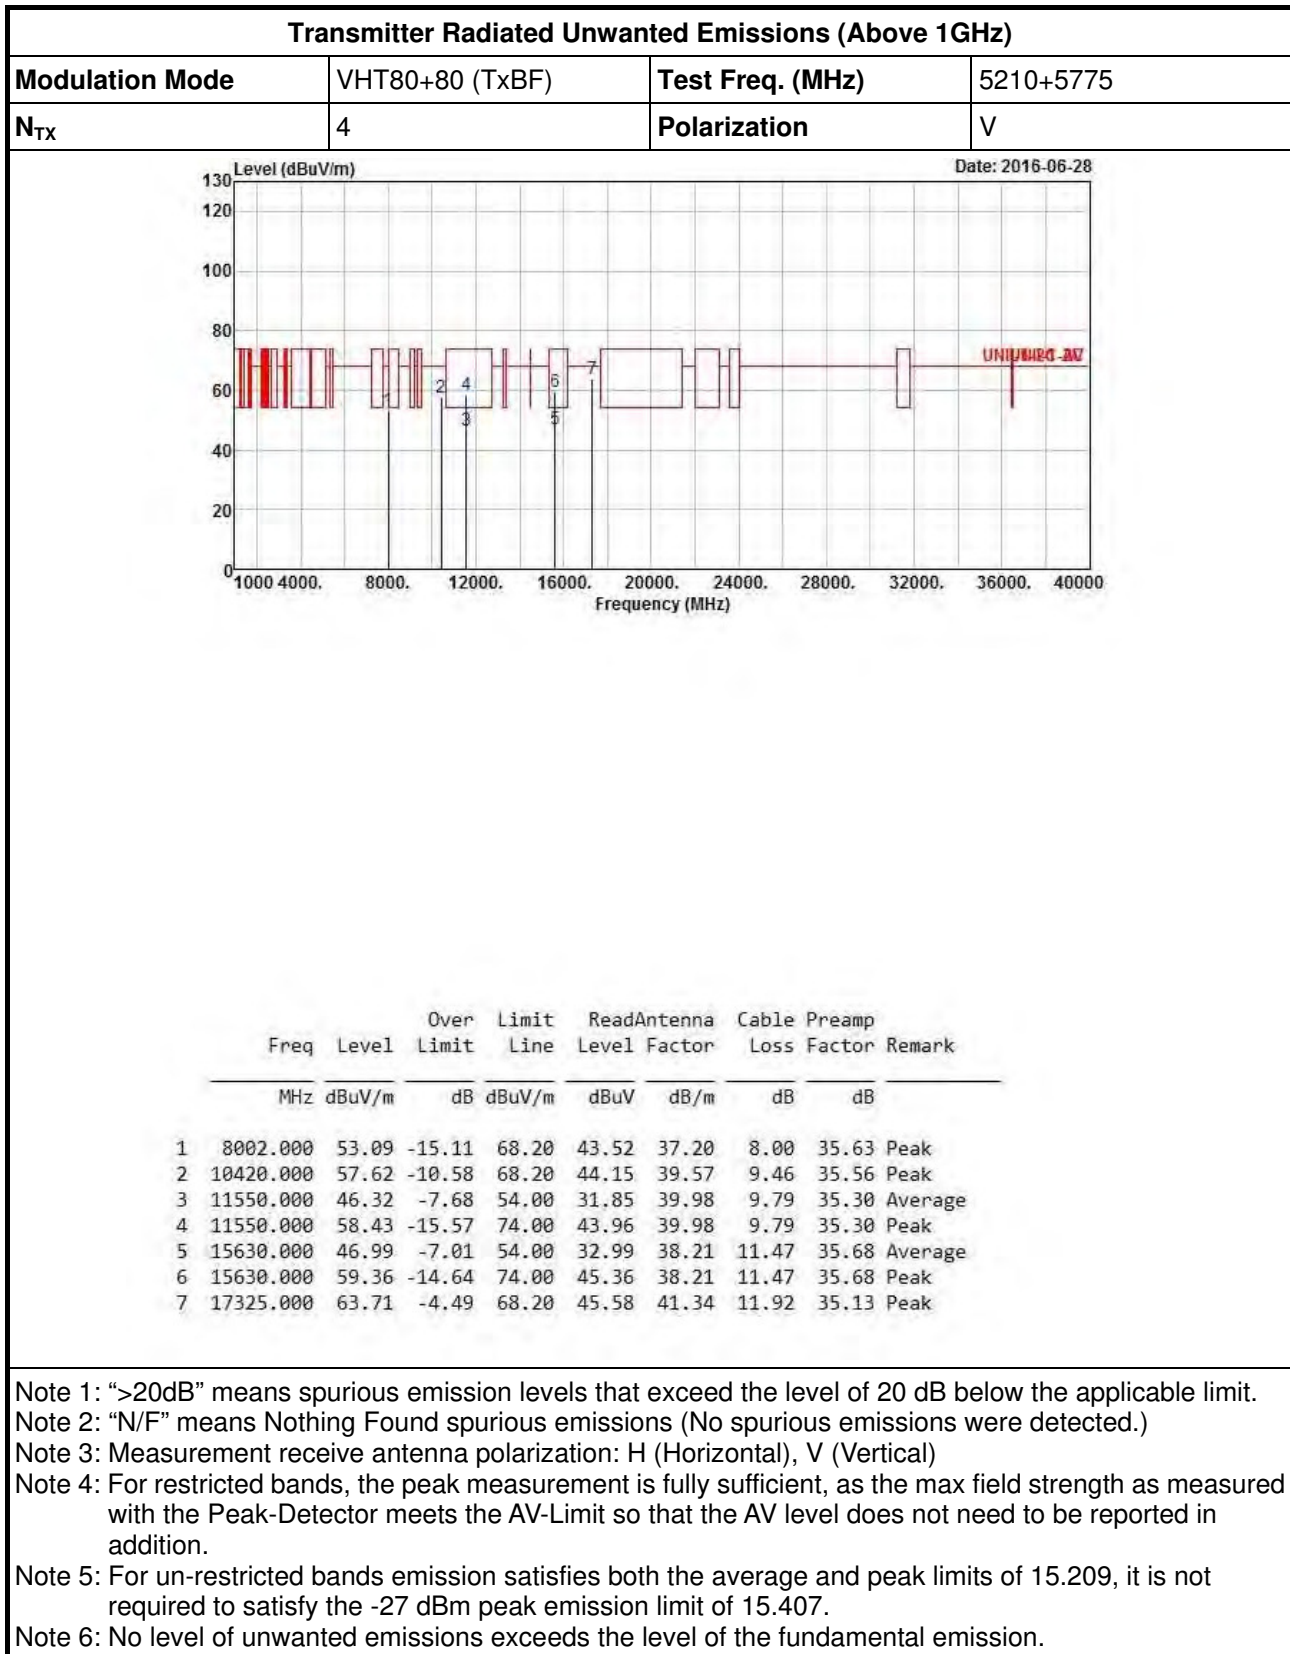

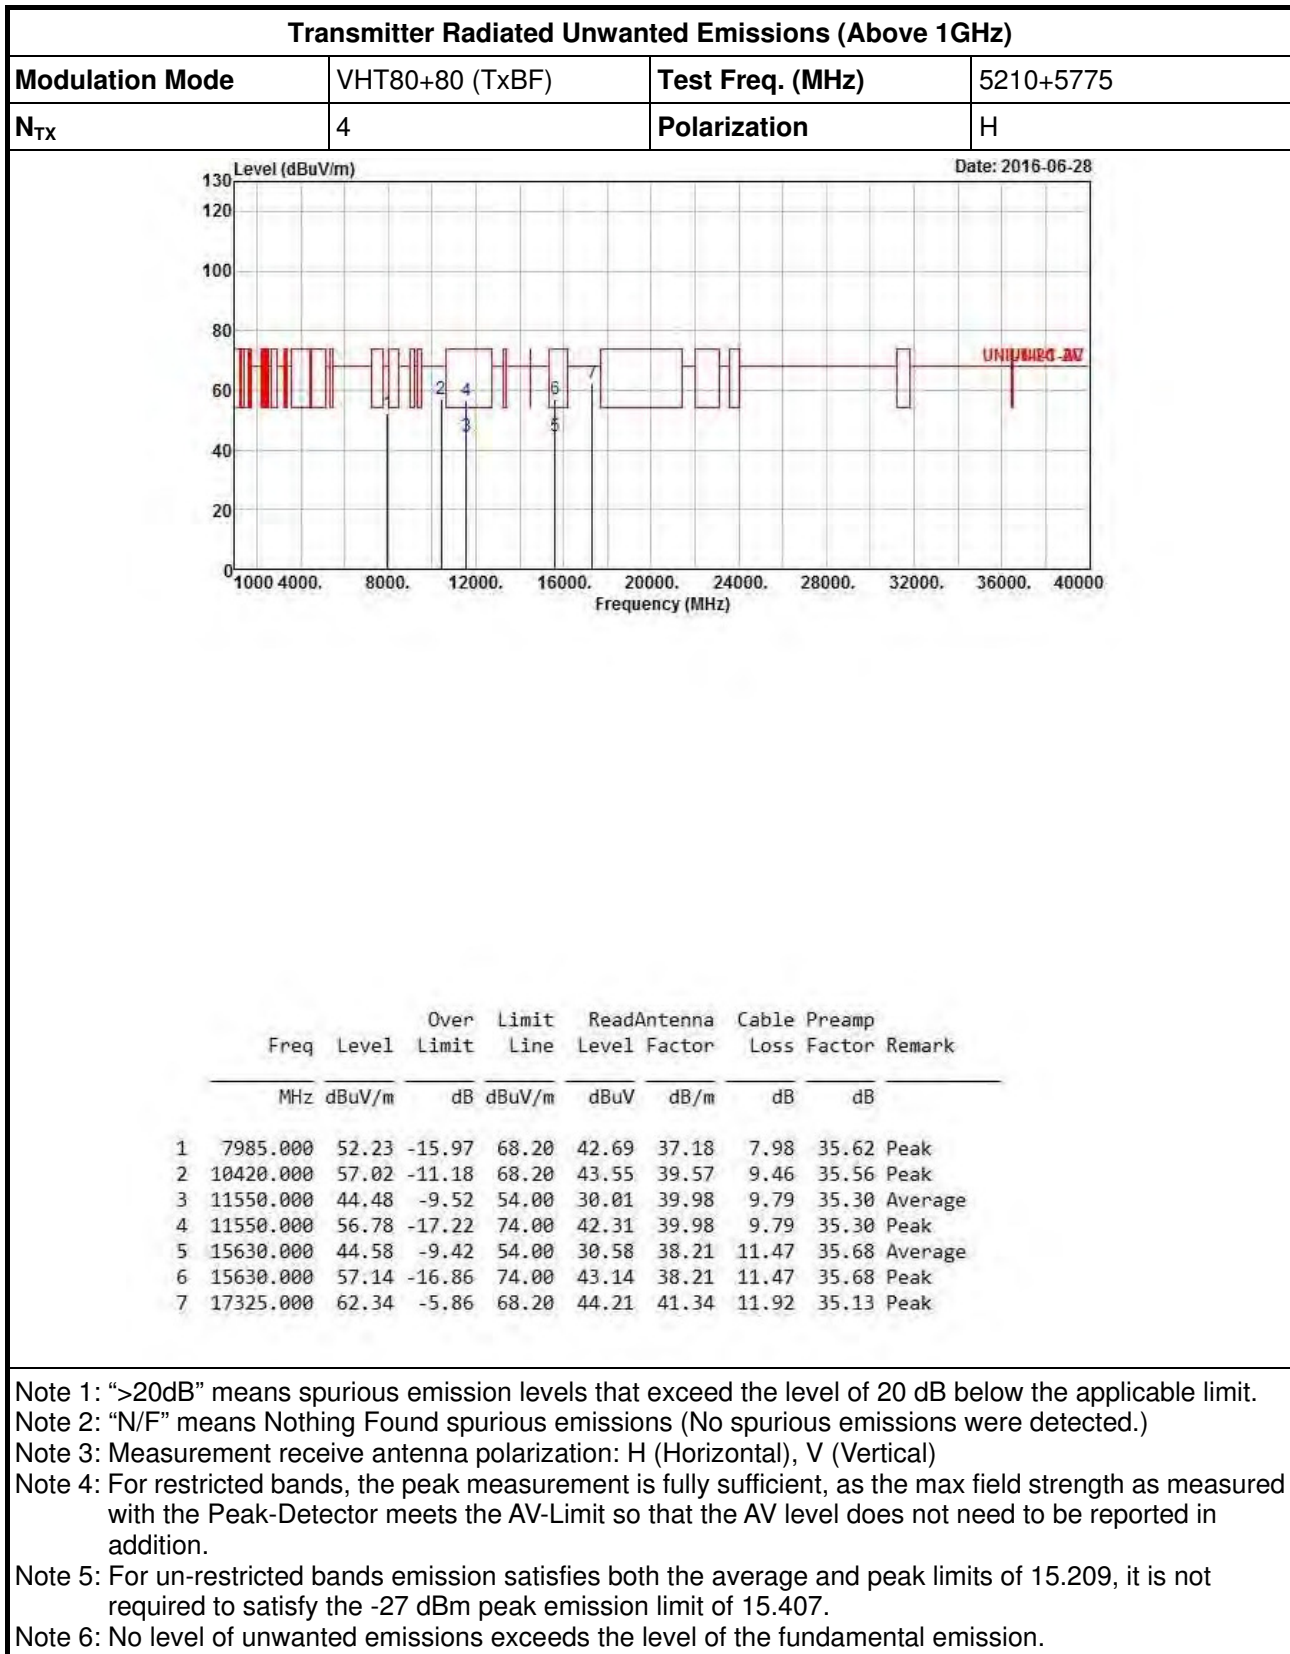



Summary

Mode	Result	Ch (Hz)	Center (Hz)	F1 (Hz)	Fh (Hz)	ppm	Limit (ppm)	Port	Remark
5.2G;11a;20;1;4;5200;M;T40,VN	Pass	5.2G	5.19994212G	NaN	NaN	11.131	20	1	5 min



Result

Mode	Result	Ch (Hz)	Center (Hz)	Fl (Hz)	Fh (Hz)	ppm	Limit (ppm)	Port	Remark
5.2G;11a;20;1;4;5200;M;TN,VN	Pass	5.2G	5.19998552G	NaN	NaN	2.784	20	1	0 min
5.2G;11a;20;1;4;5200;M;TN,VN	Pass	5.2G	5.19998548G	NaN	NaN	2.792	20	1	2 min
5.2G;11a;20;1;4;5200;M;TN,VN	Pass	5.2G	5.19998551G	NaN	NaN	2.787	20	1	5 min
5.2G;11a;20;1;4;5200;M;TN,VN	Pass	5.2G	5.19998548G	NaN	NaN	2.793	20	1	10 min
5.2G;11a;20;1;4;5200;M;TN,VL	Pass	5.2G	5.19998554G	NaN	NaN	2.78	20	1	0 min
5.2G;11a;20;1;4;5200;M;TN,VL	Pass	5.2G	5.19998557G	NaN	NaN	2.776	20	1	2 min
5.2G;11a;20;1;4;5200;M;TN,VL	Pass	5.2G	5.19998557G	NaN	NaN	2.775	20	1	5 min
5.2G;11a;20;1;4;5200;M;TN,VL	Pass	5.2G	5.19998557G	NaN	NaN	2.775	20	1	10 min
5.2G;11a;20;1;4;5200;M;TN,VH	Pass	5.2G	5.19998564G	NaN	NaN	2.762	20	1	0 min
5.2G;11a;20;1;4;5200;M;TN,VH	Pass	5.2G	5.19998564G	NaN	NaN	2.762	20	1	2 min
5.2G;11a;20;1;4;5200;M;TN,VH	Pass	5.2G	5.19998565G	NaN	NaN	2.759	20	1	5 min
5.2G;11a;20;1;4;5200;M;TN,VH	Pass	5.2G	5.19998551G	NaN	NaN	2.787	20	1	10 min
5.2G;11a;20;1;4;5200;M;T40,VN	Pass	5.2G	5.19994264G	NaN	NaN	11.031	20	1	0 min
5.2G;11a;20;1;4;5200;M;T40,VN	Pass	5.2G	5.19994244G	NaN	NaN	11.07	20	1	2 min
5.2G;11a;20;1;4;5200;M;T40,VN	Pass	5.2G	5.19994212G	NaN	NaN	11.131	20	1	5 min
5.2G;11a;20;1;4;5200;M;T40,VN	Pass	5.2G	5.19994222G	NaN	NaN	11.116	20	1	10 min
5.2G;11a;20;1;4;5200;M;T30,VN	Pass	5.2G	5.19998184G	NaN	NaN	3.493	20	1	0 min
5.2G;11a;20;1;4;5200;M;T30,VN	Pass	5.2G	5.19998154G	NaN	NaN	3.55	20	1	2 min
5.2G;11a;20;1;4;5200;M;T30,VN	Pass	5.2G	5.19998151G	NaN	NaN	3.555	20	1	5 min
5.2G;11a;20;1;4;5200;M;T30,VN	Pass	5.2G	5.19998148G	NaN	NaN	3.562	20	1	10 min
5.2G;11a;20;1;4;5200;M;T20,VN	Pass	5.2G	5.19998578G	NaN	NaN	2.734	20	1	0 min
5.2G;11a;20;1;4;5200;M;T20,VN	Pass	5.2G	5.19998571G	NaN	NaN	2.749	20	1	2 min
5.2G;11a;20;1;4;5200;M;T20,VN	Pass	5.2G	5.19998571G	NaN	NaN	2.749	20	1	5 min
5.2G;11a;20;1;4;5200;M;T20,VN	Pass	5.2G	5.19998566G	NaN	NaN	2.759	20	1	10 min
5.2G;11a;20;1;4;5200;M;T10,VN	Pass	5.2G	5.19999499G	NaN	NaN	0.964	20	1	0 min
5.2G;11a;20;1;4;5200;M;T10,VN	Pass	5.2G	5.19999486G	NaN	NaN	0.989	20	1	2 min
5.2G;11a;20;1;4;5200;M;T10,VN	Pass	5.2G	5.19999474G	NaN	NaN	1.011	20	1	5 min
5.2G;11a;20;1;4;5200;M;T10,VN	Pass	5.2G	5.19999476G	NaN	NaN	1.008	20	1	10 min
5.2G;11a;20;1;4;5200;M;T0,VN	Pass	5.2G	5.20001556G	NaN	NaN	2.992	20	1	0 min
5.2G;11a;20;1;4;5200;M;T0,VN	Pass	5.2G	5.20001538G	NaN	NaN	2.958	20	1	2 min
5.2G;11a;20;1;4;5200;M;T0,VN	Pass	5.2G	5.20001539G	NaN	NaN	2.96	20	1	5 min
5.2G;11a;20;1;4;5200;M;T0,VN	Pass	5.2G	5.2000154G	NaN	NaN	2.962	20	1	10 min