

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



TEST REPORT

Report Number: 13061080HKG-001

Application
For
Certification
(Original Grant)
(FCC ID: YPG-011813)

(WiFi portion)
Transceiver

Prepared and Checked by:

A handwritten signature in black ink, appearing to be 'Wong Kwok Yeung'.

Wong Kwok Yeung, Kenneth
Lead Engineer

Approved by:

A handwritten signature in black ink, appearing to be 'Chan Chi Hung'.

Chan Chi Hung, Terry
Supervisor
August 23, 2013

- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etisemko.com

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



GENERAL INFORMATION

| | |
|------------------------------------|----------------------------------------------------------------------------------------------|
| Applicant Name: | Oregon Scientific Global Distribution Limited |
| Applicant Address: | Block C, 9/F., Kaiser Estate, Phase 1, 41 Man Yue Street, Hunghom, Kowloon, Hong Kong. |
| Manufacturer Address: | Same as Applicant |
| FCC Specification Standard: | FCC Part 15, October 1, 2012 Edition |
| FCC ID: | YPG-011813 |
| FCC Model(s): | OP0118-13 |
| Type of EUT: | Digital Transmission System |
| Description of EUT: | MEEP!X2 |
| Serial Number: | Not Labelled |
| Sample Receipt Date: | June 21, 2013 |
| Date of Test: | June 21, 2013 - August 12, 2013 |
| Report Date: | August 23, 2013 |
| Environmental Conditions: | Temperature: +10 to 40°C Humidity: 10 to 90% |

Table of Contents

| | |
|-------------------------------------------------------------------------------|-----------|
| 1.0 Summary of Test Results | 5 |
| 1.1 Statement of Compliance | 5 |
| 2.0 General Description | 7 |
| 2.1 Product Description | 7 |
| 2.2 Related Submittal(s) Grants | 7 |
| 2.3 Test Methodology | 8 |
| 2.4 Test Facility | 8 |
| 3.0 System Test Configuration | 10 |
| 3.1 Justification | 10 |
| 3.2 EUT Exercising Software | 11 |
| 3.3 Details of EUT and Description of Accessories | 12 |
| 3.4 Measurement Uncertainty | 12 |
| 4.0 Test Results | 14 |
| 4.1 Maximum Conducted Output Power at Antenna Terminals | 14 |
| 4.2 Minimum 6dB RF Bandwidth | 22 |
| 4.3 Maximum Power Spectral Density | 29 |
| 4.4 Out of Band Conducted Emissions | 37 |
| 4.5 Field Strength Calculation | 74 |
| 4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions | 75 |
| 4.6.1 Radiated Emission Configuration Photograph | 76 |
| 4.6.2 Radiated Emission Data | 76 |
| 4.6.3 Transmitter Duty Cycle Calculation | 86 |
| 4.7 AC Power Line Conducted Emission | 86 |
| 4.7.1 AC Power Line Conducted Emission Configuration Photograph | 86 |
| 4.7.2 AC Power Line Conducted Emission Data | 86 |
| 4.8 Radio Frequency Radiation Exposure | 90 |
| 5.0 Equipment List | 92 |

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



EXHIBIT 1
SUMMARY OF TEST RESULTS & STATEMENT OF COMPLIANCE

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



1.0 Summary of Test Results

| Test Items | FCC Part 15 Section | Results | Details see section |
|--------------------------------------------------------------|----------------------------|---------|---------------------|
| Antenna Requirement | 15.203 | Pass | 2.1 |
| Max. Conducted Output Power | 15.247(b)(3)&(4) | Pass | 4.1 |
| Min. 6dB RF Bandwidth | 15.247(a)(2) | Pass | 4.2 |
| Max. Power Density | 15.247(e) | Pass | 4.3 |
| Out of Band Antenna Conducted Emission | 15.247(d) | Pass | 4.4 |
| Radiated Emission in Restricted Bands and Spurious Emissions | 15.247(d), 15.209 & 15.109 | Pass | 4.6 |
| AC Power Line Conducted Emission | 15.207 & 15.107 | Pass | 4.7 |
| Radio Frequency Radiation Exposure | 15.247(i) | Pass | 4.8 |

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

1.1 Statement of Compliance

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2012 Edition

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



EXHIBIT 2
GENERAL DESCRIPTION

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



2.0 General Description

2.1 Product Description

The Equipment Under Test (EUT) is a tablet, equipped with HDMI, WiFi, Bluetooth 3.0 & 4.0 and SD Interface. The EUT operates in the frequency range from 2412MHz to 2462MHz at 802.11b,g,n HT20 (11 channels with 5MHz spacing) and The EUT operates in the frequency 2402MHz to 2480MHz at Bluetooth 3.0 (79 channels with 1MHz spacing) while 2402MHz to 2480MHz at Bluetooth 4.0 (40 channels with 2MHz spacing). The EUT is powered by an external AC/DC adaptor or/and 3.7 VDC (1 x 3.7V rechargeable battery) or USB 5.0VDC. The adaptor accepts 100-120VAC only.

The antenna used in the EUT is internal and integral.

The circuit description is saved with filename: descri.pdf.

2.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver (WiFi portion).

The Declaration of the Conformity procedure of peripheral (USB portion) for this transceiver is being processed as the same time of this application.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



2.3 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009). Preliminary radiated scans and all radiated measurements were performed in Open Area Test Sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **"Justification Section"** of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2009) and KDB Publication No. 558074 D01 v03r01(09-April-2013).

2.4 Test Facility

The open area test site, AC Power Line conducted measurement facility, and antenna port conducted measurement facility used to collect the radiated data, AC Power Line conducted data, and conductive data are at Roof Top, 2nd Floor, and 5th Floor respectively of Intertek Testing Services Hong Kong Ltd., which is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



EXHIBIT 3
SYSTEM TEST CONFIGURATION

2 System Test Configuration

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by an AC/DC adapter 120VAC or USB 5.0VDC or / and 3.7 VDC rechargeable battery.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the EUT attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitry used to control additional functions other than the operation of the transmitter is subject to FCC Part 15 Section 15.109 Limits.

3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings.

The EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT power cord connected to one LISN (Line impedance stabilization network), which provided 50ohm coupling impedance for measuring instrument. Meanwhile, the peripheral or support equipment power cords connected to a separate LISN. The ac powers for all LISNs were obtained from the same power source. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled. Power cords of non-EUT equipment (peripherals) were not bundled. AC power cords of peripheral equipments draped over the rear edge of the table, and routed them down onto the floor of the ac power line conducted emission test site to the second LISN.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

Different data rates have been tested. Worst case is reported only.

All relevant operation modes have been tested, and the worst case data is included in this report.

All data rates were tested under normal mode of WiFi. Only the worst-case data is shown in the report for DSSS and OFDM modulation types.

This device contains one WiFi module & one Bluetooth module on it, the simultaneous transmission (WiFi and Bluetooth) has also been considered and tested (all channels combinations had been considered). There are no any other emissions found based on simultaneous transmission.

3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



3.3 Details of EUT and Description of Accessories

Details of EUT:

An AC adaptor (provided with the unit) was used to power the device. Their description are listed below.

- (1) An AC/DC adaptor (Model: LGSPSB050200UL) (Supplied by Client)
- (2) USB cable with length of 0.2 meter (Supplied by Client).
- (3) Notebook: Lenovo SL500 (Supplied by Intertek)

Description of Accessories:

- (1) HDMI cable with 1.5 meter – for termination only (Supplied by Client)
- (2) Earphone with length of 1.5 meter (Supplied by Intertek)
- (3) Microphone with length of 2.0 meter (Supplied by Intertek)
- (4) HDMI Monitor (Supplied by Intertek)

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



EXHIBIT 4
TEST RESULTS

3 Test Results

4.1 Maximum Conducted Output Power at Antenna Terminals

The antenna port of the EUT was connected to the input of a spectrum analyzer.

- ☒ External attenuation and cable loss were compensated for using the OFFSET function of the analyser. The measurement procedure 9.1.2 was used.
- ☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

| IEEE 802.11b (DSSS, 1 Mbps) Antenna Gain = 0 dBi | | |
|--------------------------------------------------|---------------|-----------------|
| Frequency (MHz) | Output in dBm | Output in mWatt |
| Low Channel: | 18.76 | 75.16 |
| Middle Channel: | 18.49 | 70.63 |
| High Channel: | 18.38 | 68.87 |

dBm max. output level = 18.76 dBm

| IEEE 802.11g (DSSS, 6 Mbps) Antenna Gain = 0 dBi | | |
|--------------------------------------------------|---------------|-----------------|
| Frequency (MHz) | Output in dBm | Output in mWatt |
| Low Channel: | 23.02 | 200.45 |
| Middle Channel: | 23.33 | 215.28 |
| High Channel: | 22.98 | 198.61 |

dBm max. output level = 23.33 dBm

| IEEE 802.11n (DSSS, 6.5 Mbps) Antenna Gain = 0 dBi | | |
|----------------------------------------------------|---------------|-----------------|
| Frequency (MHz) | Output in dBm | Output in mWatt |
| Low Channel: | 22.05 | 160.32 |
| Middle Channel: | 22.20 | 165.96 |
| High Channel: | 21.96 | 157.04 |

dBm max. output level = 22.20 dBm

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation: ☒ included in OFFSET function
☐ added to SA raw reading

Limits:


☒ 1W (30dBm) for antennas with gains of 6dBi or less

☐ ___W (___dBm) for antennas with gains more than 6dBi


The plots of conducted output power are saved as below.

Plots of maximum output power (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, Lowest channel

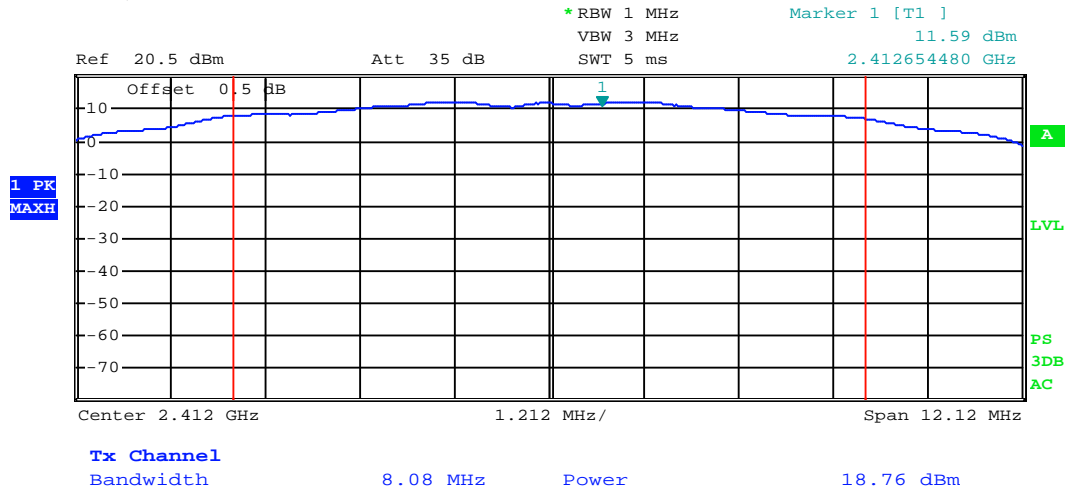

802.11b, Middle channel

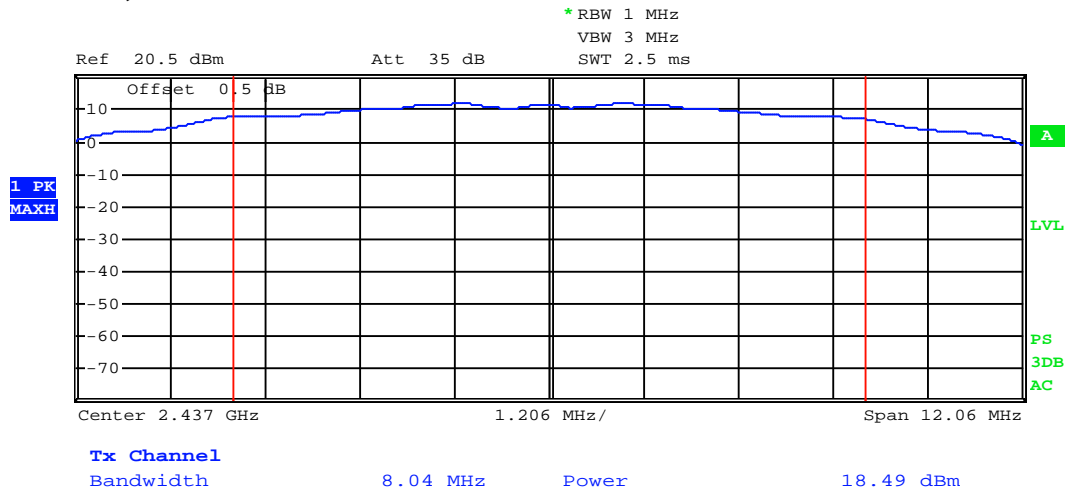


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of maximum output power (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, Highest channel

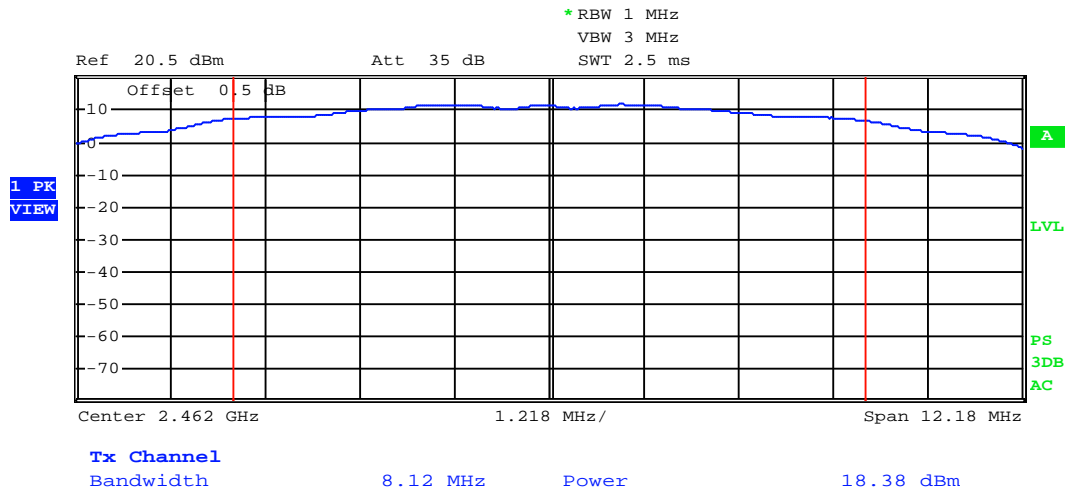


Plots of maximum output power (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Lowest channel

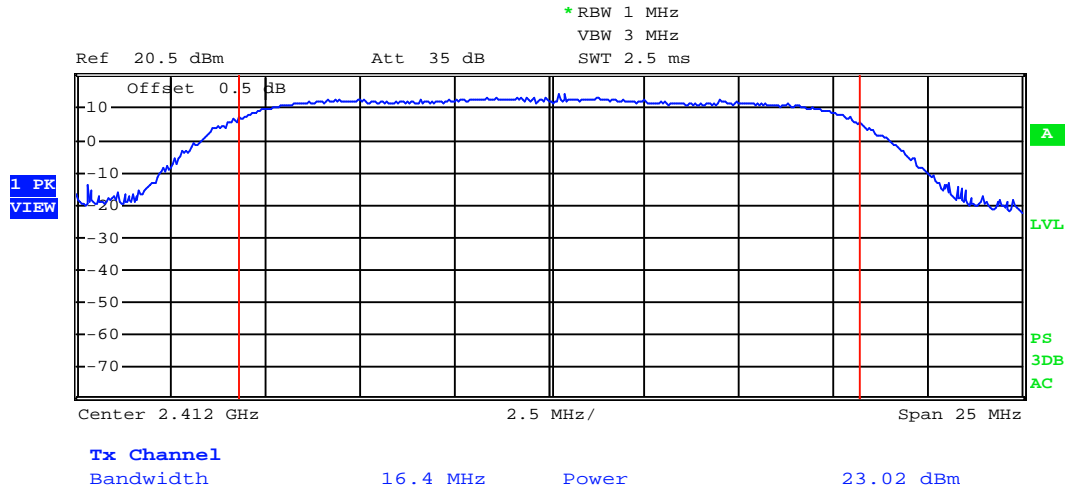

802.11g, Middle channel

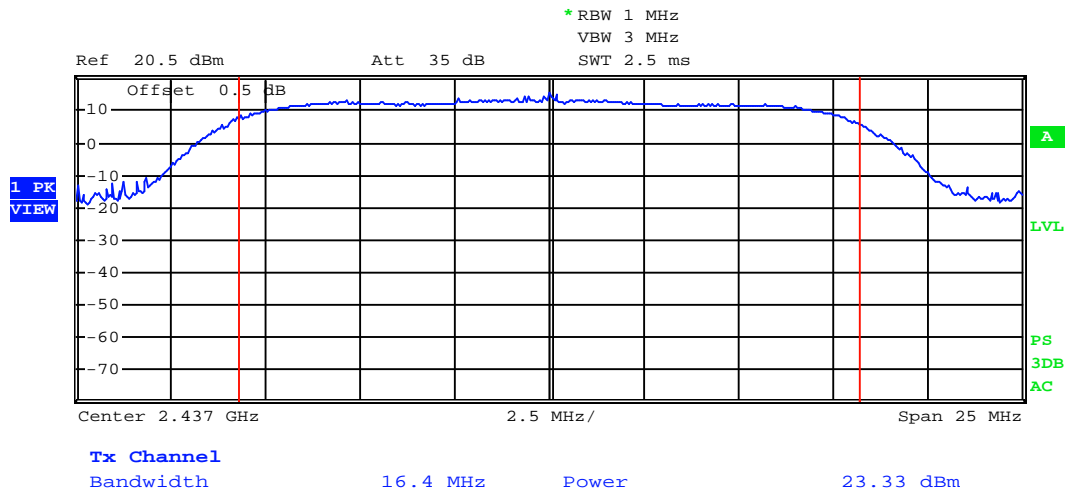


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of maximum output power (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Highest channel

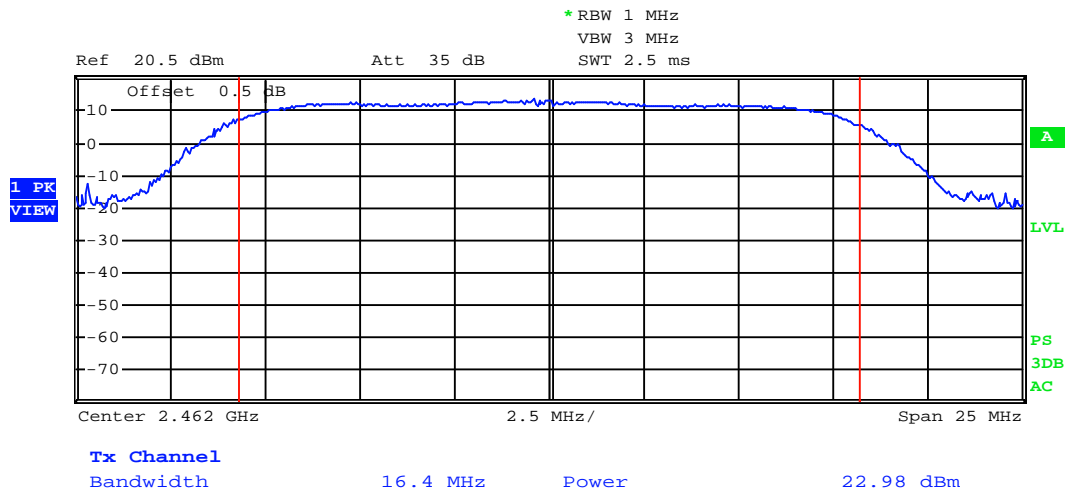


Plots of maximum output power (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Lowest channel

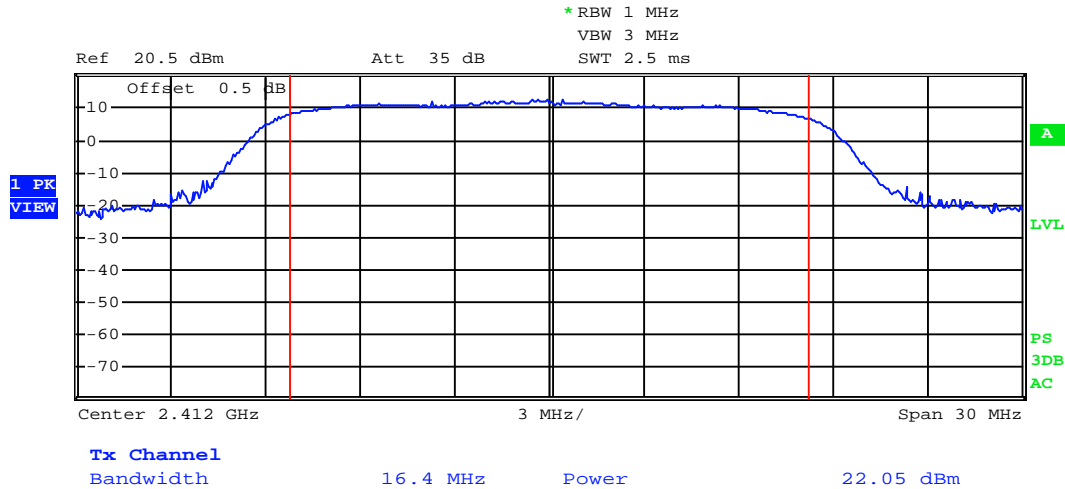

802.11n, Middle channel

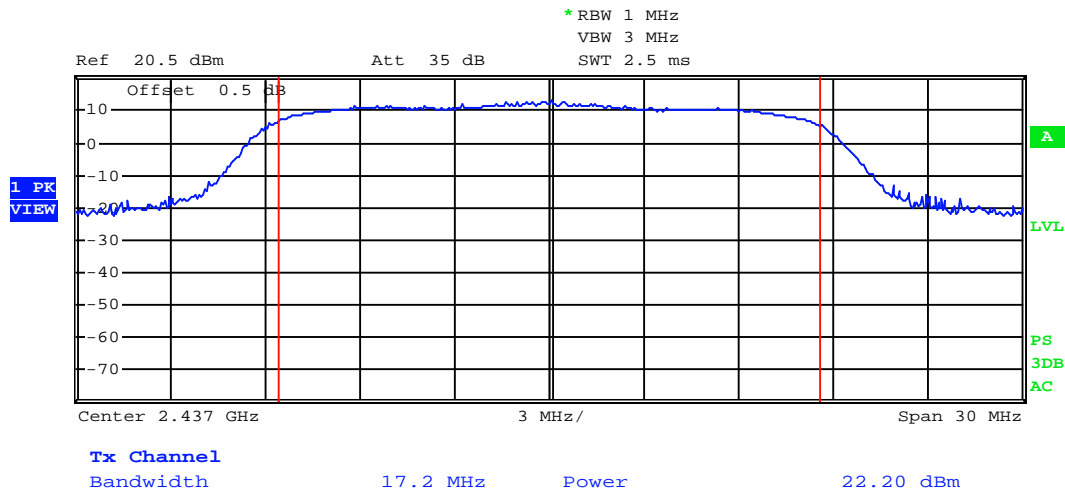


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Plots of maximum output power (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Highest channel

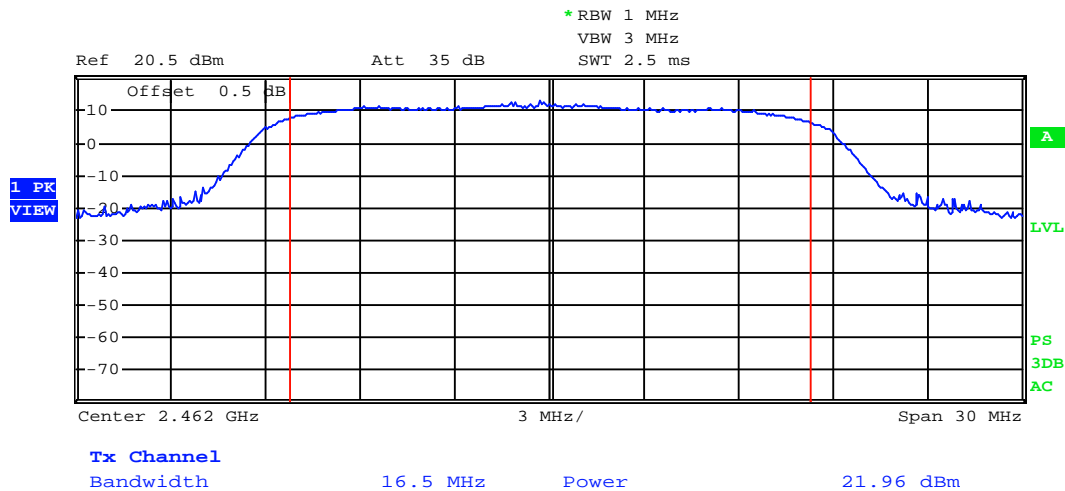

4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The 8.1 EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

| IEEE 802.11b (DSSS, 1 Mbps) | |
|-----------------------------|---------------------|
| Frequency (MHz) | 6dB Bandwidth (MHz) |
| Low Channel: 2412 | 8.08 |
| Middle Channel: 2437 | 8.04 |
| High Channel: 2462 | 8.12 |

| IEEE 802.11g (OFDM, 6 Mbps) | |
|-----------------------------|---------------------|
| Frequency (MHz) | 6dB Bandwidth (MHz) |
| Low Channel: 2412 | 16.4 |
| Middle Channel: 2437 | 16.4 |
| High Channel: 2462 | 16.4 |


| IEEE 802.11n (OFDM, 6.5 Mbps) | |
|-------------------------------|---------------------|
| Frequency (MHz) | 6dB Bandwidth (MHz) |
| Low Channel: 2412 | 16.4 |
| Middle Channel: 2437 | 17.2 |
| High Channel: 2462 | 16.5 |

Limits :


6 dB bandwidth shall be at least 500kHz

The plots of 6dB RF bandwidth and occupied bandwidth are saved as below.

802.11b, Lowest Channel

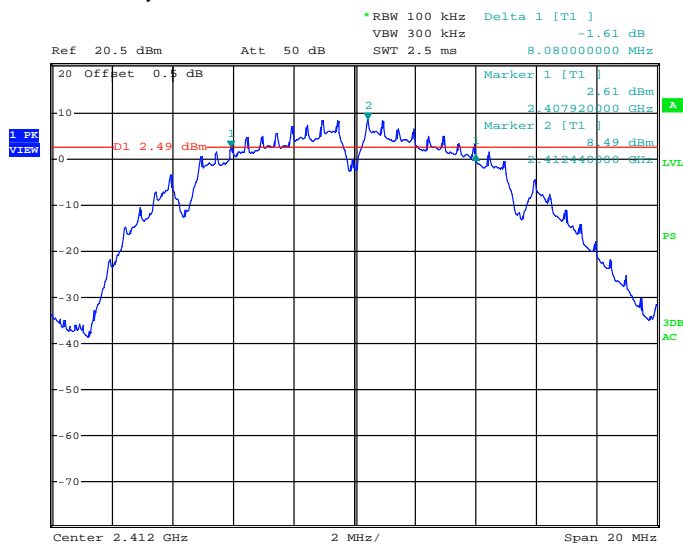

802.11b, Middle Channel

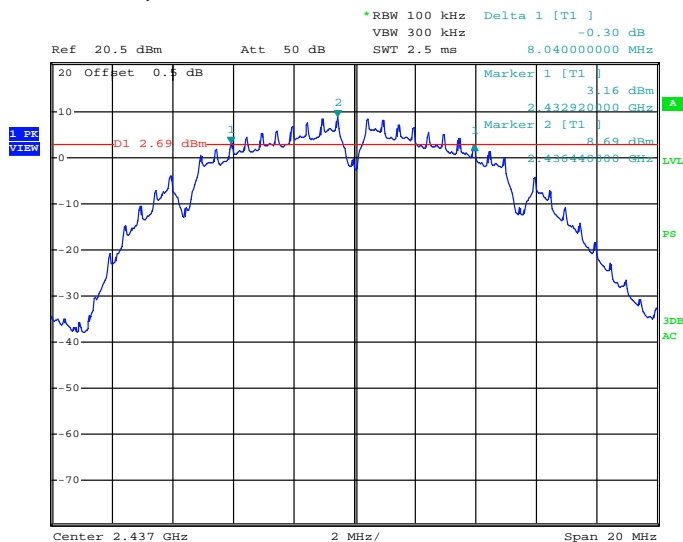


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Plots of 6dB RF bandwidth(IEEE 802.11b, DSSS, 1 Mbps)

802.11b, Highest Channel

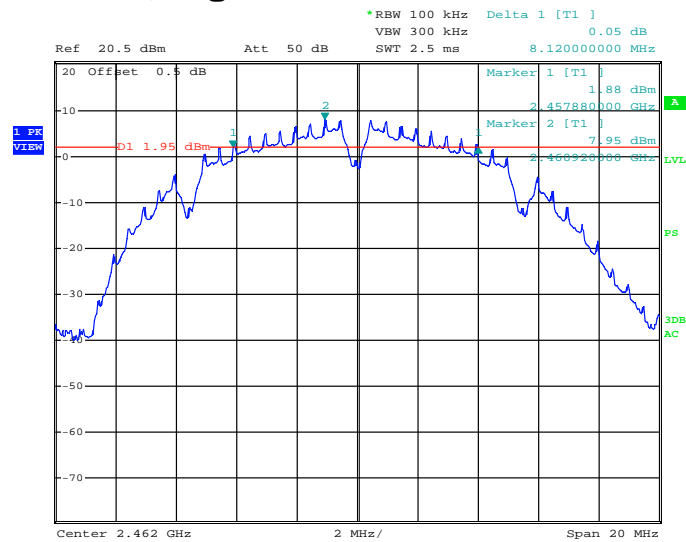


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of 6dB RF bandwidth (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Lowest Channel

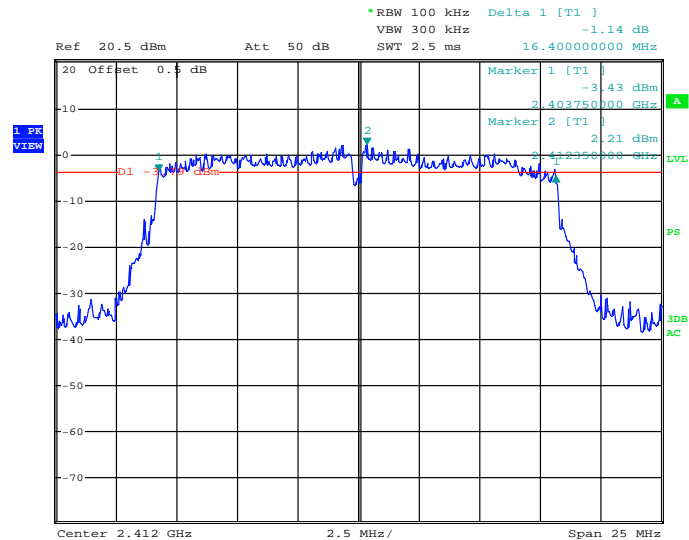

802.11g, Middle Channel

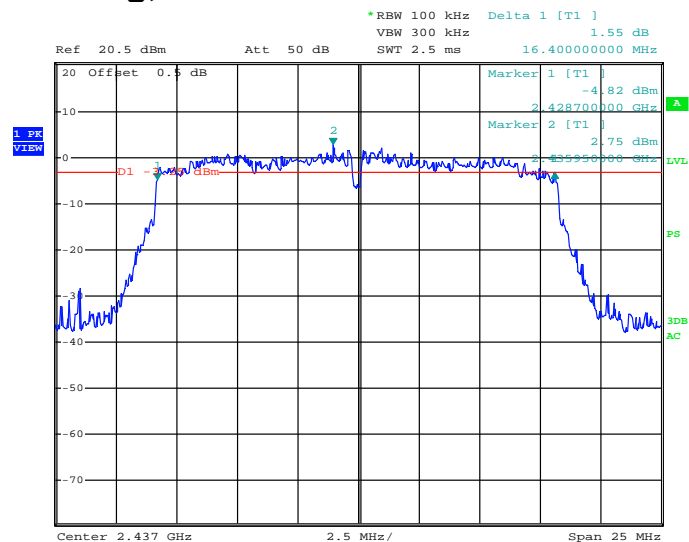


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Plots of 6dB RF bandwidth (IEEE 802.11g , OFDM, 6 Mbps)

802.11g, Highest Channel

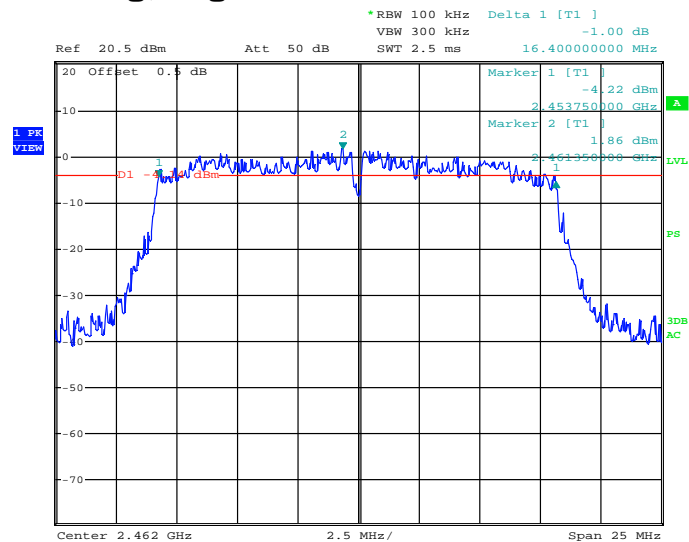


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of 6dB RF bandwidth (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Lowest Channel

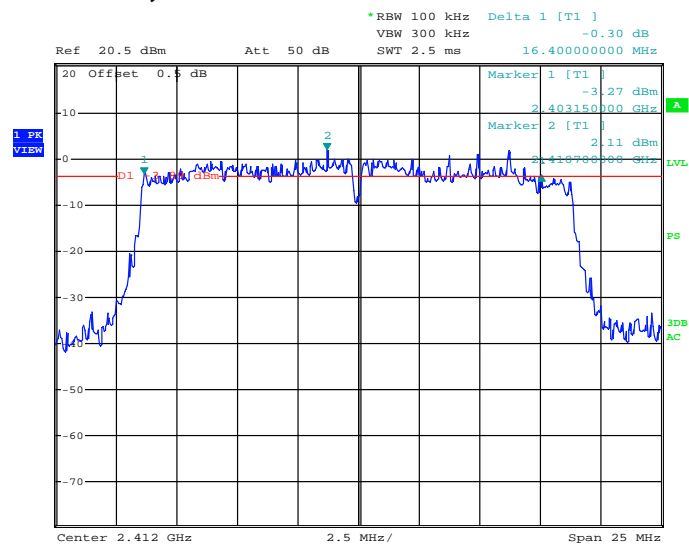

802.11n, Middle Channel

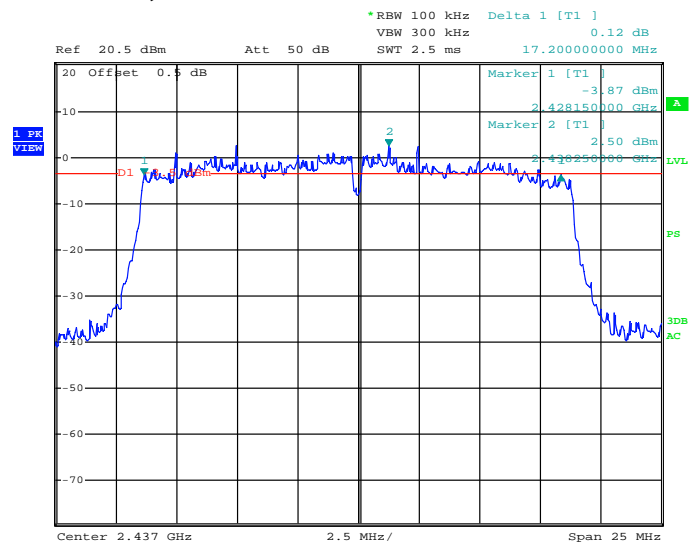


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Plots of 6dB RF bandwidth (IEEE 802.11n , OFDM, 6.5 Mbps)

802.11n, Highest Channel

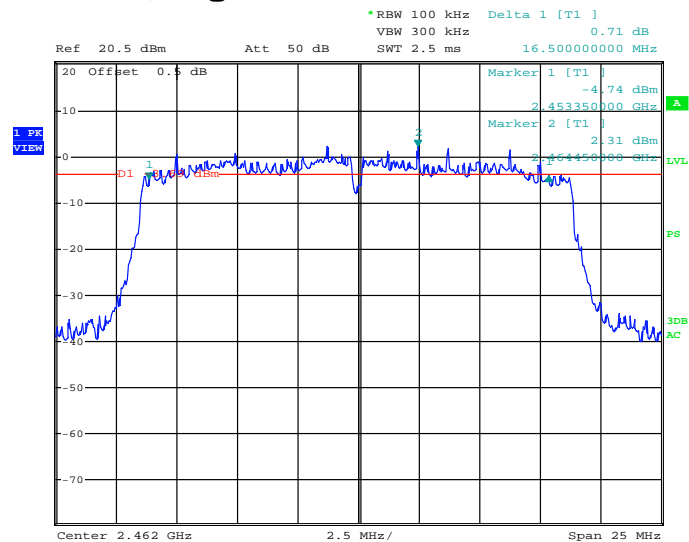

4.3 Maximum Power Spectral Density

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

| IEEE 802.11b (DSSS, 1 Mbps) | |
|-----------------------------|---------------------|
| Frequency (MHz) | PSD in 100kHz (dBm) |
| Low Channel: 2412 | 8.33* |
| Middle Channel: 2437 | 8.51* |
| High Channel: 2462 | 7.85 |

*As the measured values exceed the limit while using 100kHz of RBW, so the RBW should be reduced to 3kHz of RBW to repeat the test for this case.

| IEEE 802.11b (DSSS, 1 Mbps) | |
|-----------------------------|-------------------|
| Frequency (MHz) | PSD in 3kHz (dBm) |
| Low Channel: 2412 | -6.07 |
| Middle Channel: 2437 | -5.40 |
| High Channel: 2462 | N/A |

| IEEE 802.11g (OFDM, 6 Mbps) | |
|-----------------------------|---------------------|
| Frequency (MHz) | PSD in 100kHz (dBm) |
| Low Channel: 2412 | 2.40 |
| Middle Channel: 2437 | 3.17 |
| High Channel: 2462 | 2.05 |

| IEEE 802.11n (OFDM, 6.5 Mbps) | |
|-------------------------------|---------------------|
| Frequency (MHz) | PSD in 100kHz (dBm) |
| Low Channel: 2412 | 2.83 |
| Middle Channel: 2437 | 3.16 |
| High Channel: 2462 | 3.05 |

Cable Loss: 0.5 dB

Limit: 8dBm

The plots of power spectral density are as below.


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of power spectral density in 100kHz (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, Lowest channel

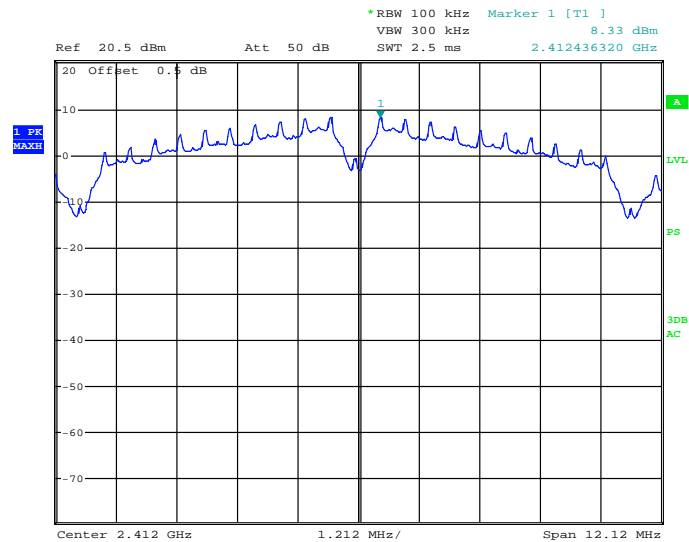

802.11b, Middle channel

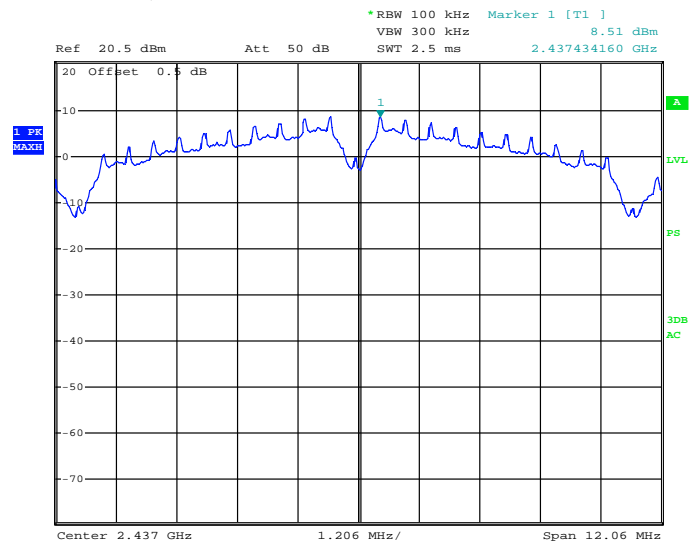


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Plots of power spectral density in 100kHz (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, Highest channel

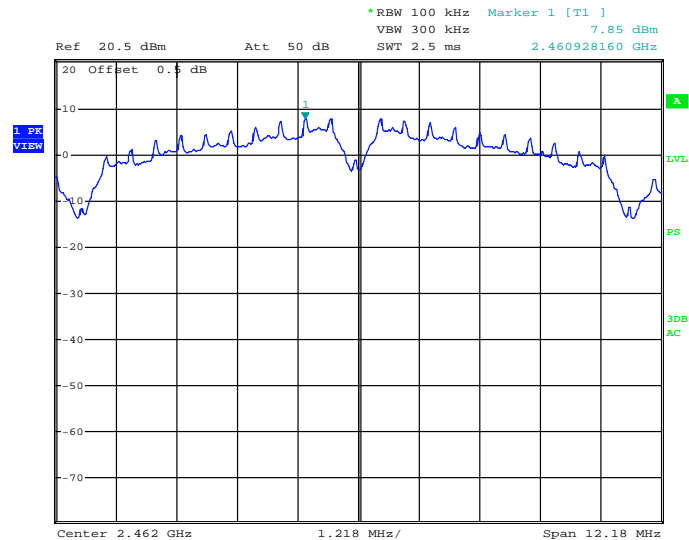


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of power spectral density in 3kHz (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, Lowest channel

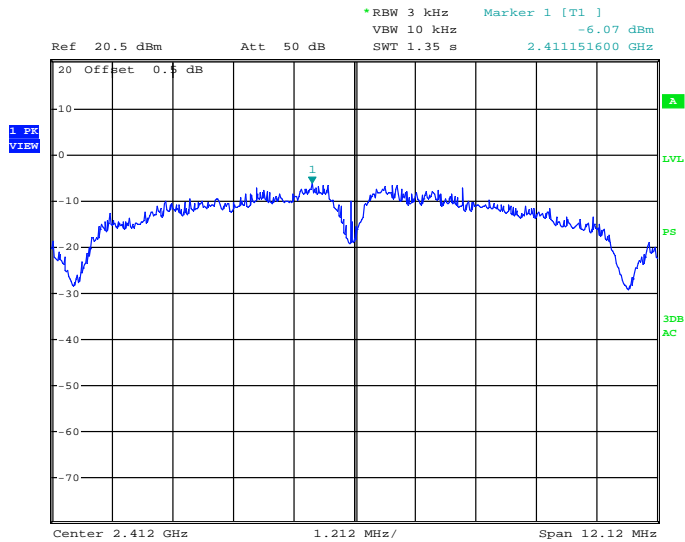

802.11b, Middle channel

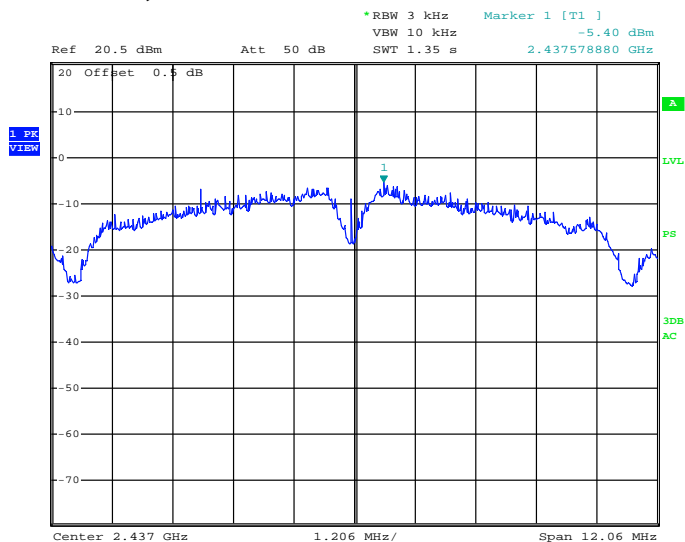


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of power spectral density (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Lowest channel

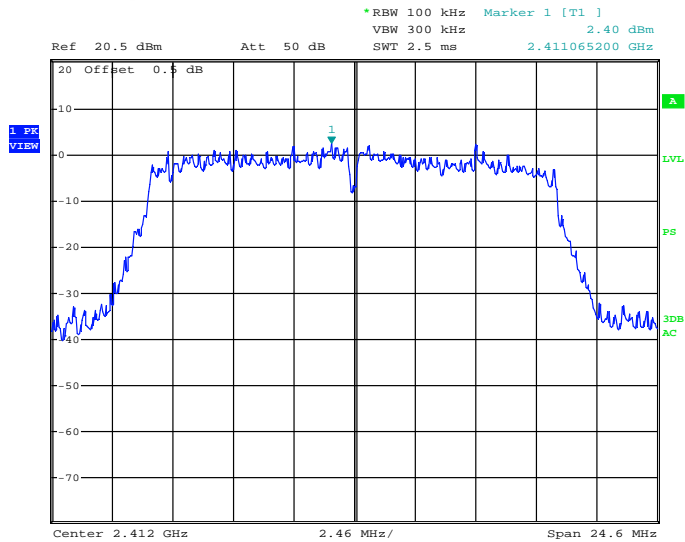

802.11g, Middle channel

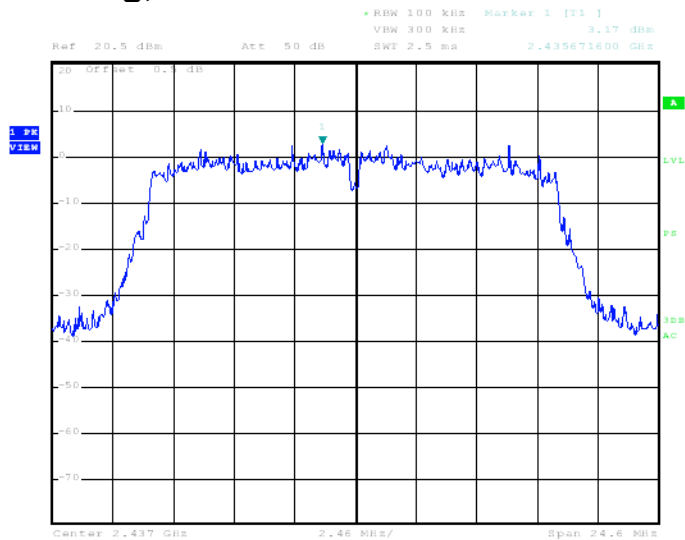


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Plots of power spectral density (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Highest channel

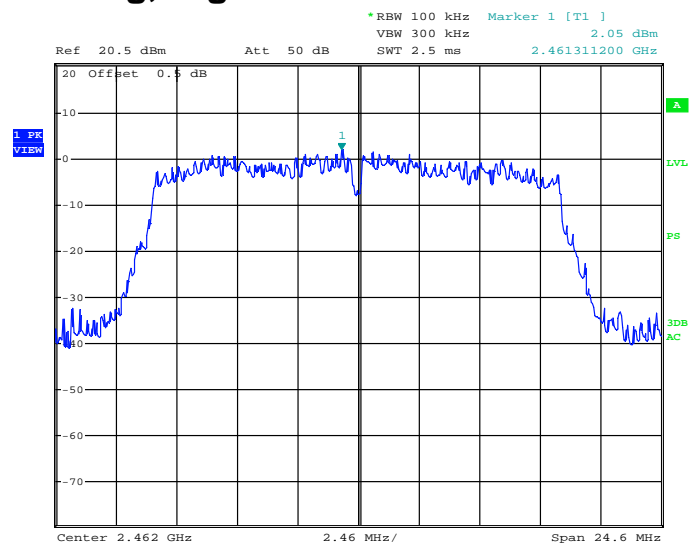


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of power spectral density (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Lowest channel

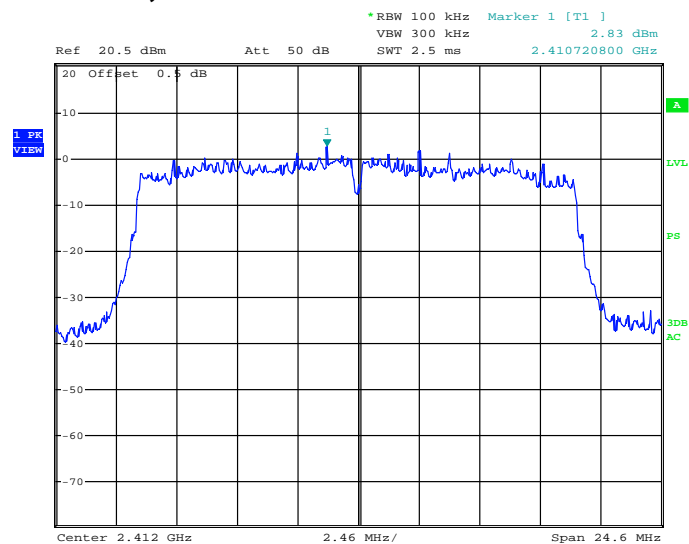

802.11n, Middle channel

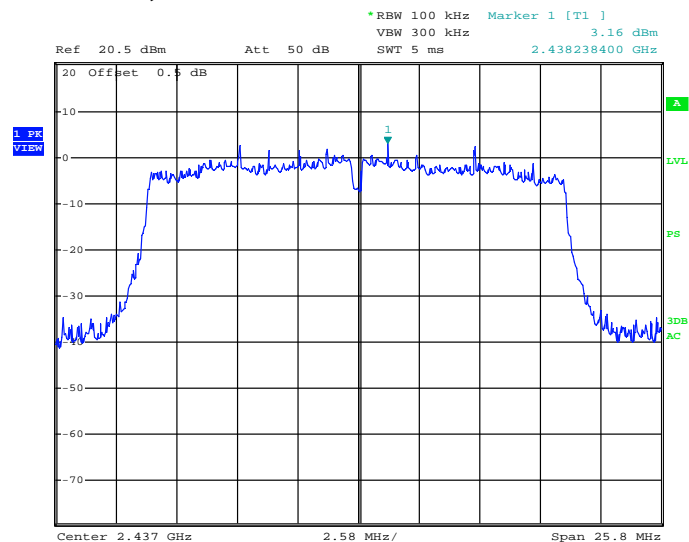


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Plots of power spectral density (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Highest channel

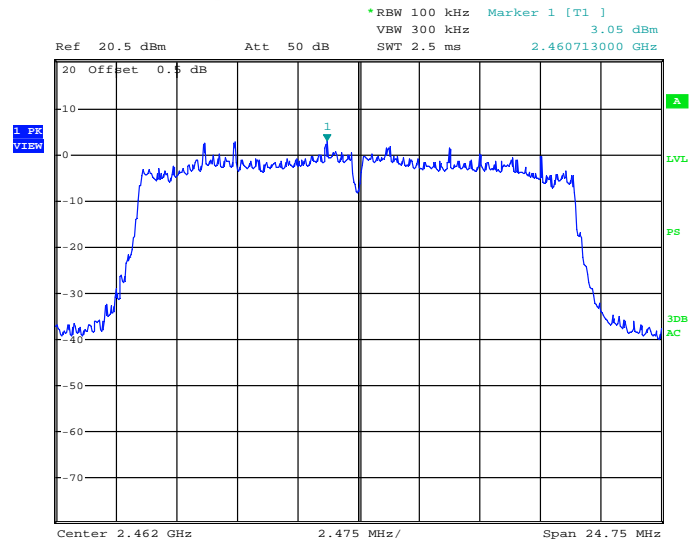

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



4.4 Out of Band Conducted Emissions

RBW was set to 1MHz rather than 100KHz in order to increase the measurement speed.

The display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100KHz bandwidth. The traces in the following plots are measured with 1MHz RBW but not 100KHz in measurement range from 10MHz to 2GHz and 2.8GHz to 25GHz.

The measurement procedures under sections 11 of KDB558074 were used.

Limits:

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the maximum measured in-band peak PSD level .

The plots of out of band conducted emissions are as below.


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, Lowest Channel, Plot A

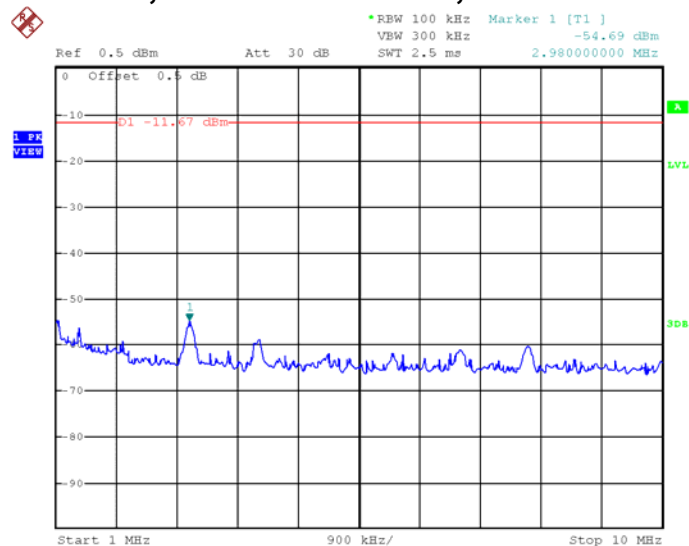

802.11b, Lowest Channel, Plot B

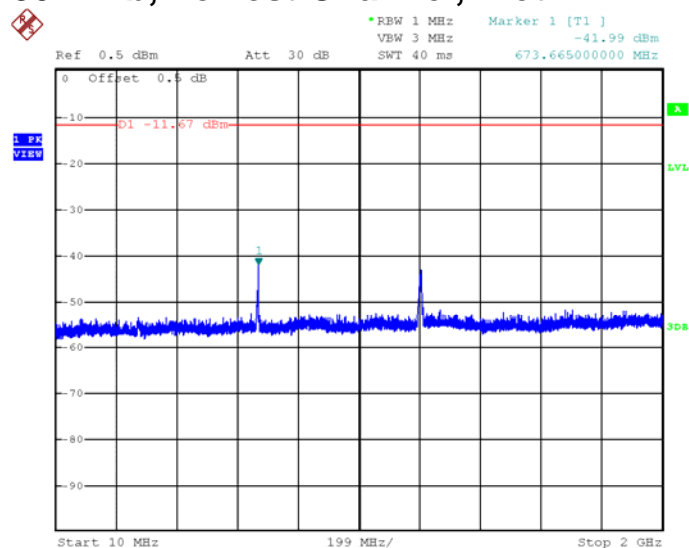


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, Lowest Channel, Plot C

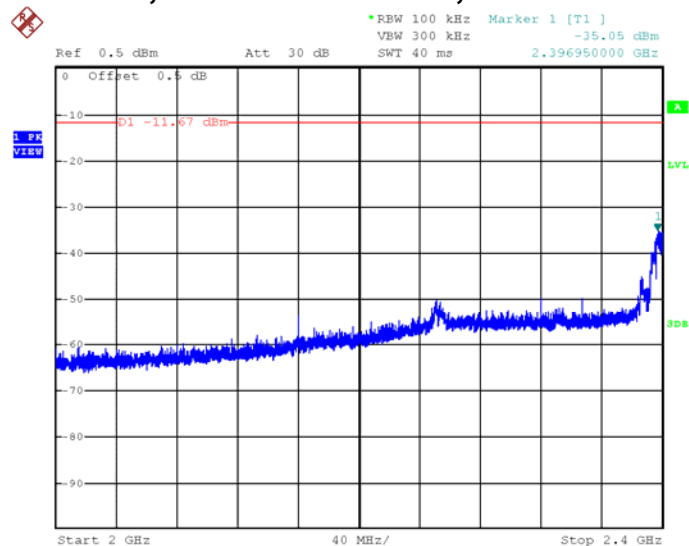

802.11b, Lowest Channel, Plot D

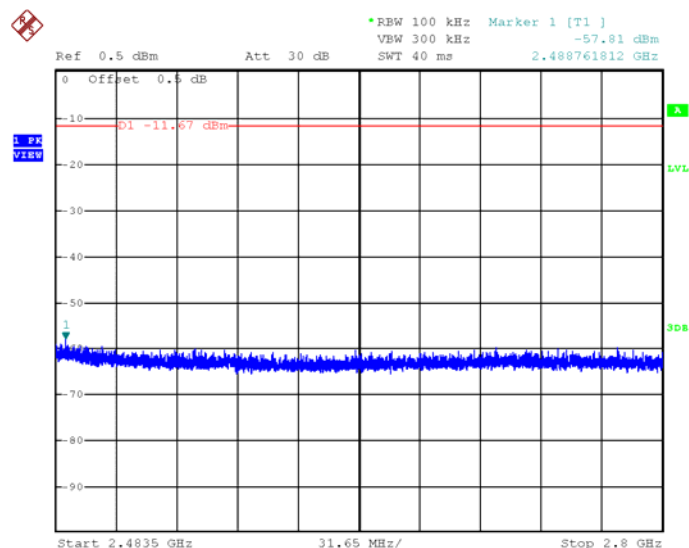


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, Lowest Channel, Plot E

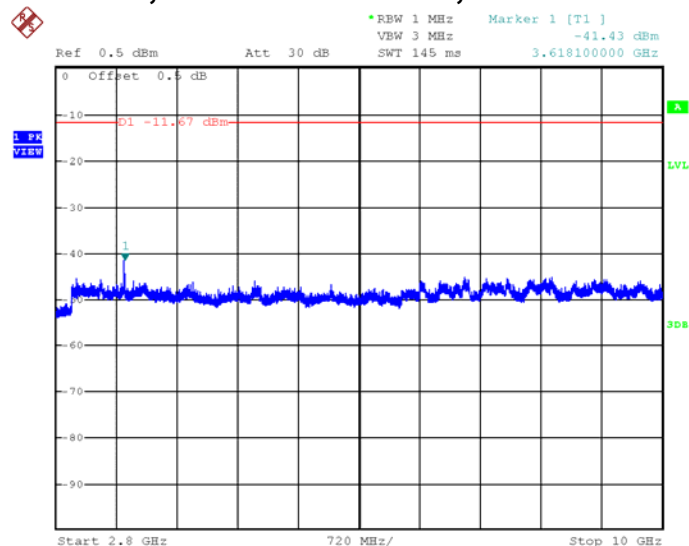

802.11b, Lowest Channel, Plot F

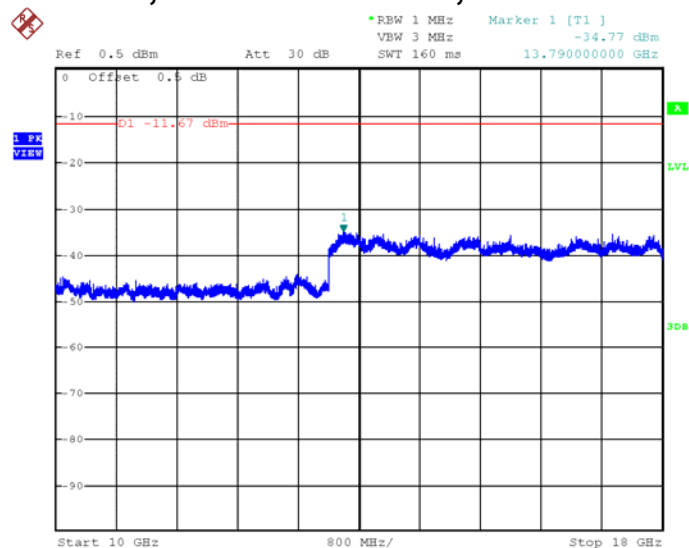


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, Lowest Channel, Plot G

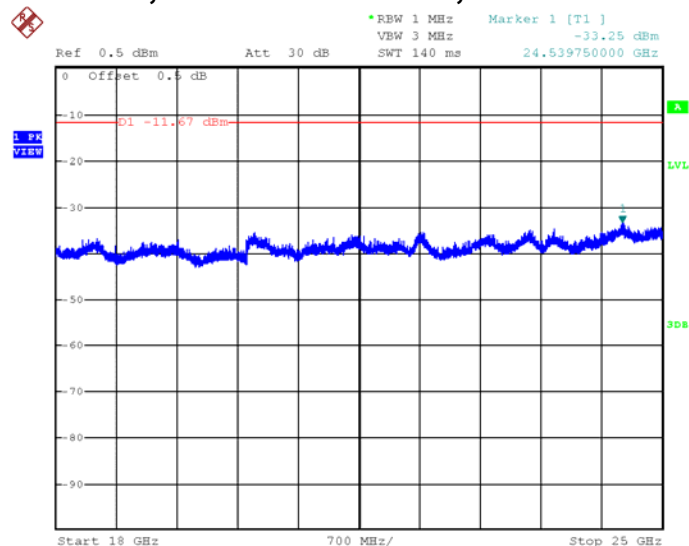


Plots of out of band conducted emissions (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, Middle Channel, Plot A

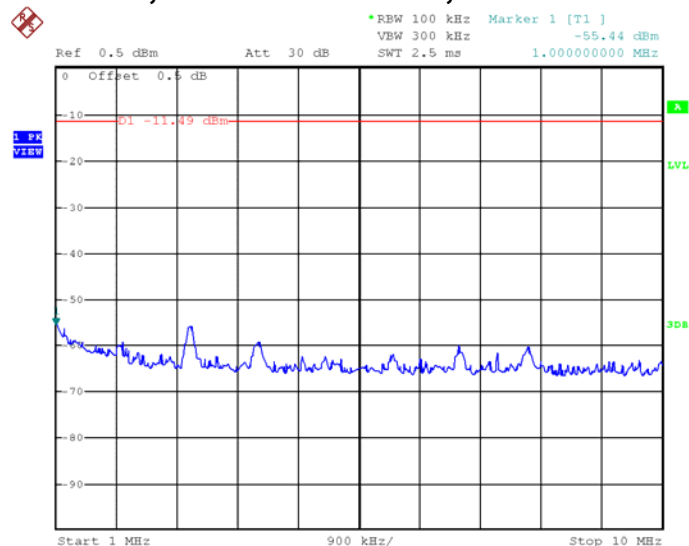

802.11b, Middle Channel, Plot B

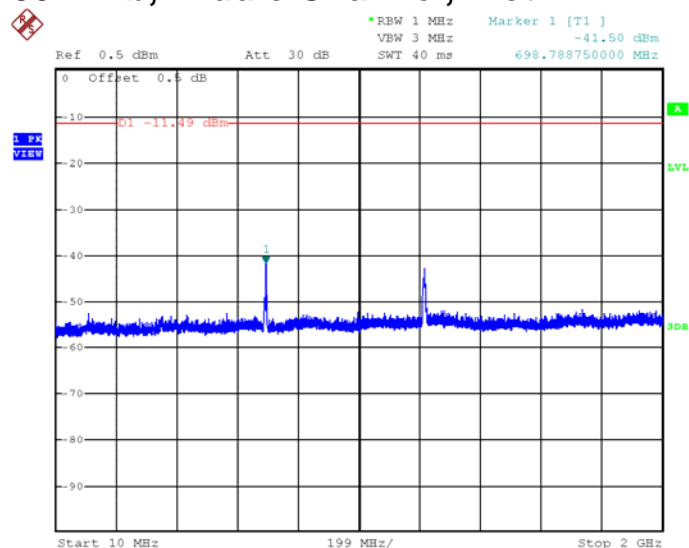


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, Middle Channel, Plot C

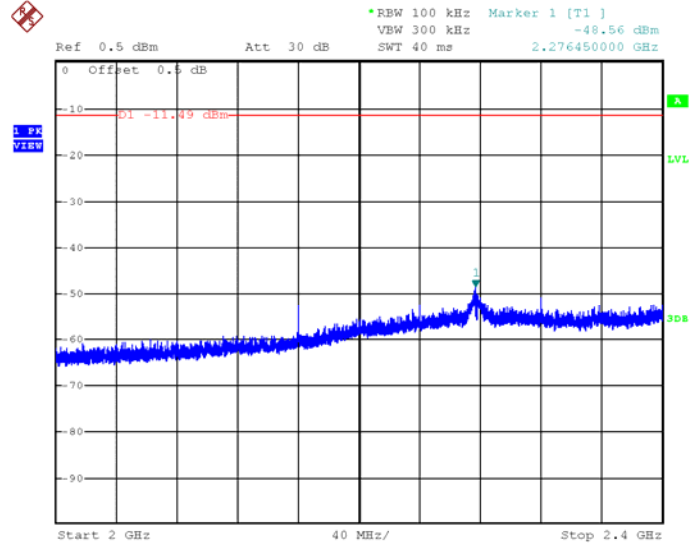

802.11b, Middle Channel, Plot D

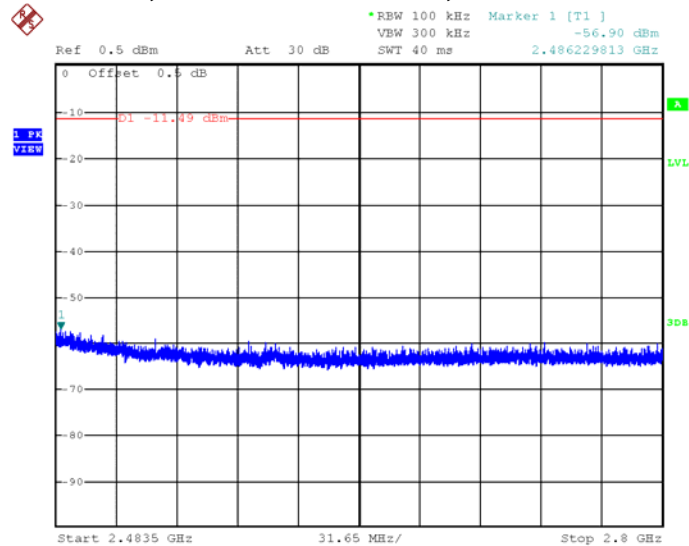


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, Middle Channel, Plot E

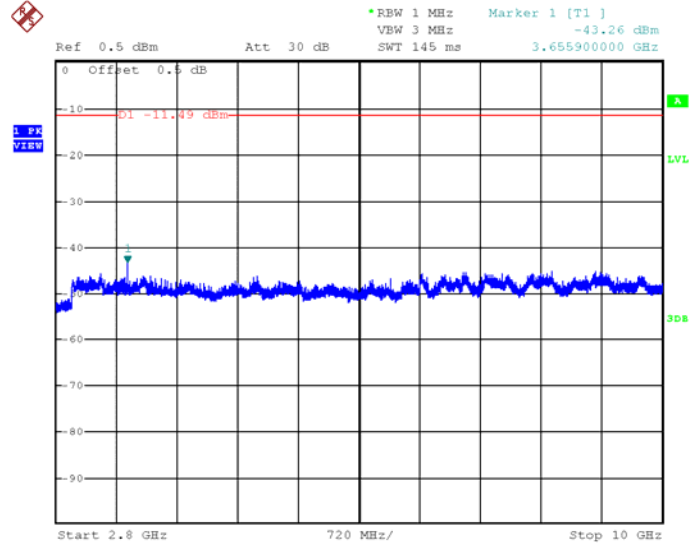

802.11b, Middle Channel, Plot F

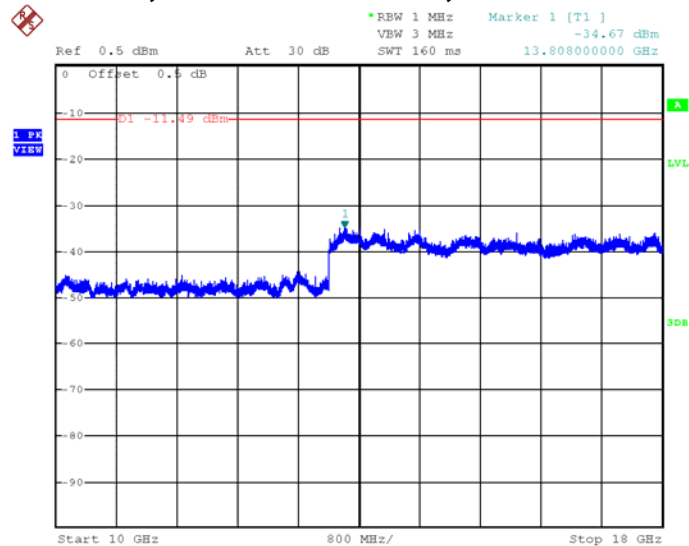


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Plots of out of band conducted emissions (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, Middle Channel, Plot G

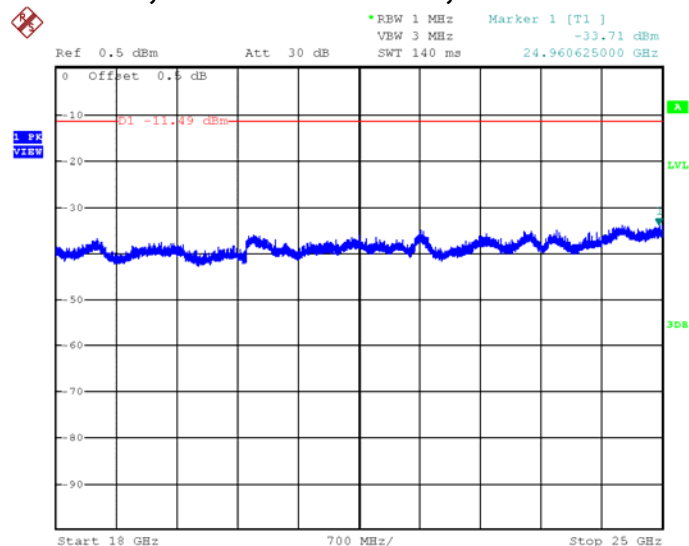


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, highest Channel, Plot A

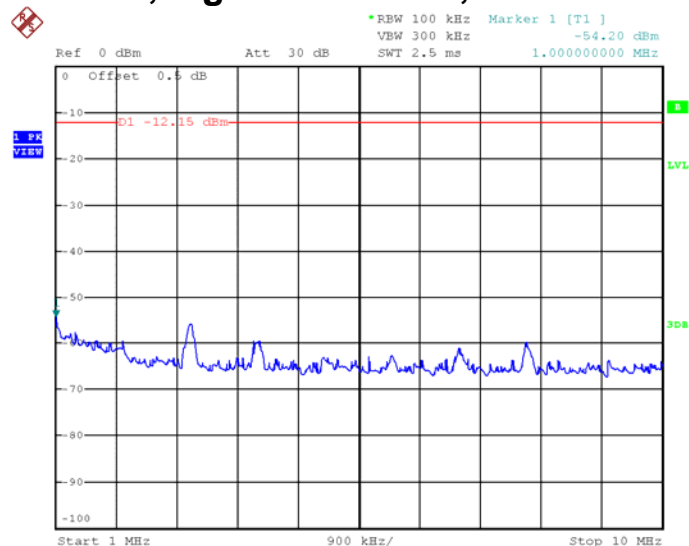

802.11b, highest Channel, Plot B

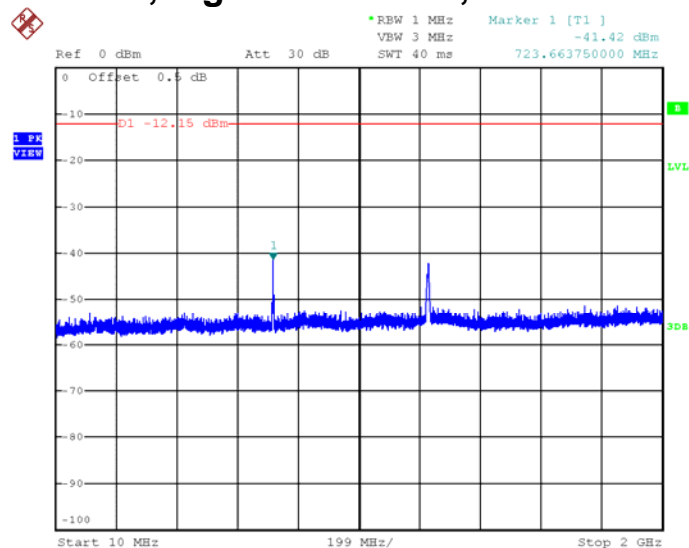


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, highest Channel, Plot C

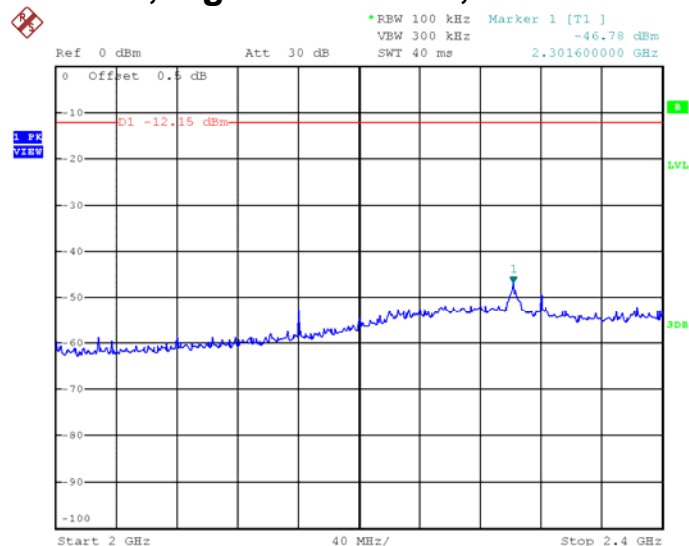

802.11b, highest Channel, Plot D

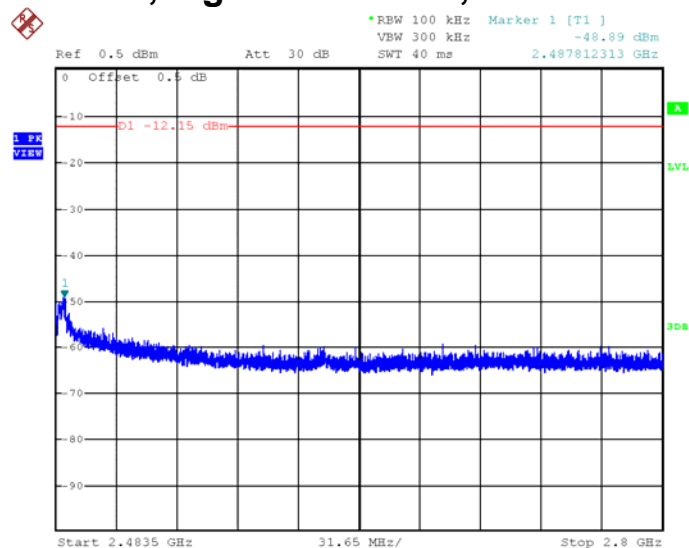


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, highest Channel, Plot E

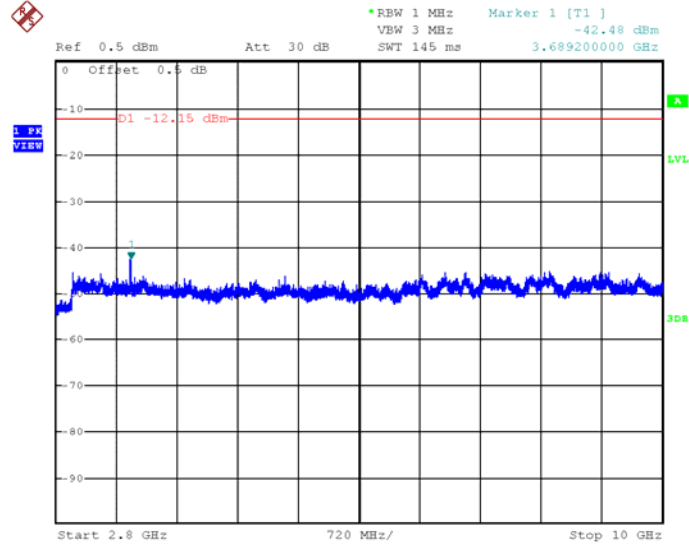

802.11b, highest Channel, Plot F

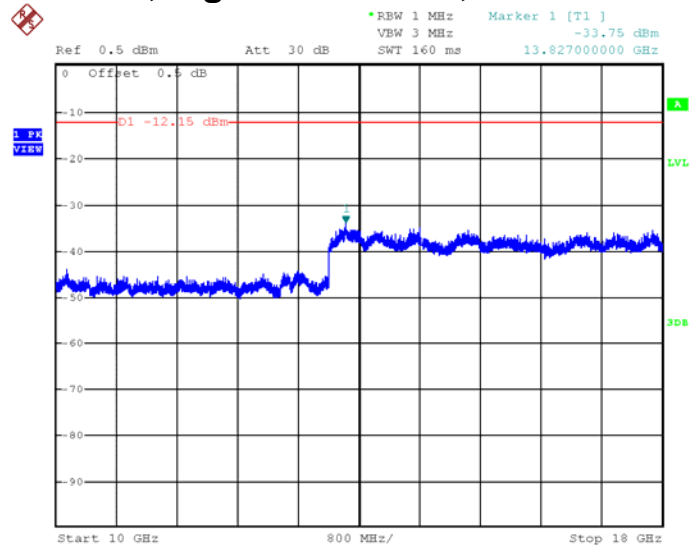


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Plots of out of band conducted emissions (IEEE 802.11b, DSSS, 1 Mbps)

802.11b, highest Channel, Plot G

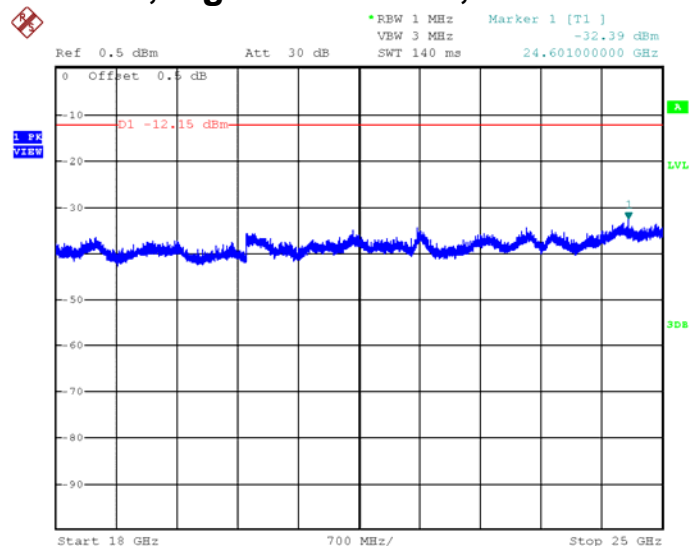


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Lowest channel, Plot A

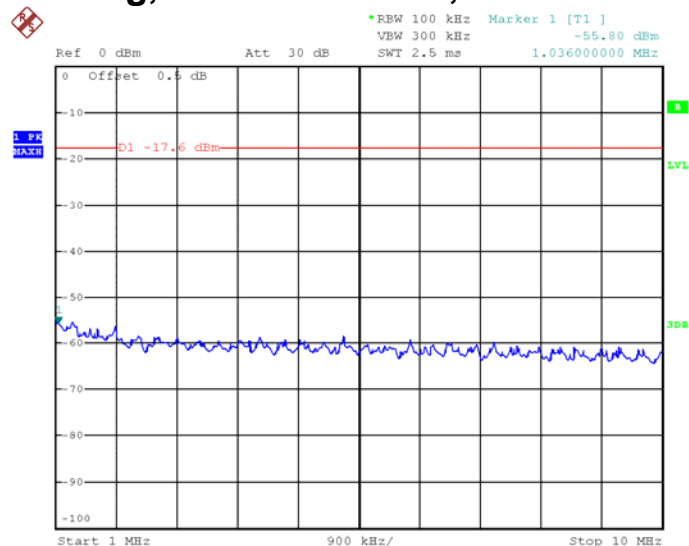

802.11g, Lowest channel, Plot B

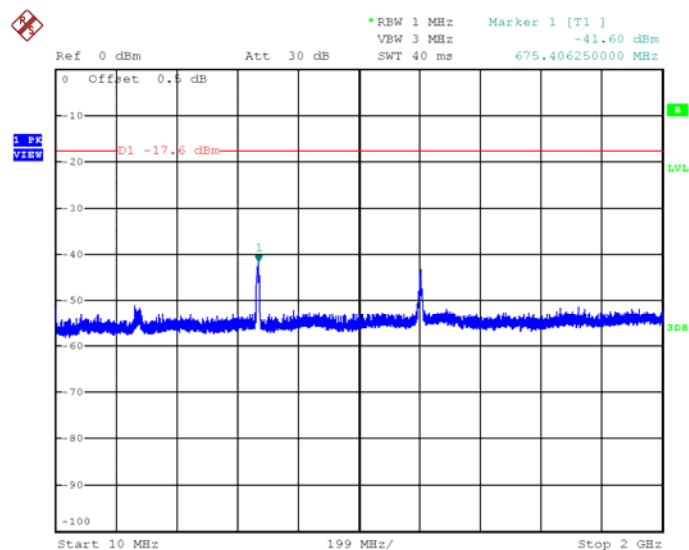


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Lowest channel, Plot C

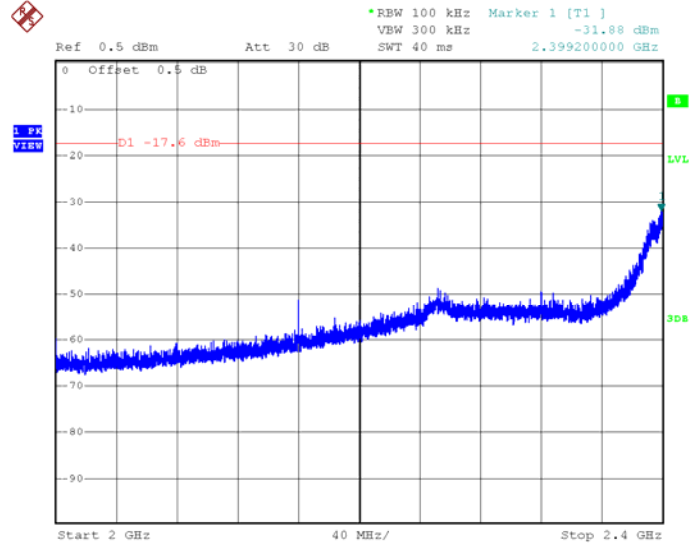

802.11g, Lowest channel, Plot D

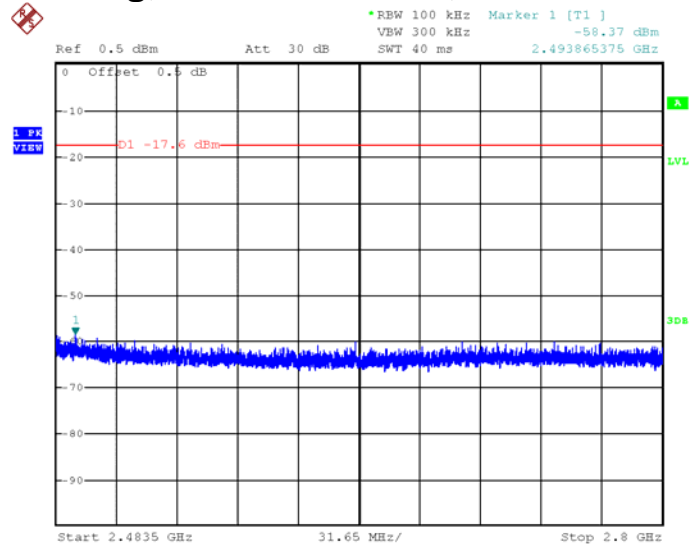


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Lowest channel, Plot E

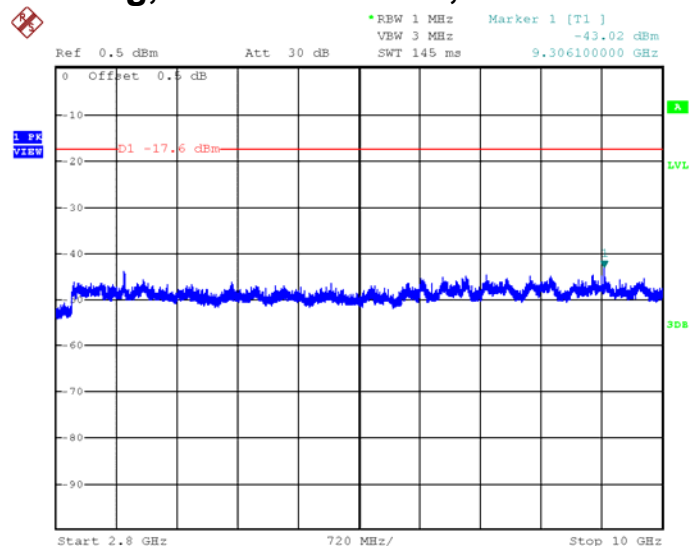

802.11g, Lowest channel, Plot F

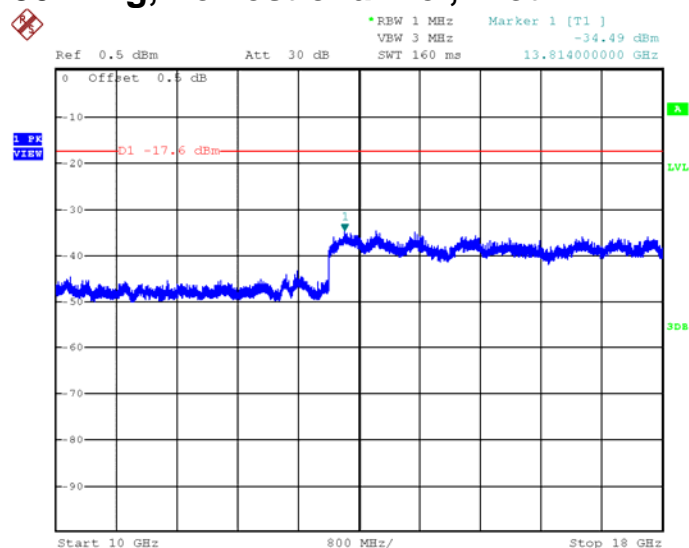


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Plots of out of band conducted emissions (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Lowest channel, Plot G

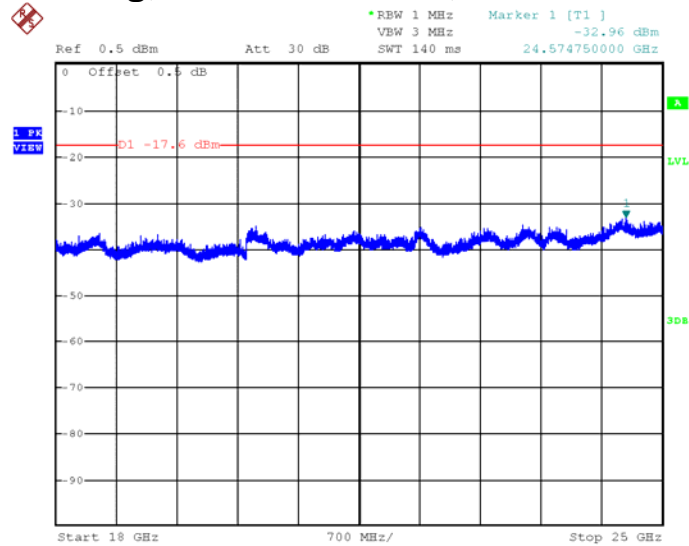


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Middle channel, Plot A

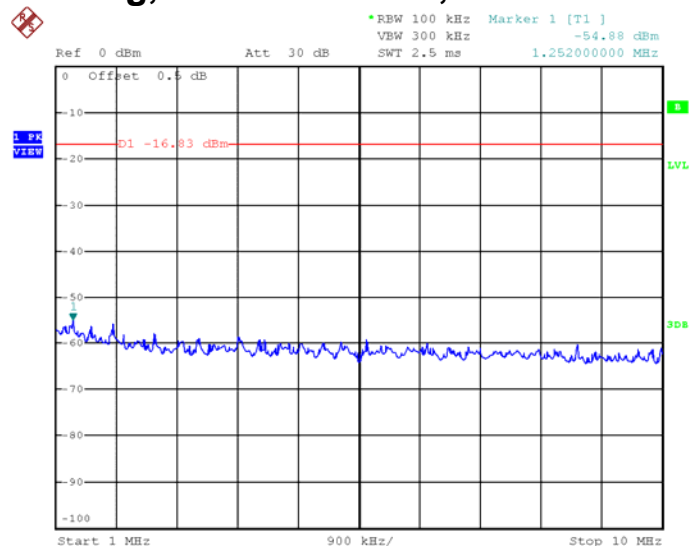

802.11g, Middle channel, Plot B

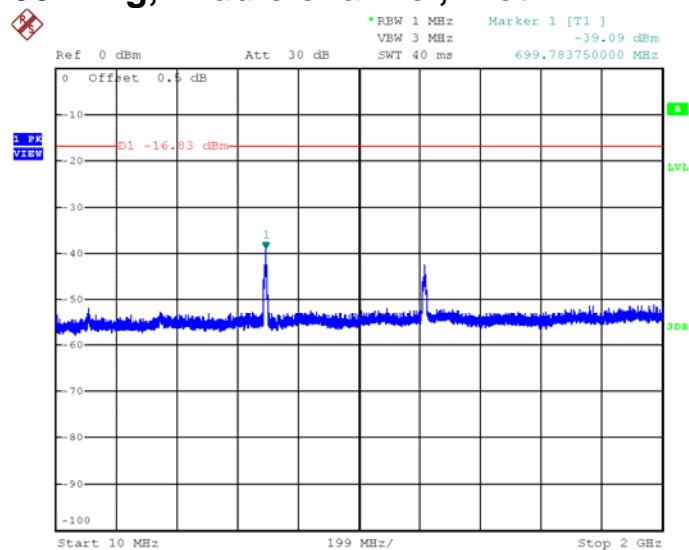


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Middle channel, Plot C

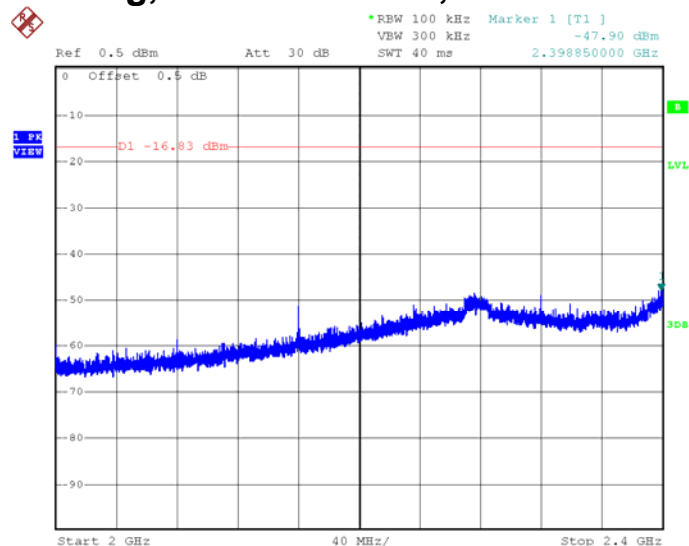

802.11g, Middle channel, Plot D

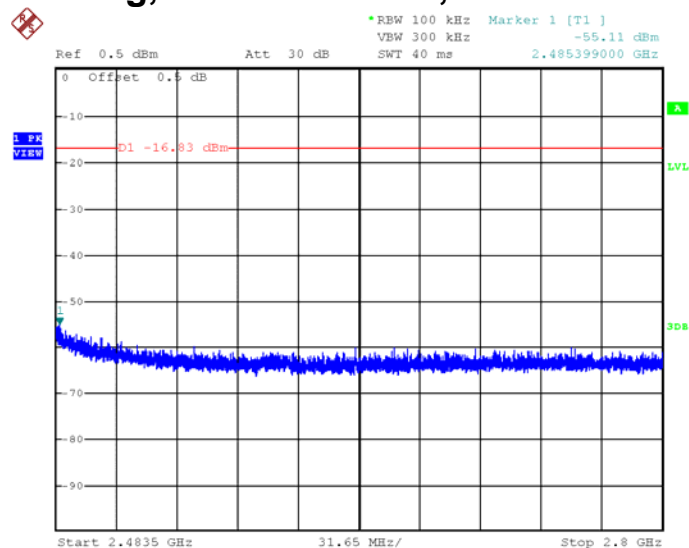


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Middle channel, Plot E

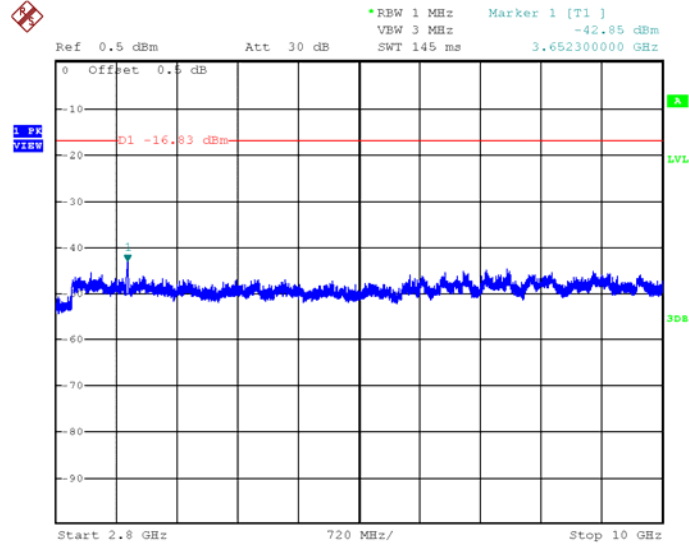

802.11g, Middle channel, Plot F

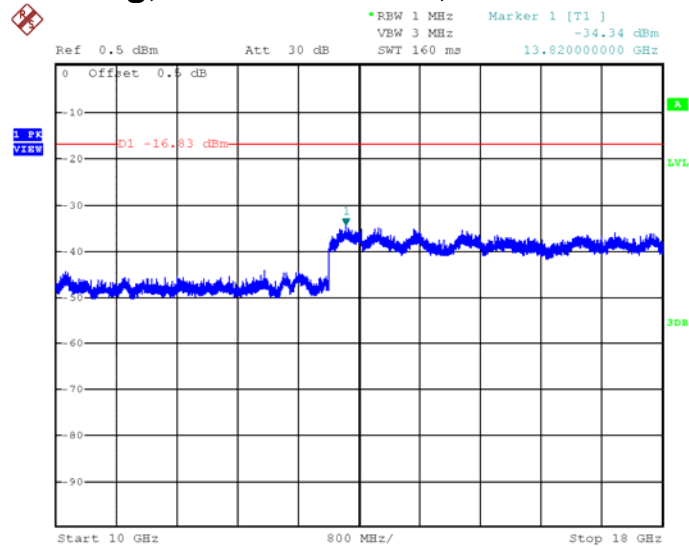


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Plots of out of band conducted emissions (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Middle channel, Plot G

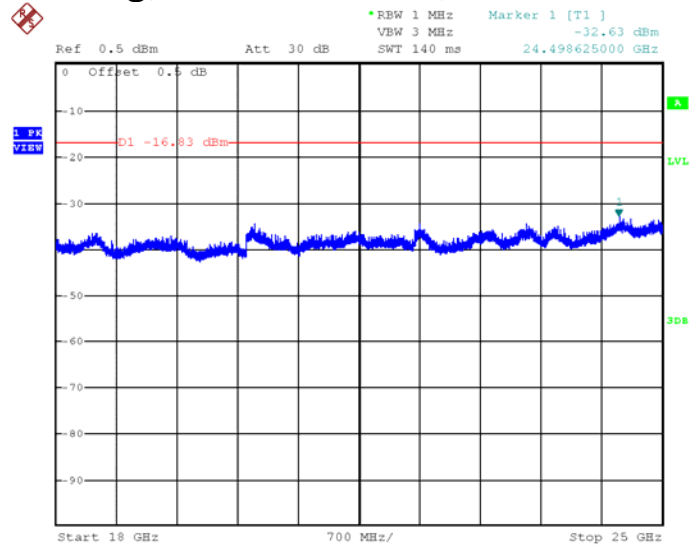


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Highest channel, Plot A

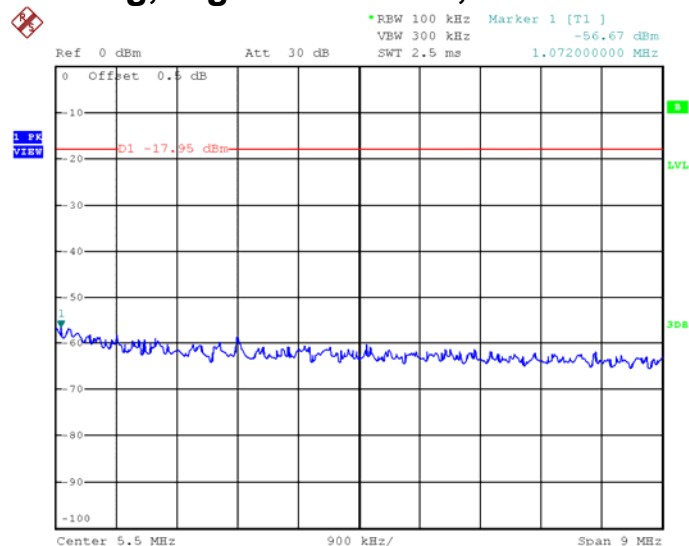

802.11g, Highest channel, Plot B

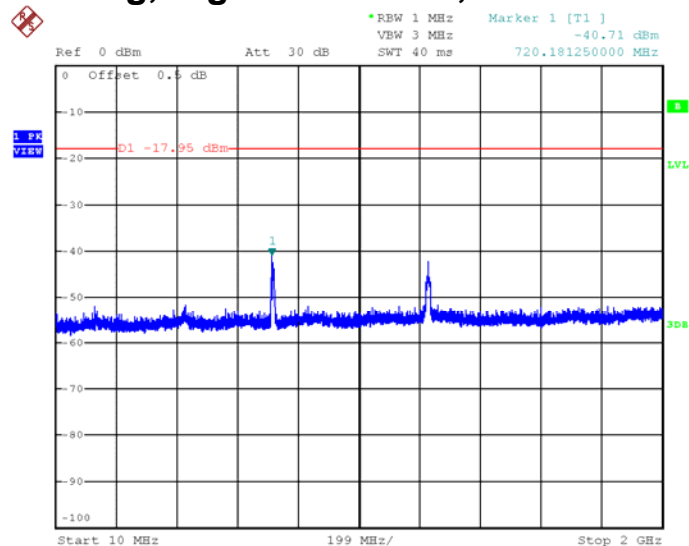


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Highest channel, Plot C

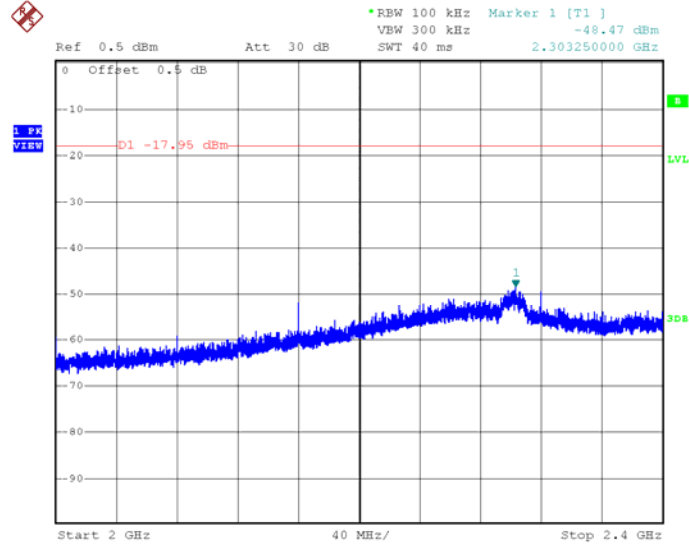


802.11g, Highest channel, Plot D

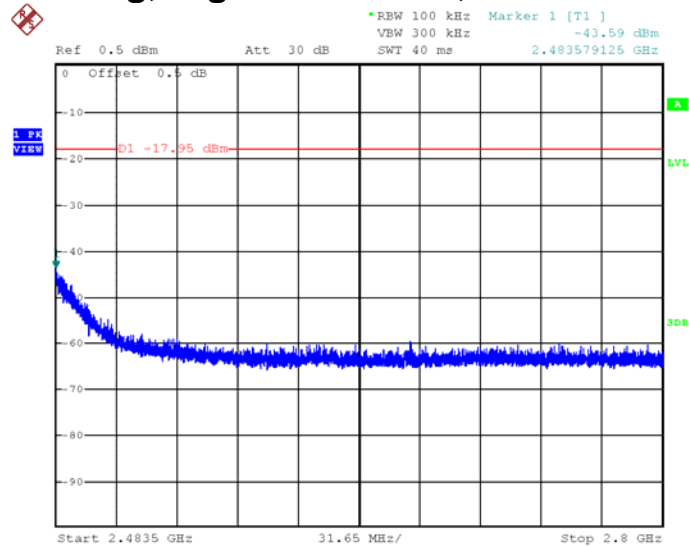


Plots of out of band conducted emissions (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Highest channel, Plot E

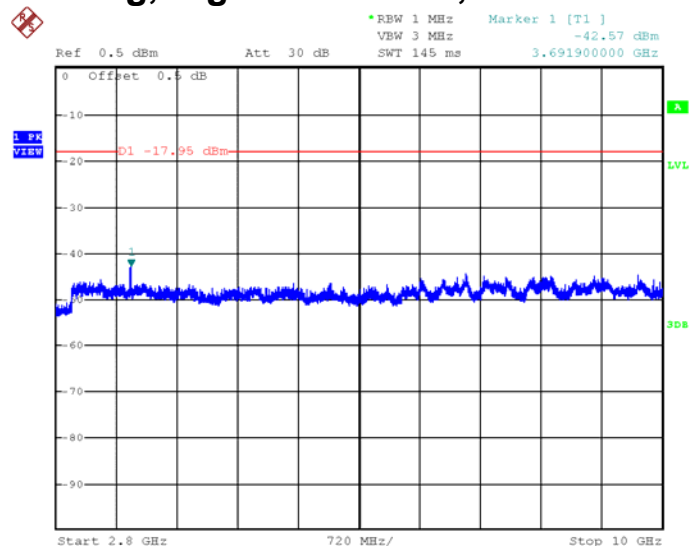

802.11g, Highest channel, Plot F

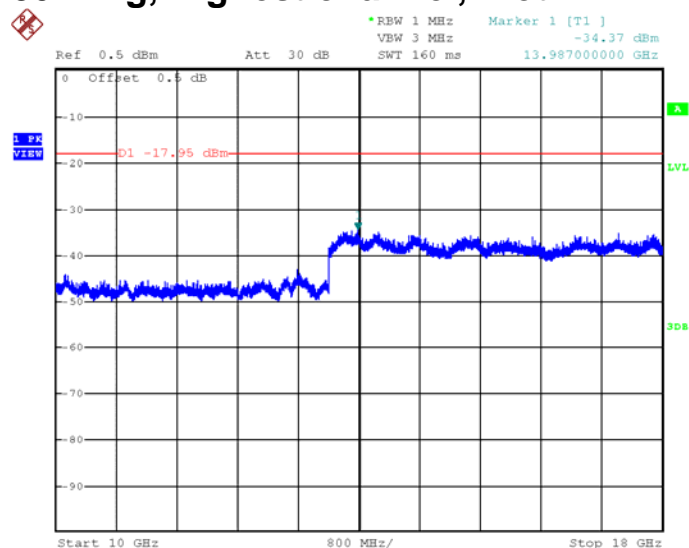


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Plots of out of band conducted emissions (IEEE 802.11g, OFDM, 6 Mbps)

802.11g, Highest channel, Plot G

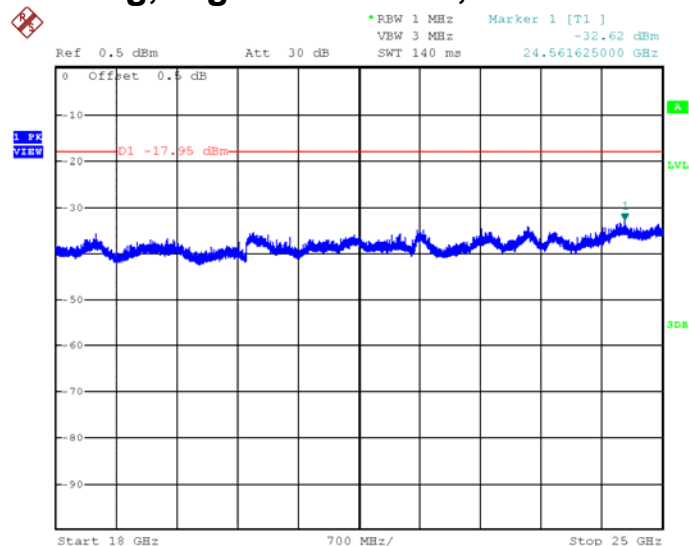


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Lowest channel, Plot A

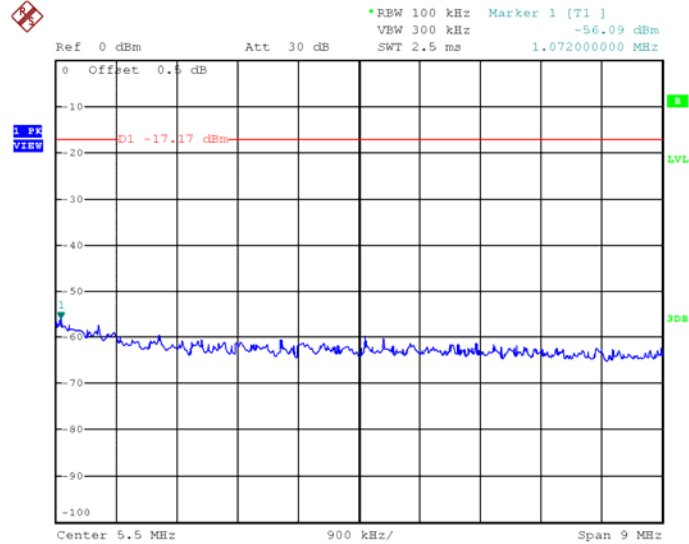

802.11n, Lowest channel, Plot B

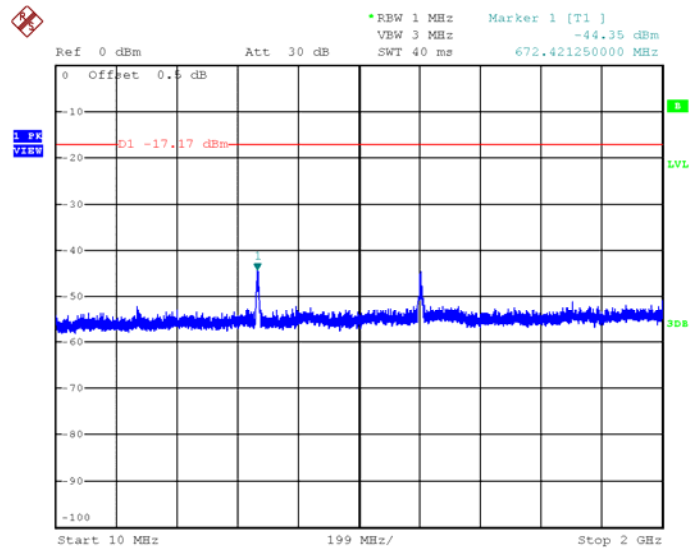


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Lowest channel, Plot C

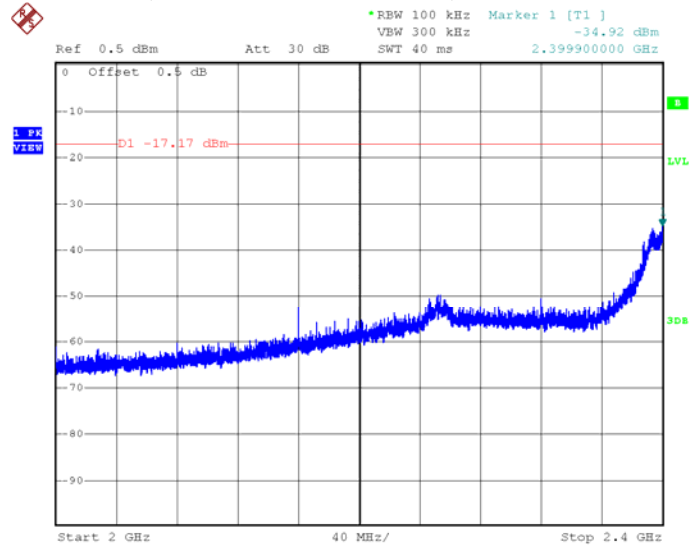

802.11n, Lowest channel, Plot D

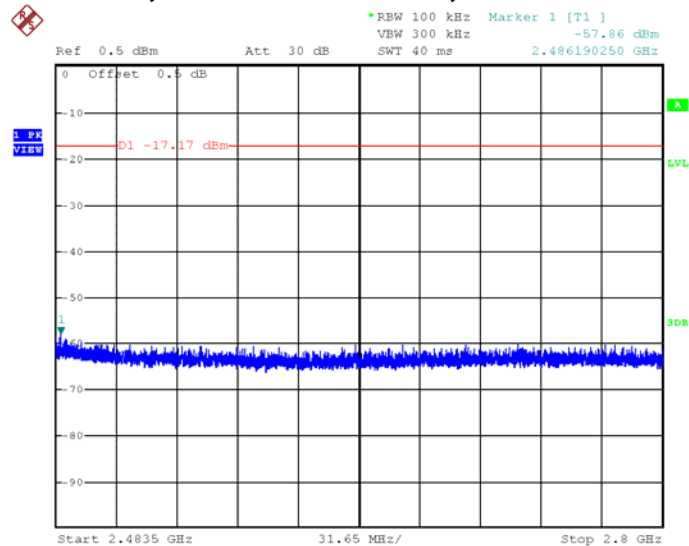


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Lowest channel, Plot E

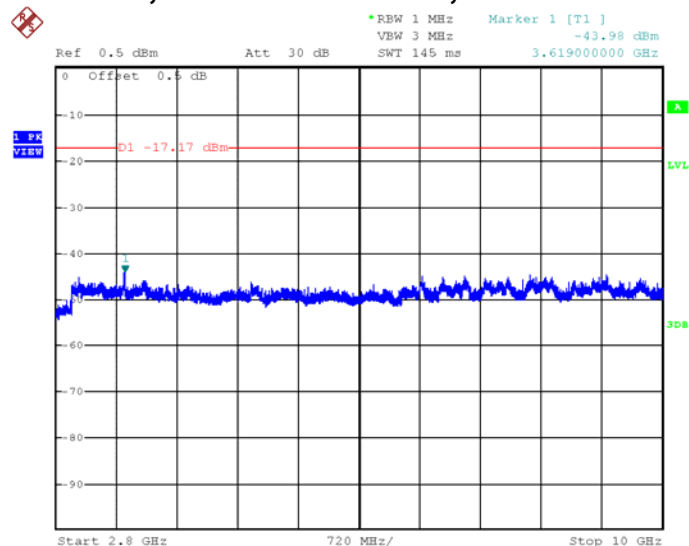

802.11n, Lowest channel, Plot F

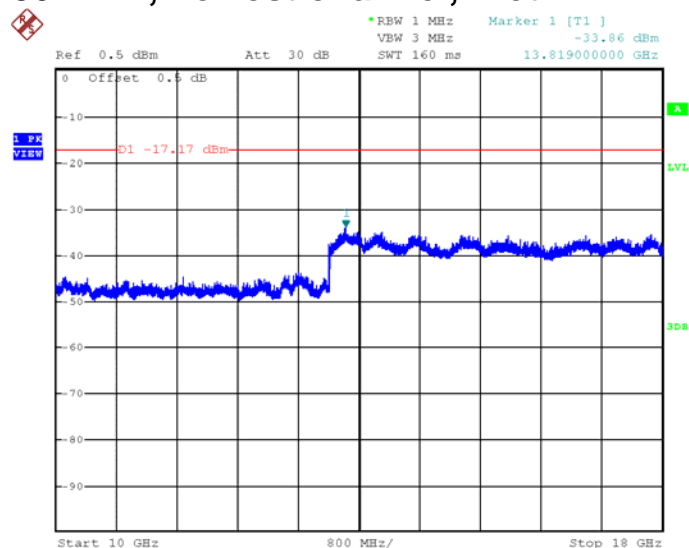


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Plots of out of band conducted emissions (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Lowest channel, Plot G

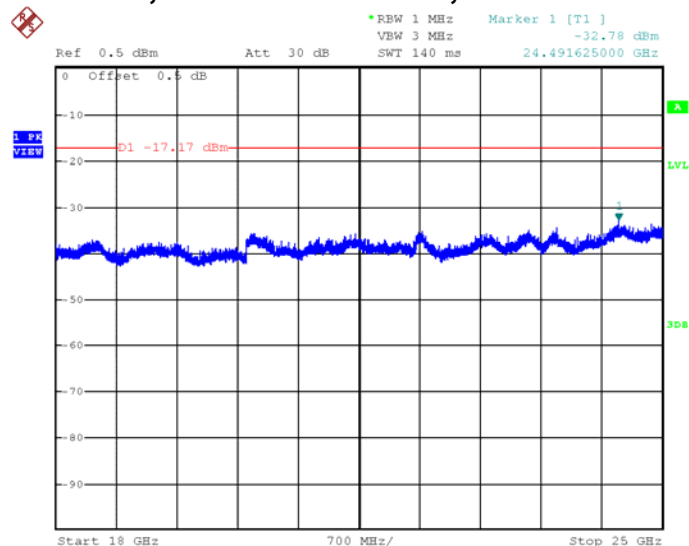


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Middle channel, Plot A

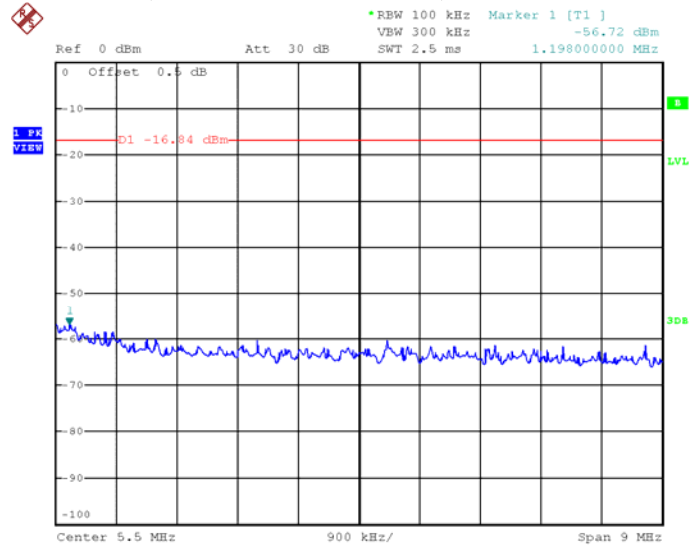

802.11n, Middle channel, Plot B

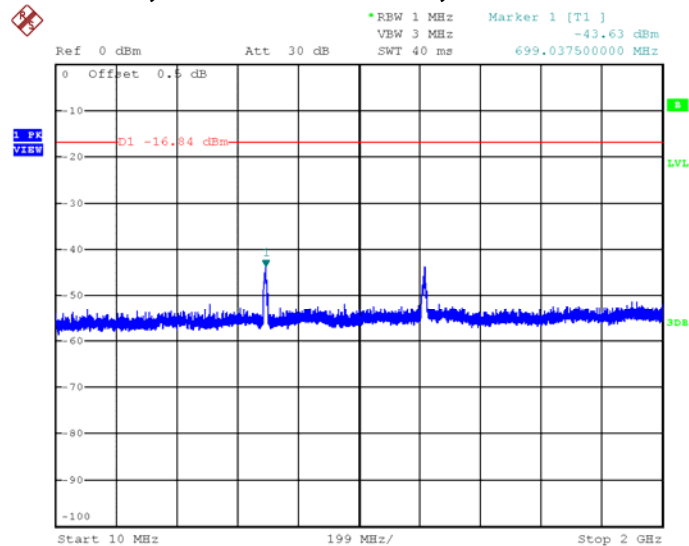


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Middle channel, Plot C

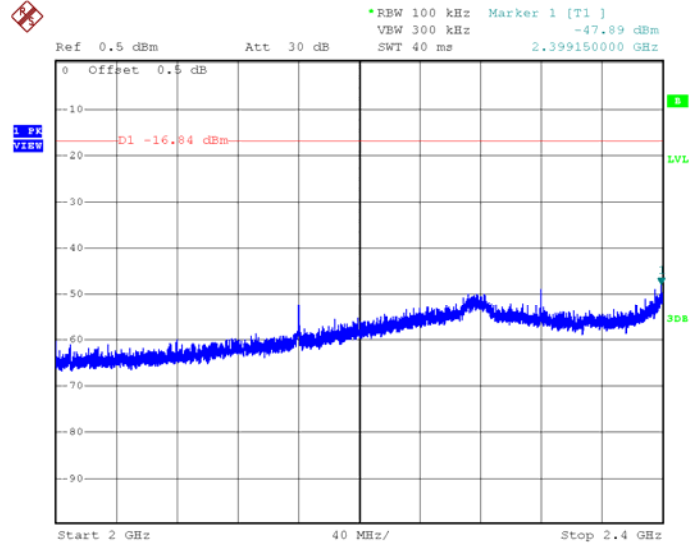

802.11n, Middle channel, Plot D

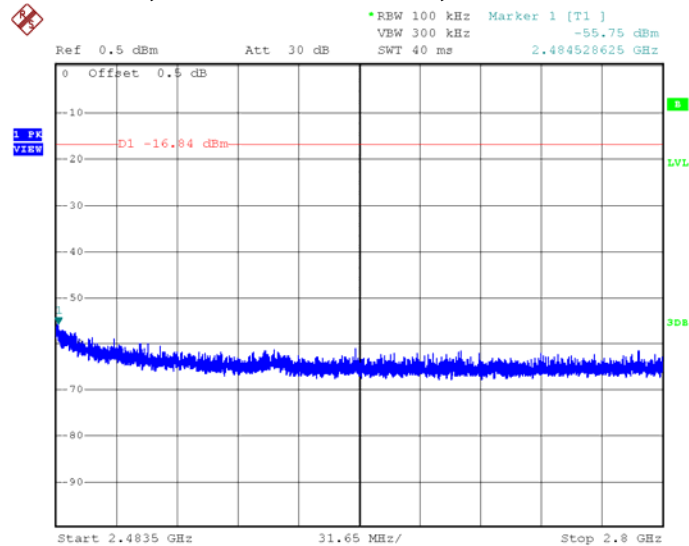


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Middle channel, Plot E

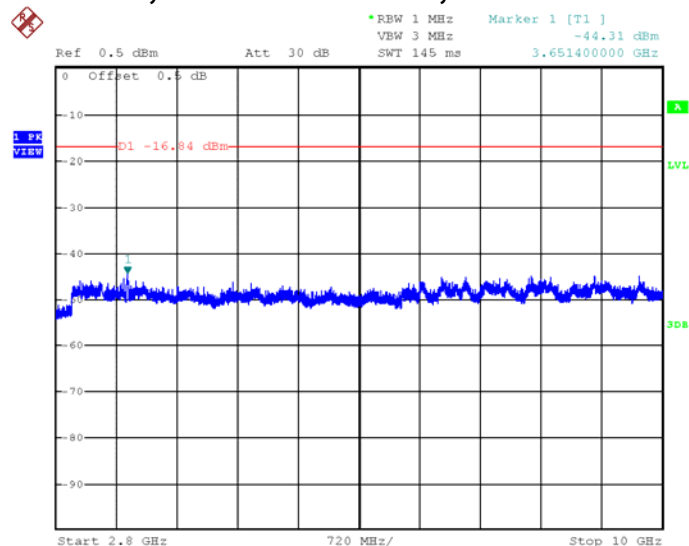

802.11n, Middle channel, Plot F

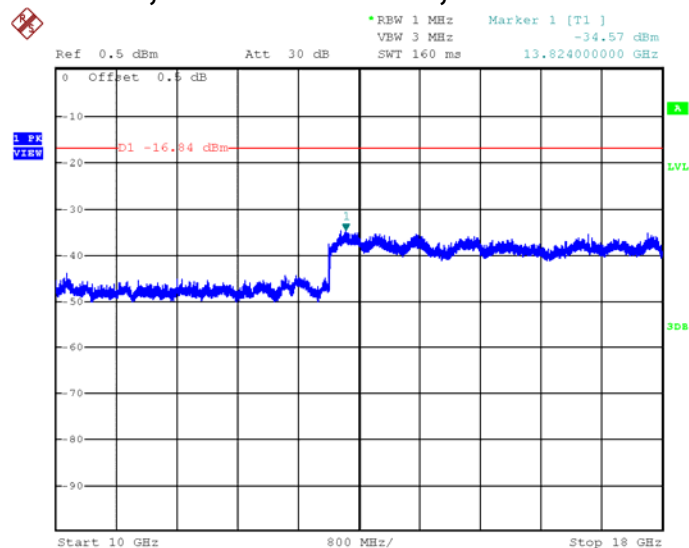


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Plots of out of band conducted emissions (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Middle channel, Plot G

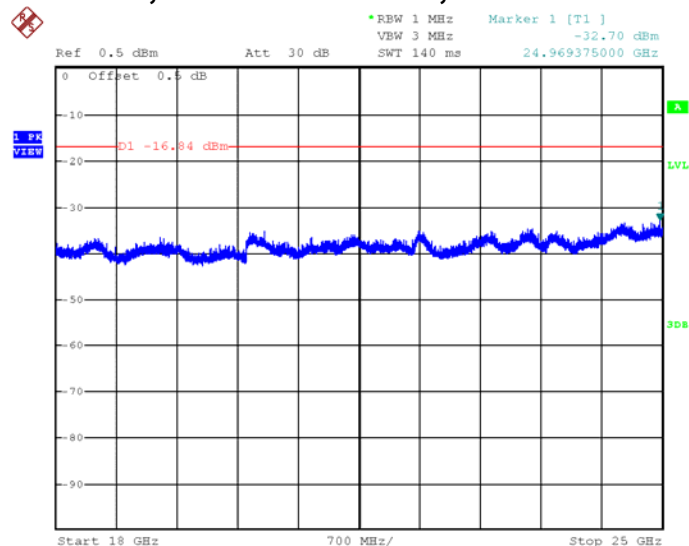


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Highest channel, Plot A

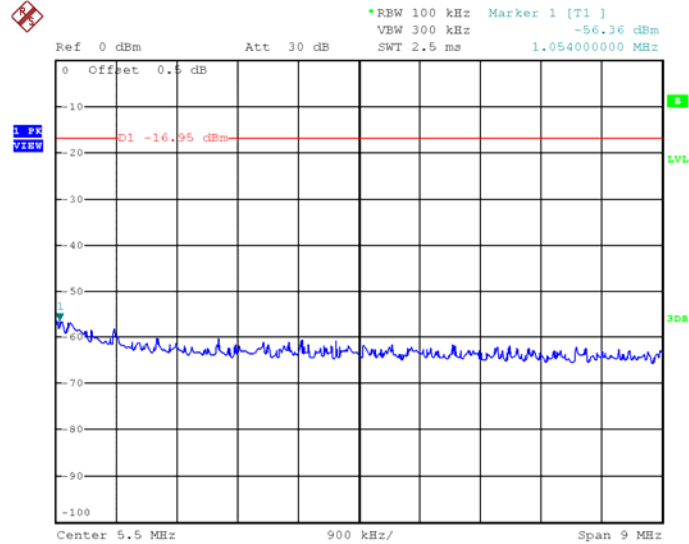

802.11n, Highest channel, Plot B

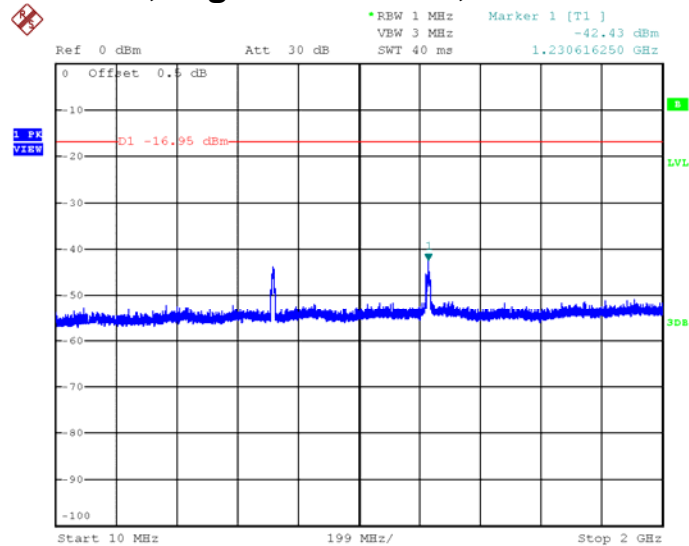


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Highest channel, Plot C

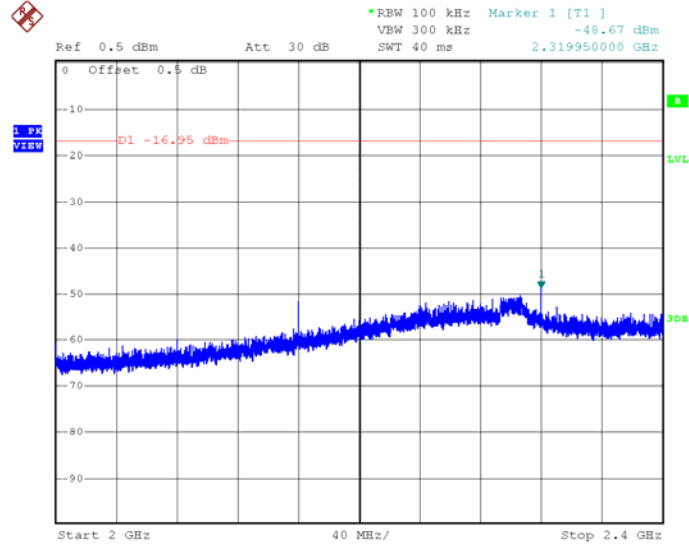

802.11n, Highest channel, Plot D

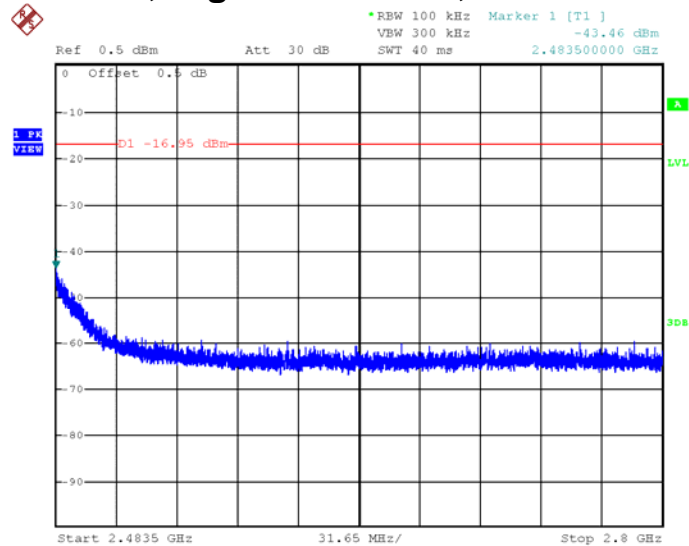


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.




Plots of out of band conducted emissions (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Highest channel, Plot E

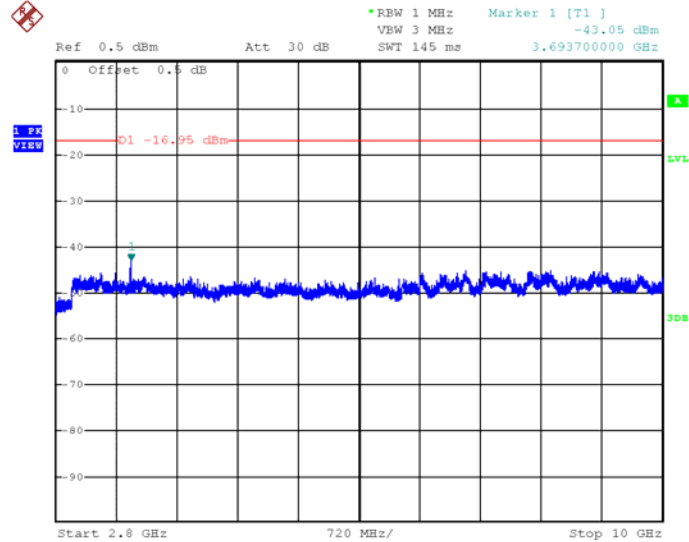

802.11n, Highest channel, Plot F

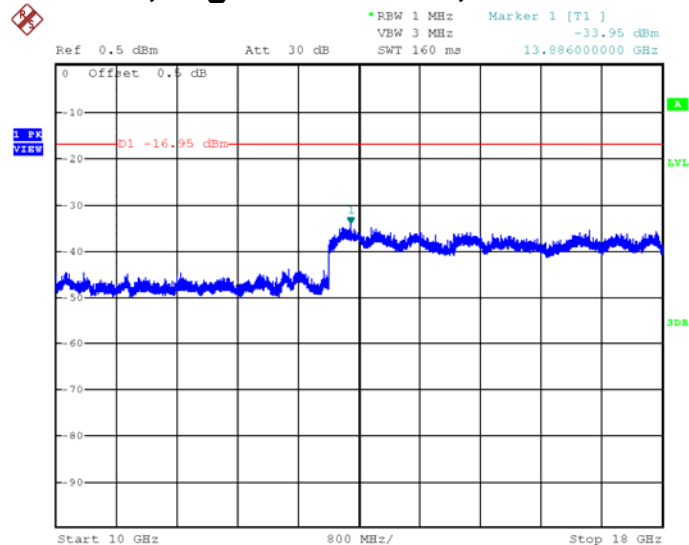


Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Plots of out of band conducted emissions (IEEE 802.11n, OFDM, 6.5 Mbps)

802.11n, Highest channel, Plot G

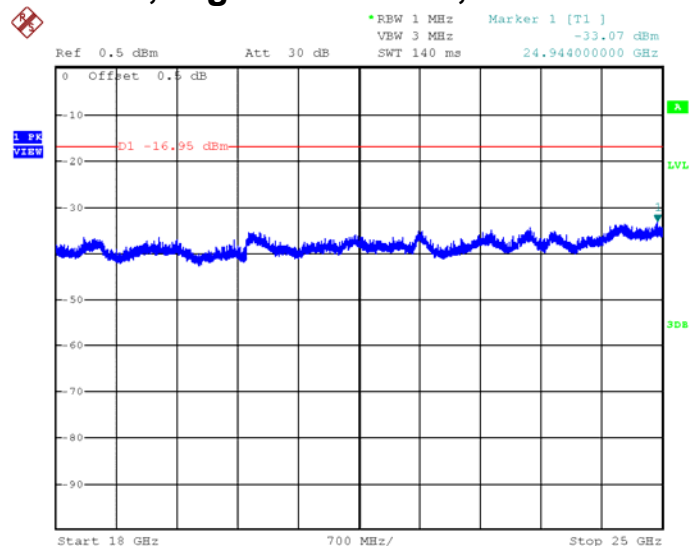

4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB μ V/m. This value in dB μ V/m is converted to its corresponding level in μ V/m.

RA = 62.0 dB μ V
AF = 7.4 dB
CF = 1.6 dB
AG = 29.0 dB
PD = 0.0 dB
AV = -10 dB

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission
at

4924.0MHz

The worst case radiated emission configuration photographs are saved with filename: config photos.pdf

4.6.1 Radiated Emission Data

The data in tables 1-13 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 7.0 dB margin compare with average limit

4.6.2 Radiated Emissions Data

Mode: Lowest Channel 01 - Transmission

Table 1
IEEE 802.11b (DSSS, 1 Mbps)

Radiated Emission Data

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|-------------|
| V | 2390.000 | 50.4 | 33 | 29.4 | 46.8 | 0 | 46.8 | 54.0 | -7.2 |
| H | 4824.000 | 44.5 | 33 | 34.9 | 46.4 | 0 | 46.4 | 54.0 | -7.6 |
| H | 12060.000 | 38.5 | 33 | 40.5 | 46.0 | 0 | 46.0 | 54.0 | -8.0 |
| H | 14472.000 | 38.8 | 33 | 40.0 | 45.8 | 0 | 45.8 | 54.0 | -8.2 |

Remark: Average measurement method is used according to ANSI C63.10.

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| V | 2390.000 | 61.1 | 33 | 29.4 | 57.5 | 74.0 | -16.5 |
| H | 4824.000 | 49.6 | 33 | 34.9 | 51.5 | 74.0 | -22.5 |
| H | 12060.000 | 42.8 | 33 | 40.5 | 50.3 | 74.0 | -23.7 |
| H | 14472.000 | 43.2 | 33 | 40.0 | 50.2 | 74.0 | -23.8 |

Remark: Peak detector is used for the emission measurement.

NOTES:

1. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
2. Negative value in the margin column shows emission below limit.
3. Horn antenna is used for the emission over 1000MHz.
4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

Mode: Middle Channel 06 - Transmission

Table 2
IEEE 802.11b (DSSS, 1 Mbps)

Radiated Emission Data

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|-------------|
| H | 4874.000 | 44.5 | 33 | 34.9 | 46.4 | 0 | 46.4 | 54.0 | -7.6 |
| H | 7311.000 | 41.6 | 33 | 37.9 | 46.5 | 0 | 46.5 | 54.0 | -7.5 |
| H | 12185.000 | 38.6 | 33 | 40.5 | 46.1 | 0 | 46.1 | 54.0 | -7.9 |

Remark: Average measurement method is used according to ANSI C63.10

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| H | 4874.000 | 49.8 | 33 | 34.9 | 51.7 | 74.0 | -22.3 |
| H | 7311.000 | 46.3 | 33 | 37.9 | 51.2 | 74.0 | -22.8 |
| H | 12185.000 | 42.9 | 33 | 40.5 | 50.4 | 74.0 | -23.6 |

Remark: Peak detector is used for the emission measurement.

NOTES:

1. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
2. Negative value in the margin column shows emission below limit.
3. Horn antenna is used for the emission over 1000MHz.
4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

Mode: Highest Channel 11 - Transmission

Table 3
IEEE 802.11b (DSSS, 1 Mbps)

Radiated Emission Data

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|-------------|
| V | 2483.500 | 49.4 | 33 | 29.4 | 45.8 | 0 | 45.8 | 54.0 | -8.2 |
| H | 4924.000 | 44.9 | 33 | 34.9 | 46.8 | 0 | 46.8 | 54.0 | -7.2 |
| H | 7386.000 | 41.6 | 33 | 37.9 | 46.5 | 0 | 46.5 | 54.0 | -7.5 |
| H | 12310.000 | 38.6 | 33 | 40.5 | 46.1 | 0 | 46.1 | 54.0 | -7.9 |

Remark: Average measurement method is used according to ANSI C63.10

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| V | 2483.500 | 60.5 | 33 | 29.4 | 56.9 | 74.0 | -17.1 |
| H | 4924.000 | 49.7 | 33 | 34.9 | 51.6 | 74.0 | -22.4 |
| H | 7386.000 | 46.3 | 33 | 37.9 | 51.2 | 74.0 | -22.8 |
| H | 12310.000 | 42.8 | 33 | 40.5 | 50.3 | 74.0 | -23.7 |

Remark: Peak detector is used for the emission measurement.

NOTES:

1. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
2. Negative value in the margin column shows emission below limit.
3. Horn antenna is used for the emission over 1000MHz.
4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

Mode: Lowest Channel 01 - Transmission

Table 4
IEEE 802.11g (OFDM, 6 Mbps)

Radiated Emission Data

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|-------------|
| V | 2390.000 | 49.5 | 33 | 29.4 | 45.9 | 0 | 45.9 | 54.0 | -8.1 |
| H | 4824.000 | 44.8 | 33 | 34.9 | 46.7 | 0 | 46.7 | 54.0 | -7.3 |
| H | 12060.000 | 38.5 | 33 | 40.5 | 46.0 | 0 | 46.0 | 54.0 | -8.0 |
| H | 14472.000 | 38.6 | 33 | 40.0 | 45.6 | 0 | 45.6 | 54.0 | -8.4 |

Remark: Average measurement method is used according to ANSI C63.10

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|-------------|
| V | 2390.000 | 61.0 | 33 | 29.4 | 57.4 | 74.0 | -16.6 |
| H | 4824.000 | 49.7 | 33 | 34.9 | 51.6 | 74.0 | -22.4 |
| H | 12060.000 | 42.8 | 33 | 40.5 | 50.3 | 74.0 | -23.7 |
| H | 14472.000 | 43.0 | 33 | 40.0 | 50.0 | 74.0 | -24.0 |

Remark: Peak detector is used for the emission measurement.

NOTES:

1. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
2. Negative value in the margin column shows emission below limit.
3. Horn antenna is used for the emission over 1000MHz.
4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

Mode: Middle Channel 06 - Transmission

Table 5
IEEE 802.11g (OFDM, 6 Mbps)

Radiated Emission Data

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|-------------|
| H | 4874.000 | 44.9 | 33 | 34.9 | 46.8 | 0 | 46.8 | 54.0 | -7.2 |
| H | 7311.000 | 41.6 | 33 | 37.9 | 46.5 | 0 | 46.5 | 54.0 | -7.5 |
| H | 12185.000 | 38.6 | 33 | 40.5 | 46.1 | 0 | 46.1 | 54.0 | -7.9 |

Remark: Average measurement method is used according to ANSI C63.10

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| H | 4874.000 | 49.9 | 33 | 34.9 | 51.8 | 74.0 | -22.2 |
| H | 7311.000 | 46.3 | 33 | 37.9 | 51.2 | 74.0 | -22.8 |
| H | 12185.000 | 42.9 | 33 | 40.5 | 50.4 | 74.0 | -23.6 |

Remark: Peak detector is used for the emission measurement.

NOTES:

1. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
2. Negative value in the margin column shows emission below limit.
3. Horn antenna is used for the emission over 1000MHz.
4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

Mode: Highest Channel 11 - Transmission

Table 6
IEEE 802.11g (OFDM, 6 Mbps)

Radiated Emission Data

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|-------------|
| V | 2483.500 | 49.3 | 33 | 29.4 | 45.7 | 0 | 45.7 | 54.0 | -8.3 |
| H | 4924.000 | 44.9 | 33 | 34.9 | 46.8 | 0 | 46.8 | 54.0 | -7.2 |
| H | 7386.000 | 41.6 | 33 | 37.9 | 46.5 | 0 | 46.5 | 54.0 | -7.5 |
| H | 12310.000 | 38.8 | 33 | 40.5 | 46.3 | 0 | 46.3 | 54.0 | -7.7 |

Remark: Average measurement method is used according to ANSI C63.10

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|-------------|
| V | 2483.500 | 60.5 | 33 | 29.4 | 56.9 | 74.0 | -17.1 |
| H | 4924.000 | 49.7 | 33 | 34.9 | 51.6 | 74.0 | -22.4 |
| H | 7386.000 | 46.3 | 33 | 37.9 | 51.2 | 74.0 | -22.8 |
| H | 12310.000 | 43.0 | 33 | 40.5 | 50.5 | 74.0 | -23.5 |

Remark: Peak detector is used for the emission measurement.

NOTES:

1. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
2. Negative value in the margin column shows emission below limit.
3. Horn antenna is used for the emission over 1000MHz.
4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

Mode: Lowest Channel 01 - Transmission

Table 7
IEEE 802.11n (DSSS, 6.5 Mbps)

Radiated Emission Data

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|-------------|
| V | 2390.000 | 50.1 | 33 | 29.4 | 46.5 | 0 | 46.5 | 54.0 | -7.5 |
| H | 4824.000 | 44.9 | 33 | 34.9 | 46.8 | 0 | 46.8 | 54.0 | -7.2 |
| H | 12060.000 | 38.5 | 33 | 40.5 | 46.0 | 0 | 46.0 | 54.0 | -8.0 |
| H | 14472.000 | 38.9 | 33 | 40.0 | 45.9 | 0 | 45.9 | 54.0 | -8.1 |

Remark: Average measurement method is used according to ANSI C63.10

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|-----------------|----------------|-------------------|---------------------|---------------------------|---------------------------|-------------|
| V | 2390.000 | 60.9 | 33 | 29.4 | 57.3 | 74.0 | -16.7 |
| H | 4824.000 | 49.6 | 33 | 34.9 | 51.5 | 74.0 | -22.5 |
| H | 12060.000 | 42.8 | 33 | 40.5 | 50.3 | 74.0 | -23.7 |
| H | 14472.000 | 43.1 | 33 | 40.0 | 50.1 | 74.0 | -23.9 |

Remark: Peak detector is used for the emission measurement.

NOTES:

1. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
2. Negative value in the margin column shows emission below limit.
3. Horn antenna is used for the emission over 1000MHz.
4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

Mode: Middle Channel 06 - Transmission

Table 8
IEEE 802.11n (DSSS, 6.5 Mbps)

Radiated Emission Data

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|-------------|
| H | 4874.000 | 44.6 | 33 | 34.9 | 46.5 | 0 | 46.5 | 54.0 | -7.5 |
| H | 7311.000 | 41.5 | 33 | 37.9 | 46.4 | 0 | 46.4 | 54.0 | -7.6 |
| H | 12185.000 | 38.6 | 33 | 40.5 | 46.1 | 0 | 46.1 | 54.0 | -7.9 |

Remark: Average measurement method is used according to ANSI C63.10

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| H | 4874.000 | 49.8 | 33 | 34.9 | 51.7 | 74.0 | -22.3 |
| H | 7311.000 | 46.3 | 33 | 37.9 | 51.2 | 74.0 | -22.8 |
| H | 12185.000 | 42.9 | 33 | 40.5 | 50.4 | 74.0 | -23.6 |

Remark: Peak detector is used for the emission measurement.

NOTES:

1. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
2. Negative value in the margin column shows emission below limit.
3. Horn antenna is used for the emission over 1000MHz.
4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

Mode: Highest Channel 11 - Transmission

Table 9
IEEE 802.11n (DSSS, 6.5 Mbps)

Radiated Emission Data

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|-------------|
| V | 2483.500 | 48.8 | 33 | 29.4 | 45.2 | 0 | 45.2 | 54.0 | -8.8 |
| H | 4924.000 | 45.1 | 33 | 34.9 | 47.0 | 0 | 47.0 | 54.0 | -7.0 |
| H | 7386.000 | 41.9 | 33 | 37.9 | 46.8 | 0 | 46.8 | 54.0 | -7.2 |
| H | 12310.000 | 38.8 | 33 | 40.5 | 46.3 | 0 | 46.3 | 54.0 | -7.7 |

Remark: Average measurement method is used according to ANSI C63.10

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB) |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| V | 2483.500 | 60.3 | 33 | 29.4 | 56.7 | 74.0 | -17.3 |
| H | 4924.000 | 49.9 | 33 | 34.9 | 51.8 | 74.0 | -22.2 |
| H | 7386.000 | 46.4 | 33 | 37.9 | 51.3 | 74.0 | -22.7 |
| H | 12310.000 | 43.0 | 33 | 40.5 | 50.5 | 74.0 | -23.5 |

Remark: Peak detector is used for the emission measurement.

NOTES:

1. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
2. Negative value in the margin column shows emission below limit.
3. Horn antenna is used for the emission over 1000MHz.
4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.

4.6.3 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.

4.7 AC Power Line Conducted Emission

- ☐ Not applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

4.7.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration
at

0.2895 MHz

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

4.7.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance


Passed by 4.13 dB margin compare with quasi-peak limit

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Worst Case: WiFi Transmission -EUT's AC Mains

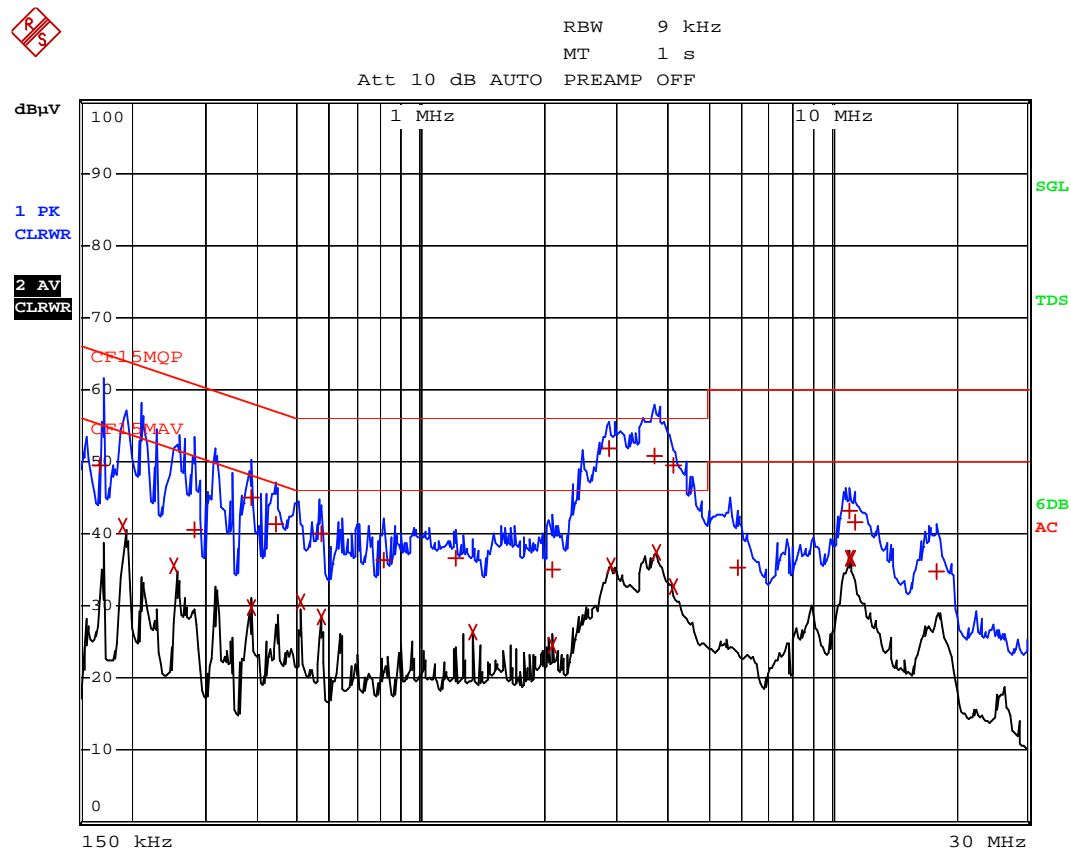

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Worst Case: WiFi Transmission -EUT's AC Mains

| EDIT PEAK LIST (Final Measurement Results) | | | | |
|--------------------------------------------|-----------|------------|----------------|--|
| Trace1: | CF15MQP | | | |
| Trace2: | CF15MAV | | | |
| Trace3: | --- | | | |
| TRACE | FREQUENCY | LEVEL dBμV | DELTA LIMIT dB | |
| 1 Quasi Peak 168 kHz | | 49.48 N | -15.57 | |
| 2 CISPR Average190.5 kHz | | 40.96 L1 | -13.04 | |
| 2 CISPR Average253.5 kHz | | 35.66 L1 | -15.97 | |
| 1 Quasi Peak 280.5 kHz | | 40.58 L1 | -20.21 | |
| 1 Quasi Peak 384 kHz | | 45.04 L1 | -13.14 | |
| 2 CISPR Average384 kHz | | 29.71 L1 | -18.47 | |
| 1 Quasi Peak 442.5 kHz | | 41.26 L1 | -15.75 | |
| 2 CISPR Average510 kHz | | 30.54 L1 | -15.45 | |
| 1 Quasi Peak 573 kHz | | 40.03 N | -15.96 | |
| 2 CISPR Average573 kHz | | 28.56 L1 | -17.43 | |
| 1 Quasi Peak 816 kHz | | 36.34 N | -19.65 | |
| 1 Quasi Peak 1.212 MHz | | 36.63 L1 | -19.36 | |
| 2 CISPR Average1.338 MHz | | 26.47 L1 | -19.52 | |
| 1 Quasi Peak 2.103 MHz | | 35.00 L1 | -21.00 | |
| 2 CISPR Average2.103 MHz | | 24.44 L1 | -21.55 | |
| 1 Quasi Peak 2.895 MHz | | 51.86 L1 | -4.13 | |
| 2 CISPR Average2.913 MHz | | 35.69 L1 | -10.30 | |
| 1 Quasi Peak 3.7095 MHz | | 50.78 N | -5.21 | |
| 2 CISPR Average3.75 MHz | | 37.45 L1 | -8.54 | |
| 2 CISPR Average4.119 MHz | | 32.66 L1 | -13.33 | |

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



Worst Case: WiFi Transmission -EUT's AC Mains

| EDIT PEAK LIST (Final Measurement Results) | | | | |
|--------------------------------------------|-------------|------------|----|----------------|
| Trace1: | CF15MQP | | | |
| Trace2: | CF15MAV | | | |
| Trace3: | --- | | | |
| TRACE | FREQUENCY | LEVEL dBμV | | DELTA LIMIT dB |
| 1 Quasi Peak | 4.137 MHz | 49.47 | L1 | -6.53 |
| 1 Quasi Peak | 5.901 MHz | 35.23 | L1 | -24.76 |
| 1 Quasi Peak | 11.0805 MHz | 43.27 | L1 | -16.72 |
| 2 CISPR Average | 11.0805 MHz | 36.62 | L1 | -13.37 |
| 2 CISPR Average | 11.1435 MHz | 36.66 | L1 | -13.33 |
| 1 Quasi Peak | 11.463 MHz | 41.58 | L1 | -18.41 |
| 1 Quasi Peak | 18.0825 MHz | 34.86 | L1 | -25.13 |

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



4.8 Radio Frequency Radiation Exposure

EUT is subject to the radio frequency exposure requirements specified in FCC Rule §§ 1.1307. It shall be considered to operate in a “general population / uncontrolled” environment.

- ☐ Output power is less than the applicable low threshold from SAR evaluation.
The evaluation calculation results are saved with filename: RF exposure info.pdf
- ☐ EUT was evaluated for Maximum Permissible Exposure (MPE) evaluation compliance according to OET Bulletin 65, Supplement C (Edition 01-01). The evaluation calculation results are saved with filename: RF exposure info.pdf
- ☒ EUT was evaluated for Specific Absorption Rate (SAR) evaluation compliance according to OET Bulletin 65, Supplement C (Edition 01-01). It is in compliance with the SAR evaluation requirements. A SAR test report was submitted at same time and saved as SAR Report.pdf

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



EXHIBIT 5
EQUIPMENT LIST

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



5.0 Equipment List

1) Radiated Emissions Test

| | | | |
|----------------------|-------------------|----------------------|-------------------|
| Equipment | Biconical Antenna | Log Periodic Antenna | EMI Test Receiver |
| Registration No. | EW-0571 | EW-0446 | EW-2500 |
| Manufacturer | EMCO | EMCO | ROHDESCHWARZ |
| Model No. | 3104C | 3146 | ESCI |
| Calibration Date | Apr. 05, 2012 | Apr. 30, 2013 | Mar. 22, 2013 |
| Calibration Due Date | Oct. 05, 2013 | Oct. 30, 2014 | Feb. 28, 2014 |

| | | | |
|----------------------|----------------------------|----------------------------|-------------------|
| Equipment | 14m Double Shield RF Cable | 14m Double Shield RF Cable | Spectrum Analyzer |
| Registration No. | EW-2528 | EW-2074 | EW-2249 |
| Manufacturer | RADIAL | RADIAL | R&S |
| Model No. | nm / br5d / sma 14m | N(m)-RG142-BNC(m) L= 14M | FSP30 |
| Calibration Date | Dec. 14, 2012 | Dec. 14, 2012 | Oct. 04, 2012 |
| Calibration Due Date | Dec. 14, 2013 | Dec. 14, 2013 | Oct. 04, 2013 |

| | | | |
|----------------------|-----------------------------|---------------------|----------------------------|
| Equipment | Double Ridged Guide Antenna | Active Loop H-Field | 12m Double Shield RF Cable |
| Registration No. | EW-1015 | EW-0191 | EW-2774 |
| Manufacturer | EMCO | EMCO | GREATBILLION |
| Model No. | 3115 | 6502 | SMA m-m ra 12m 40G outdoor |
| Calibration Date | Mar. 05, 2013 | Jan 30, 2013 | Oct. 30, 2012 |
| Calibration Due Date | Sep. 05, 2014 | Jul 30, 2014 | Oct. 30, 2013 |

| | |
|----------------------|-----------------|
| Equipment | Pre-Amplifier |
| Registration No. | EW-2354 |
| Manufacturer | MITEQ |
| Model No. | 12002600-30-10P |
| Calibration Date | Sep. 22, 2012 |
| Calibration Due Date | Sep. 22, 2013 |

Issuing Laboratory:
Intertek Testing Services Hong Kong Limited

Hong Kong Accreditation Service (HKAS) has accredited this laboratory under the Hong Kong Laboratory Accreditation Scheme (HOKLAS) for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. The results shown in this report were determined by this laboratory in accordance with its terms of accreditation.



2) Conducted Emissions Test

| | | |
|----------------------|-------------------|---------------|
| Equipment | EMI Test Receiver | LISN |
| Registration No. | EW-2500 | EW-2874 |
| Manufacturer | ROHDESCHWARZ | R&S |
| Model No. | ESCI | ENV-216 |
| Calibration Date | Mar. 22, 2013 | Aug. 15, 2012 |
| Calibration Due Date | Feb. 28, 2014 | Aug. 15, 2013 |

3) Conductive Measurement Test

| | |
|----------------------|-------------------|
| Equipment | Spectrum Analyzer |
| Registration No. | EW-2249 |
| Manufacturer | R&S |
| Model No. | FSP30 |
| Calibration Date | Oct. 04, 2012 |
| Calibration Due Date | Oct. 04, 2013 |

END OF TEST REPORT