



FCC 47 CFR PART 15 SUBPART C

for

Bluetooth headset

Model: OP0118-13-HP/BM-880

Brand: N/A

Test Report Number:

C130509Z01-RP1

Issued for

Oregon Scientific Global Distribution Limited

**Block C, 9/F., Kaiser Estate, Phase 1, 41 Man Yue Street, Hunghom,
Kowloon, Hong Kong**

Issued by:

COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.

**No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,
Guan Lan Town, Baoan District, Shenzhen, China**

TEL: 86-755-28055000

FAX: 86-755-28055221

Issued Date: June 26, 2013



TESTING CERT #2861.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test result of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	C130509Z01-RP1	Initial Issue	ALL	Anna Liu



TABLE OF CONTENTS

1	TEST CERTIFICATION	4
2	EUT DESCRIPTION	5
3	TEST METHODOLOGY	6
3.1.	DESCRIPTION OF TEST MODES	6
4	TEST METHODOLOGY	7
4.1.	EUT EXERCISE	7
4.2.	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
5	INSTRUMENT CALIBRATION	8
6	SETUP OF EQUIPMENT UNDER TEST	8
6.1.	DESCRIPTION OF SUPPORT UNITS	8
6.2.	CONFIGURATION OF SYSTEM UNDER TEST	8
7	FACILITIES AND ACCREDITATIONS	9
7.1.	FACILITIES	9
7.2.	ACCREDITATIONS	9
7.3.	MEASUREMENT UNCERTAINTY	9
8	FCC PART 15.249 REQUIREMENTS	10
8.1.	BAND EDGES MEASUREMENT	10
8.2.	POWER LINE CONDUCTED EMISSIONS MEASUREMENT	20
8.3.	SPURIOUS EMISSIONS MEASUREMENT	24



1 TEST CERTIFICATION

Product	Bluetooth headset
Model	OP0118-13-HP/BM-880
Brand	N/A
Tested	May 9~June 25, 2013
Applicant	Oregon Scientific Global Distribution Limited Block C, 9/F., Kaiser Estate, Phase 1, 41 Man Yue Street, Hunghom, Kowloon, Hong Kong
Manufacturer	iLike Electronics Co., Ltd Industrial Areas of iLike, Ju Ling old village, Da Shui Keng, Guanlan, Longhua New District, Shenzhen. China

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted
DEVIATION FROM APPLICABLE STANDARD	
None	

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.249.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Tom Gan
Supervisor of EMC Dept.
Compliance Certification Service Inc.

Ruby Zhang
Supervisor of Report Dept.
Compliance Certification Service Inc.



2 EUT DESCRIPTION

Product	Bluetooth headset
Model Number	OP0118-13-HP/BM-880
Trade Name	N/A
Model Discrepancy	Just the model name are different.
Identify Number	C130509Z01-RP1
Power Supply	DC3.7V Supplied by the Battery or DC5V Supplied by the PC
Frequency Range	2402 ~ 2480 MHz
Transmit Power	Peak: 92.09dBuV/m (Max.) Average: 77.25dBuV/m (Max.)
Modulation Technique	FHSS (GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8DPSK for 3Mbps)
Number of Channels	79 Channels
Antenna Specification	PCB antenna with 1dBi gain(Max)
Temperature Range	-25°C ~ +55°C

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: YPG-011813HP filing to comply with Section 15.207, 15.209 and 15.249 of the FCC Part 15, Subpart C Rules.



3 TEST METHODOLOGY

3.1. DESCRIPTION OF TEST MODES

The EUT had been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

The following test mode(s) were scanned during the preliminary test below 1G:

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Charging + Play music	<input checked="" type="checkbox"/>
Radiated Emission	Mode 1: TX	<input checked="" type="checkbox"/>

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

Channel Low (2402MHz), Channel Mid (2441MHz) and Channel High (2480MHz) were chosen for the final testing.

The field strength of spurious radiation emission was measured in the following position: EUT stand-up position (Y mode) and lie-down position (X, Z mode) The following data show only the worst case setup.

The worst case (X axis) was reported.



4 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4:2009 and FCC CFR 15.209 and 15.249.

4.1. EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.209,15.249 under the FCC Rules Part 15 Subpart C.

4.2. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



5 INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

6 SETUP OF EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	PC	780	14FEB5EC7DE E	DoC	DELL	N/A	Unshielded, 1.80m
2	Keyboard	SK-8115	CN0DJ3317161 6918076Q	DoC	DELL	Shielded, 2.00m	N/A
3	Mouse	WB365PA	N/A	DoC	DELL	Shielded, 1.46m	N/A
4	Modem	MODEM14 14	9013594	DoC	ACEEX	Shielded, 1.50m	Unshielded, 2.00m
5	Printer	P310B	DLRE217030	DoC	EPSON	Shielded, 1.20m	Unshielded, 2.00m
6	Monitor	19CE830L ED	F0911925	DOC	SANYO	Unshielded, 1.50m	Unshielded, 1.50m

Note:

- 1) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

6.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



7 FACILITIES AND ACCREDITATIONS

7.1. FACILITIES

All measurement facilities used to collect the measurement data are located at **No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.4:2009, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

7.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-3478, R-3135, T-652, G-642)
Canada	INDUSTRY CANADA
Taiwan	BSMI
Norway	Nemko

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

7.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



8 FCC PART 15.249 REQUIREMENTS

8.1. BAND EDGES MEASUREMENT

LIMIT

1. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

2. As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.
3. As shown in Section 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.


MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2013	03/18/2014
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2013	03/18/2014
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	06/21/2013	06/21/2014
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/02/2013	03/01/2014
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/02/2013	03/01/2014
Loop Antenna	A、R、A	PLA-1030/B	1029	03/23/2013	03/23/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	03/04/2013	03/03/2014
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Remark: Each piece of equipment is scheduled for calibration once a year.



TEST CONFIGURATION

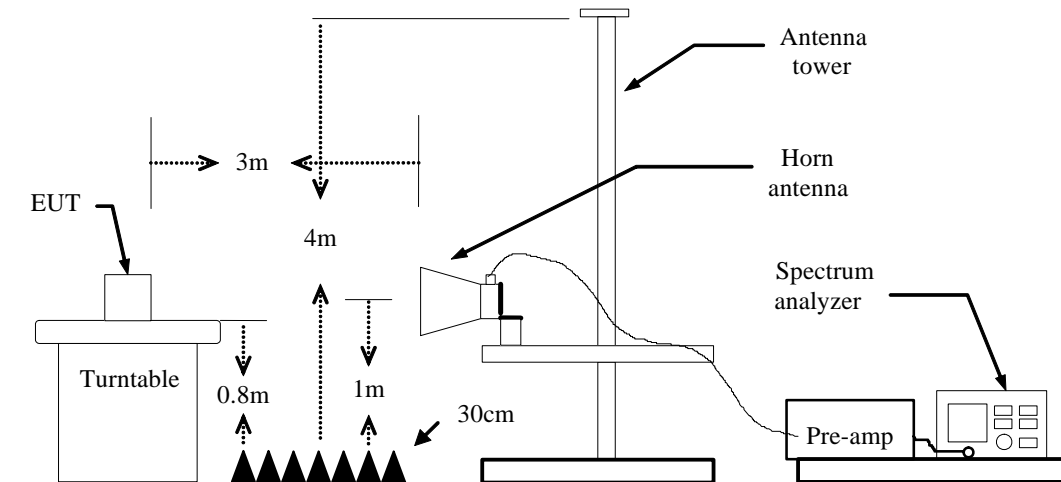

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=510Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.




Test Data(GFSK)

Band Edges (CH-Low)


Detector mode: Peak

Polarity: Vertical

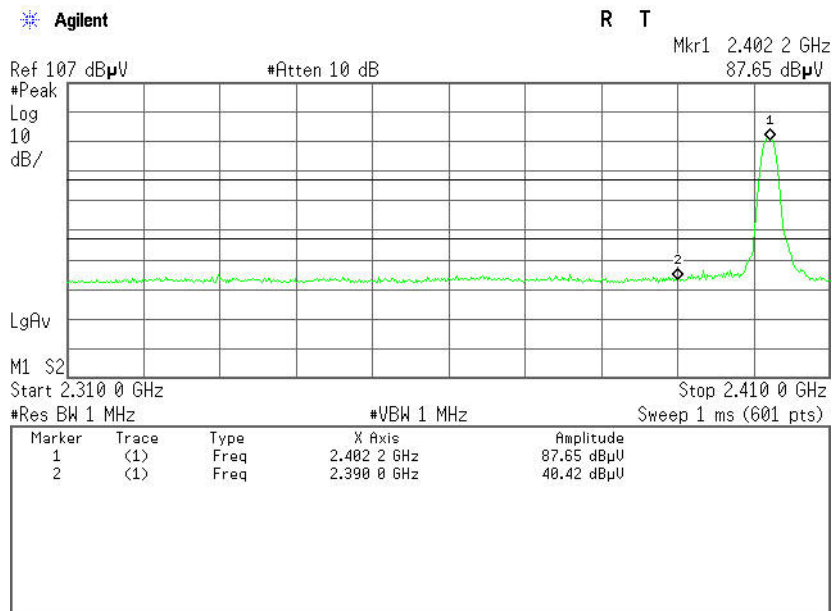

Detector mode: Average


Polarity: Vertical

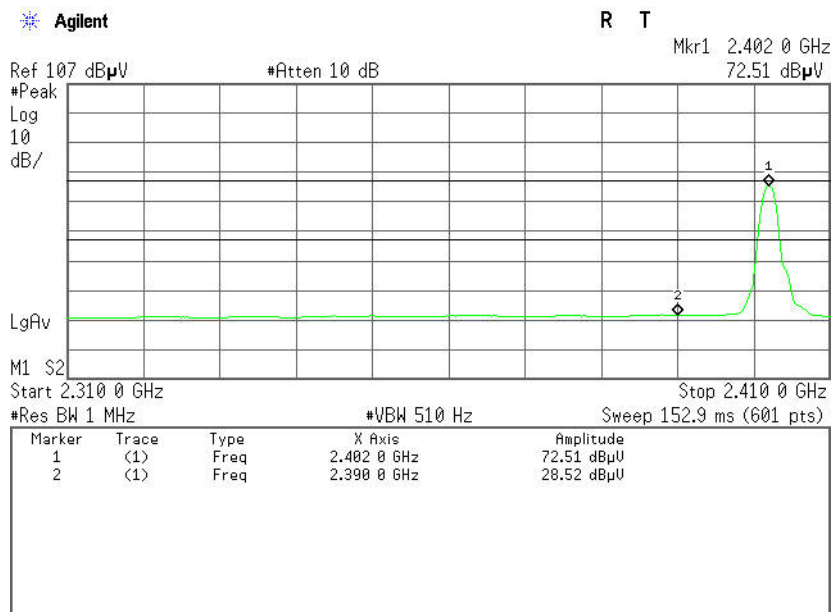




Detector mode: Peak

Polarity: Horizontal

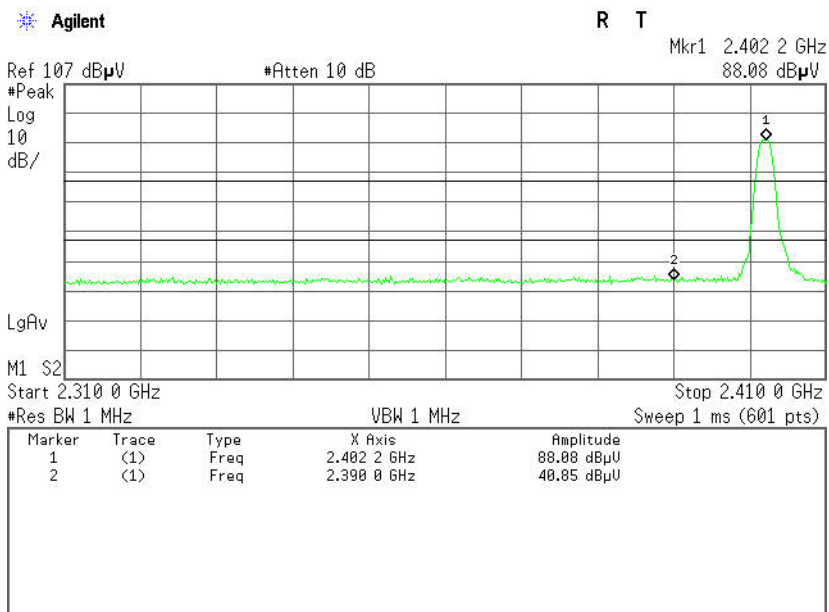

Detector mode: Average

Polarity: Horizontal

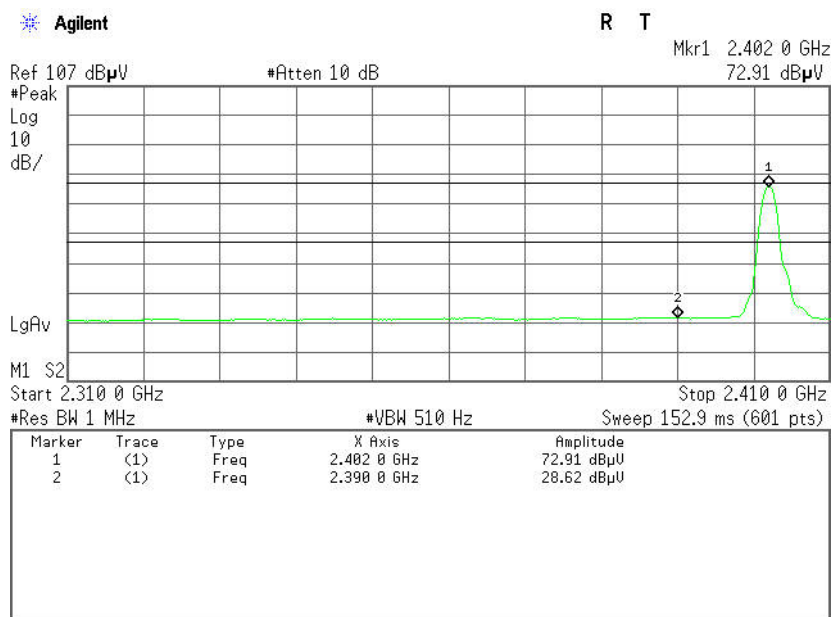




Band Edges (CH-High)


Detector mode: Peak

Polarity: Vertical

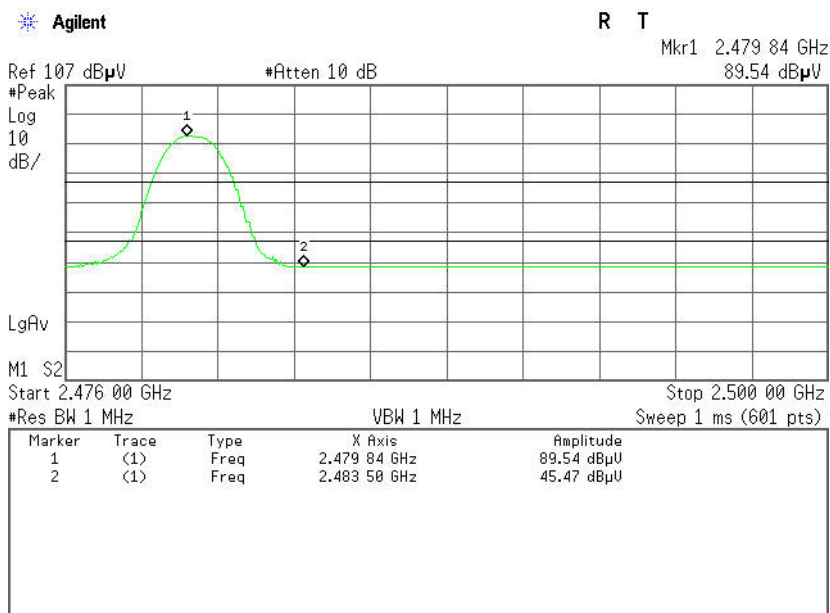

Detector mode: Average


Polarity: Vertical

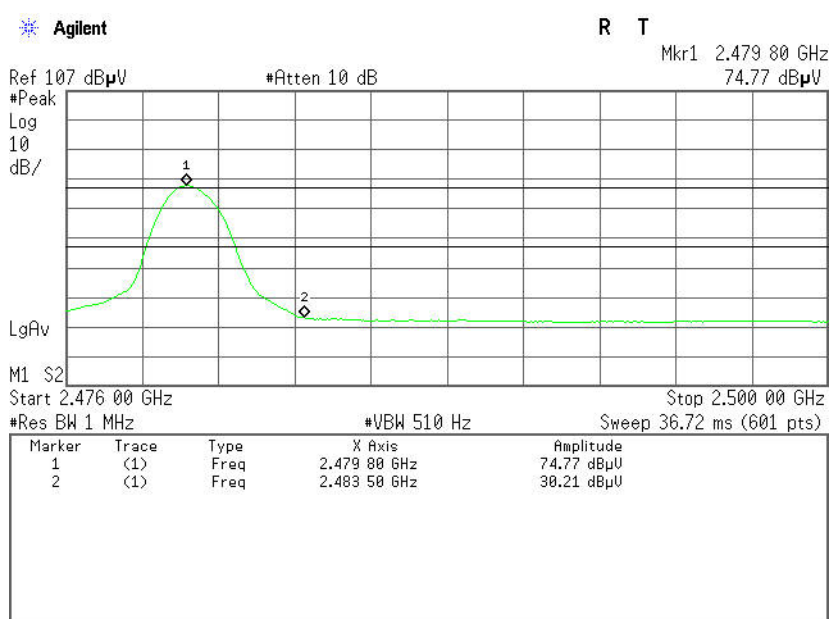




Detector mode: Peak

Polarity: Horizontal

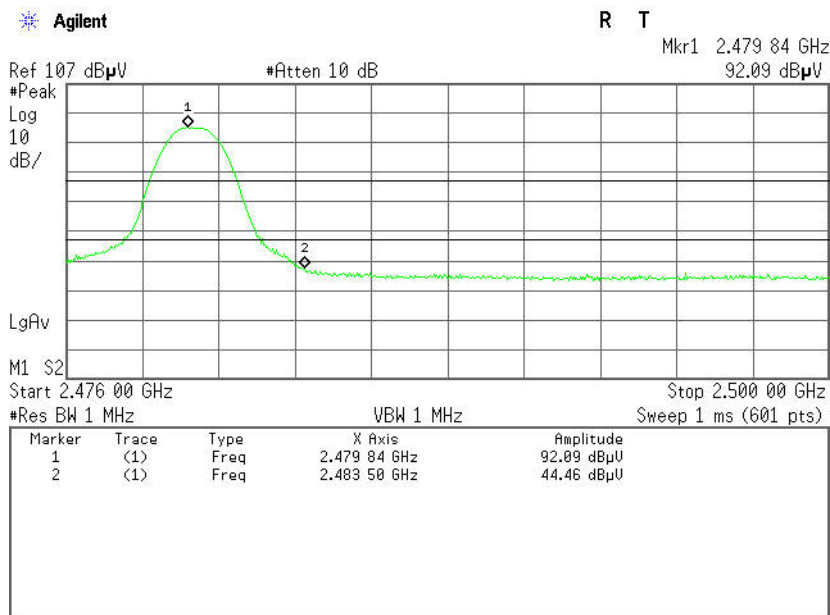

Detector mode: Average

Polarity: Horizontal

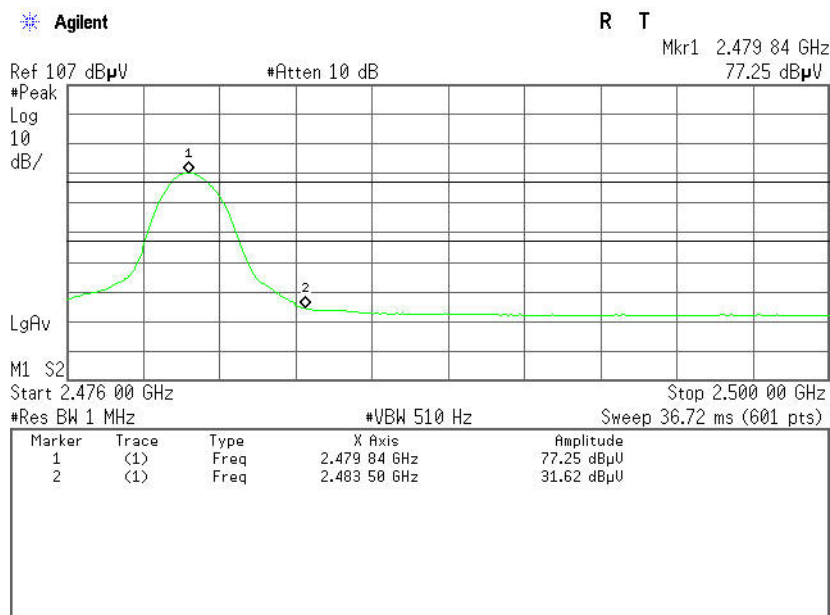




Test Data (8DPSK)

Band Edges (CH-Low)


Detector mode: Peak

Polarity: Vertical

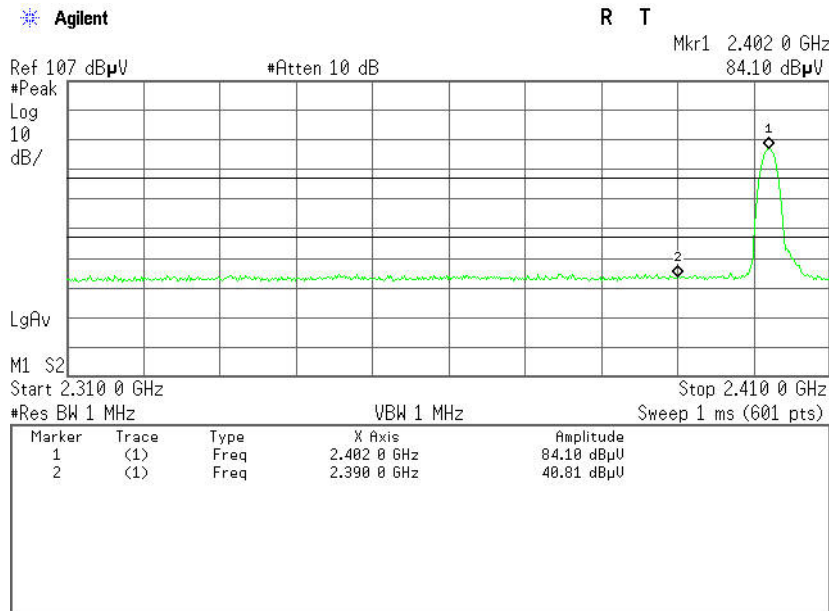

Detector mode: Average


Polarity: Vertical

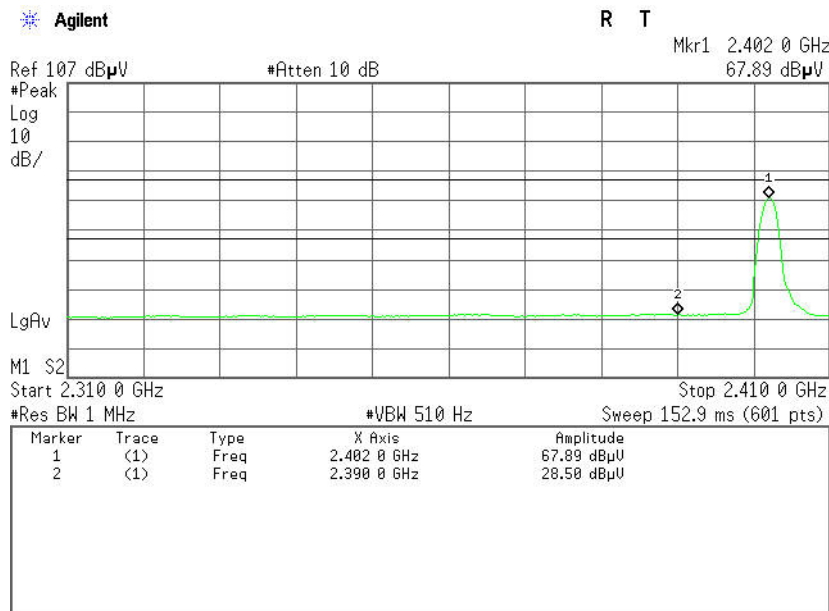




Detector mode: Peak

Polarity: Horizontal

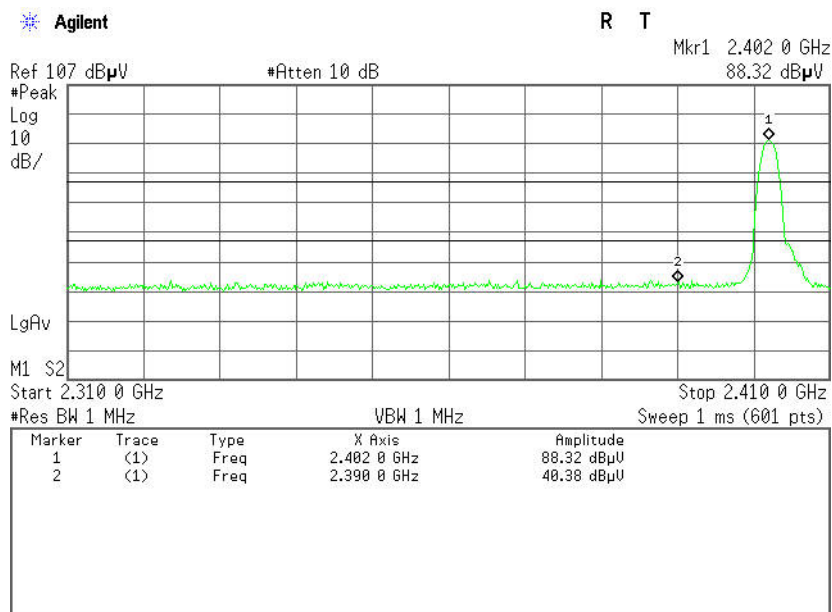

Detector mode: Average

Polarity: Horizontal

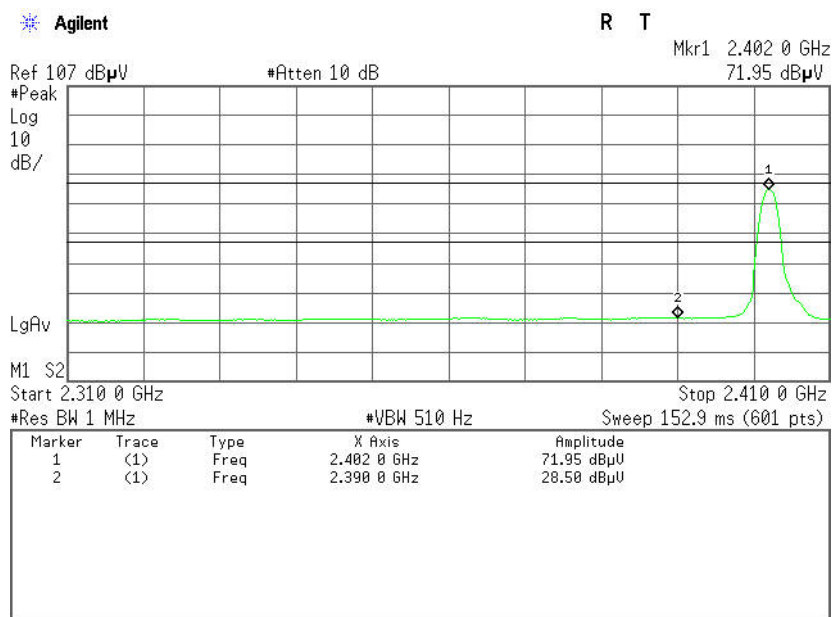




Band Edges (CH-High)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

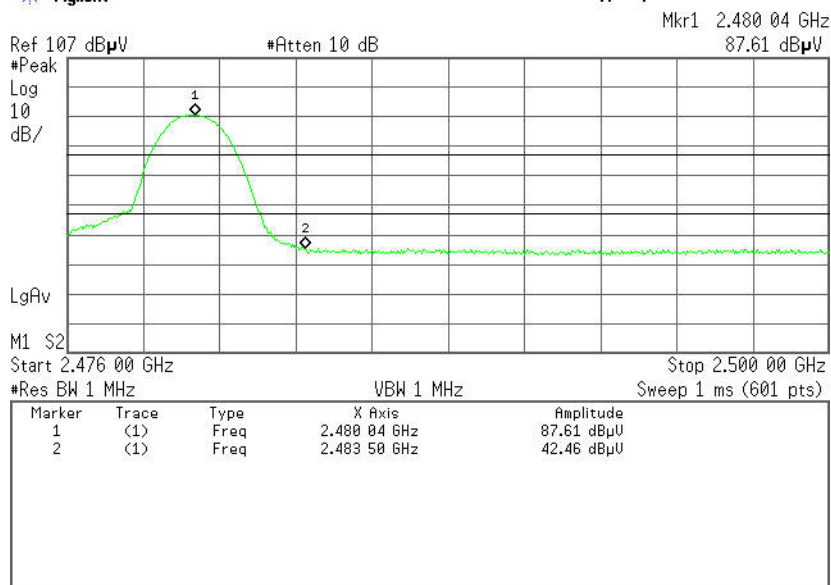


Detector mode: Average

Polarity: Vertical

Agilent


R T

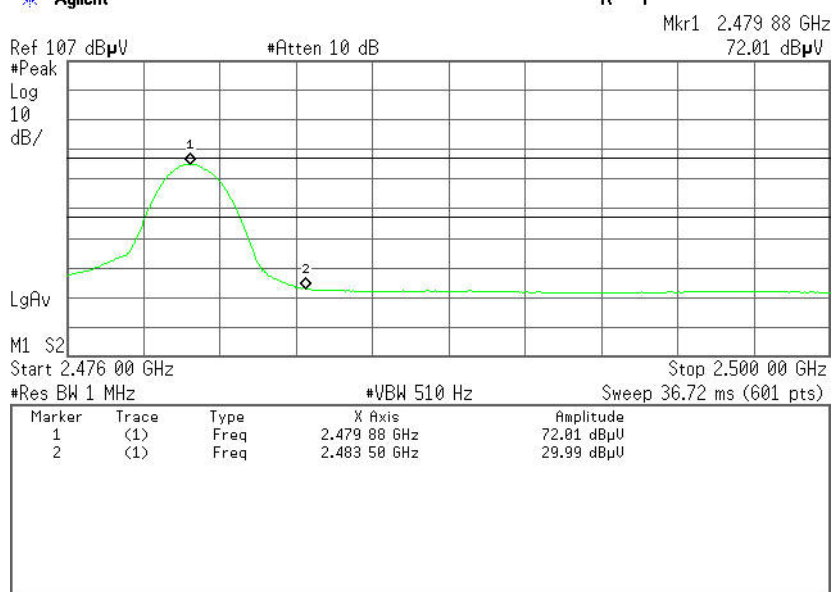




Detector mode: Peak

Polarity: Horizontal

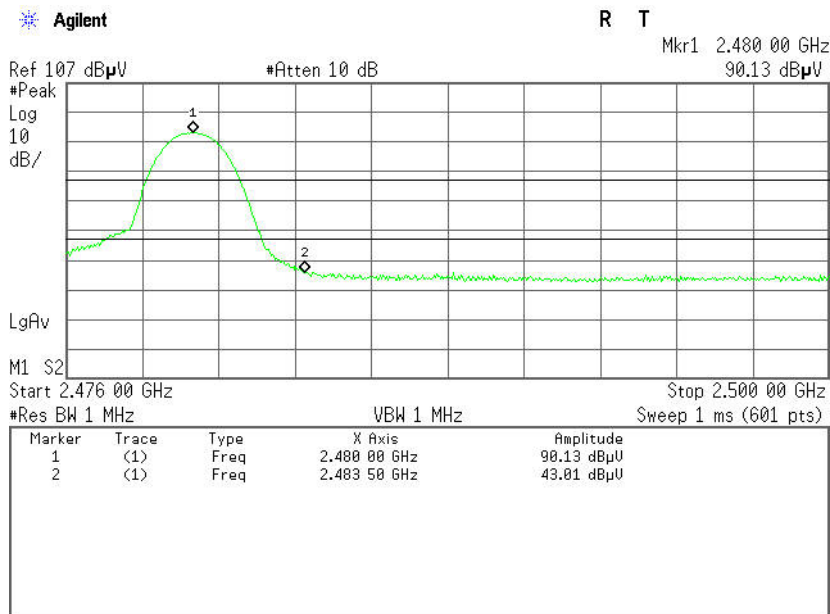

Detector mode: Average

Polarity: Horizontal

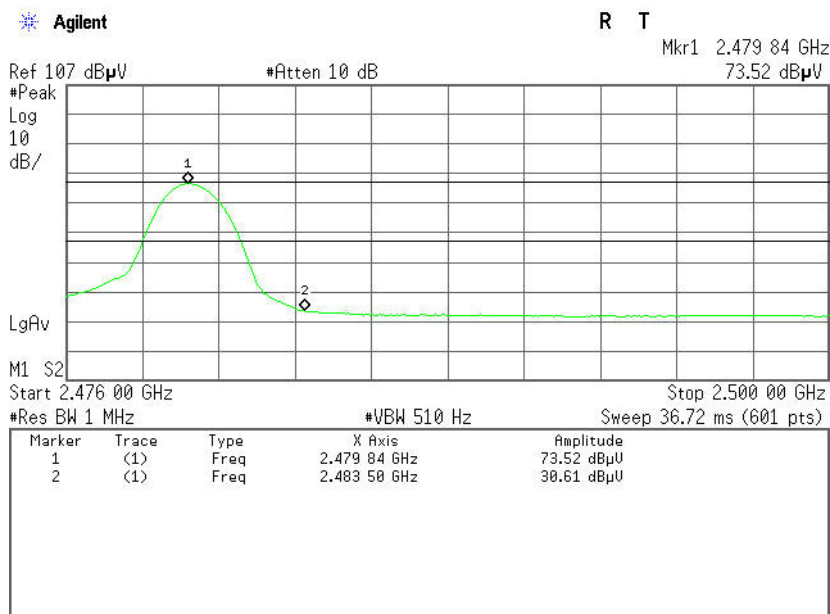



8.2. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

8.2.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

8.2.2. TEST INSTRUMENTS

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	09/20/2012	09/20/2013
LISN	EMCO	3825/2	8901-1459	03/09/2013	03/08/2014
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2013	03/03/2014
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.




8.2.3. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.



8.2.4. TEST SETUP

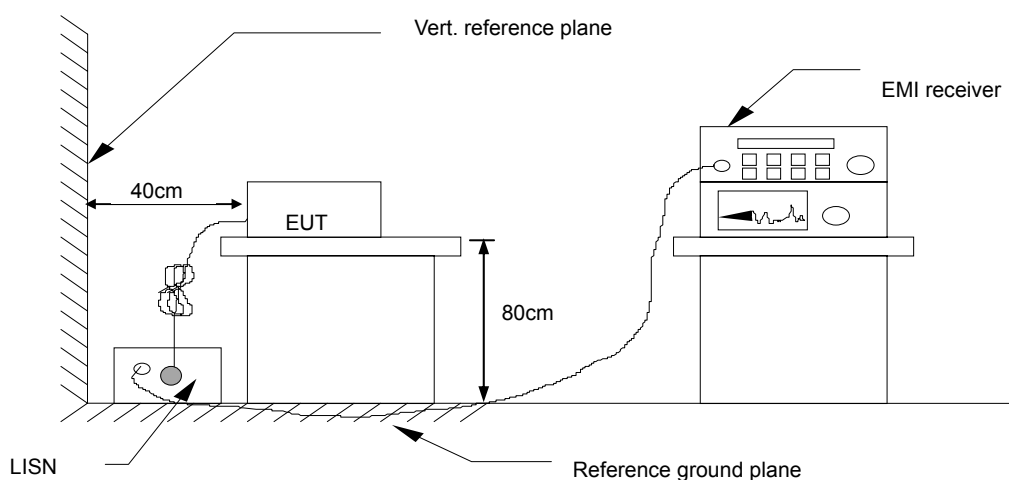

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

8.2.5. DATA SAMPLE

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass

Factor = Insertion loss of LISN + Cable Loss
Result = Quasi-peak Reading/ Average Reading + Factor
Limit = Limit stated in standard
Margin = Result (dBuV) – Limit (dBuV)

**8.2.6. TEST RESULTS****Test Data****Operation Mode:** OP0118-13-HP**Test Date:** May 12, 2013**Temperature:** 22°C**Humidity:** 45% RH**Tested by:** Eve Wang

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Line (L1/L2)
0.1500	41.28	25.44	9.79	51.07	35.23	65.99	56.00	-14.92	-20.77	L1
0.4380	29.35	6.29	9.68	39.03	15.97	57.10	47.10	-18.07	-31.13	L1
0.7300	32.52	10.49	9.68	42.20	20.17	56.00	46.00	-13.80	-25.83	L1
1.4100	29.78	8.43	9.68	39.46	18.11	56.00	46.00	-16.54	-27.89	L1
7.5860	44.93	32.85	9.77	54.70	42.62	60.00	50.00	-5.30	-7.38	L1
26.2420	41.23	26.37	9.98	51.21	36.35	60.00	50.00	-8.79	-13.65	L1
0.1500	41.44	25.13	9.79	51.23	34.92	65.99	56.00	-14.76	-21.08	L2
0.7260	32.56	8.85	9.68	42.24	18.53	56.00	46.00	-13.76	-27.47	L2
3.1500	32.04	11.88	9.71	41.75	21.59	56.00	46.00	-14.25	-24.41	L2
7.1580	45.10	32.52	9.78	54.88	42.30	60.00	50.00	-5.12	-7.70	L2
8.9860	42.16	32.13	9.78	51.94	41.91	60.00	50.00	-8.06	-8.09	L2
26.3540	35.57	22.24	9.98	45.55	32.22	60.00	50.00	-14.45	-17.78	L2

Note:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Peak detector, Quasi-peak detector and average detector.
3. "---" denotes the emission level was or more than 2dB below the Average limit.
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1= Line One (Live Line)/ L2= Line Two (Neutral Line)



8.3. SPURIOUS EMISSIONS MEASUREMENT

8.3.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

1. In the section 15.249(a):

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental Field Strength (mV/m)	Field Strength of Harmonics (µV/m)
902-928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

2. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

3. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**8.3.2. TEST INSTRUMENTS**

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014
ESCI EMI TEST RECEIVER.ESCI	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2013	03/18/2014
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2013	03/18/2014
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	06/21/2013	06/21/2014
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/02/2013	03/01/2014
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/02/2013	03/01/2014
Loop Antenna	A、R、A	PLA-1030/B	1029	03/23/2013	03/23/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	03/04/2013	03/03/2014
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The FCC Site Registration number is 101879.

3. N.C.R = No Calibration Required.


8.3.3 TEST PROCEDURE (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.




8.3.2.1. TEST SETUP

Below 30MHz

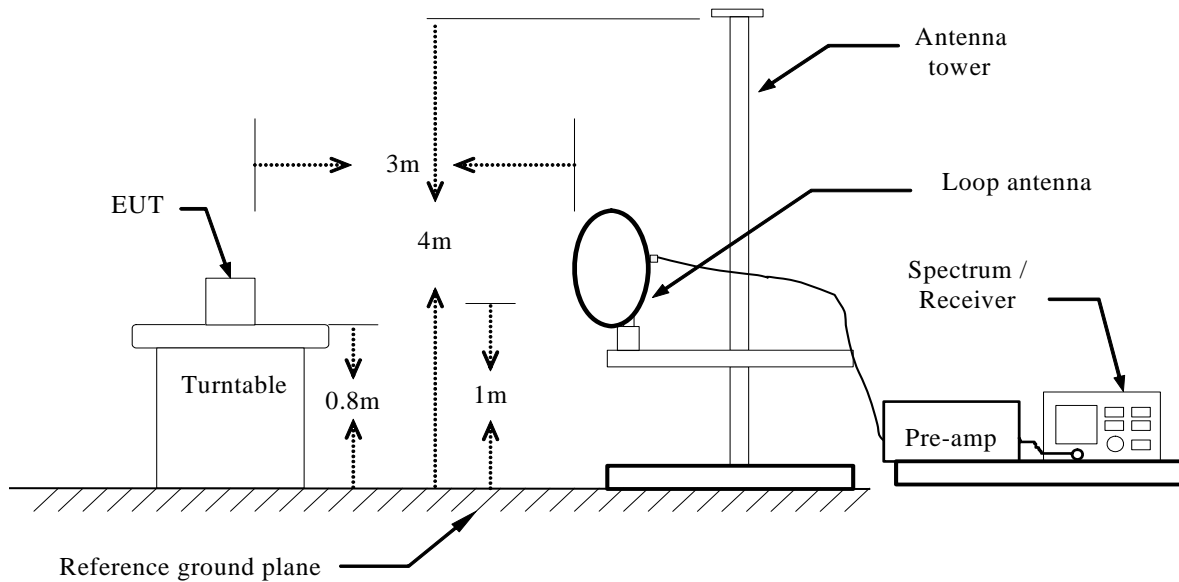


Below 1 GHz

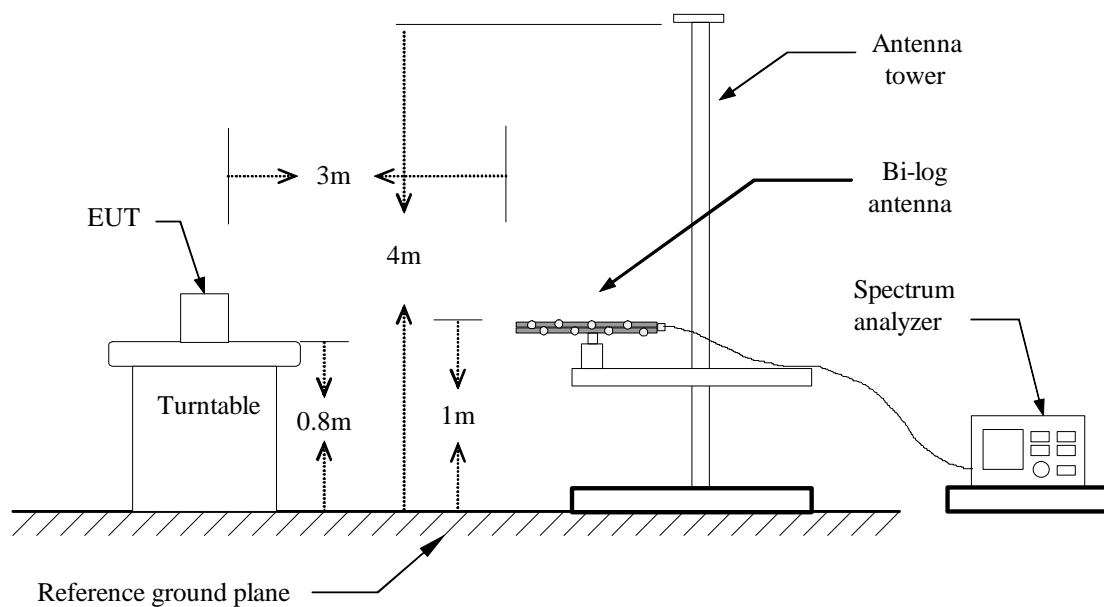



Above 1 GHz

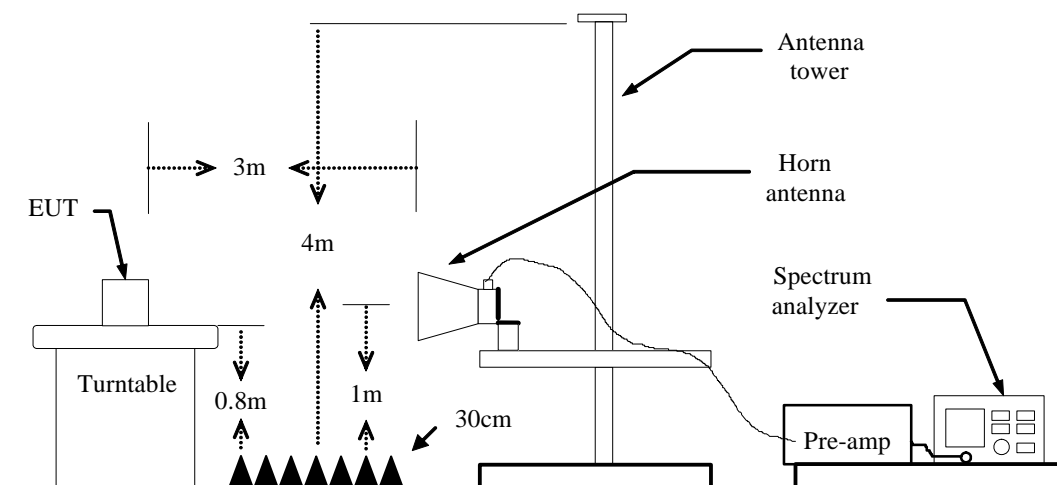

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

8.3.2.2. DATA SAMPLE

Below 1GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXX.XXXX	37.47	-16.41	21.06	40.00	-18.94	V	QP

Above 1GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXXX.XXXX	55.54	4.56	60.10	74.00	-13.90	V	Peak
XXXX.XXXX	29.66	4.56	34.22	54.00	-19.78	V	AVG

Frequency (MHz) = Emission frequency in MHz
Reading (dBuV) = Uncorrected Analyzer / Receiver reading
Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain
Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)
Limit (dBuV/m) = Limit stated in standard
Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)
Q.P. = Quasi-peak Reading
Peak = Peak Reading
AVG = Average Reading

**8.3.2.3. TEST RESULTS****Below 1 GHz****Operation Mode:** TX**Test Date:** June 23, 2013**Temperature:** 24°C**Tested by:** Mack Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
67.1833	58.72	-22.61	36.11	40.00	-3.89	V	QP
183.5833	58.72	-18.58	40.14	43.50	-3.36	V	QP
233.7000	59.06	-17.77	41.29	46.00	-4.71	V	QP
455.1833	58.56	-15.21	43.35	46.00	-2.65	V	QP
665.3500	51.33	-11.53	39.80	46.00	-6.20	V	QP
799.5333	49.88	-10.50	39.38	46.00	-6.62	V	QP
67.1833	60.16	-22.61	37.55	40.00	-2.45	H	QP
266.0333	62.17	-18.44	43.73	46.00	-2.27	H	QP
419.6167	58.68	-15.23	43.45	46.00	-2.55	H	QP
665.3500	53.75	-11.53	42.22	46.00	-3.78	H	QP
797.9167	47.47	-10.55	36.92	46.00	-9.08	H	QP
864.2000	45.81	-9.42	36.39	46.00	-9.61	H	QP

Remark: No emission found between lowest internal used/generated frequency to 30MHz.**Notes:**

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of Receiver between 30MHz to 1GHz was 120kHz.

**Above 1 GHz****GFSK****Operation Mode:** TX / CH Low**Test Date:** May 20, 2013**Temperature:** 24°C**Tested by:** Mack Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.**Fundamental**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2402.0000	97.37	-9.72	87.65	114.00	-26.35	V	Peak
2402.0000	82.23	-9.72	72.51	94.00	-21.49	V	AVG
2402.0000	97.80	-9.72	88.08	114.00	-25.92	H	Peak
2402.0000	82.63	-9.72	72.91	94.00	-21.09	H	AVG

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1195.0000	55.74	-8.77	46.97	74.00	-27.03	V	Peak
1600.0000	56.35	-8.68	47.67	74.00	-26.33	V	Peak
3700.0000	46.80	-2.75	44.05	74.00	-29.95	V	Peak
4810.0000	47.69	0.46	48.15	74.00	-25.85	V	Peak
6025.0000	44.62	3.16	47.78	74.00	-26.22	V	Peak
7030.0000	45.80	6.50	52.30	74.00	-21.70	V	Peak
1600.0000	53.47	-8.68	44.79	74.00	-29.21	H	Peak
3235.0000	46.61	-4.07	42.54	74.00	-31.46	H	Peak
4000.0000	46.64	-2.53	44.11	74.00	-29.89	H	Peak
4810.0000	49.03	0.46	49.49	74.00	-24.51	H	Peak
5470.0000	46.34	1.66	48.00	74.00	-26.00	H	Peak
6160.0000	45.07	3.56	48.63	74.00	-25.37	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / CH Mid**Test Date:** May 20, 2013**Temperature:** 24°C**Tested by:** Mack Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.**Fundamental**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2441.0000	98.38	-9.77	88.61	114.00	-25.39	V	Peak
2441.0000	83.41	-9.77	73.64	94.00	-20.36	V	AVG
2441.0000	99.89	-9.77	90.12	114.00	-23.88	H	Peak
2441.0000	84.85	-9.77	75.08	94.00	-18.92	H	AVG

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1195.0000	51.73	-8.77	42.96	74.00	-31.04	V	Peak
1630.0000	54.46	-8.79	45.67	74.00	-28.33	V	Peak
3655.0000	45.18	-2.87	42.31	74.00	-31.69	V	Peak
3985.0000	46.32	-2.53	43.79	74.00	-30.21	V	Peak
4885.0000	48.70	0.80	49.50	74.00	-24.50	V	Peak
5320.0000	45.07	1.53	46.60	74.00	-27.40	V	Peak
1630.0000	50.73	-8.79	41.94	74.00	-32.06	H	Peak
3250.0000	47.41	-4.07	43.34	74.00	-30.66	H	Peak
3805.0000	46.62	-2.49	44.13	74.00	-29.87	H	Peak
4885.0000	50.52	0.80	51.32	74.00	-22.68	H	Peak
5725.0000	45.79	2.46	48.25	74.00	-25.75	H	Peak
6595.0000	44.79	4.81	49.60	74.00	-24.40	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / CH High**Temperature:** 24°C**Humidity:** 52% RH**Test Date:** May 20, 2013**Tested by:** Mack Li**Polarity:** Ver. / Hor.**Fundamental**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2480.0000	99.32	-9.78	89.54	114.00	-24.46	V	Peak
2480.0000	84.55	-9.78	74.77	94.00	-19.23	V	AVG
2480.0000	101.87	-9.78	92.09	114.00	-21.91	H	Peak
2480.0000	87.03	-9.78	77.25	94.00	-16.75	H	AVG

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1195.0000	51.72	-8.77	42.95	74.00	-31.05	V	Peak
1645.0000	52.54	-8.85	43.69	74.00	-30.31	V	Peak
3760.0000	45.79	-2.59	43.20	74.00	-30.80	V	Peak
4435.0000	45.47	-0.76	44.71	74.00	-29.29	V	Peak
4960.0000	55.09	1.14	56.23	74.00	-17.77	V	Peak
4960.0000	34.74	1.14	35.88	54.00	-18.12	V	AVG
5245.0000	46.51	1.54	48.05	74.00	-25.95	V	Peak
1195.0000	50.95	-8.77	42.18	74.00	-31.82	H	Peak
2860.0000	47.22	-4.80	42.42	74.00	-31.58	H	Peak
3760.0000	46.83	-2.59	44.24	74.00	-29.76	H	Peak
4960.0000	53.22	1.14	54.36	74.00	-19.64	H	Peak
4960.0000	33.71	1.14	34.85	54.00	-19.15	H	AVG
5785.0000	44.67	2.72	47.39	74.00	-26.61	H	Peak
6505.0000	44.55	4.55	49.10	74.00	-24.90	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**8DPSK****Operation Mode:** TX / CH Low**Test Date:** May 20, 2013**Temperature:** 24°C**Tested by:** Mack Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.**Fundamental**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2402.0000	93.82	-9.72	84.10	114.00	-29.90	V	Peak
2402.0000	77.61	-9.72	67.89	94.00	-26.11	V	AVG
2402.0000	98.04	-9.72	88.32	114.00	-25.68	H	Peak
2402.0000	81.67	-9.72	71.95	94.00	-22.05	H	AVG

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1195.0000	52.64	-8.77	43.87	74.00	-30.13	V	Peak
1600.0000	55.48	-8.68	46.80	74.00	-27.20	V	Peak
3205.0000	46.86	-4.09	42.77	74.00	-31.23	V	Peak
3910.0000	46.74	-2.51	44.23	74.00	-29.77	V	Peak
4810.0000	45.62	0.46	46.08	74.00	-27.92	V	Peak
5320.0000	46.02	1.53	47.55	74.00	-26.45	V	Peak
1600.0000	51.41	-8.68	42.73	74.00	-31.27	H	Peak
3205.0000	47.83	-4.09	43.74	74.00	-30.26	H	Peak
4270.0000	45.04	-1.31	43.73	74.00	-30.27	H	Peak
4915.0000	44.77	0.93	45.70	74.00	-28.30	H	Peak
5740.0000	45.20	2.52	47.72	74.00	-26.28	H	Peak
6550.0000	44.17	4.68	48.85	74.00	-25.15	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / CH Mid**Test Date:** May 20, 2013**Temperature:** 24°C**Tested by:** Mack Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.***Fundamental***

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2441.0000	95.63	-9.77	85.86	114.00	-28.14	V	Peak
2441.0000	79.72	-9.77	69.95	94.00	-24.05	V	AVG
2441.0000	99.01	-9.77	89.24	114.00	-24.76	H	Peak
2441.0000	82.51	-9.77	72.74	94.00	-21.26	H	AVG

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1195.0000	51.95	-8.77	43.18	74.00	-30.82	V	Peak
1630.0000	53.34	-8.79	44.55	74.00	-29.45	V	Peak
3685.0000	46.36	-2.79	43.57	74.00	-30.43	V	Peak
4720.0000	45.18	0.06	45.24	74.00	-28.76	V	Peak
5860.0000	44.18	2.87	47.05	74.00	-26.95	V	Peak
6475.0000	44.94	4.47	49.41	74.00	-24.59	V	Peak
1015.0000	51.76	-10.21	41.55	74.00	-32.45	H	Peak
1630.0000	50.31	-8.79	41.52	74.00	-32.48	H	Peak
1825.0000	49.31	-9.67	39.64	74.00	-34.36	H	Peak
3760.0000	45.85	-2.59	43.26	74.00	-30.74	H	Peak
4240.0000	45.63	-1.43	44.20	74.00	-29.80	H	Peak
4885.0000	46.13	0.80	46.93	74.00	-27.07	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / CH High**Test Date:** May 20, 2013**Temperature:** 24°C**Tested by:** Mack Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.***Fundamental***

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2480.0000	97.39	-9.78	87.61	114.00	-26.39	V	Peak
2480.0000	81.79	-9.78	72.01	94.00	-21.99	V	AVG
2480.0000	99.91	-9.78	90.13	114.00	-23.87	H	Peak
2480.0000	83.30	-9.78	73.52	94.00	-20.48	H	AVG

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1195.0000	53.29	-8.77	44.52	74.00	-29.48	V	Peak
1645.0000	53.65	-8.85	44.80	74.00	-29.20	V	Peak
3205.0000	46.78	-4.09	42.69	74.00	-31.31	V	Peak
4300.0000	45.42	-1.20	44.22	74.00	-29.78	V	Peak
5650.0000	44.30	2.14	46.44	74.00	-27.56	V	Peak
6325.0000	45.09	4.05	49.14	74.00	-24.86	V	Peak
1060.0000	52.30	-9.85	42.45	74.00	-31.55	H	Peak
1435.0000	48.45	-7.98	40.47	74.00	-33.53	H	Peak
3535.0000	46.36	-3.33	43.03	74.00	-30.97	H	Peak
4135.0000	45.81	-1.89	43.92	74.00	-30.08	H	Peak
4960.0000	47.36	1.14	48.50	74.00	-25.50	H	Peak
6310.0000	46.45	4.01	50.46	74.00	-23.54	H	Peak

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).