

# FCC TEST REPORT

**FCC ID** : YPG-ZP388  
**Applicant** : Oregon Scientific Global Distribution Limited  
**Address** : Block C, 9/F., Kaiser Estate, Phase 1, 41 Man Yue Street, HungHom, Kowloon, Hong Kong.  
**Manufacturer** : Shenzhen 3nod Electronics Co.,Ltd  
**Address** : 3NOD High-Tech Park 15# Zhongfu Road Tangxiayong Village, Industrial Zone Songgang Town, Baoan District, Shenzhen City, China  
**Equipment Under Test (EUT) :**  
Product Name : Boomboro GREAT  
Model No. : ZP388  
**Standards** : FCC Part15.247:2010  
**Date of Test** : May 3~6, 2013  
**Date of Issue** : May 7, 2013

**Test Result : PASS**

Remark:

\* The sample described above has been tested to be in compliance with the requirements of ANSI C63.4:2003. The test results have been reviewed and comply with the rules listed above and found to meet their essential requirements.

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District,

Shenzhen 518105, China

Tel: +86-755-83551033


Fax: +86-755-83552400

Compiled by:

Approved by:



Zero Zhou / Project Engineer



Philo Zhong / Manager

## 2 Test Summary

| Test Items                                                        | Test Requirement                 | Result |
|-------------------------------------------------------------------|----------------------------------|--------|
| Spurious Radiated Emissions                                       | 15.205(a)<br>15.209<br>15.247(d) | PASS   |
| Band edge Emissions                                               | 15.247(d)                        | PASS   |
| Spurious RF Conducted Emissions from out of band                  | 15.247(d)                        | PASS   |
| Duty Cycle                                                        | 15.35                            | PASS   |
| Conducted Emissions                                               | 15.207                           | PASS   |
| 20dB Bandwidth                                                    | 15.215c<br>15.247(a)(1)          | PASS   |
| Maximum Peak Output Power                                         | 15.247(b)(1)                     | PASS   |
| Frequency Separation                                              | 15.247(a)(1)                     | PASS   |
| Number of Hopping Frequency                                       | 15.247(a)(1)(iii)                | PASS   |
| Dwell time                                                        | 15.247(a)(1)(iii)                | PASS   |
| Maximum Permissible Exposure<br>(Exposure of Humans to RF Fields) | 1.1307(b)(1)                     | PASS   |

### 3 Contents

|                                                                 | <b>Page</b> |
|-----------------------------------------------------------------|-------------|
| <b>1 COVER PAGE .....</b>                                       | <b>1</b>    |
| <b>2 TEST SUMMARY .....</b>                                     | <b>2</b>    |
| <b>3 CONTENTS .....</b>                                         | <b>3</b>    |
| <b>4 GENERAL INFORMATION .....</b>                              | <b>5</b>    |
| 4.1 GENERAL DESCRIPTION OF E.U.T .....                          | 5           |
| 4.2 DETAILS OF E.U.T .....                                      | 5           |
| 4.3 TEST FACILITY .....                                         | 6           |
| 4.4 TEST LOCATION .....                                         | 6           |
| 4.5 CHANNEL LIST .....                                          | 6           |
| <b>5 EQUIPMENT USED DURING TEST .....</b>                       | <b>7</b>    |
| 5.1 EQUIPMENTS LIST .....                                       | 7           |
| 5.2 MEASUREMENT UNCERTAINTY .....                               | 7           |
| 5.3 TEST EQUIPMENT CALIBRATION .....                            | 8           |
| <b>6 CONDUCTED EMISSION .....</b>                               | <b>9</b>    |
| 6.1 E.U.T. OPERATION .....                                      | 9           |
| 6.2 EUT SETUP .....                                             | 10          |
| 6.3 CONDUCTED EMISSION TEST RESULT .....                        | 10          |
| <b>7 SPURIOUS RADIATED EMISSIONS .....</b>                      | <b>13</b>   |
| 7.1 EUT OPERATION : .....                                       | 13          |
| 7.2 TEST SETUP .....                                            | 14          |
| 7.3 SPECTRUM ANALYZER SETUP .....                               | 15          |
| 7.4 TEST PROCEDURE .....                                        | 16          |
| 7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....              | 16          |
| 7.6 SUMMARY OF TEST RESULTS .....                               | 17          |
| <b>8 SPURIOUS RF CONDUCTED EMISSIONS FROM OUT OF BAND .....</b> | <b>29</b>   |
| 8.1 TEST PROCEDURE .....                                        | 29          |
| 8.2 TEST RESULT .....                                           | 29          |
| <b>9 DUTY CYCLE .....</b>                                       | <b>39</b>   |
| 9.1 TEST PROCEDURE .....                                        | 39          |
| 9.2 TEST RESULT .....                                           | 39          |
| <b>10 BAND EDGE MEASUREMENT .....</b>                           | <b>41</b>   |
| 10.1 TEST PROCEDURE .....                                       | 41          |
| 10.2 TEST RESULT: .....                                         | 42          |
| <b>11 20 DB BANDWIDTH MEASUREMENT .....</b>                     | <b>54</b>   |
| 11.1 TEST PROCEDURE: .....                                      | 54          |
| 11.2 TEST RESULT: .....                                         | 54          |
| <b>12 MAXIMUM PEAK OUTPUT POWER .....</b>                       | <b>60</b>   |
| 12.1 TEST PROCEDURE: .....                                      | 60          |
| 12.2 TEST RESULT: .....                                         | 60          |
| <b>13 HOPPING CHANNEL SEPARATION .....</b>                      | <b>66</b>   |
| 13.1 TEST PROCEDURE: .....                                      | 66          |
| 13.2 TEST RESULT: .....                                         | 66          |
| <b>14 NUMBER OF HOPPING FREQUENCY .....</b>                     | <b>72</b>   |

|           |                                                  |           |
|-----------|--------------------------------------------------|-----------|
| 14.1      | TEST PROCEDURE: .....                            | 72        |
| 14.2      | TEST RESULT:.....                                | 72        |
| <b>15</b> | <b>DWELL TIME.....</b>                           | <b>74</b> |
| 15.1      | TEST PROCEDURE: .....                            | 74        |
| 15.2      | TEST RESULT:.....                                | 74        |
| <b>16</b> | <b>ANTENNA REQUIREMENT.....</b>                  | <b>90</b> |
| <b>17</b> | <b>RF EXPOSURE .....</b>                         | <b>91</b> |
| 17.1      | REQUIREMENTS: .....                              | 91        |
| 17.2      | THE PROCEDURES / LIMIT .....                     | 91        |
| 17.3      | MPE CALCULATION METHOD.....                      | 92        |
| <b>18</b> | <b>PHOTOGRAPHS – TEST SETUP .....</b>            | <b>93</b> |
| 18.1      | CONDUCTED EMISSIONS .....                        | 93        |
| 18.2      | RADIATED EMISSIONS.....                          | 93        |
| <b>19</b> | <b>PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....</b> | <b>96</b> |
| 19.1      | EUT – EXTERNAL VIEW.....                         | 96        |
| 19.2      | EUT – INTERNAL VIEW.....                         | 99        |
| 19.3      | EUT-RF MODULE VIEW .....                         | 103       |
| 19.4      | ADAPTER VIEW .....                               | 106       |

## 4 General Information

### 4.1 General Description of E.U.T.

|                             |                                                             |
|-----------------------------|-------------------------------------------------------------|
| <b>Product Name</b>         | : Boombero GREAT                                            |
| <b>Model No.</b>            | : ZP388                                                     |
| <b>Model Description</b>    | : N/A                                                       |
| <b>Operation Frequency</b>  | : 2402MHz ~ 2480MHz,79 channels in total, separated by 1MHz |
| <b>Type of Modulation</b>   | : GFSK, Pi/4DQPSK, 8DPSK                                    |
| <b>Oscillator</b>           | : Crystal 12.288MHz for CPU,16MHz for RF module             |
| <b>Antenna installation</b> | : PCB Printed Antenna                                       |
| <b>Antenna Gain</b>         | : 0 dBi                                                     |

### 4.2 Details of E.U.T.

|                             |                                                                                                             |
|-----------------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Technical Data</b> ..... | : DC 5.0V powered by external adapter;<br>or Built-in battery: 3.7V, 2500mAh                                |
| <b>Remark</b> .....         | : The EUT was tested with the following adapter and all test data passed.                                   |
| <b>Adapter</b> .....        | : Manufacturer: Ktec<br>M/N: KSAS0100500200D5<br>Input: AC 100-240V, 50/60Hz, 0.4A<br>Output: DC 5.0V, 2.0A |

### 4.3 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration 7760A, July 12, 2012.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

### 4.4 Test Location

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen, China

### 4.5 Channel List

| Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) |
|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|
| 1           | 2402            | 2           | 2403            | 3           | 2404            | 4           | 2405            |
| 5           | 2406            | 6           | 2407            | 7           | 2408            | 8           | 2409            |
| 9           | 2410            | 10          | 2411            | 11          | 2412            | 12          | 2413            |
| 13          | 2414            | 14          | 2415            | 15          | 2416            | 16          | 2417            |
| 17          | 2418            | 18          | 2419            | 19          | 2420            | 20          | 2421            |
| 21          | 2422            | 22          | 2423            | 23          | 2424            | 24          | 2425            |
| 25          | 2426            | 26          | 2427            | 27          | 2428            | 28          | 2429            |
| 29          | 2430            | 30          | 2431            | 31          | 2432            | 32          | 2433            |
| 33          | 2434            | 34          | 2435            | 35          | 2436            | 36          | 2437            |
| 37          | 2438            | 38          | 2439            | 39          | 2440            | 40          | 2441            |
| 41          | 2442            | 42          | 2443            | 43          | 2444            | 44          | 2445            |
| 45          | 2446            | 46          | 2447            | 47          | 2448            | 48          | 2449            |
| 49          | 2450            | 50          | 2451            | 51          | 2452            | 52          | 2453            |
| 53          | 2454            | 54          | 2455            | 55          | 2456            | 56          | 2457            |
| 57          | 2458            | 58          | 2459            | 59          | 2460            | 60          | 2461            |
| 61          | 2462            | 62          | 2463            | 63          | 2464            | 64          | 2465            |
| 65          | 2466            | 66          | 2467            | 67          | 2468            | 68          | 2469            |
| 69          | 2470            | 70          | 2471            | 71          | 2472            | 72          | 2473            |
| 73          | 2474            | 74          | 2475            | 75          | 2476            | 76          | 2477            |
| 77          | 2478            | 78          | 2479            | 79          | 2480            | -           | -               |

## 5 Equipment Used during Test

### 5.1 Equipments List

| Conducted Emissions                              |                                      |               |             |            |                       |                      |
|--------------------------------------------------|--------------------------------------|---------------|-------------|------------|-----------------------|----------------------|
| Item                                             | Equipment                            | Manufacturer  | Model No.   | Serial No. | Last Calibration Date | Calibration Due Date |
| 1.                                               | EMI Test Receiver                    | R&S           | ESCI        | 101178     | Aug. 13,2012          | Aug. 12,2013         |
| 2.                                               | LISN                                 | R&S           | ENV216      | 101215     | Aug. 13,2012          | Aug. 12,2013         |
| 3.                                               | Cable                                | HUBER+SUHNER  | CBL2-NN-3M  | 2230300    | Aug. 13,2012          | Aug. 12,2013         |
| 4.                                               | Switch                               | ---           | RSU/M2      | ---        | Aug. 13,2012          | Aug. 12,2013         |
| 3m Semi-anechoic Chamber for Radiation Emissions |                                      |               |             |            |                       |                      |
| Item                                             | Equipment                            | Manufacturer  | Model No.   | Serial No. | Last Calibration Date | Calibration Due Date |
| 1.                                               | EMC Analyzer                         | Agilent       | E7405A      | MY45114943 | Aug. 13,2012          | Aug. 12,2013         |
| 2.                                               | Active Loop Antenna                  | Beijing Dazhi | ZN30900A    | -          | Aug. 13,2012          | Aug. 12,2013         |
| 3.                                               | Trilog Broadband Antenna             | SCHWARZBECK   | VULB9163    | 336        | Aug. 13,2012          | Aug. 12,2013         |
| 4.                                               | Broad-band Horn Antenna              | SCHWARZBECK   | BBHA 9120 D | 667        | Aug. 13,2012          | Aug. 12,2013         |
| 5.                                               | Broad-band Horn Antenna              | SCHWARZBECK   | BBHA 9170   | 399        | Aug. 13,2012          | Aug. 12,2013         |
| 6.                                               | Broadband Preamplifier               | SCHWARZBECK   | BBV 9719    | 9719-254   | Aug. 13,2012          | Aug. 12,2013         |
| 7.                                               | Broadband Preamplifier               | SCHWARZBECK   | BBV 9718    | 9718-148   | Aug. 13,2012          | Aug. 12,2013         |
| 8.                                               | 10m Coaxial Cable with N- plug       | SCHWARZBECK   | AK 9515 H   | -          | Aug. 13,2012          | Aug. 12,2013         |
| 9.                                               | 10m 50 Ohm Coaxial Cable with N-plug | SCHWARZBECK   | AK 9513     | -          | Aug. 13,2012          | Aug. 12,2013         |
| 10.                                              | Positioning Controller               | C&C LAB       | CC-C-IF     | -          | Aug. 13,2012          | Aug. 12,2013         |
| 11.                                              | Color Monitor                        | SUNSP0        | SP-14C      | -          | Aug. 13,2012          | Aug. 12,2013         |

### 5.2 Measurement Uncertainty

| Parameter                         | Uncertainty                                    |
|-----------------------------------|------------------------------------------------|
| Radio Frequency                   | $\pm 1 \times 10^{-6}$                         |
| Bandwidth                         | $\pm 1.5 \times 10^{-6}$                       |
| RF Power                          | $\pm 1.0$ dB                                   |
| RF Power Density                  | $\pm 2.2$ dB                                   |
| Temperature                       | $\pm 1$ °C                                     |
| DC Source                         | $\pm 0.05\%$                                   |
| Radiated Emissions test           | $\pm 5.03$ dB<br>(Bilog antenna 30M~1000MHz)   |
|                                   | $\pm 4.74$ dB<br>(Horn antenna 1000M~25000MHz) |
| Conducted Spurious Emissions test | $\pm 0.5$ dB (9KHz~1000MHz)                    |
|                                   | $\pm 1$ dB(1000M~26500MHz)                     |
| Conducted Emissions test          | $\pm 3.64$ dB (AC mains 150KHz~30MHz)          |

### **5.3 Test Equipment Calibration**

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.



## 6 Conducted Emission

|                   |                                                                                                                        |
|-------------------|------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC CFR 47 Part 15 Section 15.207                                                                                      |
| Test Method:      | ANSI C63.4:2003                                                                                                        |
| Test Result:      | PASS                                                                                                                   |
| Frequency Range:  | 150kHz to 30MHz                                                                                                        |
| Class:            | Class B                                                                                                                |
| Limit:            | 66-56 dB $\mu$ V between 0.15MHz & 0.5MHz<br>56 dB $\mu$ V between 0.5MHz & 5MHz<br>60 dB $\mu$ V between 5MHz & 30MHz |
| Detector:         | Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit       |

### 6.1 E.U.T. Operation

#### Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar

#### EUT Operation:


The EUT was tested in Charging+BT mode. The worst test data were shown as follow.

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

## 6.2 EUT Setup

The EUT was placed on the test table in shielding room.

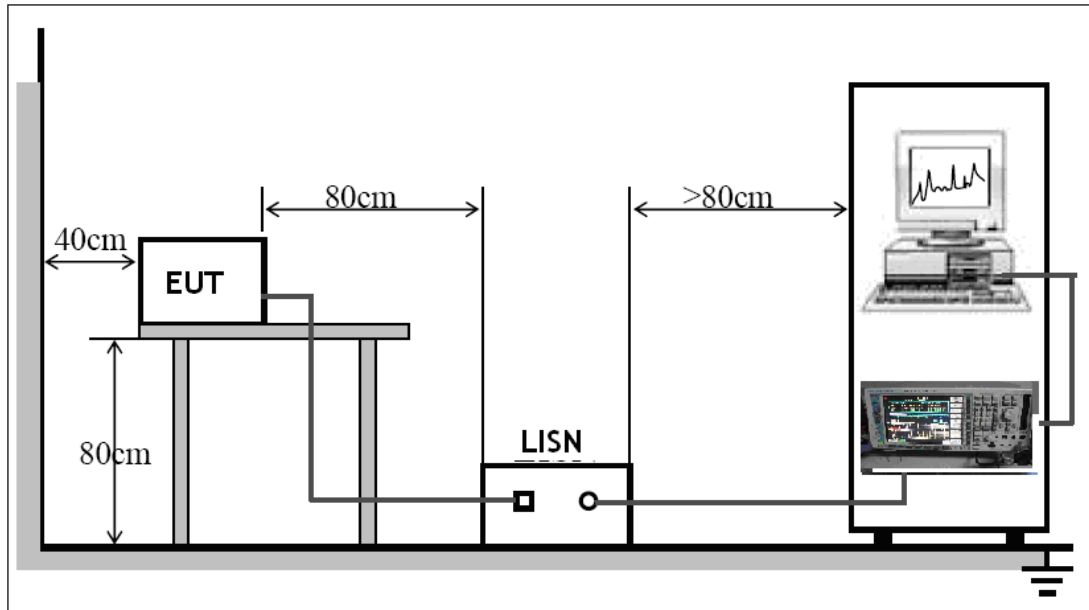


## 6.3 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Test Mode: BT linking+Charging

Live line:

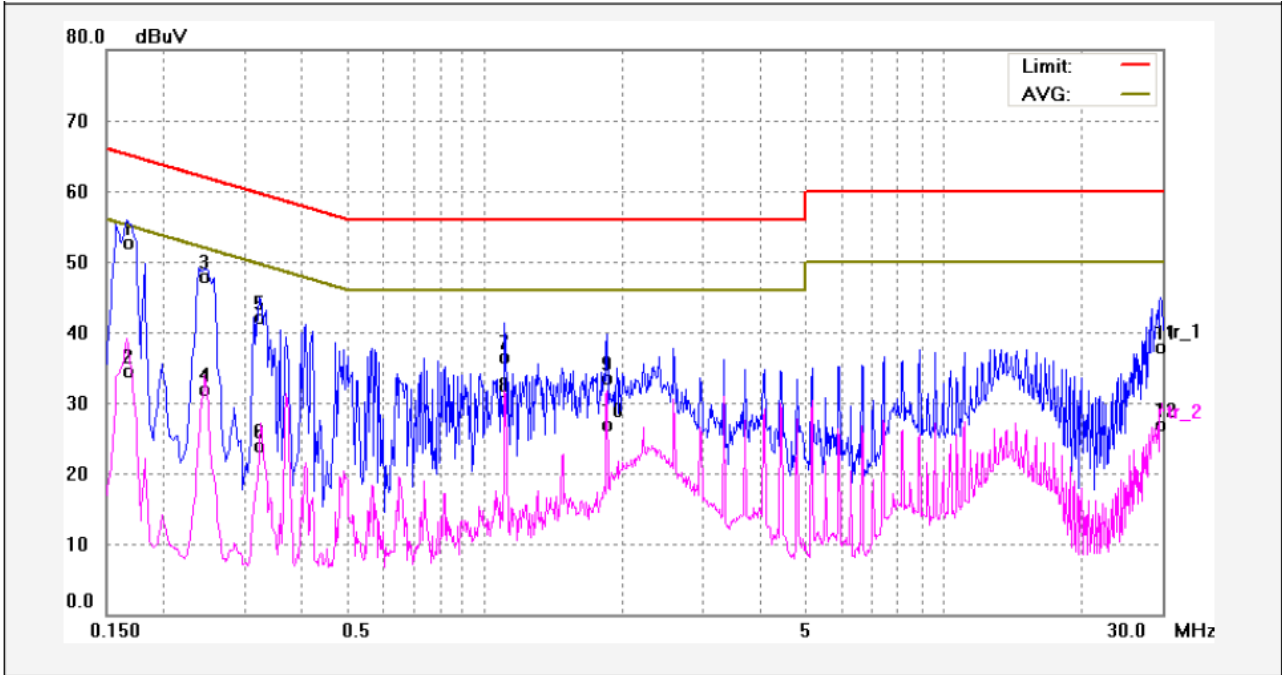

| No. | Freq.<br>(MHz) | Reading<br>(dBuV) | Factor<br>(dB) | Result<br>(dBuV) | Limit<br>dBuV | Margin<br>(dB) | Detector | Remark |
|-----|----------------|-------------------|----------------|------------------|---------------|----------------|----------|--------|
| 1   | 0.1685         | 42.16             | 9.81           | 51.97            | 65.03         | -13.06         | QP       |        |
| 2   | 0.1685         | 23.96             | 9.81           | 33.77            | 55.03         | -21.26         | AVG      |        |
| 3   | 0.2460         | 37.30             | 9.85           | 47.15            | 61.89         | -14.74         | QP       |        |
| 4   | 0.2460         | 21.26             | 9.85           | 31.11            | 51.89         | -20.78         | AVG      |        |
| 5   | 0.3220         | 31.49             | 9.88           | 41.37            | 59.65         | -18.28         | QP       |        |
| 6   | 0.3220         | 13.13             | 9.88           | 23.01            | 49.65         | -26.64         | AVG      |        |
| 7   | 1.1100         | 25.70             | 10.00          | 35.70            | 56.00         | -20.30         | QP       |        |
| 8   | 1.1100         | 19.67             | 10.00          | 29.67            | 46.00         | -16.33         | AVG      |        |
| 9   | 1.8500         | 22.69             | 10.00          | 32.69            | 56.00         | -23.31         | QP       |        |
| 10  | 1.8500         | 16.14             | 10.00          | 26.14            | 46.00         | -19.86         | AVG      |        |
| 11  | 29.6860        | 24.79             | 12.27          | 37.06            | 60.00         | -22.94         | QP       |        |
| 12  | 29.6860        | 13.74             | 12.27          | 26.01            | 50.00         | -23.99         | AVG      |        |

Neutral line:

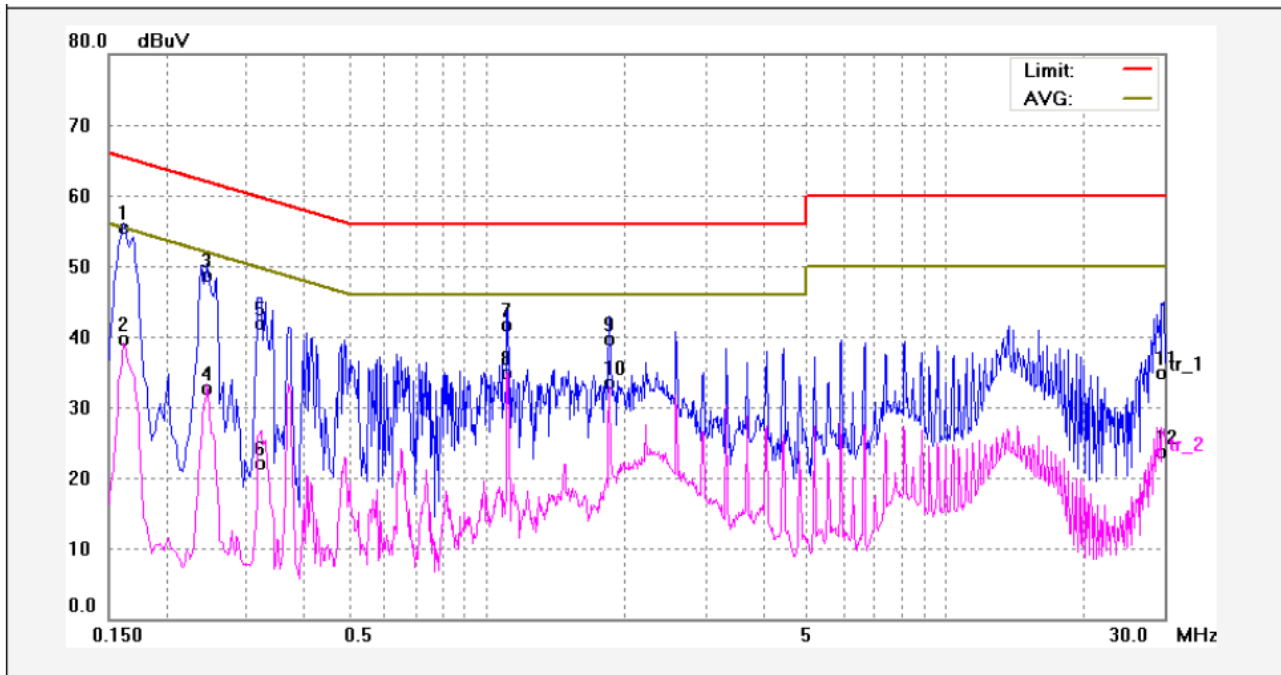

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1   | 0.1620      | 44.82          | 9.81        | 54.63         | 65.36      | -10.73      | QP       |        |
| 2   | 0.1620      | 29.10          | 9.81        | 38.91         | 55.36      | -16.45      | AVG      |        |
| 3   | 0.2460      | 38.12          | 9.85        | 47.97         | 61.89      | -13.92      | QP       |        |
| 4   | 0.2460      | 22.12          | 9.85        | 31.97         | 51.89      | -19.92      | AVG      |        |
| 5   | 0.3180      | 31.28          | 9.88        | 41.16         | 59.76      | -18.60      | QP       |        |
| 6   | 0.3180      | 11.37          | 9.88        | 21.25         | 49.76      | -28.51      | AVG      |        |
| 7   | 1.1100      | 30.84          | 10.00       | 40.84         | 56.00      | -15.16      | QP       |        |
| 8   | 1.1100      | 24.19          | 10.00       | 34.19         | 46.00      | -11.81      | AVG      |        |
| 9   | 1.8540      | 28.84          | 10.00       | 38.84         | 56.00      | -17.16      | QP       |        |
| 10  | 1.8540      | 22.73          | 10.00       | 32.73         | 46.00      | -13.27      | AVG      |        |
| 11  | 29.9740     | 21.77          | 12.31       | 34.08         | 60.00      | -25.92      | QP       |        |
| 12  | 29.9740     | 10.60          | 12.31       | 22.91         | 50.00      | -27.09      | AVG      |        |

## 7 Spurious Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Frequency Range: 12MHz to 25GHz

Measurement Distance: 3m

Limit:

| Frequency<br>(MHz) | Field Strength        |                 | Field Strength Limit at 3m Measurement Dist |                                       |
|--------------------|-----------------------|-----------------|---------------------------------------------|---------------------------------------|
|                    | uV/m                  | Distance<br>(m) | uV/m                                        | dBuV/m                                |
| 0.009 ~ 0.490      | $2400/F(\text{kHz})$  | 300             | $10000 * 2400/F(\text{kHz})$                | $20\log^{(2400/F(\text{kHz}))} + 80$  |
| 0.490 ~ 1.705      | $24000/F(\text{kHz})$ | 30              | $100 * 24000/F(\text{kHz})$                 | $20\log^{(24000/F(\text{kHz}))} + 40$ |
| 1.705 ~ 30         | 30                    | 30              | $100 * 30$                                  | $20\log^{(30)} + 40$                  |
| 30 ~ 88            | 100                   | 3               | 100                                         | $20\log^{(100)}$                      |
| 88 ~ 216           | 150                   | 3               | 150                                         | $20\log^{(150)}$                      |
| 216 ~ 960          | 200                   | 3               | 200                                         | $20\log^{(200)}$                      |
| Above 960          | 500                   | 3               | 500                                         | $20\log^{(500)}$                      |

### 7.1 EUT Operation :

Operating Environment:

Temperature: 25.5 °C


Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar


## 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

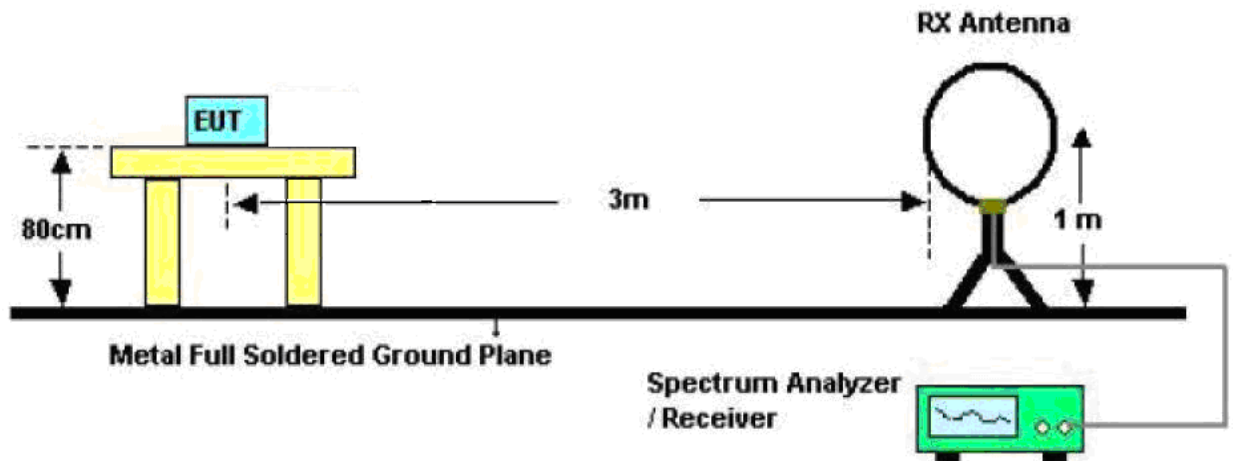

The test setup for emission measurement from 30 MHz to 1 GHz.

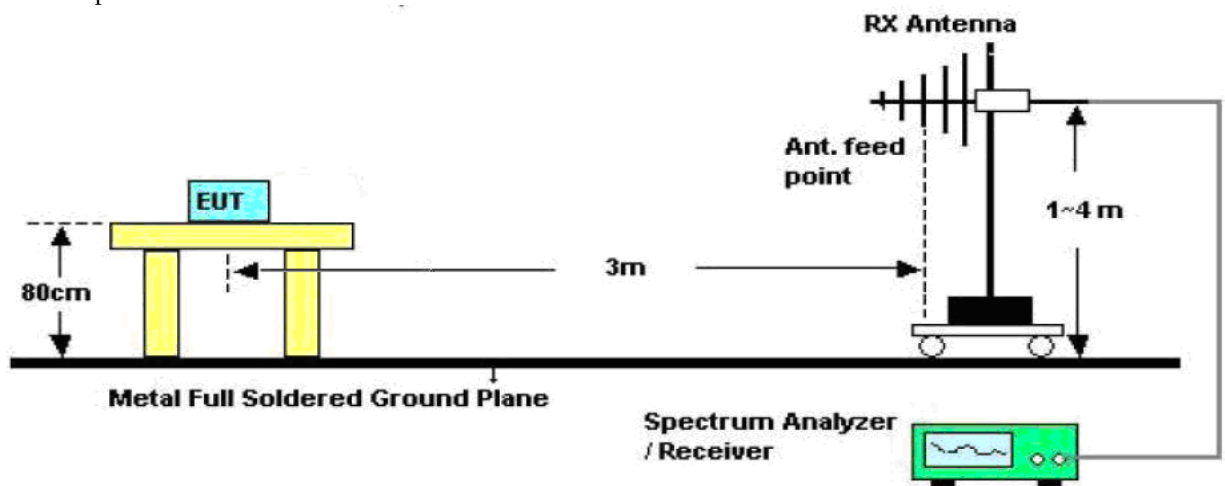

The test setup for emission measurement above 1 GHz.

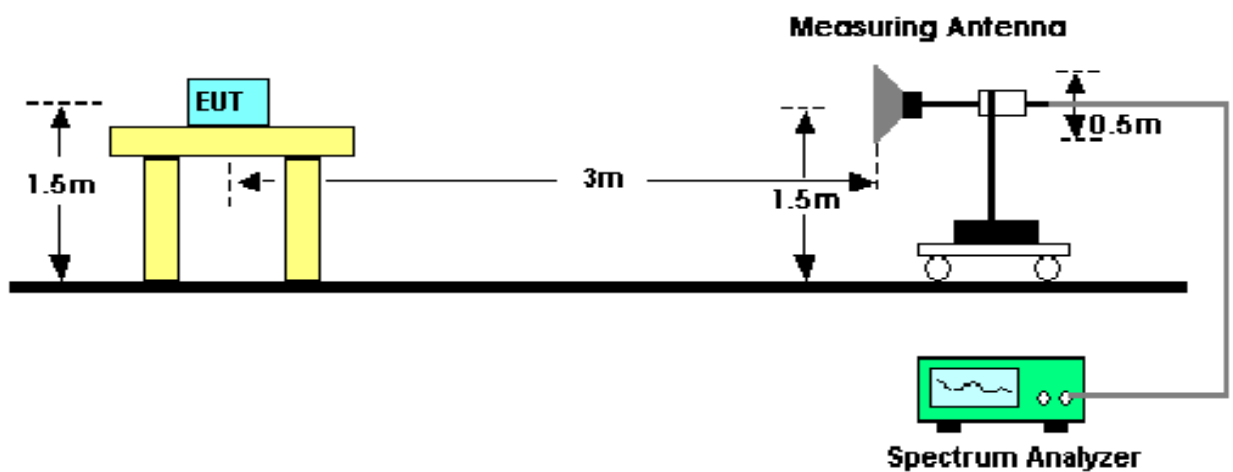

7.3 Spectrum Analyzer Setup

According to FCC Part15 Rules, the system was tested 12MHz to 25000MHz.

Below 30MHz

Sweep Speed .....Auto  
IF Bandwidth .....10KHz  
Video Bandwidth .....10KHz  
Resolution Bandwidth .....10KHz

30MHz ~ 1GHz

Sweep Speed .....Auto  
IF Bandwidth .....120 KHz  
Video Bandwidth .....100KHz  
Quasi-Peak Adapter Bandwidth .....120 KHz  
Quasi-Peak Adapter Mode .....Normal  
Resolution Bandwidth .....100KHz

Above 1GHz

Sweep Speed .....Auto  
IF Bandwidth .....120 KHz  
Video Bandwidth .....3MHz  
Quasi-Peak Adapter Bandwidth .....120 KHz  
Quasi-Peak Adapter Mode .....Normal  
Resolution Bandwidth .....1MHz

## 7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

## 7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$



7.6 Summary of Test Results

Test Frequency :Below 30MHz


All emissions were more than 20 dB below the limit and therefore not reported

Test Frequency : 30MHz ~ 1000MHz

Test voltage: DC 3.7V for battery


Test Mode: BT linking

Antenna polarization: Vertical

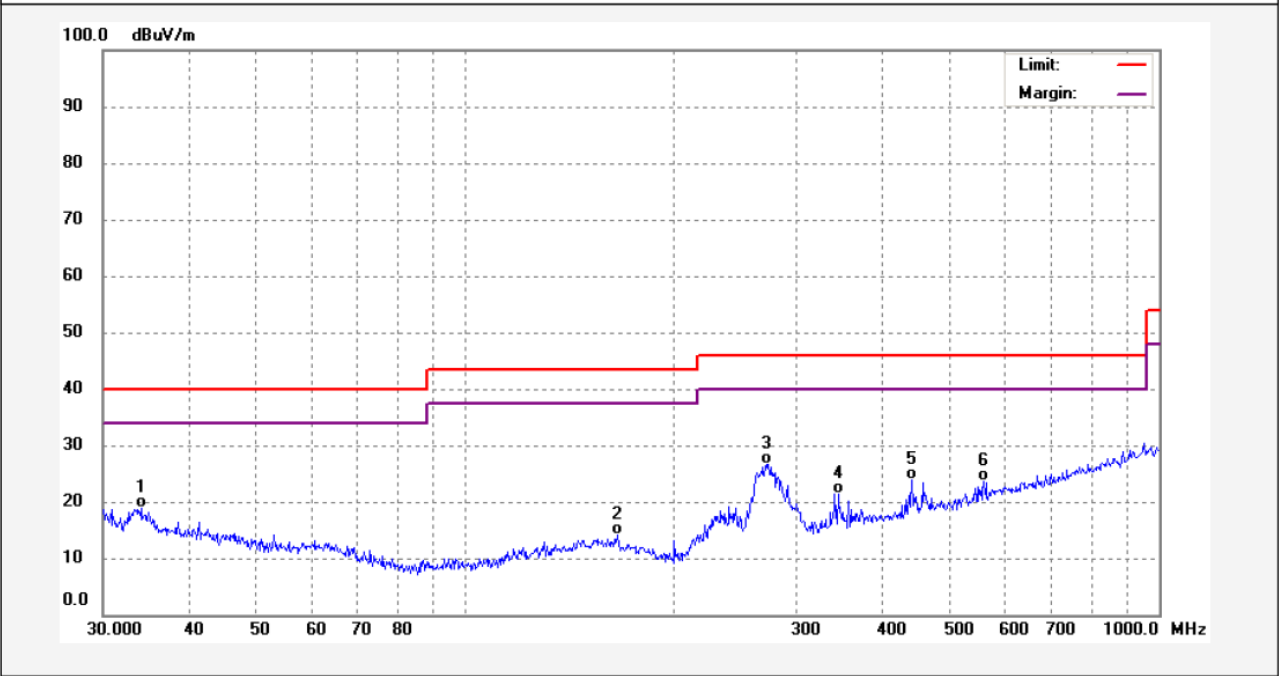


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 34.0365     | 38.88            | -19.94      | 18.94           | 40.00          | -21.06      | QP       |        |
| 2   | 165.4866    | 35.73            | -21.69      | 14.04           | 43.50          | -29.46      | QP       |        |
| 3   | 272.2776    | 47.34            | -20.72      | 26.62           | 46.00          | -19.38      | QP       |        |
| 4   | 344.3855    | 39.83            | -18.36      | 21.47           | 46.00          | -24.53      | QP       |        |
| 5   | 440.1963    | 39.58            | -15.74      | 23.84           | 46.00          | -22.16      | QP       |        |
| 6   | 558.7302    | 36.30            | -12.64      | 23.66           | 46.00          | -22.34      | QP       |        |


Antenna polarization: Horizontal

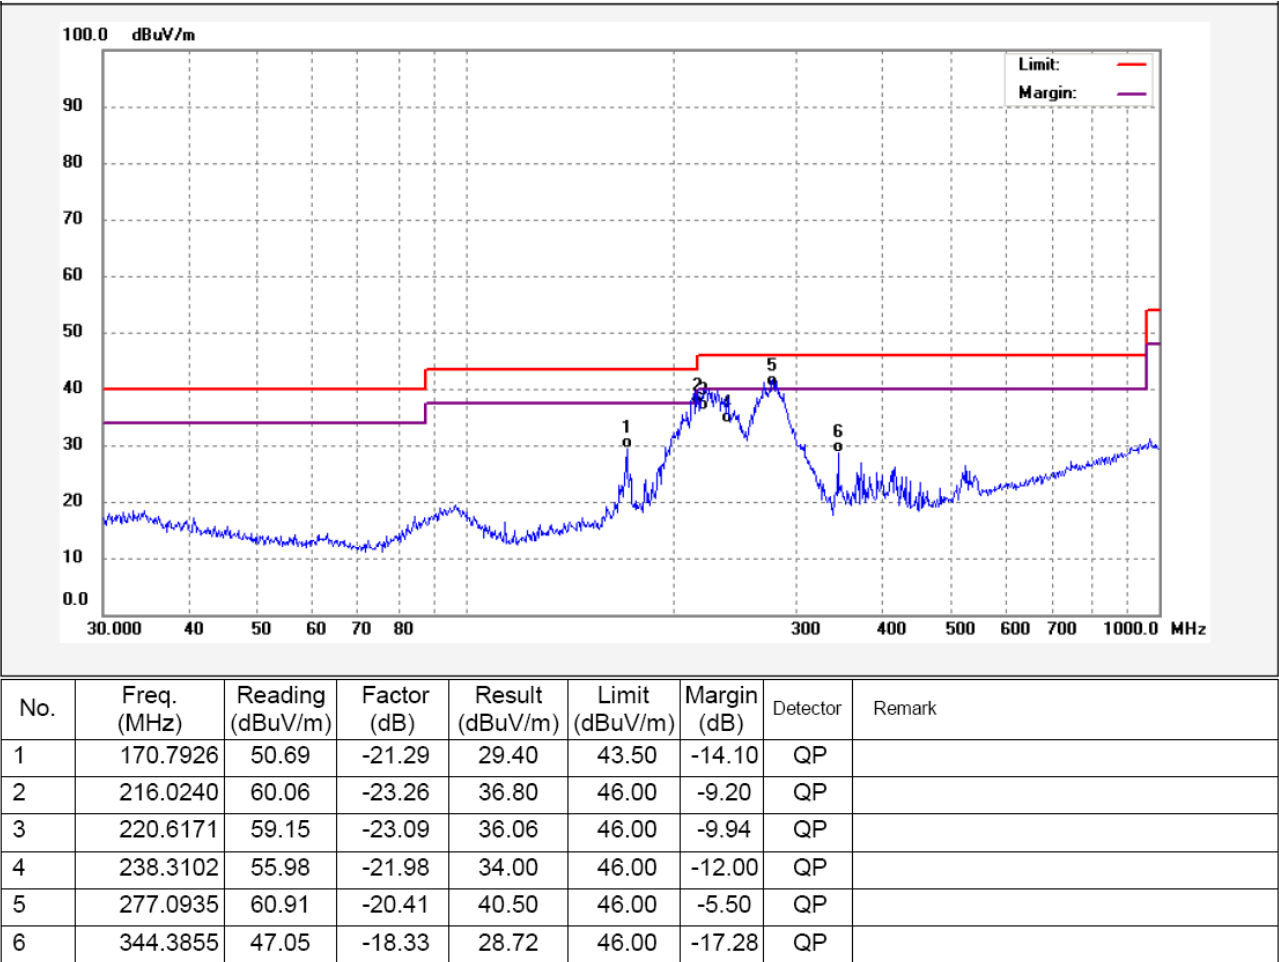

Test voltage: AC 120V/60Hz for adapter  
Test Mode: GFSK Lower channel transmitting+Charging(the worst mode)  
Antenna polarization: Vertical

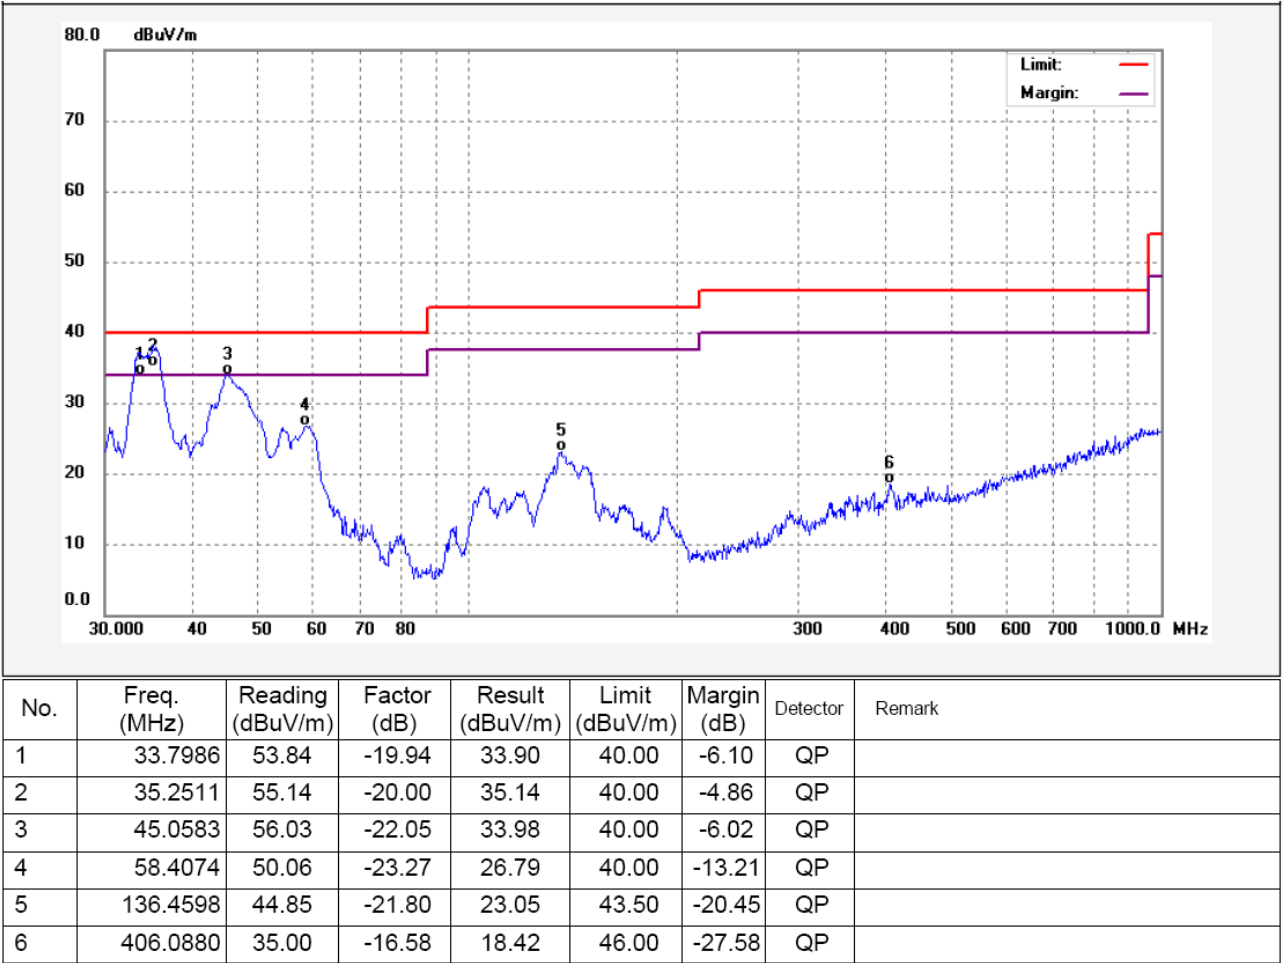

Antenna polarization: Horizontal

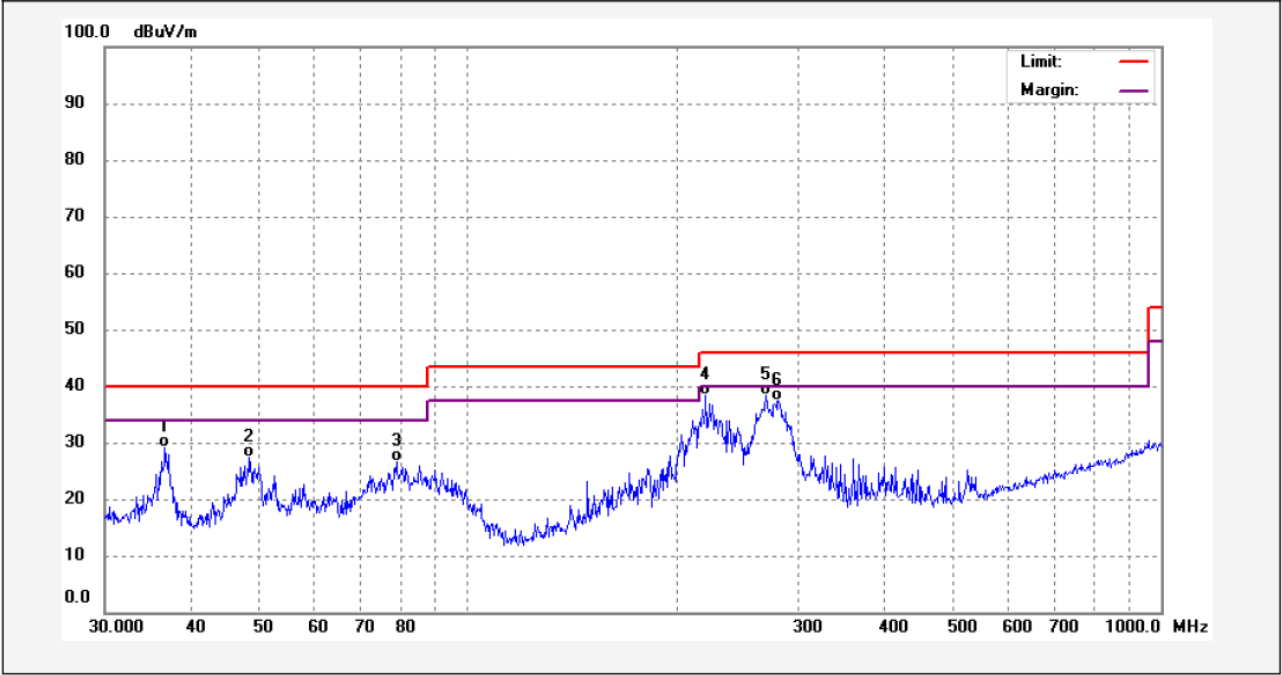

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 36.6375        | 47.40               | -18.38         | 29.02              | 40.00             | -10.98         | QP       |        |
| 2   | 48.5016        | 48.06               | -20.77         | 27.29              | 40.00             | -12.71         | QP       |        |
| 3   | 78.9652        | 51.98               | -25.42         | 26.56              | 40.00             | -13.44         | QP       |        |
| 4   | 220.6171       | 61.45               | -23.09         | 38.36              | 46.00             | -7.64          | QP       |        |
| 5   | 269.4284       | 59.09               | -20.77         | 38.32              | 46.00             | -7.68          | QP       |        |
| 6   | 280.0237       | 57.64               | -20.28         | 37.36              | 46.00             | -8.64          | QP       |        |

Test Frequency: 1GHz ~ 18GHz


All the modulation modes were tested, the data of the worst mode (GFSK) were recorded in the following pages.

AV = Peak +20Log<sub>10</sub>(duty cycle) =PK+(-9)=PK-9 [refer to section 8 for more detail]


Test Frequency: 1GHz ~ 18GHz

Test mode: transmitting at lower channel

Antenna polarization: Vertical

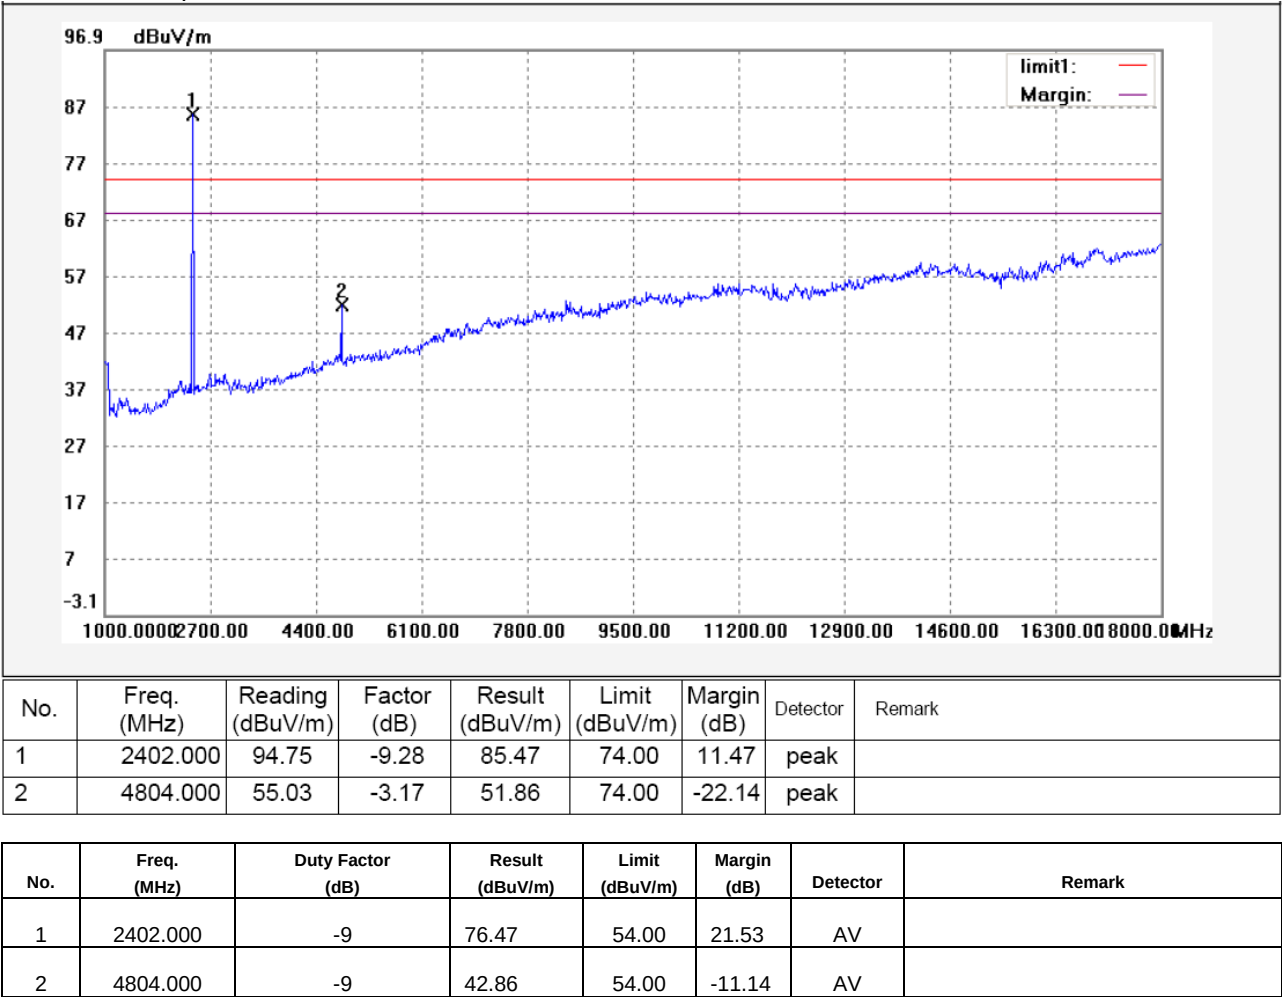

Antenna polarization: Horizontal

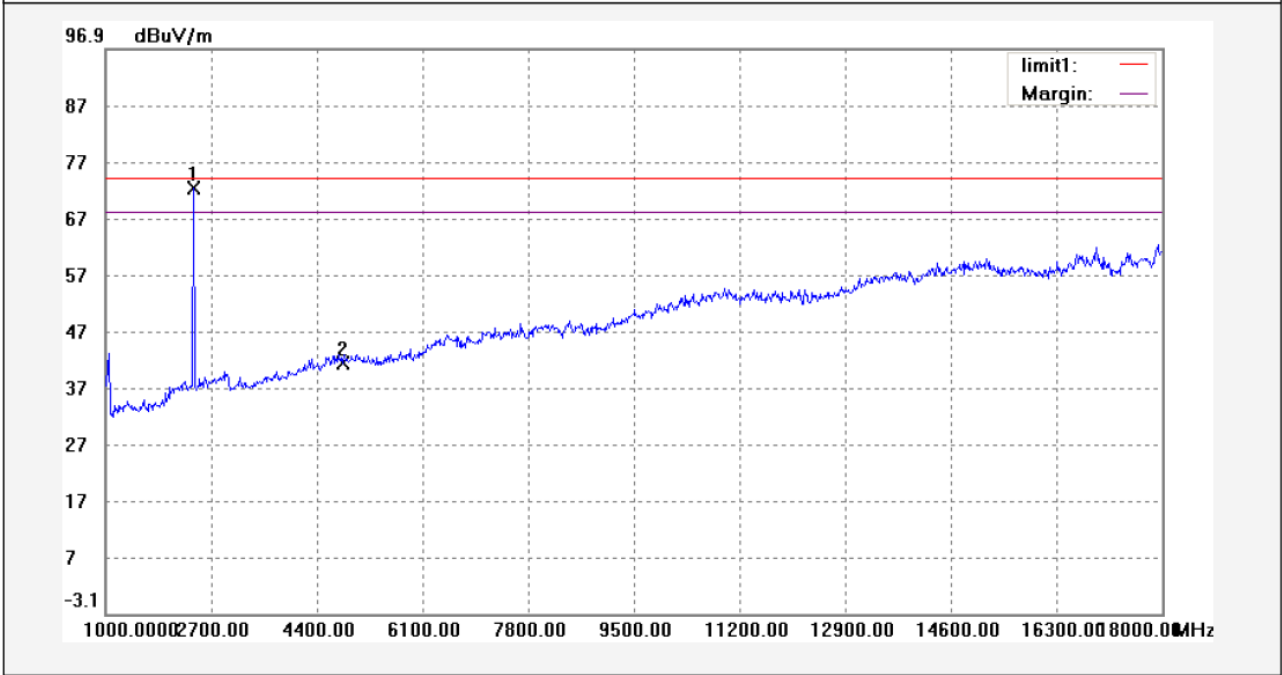


| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 2402.000       | 81.55               | -9.28          | 72.27              | 74.00             | -1.73          | peak     |        |
| 2   | 4804.000       | 44.55               | -3.17          | 41.38              | 74.00             | -32.62         | peak     |        |

| No. | Freq.<br>(MHz) | Duty Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 2402.000       | -9                  | 63.27              | 54.00             | 10.73          | AV       |        |
| 2   | 4804.000       | -9                  | 32.38              | 54.00             | -21.62         | AV       |        |

Test mode: transmitting at middle channel


Antenna polarization: Vertical

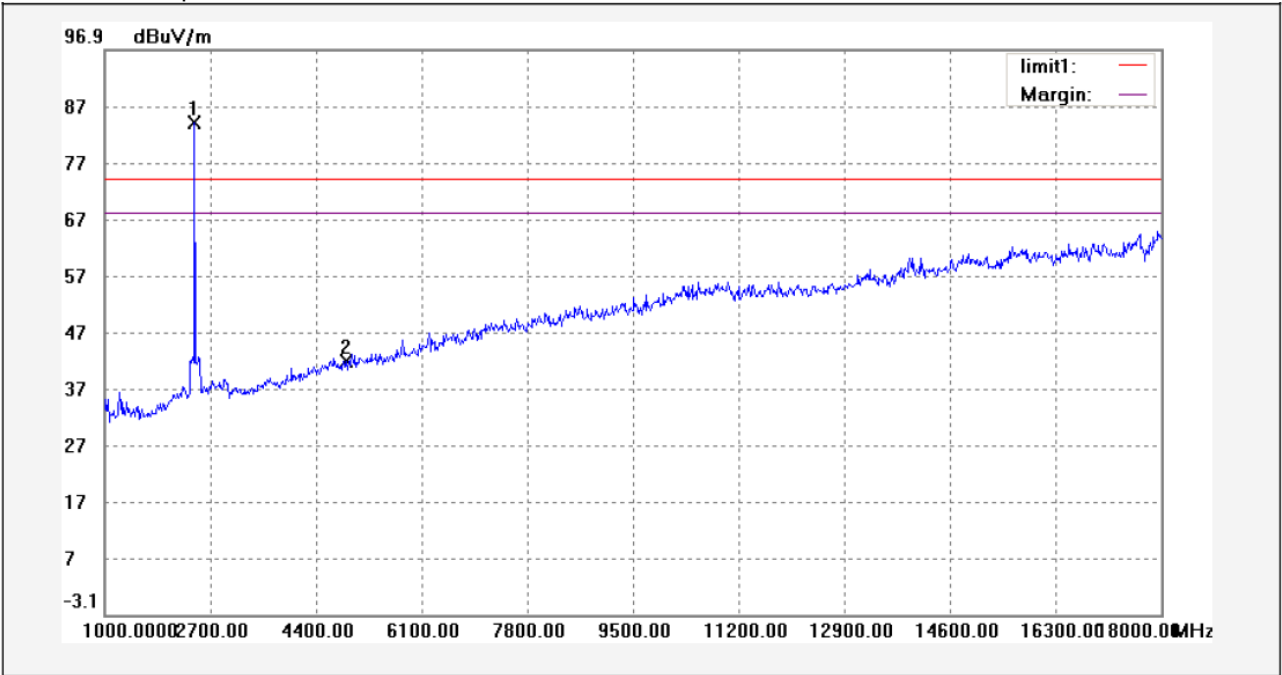

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 2441.000       | 93.34               | -9.32          | 84.02              | 74.00             | 10.02          | peak     |        |
| 2   | 4882.000       | 44.71               | -3.04          | 41.67              | 74.00             | -32.33         | peak     |        |

| No. | Freq.<br>(MHz) | Duty Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 2441.000       | -9                  | 75.02              | 54.00             | 21.02          | AV       |        |
| 2   | 4882.000       | -9                  | 32.67              | 54.00             | -21.33         | AV       |        |

Antenna polarization: Horizontal

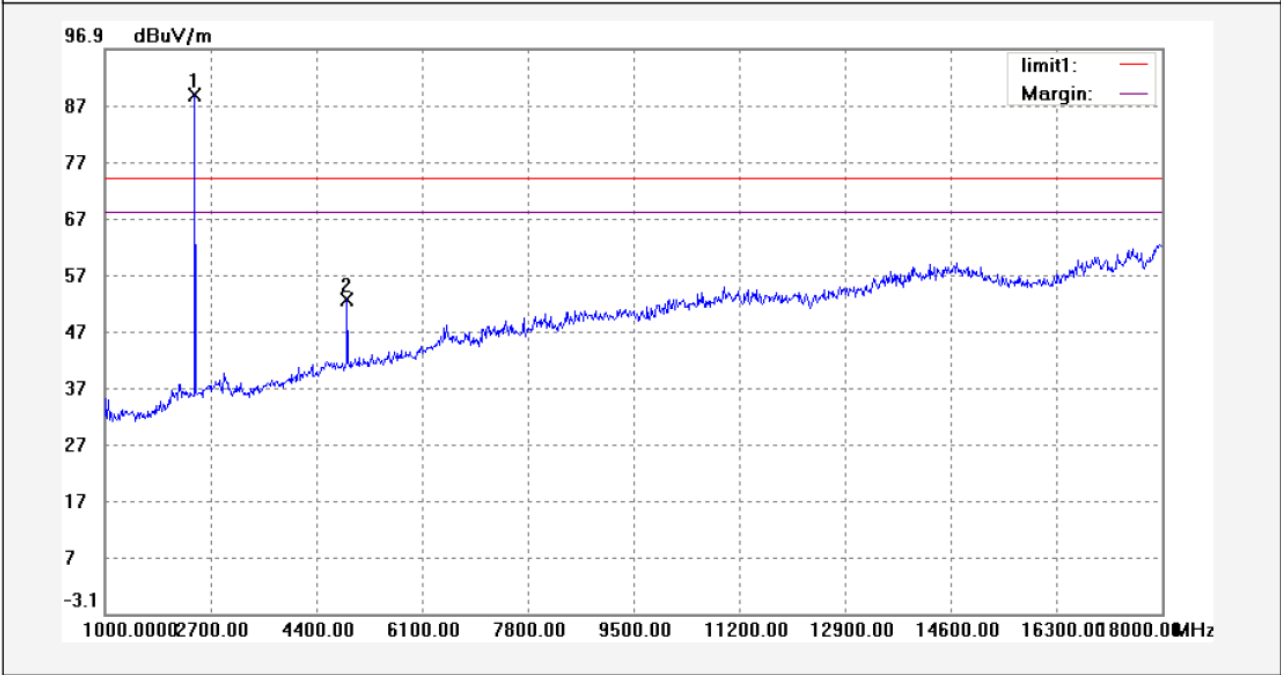


| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 2441.000       | 98.09               | -9.32          | 88.77              | 74.00             | 14.77          | peak     |        |
| 2   | 4882.000       | 55.58               | -3.04          | 52.54              | 74.00             | -21.46         | peak     |        |

| No. | Freq.<br>(MHz) | Duty Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 2441.000       | -9                  | 79.77              | 54.00             | 25.77          | AV       |        |
| 2   | 4882.000       | -9                  | 43.54              | 54.00             | -10.46         | AV       |        |



Test mode: transmitting at upper channel


Antenna polarization: Vertical

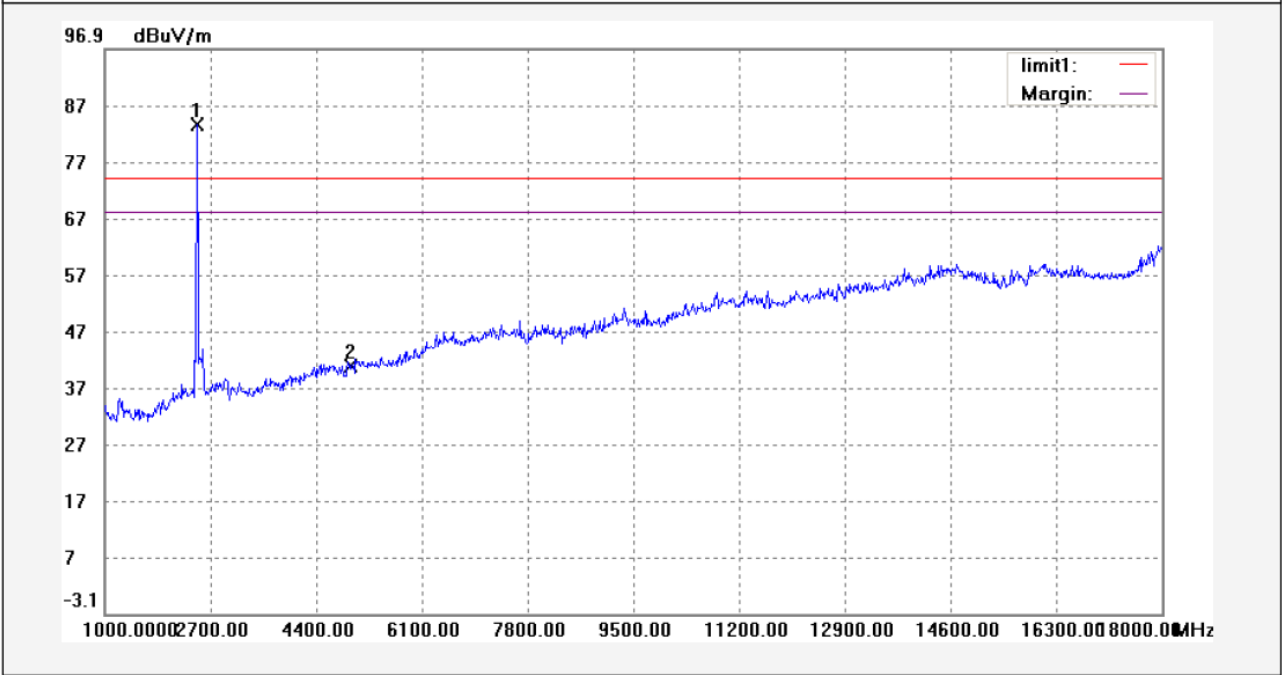

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 2479.000       | 92.71               | -9.22          | 83.49              | 74.00             | 9.49           | peak     |        |
| 2   | 4960.000       | 43.61               | -2.81          | 40.80              | 74.00             | -33.20         | peak     |        |

| No. | Freq.<br>(MHz) | Duty Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 2479.000       | -9                  | 74.49              | 54.00             | 20.49          | AV       |        |
| 2   | 4960.000       | -9                  | 31.80              | 54.00             | -22.20         | AV       |        |

Antenna polarization: Horizontal

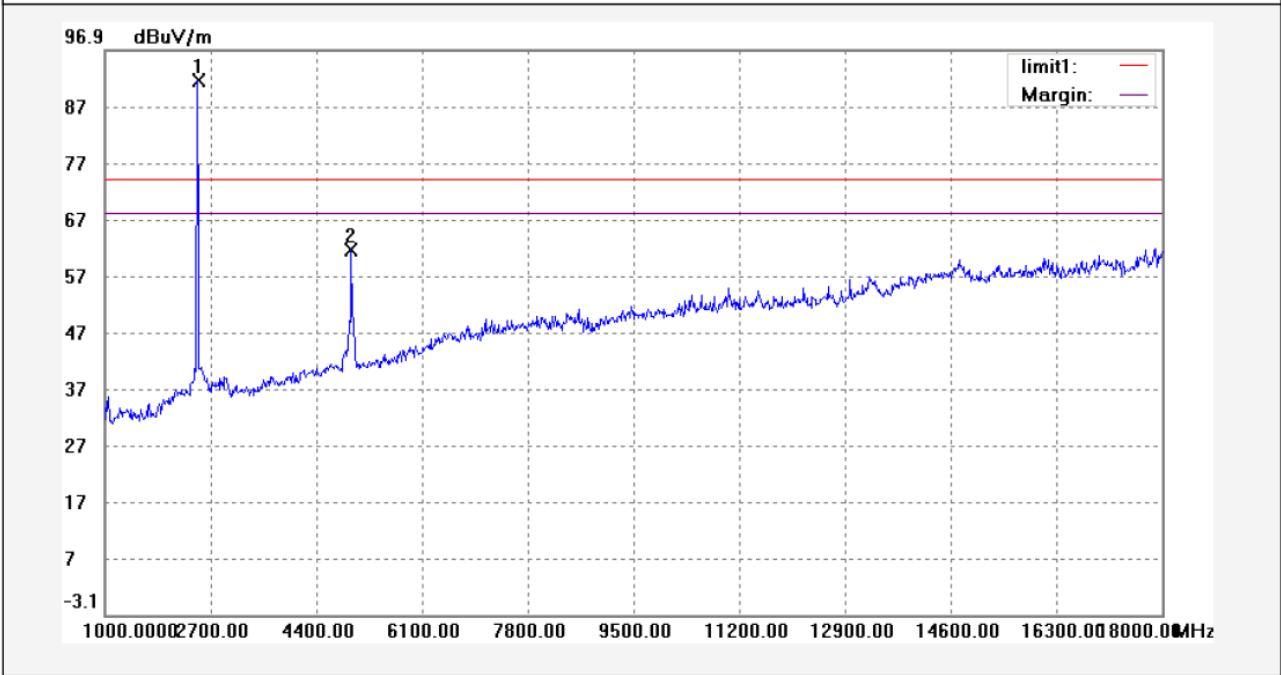


| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 2480.000       | 100.77              | -9.22          | 91.55              | 74.00             | 17.55          | peak     |        |
| 2   | 4960.000       | 64.41               | -2.81          | 61.60              | 74.00             | -12.40         | peak     |        |

| No. | Freq.<br>(MHz) | Duty Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 2480.000       | -9                  | 82.55              | 54.00             | 28.55          | AV       |        |
| 2   | 4960.000       | -9                  | 52.60              | 54.00             | -1.40          | AV       |        |

Test mode: receiving whole band


Antenna polarization: Vertical

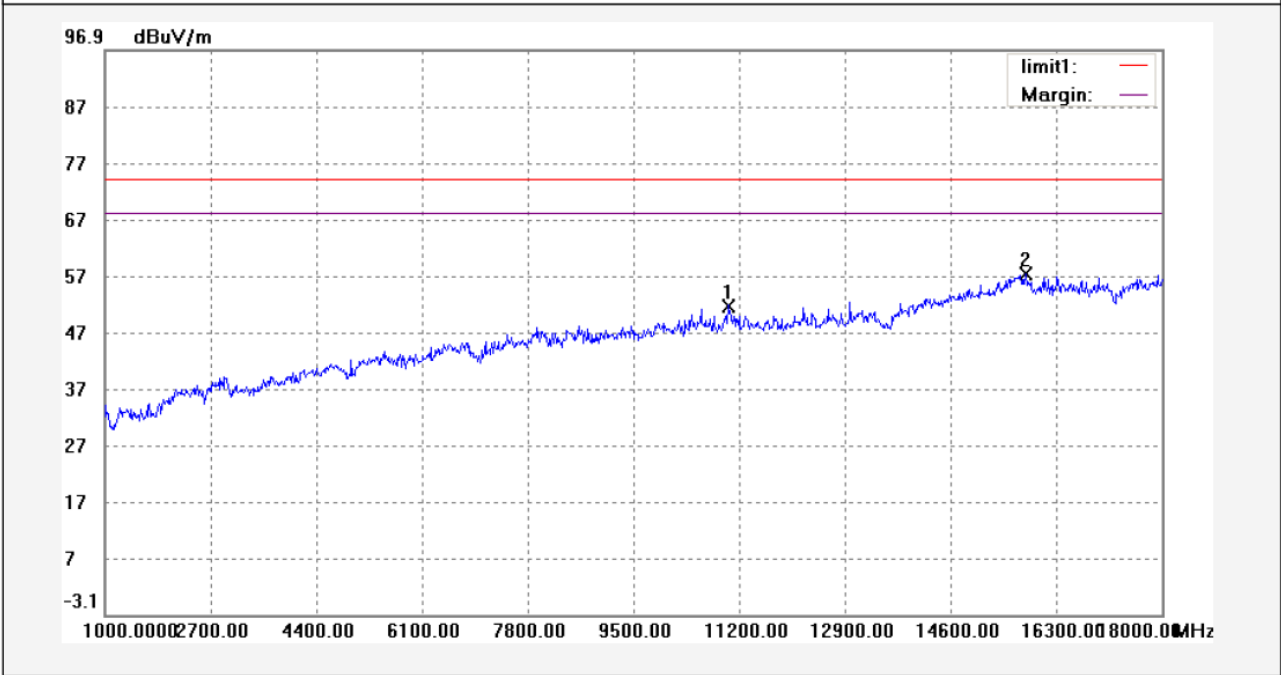

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 11030.000      | 40.22               | 11.43          | 51.65              | 74.00             | -22.35         | peak     |        |
| 2   | 15807.000      | 42.27               | 15.12          | 57.39              | 74.00             | -16.61         | peak     |        |

| No. | Freq.<br>(MHz) | Duty Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 11030.000      | -9                  | 42.65              | 54.00             | -11.35         | AV       |        |
| 2   | 15807.000      | -9                  | 48.39              | 54.00             | -5.61          | AV       |        |

Antenna polarization: Horizontal

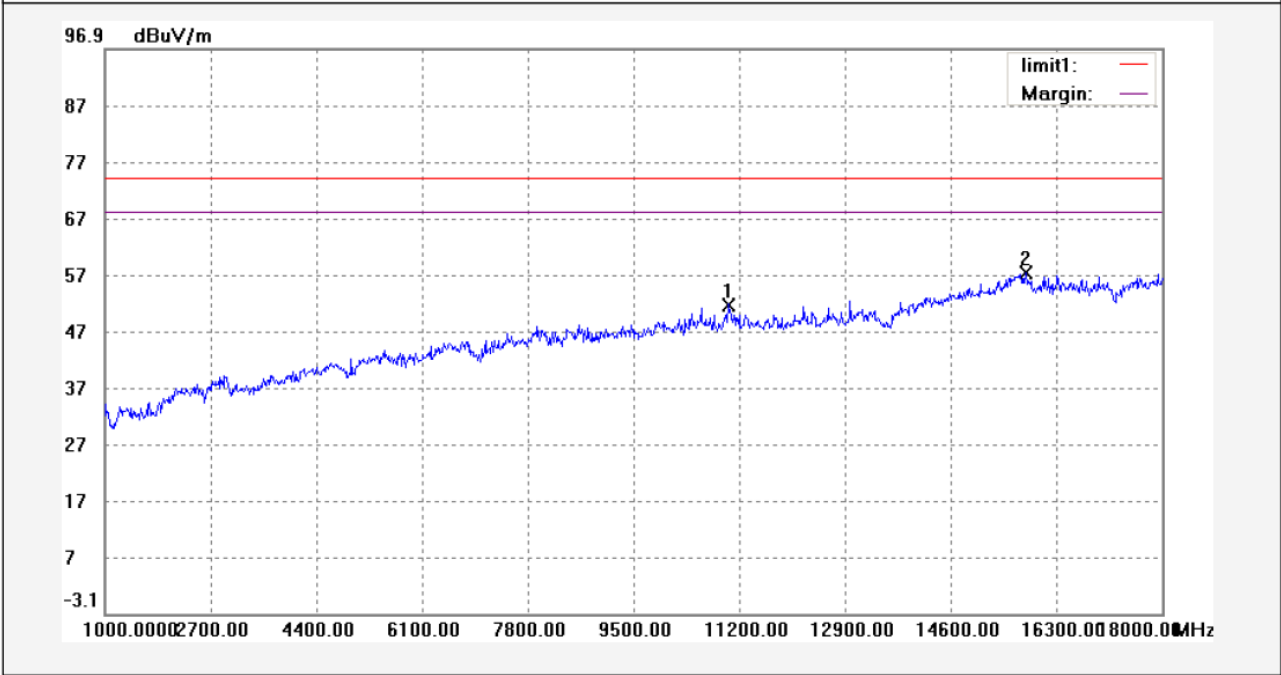

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 11030.000   | 40.22            | 11.43       | 51.65           | 74.00          | -22.35      | peak     |        |
| 2   | 15807.000   | 42.27            | 15.12       | 57.39           | 74.00          | -16.61      | peak     |        |

| No. | Freq. (MHz) | Duty Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-----------------|----------------|-------------|----------|--------|
| 1   | 11030.000   | -9               | 42.65           | 54.00          | -11.35      | AV       |        |
| 2   | 15807.000   | -9               | 48.39           | 54.00          | -5.61       | AV       |        |

Test Frequency :Above 18GHz

All emissions were more than 20 dB below the limit and therefore not reported

## 8 Spurious RF Conducted Emissions from out of band

Test Requirement: FCC Part 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: DA 00-705

Test Status: TX mode

### 8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set to span from the lowest frequency generated in the device up to and including the tenth harmonic of the highest fundamental frequency.
3. Set RBW = 100kHz and VBW = 300kHz. Sweep = auto.
4. mark the worst point and record.

### 8.2 Test Result



#### Test Frequency: Below 30MHz

Remark: For emissions below 30MHz, no emission higher than background level, so the data does not show in the report.



#### Test Frequency: 30MHz ~ 25GHz



Test result plots shown as follows:

Modulation:GFSK  
Lower Channel

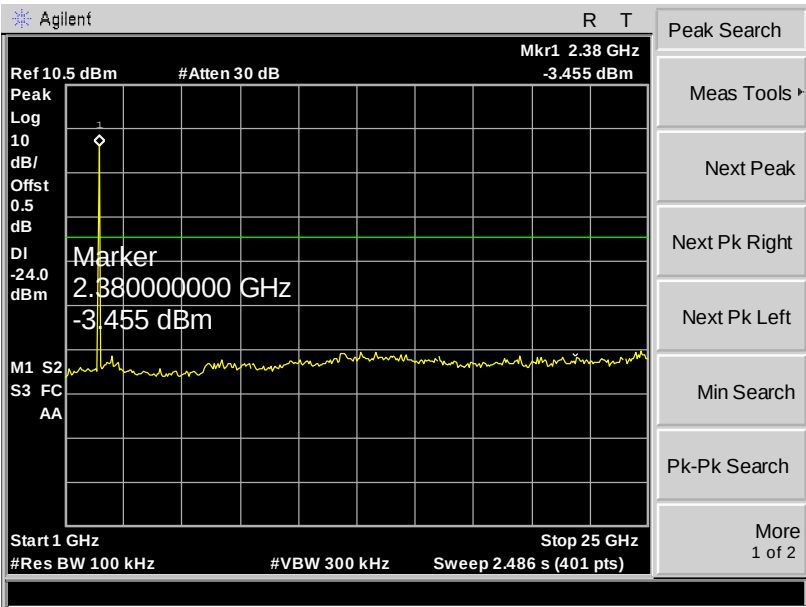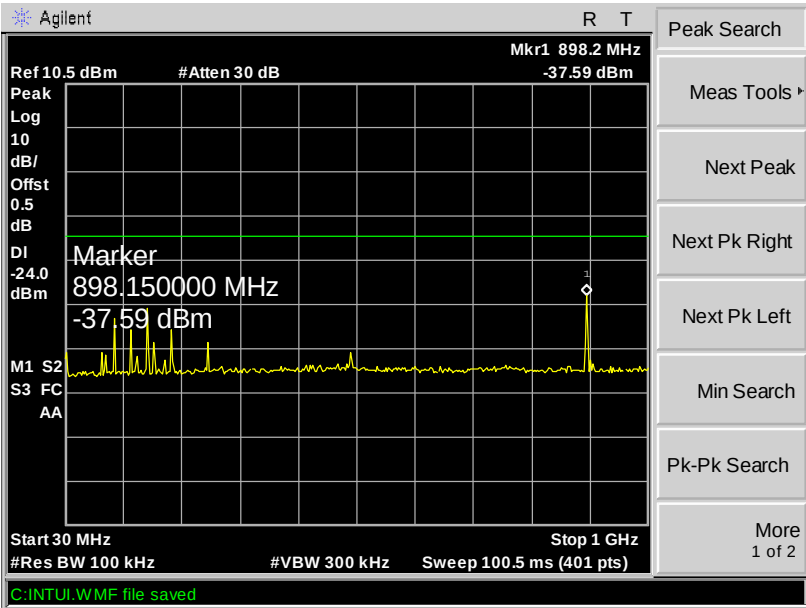

Middle Channel

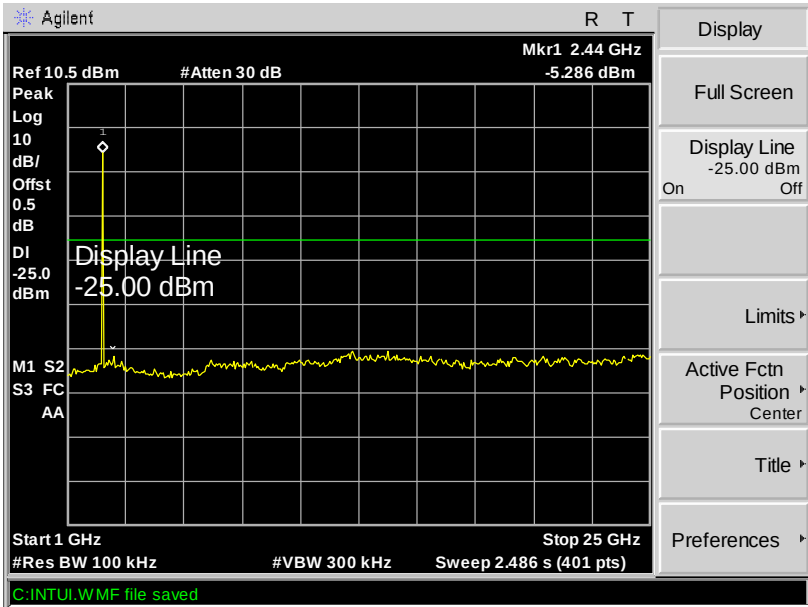
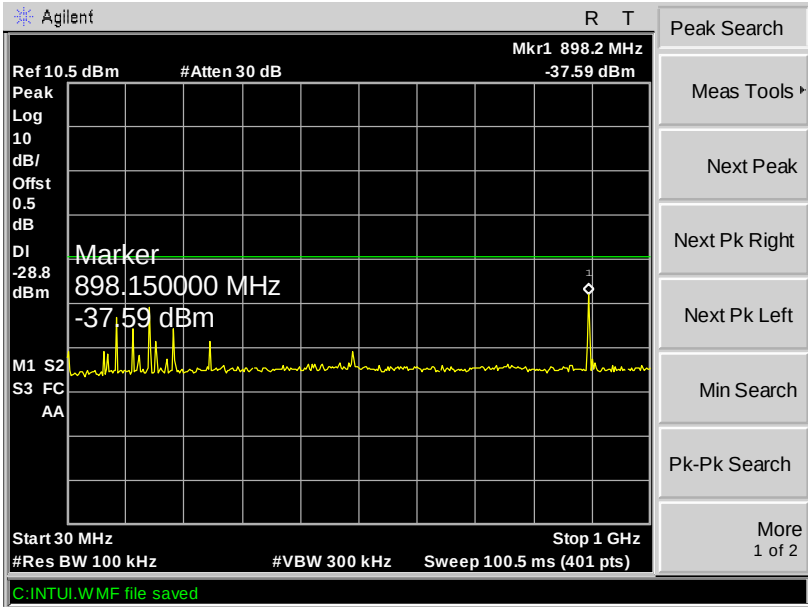


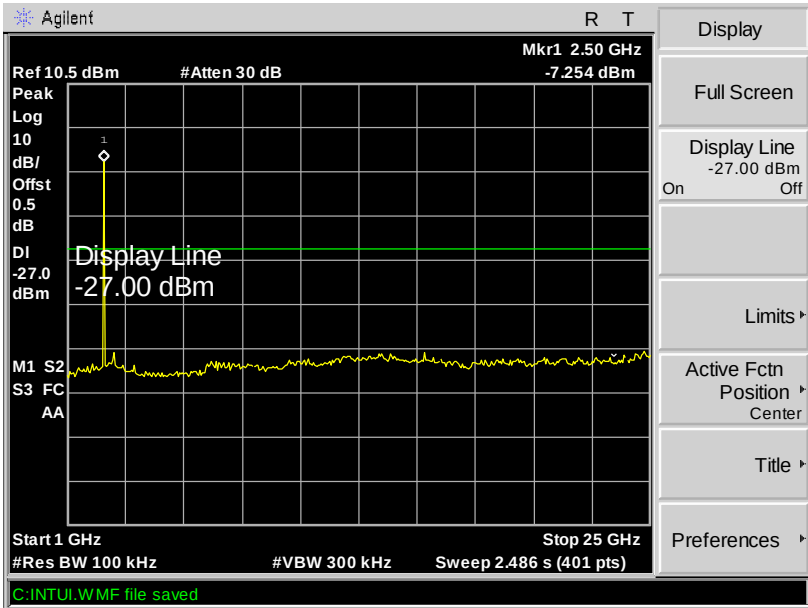
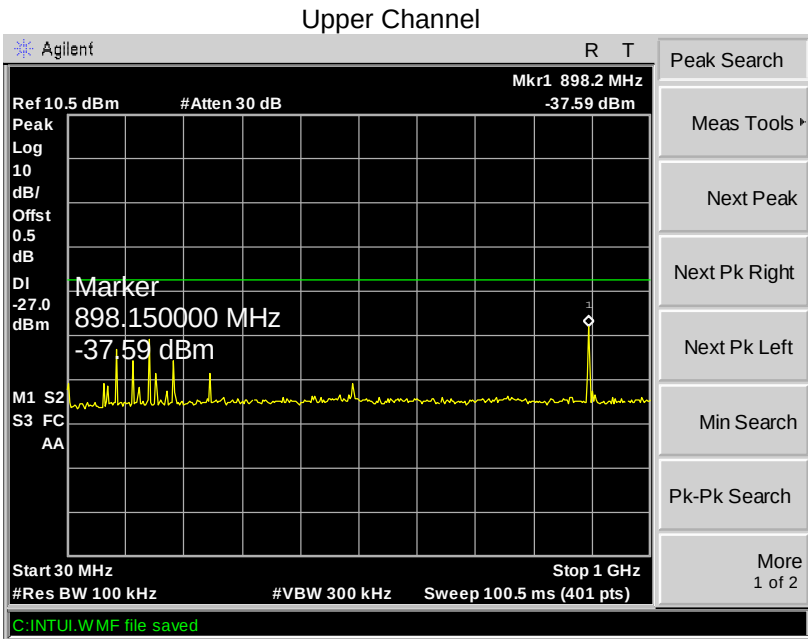






Modulation: Pi/4DQPSK

Lower Channel

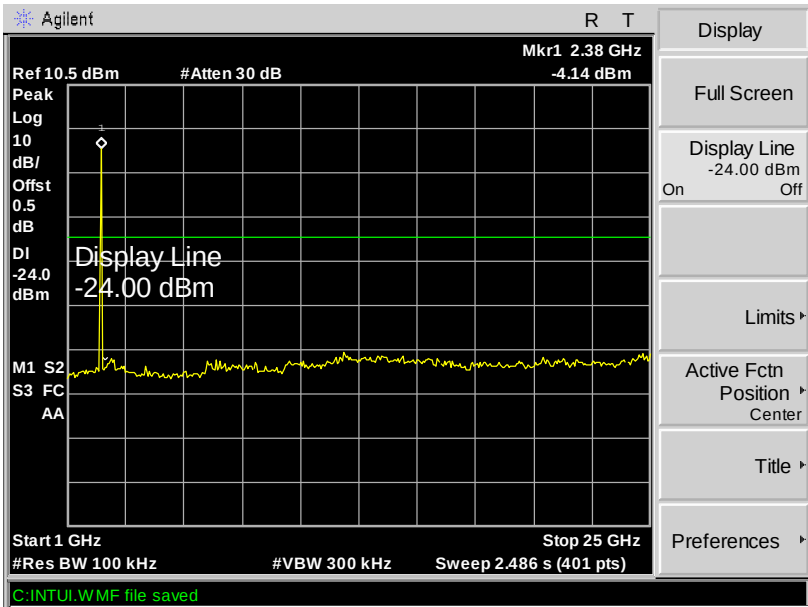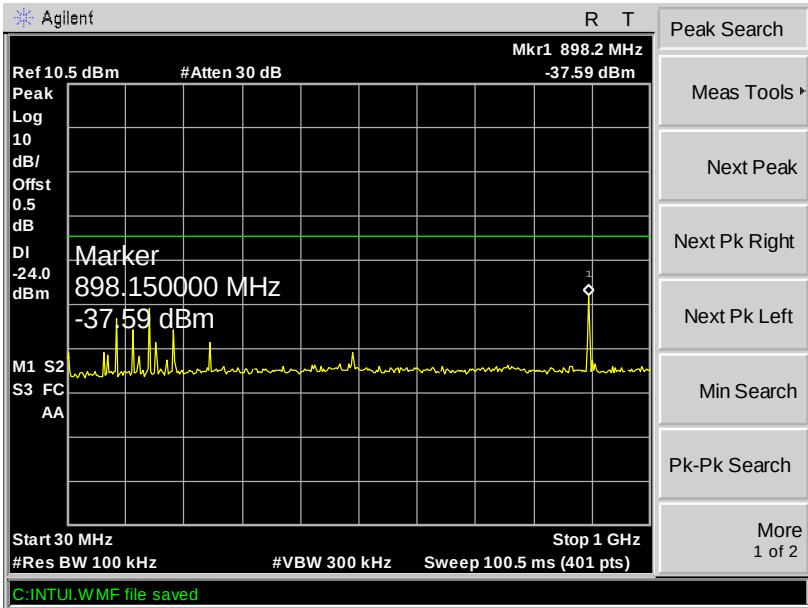

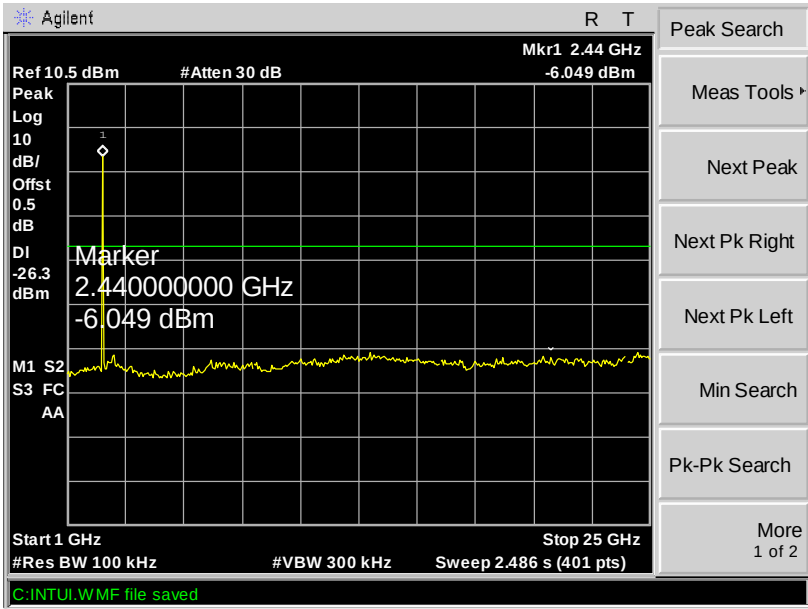
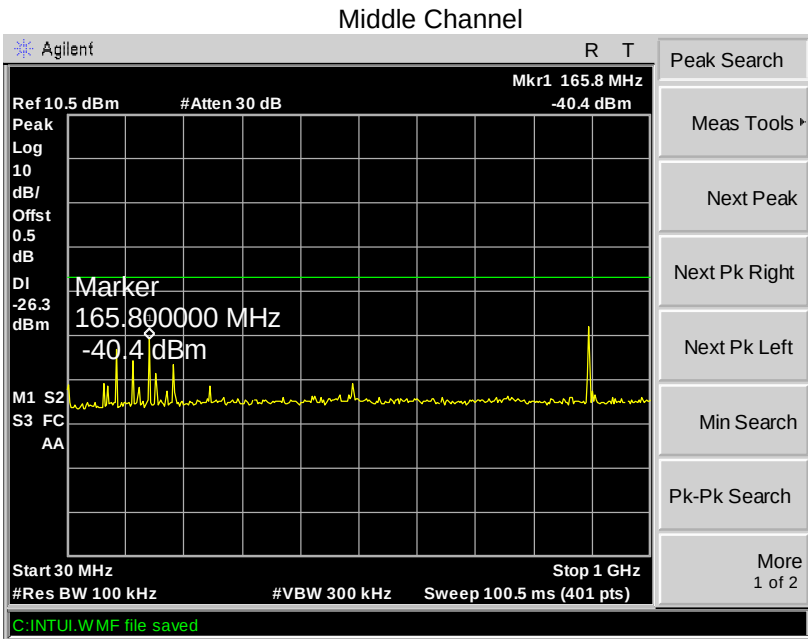




Upper Channel

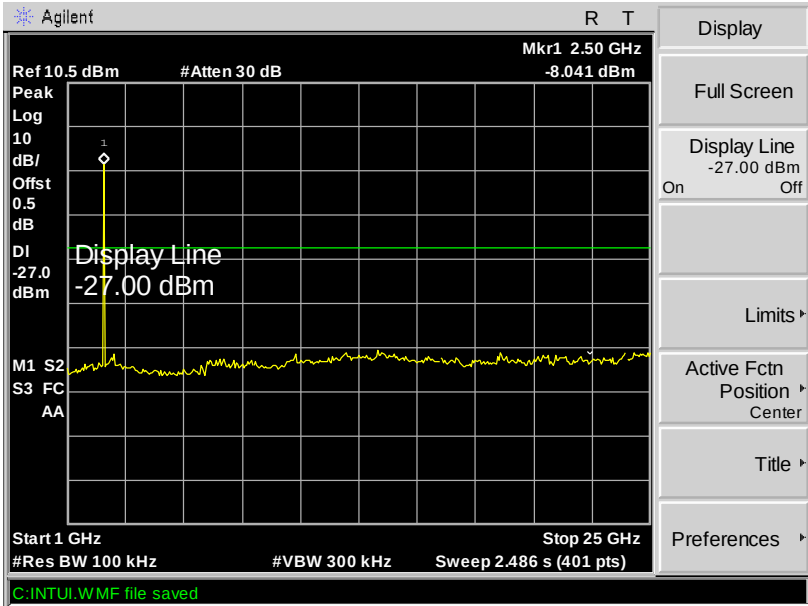
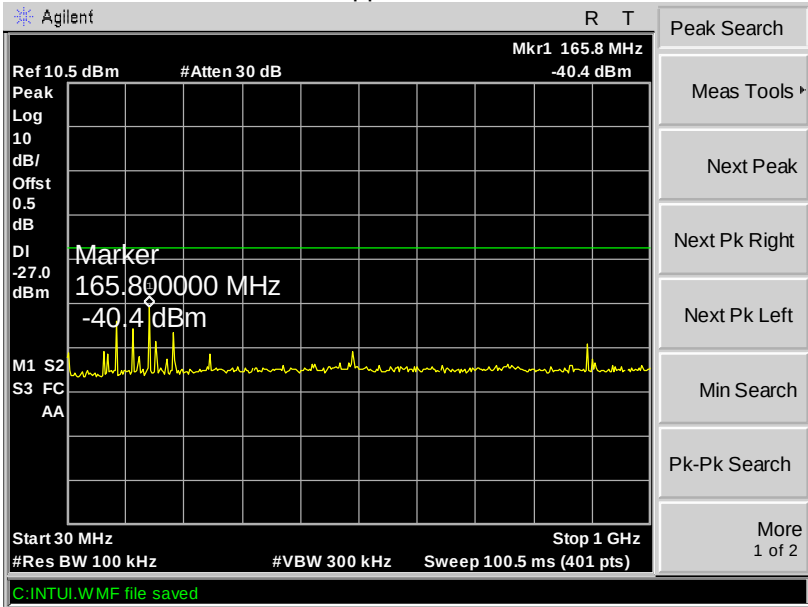


Modulation: 8DPSK

Lower Channel

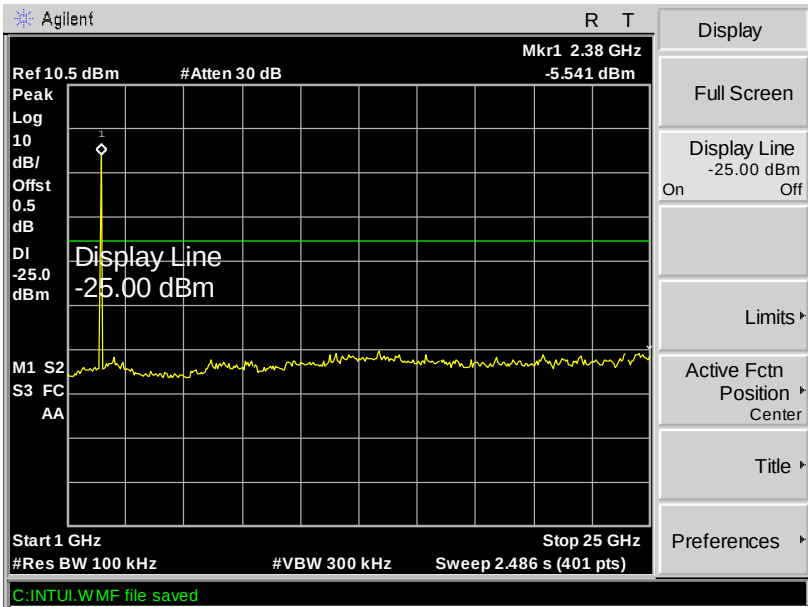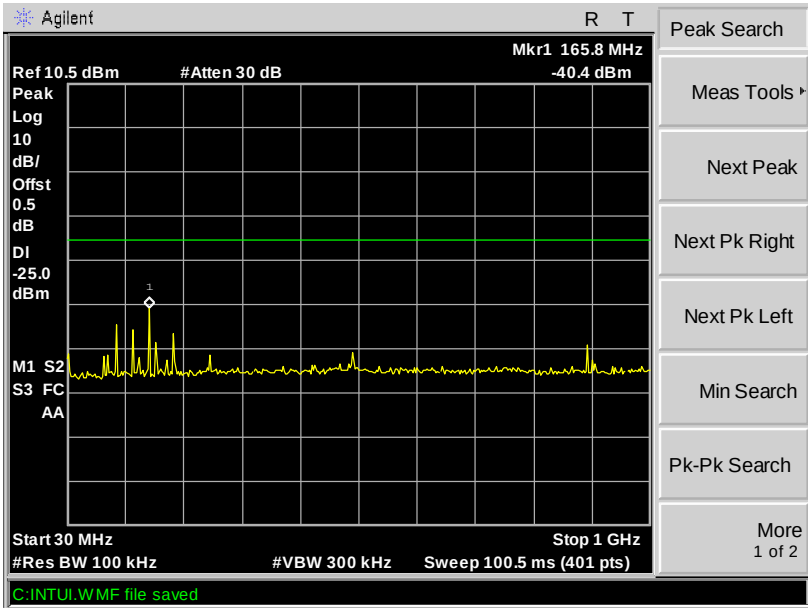

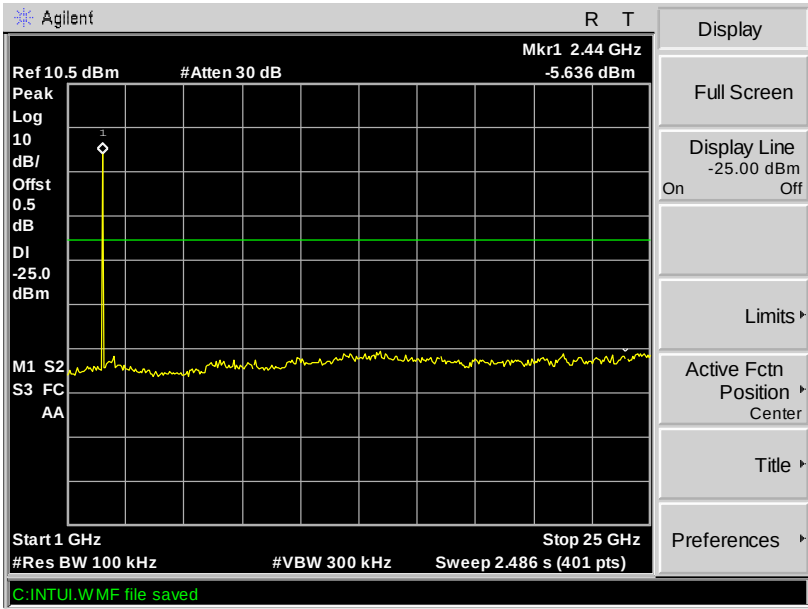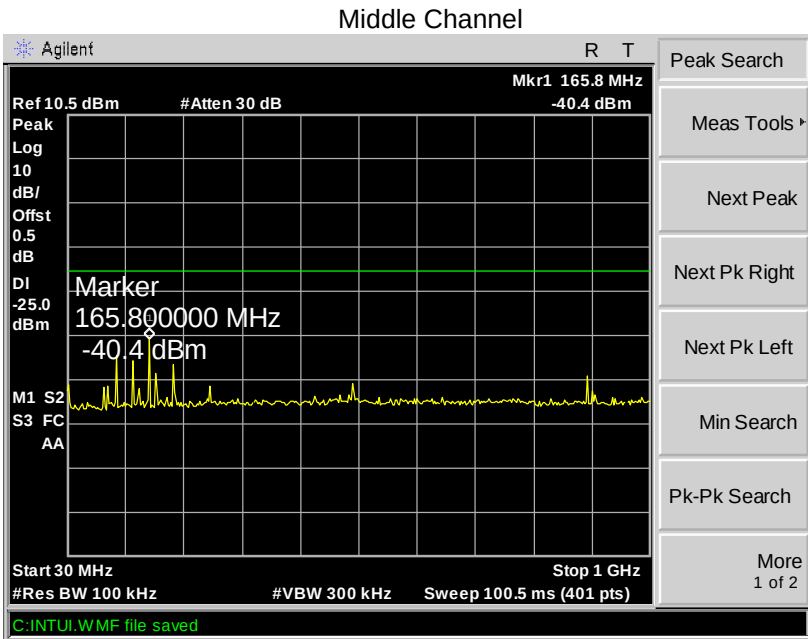

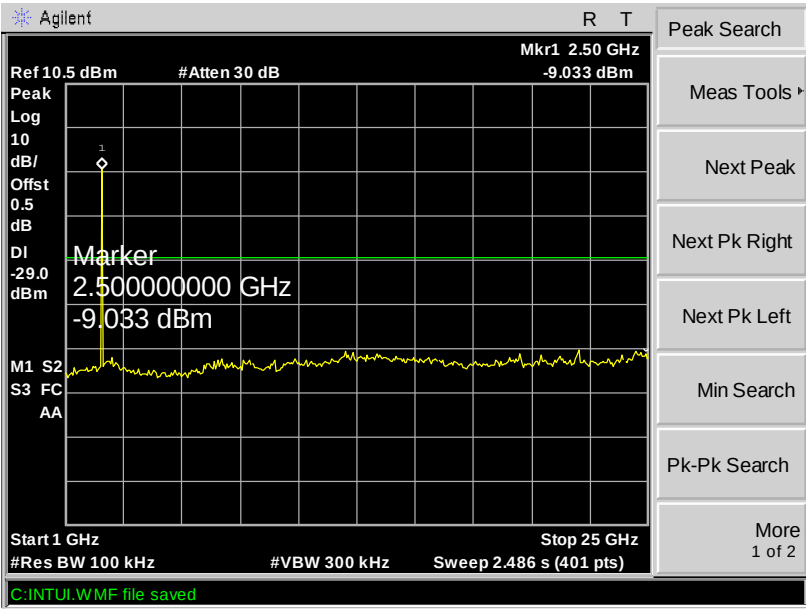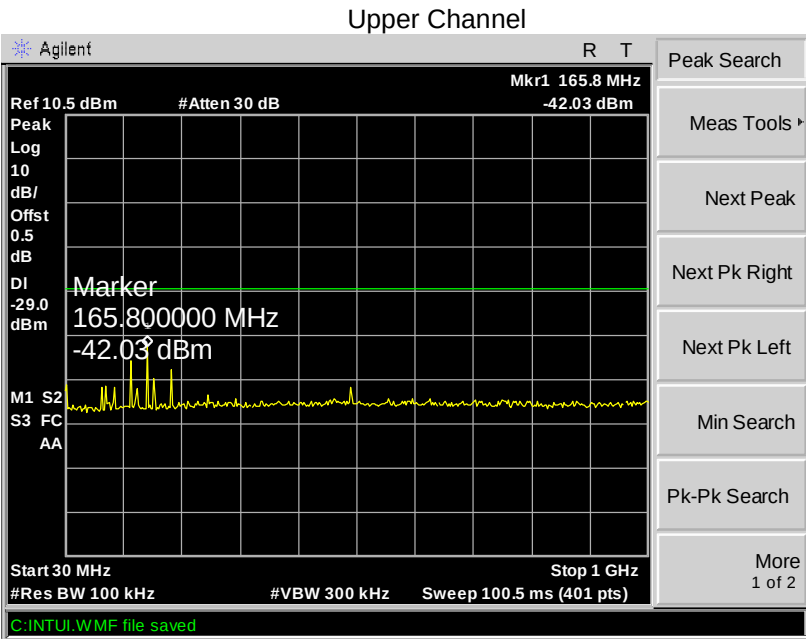

## 9 Duty Cycle


Test Requirement: FCC Part 15.35  
Test Method: ANSI C63.4:2003  
Test Status: TX mode.

### 9.1 Test Procedure


1. The EUT was placed on a turntable which is 0.8m above ground plane
2. Set EUT as normal working mode
3. Set SPA center frequency = fundamental frequency, RBW = 1000 kHz, VBW = 1000 kHz, Span = 0 Hz, Adjacent sweep time.

### 9.2 Test Result

(a) transmission period is 0.45ms

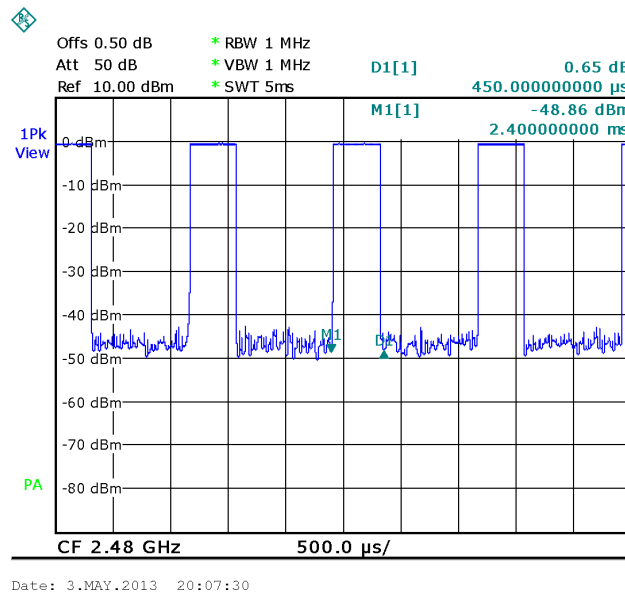

(b) Single pulse time is 1.25ms

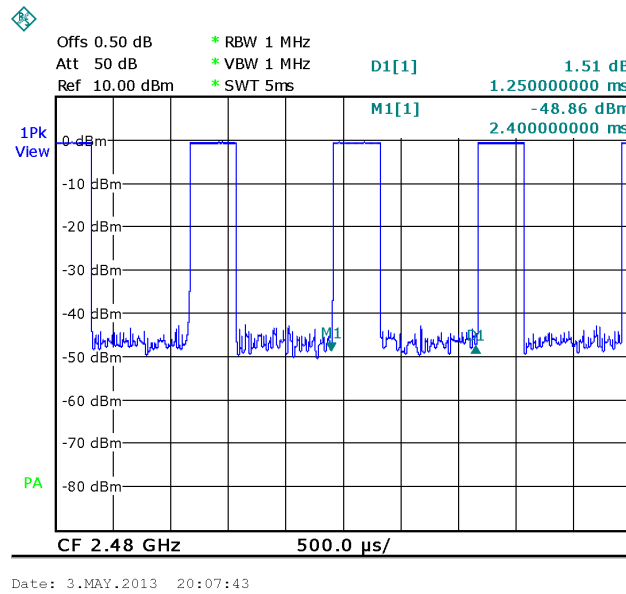

The EUT is auto. operation for transmitter, it is declared by the manufacturer as a duty cycle ratio of less than 100%.

The EUT's work time :  $T_{on}$  = pulse time = 0.45 ms

The EUT's work period :  $T = T_{ON} + T_{OFF}$  = transmission period = 1.25 ms

The EUT's duty cycle :  $D = T_{on} / T = 0.45 / 1.25 * 100\% = 36\%$

Duty Cycle Correction Factor(dB) =  $20 * \log_{10}(\text{Duty Cycle}) = 20 * \log_{10}(36\%)$

= -9dB



## 10 Band Edge Measurement


|                   |                                                                                                                                                                                                                                   |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). |
| Test Method:      | DA 00-705                                                                                                                                                                                                                         |
| Limit:            | 40.0 dBuV/m between 30MHz & 88MHz;<br>43.5 dBuV/m between 88MHz & 216MHz;<br>46.0 dBuV/m between 216MHz & 960MHz;<br>54.0 dBuV/m above 960MHz.<br>74.0 dBuV/m for peak above 1GHz<br>54.0 dBuV/m for AVG above 1GHz               |

### 10.1 Test Procedure

1. The EUT was placed on a turntable which is 0.8m above ground plane
2. Measurement Distance is 3m
3. Detector:
  - For Peak value:  
RBW = 1 MHz for  $f \geq 1$  GHz  
VBW  $\geq$  RBW; Sweep = auto  
Detector function = peak  
Trace = max hold
  - For AVG value:  
RBW = 1 MHz for  $f \geq 1$  GHz  
VBW = 10Hz; Sweep = auto  
Detector function = AVG  
Trace = max hold
- 4.continuous transmitting

10.2 Test Result:


Modulation: GFSK  
Lower Channel – Peak, Vertical

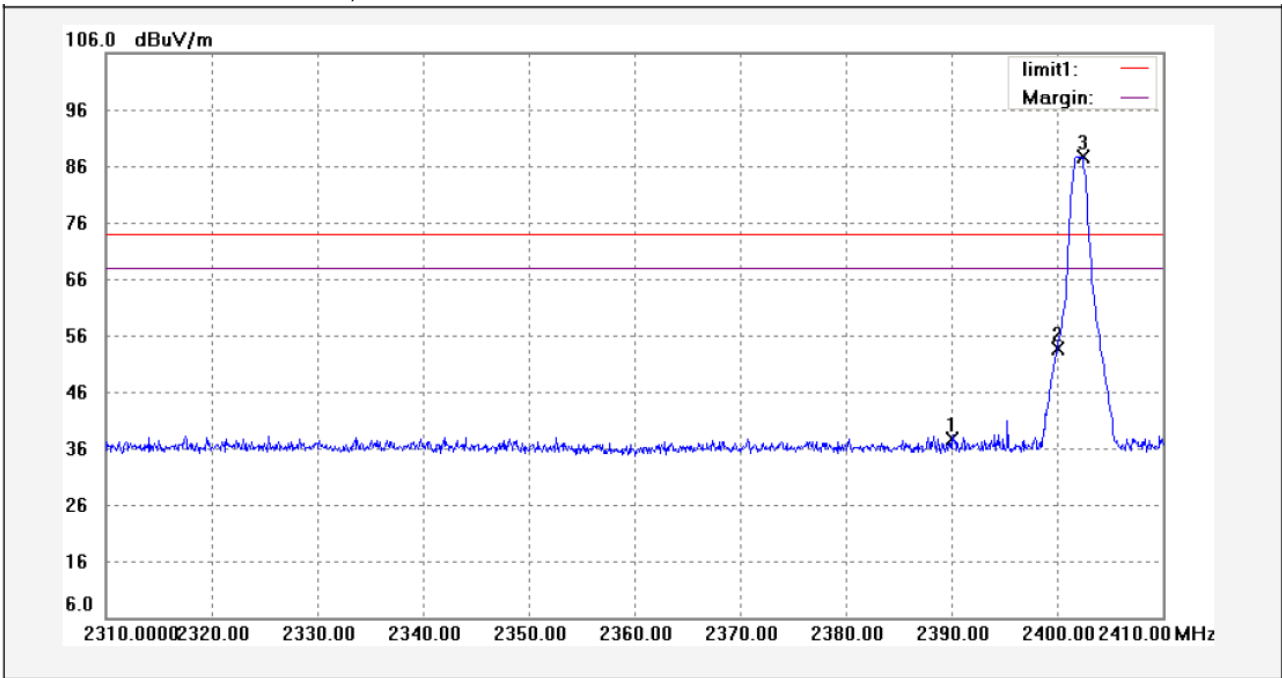


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2390.000    | 46.84            | -9.27       | 37.57           | 74.00          | -36.43      | peak     |        |
| 2   | 2400.000    | 62.87            | -9.28       | 53.59           | 74.00          | -20.41      | peak     |        |
| 3   | 2402.400    | 96.93            | -9.29       | 87.64           | 74.00          | 13.64       | peak     |        |

| No. | Freq. (MHz) | Duty Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2390.000    | -9               | 28.57           | 54.00          | -25.43      | AV       |        |
| 2   | 2400.000    | -9               | 44.59           | 54.00          | -9.41       | AV       |        |
| 3   | 2402.400    | -9               | 78.64           | 54.00          | 24.64       | AV       |        |

Lower Channel – Peak, Horizontal

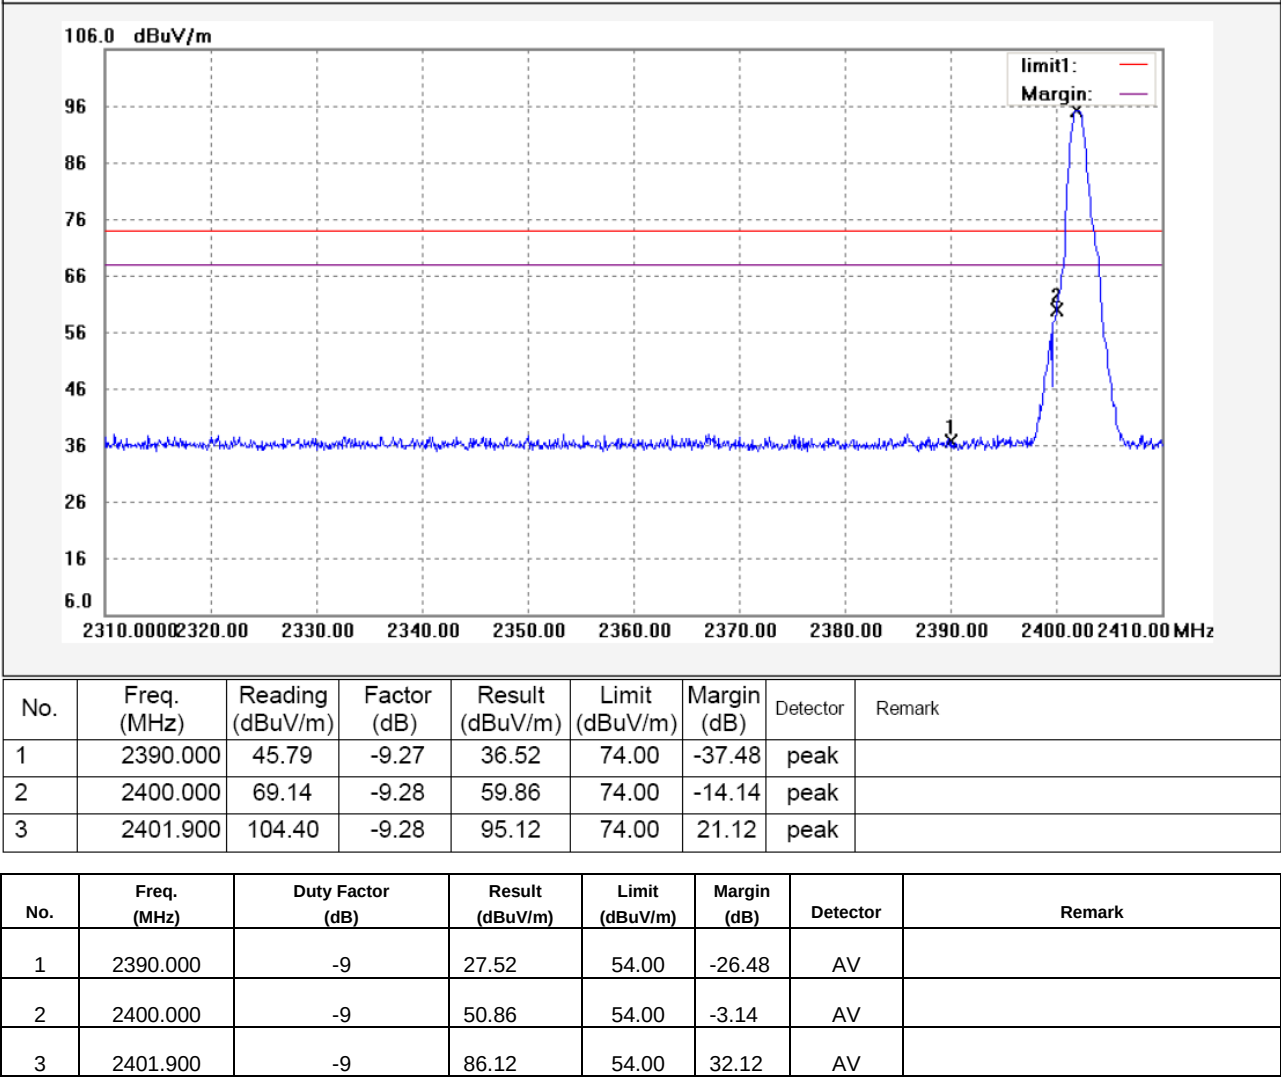


Upper Channel – Peak, Vertical

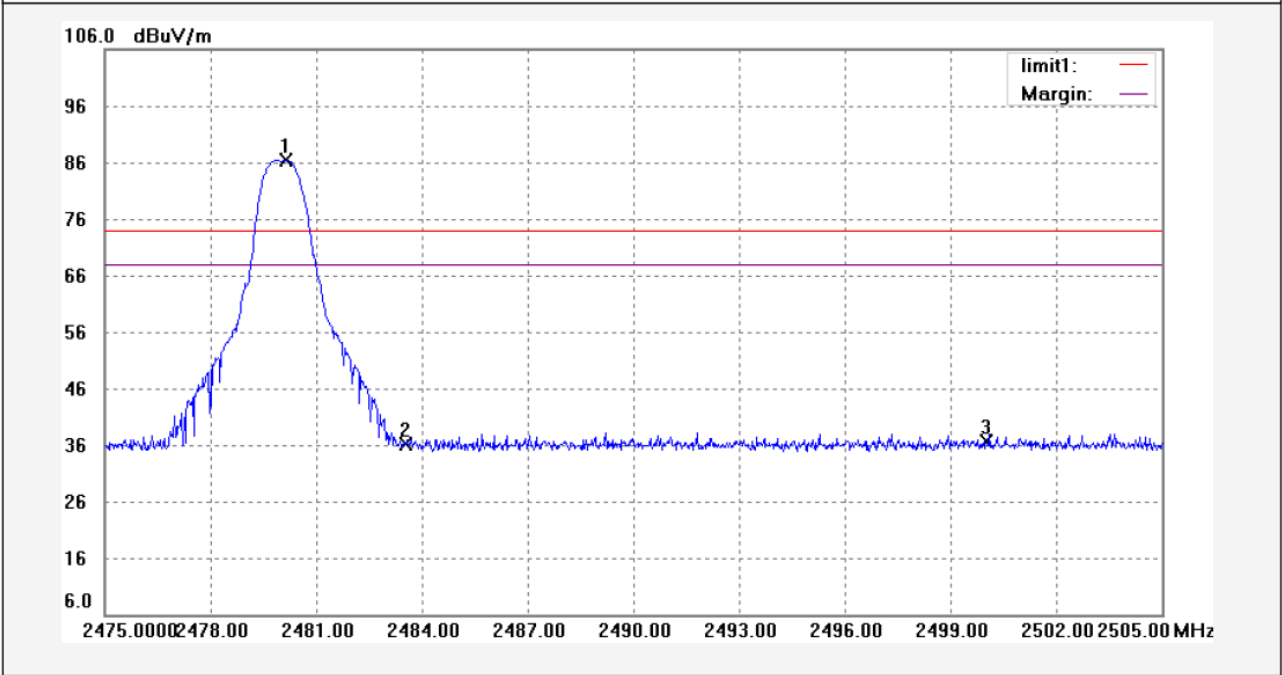

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2480.130    | 95.59            | -9.22       | 86.37           | 74.00          | 12.37       | peak     |        |
| 2   | 2483.500    | 45.30            | -9.20       | 36.10           | 74.00          | -37.90      | peak     |        |
| 3   | 2500.000    | 45.88            | -9.15       | 36.73           | 74.00          | -37.27      | peak     |        |


| No. | Freq. (MHz) | Duty Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2480.130    | -9               | 77.37           | 54.00          | 23.37       | AV       |        |
| 2   | 2483.500    | -9               | 27.10           | 54.00          | -26.90      | AV       |        |
| 3   | 2500.000    | -9               | 27.73           | 54.00          | -26.27      | AV       |        |

Upper Channel – Peak, Horizontal

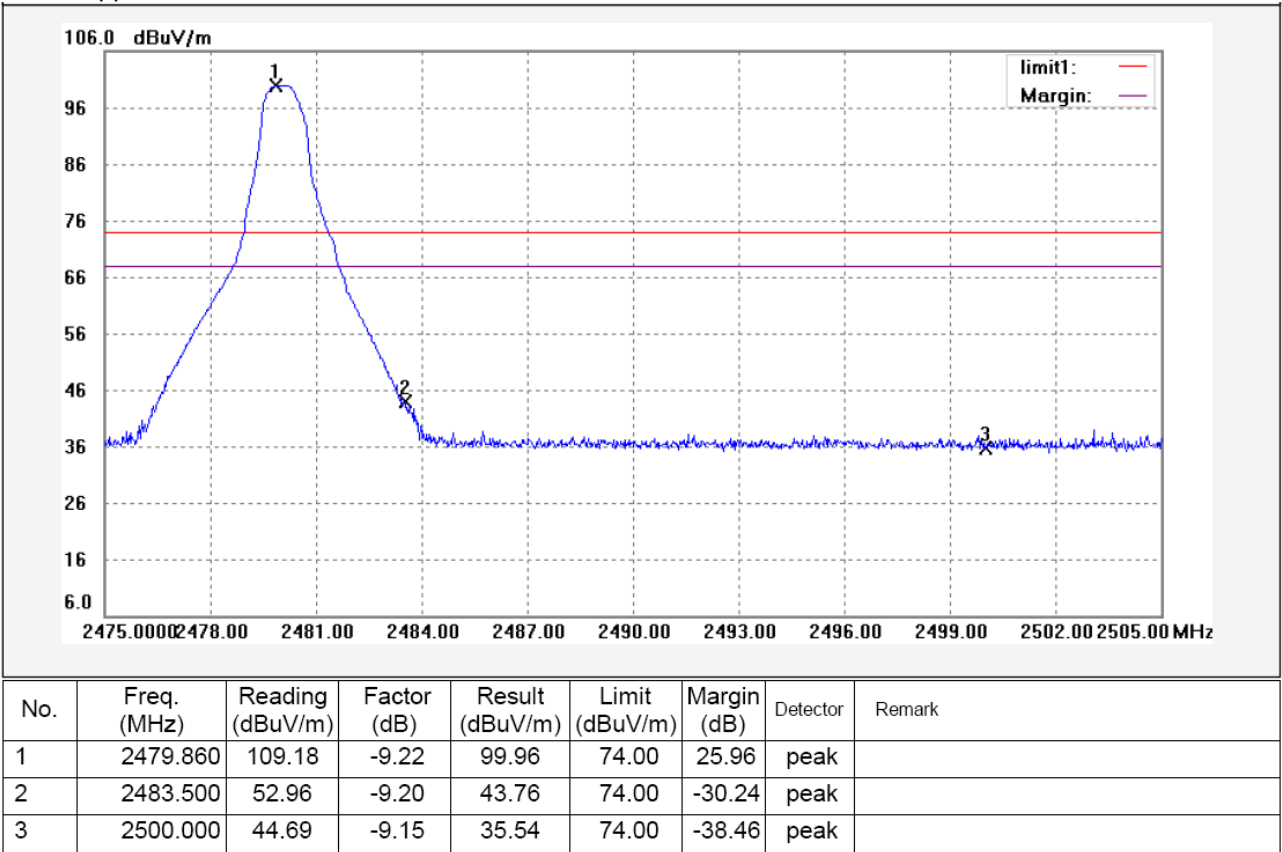

| No. | Freq. (MHz) | Duty Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2479.860    | -9               | 90.96           | 54.00          | 36.96       | AV       |        |
| 2   | 2483.500    | -9               | 34.76           | 54.00          | -19.24      | AV       |        |
| 3   | 2500.000    | -9               | 26.54           | 54.00          | -27.46      | AV       |        |


Modulation: Pi/4DQPSK  
Lower Channel – Peak, Vertical

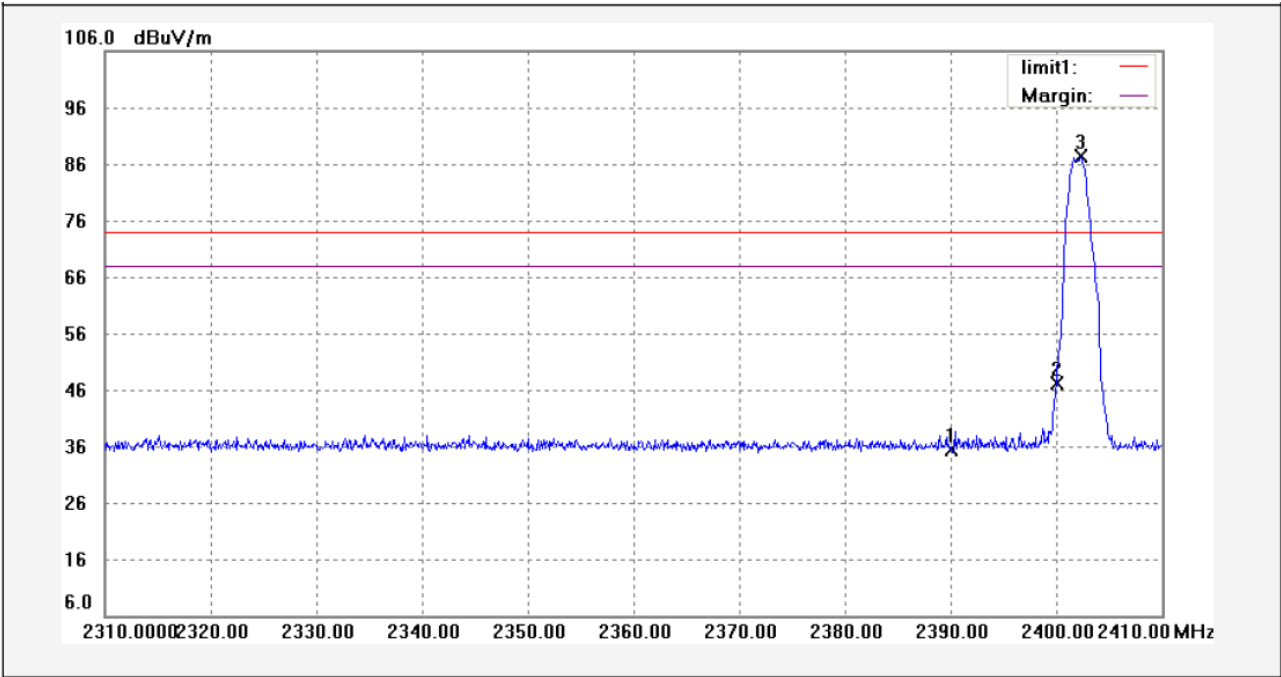

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 2390.000       | 44.73               | -9.27          | 35.46              | 74.00             | -38.54         | peak     |        |
| 2   | 2400.000       | 56.41               | -9.28          | 47.13              | 74.00             | -26.87         | peak     |        |
| 3   | 2402.300       | 96.69               | -9.29          | 87.40              | 74.00             | 13.40          | peak     |        |

| No. | Freq.<br>(MHz) | Duty Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 2390.000       | -9                  | 26.46              | 54.00             | -27.54         | AV       |        |
| 2   | 2400.000       | -9                  | 38.13              | 54.00             | -15.87         | AV       |        |
| 3   | 2402.300       | -9                  | 78.40              | 54.00             | 24.40          | AV       |        |


Lower Channel – Peak, Horizontal

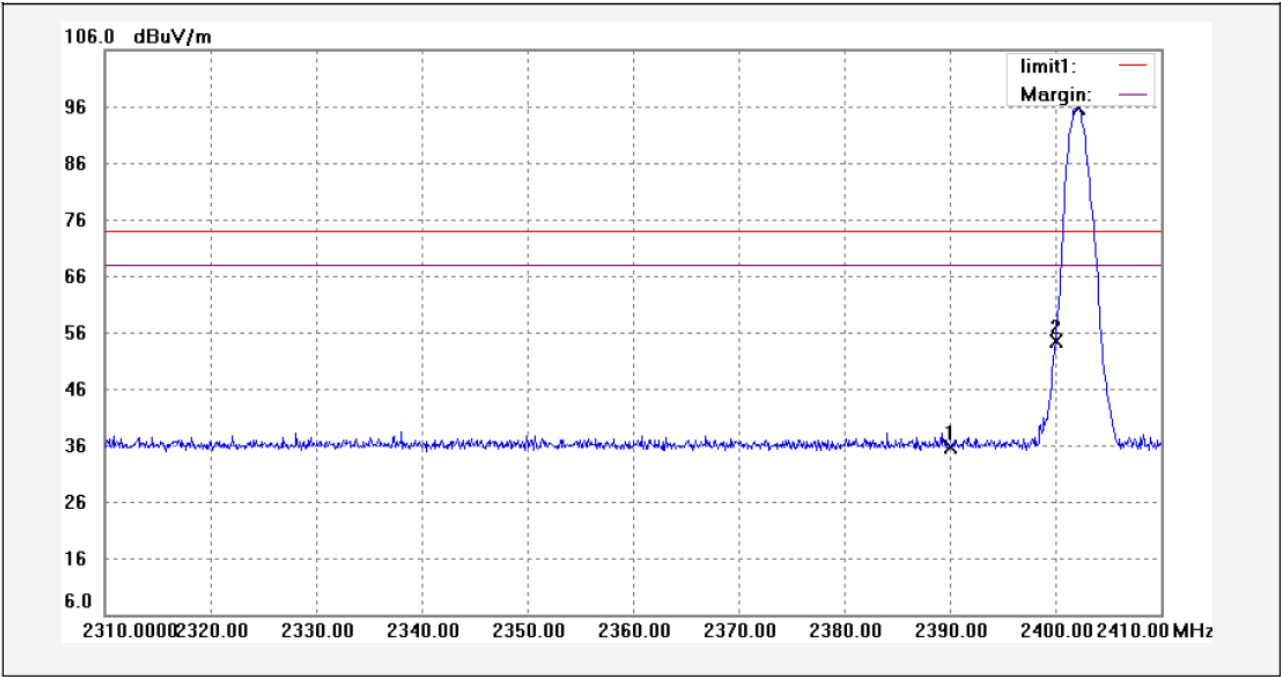

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2390.000    | 45.02            | -9.27       | 35.75           | 74.00          | -38.25      | peak     |        |
| 2   | 2400.000    | 63.54            | -9.28       | 54.26           | 74.00          | -19.74      | peak     |        |
| 3   | 2402.200    | 104.93           | -9.29       | 95.64           | 74.00          | 21.64       | peak     |        |

| No. | Freq. (MHz) | Duty Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2390.000    | -9               | 26.75           | 54.00          | -27.25      | AV       |        |
| 2   | 2400.000    | -9               | 45.26           | 54.00          | -8.74       | AV       |        |
| 3   | 2402.200    | -9               | 86.64           | 54.00          | 32.64       | AV       |        |


Upper Channel – Peak, Vertical

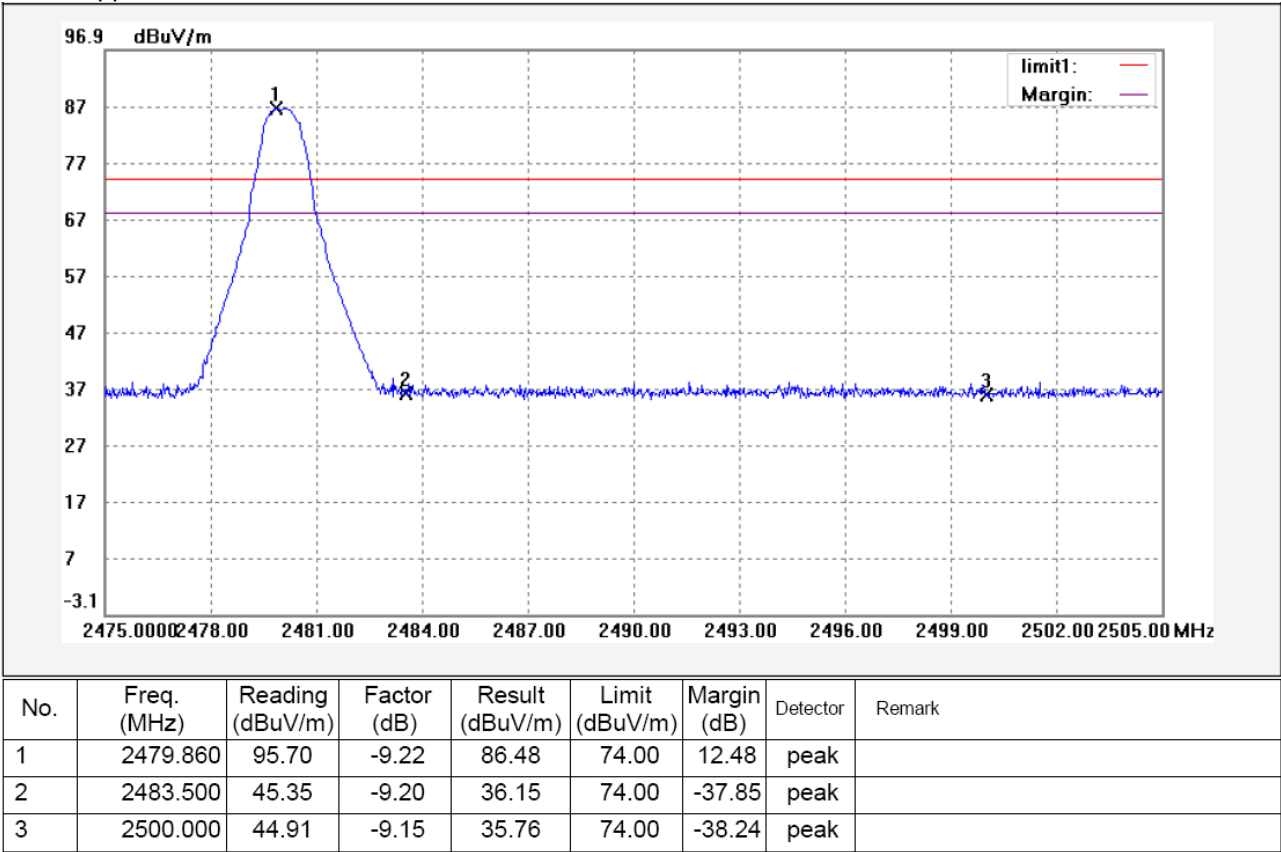

| No. | Freq. (MHz) | Duty Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2479.860    | -9               | 77.48           | 54.00          | 23.48       | AV       |        |
| 2   | 2483.500    | -9               | 27.15           | 54.00          | -26.85      | AV       |        |
| 3   | 2500.000    | -9               | 26.76           | 54.00          | -27.24      | AV       |        |




Upper Channel – Peak, Horizontal

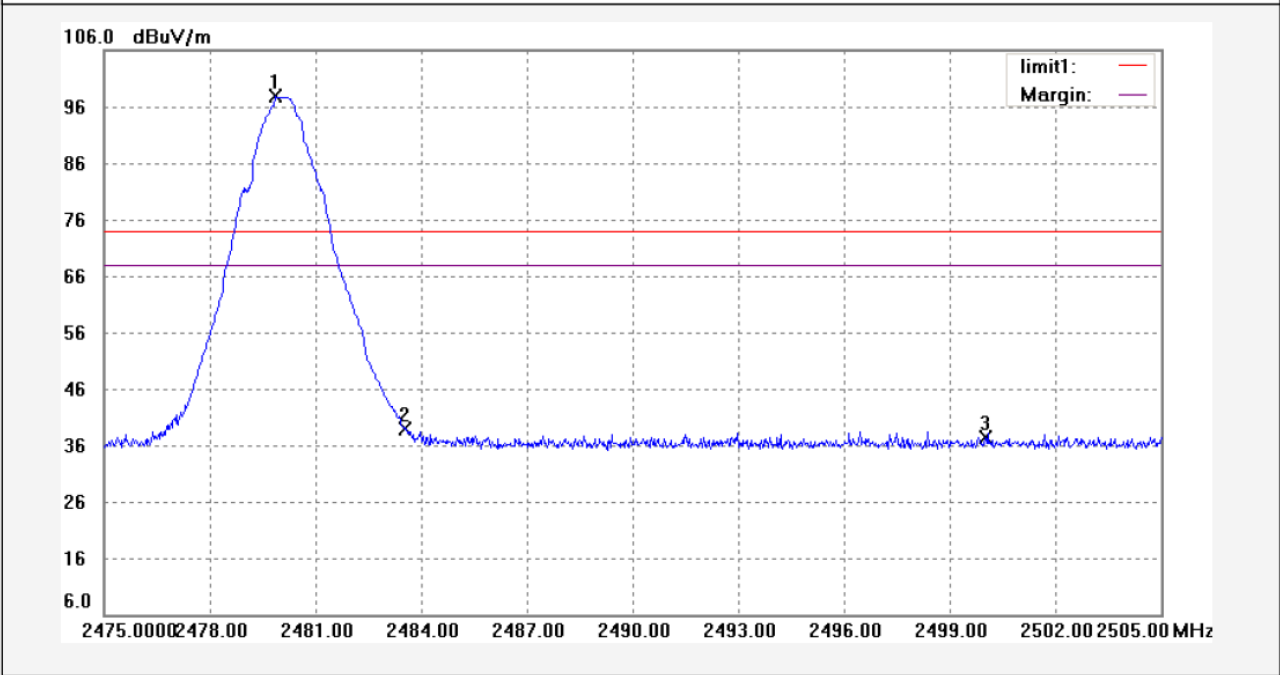

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2479.860    | 106.99           | -9.22       | 97.77           | 74.00          | 23.77       | peak     |        |
| 2   | 2483.500    | 48.10            | -9.20       | 38.90           | 74.00          | -35.10      | peak     |        |
| 3   | 2500.000    | 46.44            | -9.15       | 37.29           | 74.00          | -36.71      | peak     |        |

| No. | Freq. (MHz) | Duty Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2479.860    | -9               | 88.77           | 54.00          | 34.77       | AV       |        |
| 2   | 2483.500    | -9               | 29.90           | 54.00          | -24.10      | AV       |        |
| 3   | 2500.000    | -9               | 28.29           | 54.00          | -25.71      | AV       |        |


Modulation: 8DPSK  
Lower Channel – Peak, Vertical

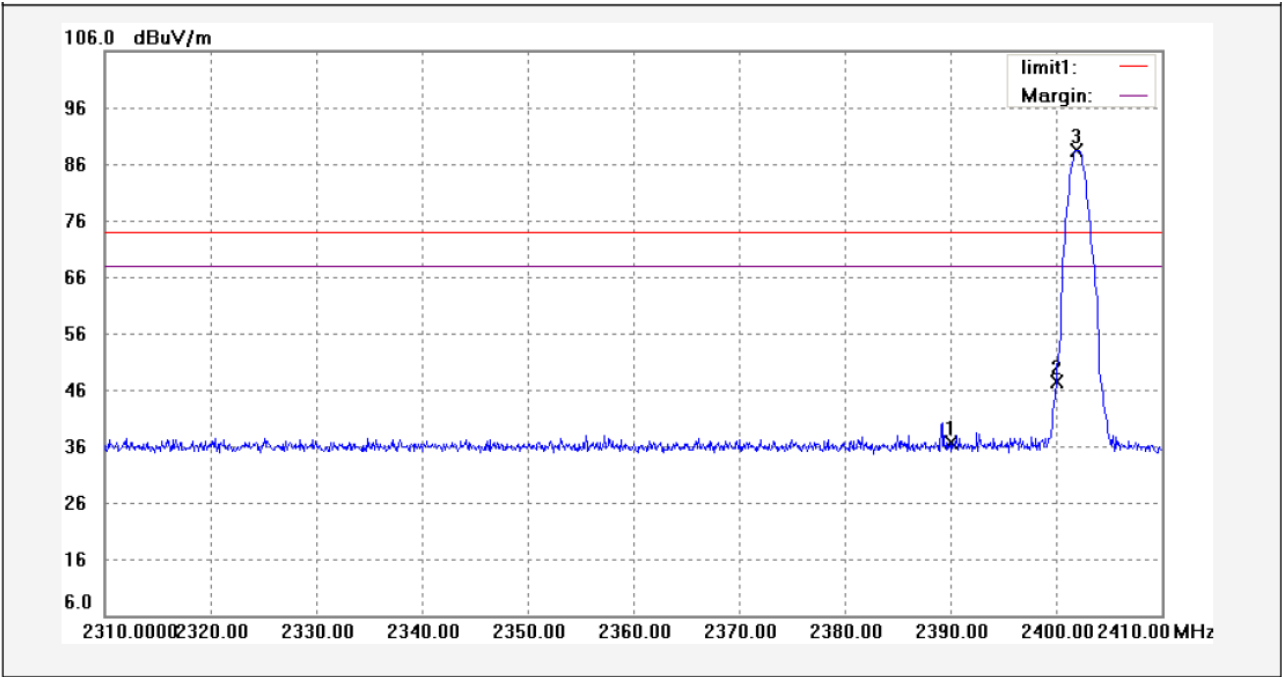

| No. | Freq.<br>(MHz) | Reading<br>(dBuV/m) | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|----------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 2390.000       | 45.97               | -9.27          | 36.70              | 74.00             | -37.30         | peak     |        |
| 2   | 2400.000       | 56.73               | -9.28          | 47.45              | 74.00             | -26.55         | peak     |        |
| 3   | 2401.900       | 97.70               | -9.28          | 88.42              | 74.00             | 14.42          | peak     |        |

| No. | Freq.<br>(MHz) | Duty Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Remark |
|-----|----------------|---------------------|--------------------|-------------------|----------------|----------|--------|
| 1   | 2390.000       | -9                  | 27.70              | 54.00             | -26.30         | AV       |        |
| 2   | 2400.000       | -9                  | 38.45              | 54.00             | -15.55         | AV       |        |
| 3   | 2401.900       | -9                  | 79.42              | 54.00             | 25.42          | AV       |        |


Lower Channel – Peak, Horizontal

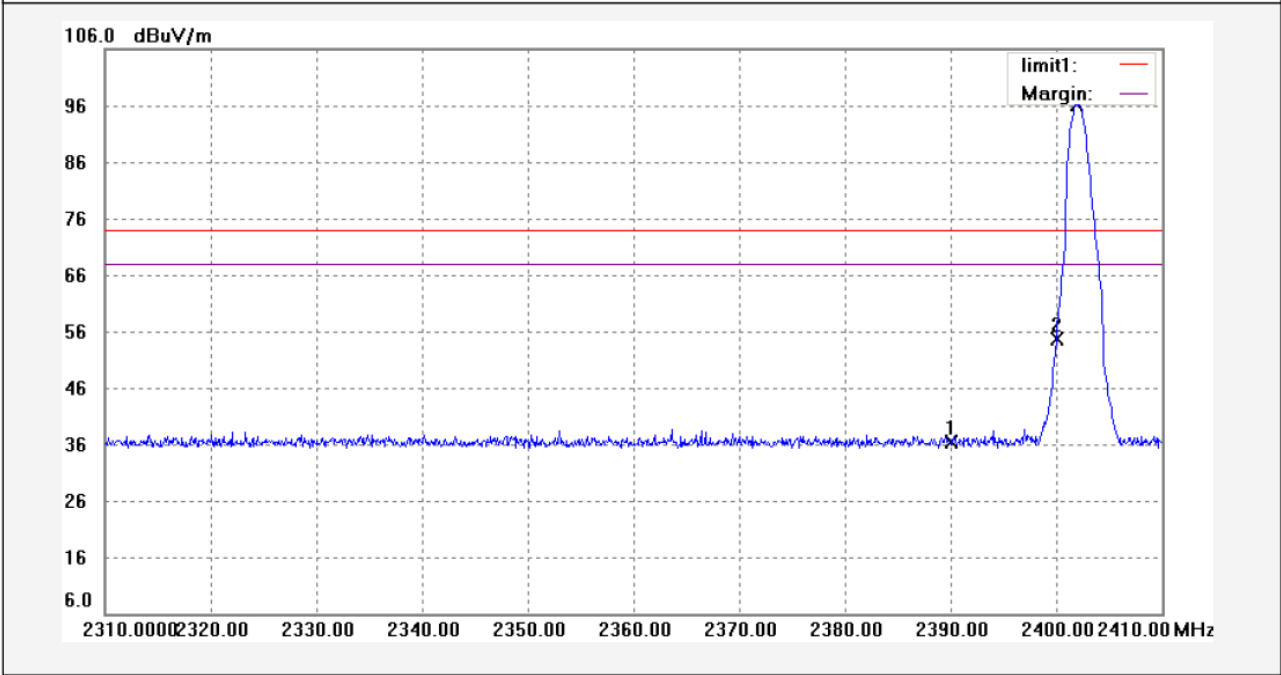

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2390.000    | 45.68            | -9.27       | 36.41           | 74.00          | -37.59      | peak     |        |
| 2   | 2400.000    | 63.84            | -9.28       | 54.56           | 74.00          | -19.44      | peak     |        |
| 3   | 2401.900    | 105.42           | -9.28       | 96.14           | 74.00          | 22.14       | peak     |        |


| No. | Freq. (MHz) | Duty Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2390.000    | -9               | 27.41           | 54.00          | -26.59      | AV       |        |
| 2   | 2400.000    | -9               | 45.56           | 54.00          | -8.44       | AV       |        |
| 3   | 2401.900    | -9               | 87.14           | 54.00          | 33.14       | AV       |        |

Upper Channel – Peak, Vertical

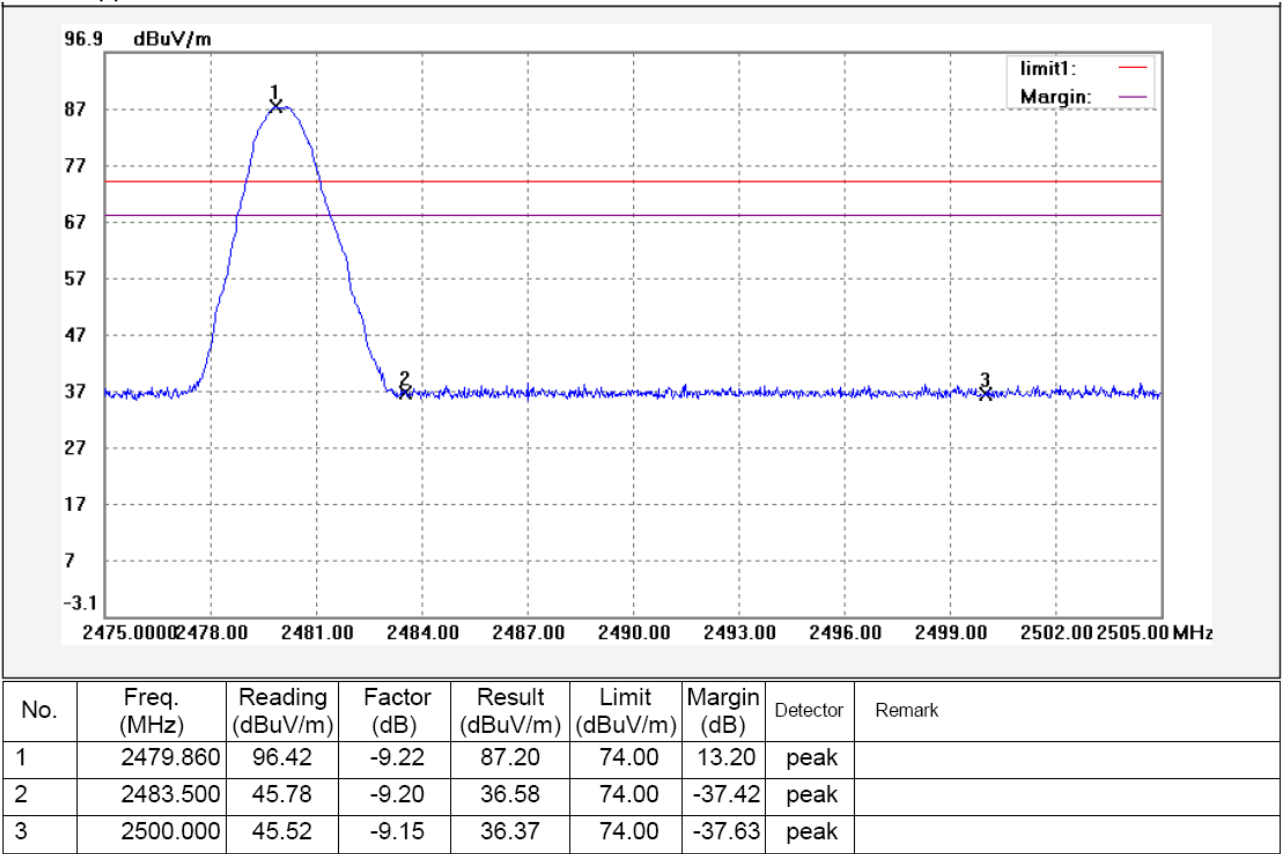

| No. | Freq. (MHz) | Duty Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2479.860    | -9               | 78.20           | 54.00          | 24.20       | AV       |        |
| 2   | 2483.500    | -9               | 27.58           | 54.00          | -26.42      | AV       |        |
| 3   | 2500.000    | -9               | 27.37           | 54.00          | -26.63      | AV       |        |

Upper Channel – Peak, Horizontal

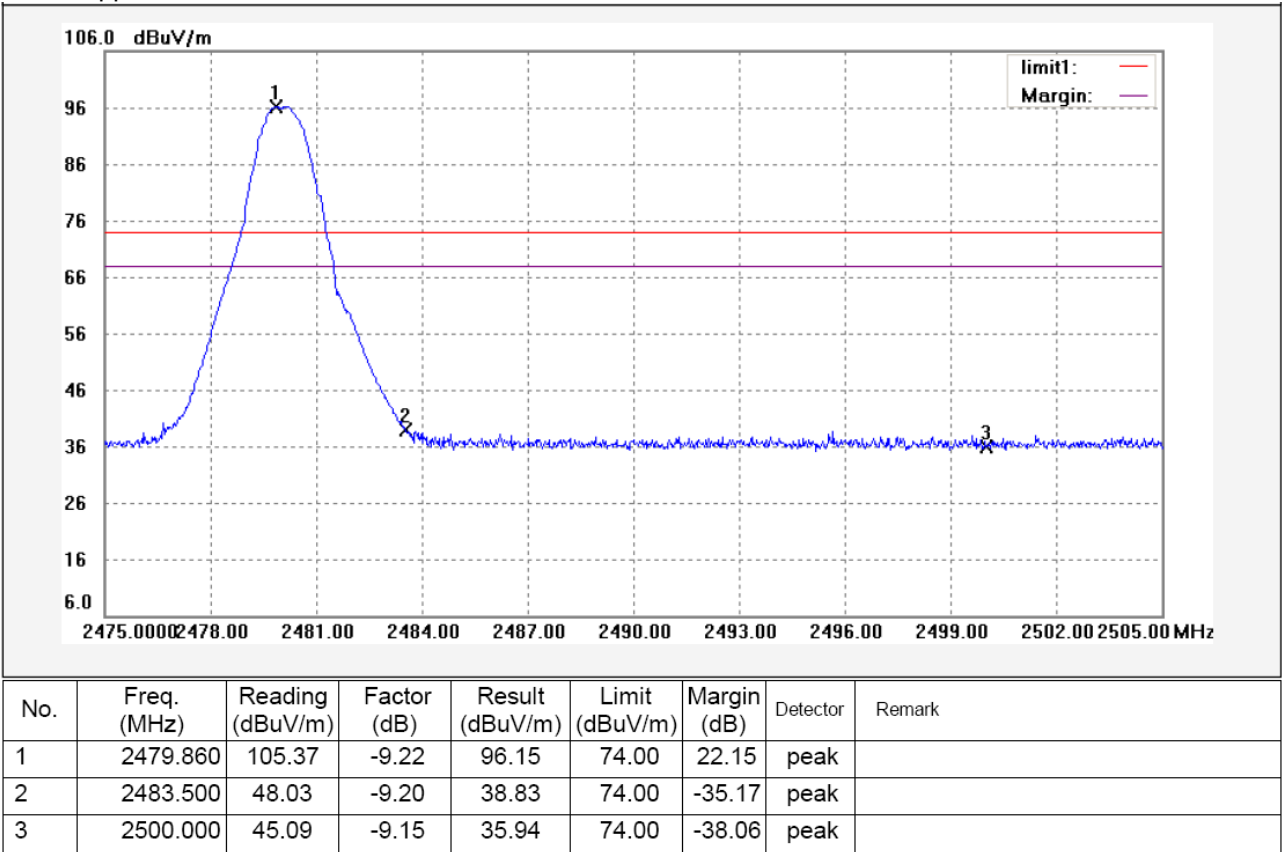

| No. | Freq. (MHz) | Duty Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-----------------|----------------|-------------|----------|--------|
| 1   | 2479.860    | -9               | 87.15           | 54.00          | 33.15       | AV       |        |
| 2   | 2483.500    | -9               | 29.83           | 54.00          | -24.17      | AV       |        |
| 3   | 2500.000    | -9               | 26.94           | 54.00          | -27.06      | AV       |        |

## 11 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247  
Test Method: DA 00-705  
Test Mode: Test in fixing operating frequency at low, Middle, high channel.



### 11.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 100kHz

### 11.2 Test Result:


| Modulation | Test Channel | Bandwidth(MHz) |
|------------|--------------|----------------|
| GFSK       | Lower        | 1.114          |
|            | Middle       | 1.138          |
|            | Upper        | 1.114          |
| Pi/4DQPSK  | Lower        | 1.353          |
|            | Middle       | 1.365          |
|            | Upper        | 1.377          |
| 8DPSK      | Lower        | 1.341          |
|            | Middle       | 1.353          |
|            | Upper        | 1.365          |

Test result plot as follows:

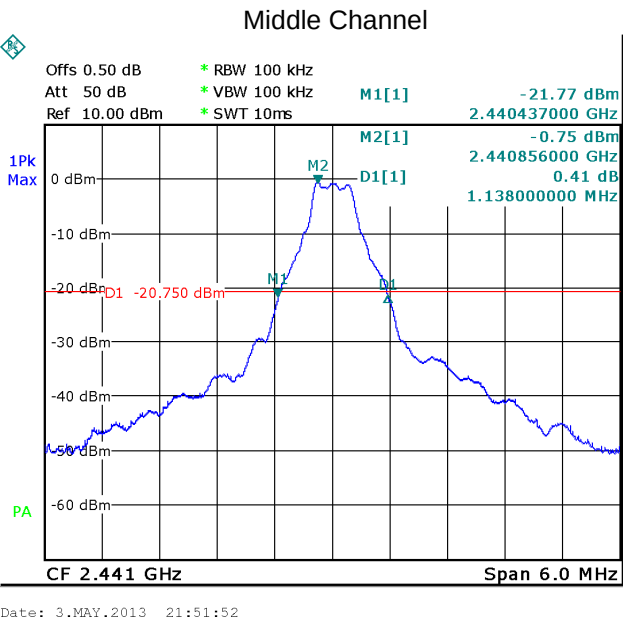
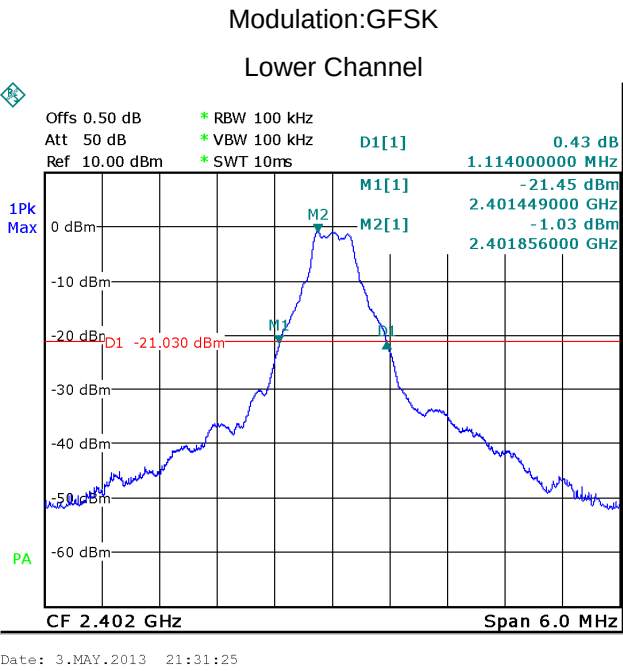


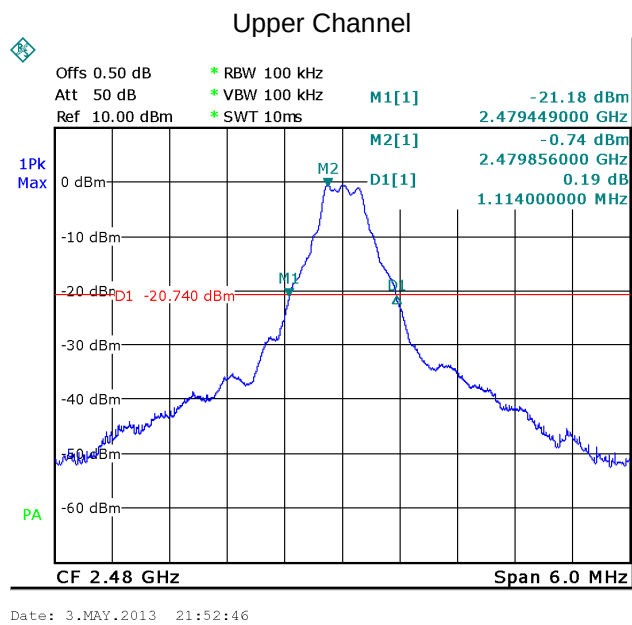

Modulation: Pi/4DQPSK

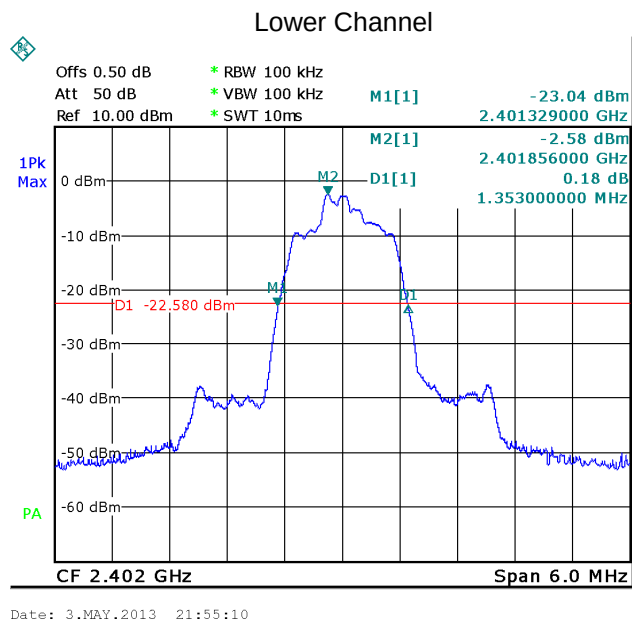




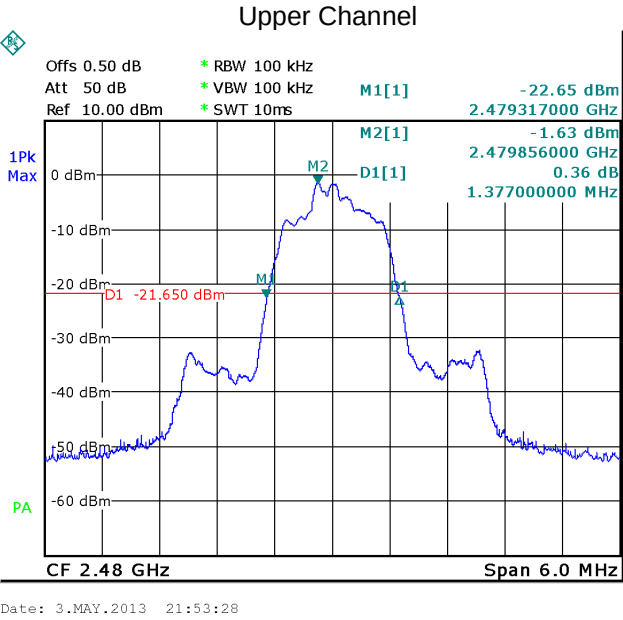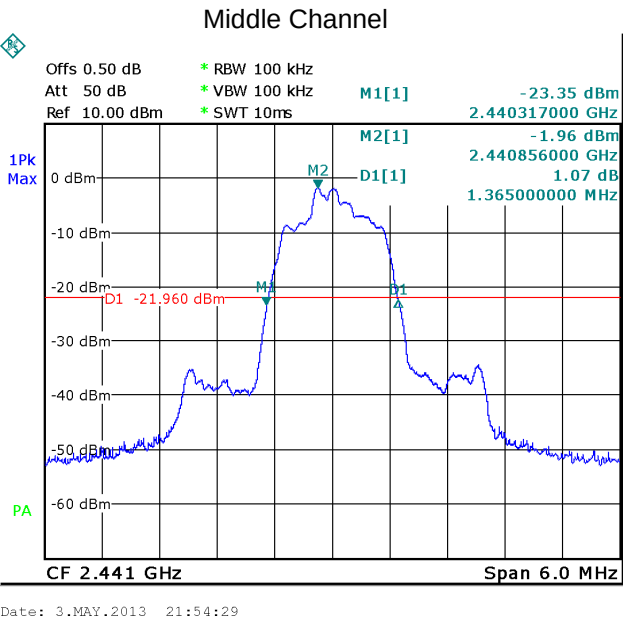


Modulation: 8DPSK

Lower Channel

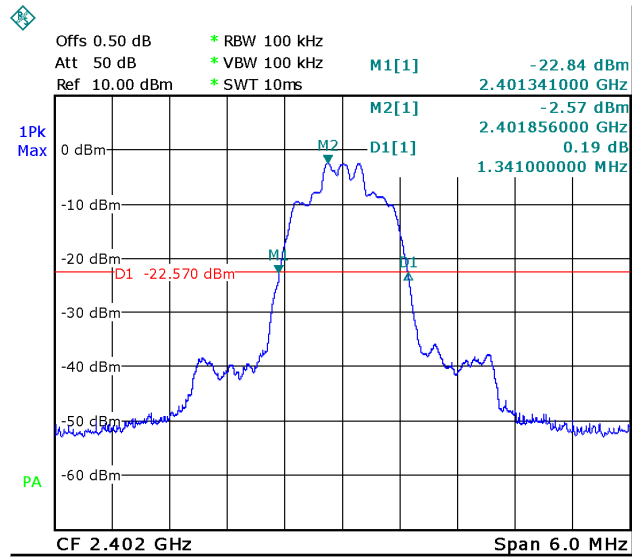


Date: 3.MAY.2013 21:56:10

Middle Channel

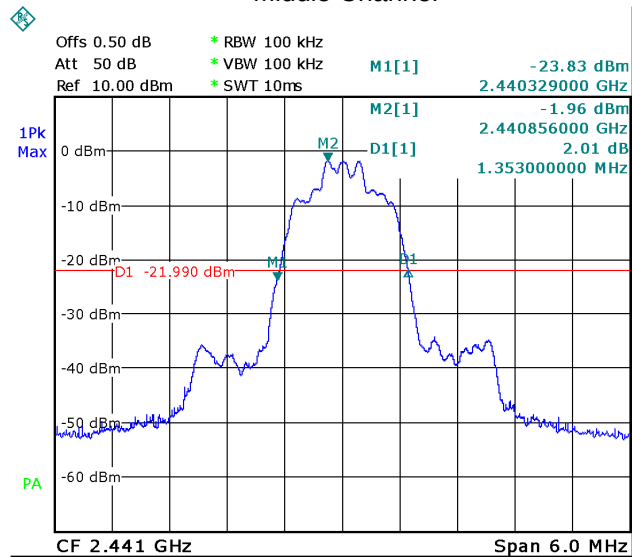

Date: 3.MAY.2013 21:56:56

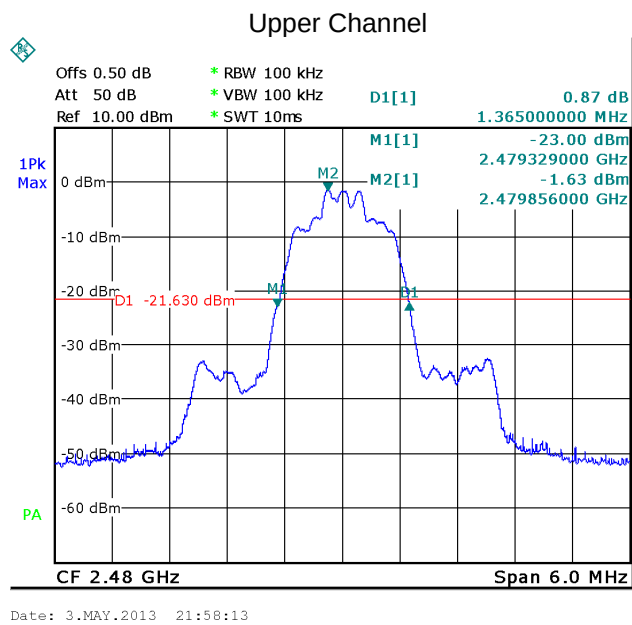

## 12 Maximum Peak Output Power

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC CFR47 Part 15 Section 15.247                                                                                                                                                                                                                                                                                                                                                                                       |
| Test Method:      | DA 00-705                                                                                                                                                                                                                                                                                                                                                                                                              |
| Test Limit:       | Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.<br>Refer to the result "Number of Hopping Frequency" of this document. The 1watts (30 dBm) limit applies. |
| Test mode:        | Test in fixing frequency transmitting mode.                                                                                                                                                                                                                                                                                                                                                                            |



### 12.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.



### 12.2 Test Result:



| Modulation | Test Channel | Output Power (dBm) | Limit (dBm) |
|------------|--------------|--------------------|-------------|
| GFSK       | Lower        | -0.74              | 30          |
|            | Middle       | -0.53              | 30          |
|            | Upper        | -0.56              | 30          |
| Pi/4DQPSK  | Lower        | -2.28              | 30          |
|            | Middle       | -1.68              | 30          |
|            | Upper        | -1.40              | 30          |
| 8DPSK      | Lower        | -2.18              | 30          |
|            | Middle       | -1.67              | 30          |
|            | Upper        | -1.40              | 30          |

Test result plot as follows:

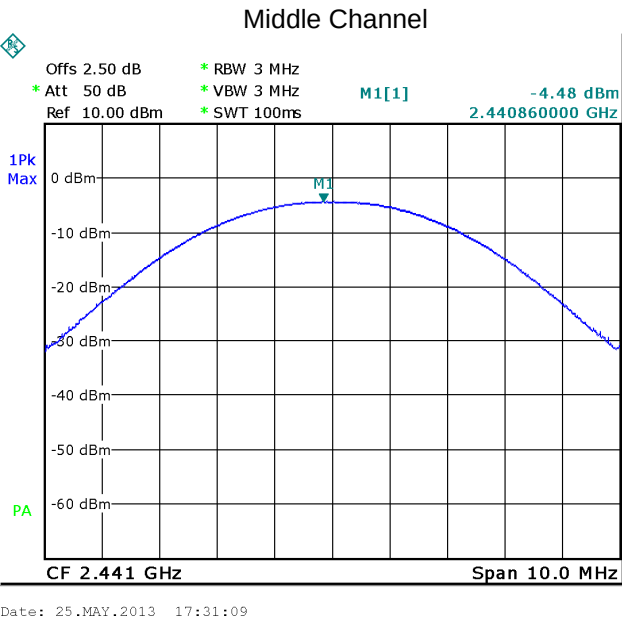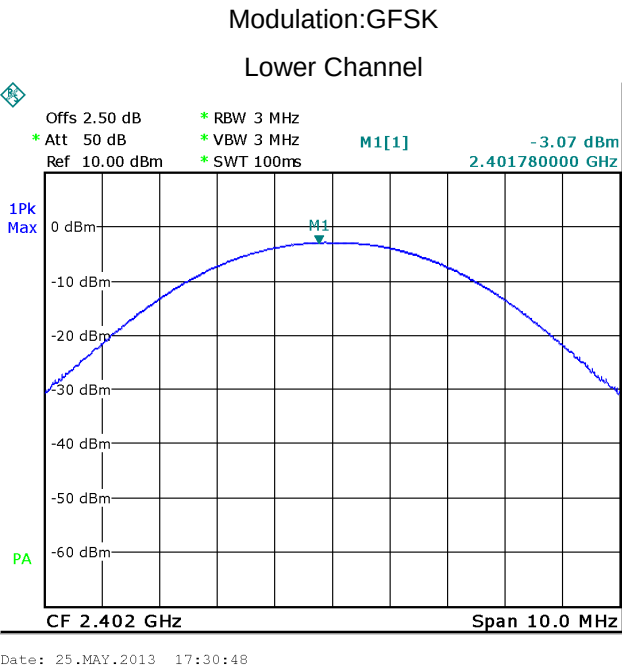


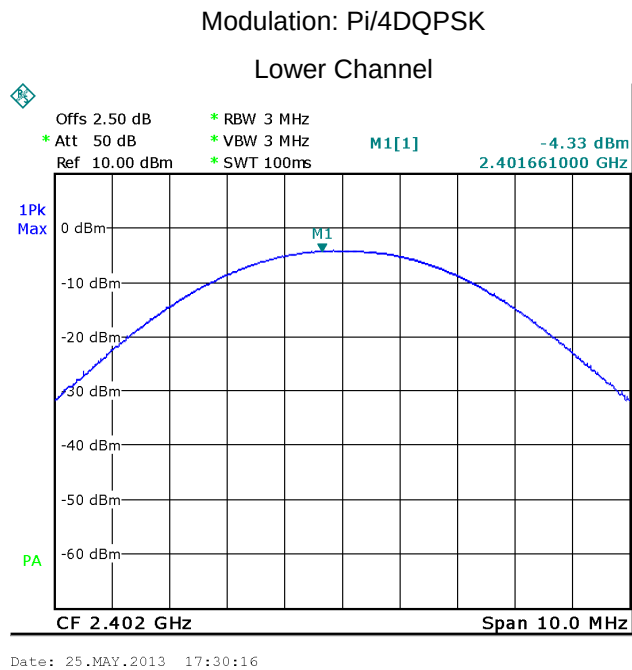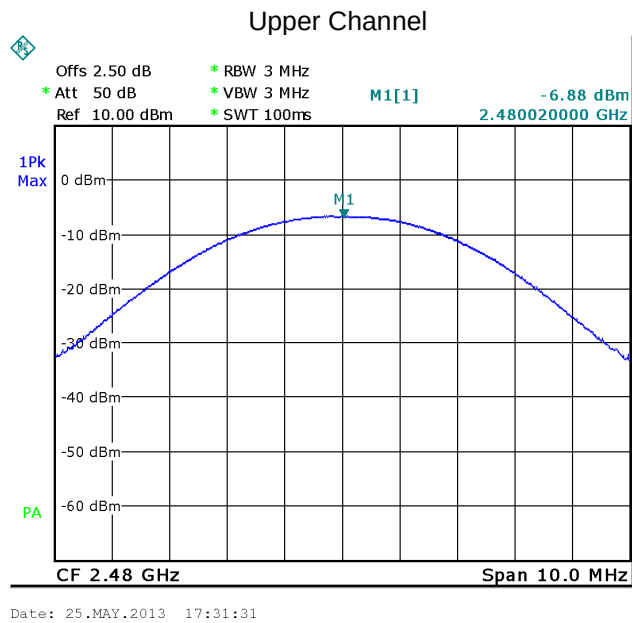

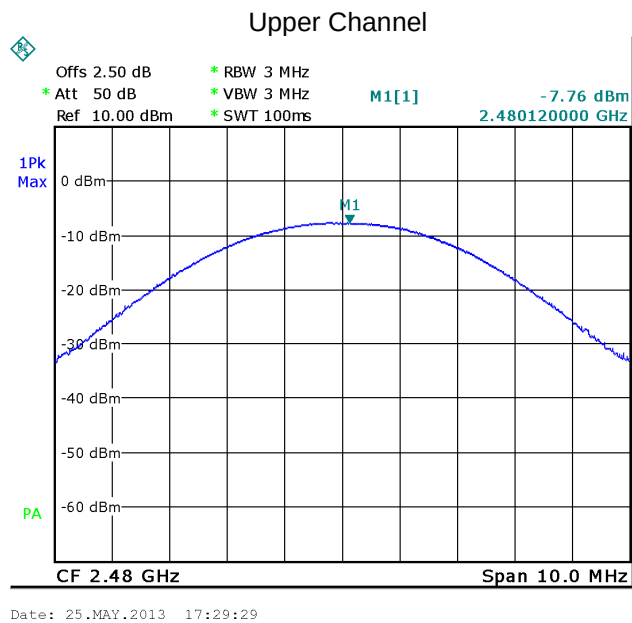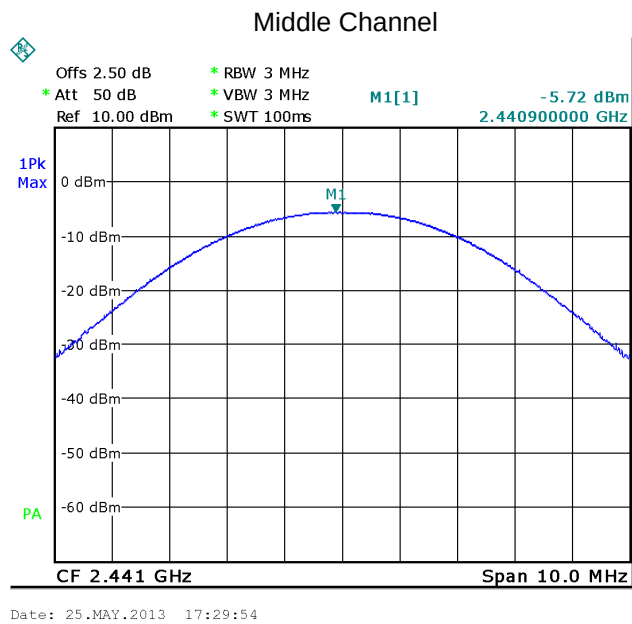

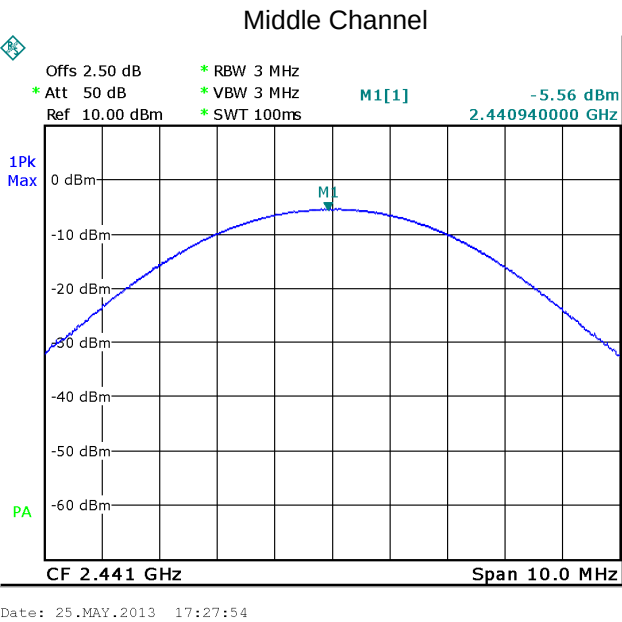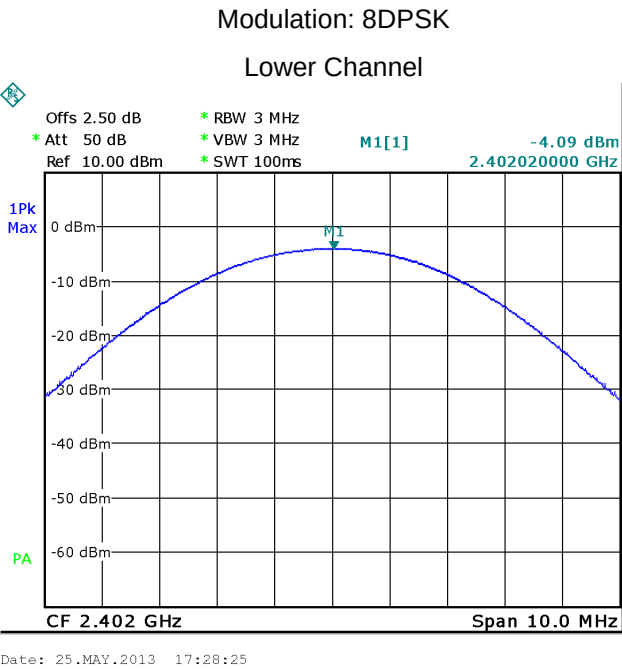



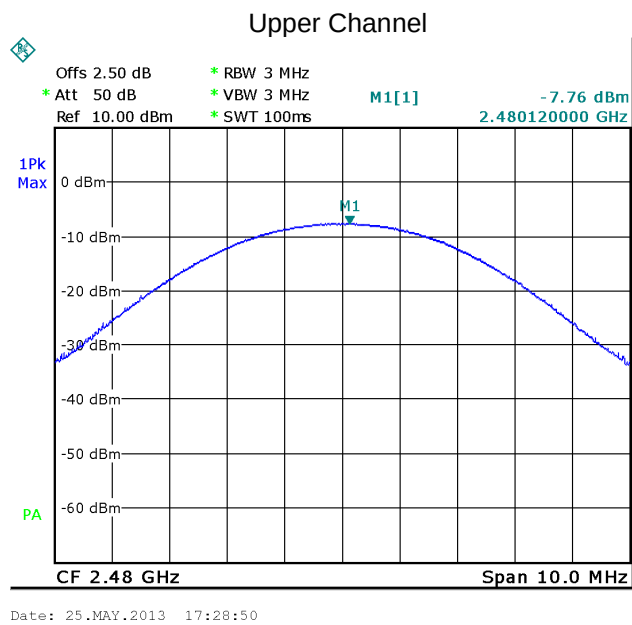

### 13 Hopping Channel Separation

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Limit: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.

Test Mode: Test in hopping transmitting operating mode.



#### 13.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz. VBW = 100KHz , Span = 6MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section  
Submit this plot.

#### 13.2 Test Result:


| Modulation | Test Channel | Separation (MHz) |
|------------|--------------|------------------|
| GFSK       | Lower        | 1.006            |
|            | Middle       | 1.006            |
|            | Upper        | 1.006            |
| Pi/4DQPSK  | Lower        | 1.006            |
|            | Middle       | 1.006            |
|            | Upper        | 1.006            |
| 8DPSK      | Lower        | 1.006            |
|            | Middle       | 1.006            |
|            | Upper        | 1.006            |


Test result plot as follows:

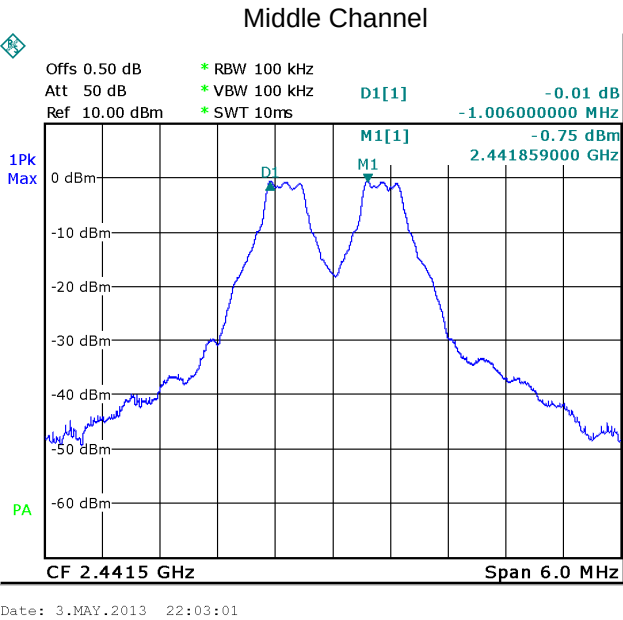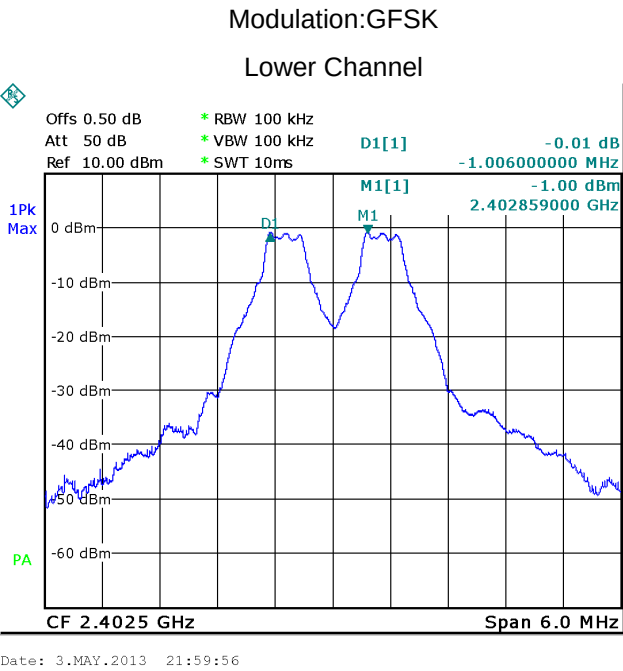

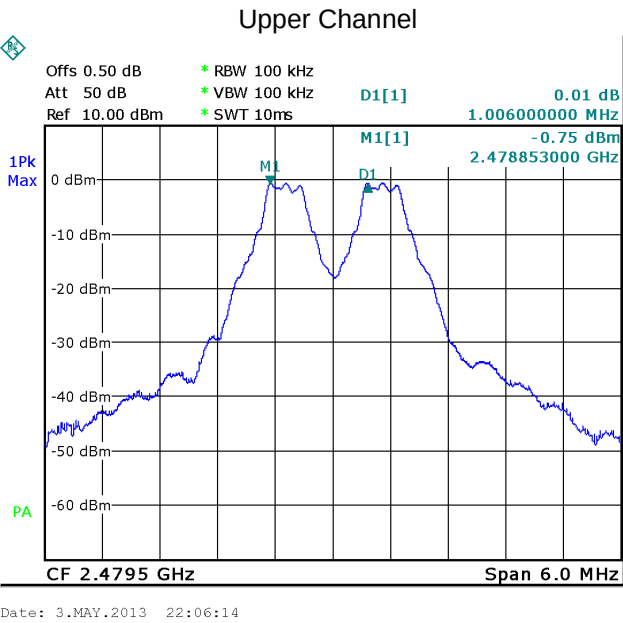


Modulation: Pi/4DQPSK

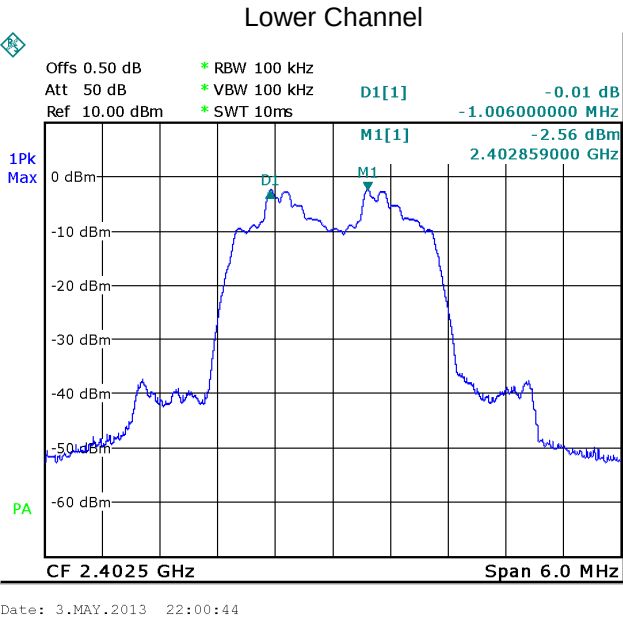

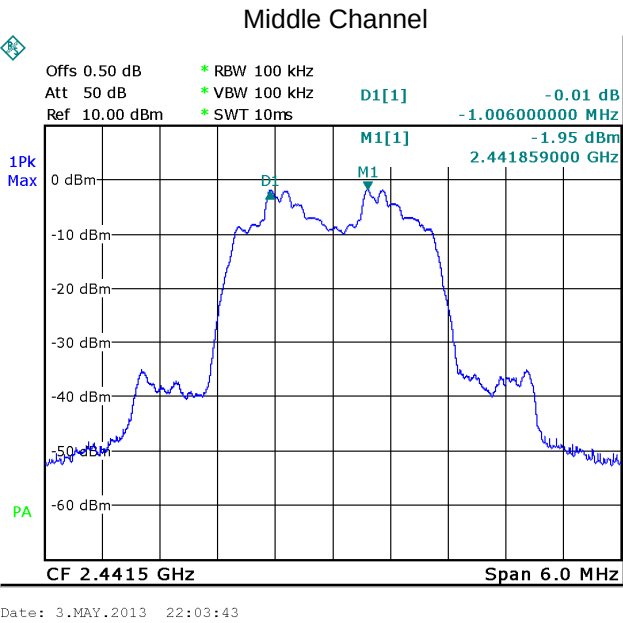


Modulation: 8DPSK

Lower Channel

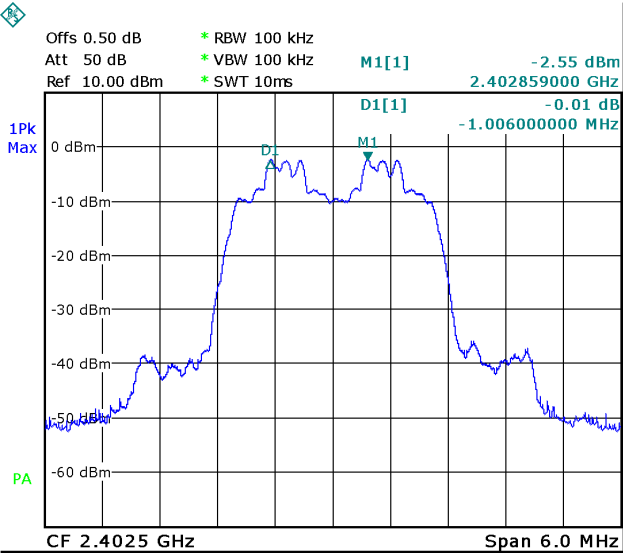


Date: 3.MAY.2013 22:01:36

Middle Channel

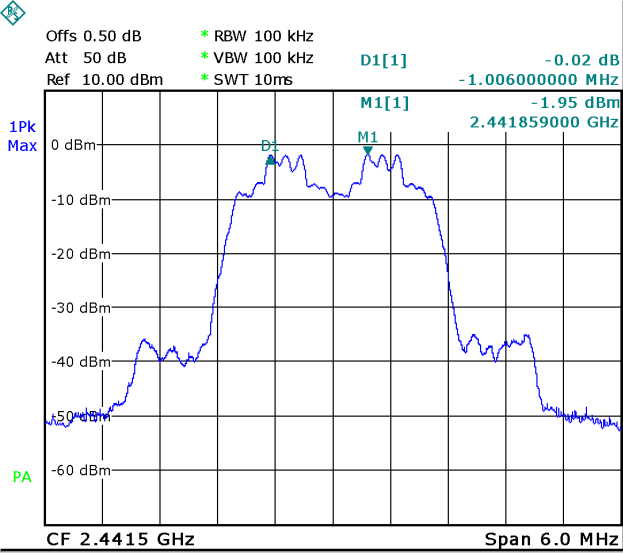

Date: 3.MAY.2013 22:04:28

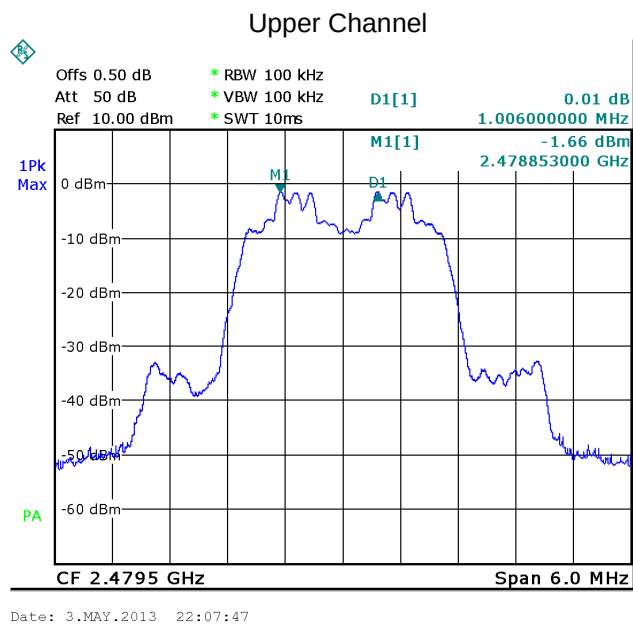

## 14 Number of Hopping Frequency


|                   |                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC CFR47 Part 15 Section 15.247                                                                                    |
| Test Method:      | DA 00-705                                                                                                           |
| Test Limit:       | Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. |
| Test Mode:        | Test in hopping transmitting operating mode.                                                                        |

### 14.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Centre Frequency = 2.441GHz, Span = 86MHz. Sweep=auto;

### 14.2 Test Result:

Total Channels are 79 Channels.

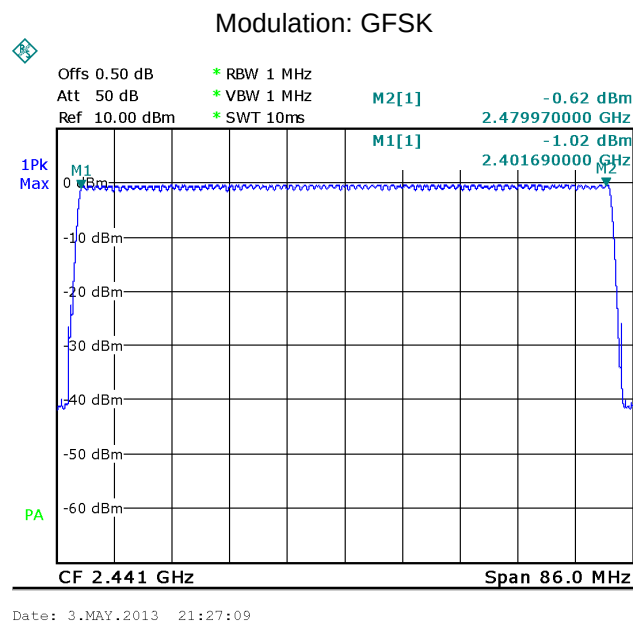



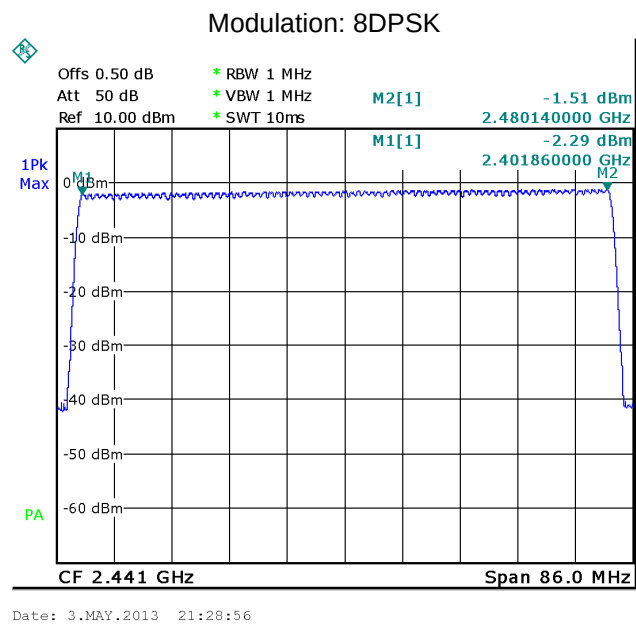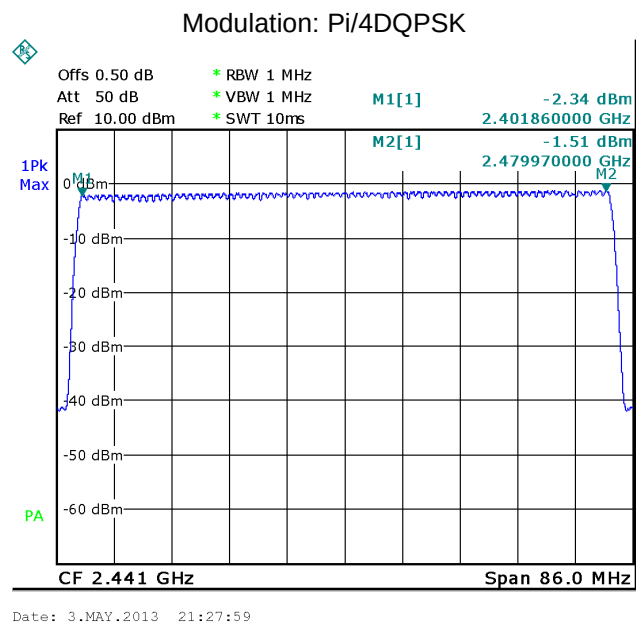

## 15 Dwell Time

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC CFR47 Part 15 Section 15.247                                                                                                                                                                                                                                                                                                                                                                                                             |
| Test Method:      | DA 00-705                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Test Limit:       | Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. |
| Test Mode:        | Test in hopping transmitting operating mode.                                                                                                                                                                                                                                                                                                                                                                                                 |

### 15.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centred on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 1MHz. Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

### 15.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period:  $T = 0.4(s) * 79 = 31.6 (s)$



DH5 Packet permit maximum  $1600 / 79 / 6$  hops per second in each channel (5 time slots RX, 1 time slot TX).


DH3 Packet permit maximum  $1600 / 79 / 4$  hops per second in each channel (3 time slots RX, 1 time slot TX).



DH1 Packet permit maximum  $1600 / 79 / 2$  hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:



| Data Packet | Dwell Time(s)                    |
|-------------|----------------------------------|
| DH5         | $1600/79/6*31.6*(MkrDelta)/1000$ |
| DH3         | $1600/79/4*31.6*(MkrDelta)/1000$ |
| DH1         | $1600/79/2*31.6*(MkrDelta)/1000$ |
| Remark      | Mkr Delta is single pulse time.  |


| Modulation | Frequency      | Data Packet | Mkr Delta(ms) | Dwell Time(s) | Limits(s) |
|------------|----------------|-------------|---------------|---------------|-----------|
| GFSK       | Lower channel  | DH1         | 0.428         | 0.137         | 0.400     |
|            | Middle channel |             | 0.426         | 0.136         | 0.400     |
|            | Upper channel  |             | 0.420         | 0.134         | 0.400     |
|            | Lower channel  | DH3         | 1.728         | 0.277         | 0.400     |
|            | Middle channel |             | 1.676         | 0.268         | 0.400     |
|            | Upper channel  |             | 1.706         | 0.273         | 0.400     |
|            | Lower channel  | DH5         | 3.008         | 0.321         | 0.400     |
|            | Middle channel |             | 2.956         | 0.315         | 0.400     |
|            | Upper channel  |             | 2.956         | 0.315         | 0.400     |
| Pi/4DQPSK  | Lower channel  | DH1         | 0.428         | 0.137         | 0.400     |
|            | Middle channel |             | 0.430         | 0.138         | 0.400     |
|            | Upper channel  |             | 0.434         | 0.139         | 0.400     |
|            | Lower channel  | DH3         | 1.678         | 0.269         | 0.400     |
|            | Middle channel |             | 1.712         | 0.274         | 0.400     |
|            | Upper channel  |             | 1.734         | 0.278         | 0.400     |
|            | Lower channel  | DH5         | 3.022         | 0.322         | 0.400     |
|            | Middle channel |             | 3.006         | 0.321         | 0.400     |
|            | Upper channel  |             | 2.966         | 0.316         | 0.400     |
| 8DPSK      | Lower channel  | DH1         | 0.428         | 0.137         | 0.400     |
|            | Middle channel |             | 0.434         | 0.139         | 0.400     |
|            | Upper channel  |             | 0.426         | 0.136         | 0.400     |
|            | Lower channel  | DH3         | 1.678         | 0.269         | 0.400     |
|            | Middle channel |             | 1.688         | 0.270         | 0.400     |
|            | Upper channel  |             | 1.714         | 0.274         | 0.400     |
|            | Lower channel  | DH5         | 2.942         | 0.314         | 0.400     |
|            | Middle channel |             | 2.968         | 0.317         | 0.400     |
|            | Upper channel  |             | 3.002         | 0.320         | 0.400     |

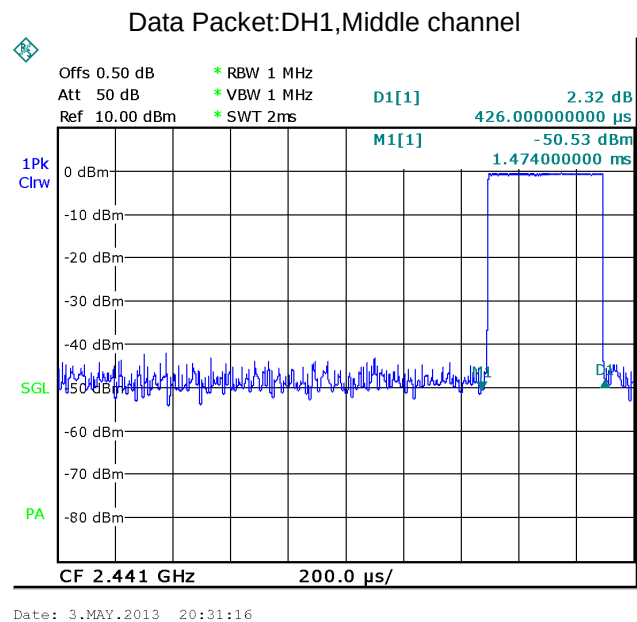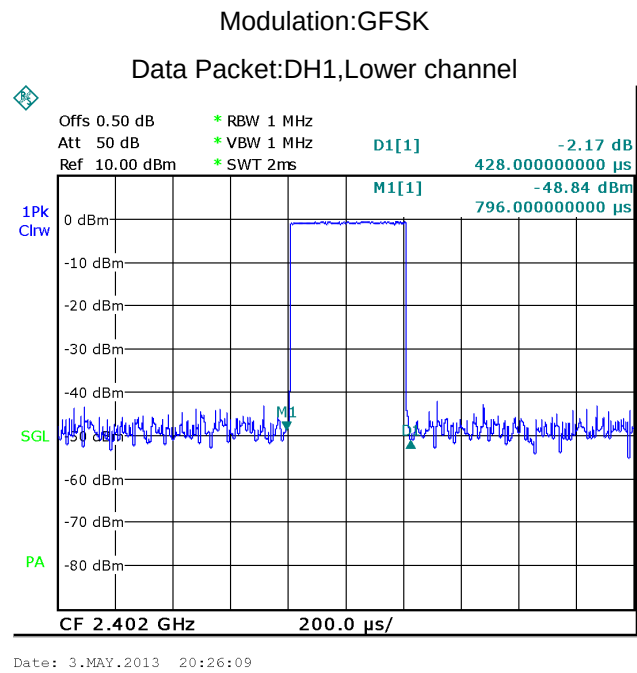


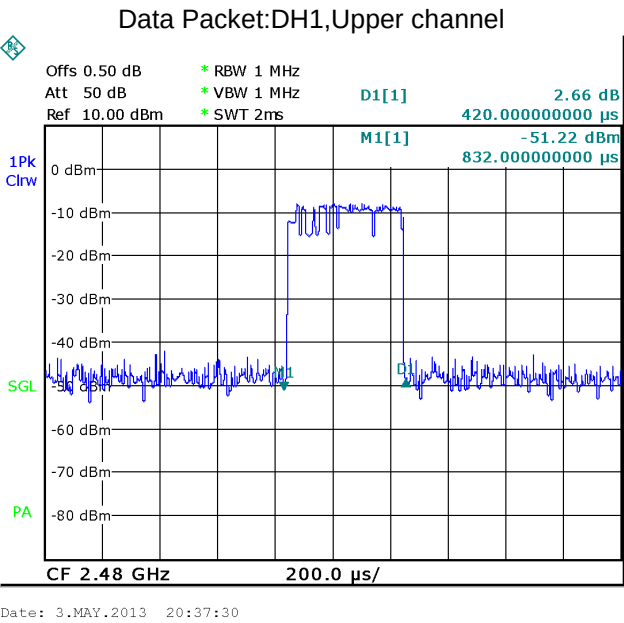


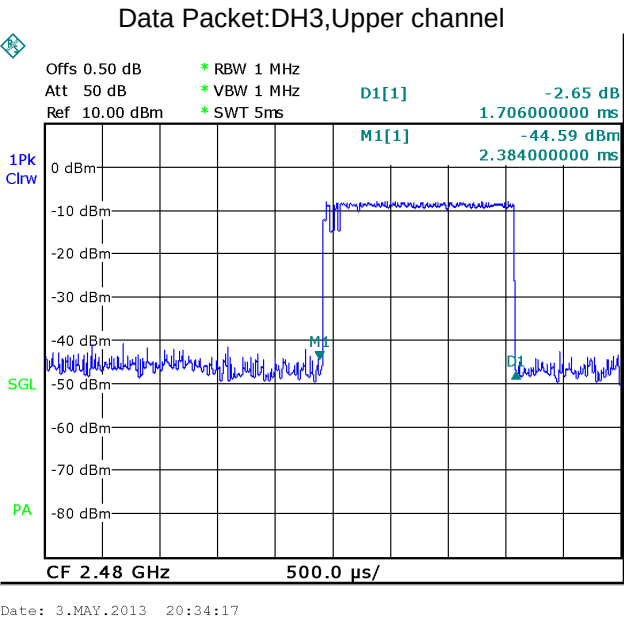
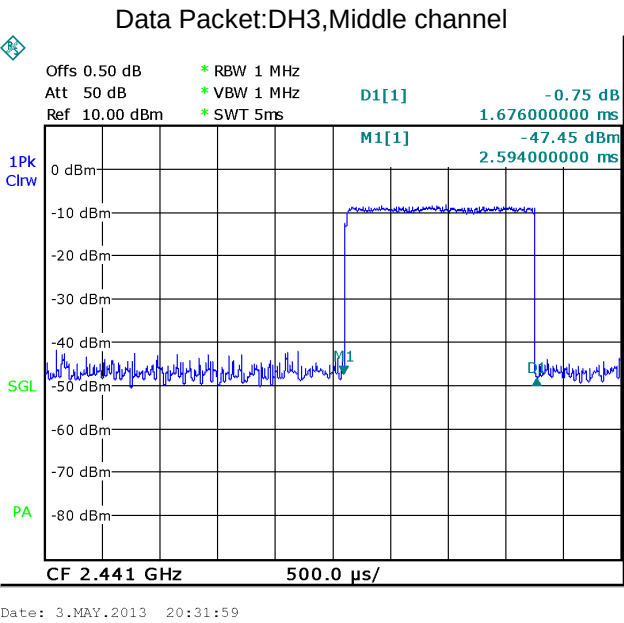


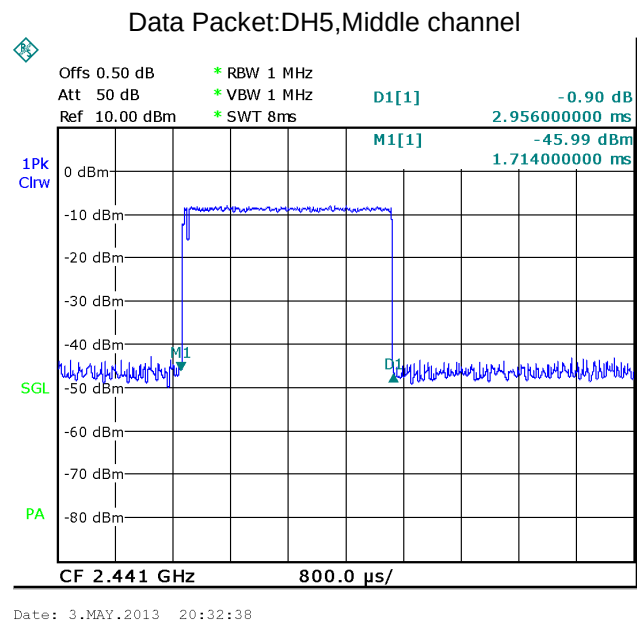
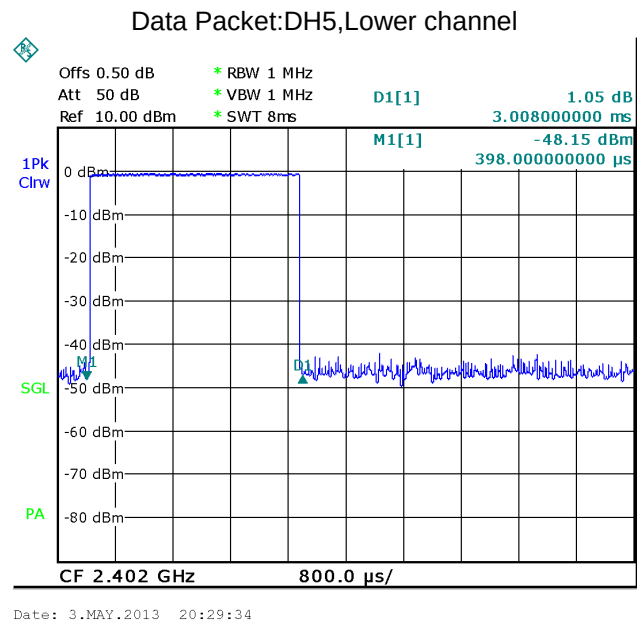



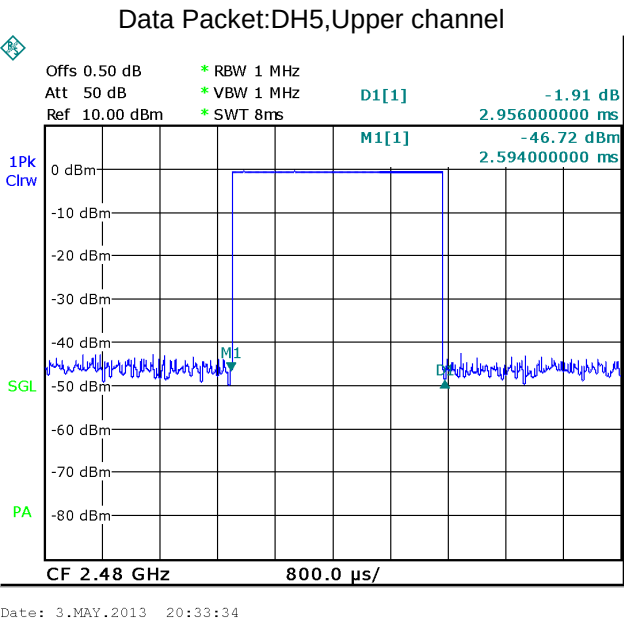






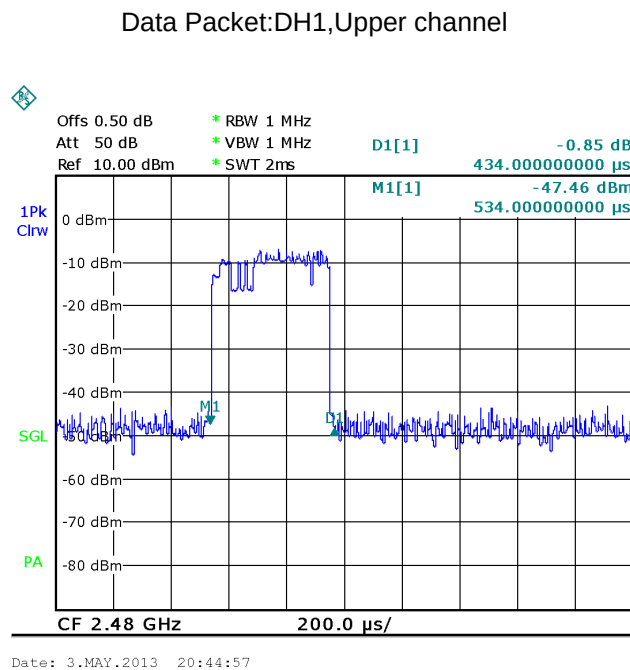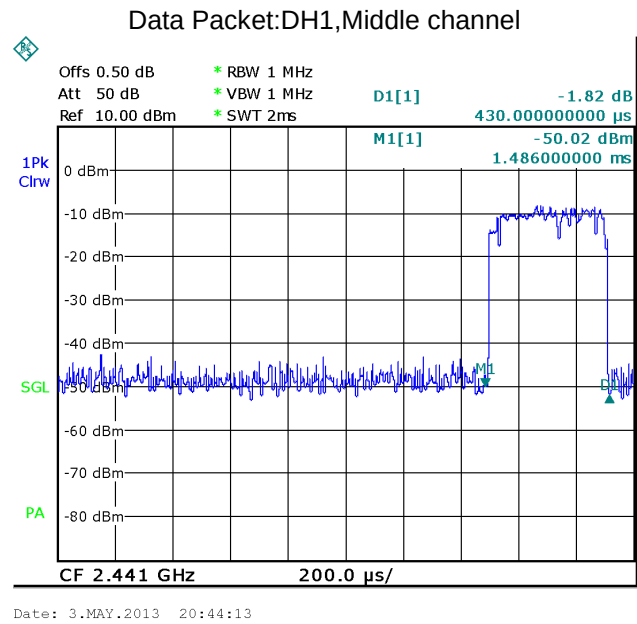


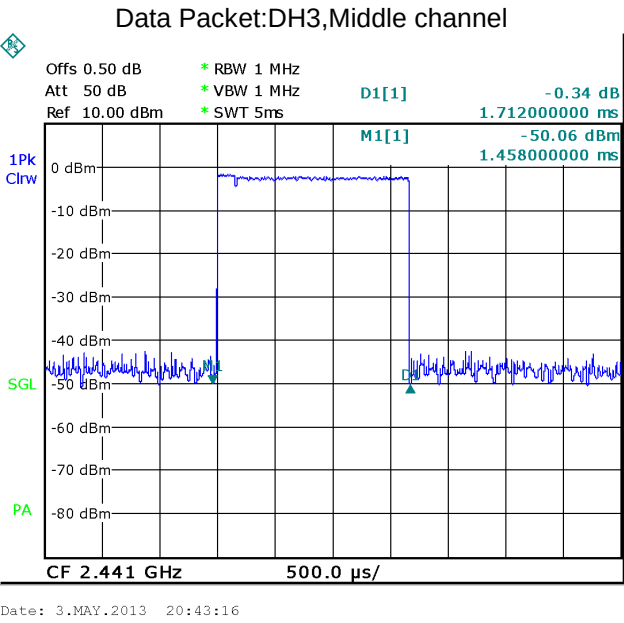
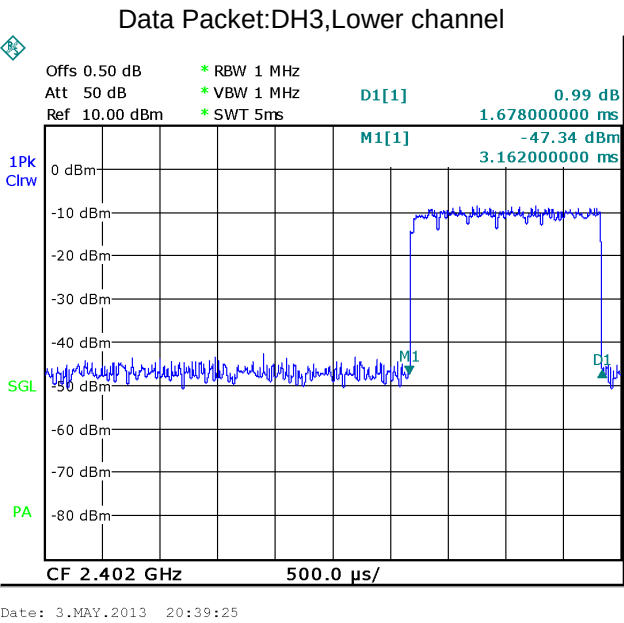


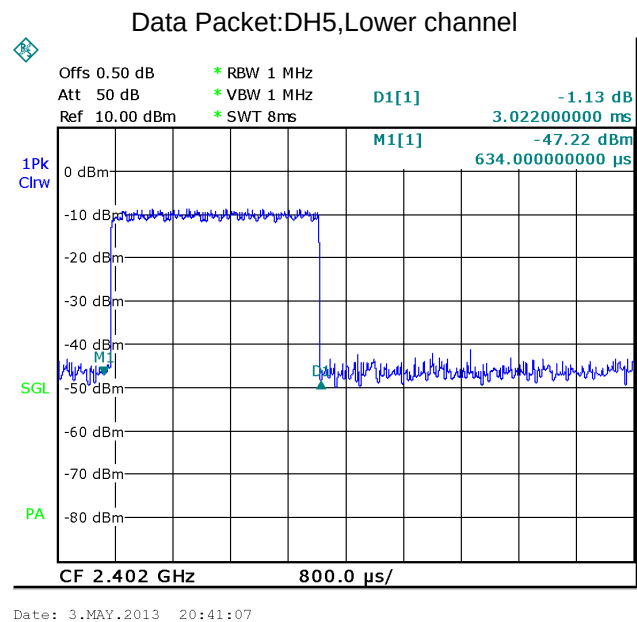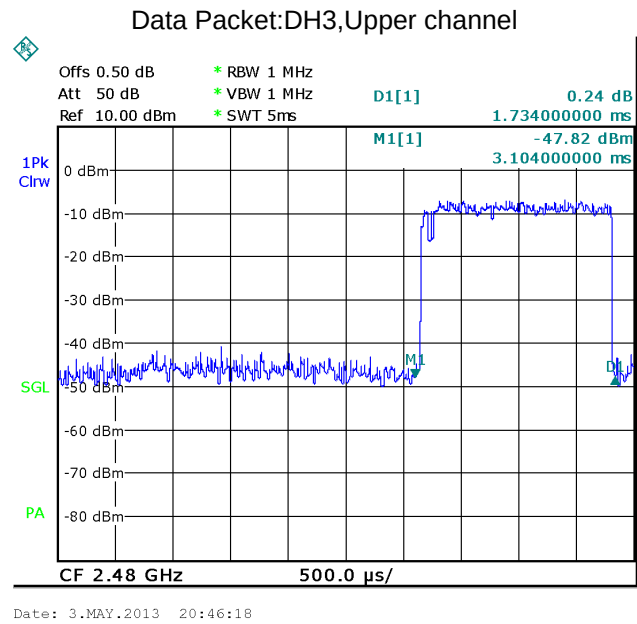


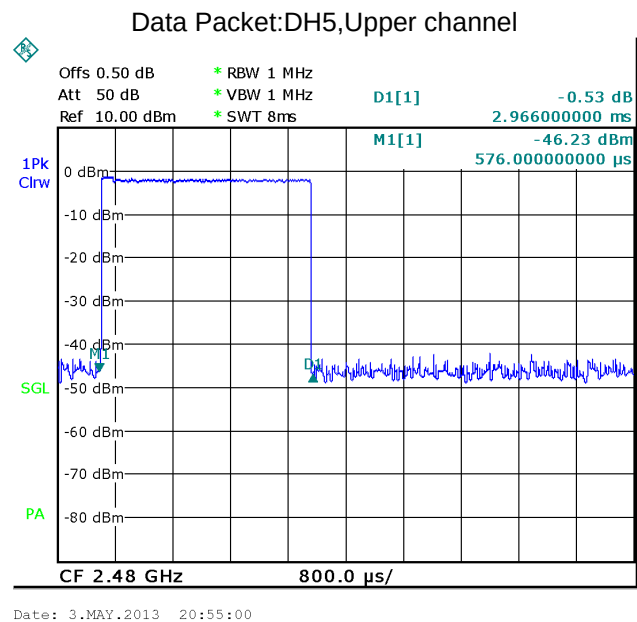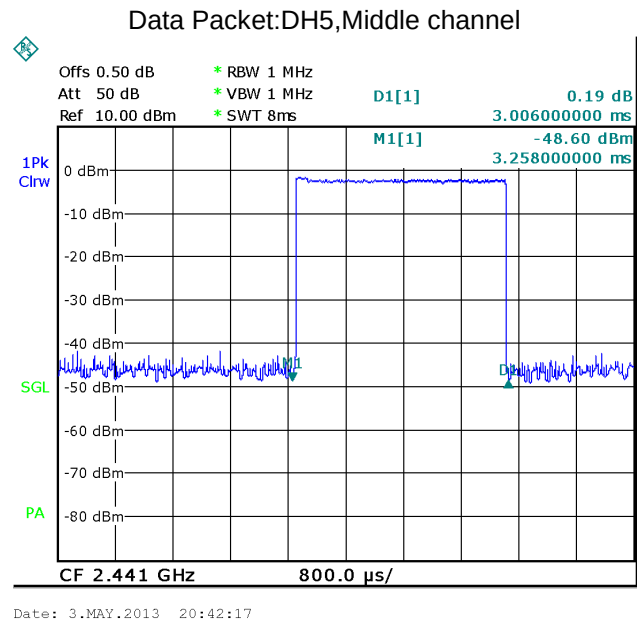

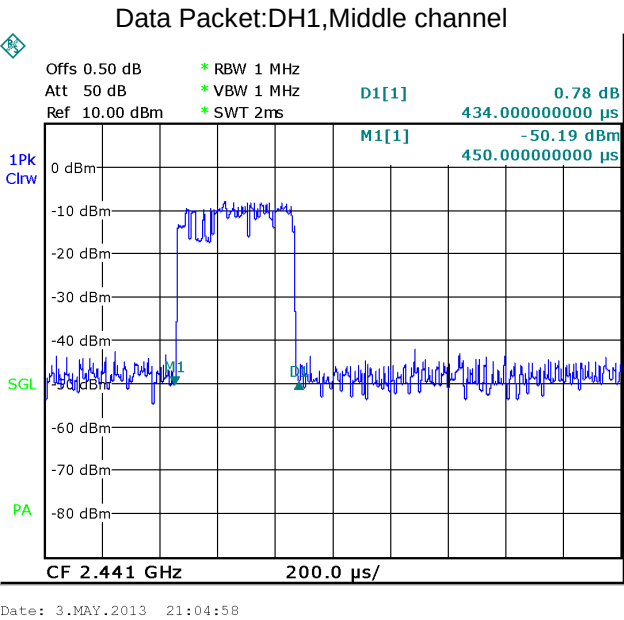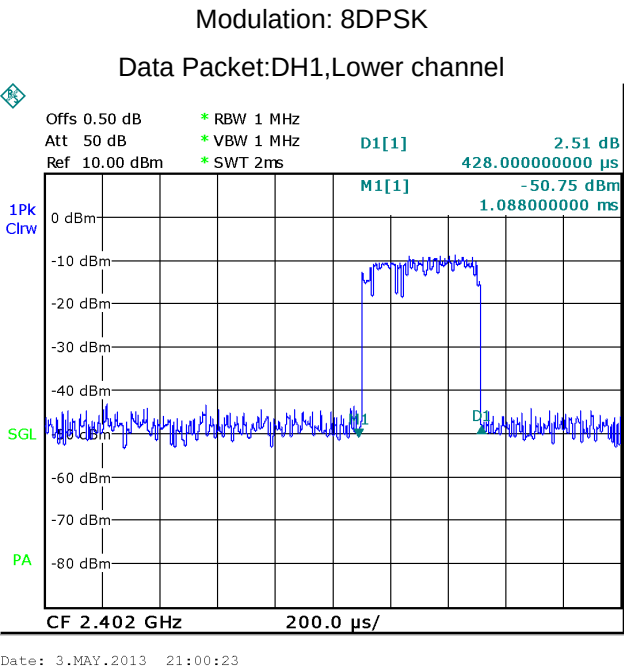


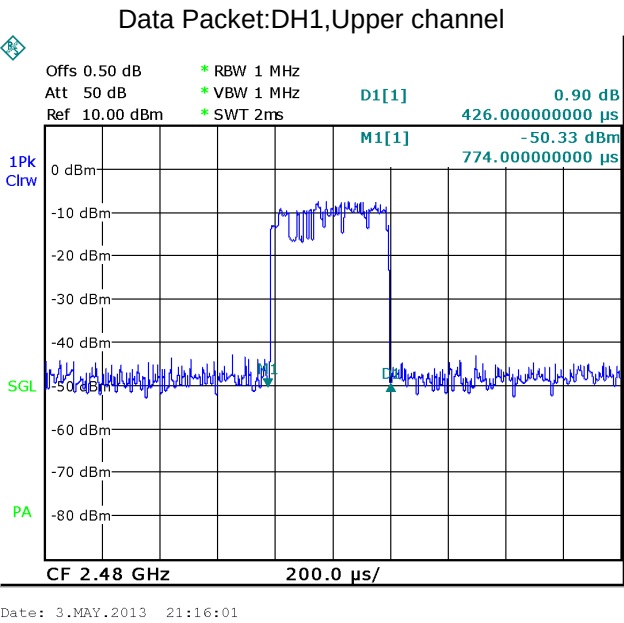

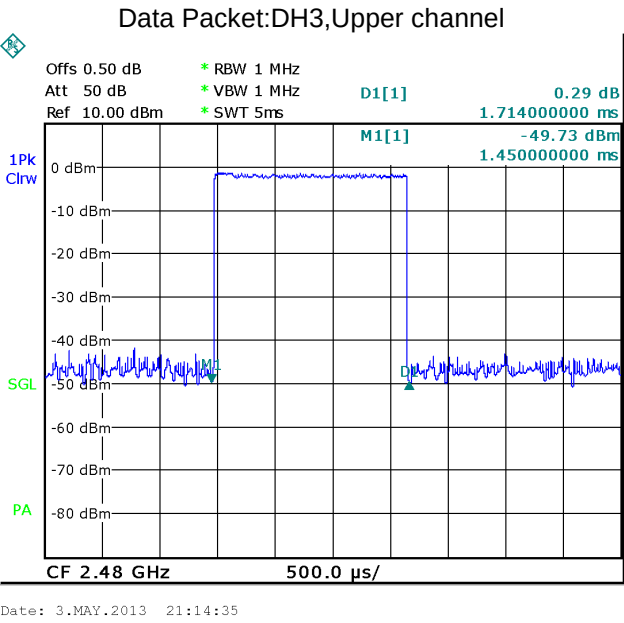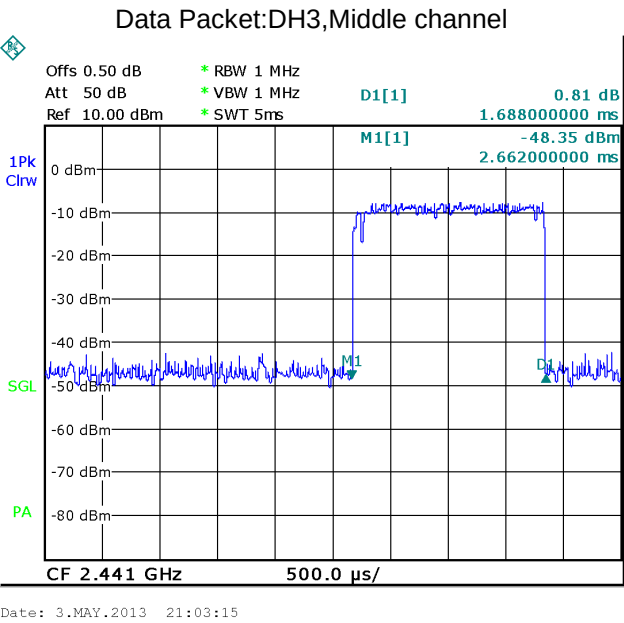

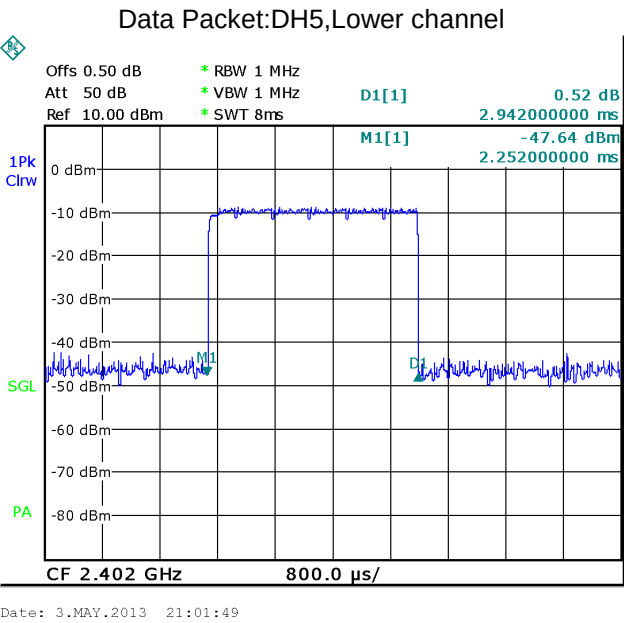



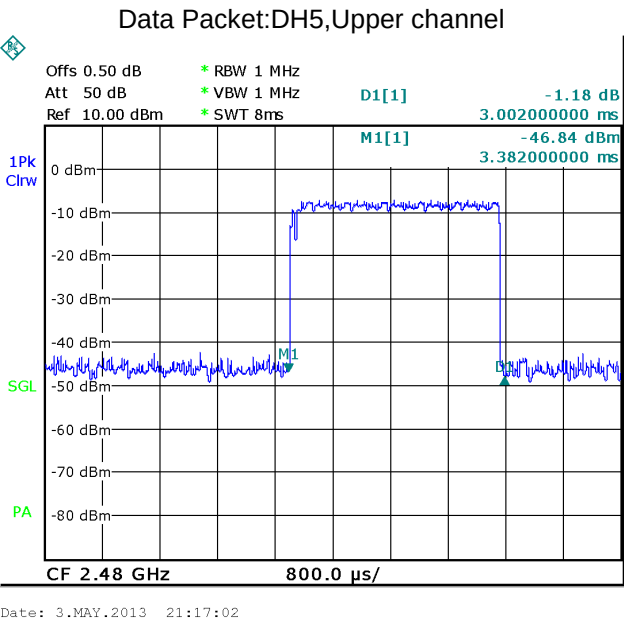

## **16 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a PCB printed antenna, fulfill the requirement of this section.

## 17 RF Exposure

Test Requirement: FCC Part 1.1307

Test Mode: The EUT work in test mode(Tx).

### 17.1 Requirements:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

### 17.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|------------------------------------------|------------------------------------------------------------------|
| 0.3-3.0               | 614                               | 1.63                              | (100)*                                   | 6                                                                |
| 3.0-30                | 1842 / f                          | 4.89 / f                          | (900 / f)*                               | 6                                                                |
| 30-300                | 61.4                              | 0.163                             | 1.0                                      | 6                                                                |
| 300-1500              |                                   |                                   | F/300                                    | 6                                                                |
| 1500-100,000          |                                   |                                   | 5                                        | 6                                                                |

(B) Limits for General Population / Uncontrolled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|------------------------------------------|------------------------------------------------------------------|
| 0.3-1.34              | 614                               | 1.63                              | (100)*                                   | 30                                                               |
| 1.34-30               | 824/f                             | 2.19/f                            | (180/f)*                                 | 30                                                               |
| 30-300                | 27.5                              | 0.073                             | 0.2                                      | 30                                                               |
| 300-1500              |                                   |                                   | F/1500                                   | 30                                                               |
| 1500-100,000          |                                   |                                   | 1.0                                      | 30                                                               |

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

### 17.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = Peak RF output power (W)

**G** = EUT Antenna numeric gain (numeric) ,Gain<sub>numeric</sub>=10<sup>(dBi/10)</sup>

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

| Modulation | Antenna Gain (dBi) | Antenna Gain (numeric) | Max. Output Power (dBm) | Peak Output Power (mW) | Power Density (S) (mW/cm <sup>2</sup> ) | Limit of Power Density (S) (mW/cm <sup>2</sup> ) |
|------------|--------------------|------------------------|-------------------------|------------------------|-----------------------------------------|--------------------------------------------------|
| GFSK       | 0                  | 1                      | -0.53                   | 0.8851                 | 0.0001761                               | 1                                                |
| Pi/4DQPSK  | 0                  | 1                      | -1.40                   | 0.7244                 | 0.0001441                               | 1                                                |
| 8DPSK      | 0                  | 1                      | -1.40                   | 0.7244                 | 0.0001441                               | 1                                                |

## 18 Photographs – Test Setup

### 18.1 Conducted Emissions





### 18.2 Radiated Emissions

Below 30MHz



From 30-1000MHz

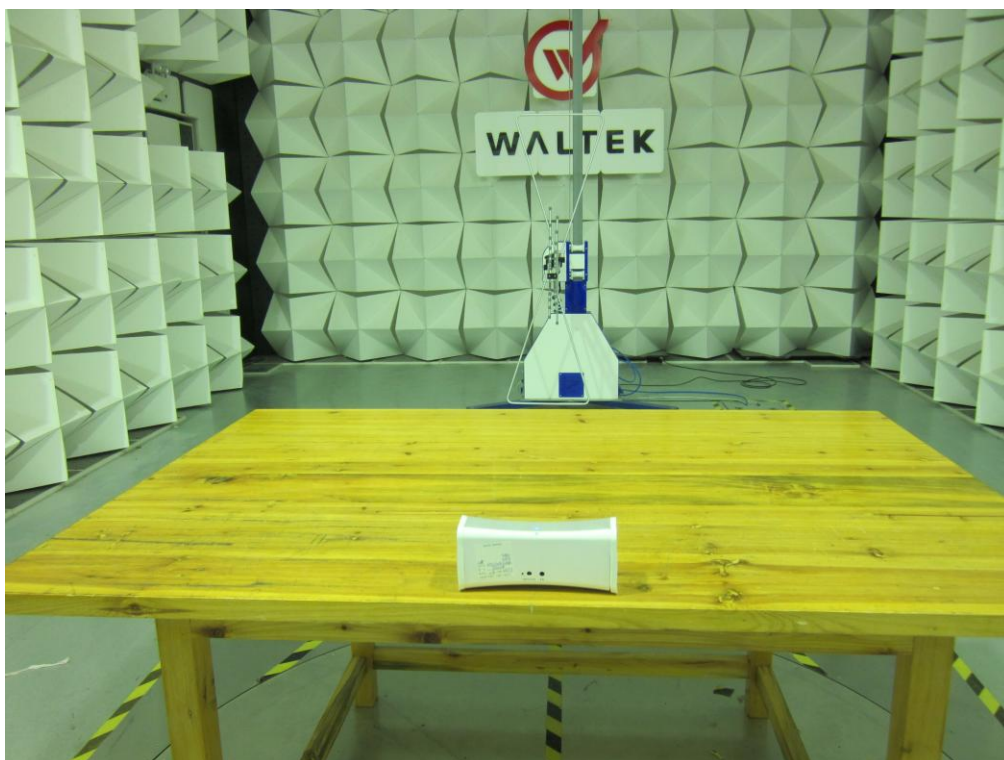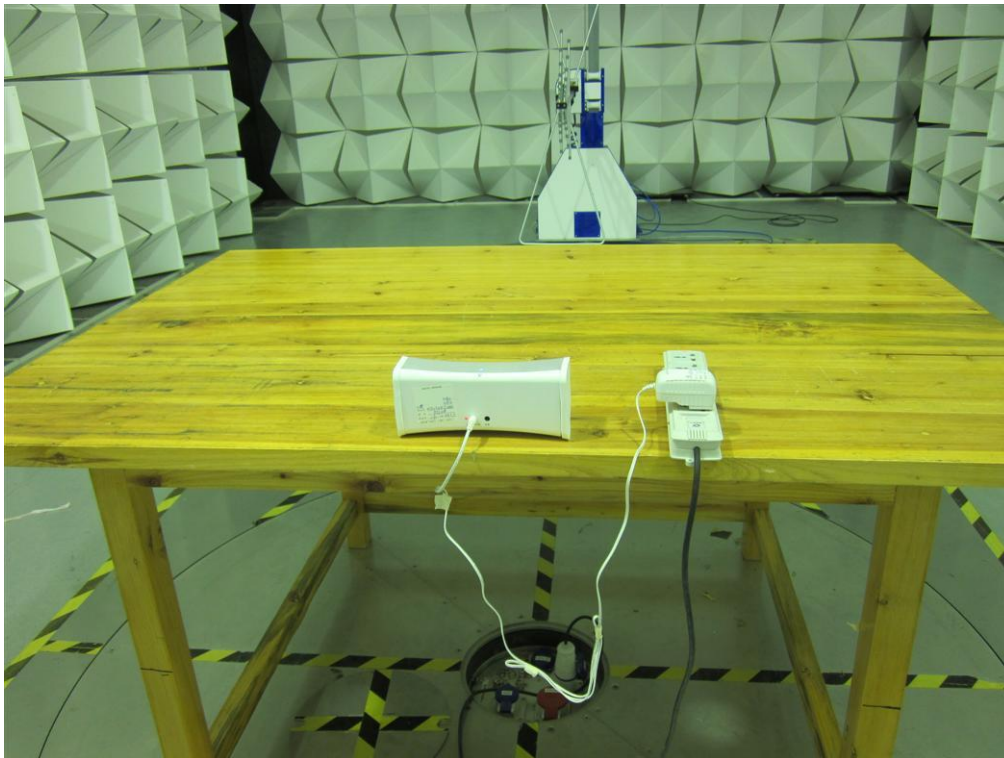



Above 1GHz





## 19 Photographs - Constructional Details

### 19.1 EUT – External View







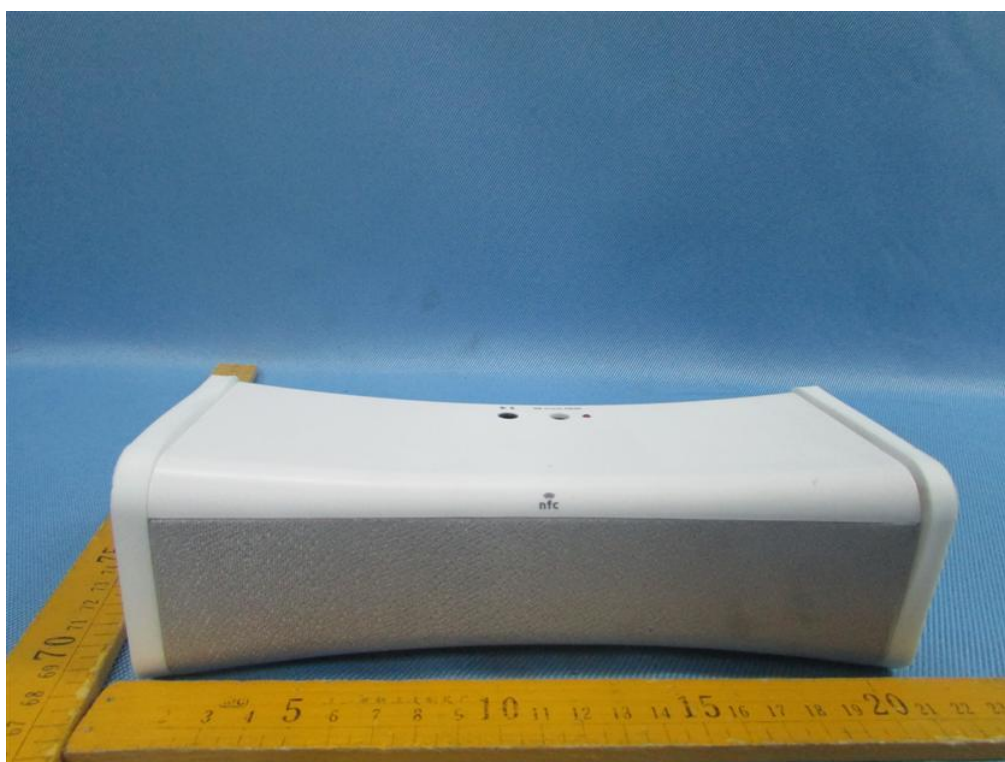


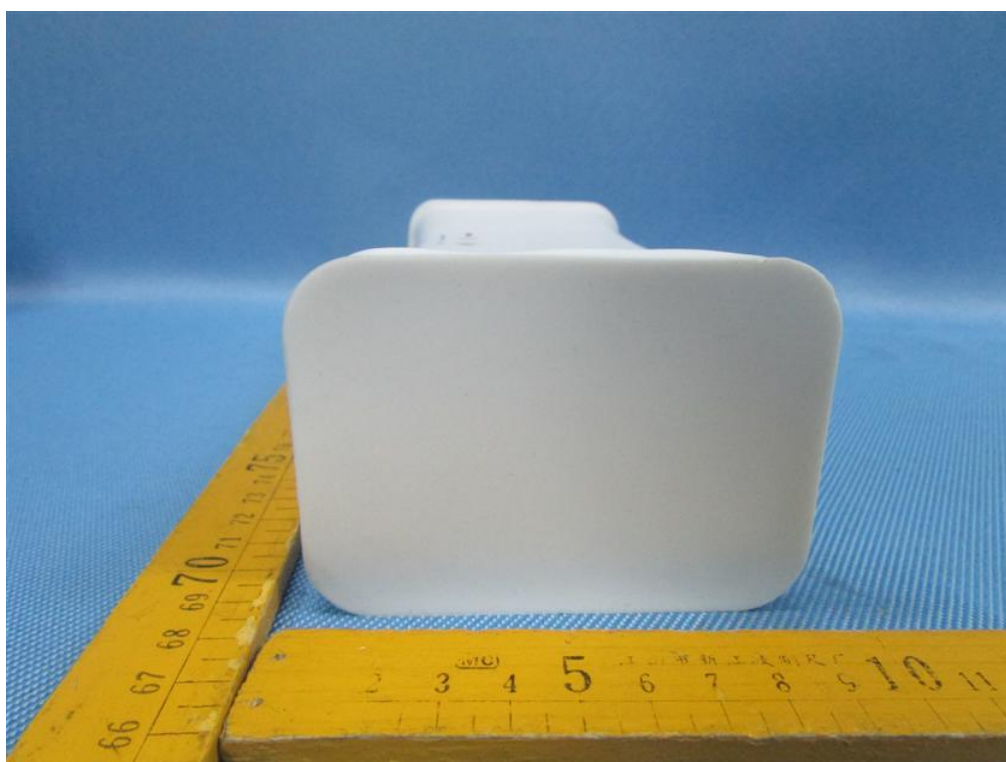






## 19.2 EUT – Internal View

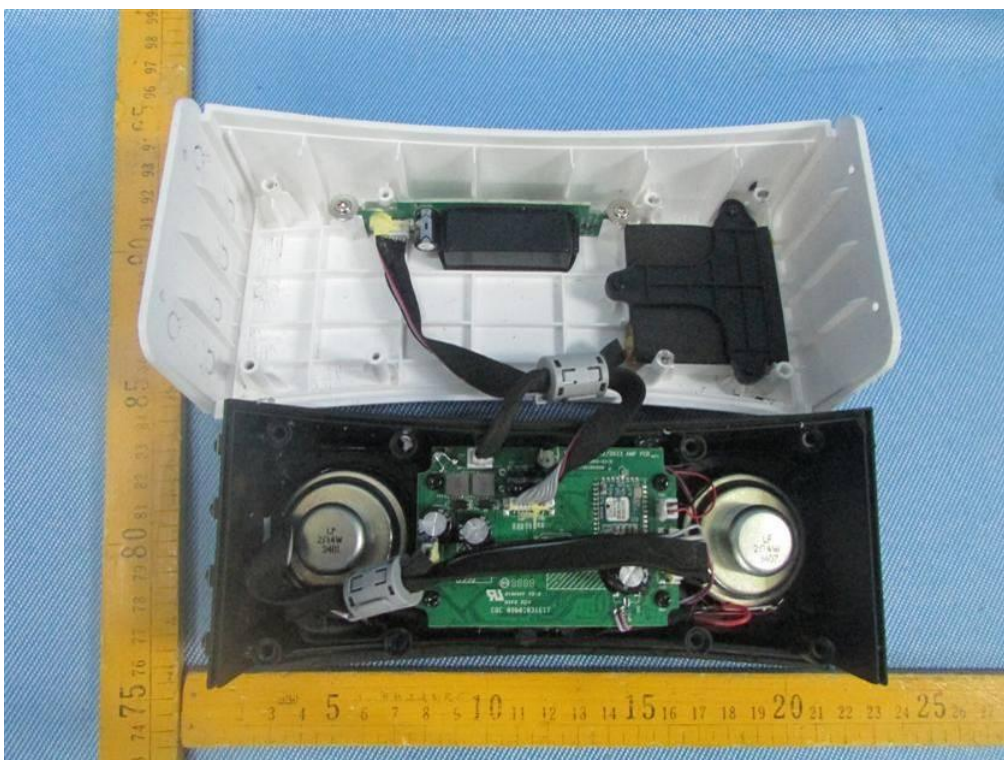
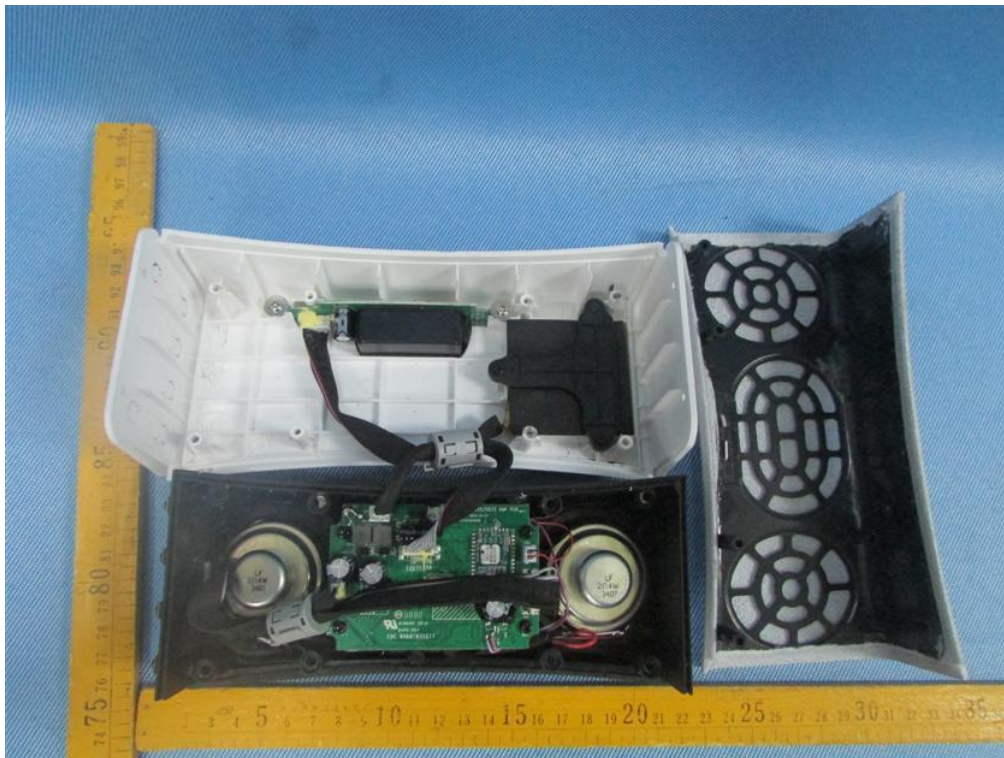




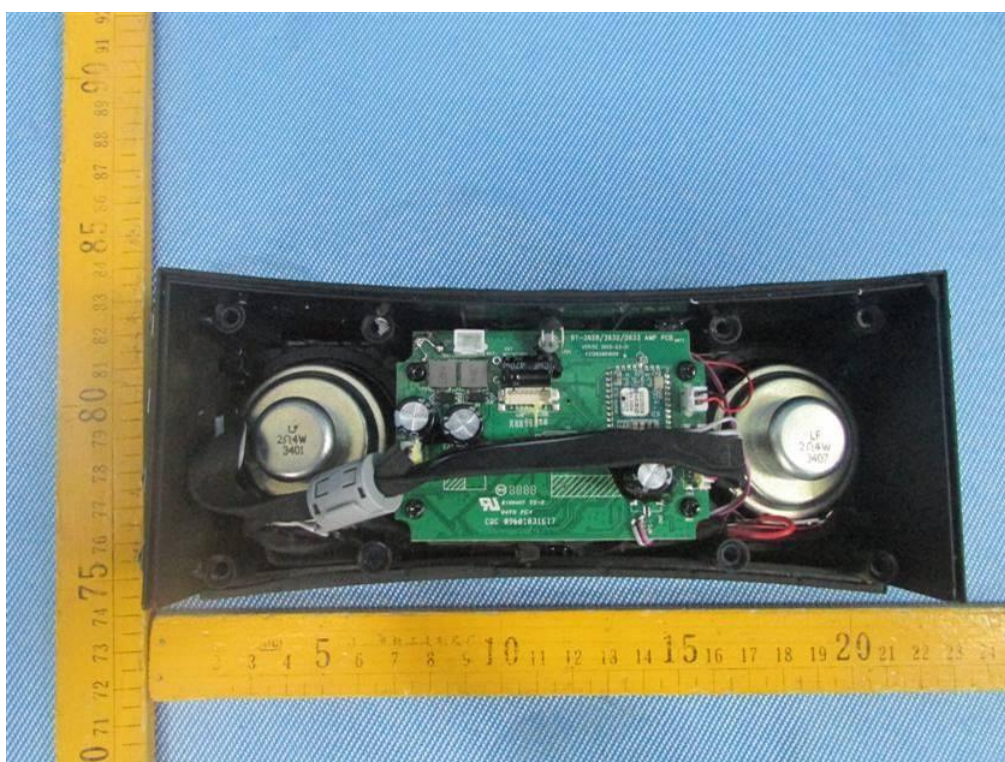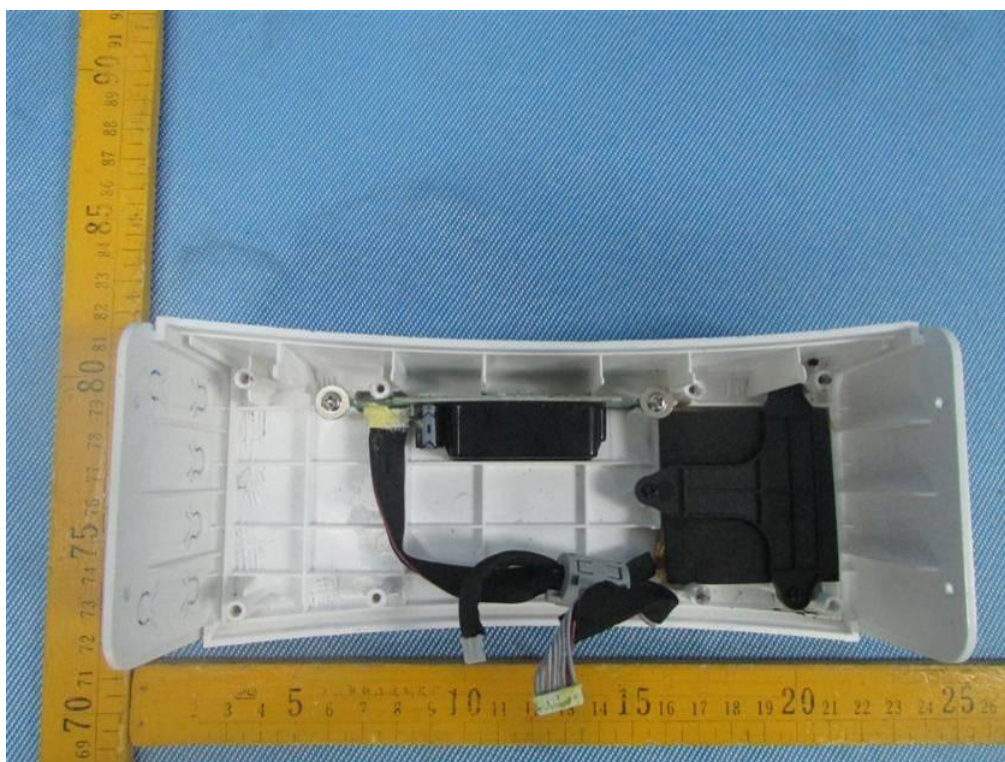




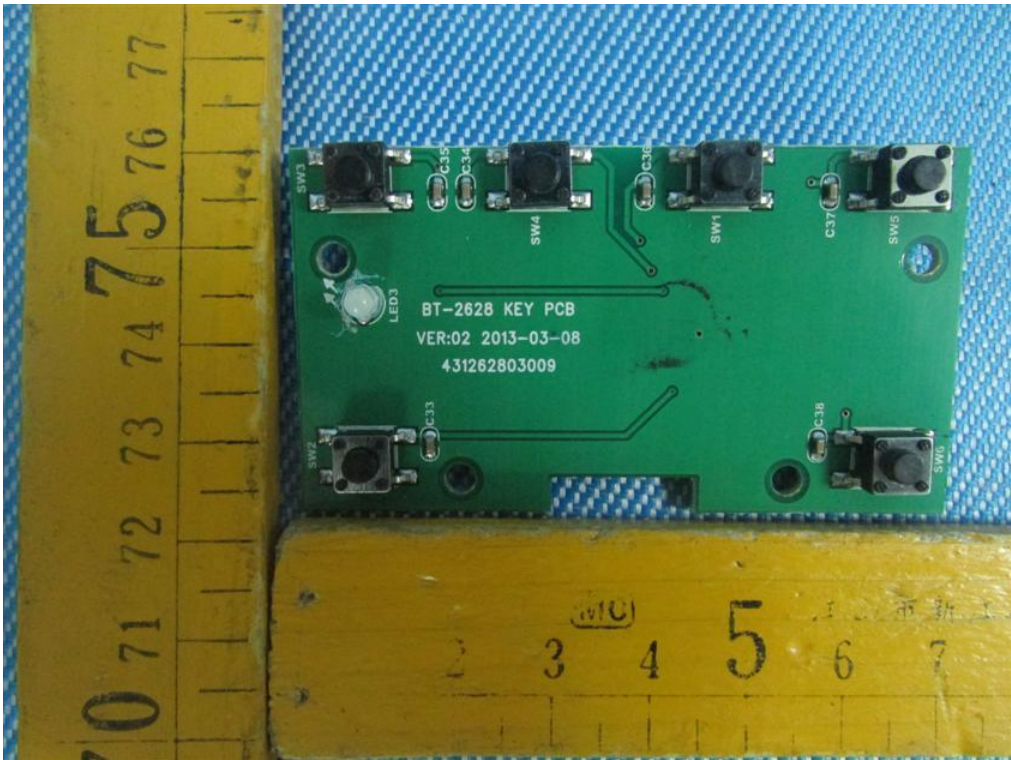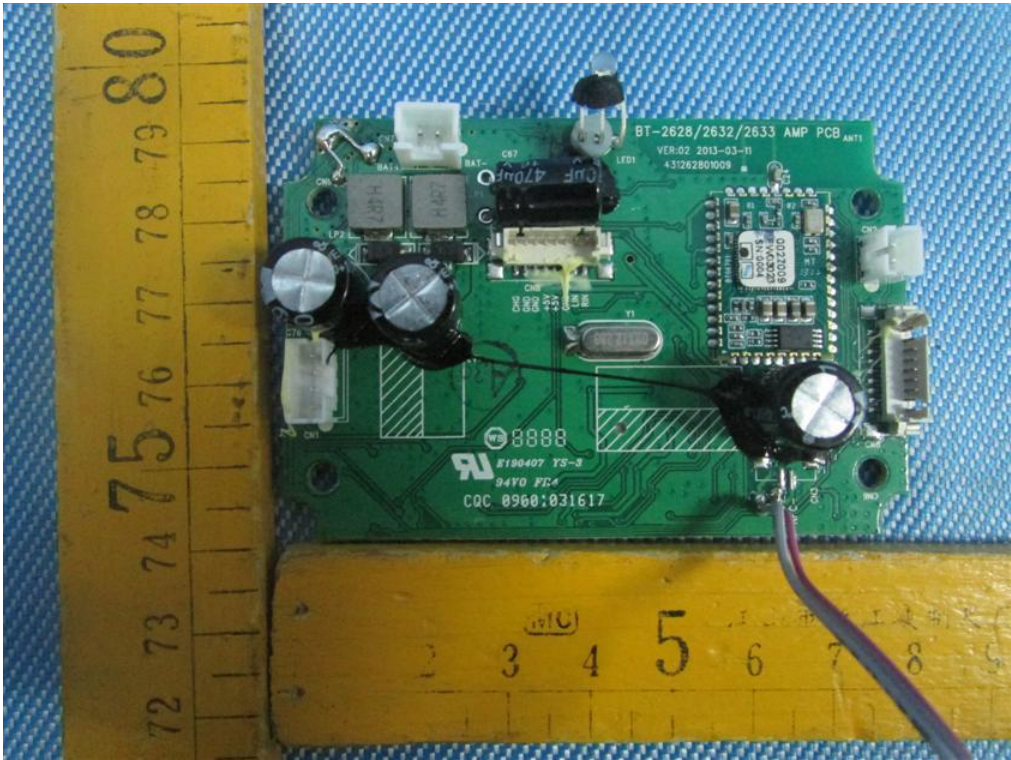


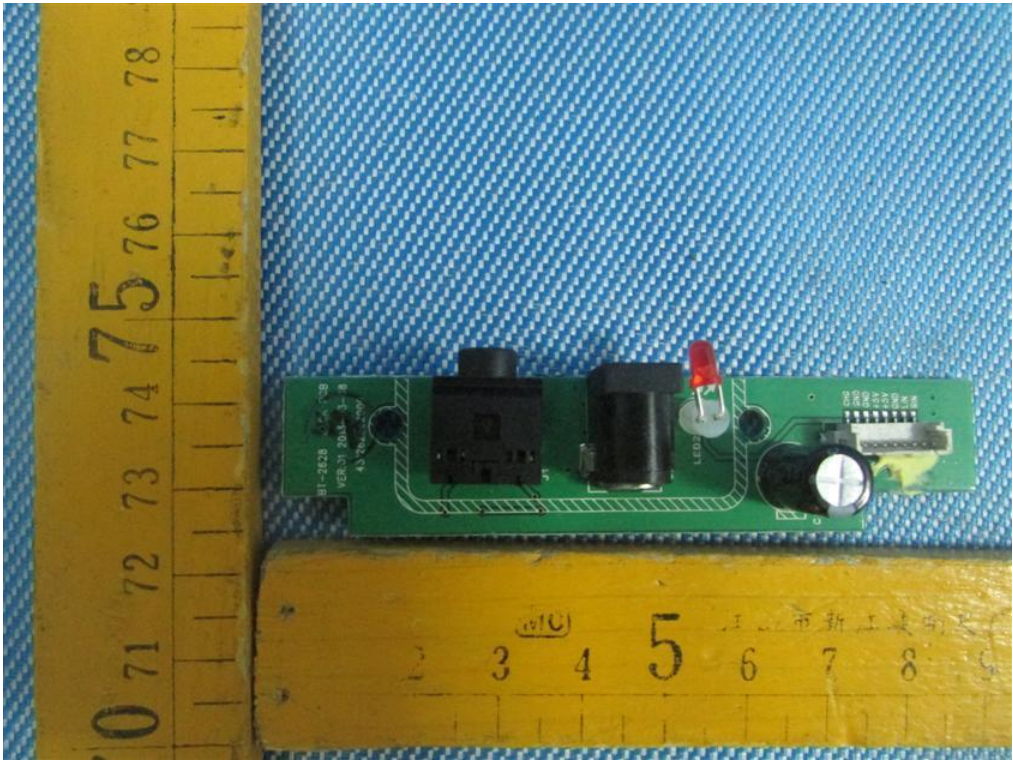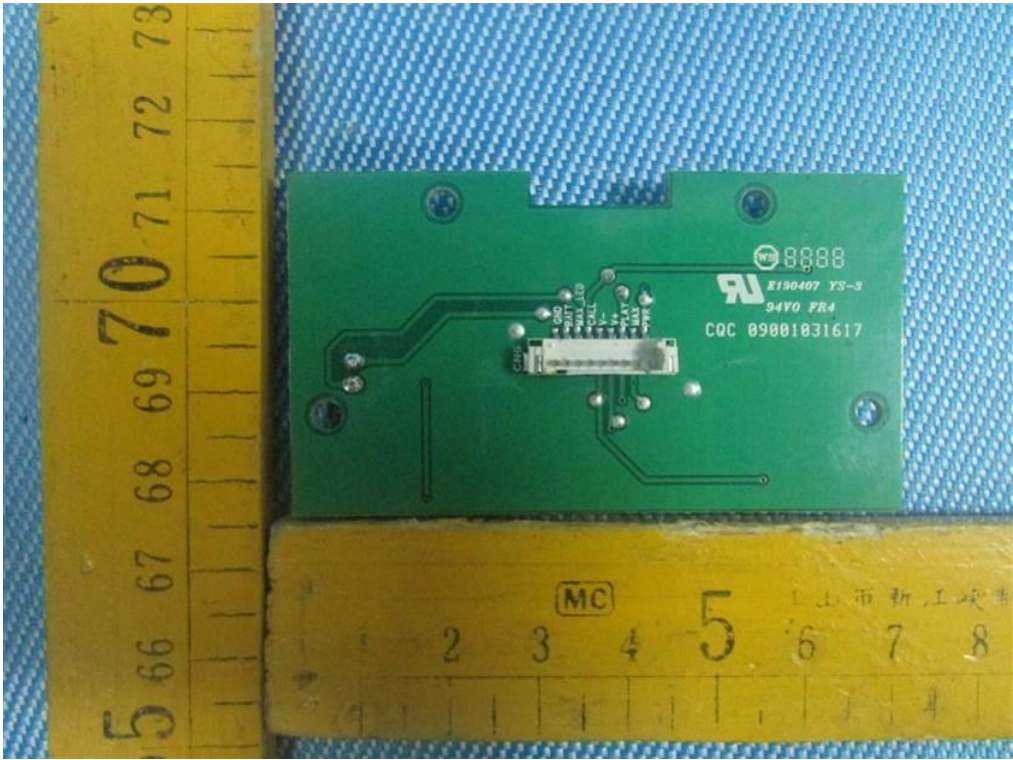





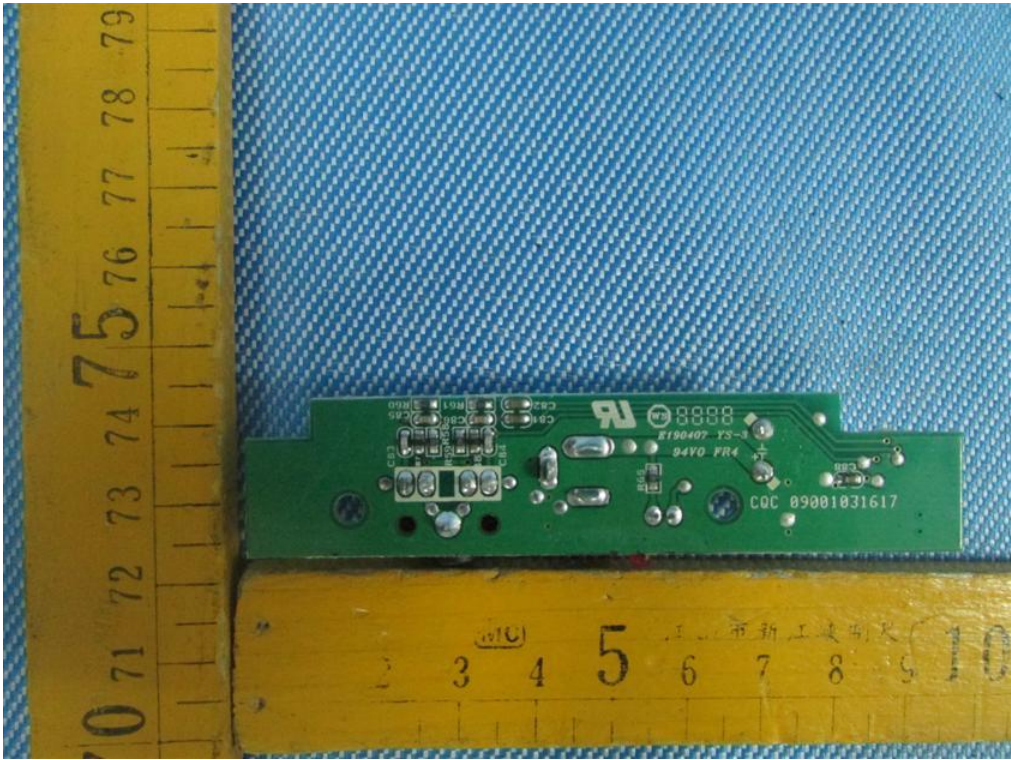



19.3 EUT-RF Module View

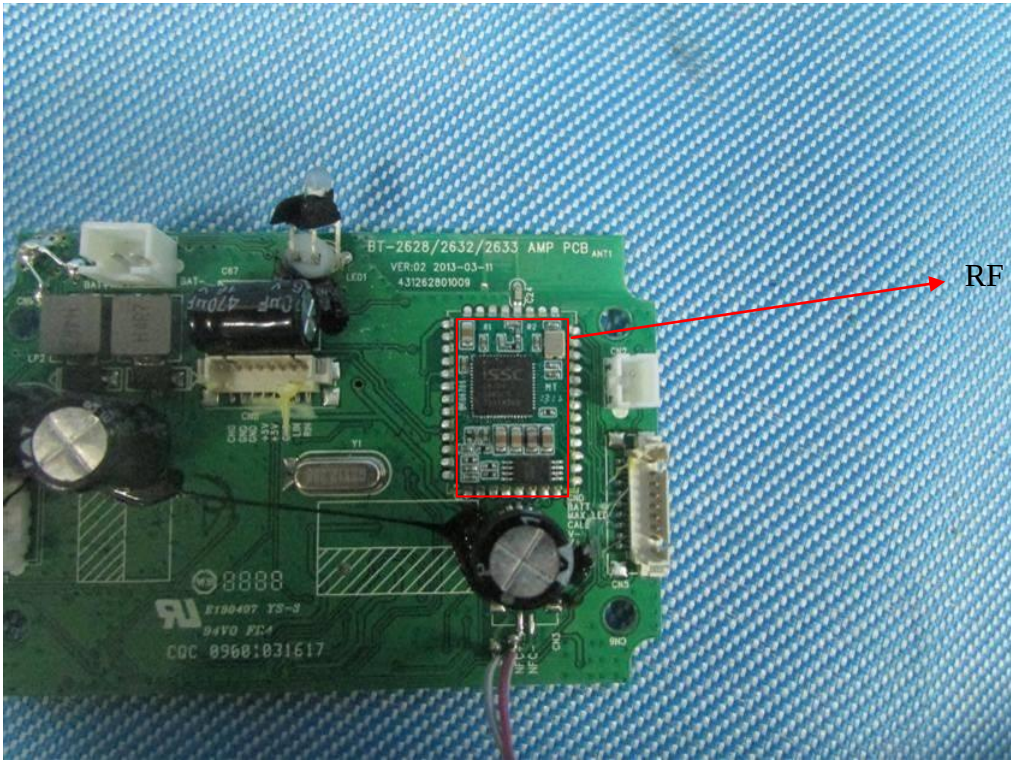



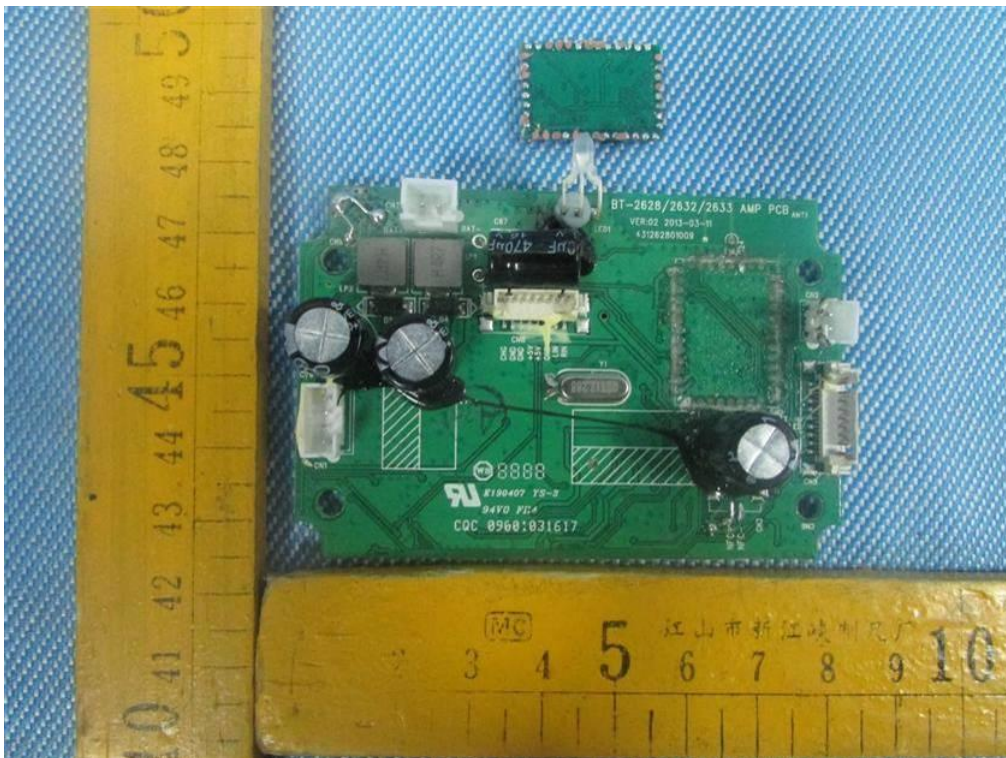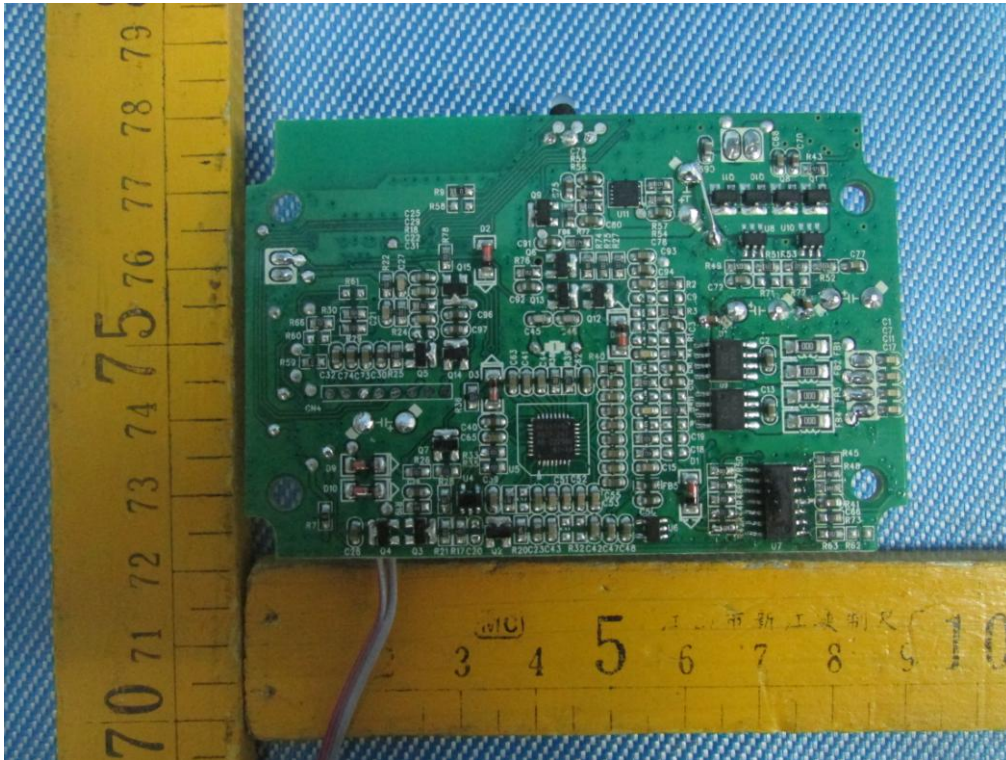



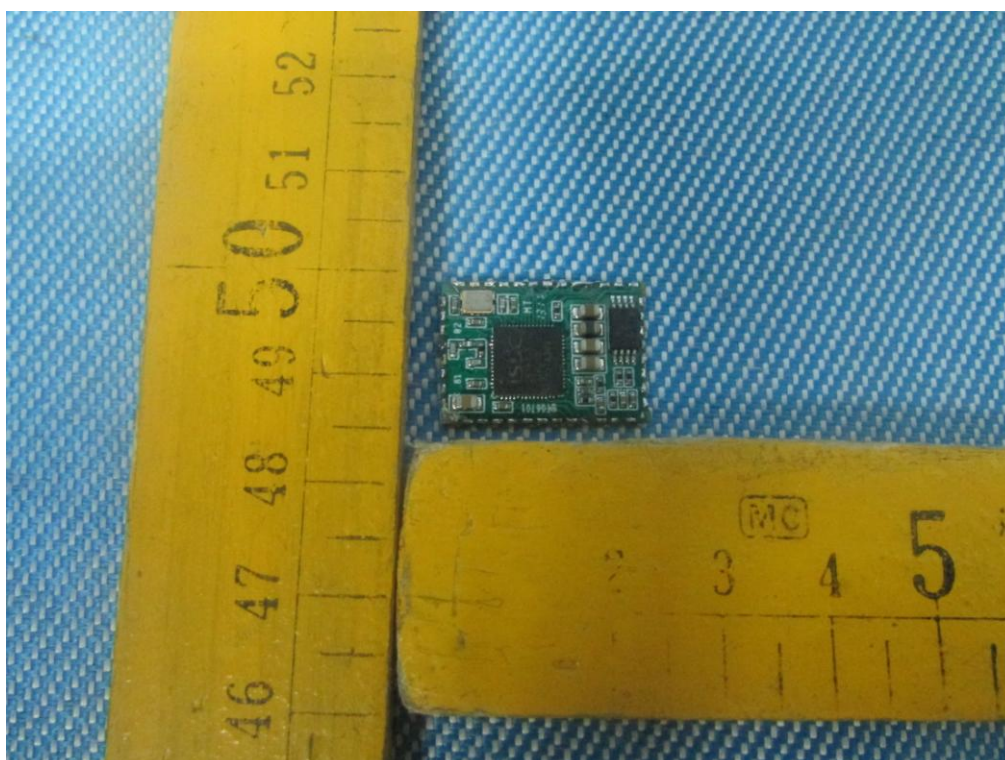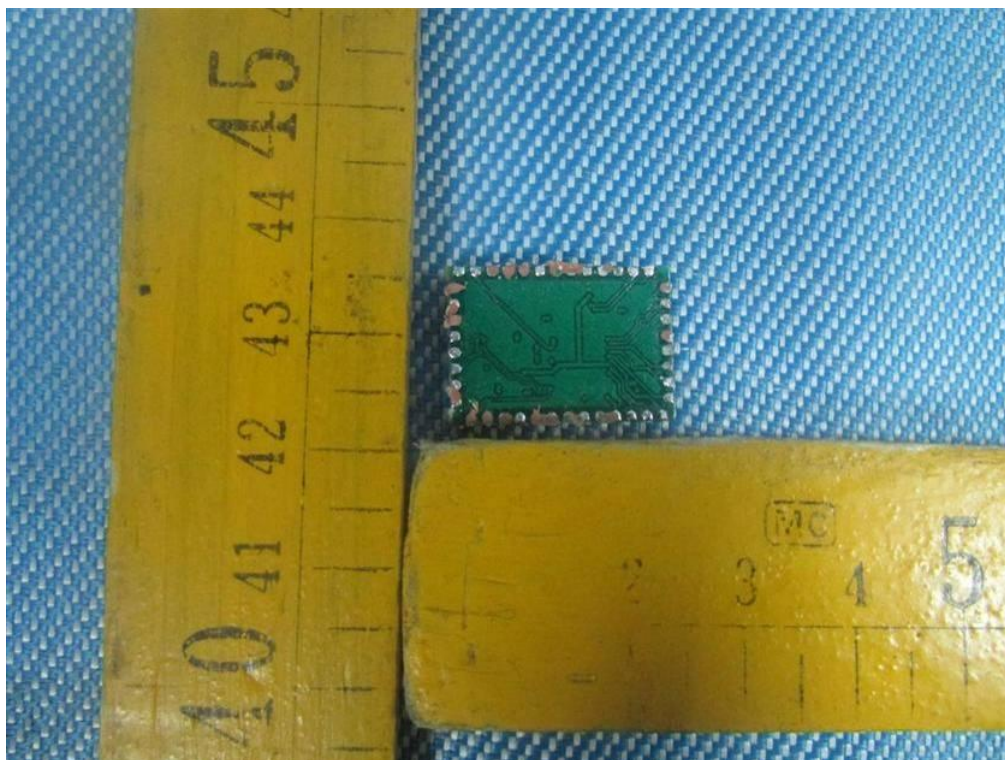



## 19.4 Adapter View





=End of test report=