

SAR EVALUATION REPORT

For

ITALCOM GROUP

1728 Coral Way, Coral Gables, Miami, Florida, United States

FCC ID: YPVITALCOMTIKX2

Report Type: Original Report	Product Type: Mobile Phone
Test Engineer: Sandy Wang	<i>Sandy Wang</i>
Report Number: RSZ111202006-20	
Report Date: 2012-02-21	
Reviewed By: EMC Engineer	<i>Merry Zhao</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the Federal Government.

* This report contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

Attestation of Test Results		
EUT Information	Company Name	ITALCOM GROUP
	EUT Description	Mobile Phone
	FCC ID	YPVITALCOMTIKX2
	Model Number	tikx2
	Test Date	2012.01.05--2012.01.07
Frequency	Max. SAR Level(s) Measured	Limit(W/Kg)
Cellular Band	0.313 W/kg 1g Head Tissue 1.207 W/kg 1g Body Tissue	1.6
PCS Band	0.409 W/kg 1g Head Tissue 1.262 W/kg 1g Body Tissue	
WiFi (802.11b)	0.047 W/kg 1g Head Tissue 0.216 W/kg 1g Body Tissue	
Applicable Standards	ANSI / IEEE C95.1 : 2005 IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields,3 kHz to 300 GHz.	
	ANSI / IEEE C95.3 : 2002 IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields With Respect to Human Exposure to SuchFields,100 kHz—300 GHz.	
	OET BULLETIN 65 SUPPLEMENT C Evaluating Compliance with FCC Guidelines for Human Exposure To Radiofrequency Electromagnetic Fields	
	IEEE1528:2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques	
<p>Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Standards and has been tested in accordance with the measurement procedures specified in FCC OET 65 Supplement C and IEEE 1528-2003.</p> <p>The results and statements contained in this report pertain only to the device(s) evaluated.</p>		

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
EUT DESCRIPTION	5
TECHNICAL SPECIFICATION	5
REFERENCE, STANDARDS, AND GUIDELINES	6
SAR LIMITS	7
FACILITIES AND ACCREDITATION	8
DESCRIPTION OF TEST SYSTEM	9
EQUIPMENT LIST AND CALIBRATION	16
EQUIPMENTS LIST & CALIBRATION INFORMATION	16
SAR MEASUREMENT SYSTEM VERIFICATION	17
LIQUID VERIFICATION	17
SYSTEM ACCURACY VERIFICATION	21
SAR SYSTEM VALIDATION DATA	22
EUT TEST STRATEGY AND METHODOLOGY	34
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON’S EAR	34
CHEEK/TOUCH POSITION	35
EAR/TILT POSITION	35
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS	36
SAR EVALUATION PROCEDURE	37
CONDUCTED OUTPUT POWER MEASUREMENT	38
PROVISION APPLICABLE	38
TEST PROCEDURE	38
TEST RESULTS:	38
SAR SIMULTANEOUS TRANSMISSION EVALUATION	41
SAR MEASUREMENT RESULTS	43
EUT SCAN RESULTS	47
APPENDIX A–MEASUREMENT UNCERTAINTY	69
APPENDIX B–PROBE CALIBRATION CERTIFICATES	70
APPENDIX C–DIPOLE CALIBRATION CERTIFICATES	80
APPENDIX D–EUT TEST POSITION PHOTOS	107
LIQUID DEPTH \geq 15CM	107
BODY-WORN BACK HEADSET-MODE SETUP PHOTO	107
LEFT HEAD TOUCH SETUP PHOTO	108
LEFT HEAD TILT SETUP PHOTO	108
RIGHT HEAD TOUCH SETUP PHOTO	109
RIGHT HEAD TILT SETUP PHOTO	109
BODY-WORN BACK POSITION A SETUP PHOTO	110
BODY-WORN BACK POSITION B SETUP PHOTO	110
BODY-WORN BACK POSITION C SETUP PHOTO	111
BODY-WORN FRONT POSITION D SETUP PHOTO	111
APPENDIX E–EUT PHOTOS	112
EUT – FRONT SIDE VIEW	112
EUT – BACK SIDE VIEW	112
EUT-TOP SIDE VIEW	113
EUT-BOTTOM SIDE VIEW	113
EUT-LEFT SIDE VIEW	114
EUT – UNCOVERED VIEW	114
EUT-HEADSET VIEW	115
APPENDIX F–INFORMATIVE REFERENCES	116

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RSZ111202006-20	Original Report	2012-02-21

EUT DESCRIPTION

This report has been prepared on behalf of ITALCOM GROUP and their product, FCC ID: YPVITALCOMTIKX2, Model: tikx2 or the EUT (Equipment Under Test) as referred to in the rest of this report. The EUT is a Mobile phone.

Technical Specification

Product Type	Portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
Body-Worn Accessories:	Headset
Face-Head Accessories:	None
Multi-slot Class:	Class 12
Operation Mode :	GSM Voice , GPRS Data , Bluetooth and WiFi
Frequency Band:	Cellular Band: 824-849 MHz(TX); 869-894 MHz(RX) PCS Band : 1850-1910 MHz(TX); 1930-1990 MHz(RX) Bluetooth: 2400MHz-2483.5MHz (TX/RX) WiFi : 2412MHz-2462MHz(TX/RX)
Conducted RF Power:	Cellular Band : 32.24dBm PCS Band: 29.30dBm Bluetooth: 8.15dBm WiFi(802.11b): 16.07dBm WiFi(802.11g): 12.89dBm
Dimensions (L*W*H):	115mm (L)× 61mm (W)× 14mm (H)
Weight:	115g
Power Source:	3.7VDC/1100mAh Rechargeable Battery
Normal Operation:	Head and Body-worn

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Limits

FCC Limit (1g Tissue)

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

CE Limit (10g Tissue)

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 10 g of tissue)	2.0	10
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2 W/kg (CE) applied to the EUT.

FACILITIES AND ACCREDITATION

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect data is located at 6/F, the 3rd Phase of WanLi Industrial Building, Shi Hua Road, Fu Tian Free Trade Zone, Shenzhen, Guangdong, P.R. of China

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

DESCRIPTION OF TEST SYSTEM

These measurements were performed with ALSAS 10 Universal Integrated SAR Measurement system from APREL Laboratories.

ALSAS-10U System Description

ALSAS-10-U is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62209, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller.

ALSAS-10U uses the latest methodologies. And FDTD modeling to provide a platform which is repeatable with minimum uncertainty.

Applications

Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. System operation range currently available up-to 6 GHz in simulated tissue.

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the ALSAS-10U software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x8 (8mmx8mmx5mm) providing a volume of 32mm³ in the X & Y axis, and 35mm in the Z axis.



ALSAS-10U Interpolation and Extrapolation Uncertainty


The overall uncertainty for the methodology and algorithms the used during the SAR calculation was evaluated using the data from IEEE 1528 based on the example f3 algorithm:

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \cdot \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

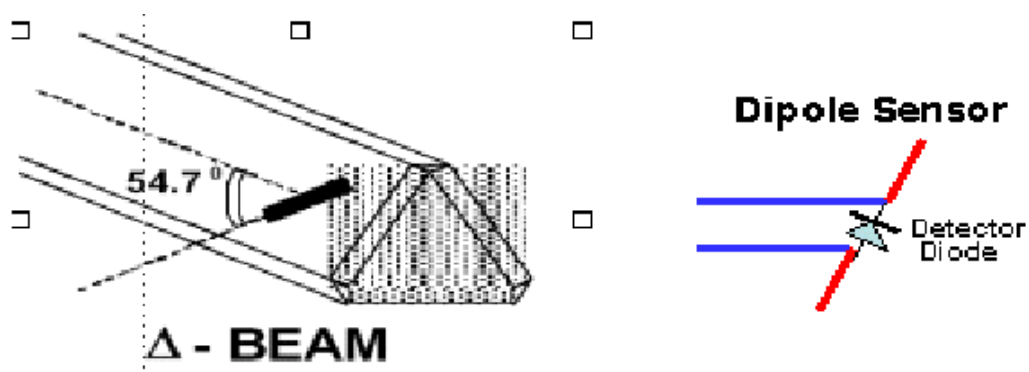

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Isotropic E-Field Probe Specification

Calibration Method	Frequency Dependent Below 1 GHz Calibration in air performed in a TEM Cell Above 1 GHz Calibration in air performed in waveguide
Sensitivity	0.70 $\mu\text{V}/(\text{V}/\text{m})^2$ to 0.85 $\mu\text{V}/(\text{V}/\text{m})^2$
Dynamic Range	0.0005 W/kg to 100 W/kg
Isotropic Response	Better than 0.1 dB
Diode Compression Point (DCP)	Calibration for Specific Frequency
Probe Tip Diameter	< 2.9 mm
Sensor Offset	1.56 (+/- 0.02 mm)
Probe Length	289 mm
Video Bandwidth	@ 500 Hz: 1 dB @ 1.02 kHz: 3 dB
Boundary Effect	Less than 2.1% for distance greater than 0.58 mm
Spatial Resolution	The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe. The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe

Boundary Detection Unit and Probe Mounting Device

ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detection during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are fed directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, & Z).

The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connect to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

Daq-Paq (Analog to Digital Electronics)

ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from 5 μV to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via an RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

ADC	12 Bit
Amplifier Range	20 mV to 200 mV and 150 mV to 800 mV
Field Integration	Local Co-Processor utilizing proprietary integration algorithms
Number of Input Channels	4 in total 3 dedicated and 1 spare
Communication	Packet data via RS232

Axis Articulated Robot

ALSAS-10U utilizes a six axis articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelope. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.



Robot/Controller Manufacturer	Thermo CRS
Number of Axis	Six independently controlled axis
Positioning Repeatability	0.05 mm
Controller Type	Single phase Pentium based C500C
Robot Reach	710 mm
Communication	RS232 and LAN compatible

ALSAS Universal Workstation

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurements using different types of phantoms with one set up, which significantly speeds up the measurement process.

Universal Device Positioner

The universal device positioner allows complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt indicator is included for the of aid cheek to tilt movements for head SAR analysis. Overall uncertainty for measurements have been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.




Phantom Types

The ALSAS-10U allows the integration of multiple phantom types. SAM Phantoms fully compliant with IEEE 1528, Universal Phantom, and Universal Flat.

APREL SAM Phantoms

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.

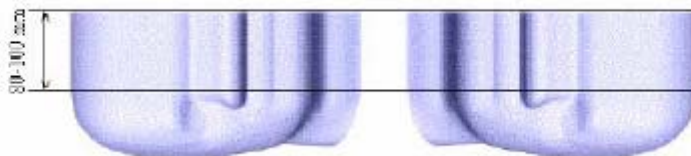

APREL Laboratories Universal Phantom

The Universal Phantom is used on the ALSAS-10U as a system validation phantom. The Universal Phantom has been fully validated both experimentally from 800MHz to 6GHz and numerically using XFDTD numerical software.

The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528.

The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for both left and right head experiments in one measurement.



Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (Nacl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (s/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Recommended Tissue Dielectric Parameters for Head and Body

Frequency (MHz)	Head Tissue		Body Tissue	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00


EQUIPMENT LIST AND CALIBRATION

Equipments List & Calibration Information

Equipment	Model	Calibration Date	S/N
CRS F3 robot	ALS-F3	N/A	RAF0805352
CRS F3 Software	ALS-F3-SW	N/A	N/A
CRS C500C controller	ALS-C500	N/A	RCF0805379
Probe mounting device & Boundary Detection Sensor System	ALS-PMDPS-3	N/A	120-00270
Universal Work Station	ALS-UWS	N/A	100-00157
Data Acquisition Package	ALS-DAQ-PAQ-3	2011-05-13	110-00212
Miniature E-Field Probe	ALS-E-020	2011-07-14	500-00283
Dipole, 835MHz	ALS-D-835-S-2	2011-08-25	210-00558
Dipole, 1900MHz	ALS-D-1900-S-2	2011-08-25	210-00710
Dipole Spacer	ALS-DS-U	N/A	250-00907
R&S, universal Radio Communication Tester	CMU200	2011-06-28	1100.0008.02
Device holder/Positioner	ALS-H-E-SET-2	N/A	170-00510
Left ear SAM phantom	ALS-P-SAM-L	N/A	130-00311
Right ear SAM phantom	ALS-P-SAM-R	N/A	140-00359
UniPhantom	ALS-P-UP-1	N/A	150-00413
Simulated Tissue 835 MHz Head	ALS-T-835-1-H	Each Time	270-01002
Simulated Tissue 835 MHz Body	ALS-T-835-1-B	Each Time	270-02101
Simulated Tissue 1900 MHz Head	ALS-T-1900-1-H	Each Time	295-01103
Simulated Tissue 1900 MHz Body	ALS-T-1900-1-B	Each Time	295-02102
Simulated Tissue 2450 MHz Head	ALS-TS-2450-H	Each Time	290-01108
Simulated Tissue 2450 MHz Body	ALS-TS-2450-B	Each Time	290-01109
Power Amplifier	5S1G4	N/A	71377
Synthesized Sweeper	HP 8341B	2011-04-11	2624A00116
Spectrum Analyzer	FSEM30	2011-07-05	849720/019

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

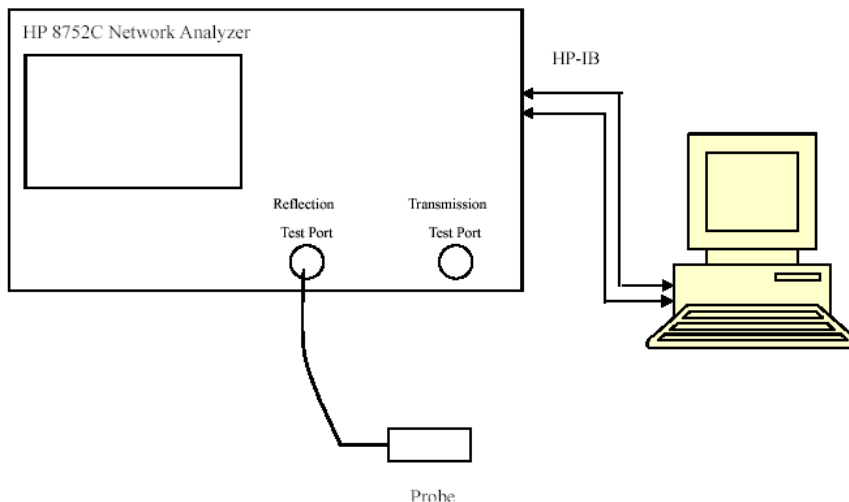

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency (MHz)	Liquid Type	Liquid Parameter		Result
		ϵ_r	σ (S/m)	
835	Head	42.62	0.93	In Tolerance
835	Body	55.69	0.98	In Tolerance
1900	Head	40.12	1.46	In Tolerance
1900	Body	54.18	1.51	In Tolerance

**Liquid Verification was performed on 2011-12-05*

Frequency (MHz)	Liquid Type	Liquid Parameter		Result
		ϵ_r	σ (S/m)	
2450	Head	39.10	1.81	In Tolerance
2450	Body	51.70	1.96	In Tolerance

**Liquid Verification was performed on 2011-12-07*

Please refer to the following tables.

850 MHz Head				1900 MHz Head		
Frequency (MHz)	e'	e''		Frequency (MHz)	e'	e''
824.0	42.652279	20.113259		1850.0	40.349201	13.809692
824.5	42.664336	20.090626		1851.2	40.327305	13.771466
825.0	42.623371	20.088402		1852.4	40.349367	13.758672
825.5	42.555718	20.067071		1853.6	40.301530	13.733701
826.0	42.483277	20.047175		1854.8	40.300427	13.763388
826.5	42.550369	20.030418		1856.0	40.302882	13.744238
827.0	42.584953	20.049485		1857.2	40.284475	13.741306
827.5	42.631454	20.054430		1858.4	40.272758	13.734172
828.0	42.588018	20.042442		1859.6	40.268622	13.744035
828.5	42.558678	20.079576		1860.8	40.237630	13.696296
829.0	42.605127	20.084417		1862.0	40.270332	13.720239
829.5	42.613726	20.142478		1863.2	40.259302	13.743782
830.0	42.633460	20.091218		1864.4	40.268944	13.701549
830.5	42.591650	20.047093		1865.6	40.215270	13.662084
831.0	42.573785	20.123154		1866.8	40.200967	13.675249
831.5	42.646601	20.109628		1868.0	40.227359	13.659711
832.0	42.589524	20.048917		1869.2	40.227059	13.695077
832.5	42.578617	20.038363		1870.4	40.221858	13.693250
833.0	42.563607	20.050113		1871.6	40.228571	13.680814
833.5	42.579311	20.095143		1872.8	40.222508	13.716683
834.0	42.621161	20.048306		1874.0	40.221079	13.740314
834.5	42.589613	20.075322		1875.2	40.235680	13.701209
835.0	42.618490	20.111100		1876.4	40.238981	13.712588
835.5	42.612384	20.062399		1877.6	40.179875	13.757281
836.0	42.562117	20.042326		1878.8	40.222039	13.747045
836.5	42.597238	20.081411		1880.0	40.120534	13.774007
837.0	42.566399	20.055770		1881.2	40.181428	13.778068
837.5	42.577995	20.085877		1882.4	40.207990	13.786984
838.0	42.596853	20.051058		1883.6	40.187760	13.785476
838.5	42.569732	20.055801		1884.8	40.225924	13.827161
839.0	42.581355	20.085793		1886.0	40.191285	13.856446
839.5	42.567120	20.045027		1887.2	40.223269	13.849467
840.0	42.553733	20.024935		1888.4	40.198108	13.810968
840.5	42.565751	20.002661		1889.6	40.168618	13.843146
841.0	42.560474	20.063522		1890.8	40.130908	13.818825
841.5	42.583456	20.043209		1892.0	40.187855	13.826772
842.0	42.568725	20.018392		1893.2	40.165399	13.836048
842.5	42.587457	19.983784		1894.4	40.145704	13.815746
843.0	42.567704	20.012397		1895.6	40.136074	13.835291
843.5	42.512079	19.989350		1896.8	40.122006	13.823776
844.0	42.525240	20.023773		1898.0	40.130702	13.828541
844.5	42.498624	20.028482		1899.2	40.103922	13.806731
845.0	42.460861	19.995131		1900.4	40.117002	13.808678
845.5	42.491382	19.983028		1901.6	40.141260	13.828109
846.0	42.429753	20.008455		1902.8	40.141568	13.819772
846.5	42.486968	19.947207		1904.0	40.103326	13.799233
847.0	42.459528	19.983173		1905.2	40.137225	13.843143
847.5	42.434246	19.956691		1906.4	40.129768	13.827495
848.0	42.439134	19.962464		1907.6	40.155773	13.830303
848.5	42.430740	19.992719		1908.8	40.137016	13.849611
849.0	42.451724	19.983399		1910.0	40.161155	13.878174


850 MHz Body				1900 MHz Body		
Frequency (MHz)	e'	e''		Frequency (MHz)	e'	e''
824.0	55.565420	21.434660		1850.0	54.197165	14.227881
824.5	55.535307	21.433311		1851.2	54.168712	14.233153
825.0	55.484453	21.406125		1852.4	54.169119	14.216085
825.5	55.486456	21.370515		1853.6	54.154873	14.216119
826.0	55.431951	21.423079		1854.8	54.121098	14.211213
826.5	55.500107	21.385153		1856.0	54.133572	14.190793
827.0	55.527761	21.418143		1857.2	54.110229	14.176570
827.5	55.504070	21.403356		1858.4	54.161496	14.211335
828.0	55.514625	21.420319		1859.6	54.145237	14.213306
828.5	55.470280	21.379920		1860.8	54.100344	14.196043
829.0	55.550369	21.404093		1862.0	54.080617	14.189814
829.5	55.581691	21.446519		1863.2	54.062971	14.223142
830.0	55.538667	21.439049		1864.4	54.152034	14.208267
830.5	55.573498	21.402235		1865.6	54.155980	14.203277
831.0	55.603774	21.500332		1866.8	54.118352	14.202185
831.5	55.620417	21.503589		1868.0	54.125650	14.208990
832.0	55.638096	21.450975		1869.2	54.183343	14.233825
832.5	55.607673	21.505270		1870.4	54.150211	14.221206
833.0	55.678706	21.476684		1871.6	54.186930	14.231186
833.5	55.703398	21.515476		1872.8	54.176716	14.235264
834.0	55.682073	21.433497		1874.0	54.187711	14.295232
834.5	55.694145	21.482496		1875.2	54.204068	14.274822
835.0	55.687381	21.511023		1876.4	54.180298	14.276273
835.5	55.712655	21.450025		1877.6	54.119350	14.274149
836.0	55.654355	21.415580		1878.8	54.186831	14.300916
836.5	55.670916	21.490192		1880.0	54.183938	14.320966
837.0	55.723778	21.429712		1881.2	54.149094	14.306222
837.5	55.688831	21.441469		1882.4	54.124637	14.327171
838.0	55.763659	21.438462		1883.6	54.177114	14.337511
838.5	55.679107	21.463825		1884.8	54.225730	14.347707
839.0	55.703490	21.458180		1886.0	54.150408	14.317732
839.5	55.705439	21.422813		1887.2	54.110581	14.334049
840.0	55.742265	21.406871		1888.4	54.159146	14.344082
840.5	55.755225	21.400137		1889.6	54.112768	14.328990
841.0	55.735643	21.422397		1890.8	54.057059	14.303632
841.5	55.762862	21.410079		1892.0	54.150768	14.362229
842.0	55.737059	21.401945		1893.2	54.218622	14.380813
842.5	55.726590	21.376953		1894.4	54.136827	14.319512
843.0	55.726946	21.407797		1895.6	54.177858	14.377822
843.5	55.772823	21.415417		1896.8	54.159280	14.352064
844.0	55.774729	21.380189		1898.0	54.155309	14.357981
844.5	55.781943	21.386459		1899.2	54.193563	14.384924
845.0	55.753464	21.384899		1900.4	54.176114	14.327961
845.5	55.785305	21.370621		1901.6	54.248901	14.375430
846.0	55.661090	21.373986		1902.8	54.276873	14.359036
846.5	55.758449	21.388319		1904.0	54.229962	14.367439
847.0	55.764088	21.362616		1905.2	54.214957	14.353376
847.5	55.848205	21.371074		1906.4	54.258173	14.348990
848.0	55.791793	21.380592		1907.6	54.224072	14.387060
848.5	55.789721	21.390339		1908.8	54.261687	14.372687
849.0	55.782280	21.358928		1910.0	54.261647	14.382535

2450 MHz Head			2450 MHz Body		
Frequency (MHz)	e'	e''	Frequency (MHz)	e'	e''
2410	39.243701	13.434660	2410	51.872750	14.35510
2411	39.221805	13.433311	2411	51.886679	14.396238
2412	39.243867	13.406125	2412	51.901734	14.355985
2413	39.196030	13.370515	2413	51.869692	14.395549
2414	39.194927	13.423079	2414	51.830889	14.361244
2415	39.197382	13.385153	2415	51.907081	14.373592
2416	39.178975	13.418143	2416	51.914606	14.376067
2417	39.167258	13.403356	2417	51.861952	14.346011
2418	39.163122	13.420319	2418	51.853261	14.378530
2419	39.132130	13.379920	2419	51.876561	14.366186
2420	39.164832	13.404093	2420	51.834152	14.403718
2421	39.153802	13.446519	2421	51.846351	14.404743
2422	39.163444	13.439049	2422	51.800365	14.413113
2423	39.109770	13.402235	2423	51.855049	14.421525
2424	39.095467	13.500332	2424	51.805438	14.451111
2425	39.121859	13.503589	2425	51.828738	14.388473
2426	39.121559	13.450975	2426	51.739640	14.419858
2427	39.116358	13.505270	2427	51.700350	14.416219
2428	39.123071	13.476684	2428	51.779799	14.407093
2429	39.117008	13.515476	2429	51.760808	14.437523
2430	39.115579	13.433497	2430	51.761116	14.432052
2431	39.130180	13.482496	2431	51.652177	14.429379
2432	39.133481	13.511023	2432	51.688361	14.443167
2433	39.074375	13.450025	2433	51.676823	14.431303
2434	39.116539	13.415580	2434	51.685493	14.453332
2435	39.015034	13.490192	2435	51.674864	14.411245
2436	39.075928	13.429712	2436	51.702719	14.397523
2437	39.102490	13.441469	2437	51.699493	14.413125
2438	39.082260	13.438462	2438	51.620868	14.426532
2440	39.120424	13.463825	2440	51.633280	14.444326
2441	39.085785	13.458180	2441	51.621804	14.448509
2442	39.117769	13.422813	2442	51.658827	14.448877
2443	39.092608	13.406871	2443	51.592665	14.403905
2444	39.063118	13.400137	2444	51.611067	14.457628
2445	39.025408	13.422397	2445	51.606057	14.433969
2446	39.082355	13.410079	2446	51.673918	14.468173
2447	39.059899	13.401945	2447	51.658073	14.457734
2448	39.040204	13.376953	2448	51.650517	14.474551
2449	39.030574	13.407797	2449	51.697676	14.410357
2450	39.016506	13.415417	2450	51.549500	14.489026
2451	39.025202	13.380189	2451	51.616819	14.439193
2452	38.998422	13.386459	2452	51.531588	14.464046
2453	39.011502	13.384899	2453	51.442101	14.471106
2454	39.035760	13.370621	2454	51.471674	14.446973
2455	39.036068	13.373986	2455	51.456043	14.436610
2456	38.997826	13.388319	2456	51.483802	14.422924
2457	39.031725	13.362616	2457	51.437194	14.456522
2458	39.024268	13.371074	2458	51.422005	14.431261
2459	39.050273	13.380592	2459	51.408225	14.410543
2460	39.031516	13.390339	2460	51.427942	14.419008
2461	39.055655	13.358928	2461	51.429876	14.482062
2462	39.032653	13.367589	2462	51.439857	14.467854

System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

System Verification Setup Block Diagram

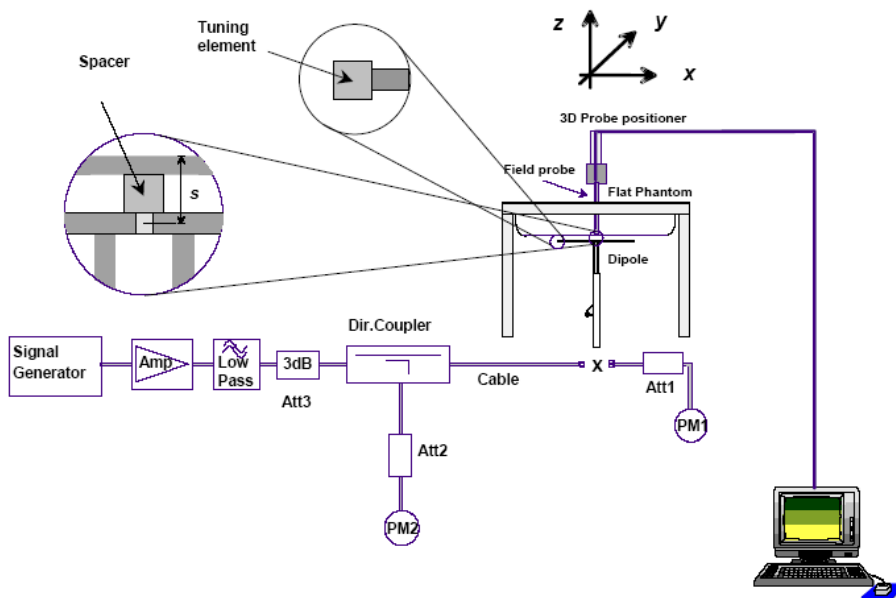

System Accuracy Check Results

Date	Frequency (MHz)	Liquid Type	Measured SAR (W/Kg)	Target Value (W/Kg)	Delta (%)	Tolerance (%)	
2012-01-05	835	Head	1g	9.125	9.590	-4.849	± 10
		Body	1g	9.885	9.684	2.076	± 10
	1900	Head	1g	40.386	39.648	1.860	± 10
		Body	1g	41.124	39.769	3.407	± 10
2012-01-07	2450	Head	1g	54.220	52.667	2.949	± 10
		Body	1g	52.916	52.561	0.675	± 10

*All SAR values are normalized to 1 Watt forward power.

SAR SYSTEM VALIDATION DATA**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****System Performance Check 835MHz Head Liquid****Dipole 835 MHz; Type: ALS-D-835-S-2; S/N: 180-00558**

Product Data

Device Name : Dipole 835 MHz
Serial No. : 180-00558
Type : Dipole
Model : ALS-D-835-S-2
Frequency : 835.00 MHz
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 10.042 W/kg
Power Drift-Finish : 9.810 W/kg
Power Drift (%) : -1.632

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Default
Phantom Data

Tissue Data

Type : HEAD
Serial No. : 270-01002
Frequency : 835.00 MHz
Last Calib. Date : 05-Jan-2012
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 42.62 F/m
Sigma : 0.93 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Jul-2012
Frequency : 835.00 MHz
Duty Cycle Factor : 1
Conversion Factor : 6.6
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 21.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 9.125 W/kg
10 gram SAR value : 5.902 W/kg
Area Scan Peak SAR : 9.532 W/kg
Zoom Scan Peak SAR : 14.603 W/kg

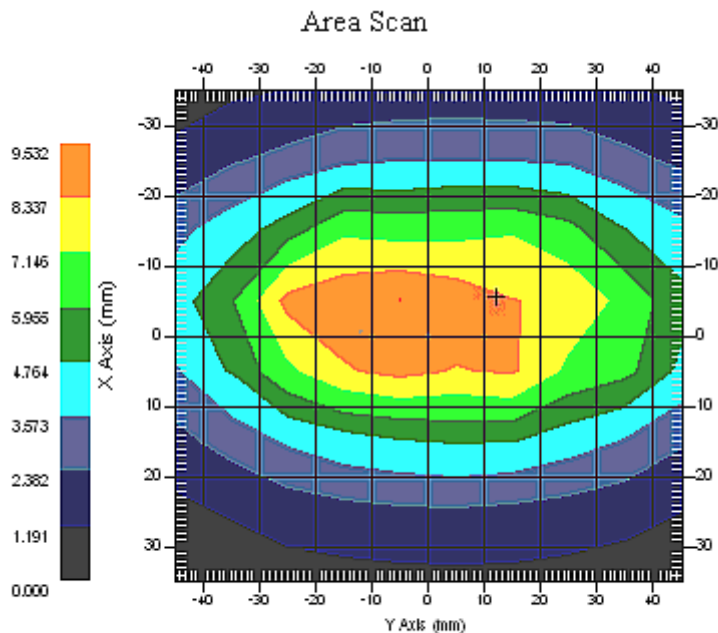

835 MHz System Validation with Head Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 835MHz Body Liquid****Dipole 835 MHz; Type: ALS-D-835-S-2; S/N: 180-00558**

Product Data

Device Name : Dipole 835 MHz
Serial No. : 180-00558
Type : Dipole
Model : ALS-D-835-S-2
Frequency : 835.00 MHz
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 9.340 W/kg
Power Drift-Finish : 9.682 W/kg
Power Drift (%) : 1.880

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Default
Phantom Data

Tissue Data

Type : Body
Serial No. : 270-02101
Frequency : 835.00 MHz
Last Calib. Date : 05-Jan-2012
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 55.69 F/m
Sigma : 0.98 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Jul-2011
Frequency : 835.00 MHz
Duty Cycle Factor : 1
Conversion Factor : 6.6
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 21.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 9.885 W/kg
10 gram SAR value : 6.472 W/kg
Area Scan Peak SAR : 10.054 W/kg
Zoom Scan Peak SAR : 15.362 W/kg

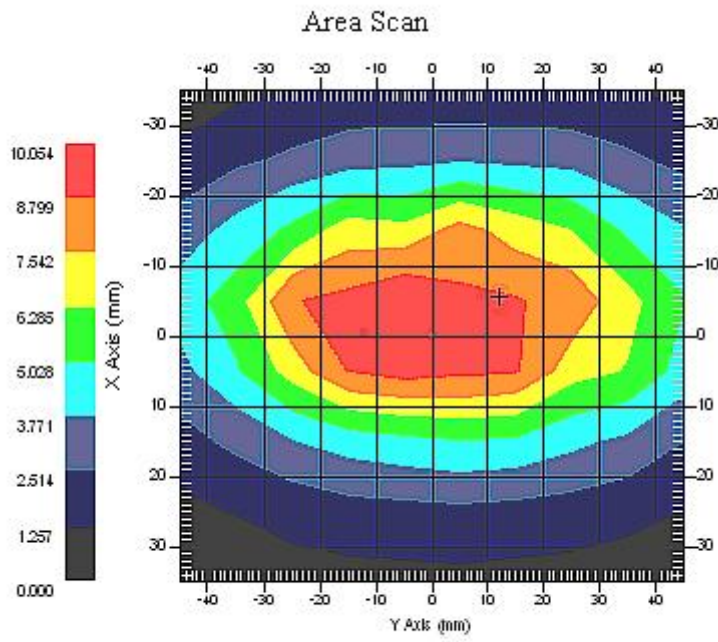

835 MHz System Validation with Body Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 1900 Head****Dipole 1900 MHz; Type: ALS-D-1900-S-2; S/N: 210-00710**

Product Data

Device Name : Dipole 1900MHz
Serial No. : 210-00710
Type : Dipole
Model : ALS-D-1900-S-2
Frequency : 1900.00 MHz
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 42.850 W/kg
Power Drift-Finish : 42.134 W/kg
Power Drift (%) : -1.535

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : HEAD
Serial No. : 295-01103
Frequency : 1900.00 MHz
Last Calib. Date : 05-Jan-2012
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 40.12 F/m
Sigma : 1.46 S/m
Density : 1000.00 kg/cu. M


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Jul-2011
Frequency : 1900.00 MHz
Duty Cycle Factor : 1
Conversion Factor : 5.20
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 20.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 40.386 W/kg
10 gram SAR value : 20.487 W/kg
Area Scan Peak SAR : 41.678 W/kg
Zoom Scan Peak SAR : 76.726 W/kg

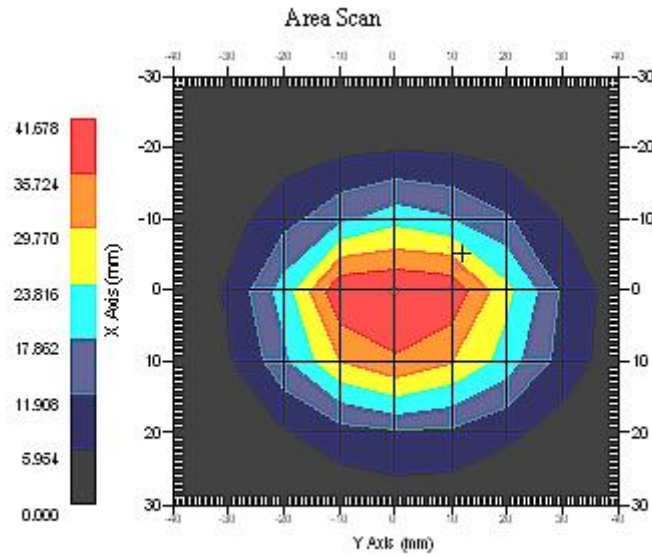

1900 MHz System Validation with Head Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 1900 Body****Dipole 1900 MHz; Type: ALS-D-1900-S-2; S/N: 210-00710**

Product Data

Device Name : Dipole 1900MHz
Serial No. : 210-00710
Type : Dipole
Model : ALS-D-1900-S-2
Frequency : 1900.00 MHz
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 41.682 W/kg
Power Drift-Finish : 41.158 W/kg
Power Drift (%) : -1.350

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : Body
Serial No. : 295-02102
Frequency : 1900.00 MHz
Last Calib. Date : 05-Jan-2012
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 54.18 F/m
Sigma : 1.51 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Jul-2011
Frequency : 1900.00 MHz
Duty Cycle Factor : 1
Conversion Factor : 5.0
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 41.124 W/kg
10 gram SAR value : 21.503 W/kg
Area Scan Peak SAR : 42.820 W/kg
Zoom Scan Peak SAR : 76.842 W/kg

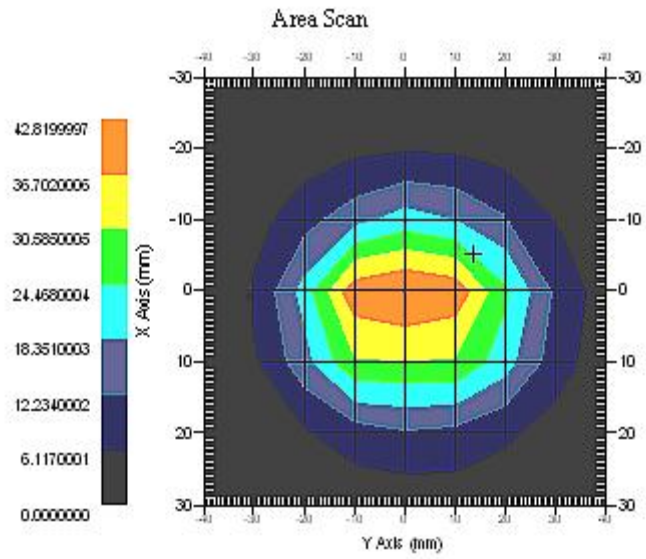

1900 MHz System Validation with Body Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 2450 MHz Head Liquid****Dipole 2450 MHz; Type: ALS-D-2450-S-2; S/N: 220-00758**

Product Data

Device Name : Dipole 2450MHz
Serial No. : 220-00758
Type : Dipole
Model : ALS-D-2450-S-2
Frequency : 2450 MHz
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 65.387 W/kg
Power Drift-Finish : 67.808 W/kg
Power Drift (%) : 3.702

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : Head
Serial No. : 290-01109
Frequency : 2450 MHz
Last Calib. Date : 07-Jan-2012
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 50.00 RH%
Epsilon : 39.10 F/m
Sigma : 1.81 S/m
Density : 1000.00 kg/cu. M


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Jul-2011
Frequency : 2450 MHz
Duty Cycle Factor : 1
Conversion Factor : 4.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 20.00 °C
Area Scan : 7x7x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 54.220 W/kg
10 gram SAR value : 22.003 W/kg
Area Scan Peak SAR : 58.362 W/kg
Zoom Scan Peak SAR : 122.105 W/kg

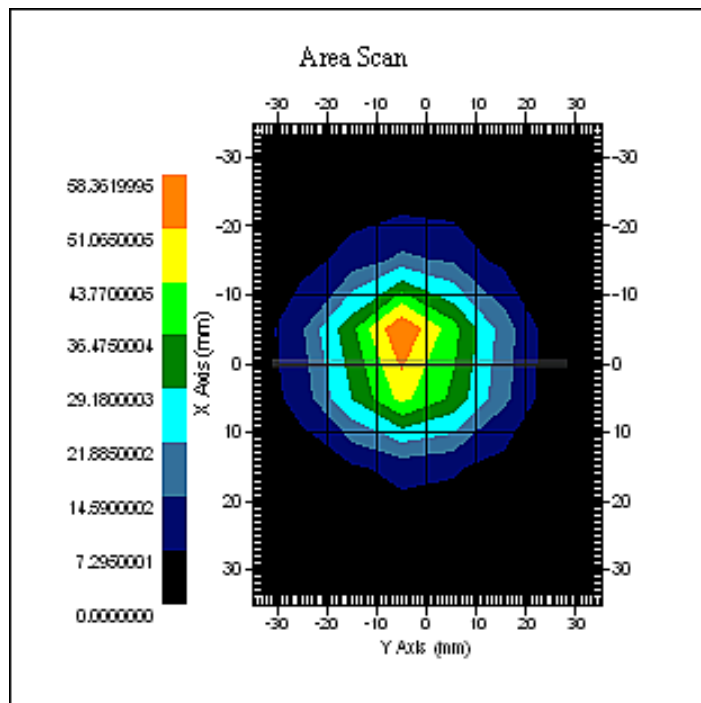

2450 MHz System Validation

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 2450 MHz Body Liquid****Dipole 2450 MHz; Type: ALS-D-2450-S-2; S/N: 220-00758**

Product Data

Device Name : Dipole 2450MHz
Serial No. : 220-00758
Type : Dipole
Model : ALS-D-2450-S-2
Frequency : 2450 MHz
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 18.642 W/kg
Power Drift-Finish : 18.579 W/kg
Power Drift (%) : -1.154

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Size (mm) : 280 x 280 x 200
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : BODY
Serial No. : 290-01109
Frequency : 2450 MHz
Last Calib. Date : 07-Jan-2012
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 50.00 RH%
Epsilon : 51.70 F/m
Sigma : 1.96 S/m
Density : 1000.00 kg/cu. M


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 14-Jul-2011
Frequency : 2450 MHz
Duty Cycle Factor : 1
Conversion Factor : 4.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 20.00 °C
Area Scan : 7x7x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 52.916 W/kg
10 gram SAR value : 25.333 W/kg
Area Scan Peak SAR : 54.068 W/kg
Zoom Scan Peak SAR : 98.600 W/kg

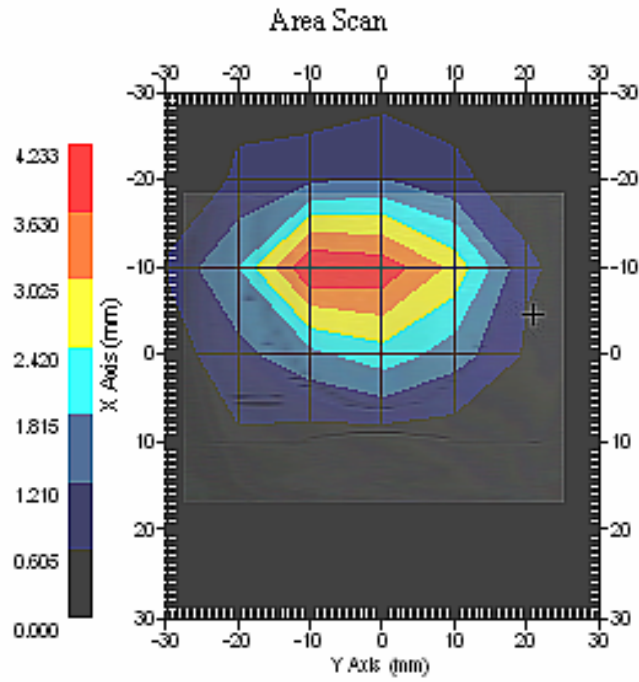


2450 MHz System Validation

EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person’s Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point”. The “test device reference point” should be located at the same level as the center of the earpiece region. The “vertical centerline” should bisect the front surface of the handset at its top and bottom edges. A “ear reference point” is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the “phantom reference plane” defined by the three lines joining the center of each “ear reference point” (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”. This is called the “initial ear position”. While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

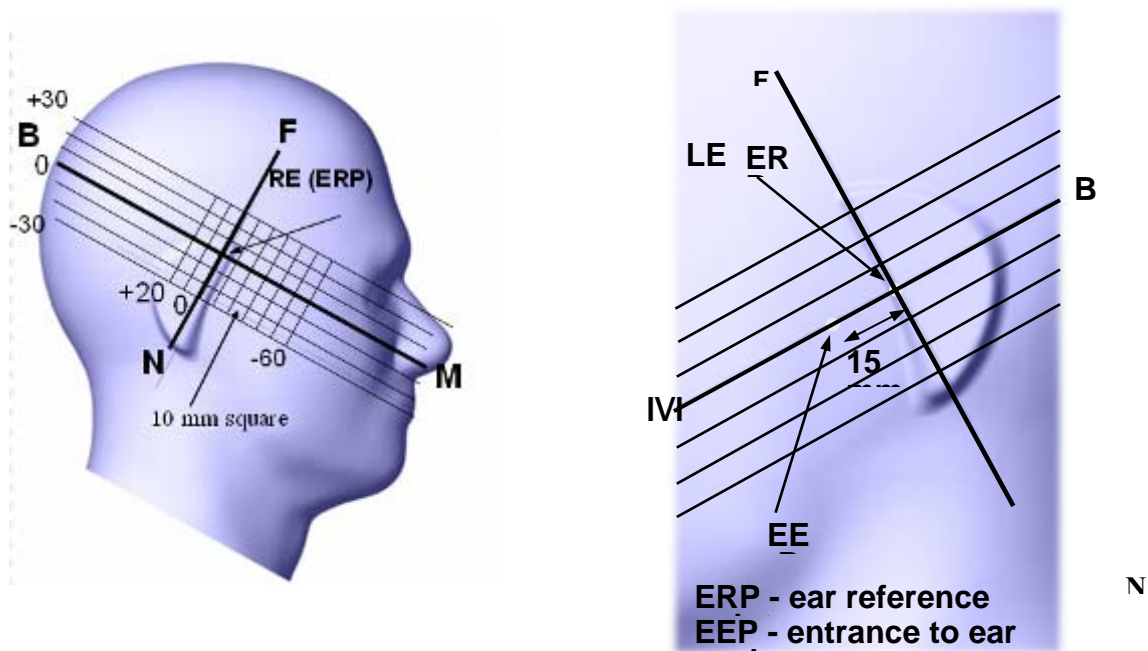

Cheek/Touch Position


The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.

This test position is established:

- When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek /Touch Position

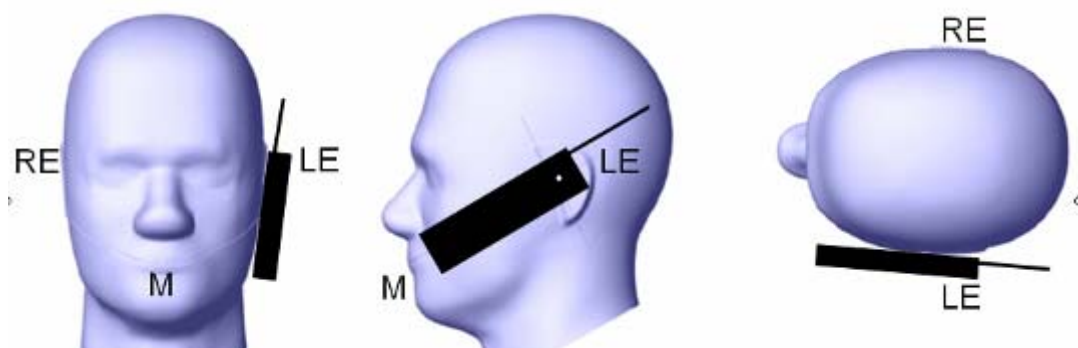

Ear/Tilt Position


With the handset aligned in the “Cheek/Touch Position”:

1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.

2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15° to 80° . After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tile/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

Ear /Tilt 15° Position

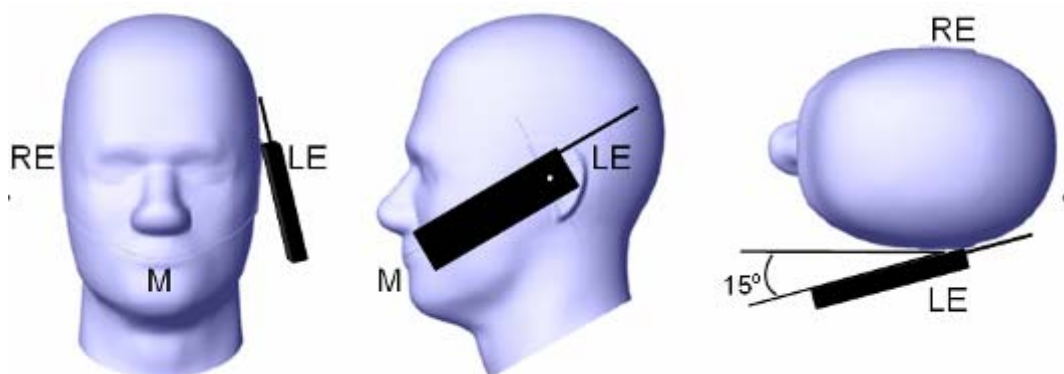

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or EUT and the horizontal grid spacing was 10 mm x 10 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 35 mm x 35 mm x 35 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.


CONDUCTED OUTPUT POWER MEASUREMENT

Provision Applicable


The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

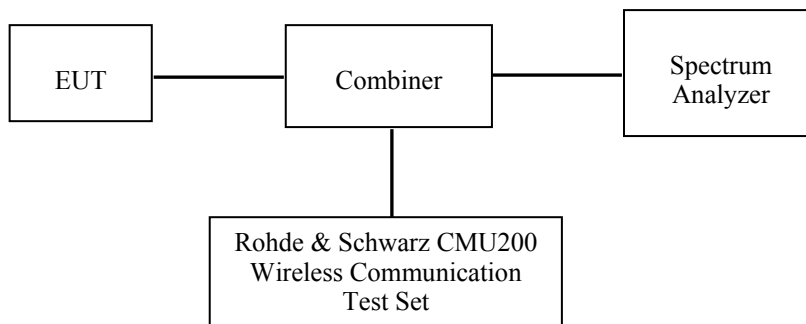

GSM



WiFi

Test Results:

GSM

Band	Frequency (MHz)	Conducted Output Power	
		GSM (dBm)	GSM (W)
Cellular	824.2	32.24	1.675
	836.6	32.14	1.637
	848.8	32.03	1.596
PCS	1850.2	29.19	0.830
	1880.0	29.30	0.851
	1909.8	29.15	0.822

GPRS

Mode	Channel No	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
Cellular	128	824.2	32.20	31.76	29.90	29.11
	190	836.6	32.08	31.70	29.76	29.07
	251	848.8	32.01	31.62	29.87	28.98
PCS	512	1850.2	29.08	28.22	26.57	25.74
	661	1880.0	29.13	28.39	26.71	25.87
	810	1909.8	29.06	28.20	26.57	25.77

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

The time based average power

Mode	Channel No	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
Cellular	128	824.2	23.20	25.76	25.65	26.11
	190	836.6	23.08	25.70	25.51	26.07
	251	848.8	23.01	25.62	25.62	25.98
PCS	512	1850.2	20.08	22.22	22.32	22.74
	661	1880.0	20.13	22.39	22.46	22.87
	810	1909.8	20.06	22.20	22.32	22.77

Note:

The maximum RF output power is in 4 slots GPRS mode, and the body SAR testing is under this mode and the maximum power level.

WiFi

Mode	Frequency (MHz)	Conducted Output Power	
		(dBm)	(Watt)
WIFI(802.11b)	2412	15.96	0.039
	2437	16.07	0.040
	2462	16.05	0.040
WIFI(802.11g)	2412	12.89	0.019
	2437	12.62	0.018
	2462	12.80	0.019

Note:

KDB248227-SAR is not required for 802.11g channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.


The output power was tested under data rate 1Mbps for 802.11b.

SAR SIMULTANEOUS TRANSMISSION EVALUATION

KDB648474 SIMULTANEOUS TRANSMISSION CONSIDERATION

Stand-alone and simultaneous SAR evaluation for a cell phone with multiple transmitters is base on the antennas distance of each radio.

GPS, WiFi, BT and GSM Antenna Location:

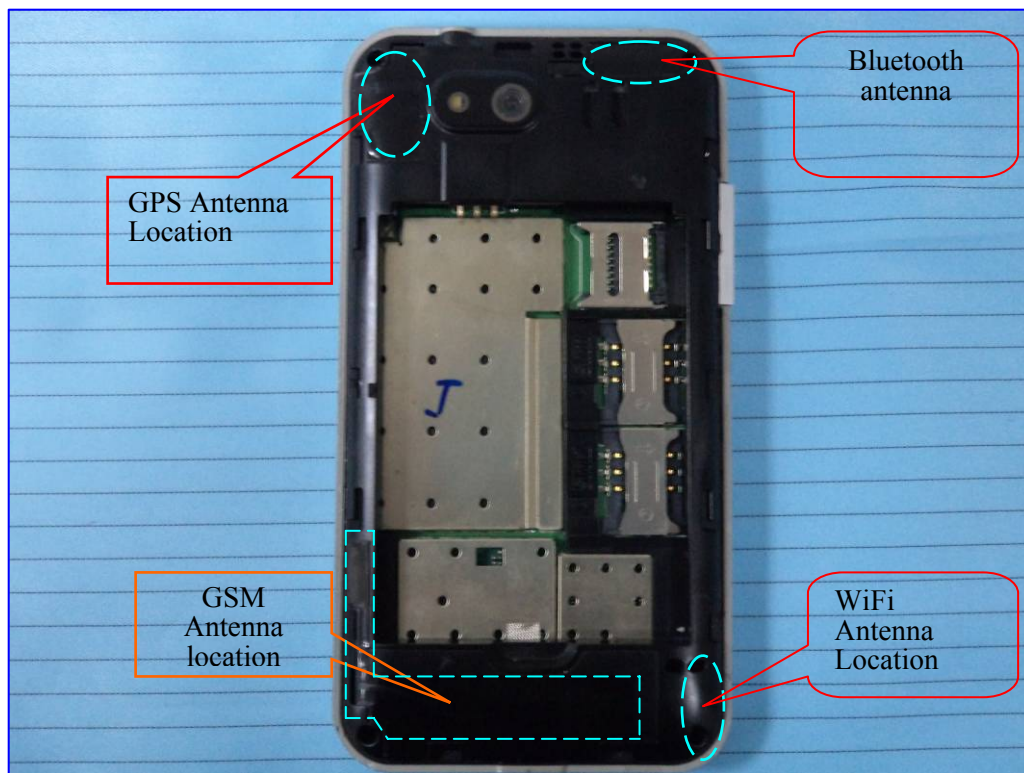

CONCLUSION:

Individual transmitter	Stand-alone SAR	Simultaneous SAR
Bluetooth	Not required	Not required
GSM	Required	Simultaneous SAR of Bluetooth and GSM is not required
WiFi	Required	Simultaneous SAR of WiFi and GSM is not required

Note:

- 1) GSM can transmit simultaneously with Bluetooth or WiFi antenna.
- 2) The distance between BT and GSM antenna is 7.1cm > 5cm, BT and WiFi antenna is 9.1cm>5cm.The max output power of Bluetooth antenna is 8.15dBm (6.53 mW) < 2P_{Ref} (24mW) .According to KDB648474, stand-alone SAR is not required for BT antenna and simultaneous SAR evaluation is not required for Bluetooth with GSM or WiFi antenna.

- 3) The distance between WiFi and GSM antenna is $0.2\text{cm} < 2.5\text{cm}$. The max output power of WiFi antenna is $16.07\text{dBm}(40.45\text{mW}) > P_{\text{Ref}}(12\text{mW})$. The max SAR of GSM is 1.270W/Kg , the max SAR of WiFi is 0.216W/Kg . According to KDB648474, stand-alone SAR is required for WiFi antenna and simultaneous SAR evaluation is not required for WiFi with GSM antenna.
- 4) P_{Ref} is defined as the maximum conducted power available at the antenna according to source-based time-averaging requirements of Section 2.1093(d)(5).

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	21° C
Relative Humidity:	50%
ATM Pressure:	1002 mbar

* Testing was performed by Sandy Wang on 2011-12-05---2011-12-07.

Cellular Band:

EUT Position	Frequency (MHz)		Test Mode	Antenna Type	Liquid Type	FCC 1g SAR (W/Kg)	
	Channel	MHz				Measurement	Limit
Left Head Cheek	128(Low)	824.2	GSM	Integral	Head	0.313	1.6
	190(Middle)	836.6	GSM	Integral	Head	\	1.6
	251(High)	848.8	GSM	Integral	Head	\	1.6
Left Head Tilt	128(Low)	824.2	GSM	Integral	Head	0.136	1.6
	190(Middle)	836.6	GSM	Integral	Head	\	1.6
	251(High)	848.8	GSM	Integral	Head	\	1.6
Right Head Cheek	128(Low)	824.2	GSM	Integral	Head	0.274	1.6
	190(Middle)	836.6	GSM	Integral	Head	\	1.6
	251(High)	848.8	GSM	Integral	Head	\	1.6
Right Head Tilt	128(Low)	824.2	GSM	Integral	Head	0.143	1.6
	190(Middle)	836.6	GSM	Integral	Head	\	1.6
	251(High)	848.8	GSM	Integral	Head	\	1.6
Body-Worn-Headset	128(Low)	824.2	GSM	Integral	Body	\	1.6
	190(Middle)	836.6	GSM	Integral	Body	0.316	1.6
	251(High)	848.8	GSM	Integral	Body	\	1.6
Body-Worn Back	128(Low)	824.2	GPRS	Integral	Body	0.973	1.6
	190(Middle)	836.6	GPRS	Integral	Body	1.143	1.6
	251(High)	848.8	GPRS	Integral	Body	1.207	1.6

Note:

1. Left Head Cheek is the worst case mode.

PCS Band:

EUT Position	Frequency (MHz)		Test Mode	Antenna Type	Liquid Type	FCC 1g SAR (W/Kg)	
	Channel	MHz				Measurement	Limit
Left Head Cheek	512(Low)	1850.2	GSM	Integral	Head	\	1.6
	661(Middle)	1880.0	GSM	Integral	Head	0.393	1.6
	810(High)	1909.8	GSM	Integral	Head	\	1.6
Left Head Tilt	512(Low)	1850.2	GSM	Integral	Head	\	1.6
	661(Middle)	1880.0	GSM	Integral	Head	0.208	1.6
	810(High)	1909.8	GSM	Integral	Head	\	1.6
Right Head Cheek	512(Low)	1850.2	GSM	Integral	Head	\	1.6
	661(Middle)	1880.0	GSM	Integral	Head	0.409	1.6
	810(High)	1909.8	GSM	Integral	Head	\	1.6
Right Head Tilt	512(Low)	1850.2	GSM	Integral	Head	\	1.6
	661(Middle)	1880.0	GSM	Integral	Head	0.217	1.6
	810(High)	1909.8	GSM	Integral	Head	\	1.6
Body-Worn-Headset	512(Low)	1850.2	GSM	Integral	Body	\	1.6
	661(Middle)	1880.0	GSM	Integral	Body	0.641	1.6
	810(High)	1909.8	GSM	Integral	Body	\	1.6
Body-Worn Back	512(Low)	1850.2	GPRS	Integral	Body	1.167	1.6
	661(Middle)	1880.0	GPRS	Integral	Body	1.039	1.6
	810(High)	1909.8	GPRS	Integral	Body	1.262	1.6

Note:

1. Right Head Cheek is the worst case mode.
2. The EUT is a Class B mobile phone which can be attached to both GPRS and GSM services, using one service at a time.
3. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1 DL+4UL is the worse case.
4. The EUT transmit and receive through the same GSM antenna while testing SAR.

802.11b:

EUT Position	Frequency (MHz)		Antenna Type	10g SAR Value (W/Kg)	CE Limit (W/Kg)
	Channel	MHz			
Left Head	6	2437	Integral	0.047	1.6
Right Head	6	2437	Integral	0.040	1.6
Position A	6	2437	Integral	0.151	1.6
Position B	6	2437	Integral	0.178	1.6
Position C	6	2437	Integral	0.216	1.6
Position D	6	2437	Integral	0.193	1.6

- Note:**
1. Position C is the worst case mode.
 2. Position A: EUT left side touch the flat phantom.
 3. Position B: EUT Bottom side touch the flat phantom.
 4. Position C: EUT back side touch the flat phantom.
 5. Position D: EUT front side touch the flat phantom.
 6. The antenna location is showed on the appendix E.
 7. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
 8. The SAR testing is conducted with 100% duty cycle factor.

EUT SCAN RESULTS

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head Cheek (835 MHz Low Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 13x9x1: Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.009 W/kg
 Power Drift-Finish : 0.009 W/kg
 Power Drift (%) : -0.255

Tissue Data


Type : HEAD
 Frequency : 835.00 MHz
 Epsilon : 42.62 F/m
 Sigma : 0.93 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency : 835.00 MHz
 Duty Cycle Factor : 8
 Conversion Factor : 6.6
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.313 W/kg
 10 gram SAR value : 0.173 W/kg
 Area Scan Peak SAR : 0.340 W/kg
 Zoom Scan Peak SAR : 0.570 W/kg

Plot 1#

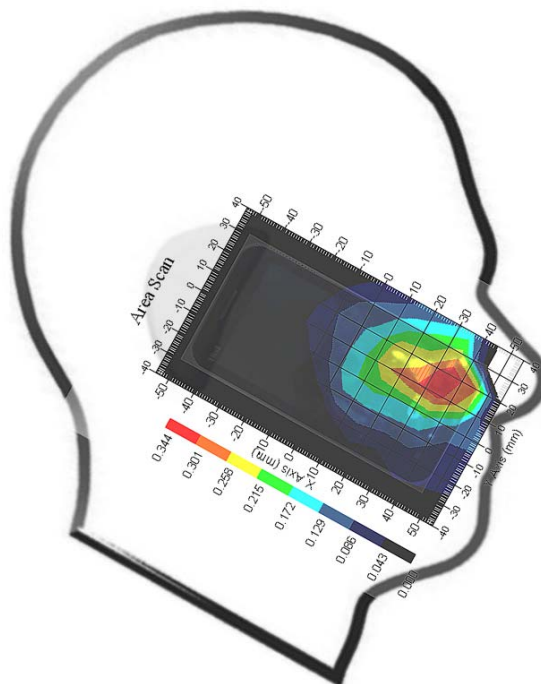

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Left Head Tilt (835 MHz Low Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 13x9x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.030 W/kg
 Power Drift-Finish : 0.031 W/kg
 Power Drift (%) : 3.342

Tissue Data


Type : HEAD
 Frequency : 835.00 MHz
 Epsilon : 42.62 F/m
 Sigma : 0.93 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency : 835.00 MHz
 Duty Cycle Factor : 8
 Conversion Factor : 6.6
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.136 W/kg
 10 gram SAR value : 0.091 W/kg
 Area Scan Peak SAR : 0.148 W/kg
 Zoom Scan Peak SAR : 0.220 W/kg

Plot 2#

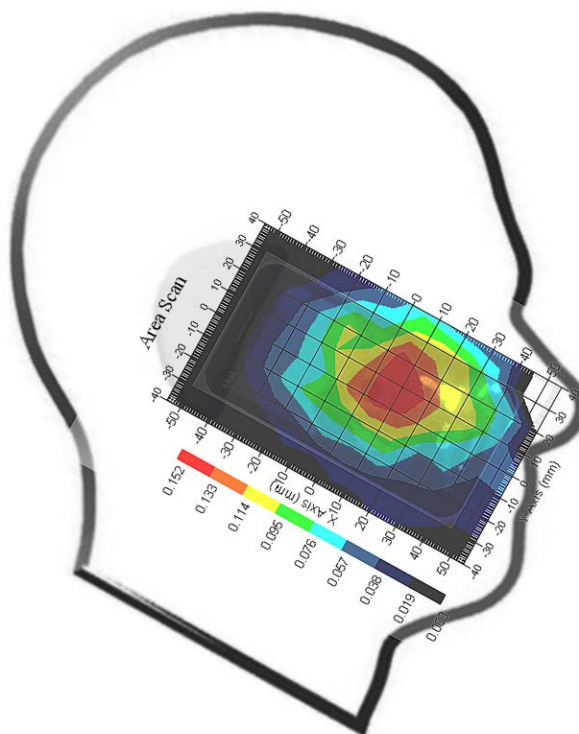

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Right Head Cheek (835 MHz Low Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 13x9x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.016 W/kg
 Power Drift-Finish : 0.015 W/kg
 Power Drift (%) : -1.257

Tissue Data


Type : HEAD
 Frequency : 835.00 MHz
 Epsilon : 42.62 F/m
 Sigma : 0.93 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency : 835.00 MHz
 Duty Cycle Factor : 8
 Conversion Factor : 6.6
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.274 W/kg
 10 gram SAR value : 0.143 W/kg
 Area Scan Peak SAR : 0.255 W/kg
 Zoom Scan Peak SAR : 0.390 W/kg

Plot 3#

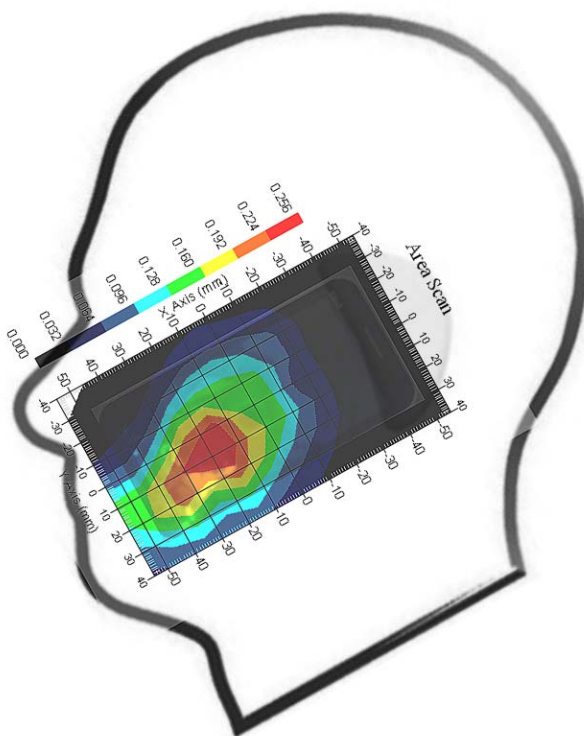

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)

Right Head Tilt (835 MHz Low Channel)

Measurement Data

Test mode : GSM
 Crest Factor : 8
 Scan Type : Complete
 Area Scan : 13x9x1 : Measurement x=10mm, y=10mm, z=4mm
 Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
 Power Drift-Start : 0.026 W/kg
 Power Drift-Finish : 0.027 W/kg
 Power Drift (%) : 4.234

Tissue Data

Type : HEAD
 Frequency : 835.00 MHz
 Epsilon : 42.62 F/m
 Sigma : 0.93 S/m
 Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
 Frequency : 835.00 MHz
 Duty Cycle Factor : 8
 Conversion Factor : 6.6
 Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
 Compression Point : 95.00 mV
 Offset : 1.56 mm

1 gram SAR value : 0.143 W/kg
 10 gram SAR value : 0.096 W/kg
 Area Scan Peak SAR : 0.163 W/kg
 Zoom Scan Peak SAR : 0.210 W/kg

Plot 4#

