

FCC ID: YQ7TN-M18-IOL / YQ7TN-M30-IOL

## **5 TEST CONDITIONS AND RESULTS**

### **5.1 Conducted emissions**


For test instruments and accessories used see section 6 Part A 4.

#### **5.1.1 Description of the test location**


Test location:                      Shielded Room S2

#### **5.1.2 Photo documentation of the test set-up**

TN-M30-IOL-H1141:

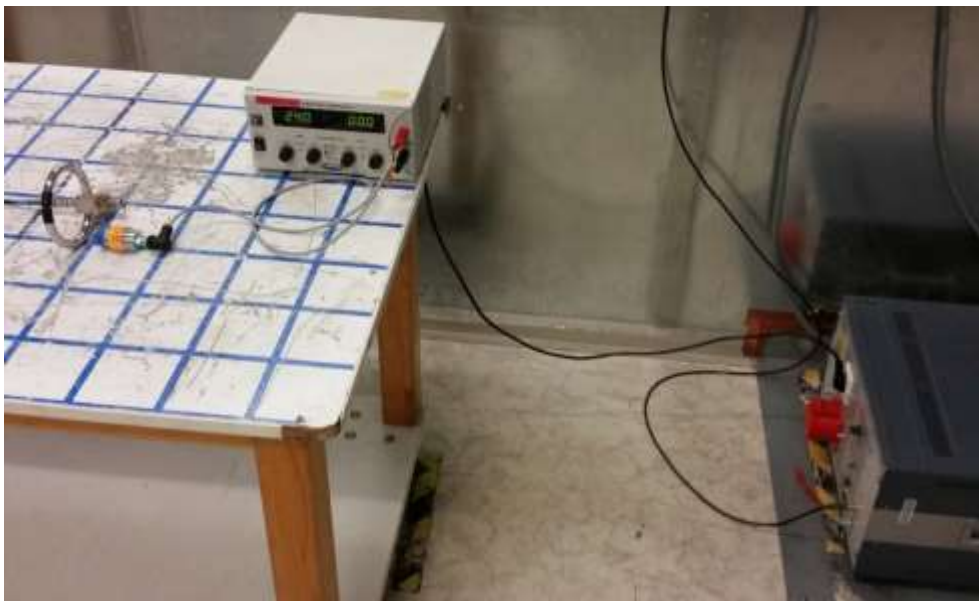

TN-M18-IOL-H1141:

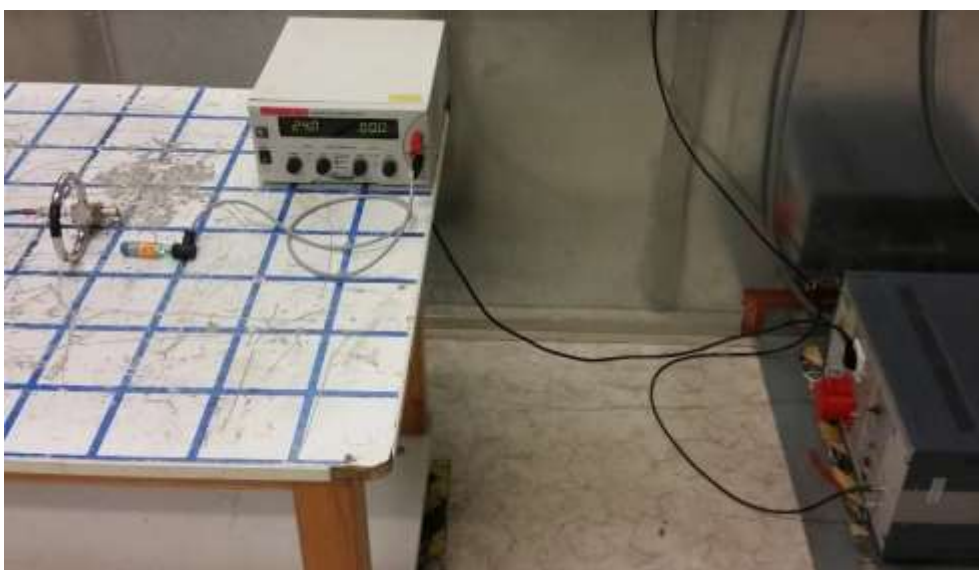

**FCC ID: YQ7TN-M18-IOL / YQ7TN-M30-IOL****5.2 Field strength of the fundamental wave**

For test instruments and accessories used see section 6 Part CPR 1.

**5.2.1 Description of the test location**

Test location: OATS1

Test distance: 3 metres

**5.2.2 Photo documentation of the test set-up**

TN-M30-IOL-H1141:



TN-M18-IOL-H1141:



**FCC ID: YQ7TN-M18-IOL / YQ7TN-M30-IOL****5.3 Spurious emissions**

For test instruments and accessories used see section 6 Part SER 1, SER 2.

**5.3.1 Description of the test location**

Test location: OATS1

Test distance: 3 metres

**5.3.2 Photo documentation of the test set-up**

TN-M30-IOL-H1141:



TN-M18-IOL-H1141:




**FCC ID: YQ7TN-M18-IOL / YQ7TN-M30-IOL**

TN-M30-IOL-H1141:



TN-M18-IOL-H1141:

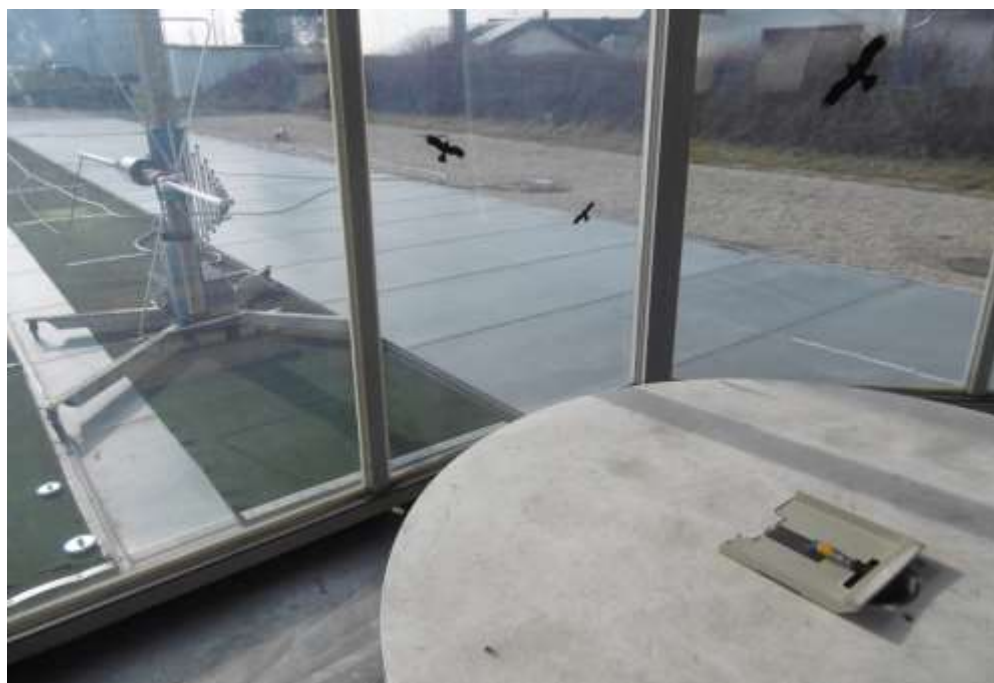



## FCC ID: YQ7TN-M18-IOL / YQ7TN-M30-IOL


### 5.4 Frequency tolerance

For test instruments and accessories used see section 6 Part FE.

#### 5.4.1 Description of the test location

Test location: AREA4 (Climatic Chamber)

#### 5.4.2 Photo documentation of the test set-up

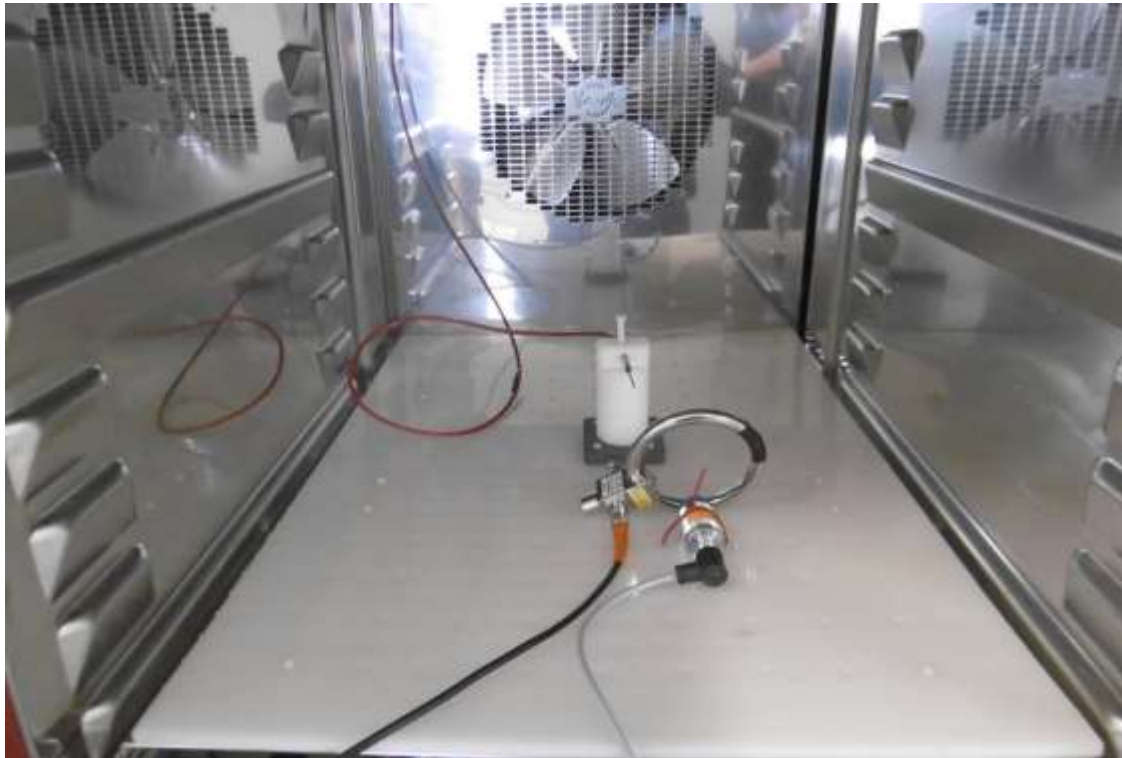

#### 5.4.3 Applicable standard

According to FCC Part 15, Section 15.225(e):

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature range of  $-20\text{ }^{\circ}\text{C}$  to  $+50\text{ }^{\circ}\text{C}$  at normal supply voltage and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of  $20\text{ }^{\circ}\text{C}$ . For battery operated equipment, the equipment shall be performed using a new battery.

#### 5.4.4 Description of Measurement

The frequency tolerance has been measured radiated using a spectrum analyser. The center frequency of the spectrum analyser has been set to the fundamental frequency. This is an alternative test method because the EuT can not be operated in un-modulated mode. The limit line was set to 10 dB below the carrier. The frequencies of the upper ( $f_U$ ) and lower ( $f_L$ ) points, where the displayed power envelope of the modulation including frequency drift is equal to the appropriate level, have been recorded. The centre frequency is calculated as  $f_C = (f_U + f_L)/2$ . The measurement has been performed at normal and extreme test conditions from  $-20\text{ }^{\circ}\text{C}$  to  $+50\text{ }^{\circ}\text{C}$  in steps of 10 degrees (According to FCC Part 2.1055).

**FCC ID: YQ7TN-M18-IOL / YQ7TN-M30-IOL****5.5 20 dB Bandwidth**

For test instruments and accessories used see section 6 Part MB.

**5.5.1 Description of the test location**

Test location: AREA4

**5.5.2 Photo documentation of the test set-up**

TN-M30-IOL-H1141:



TN-M18-IOL-H1141:



## FCC ID: YQ7TN-M18-IOL / YQ7TN-M30-IOL


### 5.6 Transmitter spectrum mask

For test instruments and accessories used see section 6 Part MB.

#### 5.6.1 Description of the test location

Test location: AREA4

#### 5.6.2 Photo documentation of the test set-up

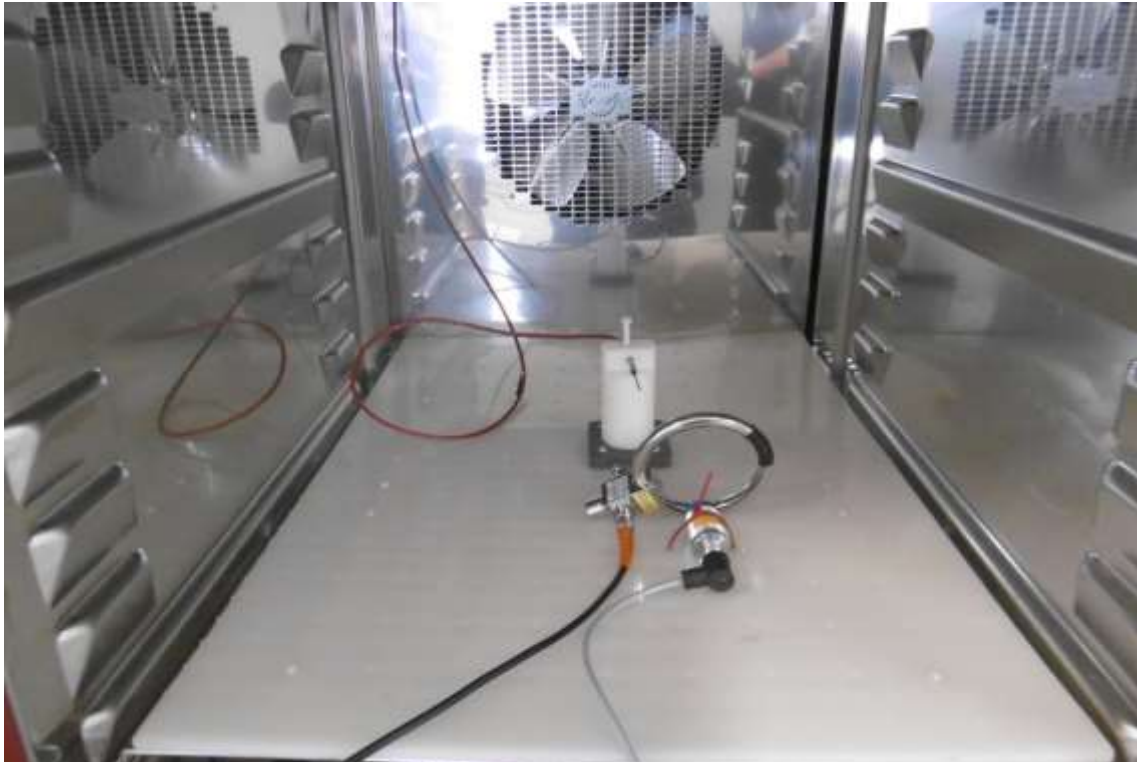

#### 5.6.3 Applicable standard

According to FCC Part 15C, Section 15.225 (a-d):

The field strength of any emission shall not exceed the limits given in FCC Part 15C, Section 15.225 (a-d)