
RF Test Report

Test in accordance with
Federal Communications Commission(FCC)
CFR TITLE 47, Parts 2, 22, 24

Product Name : GPS Locator
Model No. : GMT100
FCC ID : YQD-GMT100

Applicant : Queclink Wireless Solutions Co.,Ltd
Address : Room 501, Building 9, No.99 Tianzhou Road,
Shanghai, China

Date of Receipt : 2014-03-25
Test Date : 2014-03-25~2014-04-04
Issued Date : 2014-04-08
Report No. : UL12620140325FCC010-2
Report Version : V1.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

The test report shall not be reproduced except in full without the written approval of SIMT.

Test Report Certification

Issued Date : 2014-04-08
Report No. : UL12620140325FCC010-2

Product Name : GPS Locator
Applicant : Queclink Wireless Solutions Co.,Ltd
Address : Room 501, Building 9, No.99 Tianzhou Road, Shanghai, China
Manufacturer : Queclink Wireless Solutions Co.,Ltd.
Address : Room 501, Building 9, No.99 Tianzhou Road, Shanghai, China
Model No. : GMT100
EUT Voltage : MIN: 8V, NOR: 12V/24V, MAX: 32V
Brand Name : Queclink
FCC ID: YQD-GMT100
Applicable Standard : ANSI/TIA-603-D-2010; FCC CFR Title 47 Part 2;
FCC CFR Title 47 Part 22 Subpart H;
FCC CFR Title 47 Part24 Subpart E;
Test Result : Complied
Performed Location : Unilab (Shanghai) Co., Ltd.
FCC 2.948 register number is 714465
No. 1350, Lianxi Rd. Pudong New District, Shanghai, China
TEL: +86-21-50275125 FAX: +86-21-50277862

Documented By :

Andy Wei
(Technical Engineer: Andy Wei)

Reviewed By :

Forest Cao
(Senior Engineer: Forest Cao)

Approved By :

Eva Wang
(Supervisor: Eva Wang)

TABLE OF CONTENTS

SUMMARY OF TEST RESULT	4
1. General Information	5
1.1. EUT Description	5
1.2. Mode of Operation	6
1.3. Tested System Details	6
1.4. Configuration of Tested System.....	7
1.5. EUT Exercise Software	7
2. Technical Test.....	8
2.1. Test Environment	8
3. Peak Output Power	9
3.1. Test Equipment	9
3.2. Test Setup	9
3.3. Limit.....	10
3.4. Test Procedure	11
3.5. Uncertainty	11
3.6. Test Result	12
4. Occupied Bandwidth	17
4.1. Test Equipment	17
4.2. Test Setup	17
4.3. Limit.....	18
4.4. Test Procedure	18
4.5. Uncertainty	18
4.6. Test Result	19
5. Spurious Emission At Antenna Terminals (+/- 1MHz)	35
5.1. Test Equipment	35
5.2. Test Setup	35
5.3. Limit.....	35
5.4. Test Procedure	35
5.5. Uncertainty	35
5.6. Test Result	36
6. Spurious Emission.....	44
6.1. Test Equipment	44
6.2. Test Setup	45
6.3. Limit.....	46
6.4. Test Procedure	46
6.5. Uncertainty	47
6.6. Test Result	47
7. Frequency Stability Under Temperature & Voltage Variations.....	68
7.1. Test Equipment	68
7.2. Test Setup	68
7.3. Limit.....	68
7.4. Test Procedure	69
7.5. Uncertainty	69
7.6. Test Result	70
8. Attachment.....	78

SUMMARY OF TEST RESULT

Report Section	FCC CFR 47	Description	Limit	Result
3	part2.1046	Conducted Output Power	N/A	PASS
3	part 22.913(a)(2)	Effective Radiated Power	<7 Watts	PASS
3	part 24.232(c)	Equivalent Isotropic Radiated Power	<2 Watts	PASS
4	part 2.1046	Modulation Characteristic	N/A	PASS
5	part 2.1049 part 22.917(a) part 24.238(a)	Occupied Bandwidth	N/A	PASS
6	part 2.1051 part 22.917(a) part 24.238(a)	Band Edge Measurement	<43+10lg(P[Watts])	PASS
7	part 2.1051 part 22.917(a) part 24.238(a)	Conducted Spurious Emission	<43+10lg(P[Watts])	PASS
7	part 2.1053 part 22.917(a) part 24.238(a)	Field Strength of Spurious Radiation	<43+10lg(P[Watts])	PASS
8	part 2.1055 part 22.355 part 24.235	Frequency Stability for Temperature & Voltage	<2.5 ppm	PASS

1.General Information

1.1. EUT Description

Product Name:	GPS Locator
Model Name:	GMT100
Hardware Version:	V1.06
Software Version:	GMT100R00A07V08M128_NMX
RF Exposure Environment:	Uncontrolled
GSM/ GPRS	
Support Band:	GSM850/PCS1900
GPRS Class:	10
Tx Frequency Range:	GSM850: 824.2MHz to 848.8MHz PCS1900: 1850.2MHz to 1909.8MHz
Rx Frequency Range:	GSM850: 869.2MHz to 893.8MHz PCS1900: 1930.2MHz to 1989.8MHz
Type of modulation:	GSM/GPRS for GMSK
Antenna Type:	Internal
Antenna Peak Gain:	GSM850: -3dBi PCS1900: -1dBi

1.2. Mode of Operation

SIMT has verified the construction and function in typical operation. EUT is inlink mode with base station emulator at maximum power level. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode		
Band	Radiated TCs	Conducted TCs
GSM850	GSM Link GPRS 8 Link	GSM Link GPRS 8 Link
PCS1900	GSM Link GPRS 8 Link	GSM Link GPRS 8 Link

1. Regards to the frequency band operation: the lowest、middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. The maximum power levels are GSM and GPRS multi-slot class 8 mode for GMSK link
3. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst (Z axis) result on this report.
4. This device is a composite device in accordance with Part 15 Subpart B regulations. The report number is UL12620140325FCC010-2

The conducted power table is as follows:

Conducted Power (Unit: dBm)						
Band	GSM850			PCS1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	33.69	33.57	33.43	30.36	29.96	29.39
GPRS 8	33.68	33.56	33.42	30.22	29.79	29.26
GPRS 10	33.27	33.15	33.04	30.13	29.76	29.23


1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model	Serial No.	Power Cord
1 Agilent8960	Agilent	E5515C	GB46581718	N/A

1.4. Configuration of Tested System

Connection Diagram

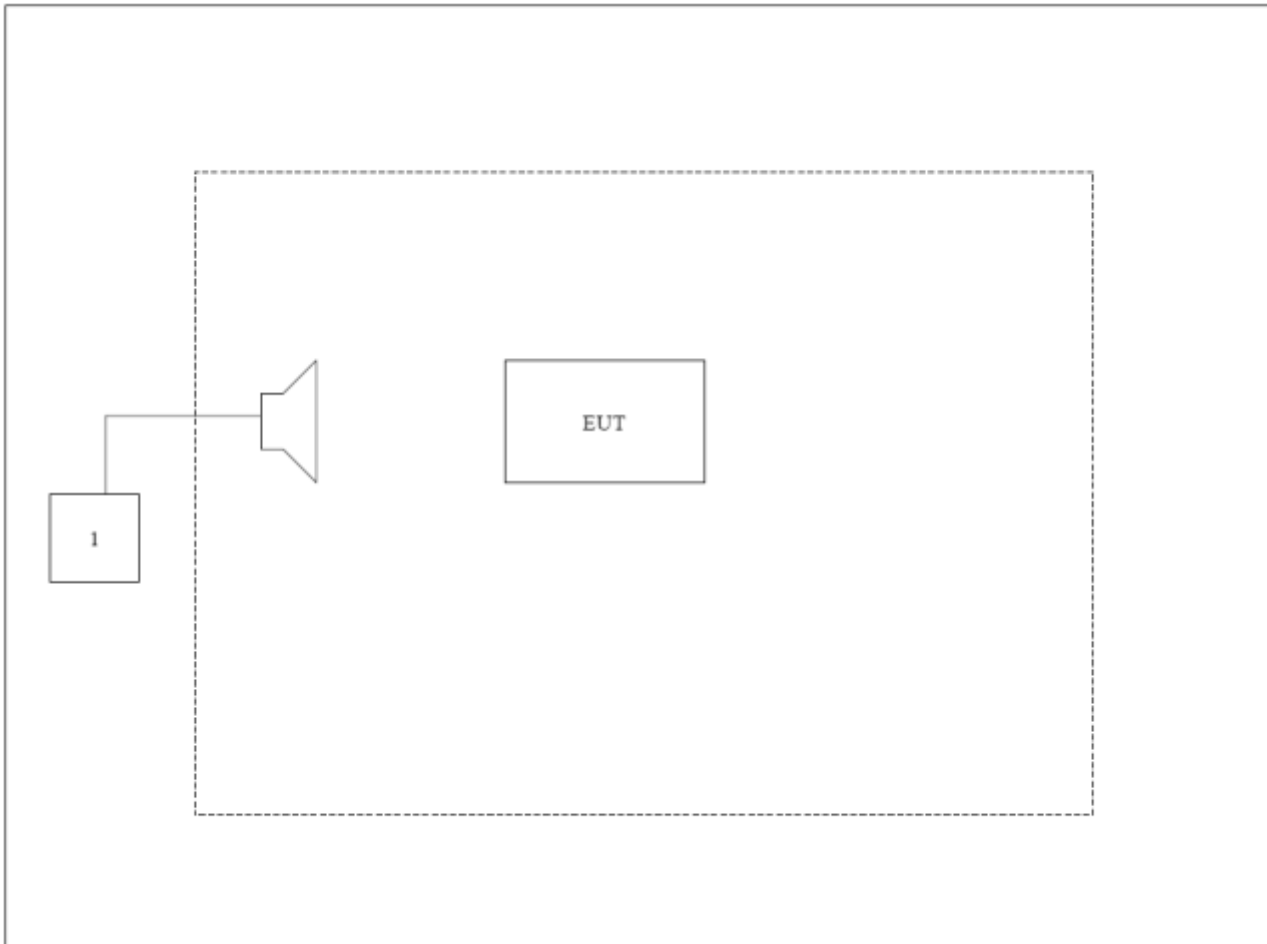

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	EUT Communicate with E5515C, then select channel to test.

2. Technical Test

2.1. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	24
Humidity (%RH)	25-75	62
Barometric pressure (mbar)	860-1060	950-1000

3. Peak Output Power


3.1. Test Equipment

Instrument	Manufacturer	Model	Serial No.	Cali. Due Date
Spectrum Analyzer	Agilent	N9038A	MY51210142	2014.07.27
Radio Communication Tester	Agilent	E5515C	GB46581718	2014.10.24
Signal Generator	Agilent	N5183A	MY50140938	2015.01.03
Preamplifier	CEM	EM30180	3008A0245	2015.03.01
DC Power Supply	Agilent	6612C	MY43002989	2015.03.04
Bilog Antenna	Schwarzbeck	VULB9160	9160-3316	2014.07.19
VHF-UHF-Biconical Antenna	Schwarzbeck	VUBA9117	9117-263	2014.07.19
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-942	2014.07.19
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-943	2014.07.19


The measure equipment had been calibrated once a year.

3.2. Test Setup


Conducted Power Measurement:

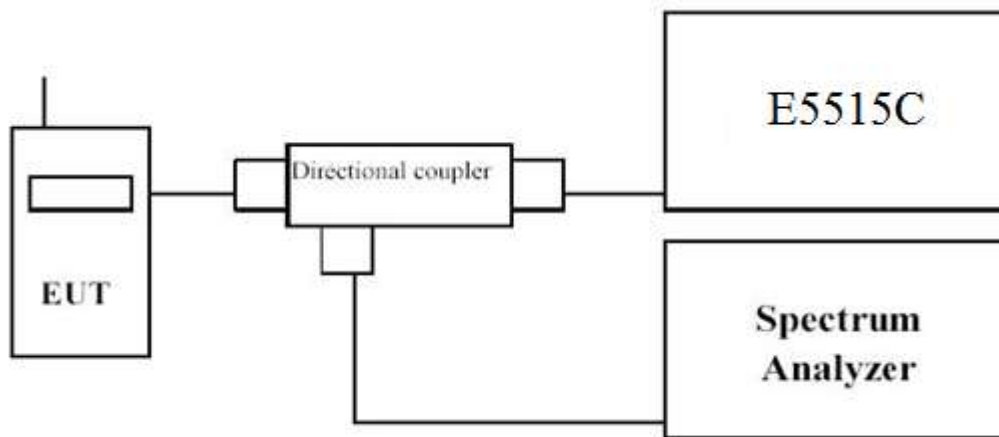

Radiated Spurious Measurement: below 1GHz

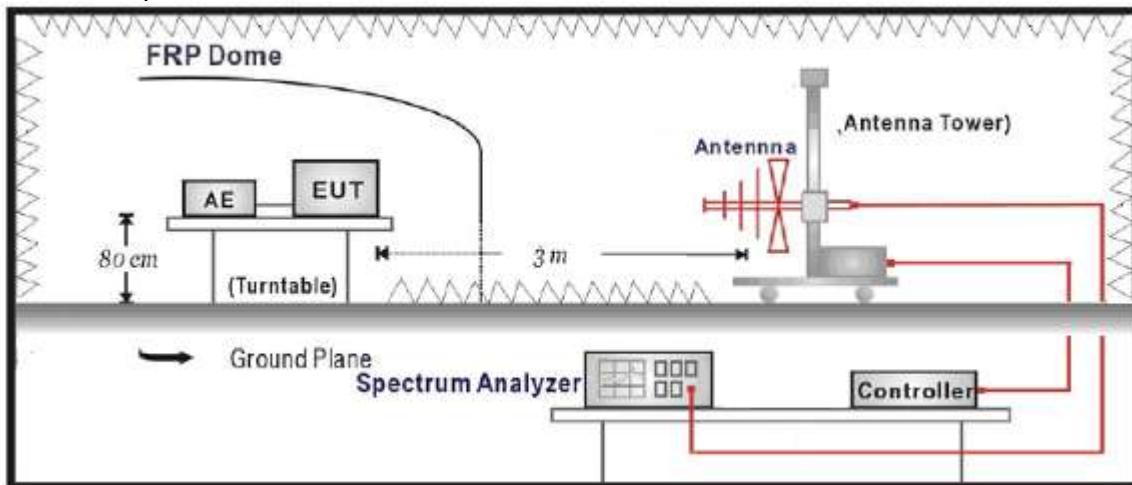

Radiated Spurious Measurement: above 1GHz

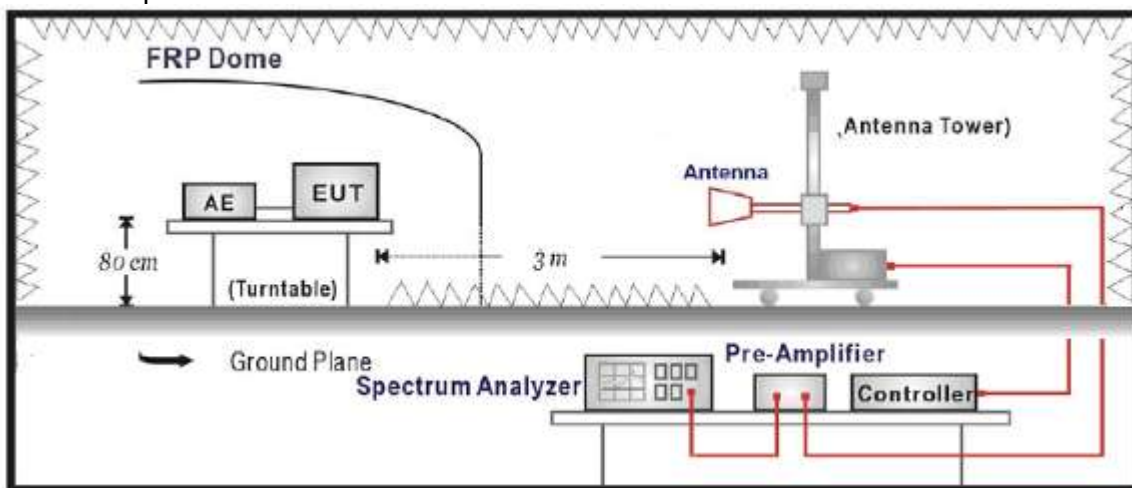

3.3. Limit

For FCC Part 22.913(a)(2):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

For FCC Part 24.232(c):

The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 Watts.

3.4. Test Procedure

Conducted Power Measurement:

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Connect a low loss RF cable from the antenna port to a spectrum analyzer and E5515C by a Directional Couple.
- c. EUT Communicate with E5515C, then selects a channel for testing.
- d. Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- a. The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c. The output of the test antenna shall be connected to the measuring receiver.
- d. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.4: 2009.

3.5. Uncertainty

The measurement uncertainty is defined as for Conducted Power Measurement ± 1.1 dB,
for Radiated Power Measurement ± 3.1 dB

3.6. Test Result

The following table shows the conducted power measured:

Table 1

GSM850					
Modes		Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)
GSM850 (GSM)	Voltage: 12V	128(Low)	824.2	33.32	2.15
		189(Mid)	836.4	33.17	2.07
		251(High)	848.8	33.03	2.01
	Voltage: 24V	128(Low)	824.2	33.69	2.34
		189(Mid)	836.4	33.57	2.28
		251(High)	848.8	33.43	2.20
GSM850 (GPRS 8)	Voltage: 12V	128(Low)	824.2	33.27	2.12
		189(Mid)	836.4	33.15	2.07
		251(High)	848.8	33.04	2.01
	Voltage: 24V	128(Low)	824.2	33.68	2.33
		189(Mid)	836.4	33.56	2.27
		251(High)	848.8	33.42	2.20

Table 2

PCS1900					
Modes		Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)
PCS1900 (GSM)	Voltage: 12V	512(Low)	1850.2	30.10	1.02
		661(Mid)	1880.0	29.74	0.94
		810(High)	1909.8	29.24	0.83
	Voltage: 24V	512(Low)	1850.2	30.36	1.09
		661(Mid)	1880.0	29.96	0.99
		810(High)	1909.8	29.39	0.87
PCS1900 (GPRS 8)	Voltage: 12V	512(Low)	1850.2	30.13	1.03
		661(Mid)	1880.0	29.76	0.94
		810(High)	1909.8	29.26	0.84
	Voltage: 24V	512(Low)	1850.2	30.22	1.05
		661(Mid)	1880.0	29.79	0.95
		810(High)	1909.8	29.23	0.84

The following table shows the Radiated power measured :

GSM850 (GSM Link EUT Voltage: 12V)

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	ERP (W)
Low Channel 128 (824.20MHz)						
824.2	H	34.42	3.83	-2.99	27.60	0.58
824.2	V	33.79	3.83	-2.99	26.97	0.50
Middle Channel 189 (836.40MHz)						
836.4	H	34.05	3.96	-3.04	27.05	0.51
836.4	V	34.13	3.96	-3.04	27.13	0.52
High Channel 251 (848.80MHz)						
848.8	H	34.22	3.97	-3.10	27.15	0.52
848.8	V	34.13	3.97	-3.10	27.06	0.51

GSM850 (GSM Link EUT Voltage: 24V)

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	ERP (W)
Low Channel 128 (824.20MHz)						
824.2	H	34.46	3.83	-2.99	27.64	0.58
824.2	V	33.89	3.83	-2.99	27.07	0.51
Middle Channel 189 (836.40MHz)						
836.4	H	34.15	3.96	-3.04	27.15	0.52
836.4	V	34.19	3.96	-3.04	27.19	0.52
High Channel 251 (848.80MHz)						
848.8	H	34.25	3.97	-3.10	27.18	0.52
848.8	V	34.21	3.97	-3.10	27.14	0.52

GSM850 (GPRS 8 Link EUT Voltage: 12V)

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	ERP (W)
Low Channel 128 (824.20MHz)						
824.2	H	34.16	3.83	-2.99	27.34	0.54
824.2	V	33.56	3.83	-2.99	26.74	0.47
Middle Channel 189 (836.40MHz)						
836.4	H	33.96	3.96	-3.04	26.96	0.50
836.4	V	34.10	3.96	-3.04	27.10	0.51
High Channel 251 (848.80MHz)						
848.8	H	34.27	3.97	-3.10	27.20	0.52
848.8	V	34.12	3.97	-3.10	27.05	0.51

GSM850 (GPRS 8 Link EUT Voltage: 24V)

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	ERP (W)
Low Channel 128 (824.20MHz)						
824.2	H	34.20	3.83	-2.99	27.38	0.55
824.2	V	33.60	3.83	-2.99	26.78	0.48
Middle Channel 189 (836.40MHz)						
836.4	H	34.10	3.96	-3.04	27.10	0.51
836.4	V	34.14	3.96	-3.04	27.14	0.52
High Channel 251 (848.80MHz)						
848.8	H	34.30	3.97	-3.10	27.23	0.53
848.8	V	34.16	3.97	-3.10	27.09	0.51

PCS1900 (GSM Link EUT Voltage: 12V)

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	EIRP (W)
Low Channel 512(1850.20MHz)						
1850.2	H	22.54	6.26	10.40	26.68	0.47
1850.2	V	21.84	6.26	10.40	25.98	0.40
Middle Channel 661 (1880.00MHz)						
1880.0	H	22.48	6.19	10.43	26.72	0.47
1880.0	V	22.92	6.19	10.43	27.16	0.52
High Channel 810 (1909.80MHz)						
1909.8	H	21.85	6.15	10.44	26.14	0.41
1909.8	V	21.34	6.15	10.44	25.63	0.37

PCS1900 (GSM Link EUT Voltage: 24V)

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	EIRP (W)
Low Channel 512(1850.20MHz)						
1850.2	H	22.59	6.26	10.40	26.73	0.47
1850.2	V	21.88	6.26	10.40	26.02	0.40
Middle Channel 661 (1880.00MHz)						
1880.0	H	22.51	6.19	10.43	26.75	0.47
1880.0	V	22.95	6.19	10.43	27.19	0.52
High Channel 810 (1909.80MHz)						
1909.8	H	21.81	6.15	10.44	26.10	0.41
1909.8	V	21.30	6.15	10.44	25.59	0.36

PCS1900 (GPRS 8 Link EUT Voltage: 12V)

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	EIRP (W)
Low Channel 512(1850.20MHz)						
1850.2	H	22.25	6.26	10.40	26.39	0.44
1850.2	V	22.27	6.26	10.40	26.41	0.44
Middle Channel 661 (1880.00MHz)						
1880.0	H	21.18	6.19	10.43	25.42	0.35
1880.0	V	21.74	6.19	10.43	25.98	0.40
High Channel 810 (1909.80MHz)						
1909.8	H	21.22	6.15	10.44	25.51	0.36
1909.8	V	21.81	6.15	10.44	26.10	0.41

PCS1900 (GPRS 8 Link EUT Voltage: 24V)

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	EIRP (W)
Low Channel 512(1850.20MHz)						
1850.2	H	22.29	6.26	10.40	26.43	0.44
1850.2	V	22.31	6.26	10.40	26.45	0.44
Middle Channel 661 (1880.00MHz)						
1880.0	H	21.20	6.19	10.43	25.44	0.35
1880.0	V	21.76	6.19	10.43	26.00	0.40
High Channel 810 (1909.80MHz)						
1909.8	H	21.25	6.15	10.44	25.54	0.36
1909.8	V	21.84	6.15	10.44	26.13	0.41

4. Occupied Bandwidth


4.1. Test Equipment

Occupied Bandwidth

Instrument	Manufacturer	Model	Serial No	Cal. Date
Radio Communication Tester	Agilent	E5515C	GB46581718	2014.10.24
Spectrum Analyzer	Agilent	N9038A	MY51210142	2014.07.27
DC Power Supply	Agilent	6612C	MY43002989	2015.03.04

The measure equipment had been calibrated once a year.

4.2. Test Setup

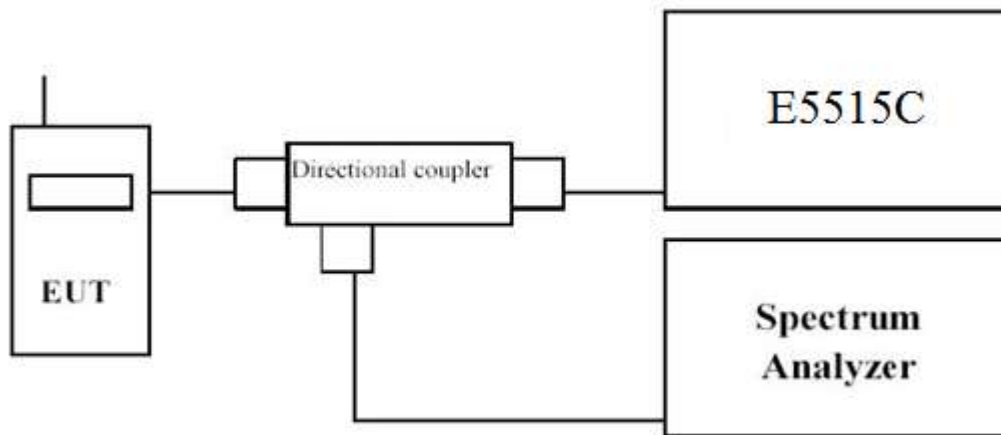

4.3. Limit

N/A

4.4. Test Procedure

Using Occupied Bandwidth measurement function of spectrum analyzer, and setting as follows:
For GSM850/1900 test --- RBW = 3 kHz and VBW = 10 kHz

4.5. Uncertainty


The measurement uncertainty is defined as ± 10 Hz

4.6. Test Result


GSM850 (GSM Link EUT Voltage: 12V)

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
128	824.20	351.2	292.5
189	836.40	350.2	289.6
251	848.80	347.6	278.5


GSM850 (GSM Link EUT Voltage: 12V), Channel 128

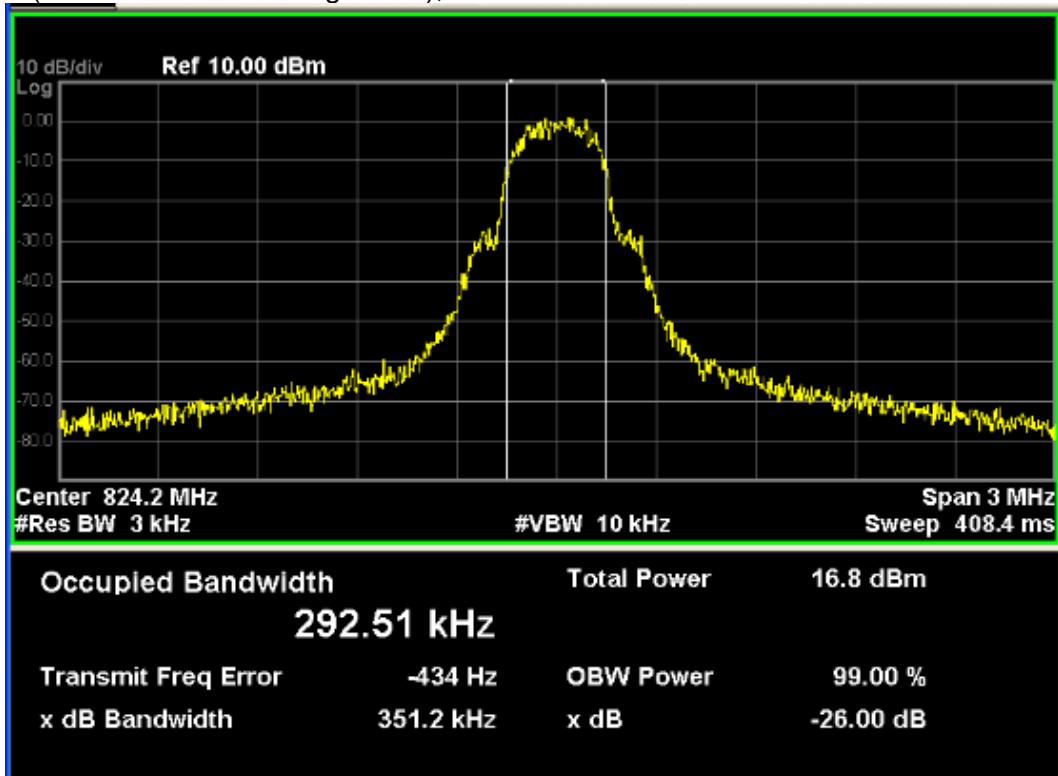

GSM850 (GSM Link EUT Voltage: 12V), Channel 189

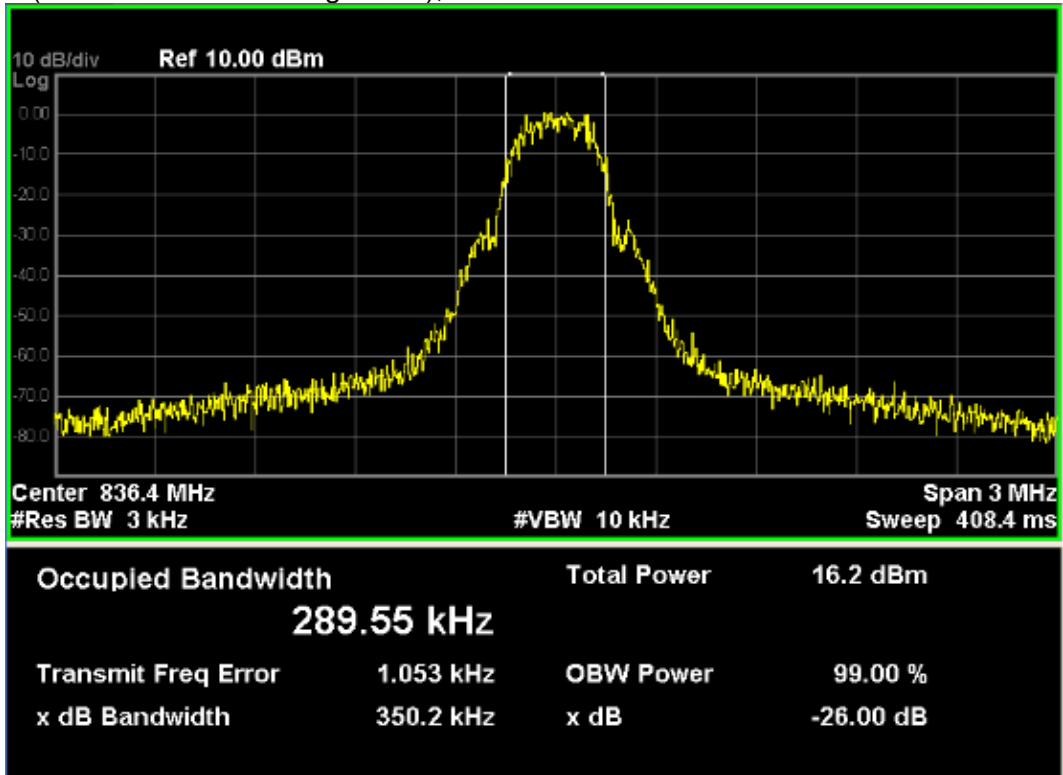


GSM850 (GSM Link EUT Voltage: 12V), Channel 251

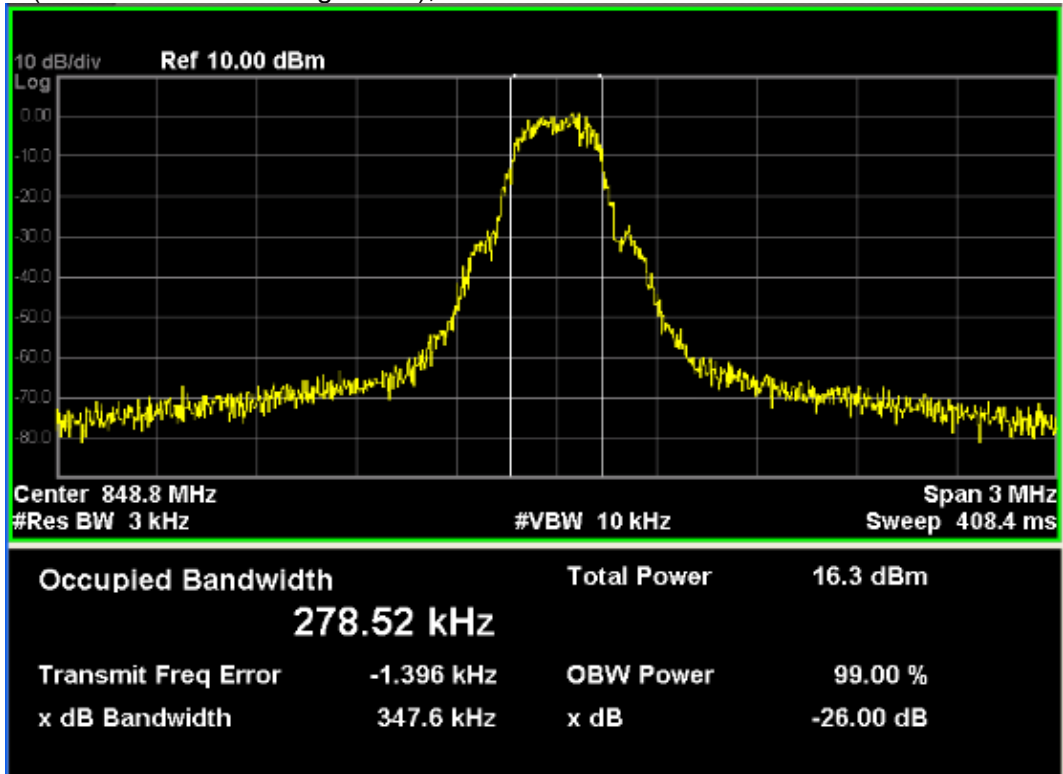


GSM850 (GSM Link EUT Voltage: 24V)

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
128	824.20	348.9	285.6
189	836.40	348.8	288.3
251	848.80	344.2	287.1


GSM850 (GSM Link EUT Voltage: 24V), Channel 128

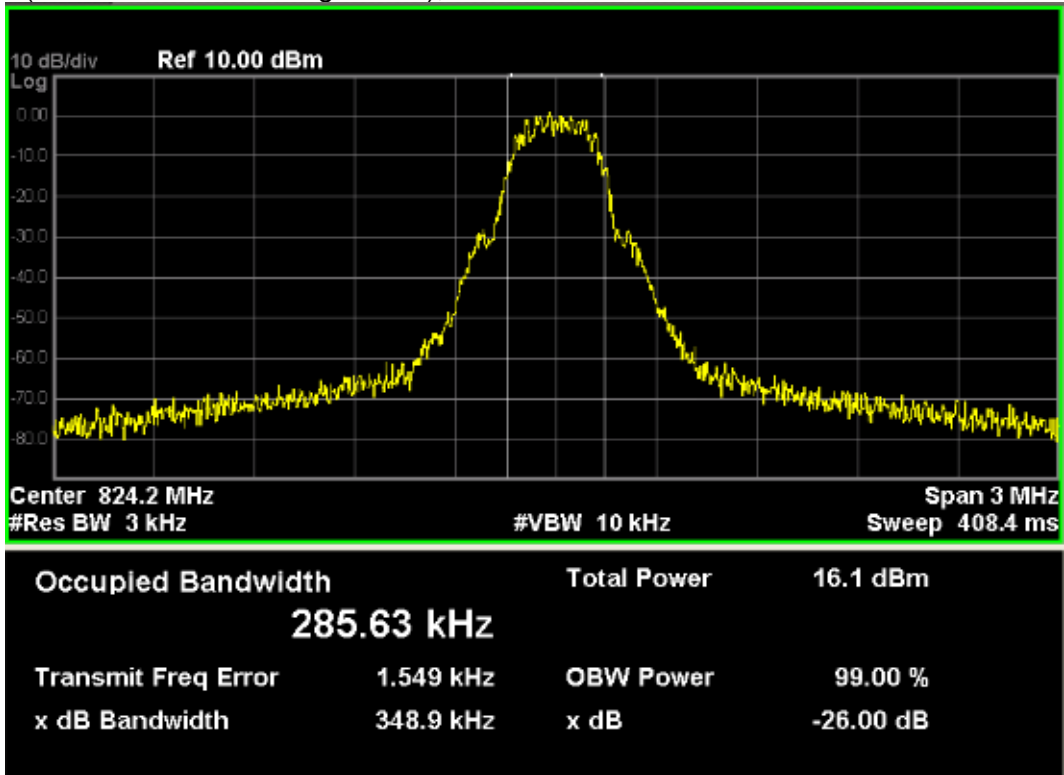

GSM850 (GSM Link EUT Voltage: 24V), Channel 189

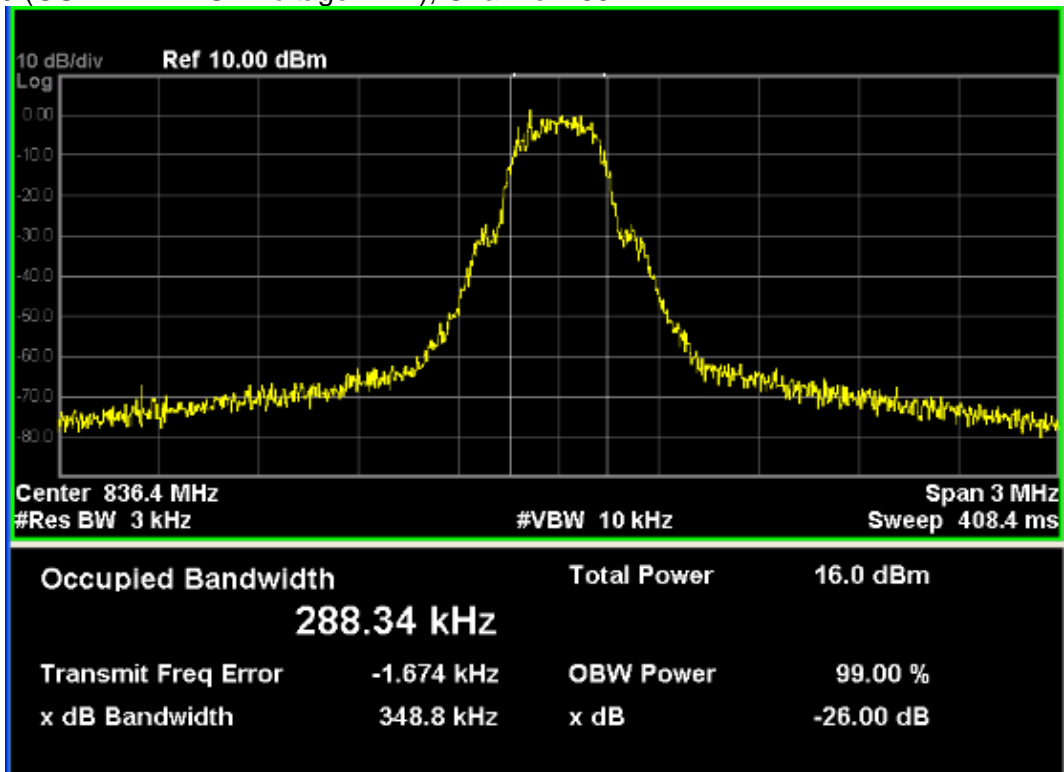


GSM850 (GSM Link EUT Voltage: 24V), Channel 251

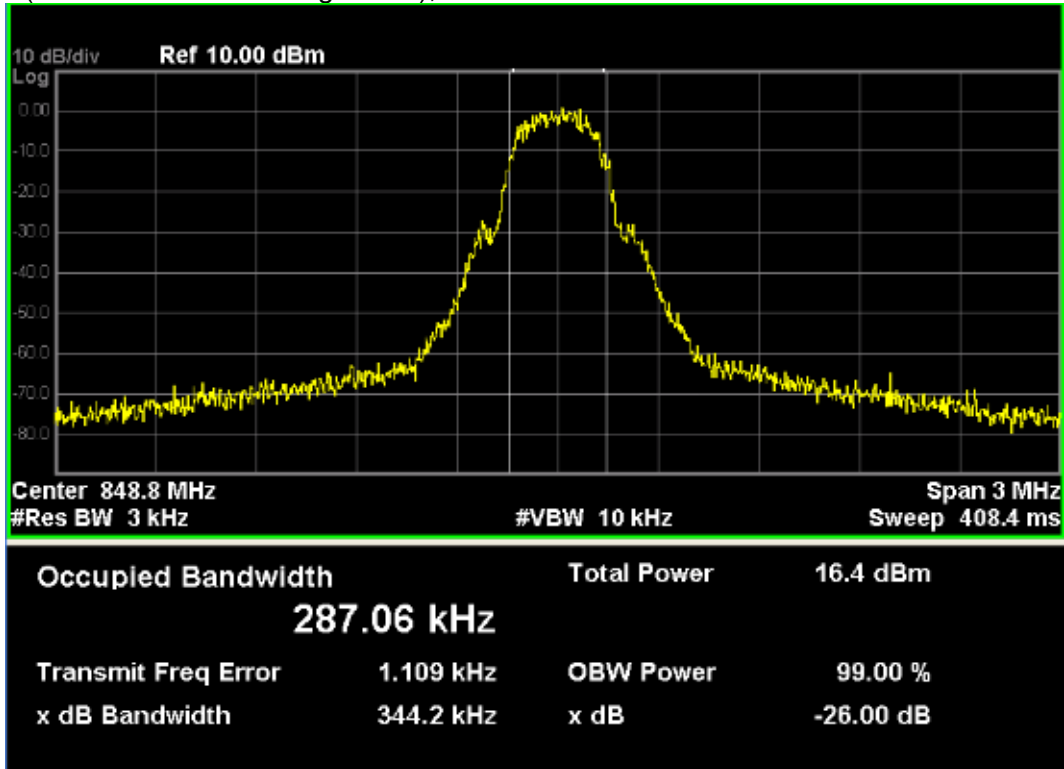


GSM850 (GPRS 8 Link EUT Voltage: 12V)

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
128	824.20	344.8	287.8
189	836.40	347.3	288.1
251	848.80	341.3	288.4


GSM850 (GPRS 8 Link EUT Voltage: 12V), Channel 128

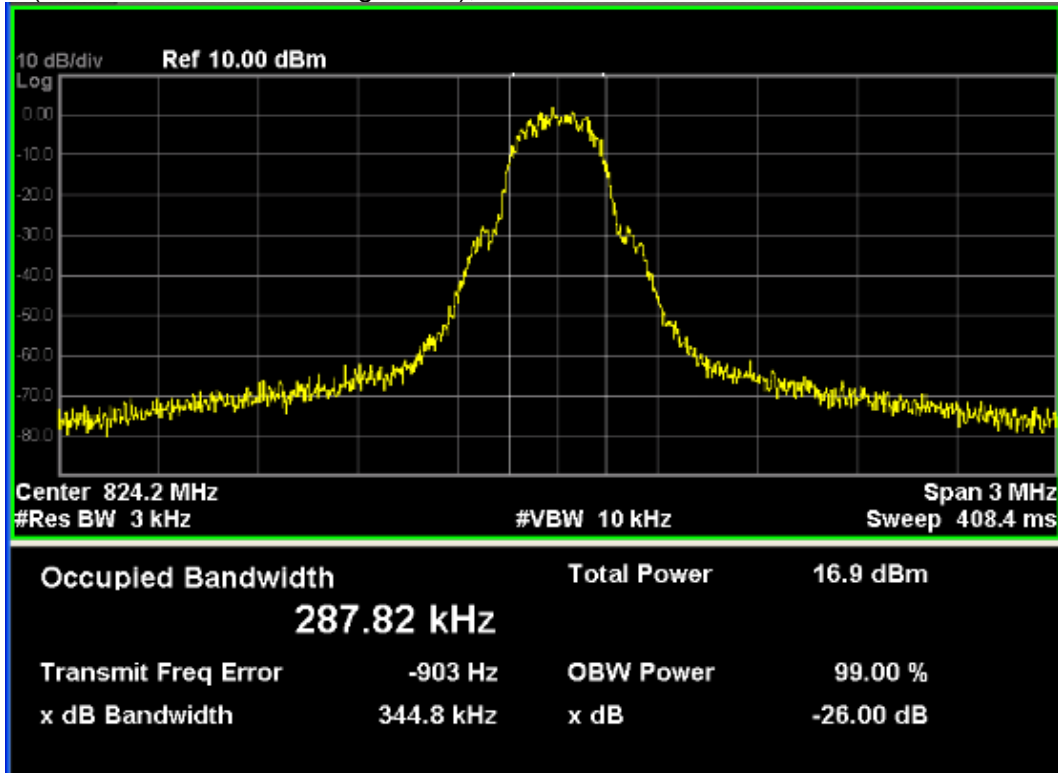

GSM850 (GPRS 8 Link EUT Voltage: 12V), Channel 189

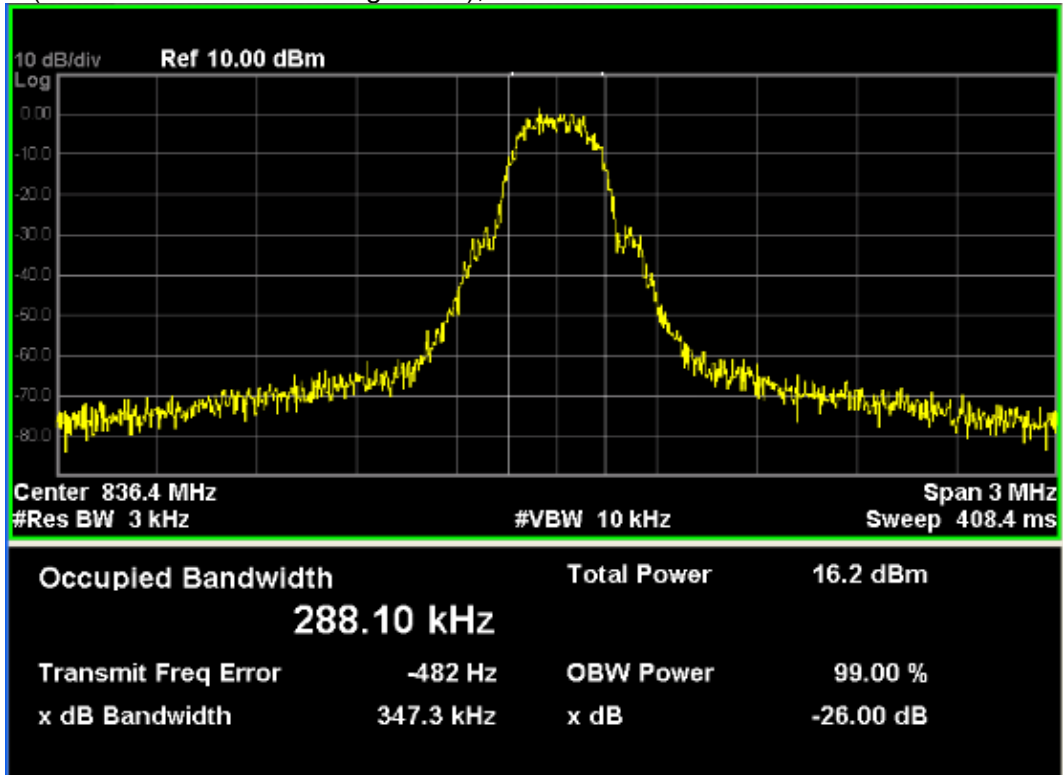


GSM850 (GPRS 8 Link EUT Voltage: 12V), Channel 251

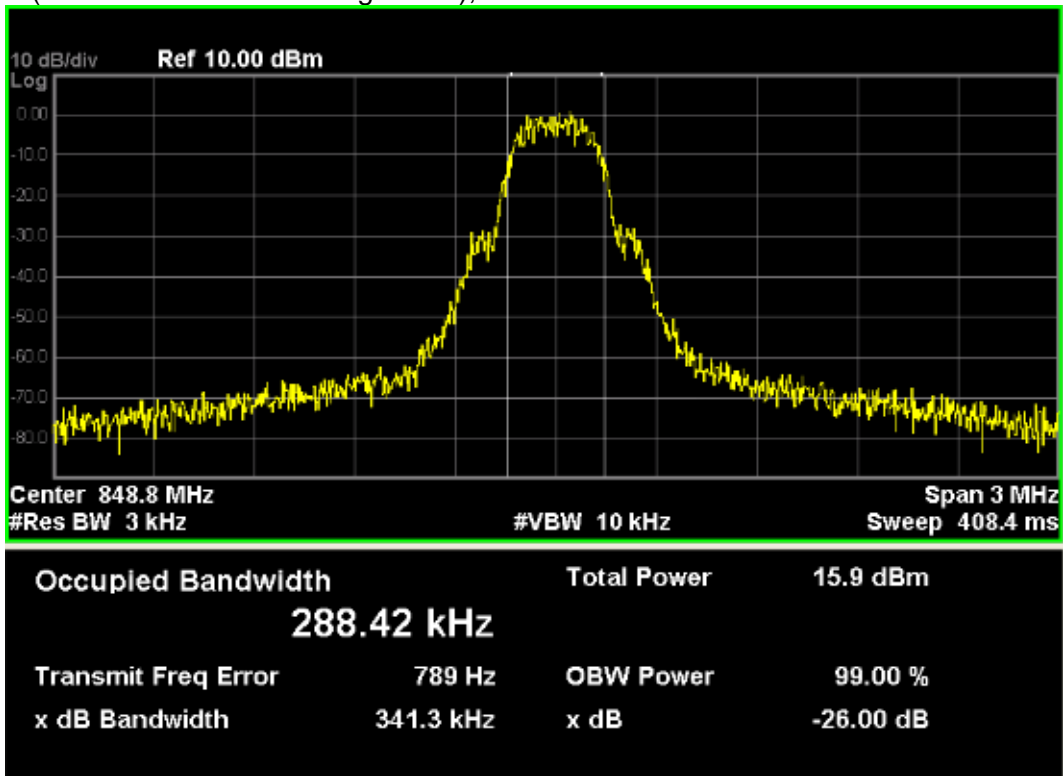


GSM850 (GPRS 8 Link EUT Voltage: 24V)

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
128	824.20	349.2	287.2
189	836.40	348.1	286.6
251	848.80	346.1	287.9


GSM850 (GPRS 8 Link EUT Voltage: 24V), Channel 128

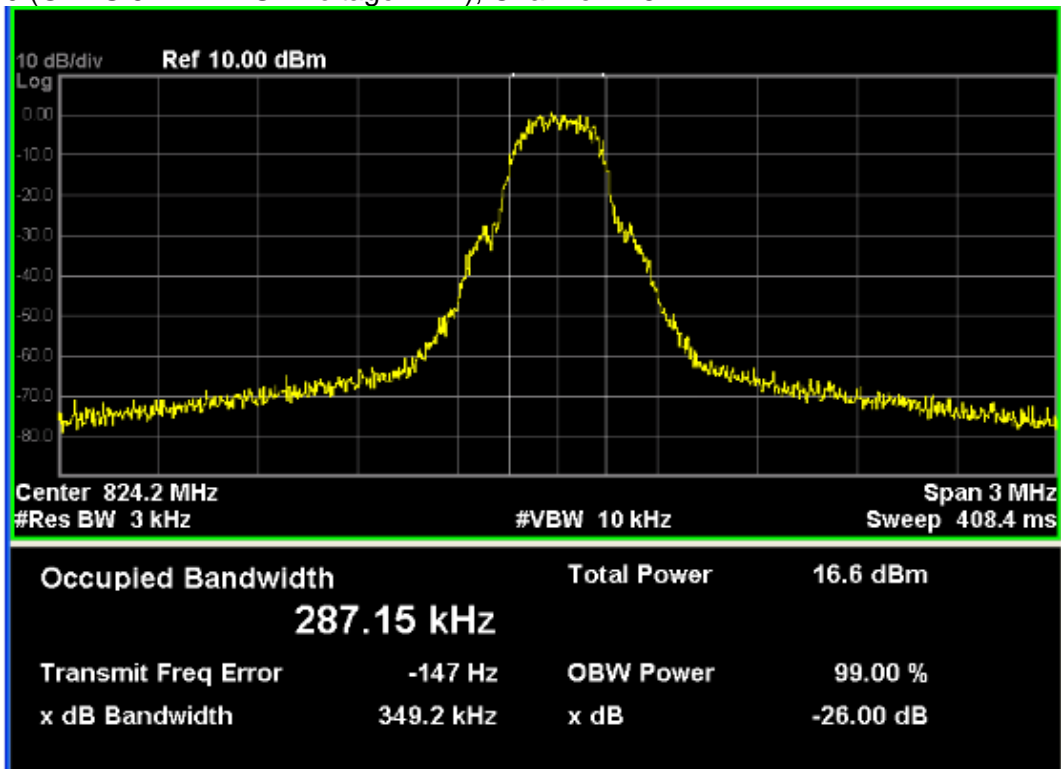

GSM850 (GPRS 8 Link EUT Voltage: 24V), Channel 189

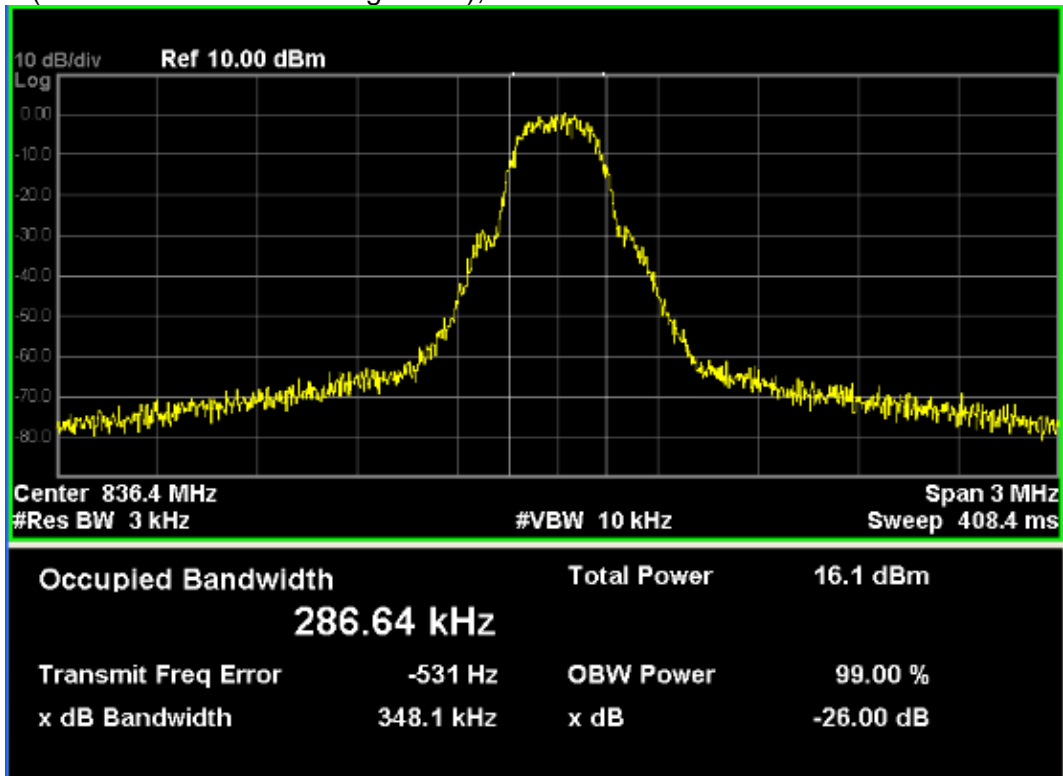


GSM850 (GPRS 8 Link EUT Voltage: 24V), Channel 251

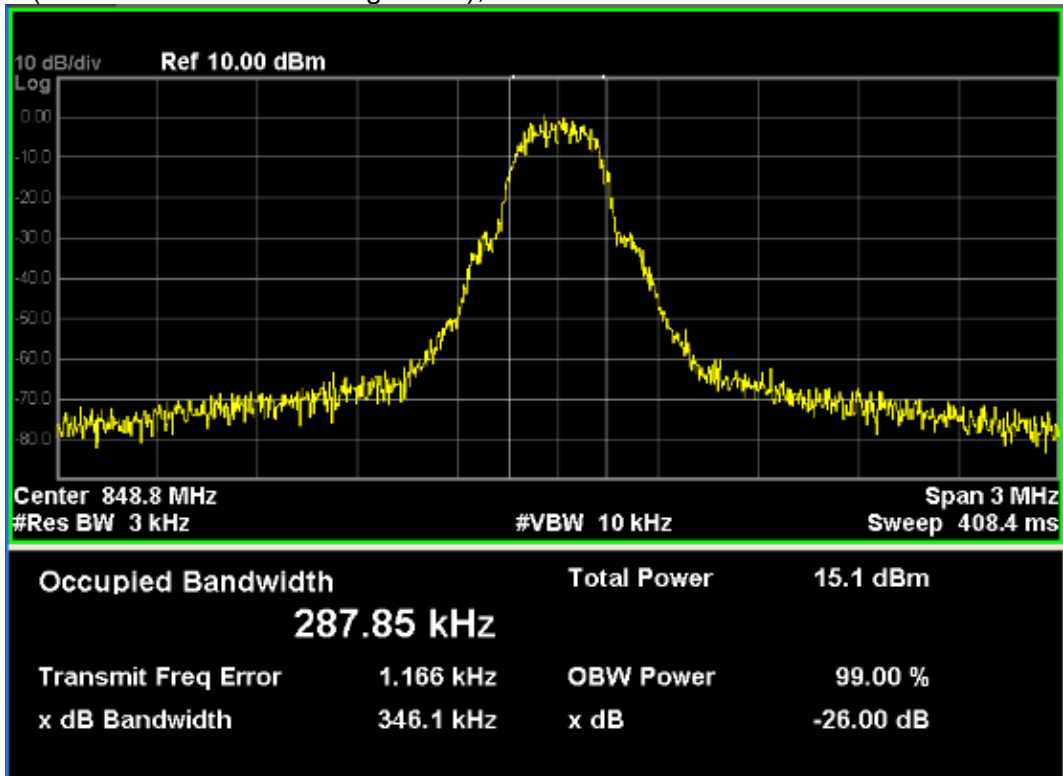


PCS 1900 (GSM Link EUT Voltage: 12V)

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
512	1850.20	326.2	268.8
661	1880.00	318.6	260.9
810	1909.80	323.0	259.9


PCS1900 (GSM Link EUT Voltage: 12V), Channel 512

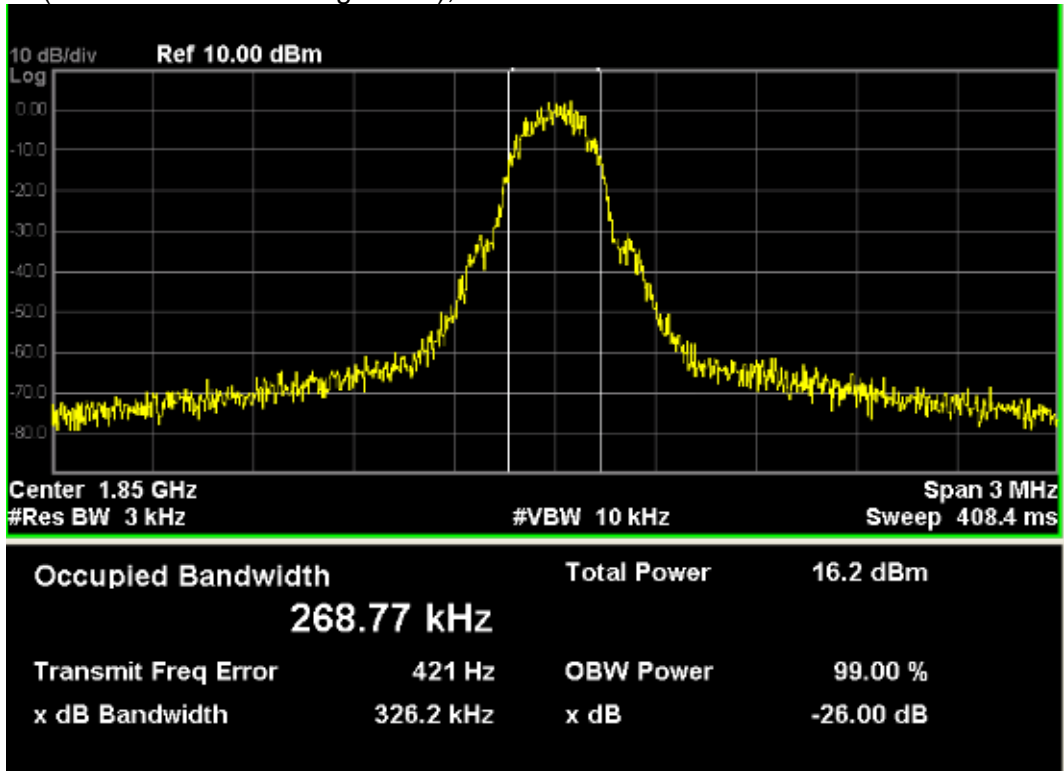

PCS1900 (GSM Link EUT Voltage: 12V), Channel 661

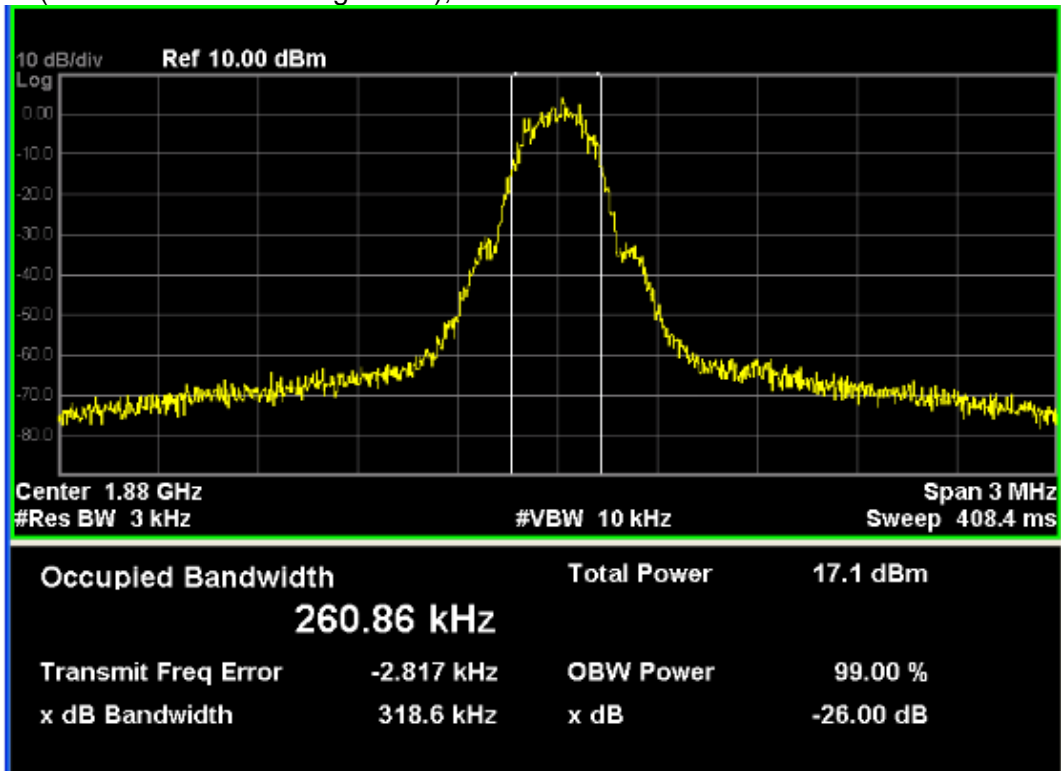


PCS1900 (GSM Link EUT Voltage: 12V), Channel 810

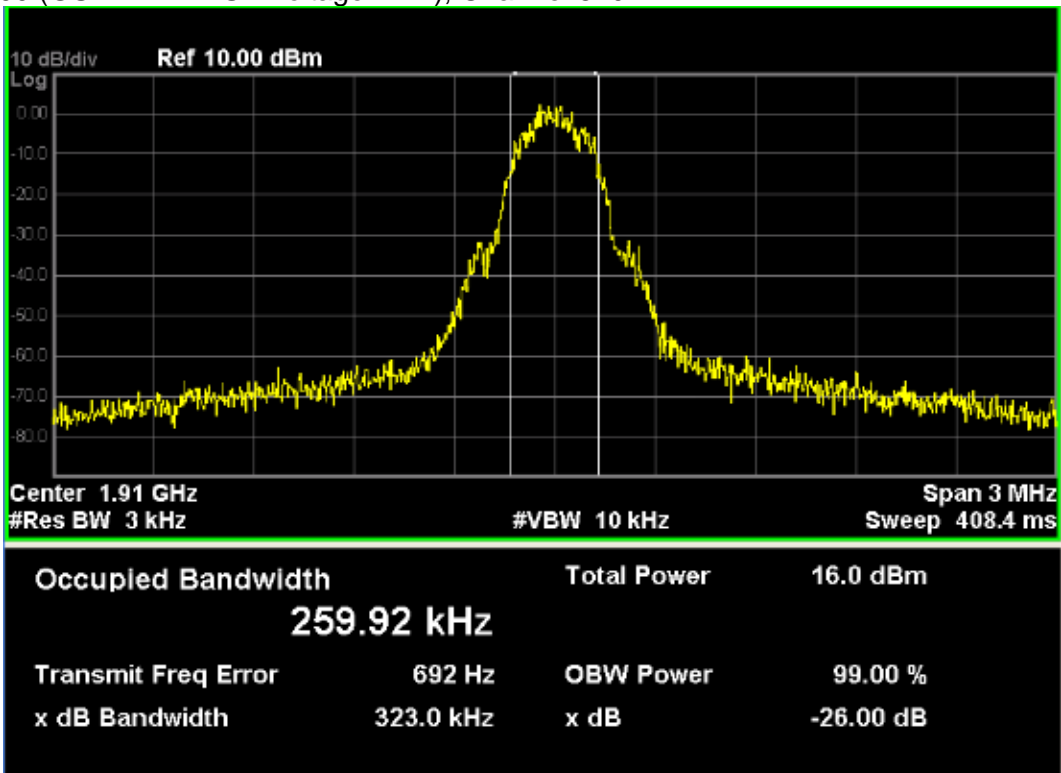


PCS 1900 (GSM Link EUT Voltage: 24V)

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
512	1850.20	335.6	274.0
661	1880.00	326.8	268.9
810	1909.80	332.3	270.8


PCS 1900 (GSM Link EUT Voltage: 24V), Channel 512

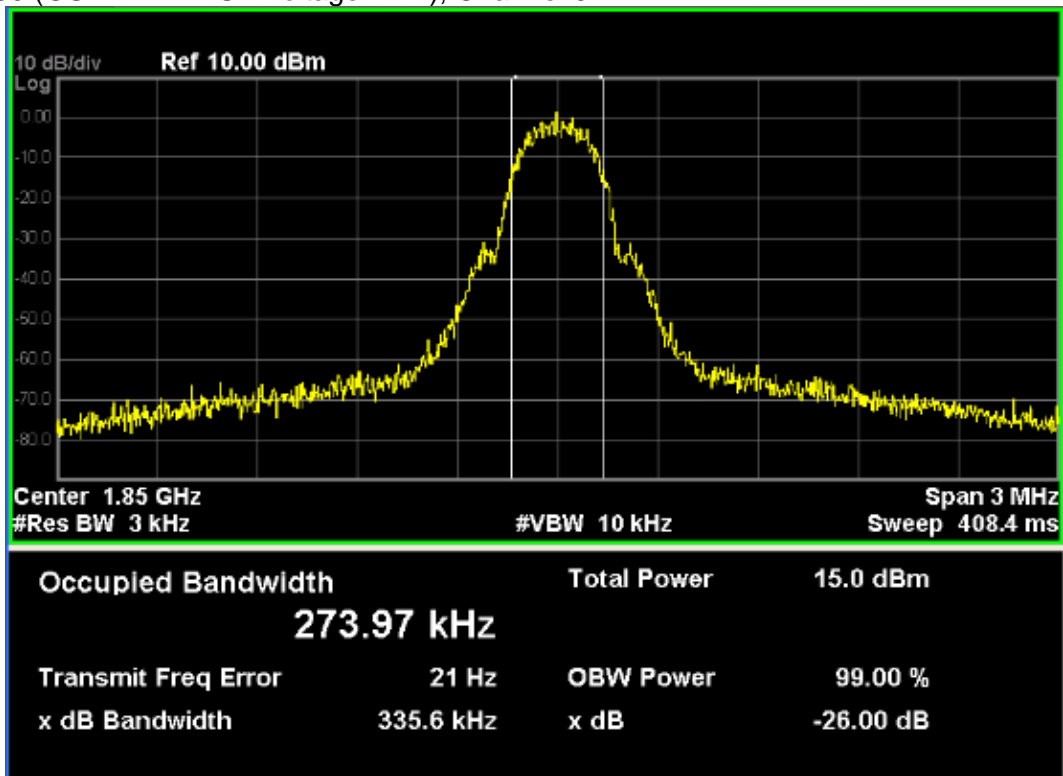

PCS1900 (GSM Link EUT Voltage: 24V), Channel 661

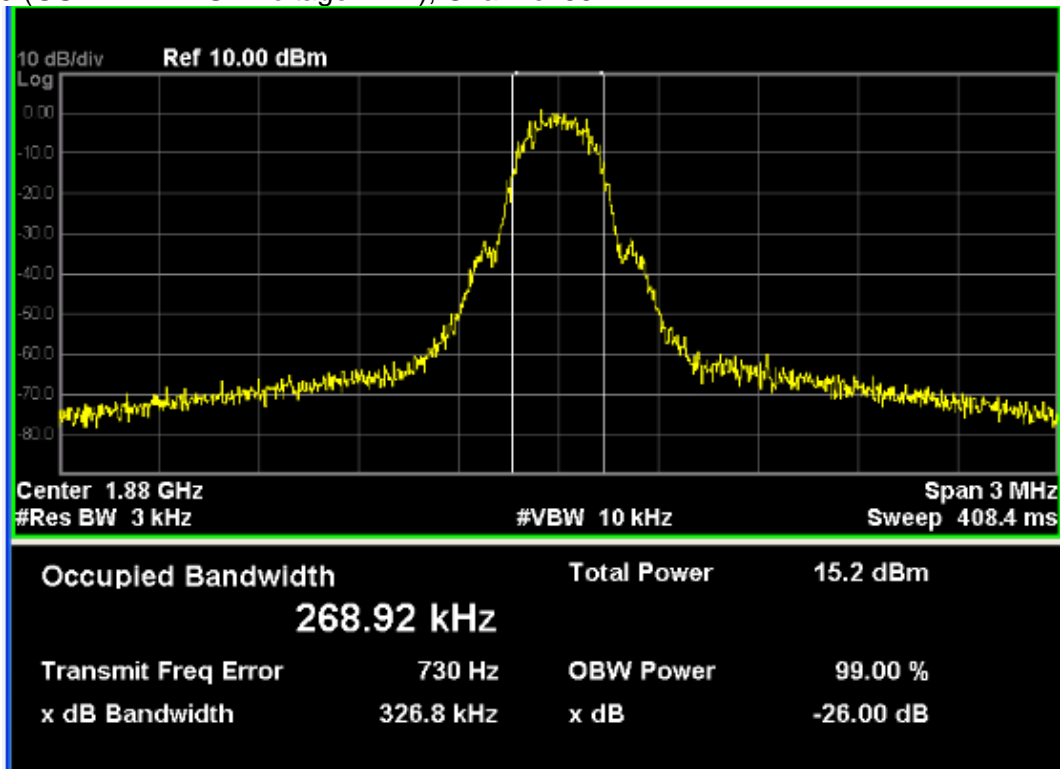


PCS 1900 (GSM Link EUT Voltage: 24V), Channel 810

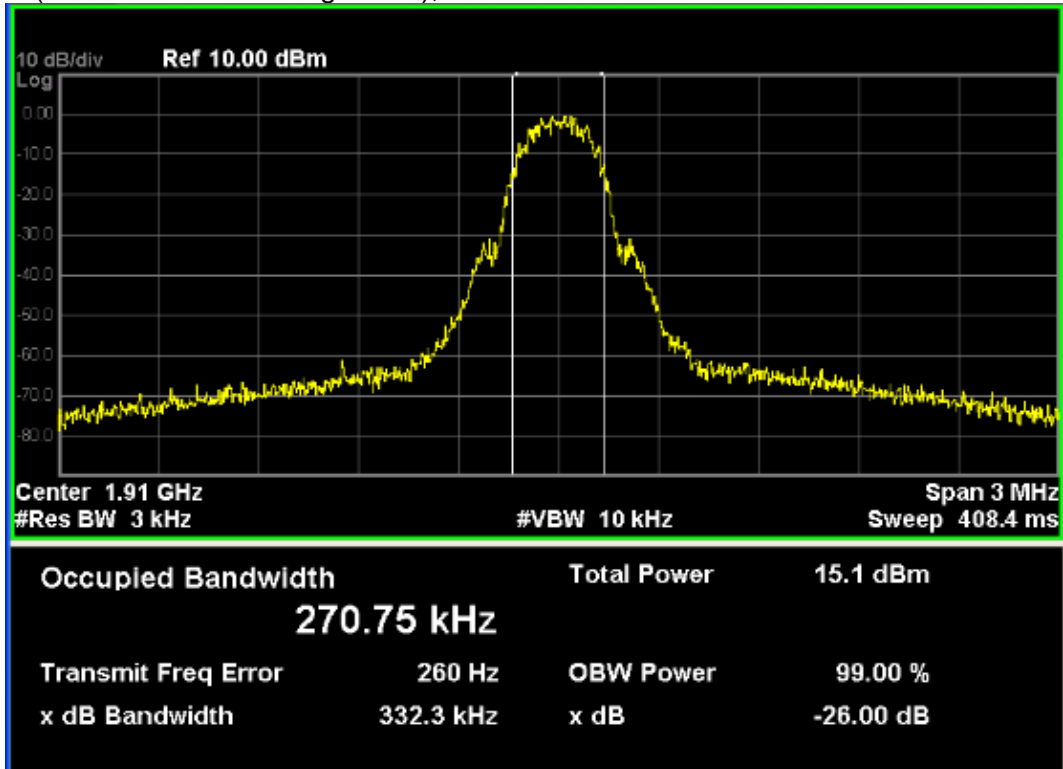


PCS 1900 (GPRS 8 Link EUT Voltage: 12V)

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
512	1850.20	314.8	267.0
661	1880.00	321.9	265.1
810	1909.80	333.5	258.1


PCS 1900 (GPRS 8 Link EUT Voltage: 12V), Channel 512

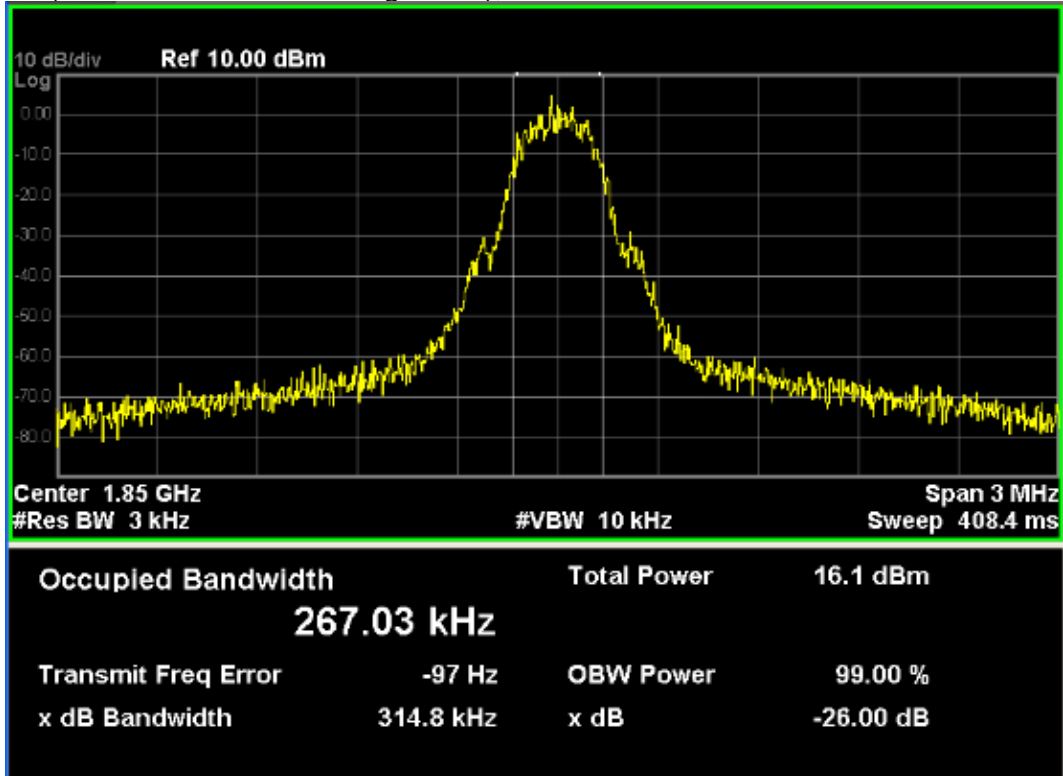

PCS 1900 (GPRS 8 Link EUT Voltage: 12V), Channel 661

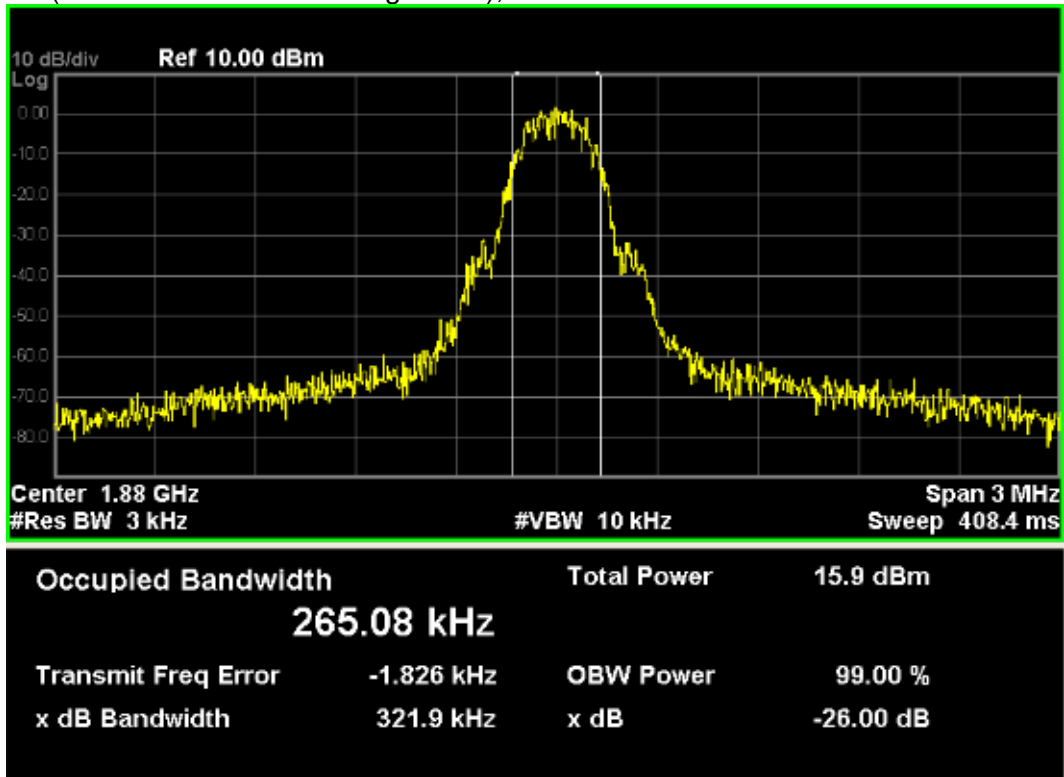


PCS 1900 (GPRS 8 Link EUT Voltage: 12V), Channel 810

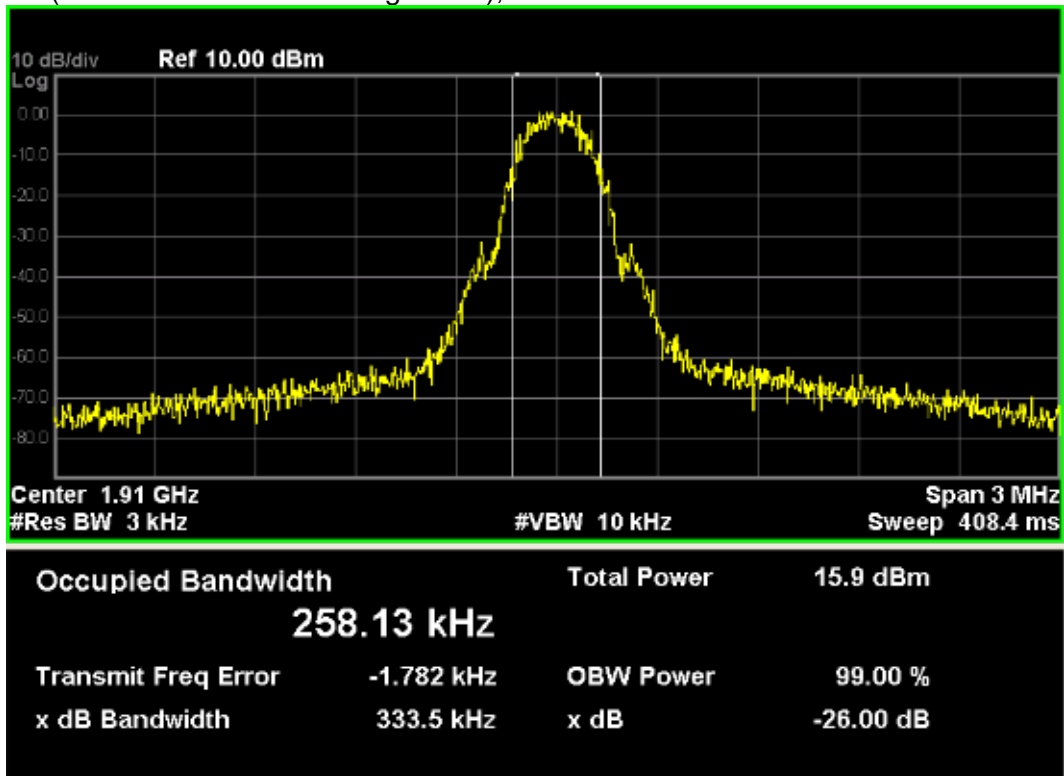


PCS 1900 (GPRS 8 Link EUT Voltage: 24V)

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
512	1850.20	336.6	271.5
661	1880.00	324.7	269.8
810	1909.80	325.4	269.1


PCS 1900 (GPRS 8 Link EUT Voltage: 24V), Channel 512

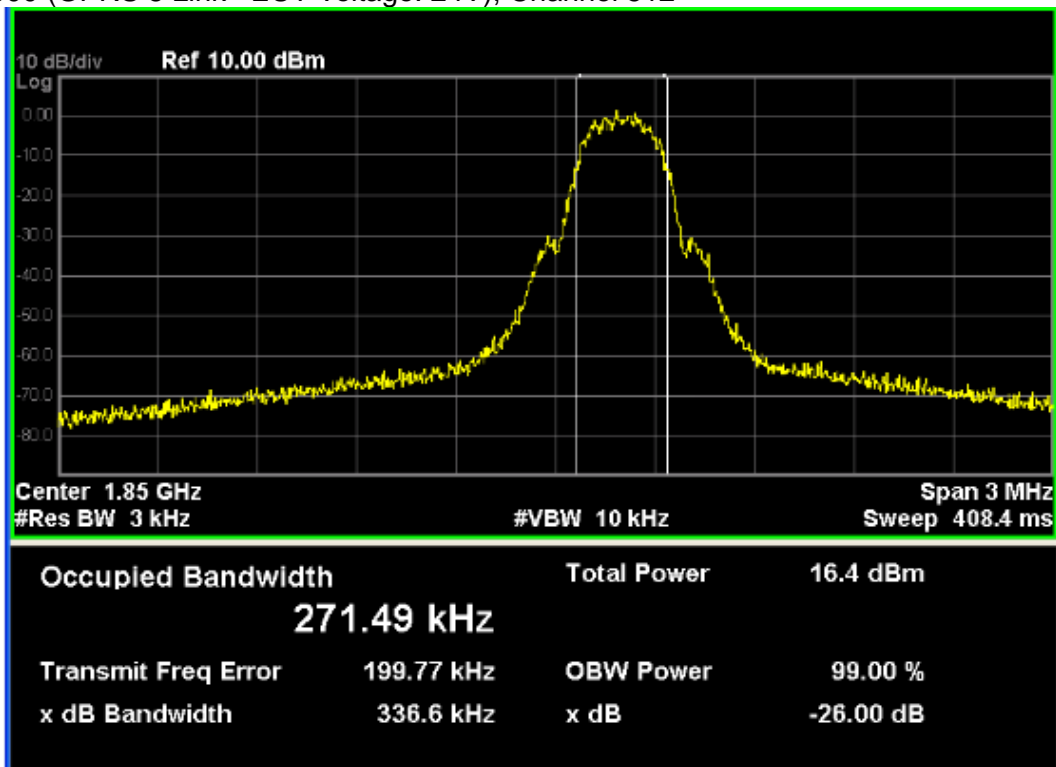

PCS 1900 (GPRS 8 Link EUT Voltage: 24V), Channel 661

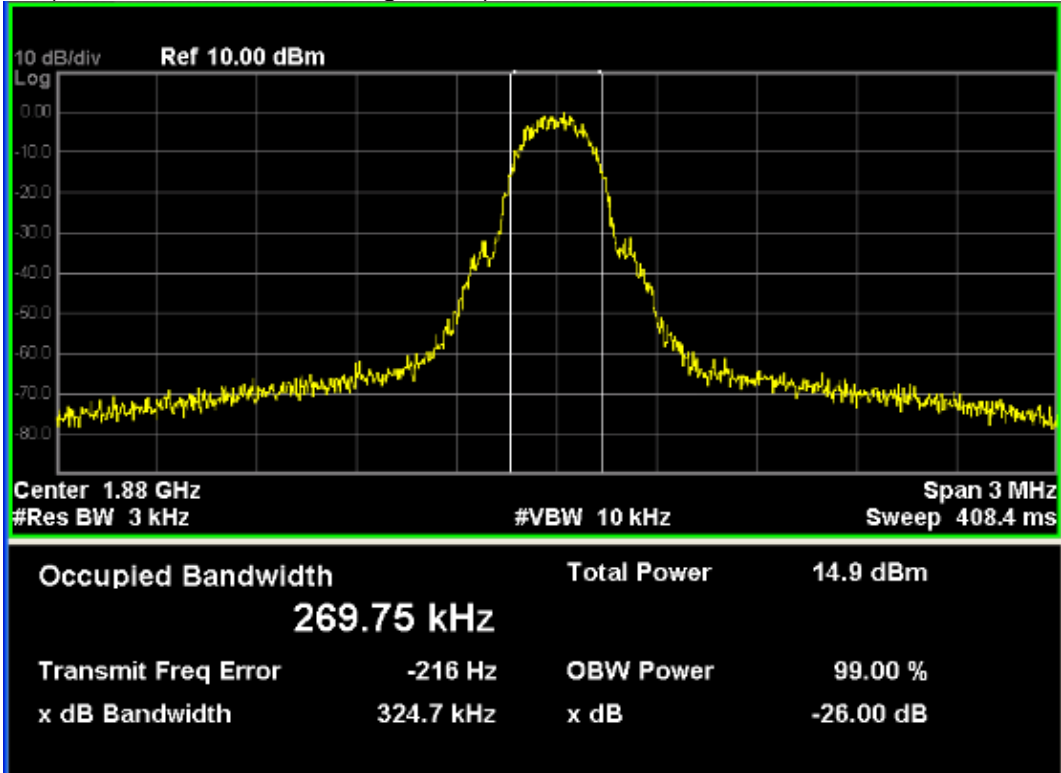

PCS 1900 (GPRS 8 Link EUT Voltage: 24V), Channel 810

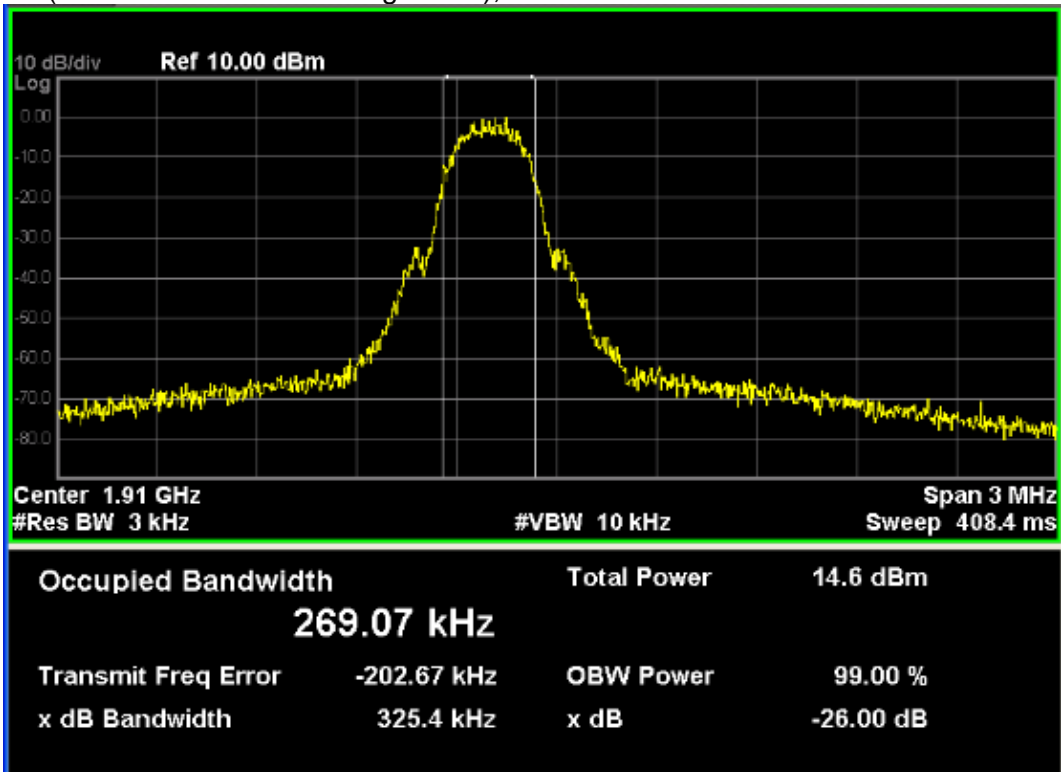


5. Spurious Emission At Antenna Terminals (+/- 1MHz)

5.1. Test Equipment

Instrument	Manufacturer	Model	Serial No	Cal. Date
Radio Communication Tester	Agilent	E5515C	GB46581718	2014.10.24
Spectrum Analyzer	Agilent	N9038A	MY51210142	2014.07.27
DC Power Supply	Agilent	6612C	MY43002989	2015.03.04

The measure equipment had been calibrated once a year.

5.2. Test Setup

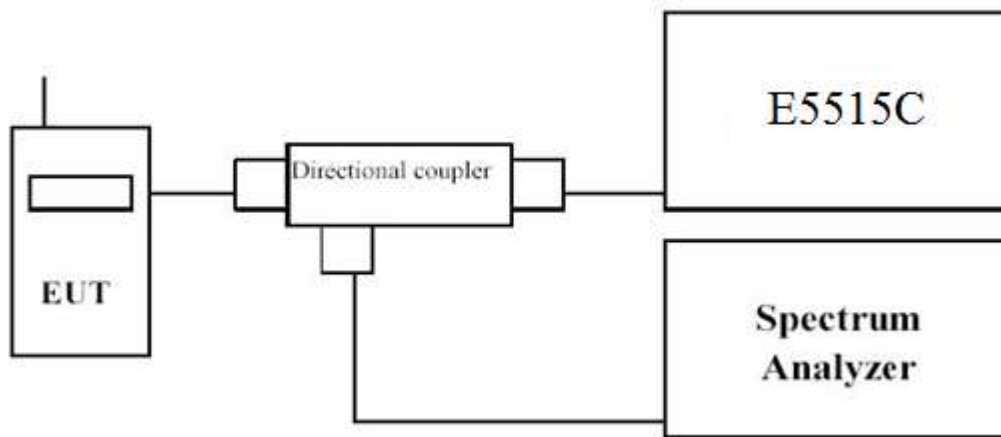

5.3. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

5.4. Test Procedure


In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

5.5. Uncertainty


The measurement uncertainty is defined as ± 1.2 dB.

5.6. Test Result


GSM850 (GSM Link EUT Voltage: 12V), Channel 128

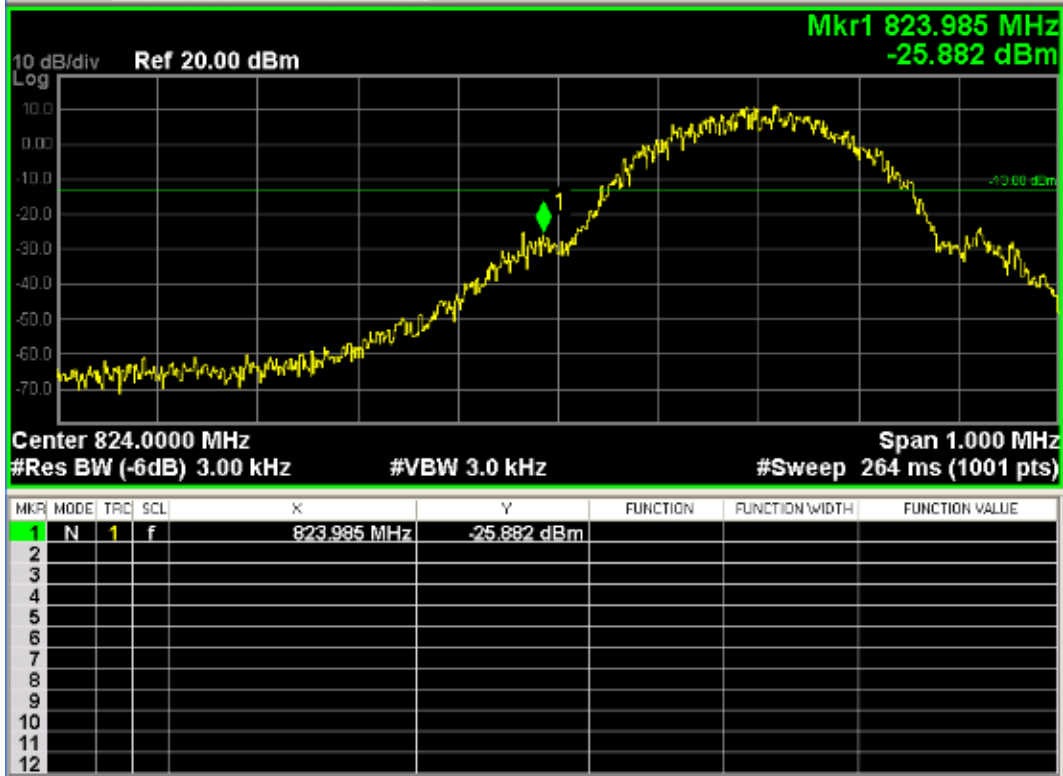


GSM850 (GSM Link EUT Voltage: 12V), Channel 251

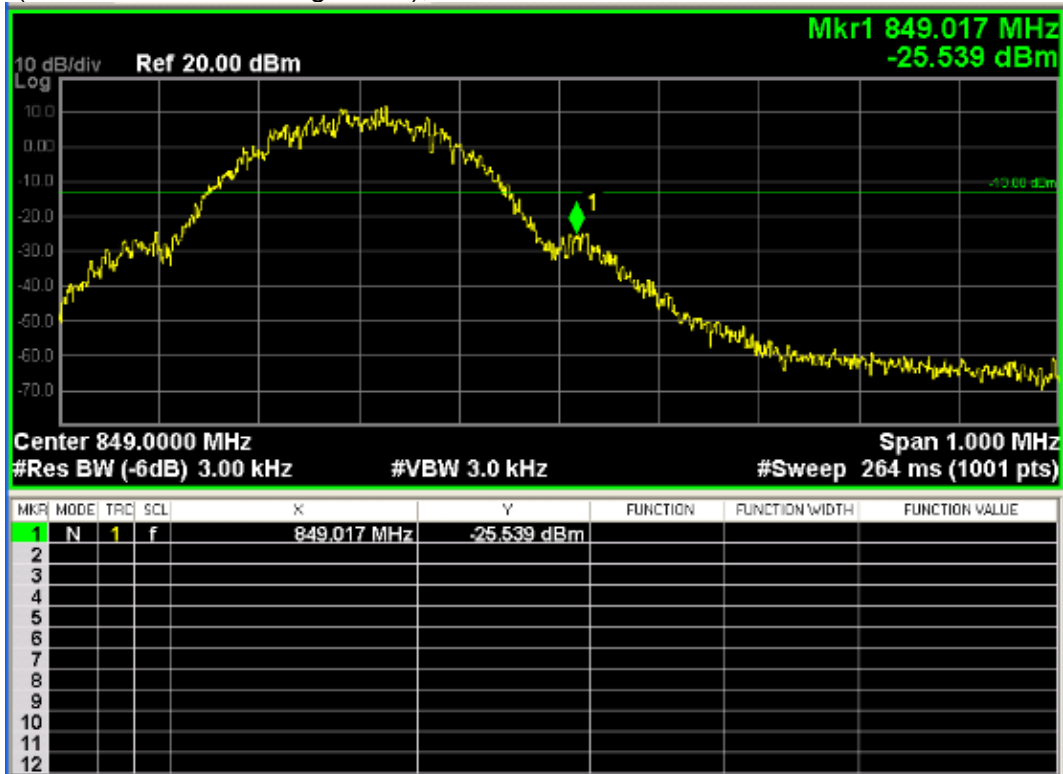


GSM850 (GPRS 8 Link EUT Voltage: 12V), Channel 128

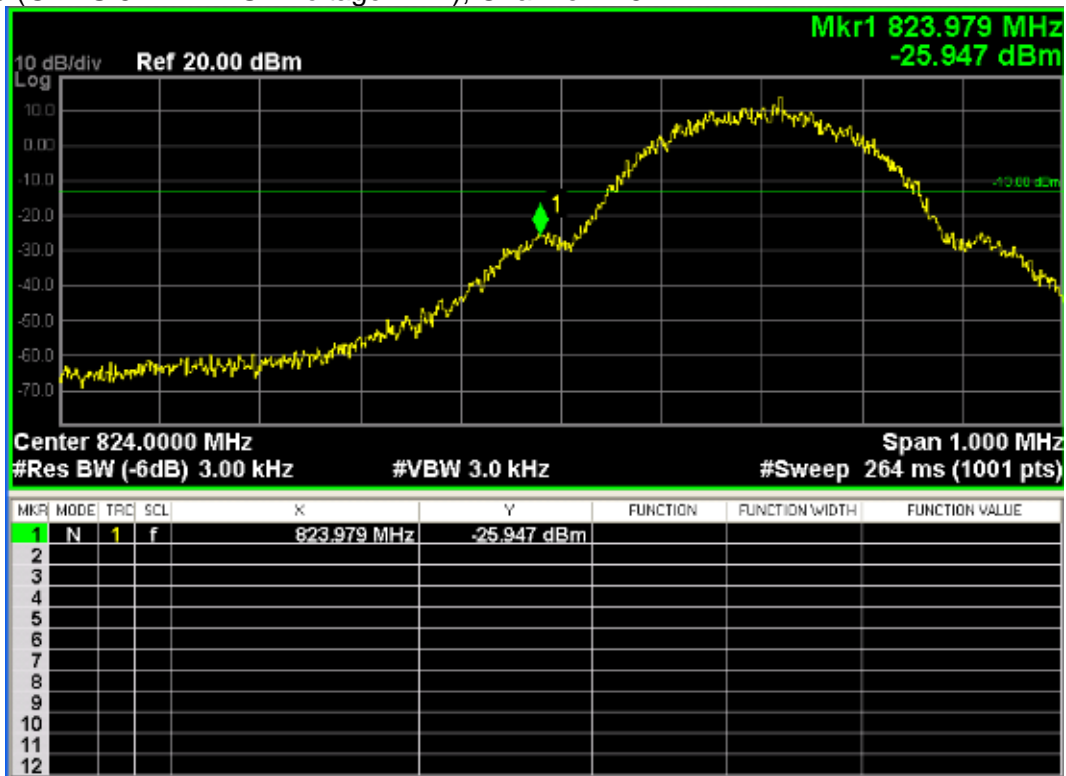


GSM850 (GPRS 8 Link EUT Voltage: 12V), Channel 251

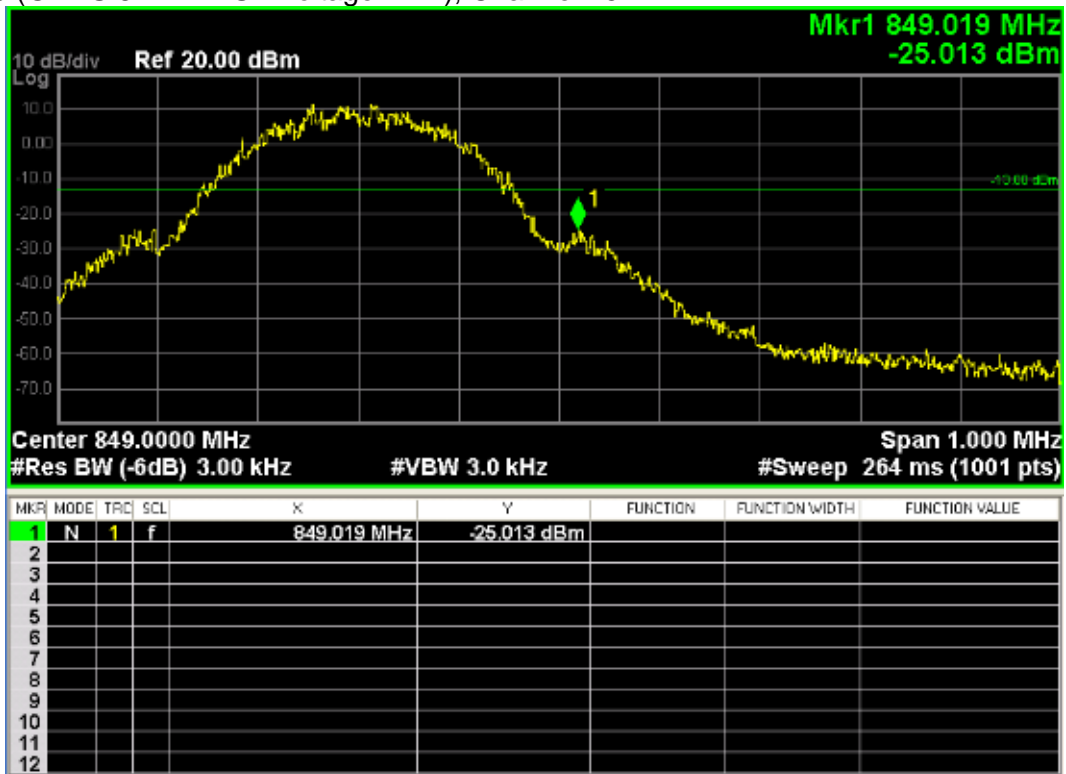


PCS 1900 (GSM Link EUT Voltage: 12V), Channel 512

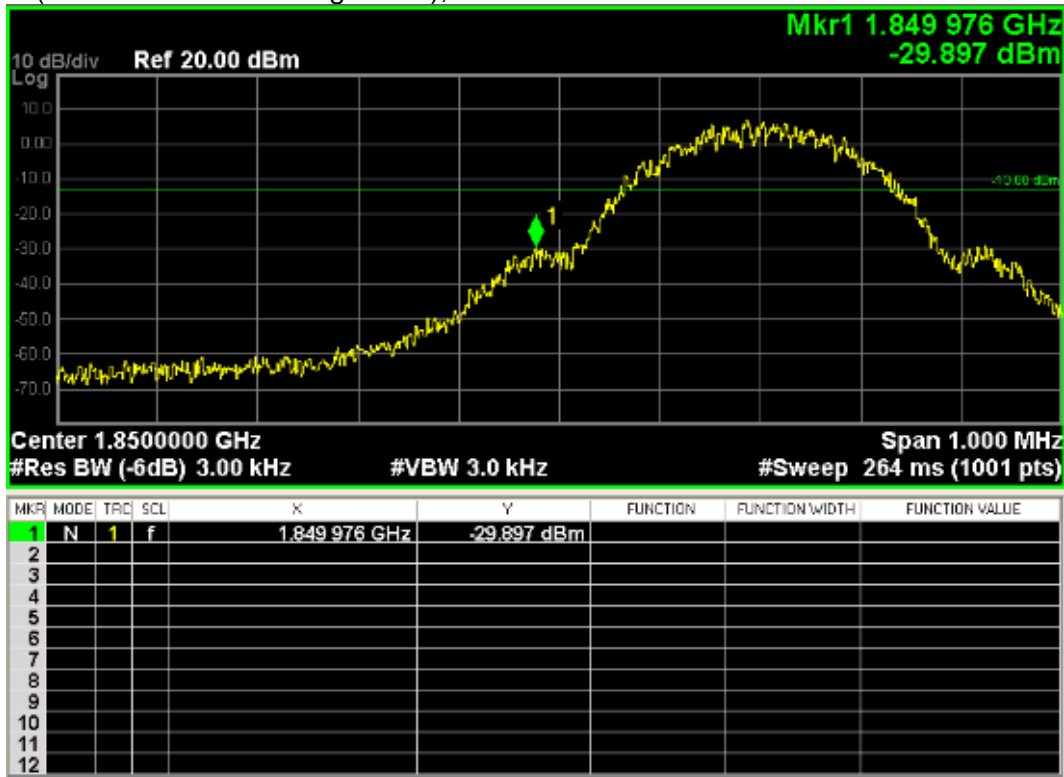


PCS 1900 (GSM Link EUT Voltage: 12V), Channel 810

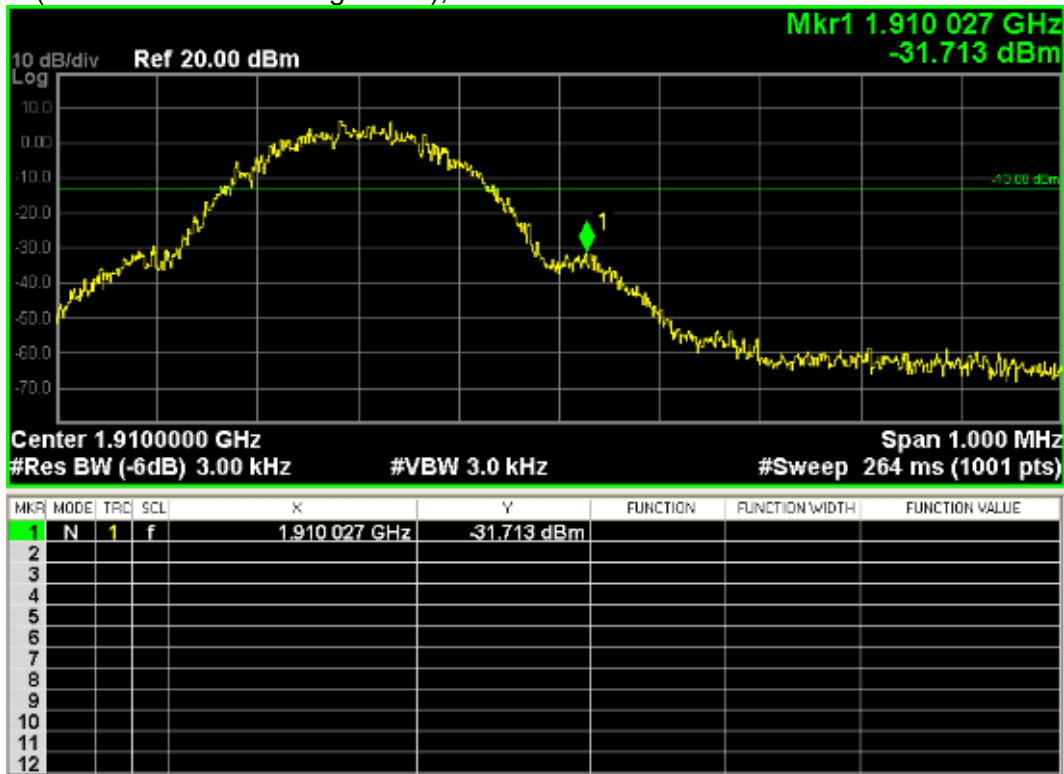


PCS 1900 (GPRS 8 Link EUT Voltage: 12V), Channel 512

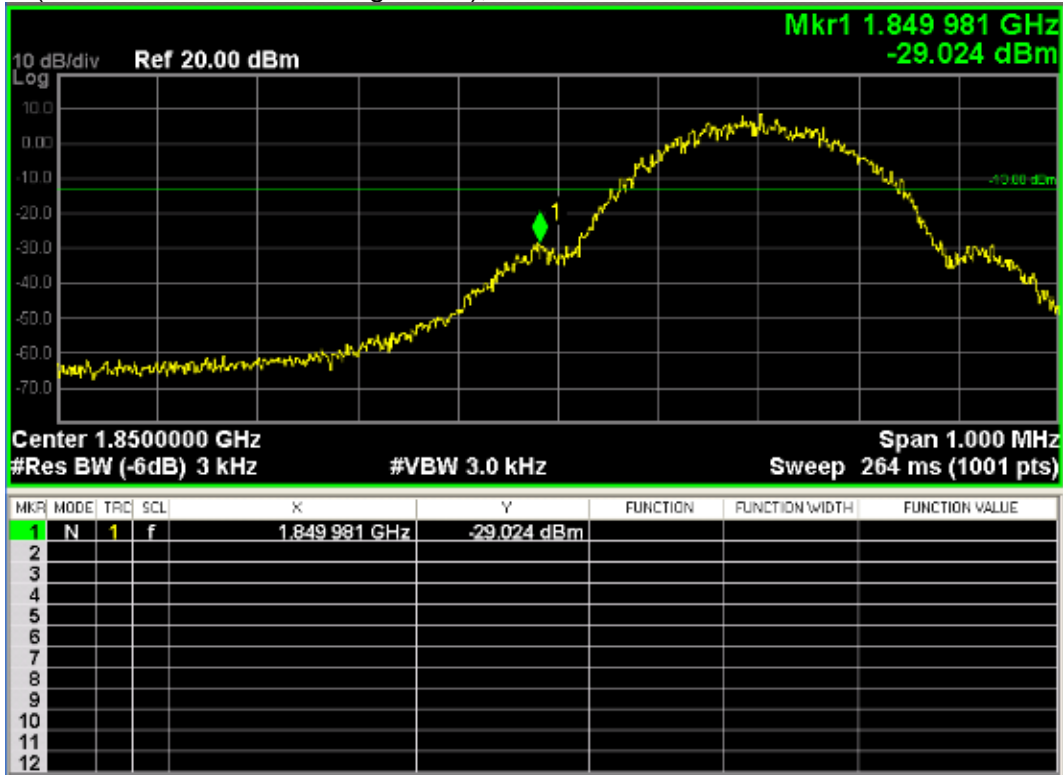


PCS 1900 (GPRS 8 Link EUT Voltage: 12V), Channel 810

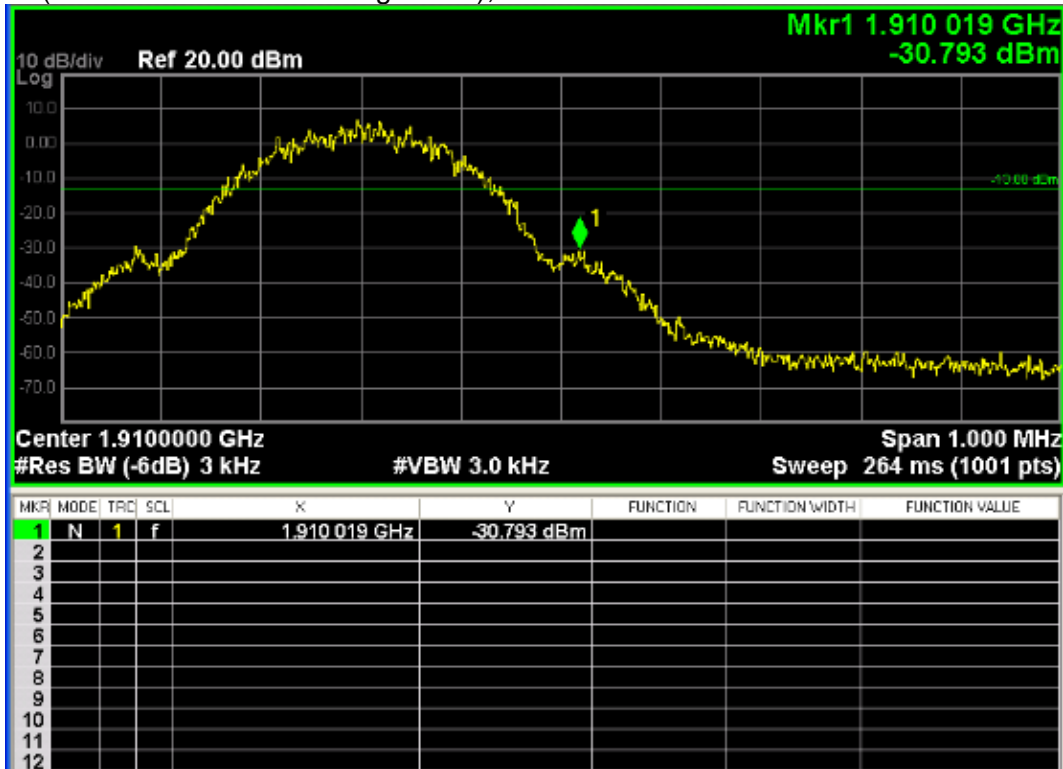


GSM850 (GSM 8 Link EUT Voltage: 24V), Channel 128

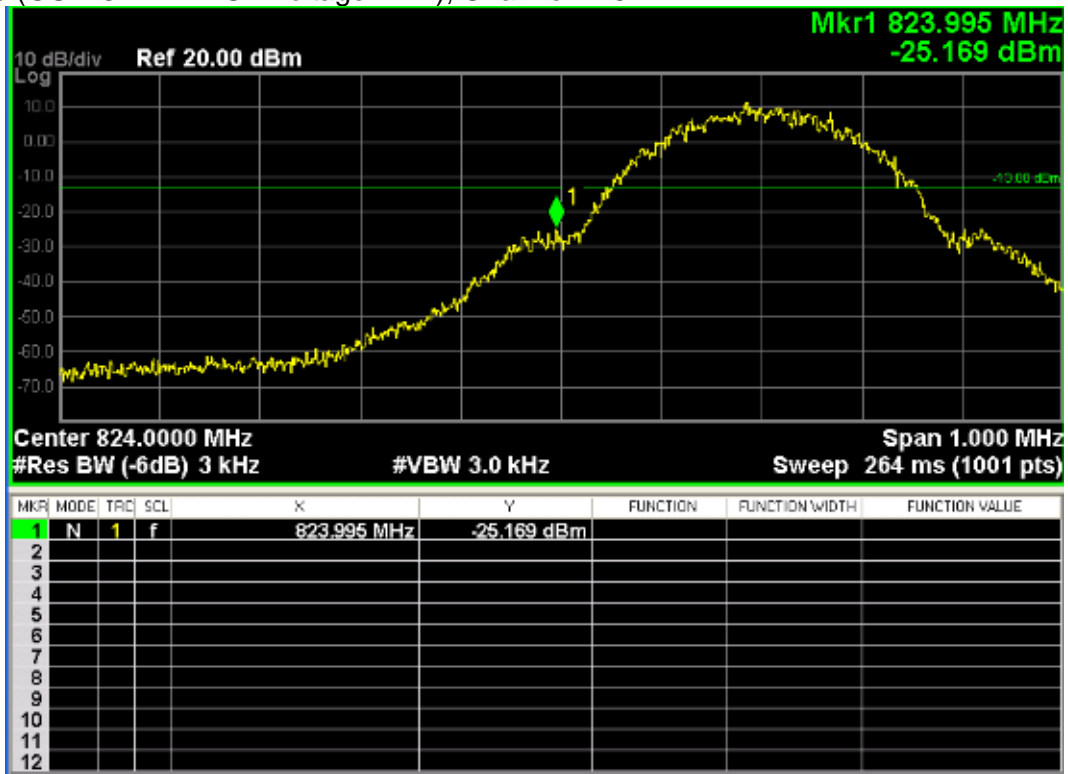


GSM850 (GSM 8 Link EUT Voltage: 24V), Channel 251

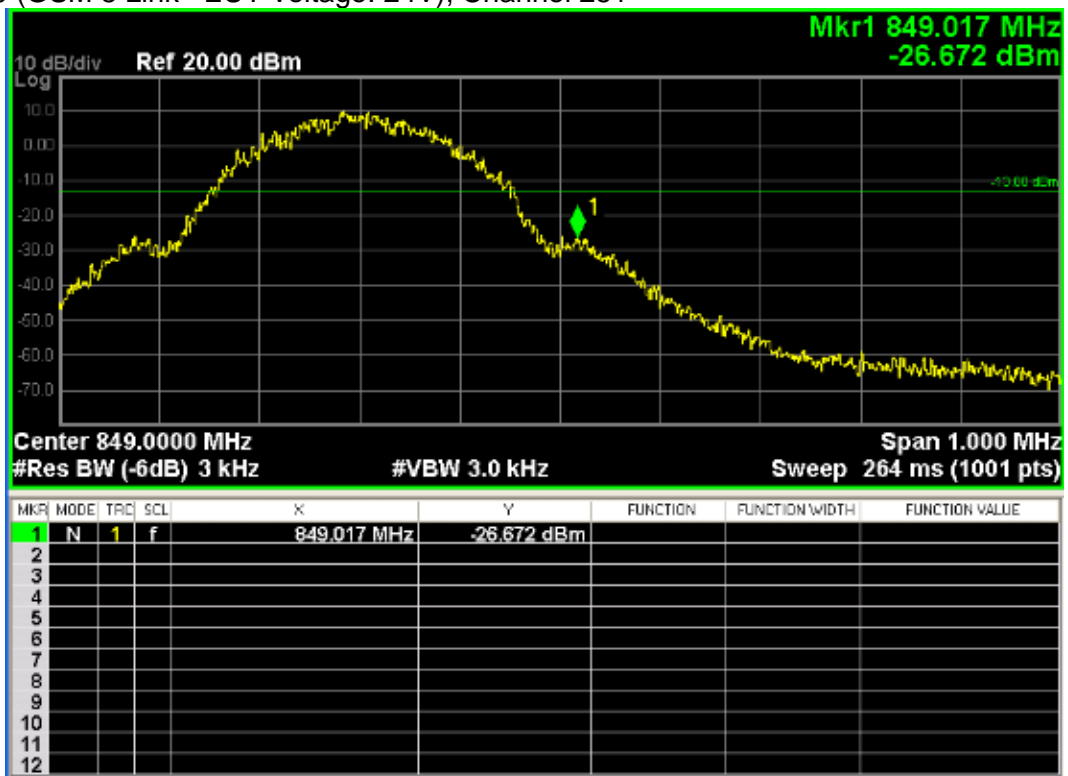


GSM850 (GPRS 8 Link EUT Voltage: 24V), Channel 128

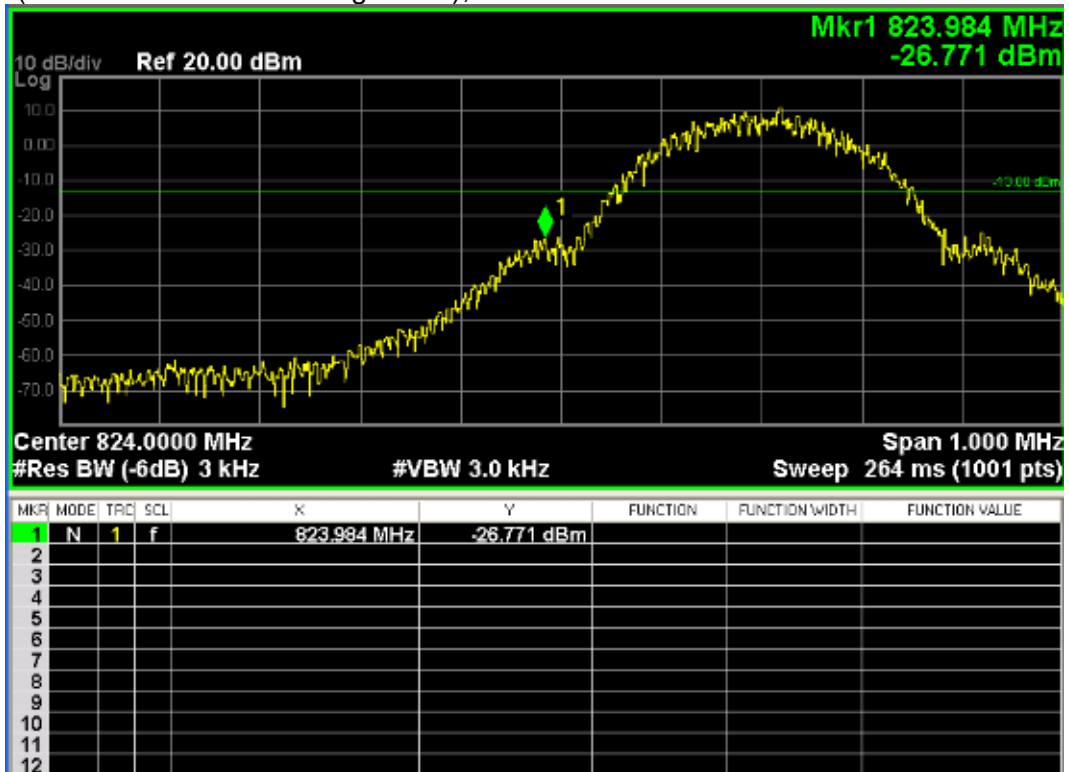


GSM850 (GPRS 8 Link EUT Voltage: 24V), Channel 251

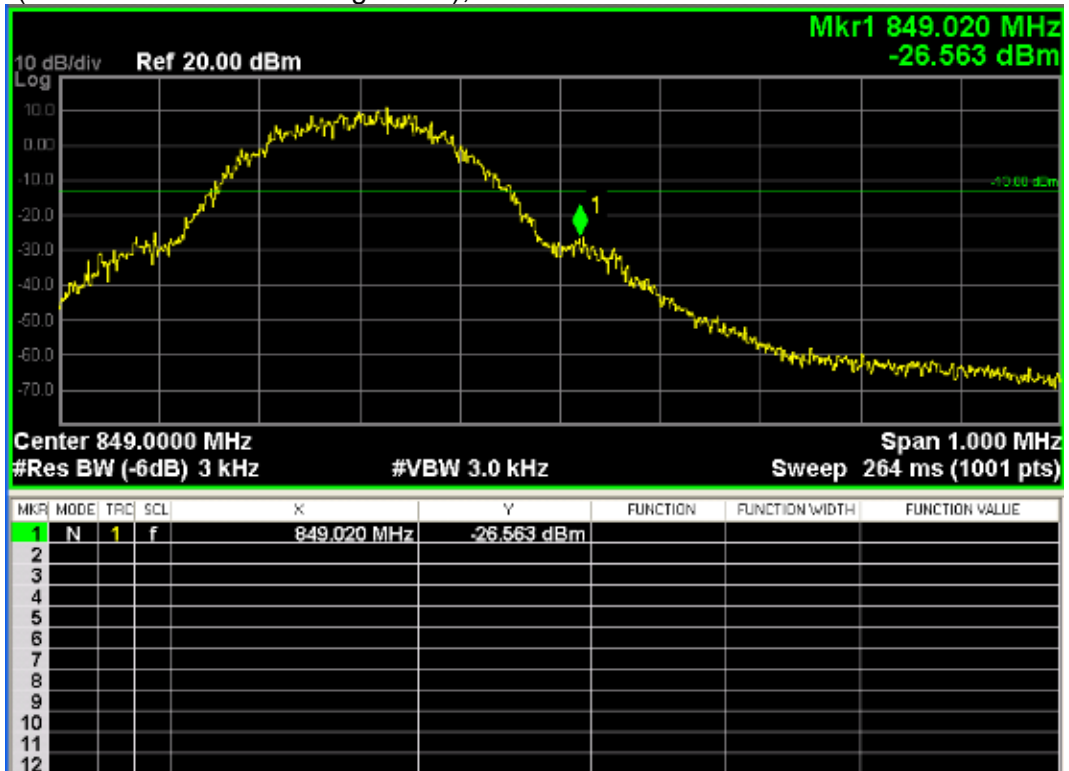


PCS1900 (GSM 8 Link EUT Voltage: 24V), Channel 512

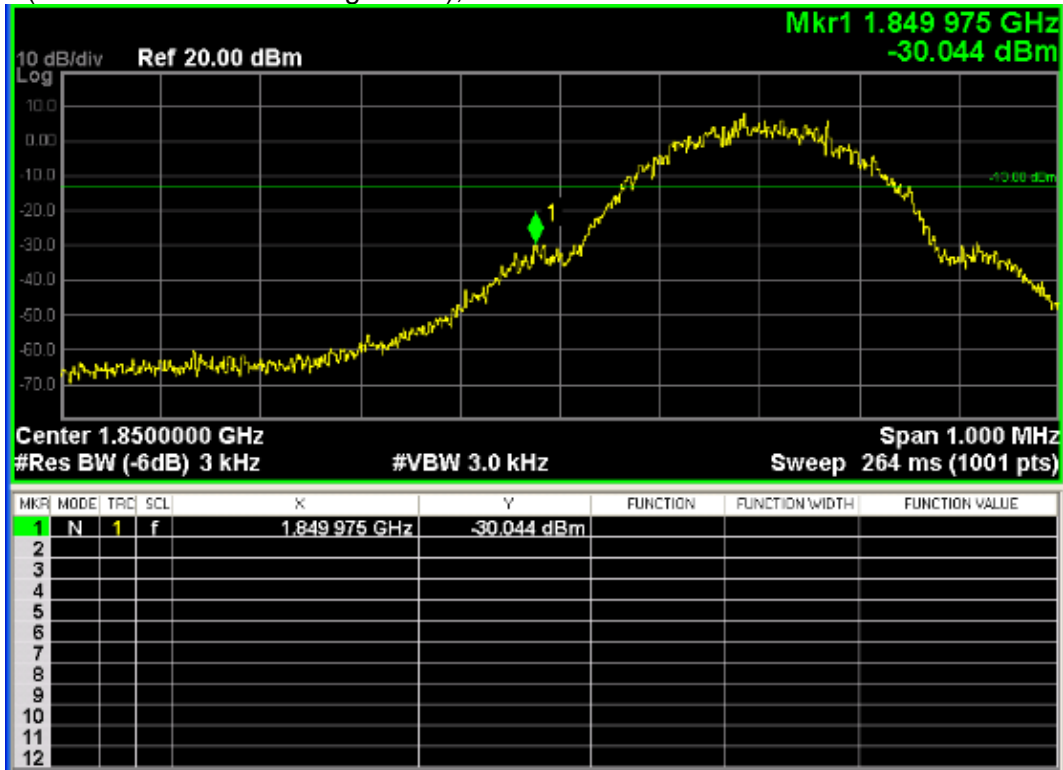


PCS1900 (GSM 8 Link EUT Voltage: 24V), Channel 810

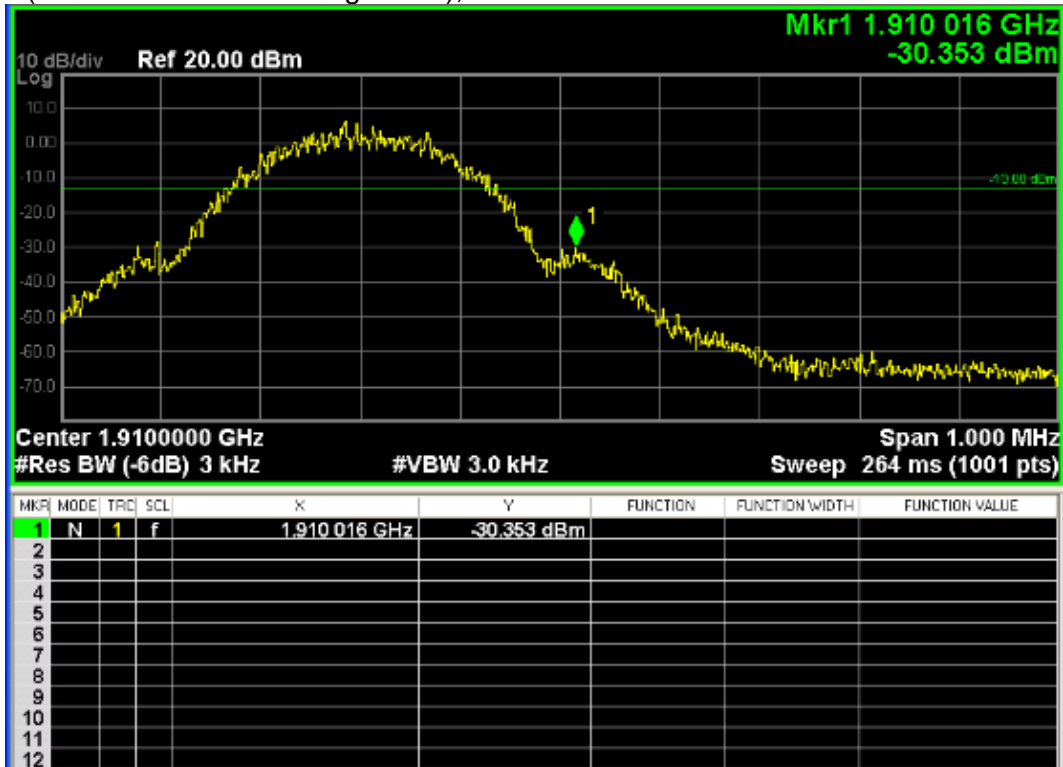

PCS1900 (GPRS 8 Link EUT Voltage: 24V), Channel 512

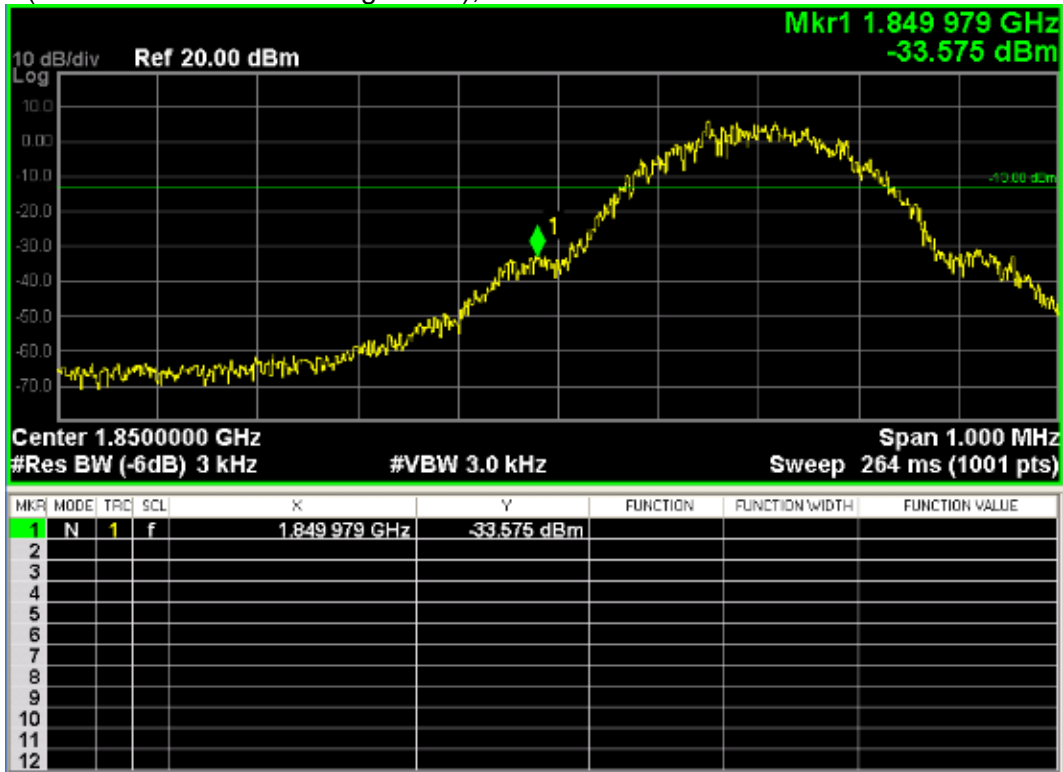

PCS1900 (GPRS 8 Link EUT Voltage: 24V), Channel 810

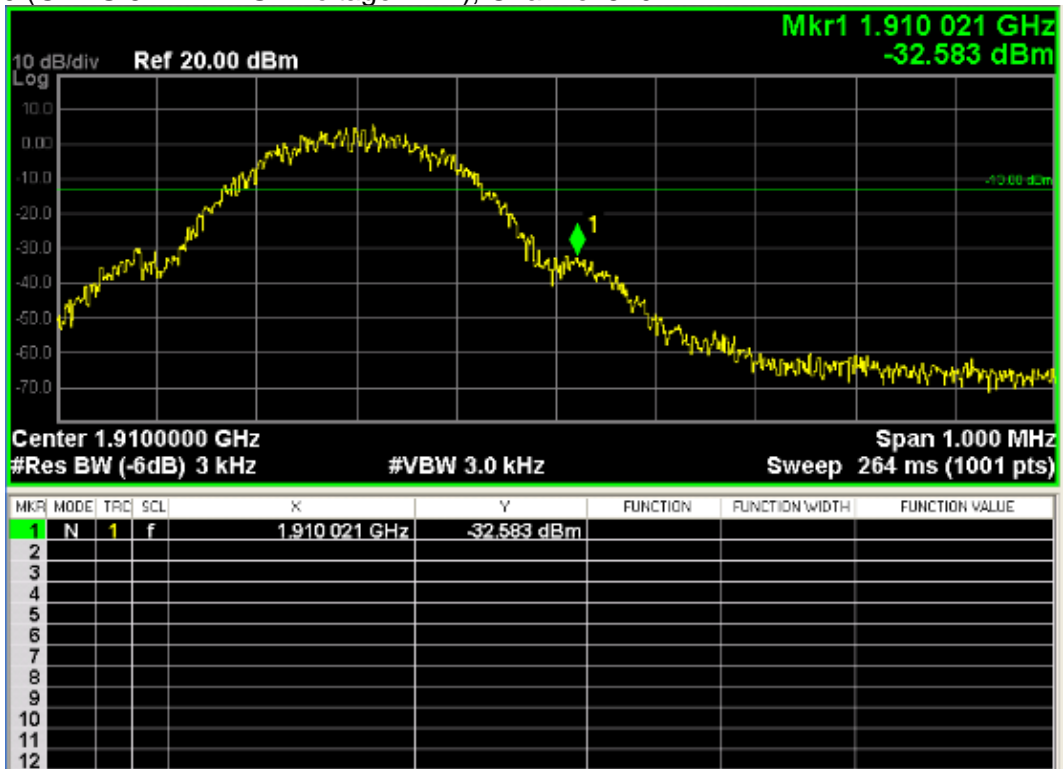

6.Spurious Emission


6.1. Test Equipment

Instrument	Manufacturer	Model	Serial No.	Cali. Due Date
Spectrum Analyzer	Agilent	N9038A	MY51210142	2014.07.27
Radio Communication Tester	Agilent	E5515C	GB46581718	2014.10.24
Signal Generator	Agilent	N5183A	MY50140938	2015.01.03
Preamplifier	CEM	EM30180	3008A0245	2015.03.01
DC Power Supply	Agilent	6612C	MY43002989	2015.03.04
Loop Antenna	Schwarzbeck	FMZB1519	1519-020	2015.03.26
Bilog Antenna	Schwarzbeck	VULB9160	9160-3316	2014.07.19
VHF-UHF-Biconical Antenna	Schwarzbeck	VUBA9117	9117-263	2014.07.19
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-942	2014.07.19
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-943	2014.07.19


The measure equipment had been calibrated once a year.

6.2. Test Setup


Conducted Spurious Emission Measurement:

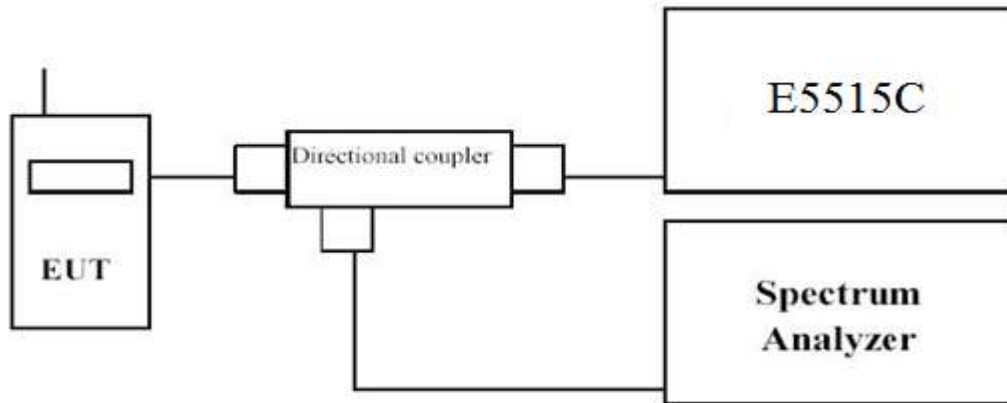


Radiated Spurious Measurement: below 30MHz

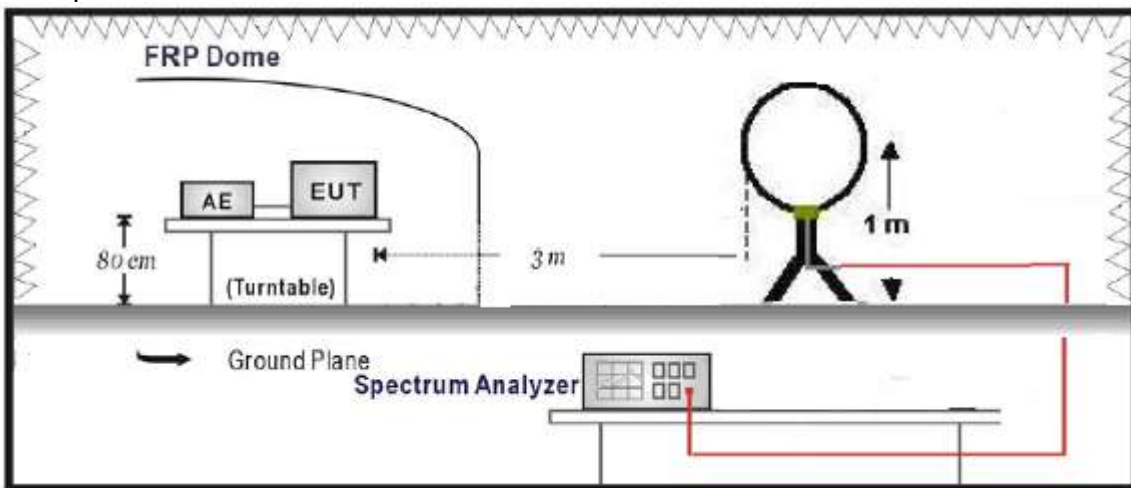

Radiated Spurious Measurement: 30MHz to 1GHz

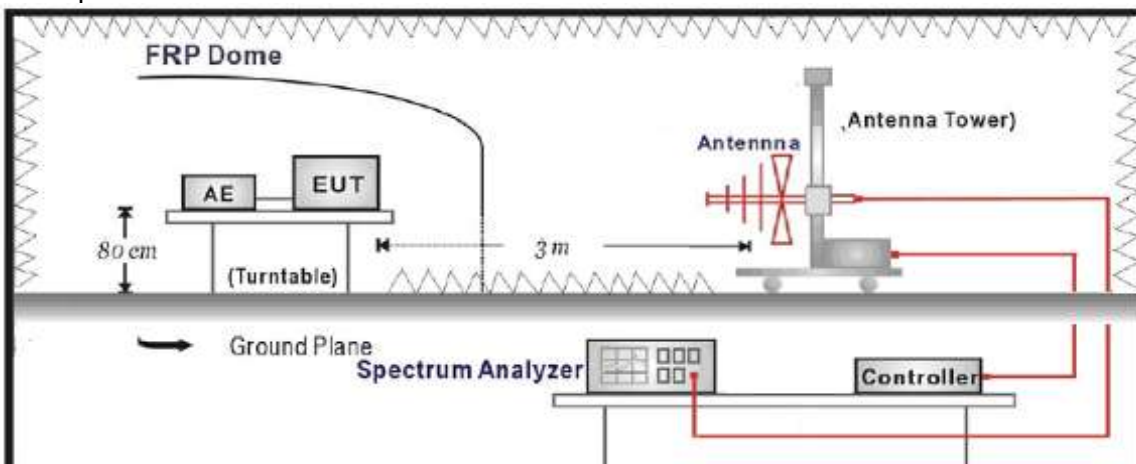

Radiated Spurious Measurement: above 1GHz

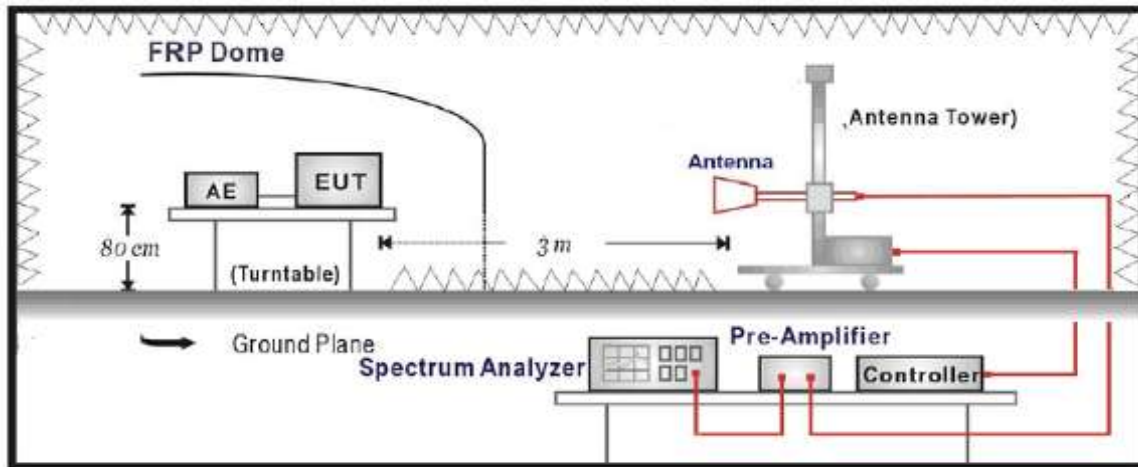

6.3. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

6.4. Test Procedure

Conducted Spurious Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and E5515C by a Directional Coupler.
- EUT Communicate with E5515C, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set at 1 MHz, sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

Radiated Spurious Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The maximum signal level detected by the measuring receiver shall be noted.
- The transmitter shall be replaced by a substitution antenna.
- The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- The substitution antenna shall be connected to a calibrated signal generator.
- If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.

- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. The frequency range was checked up to 10th harmonic.
- r. Test site anechoic chamber refer to ANSI C63.4: 2009


6.5. Uncertainty


The measurement uncertainty is defined as 3.2 dB for Radiated Power Measurement.

6.6. Test Result


Conducted Spurious Measurement:

GSM850 (GSM Link EUT Voltage: 12V), Channel 189


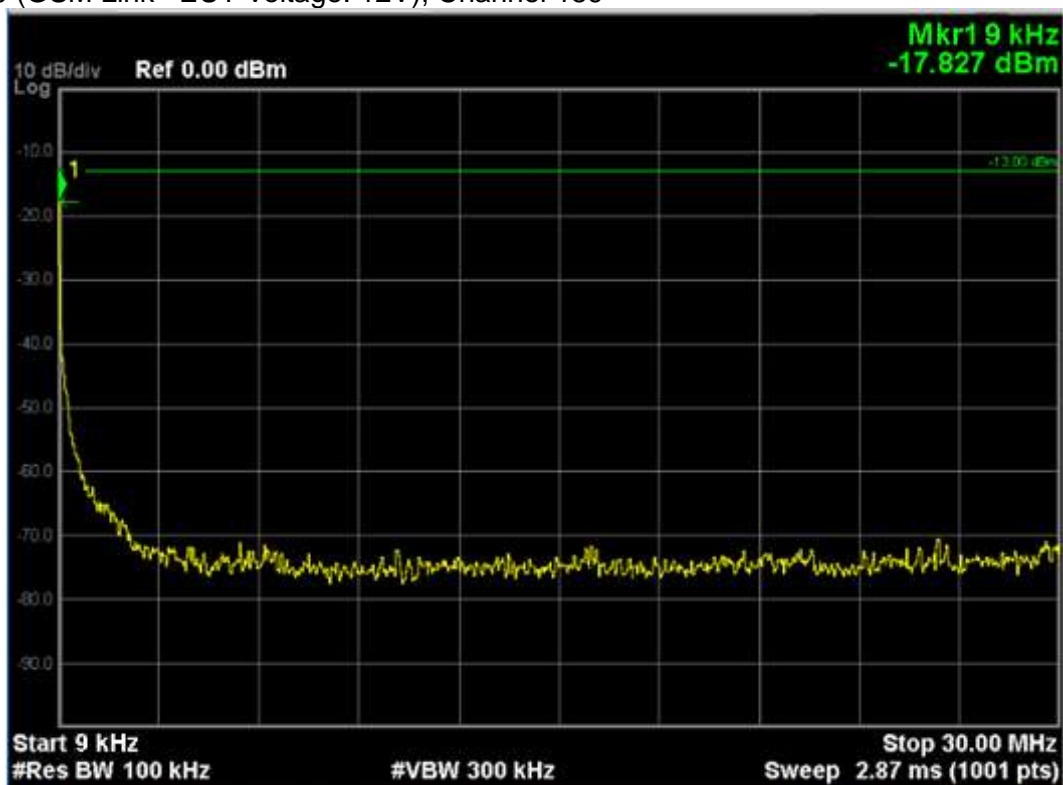


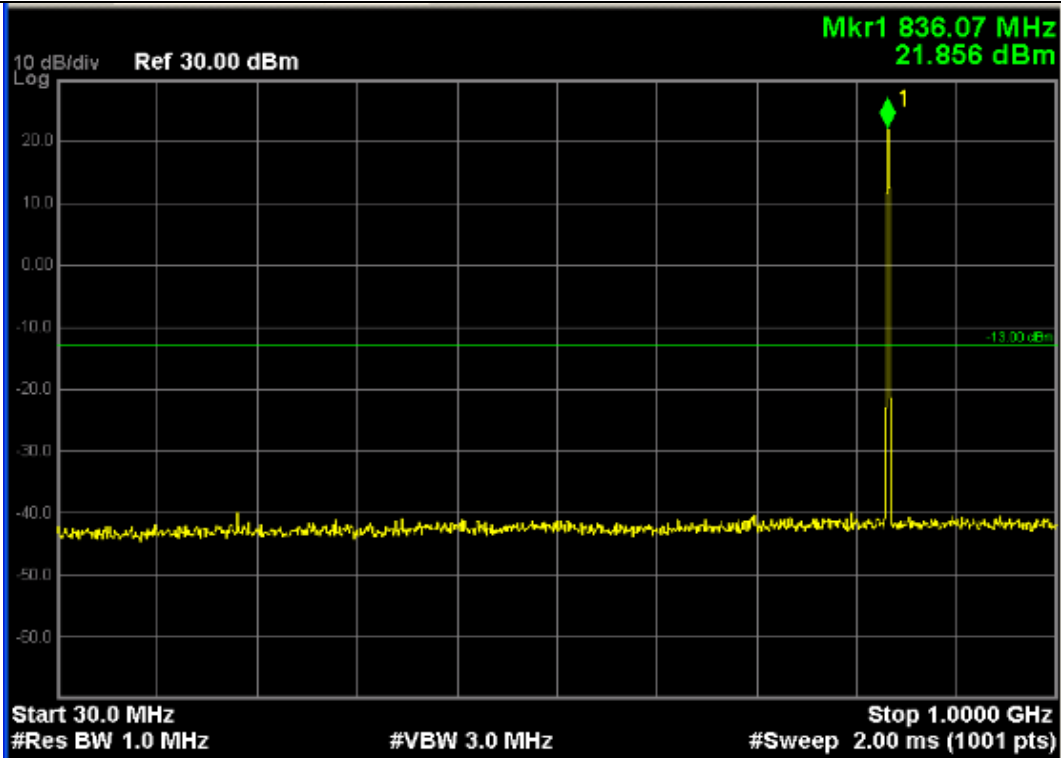


Note: The signal at point 1 is carrier

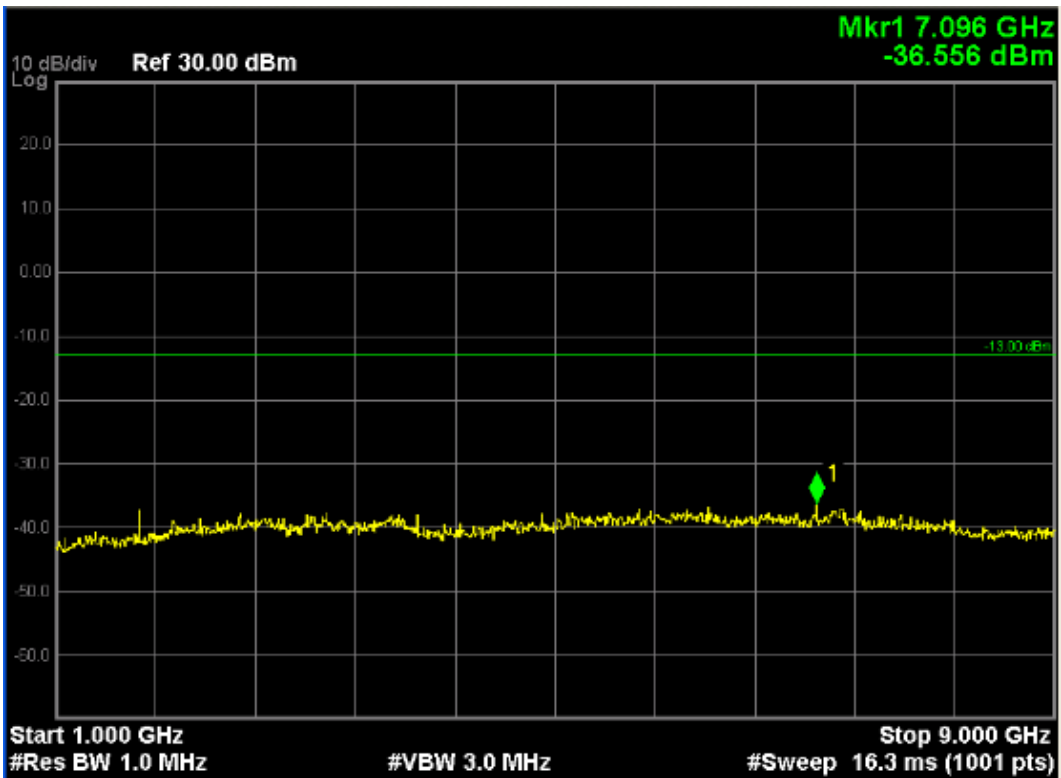



GSM850 (GPRS 8 Link EUT Voltage: 12V), Channel 189

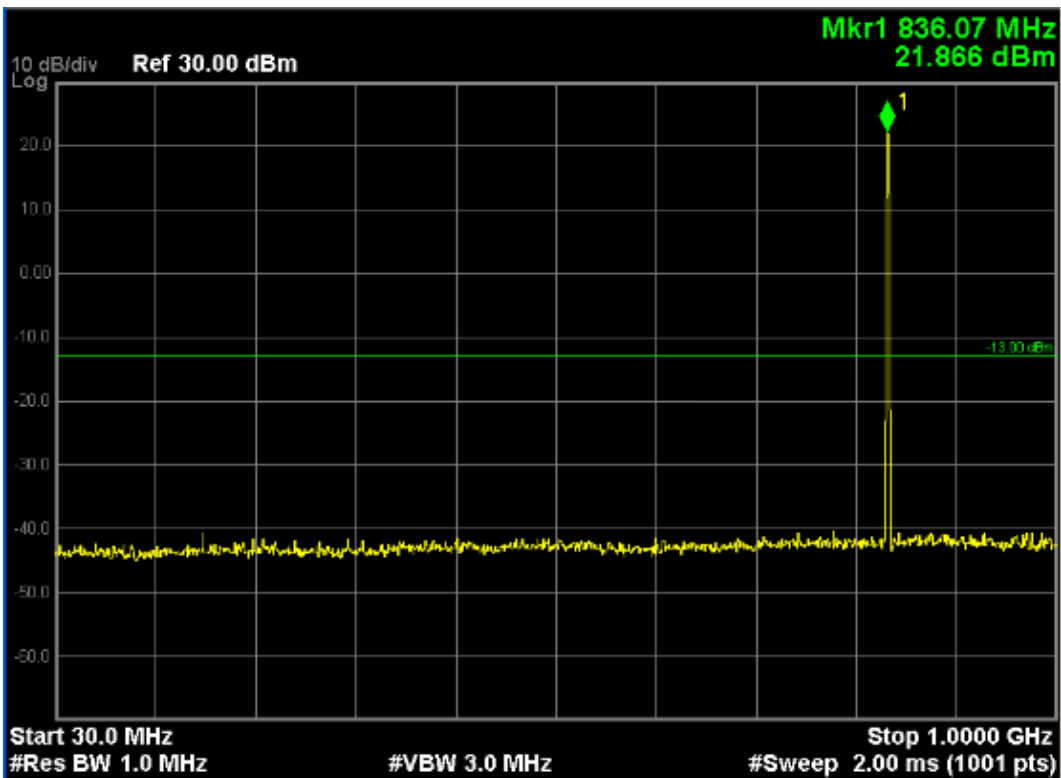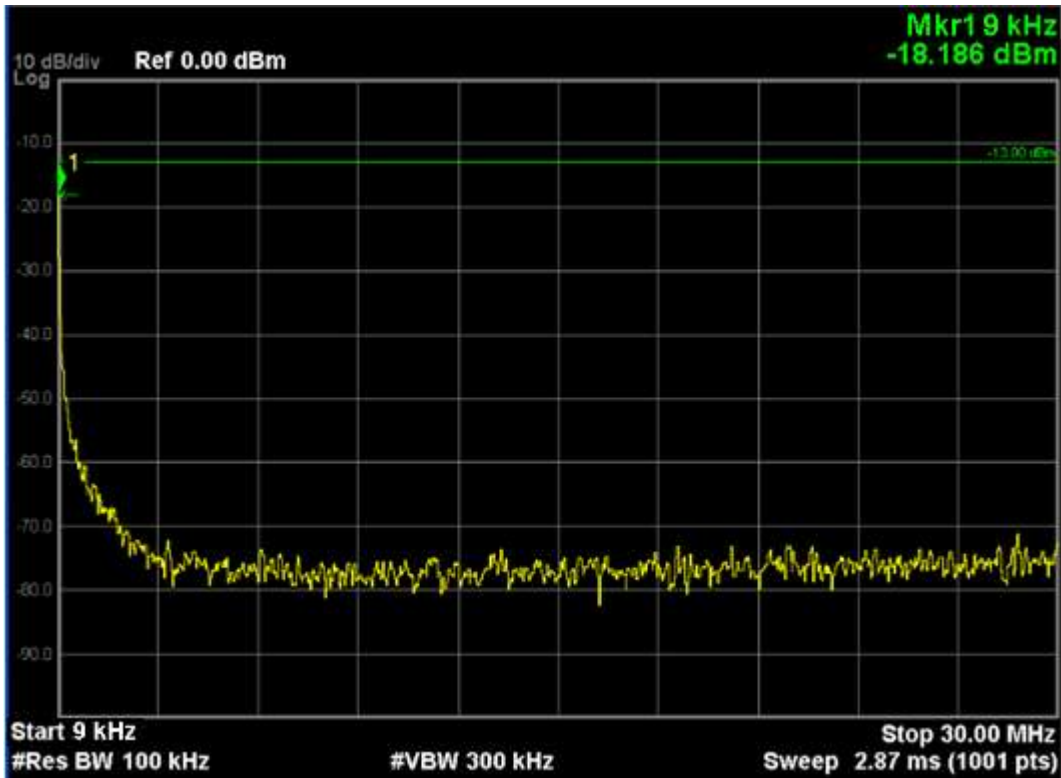


Note: The signal at point 1 is carrier

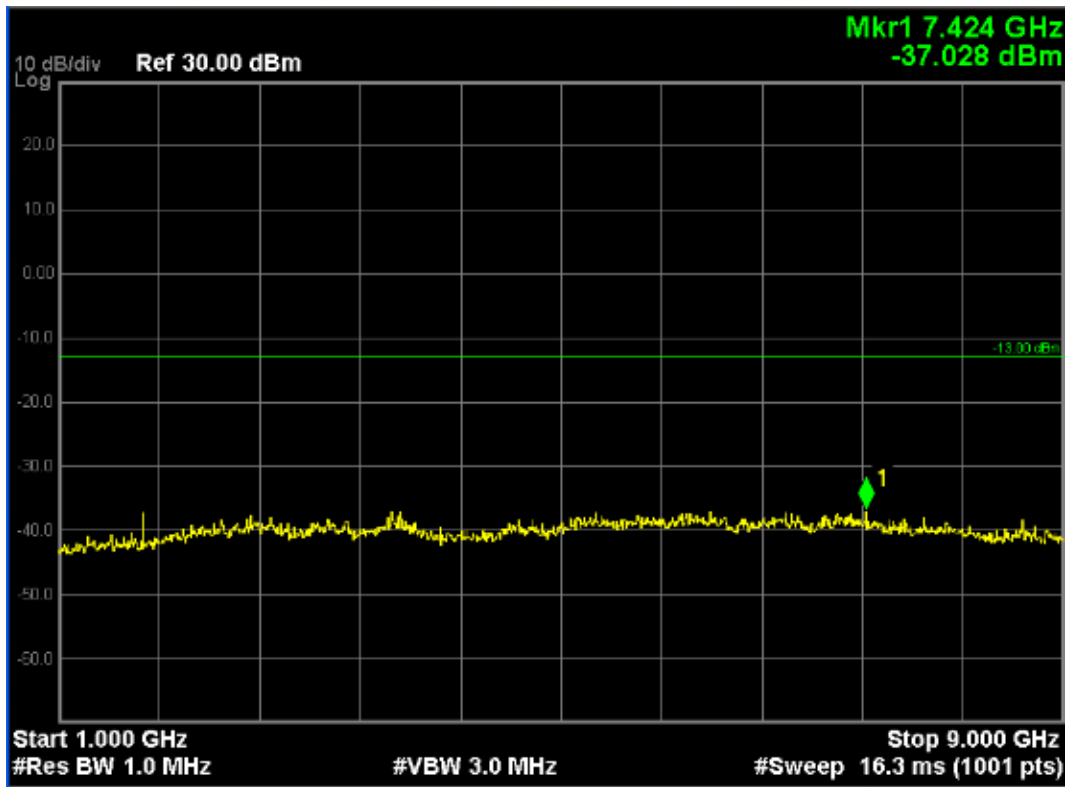



PCS1900 (GSM Link EUT Voltage: 12V), Channel 661

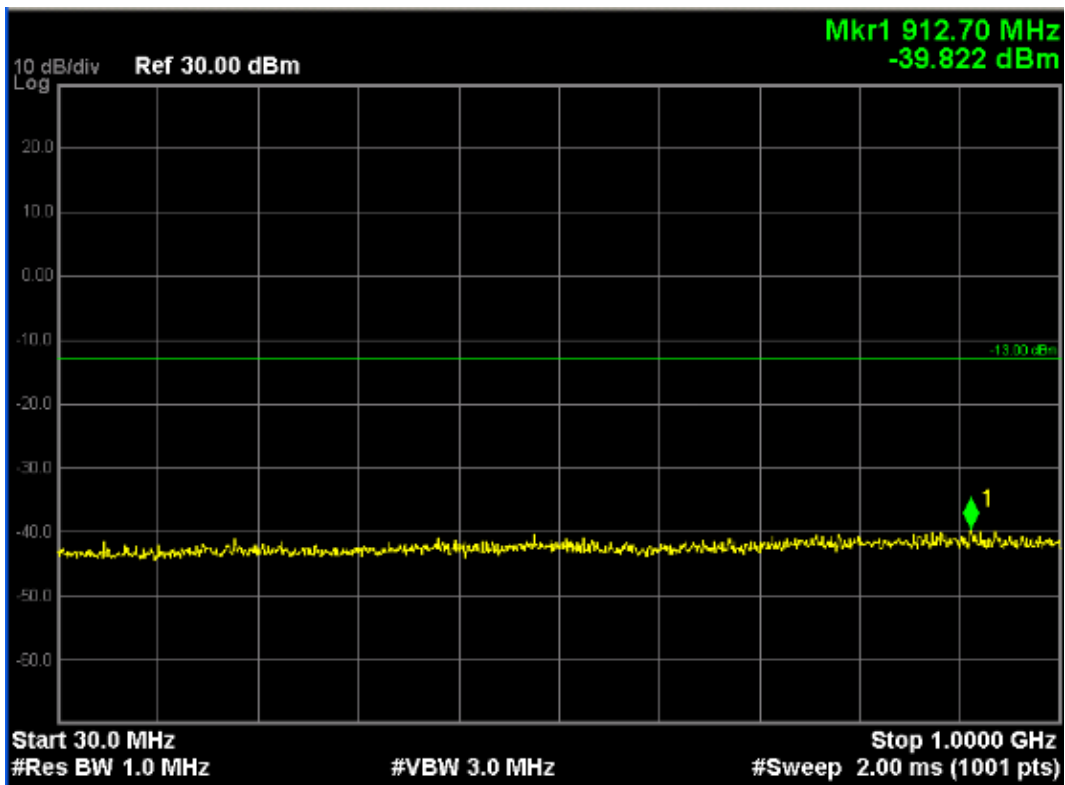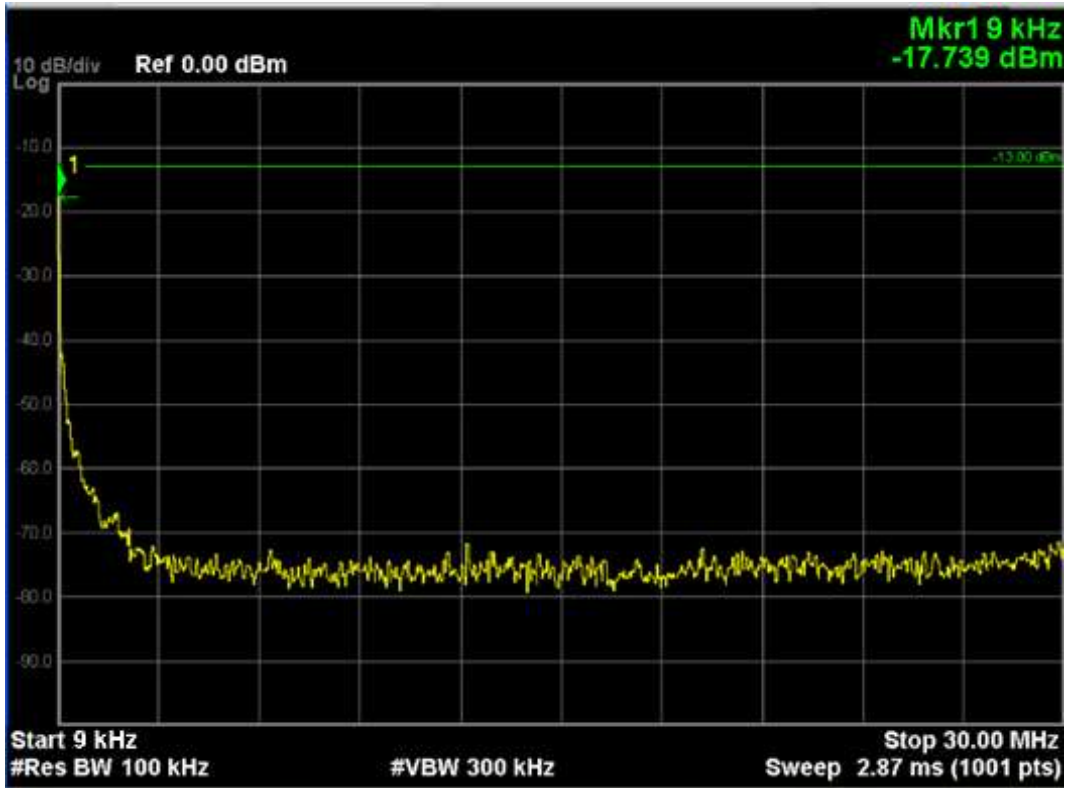


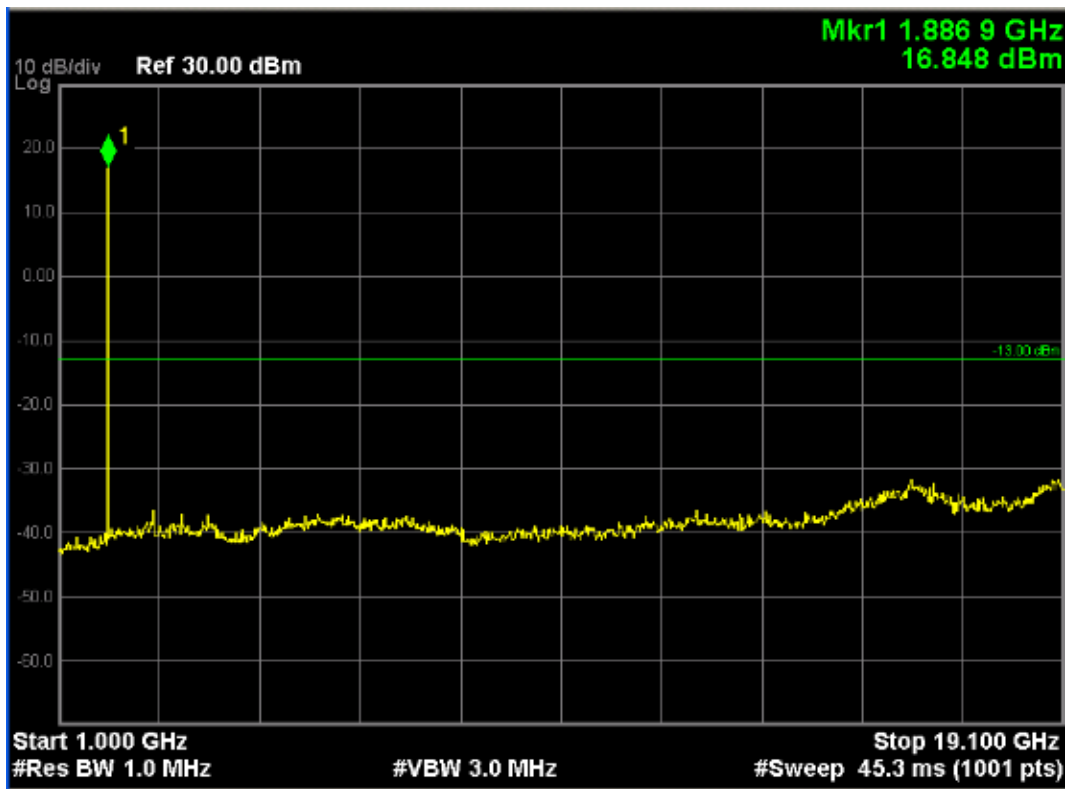

Note: The signal at point 1 is carrier



PCS1900 (GPRS 8 Link EUT Voltage: 12V), Channel 661:

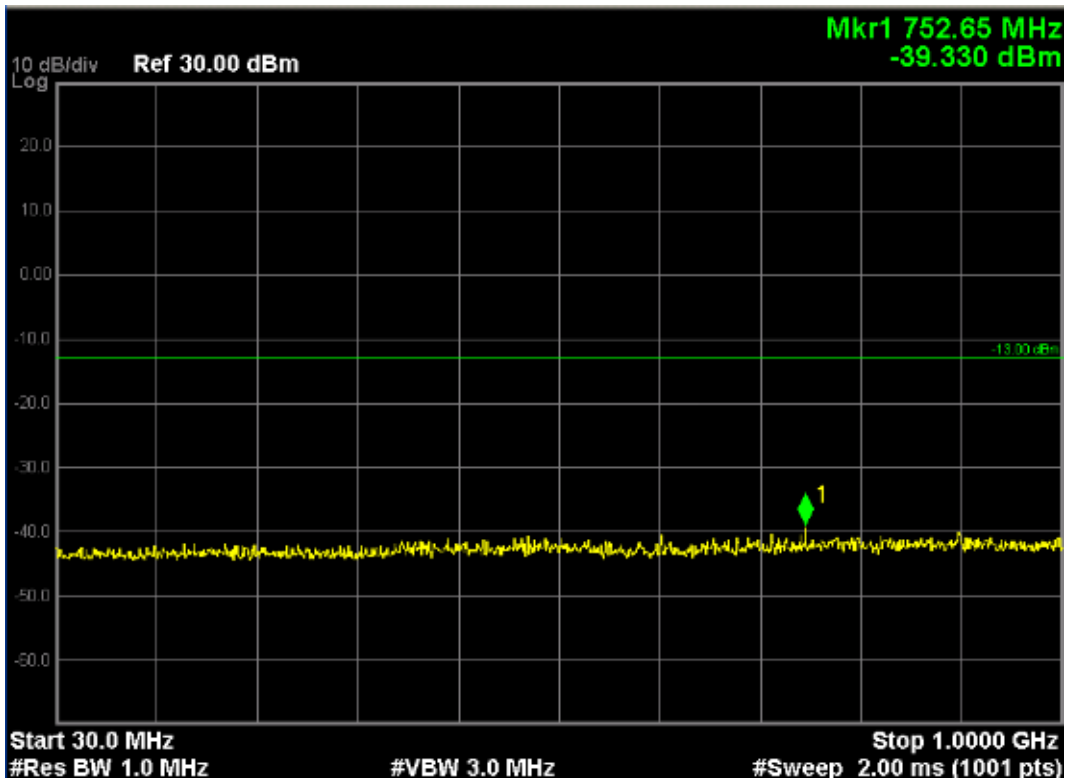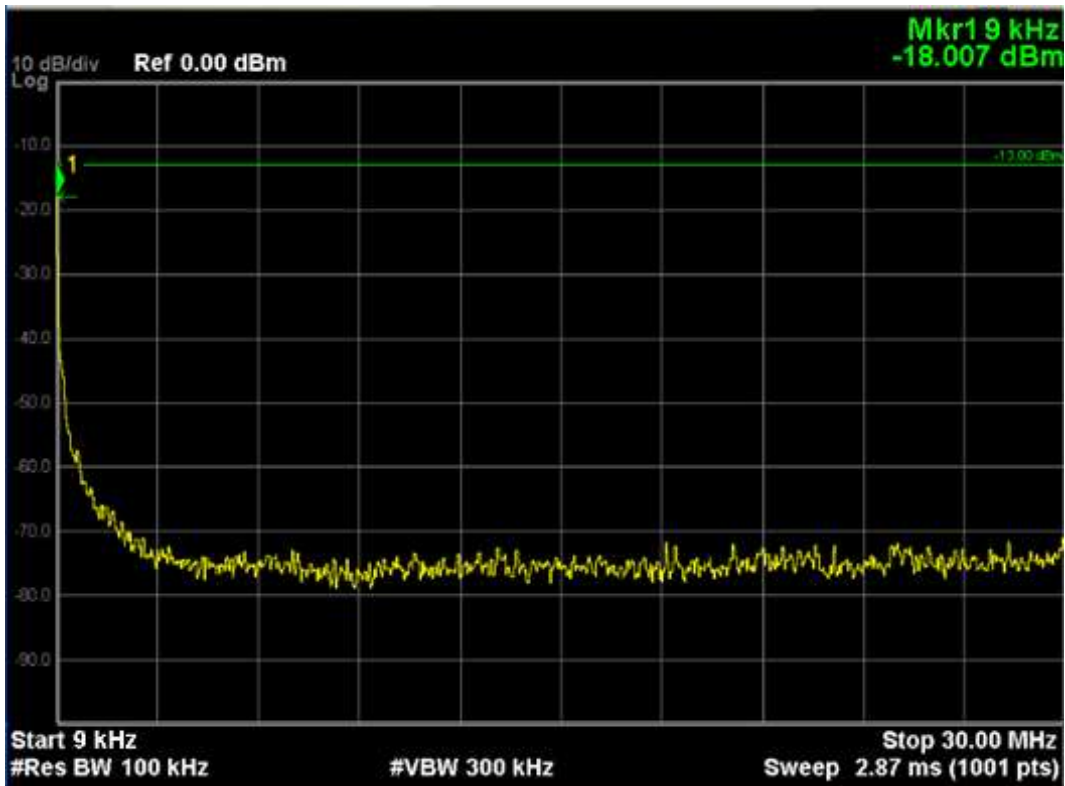

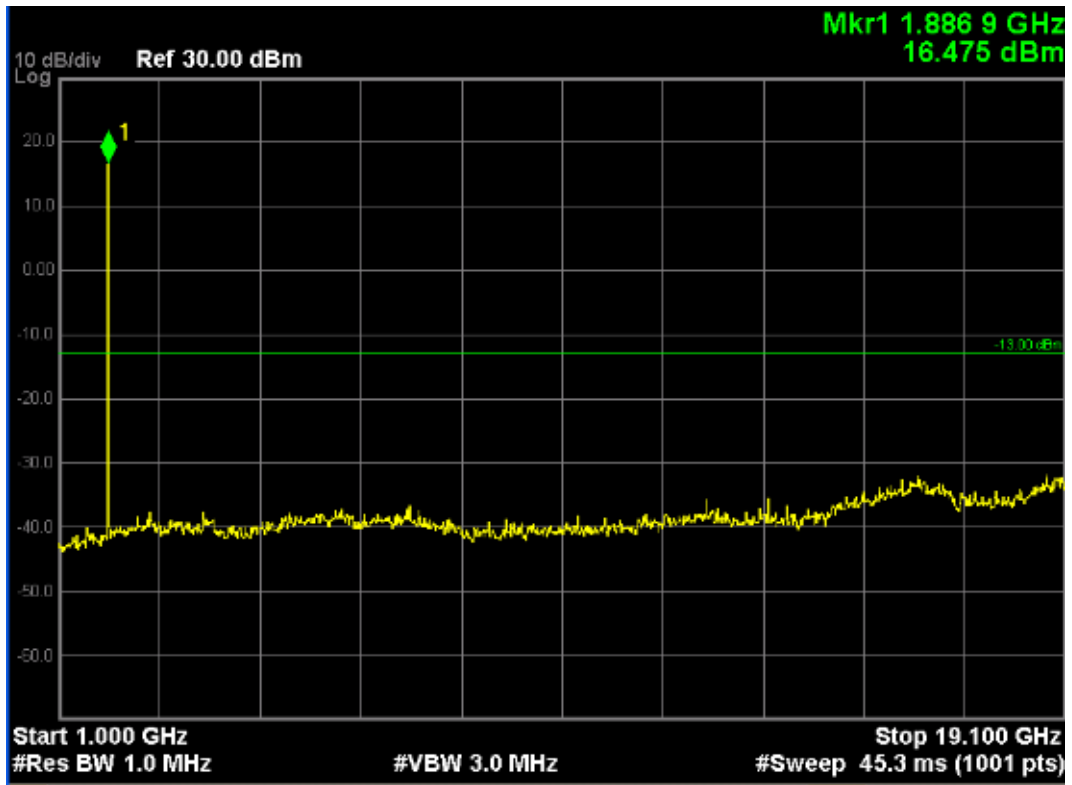


Note: The signal at point 1 is carrier



GSM850 (GSM Link EUT Voltage: 24V), Channel 189

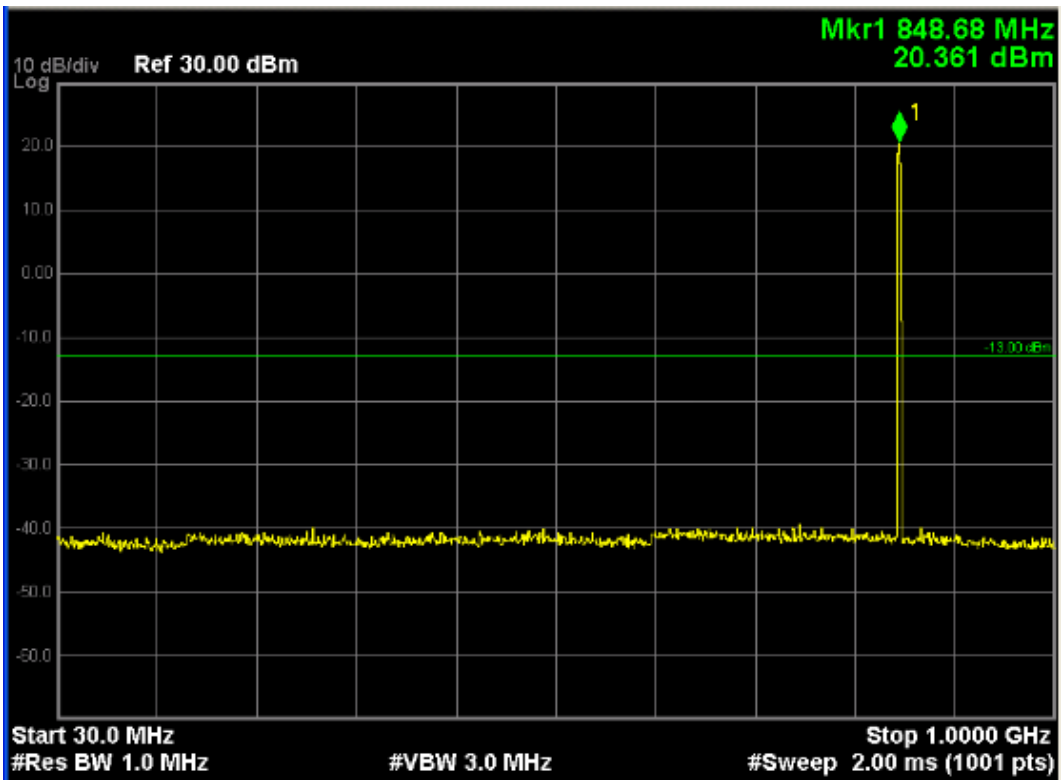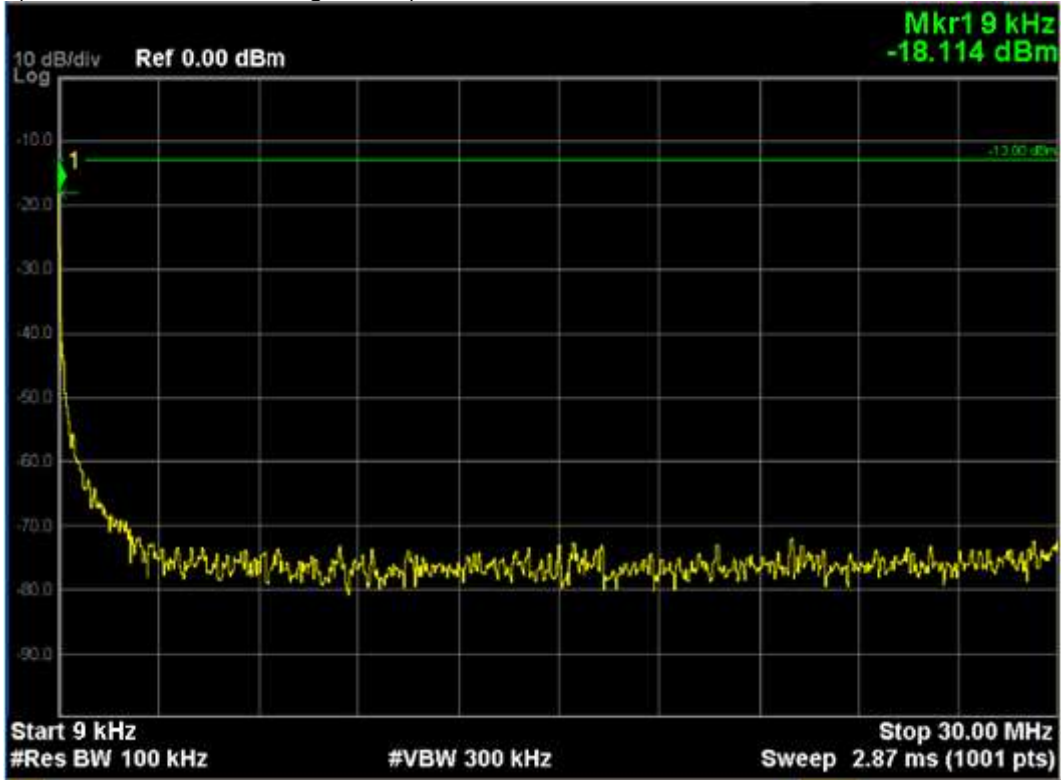


Note: The signal at point 1 is carrier

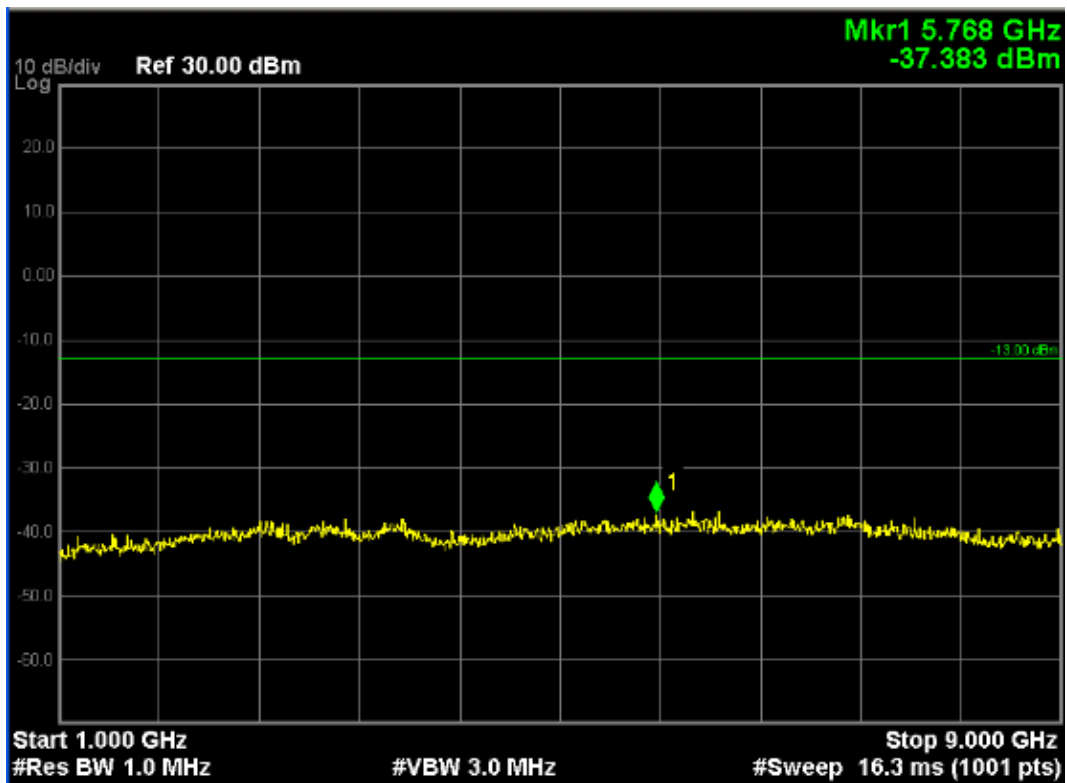



GSM850 (GPRS 8 Link EUT Voltage: 24V), Channel 189

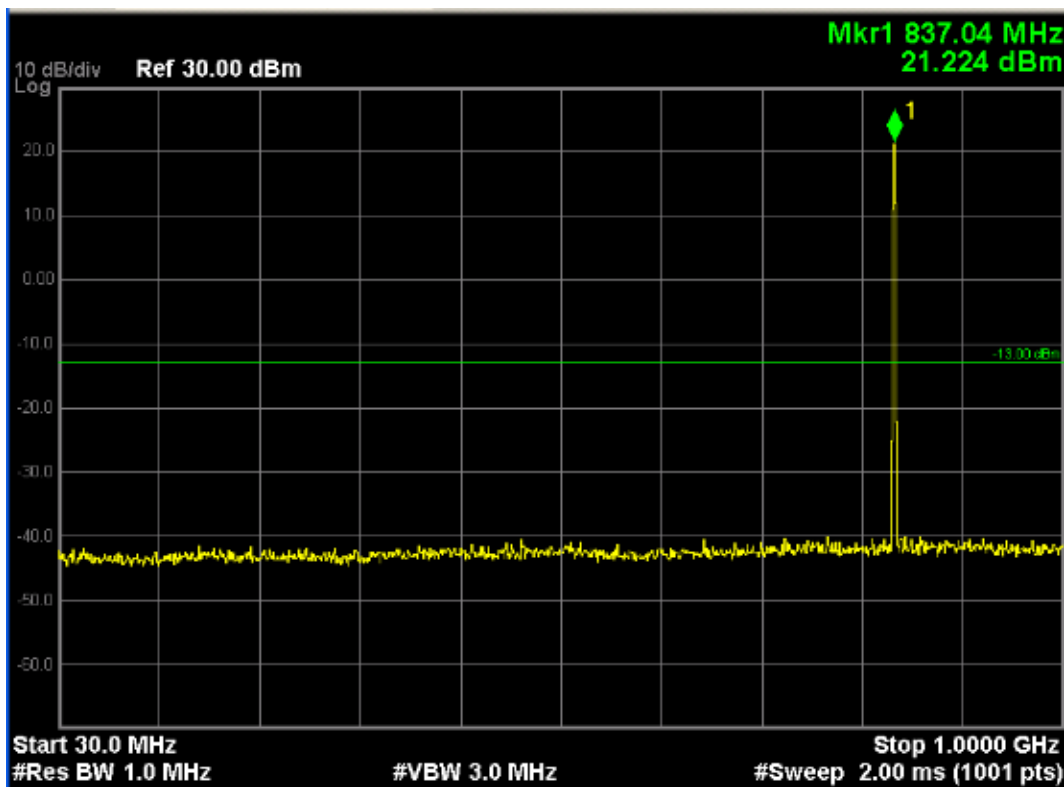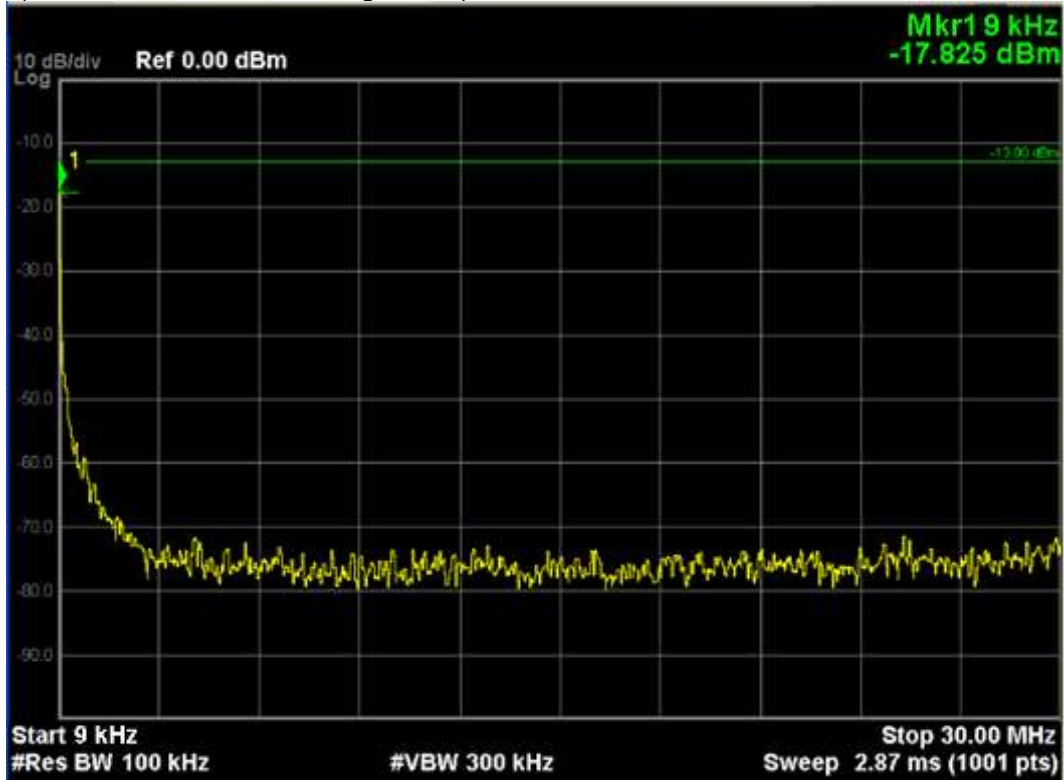


Note: The signal at point 1 is carrier

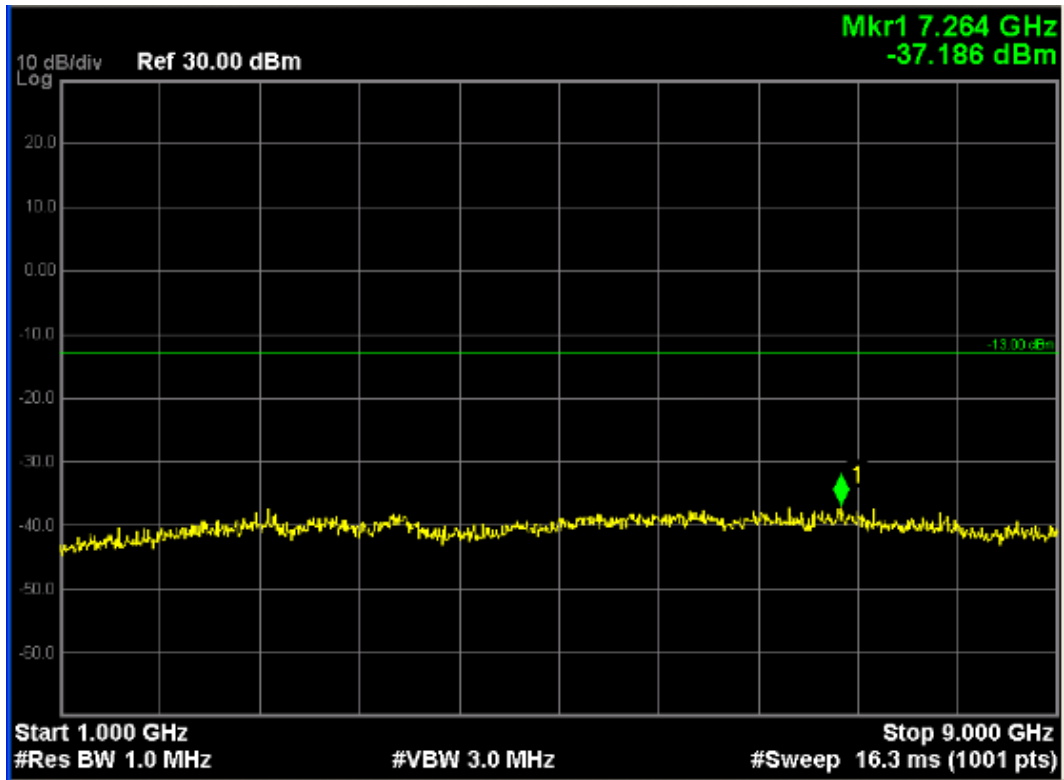



PCS1900 (GSM Link EUT Voltage: 24V), Channel 661

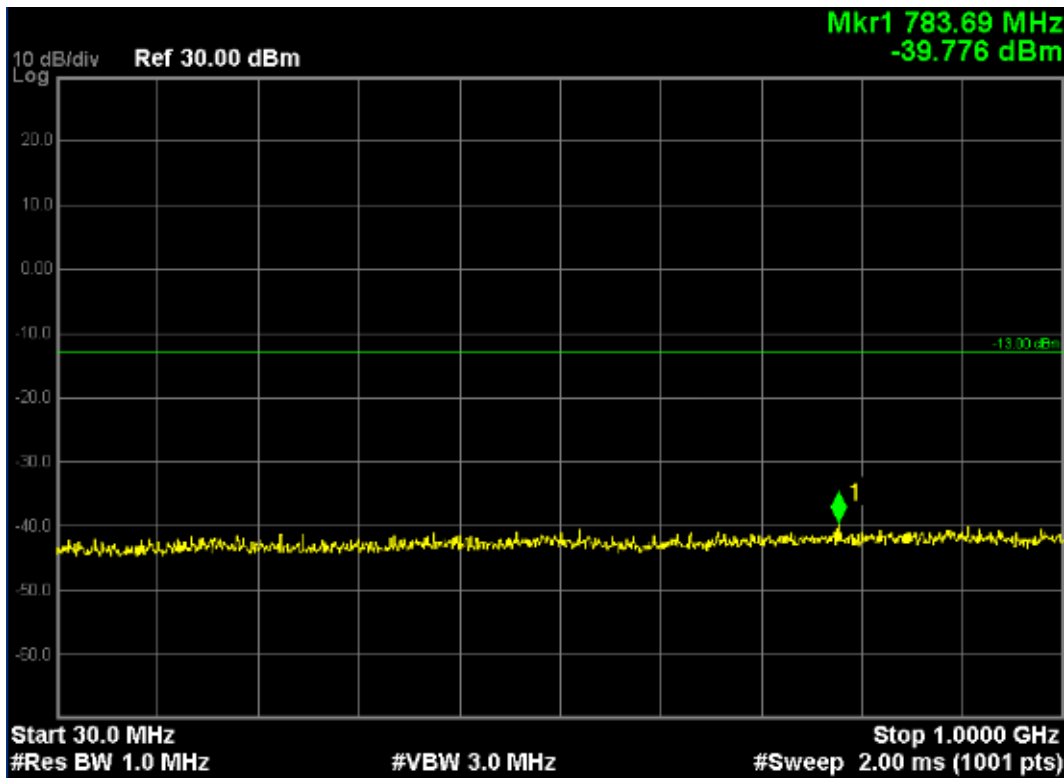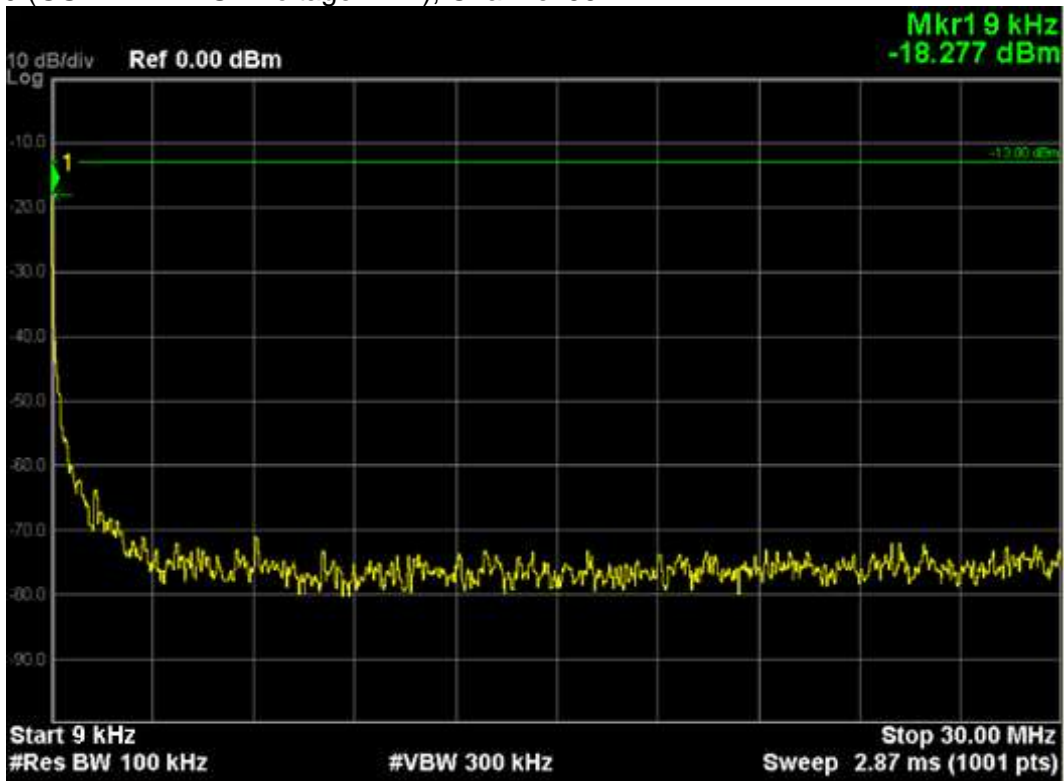


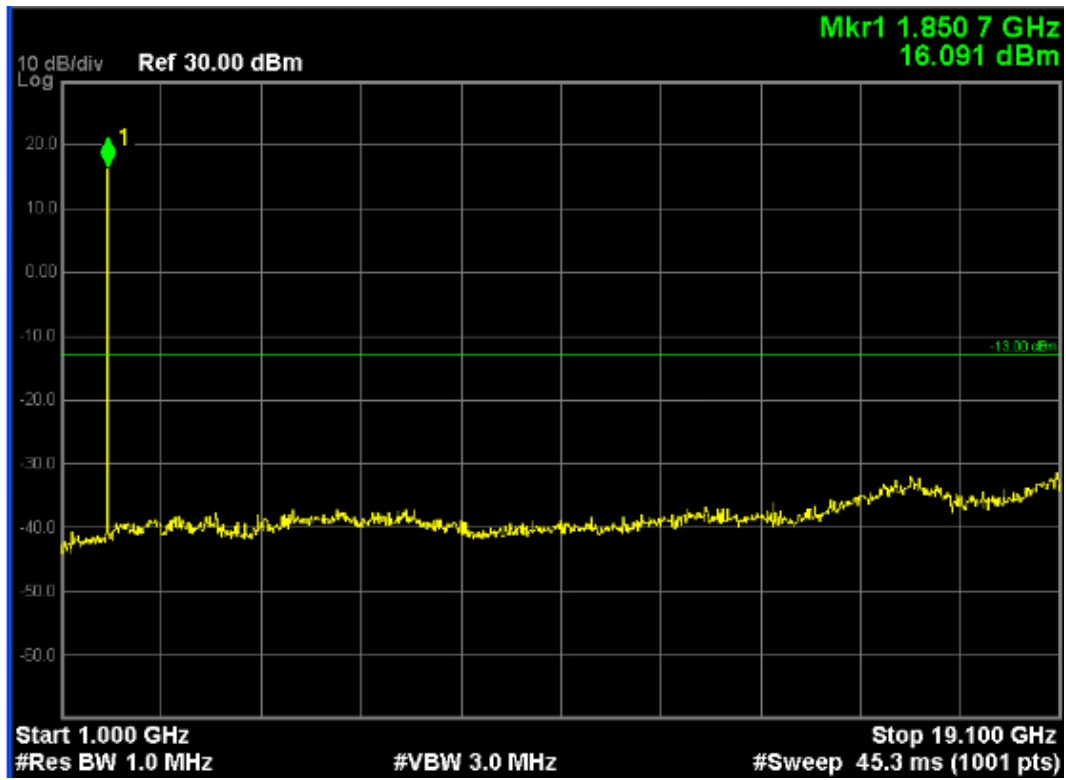

Note: The signal at point 1 is carrier

PCS1900 (GPRS 8 Link EUT Voltage: 24V), Channel 661

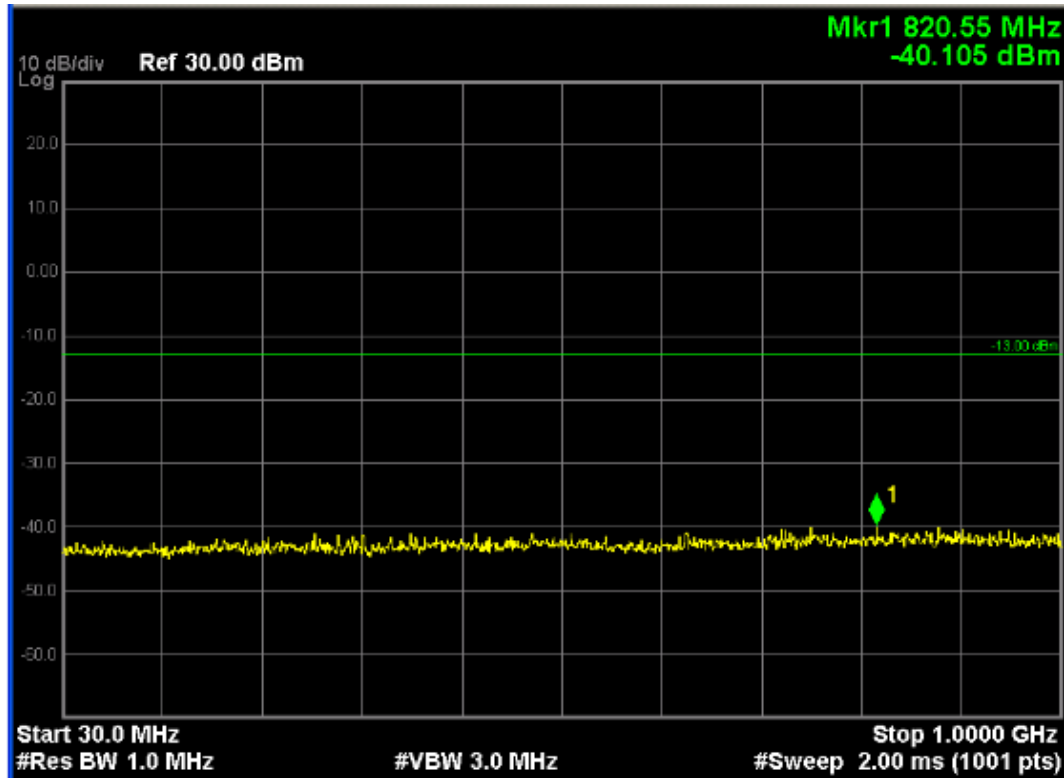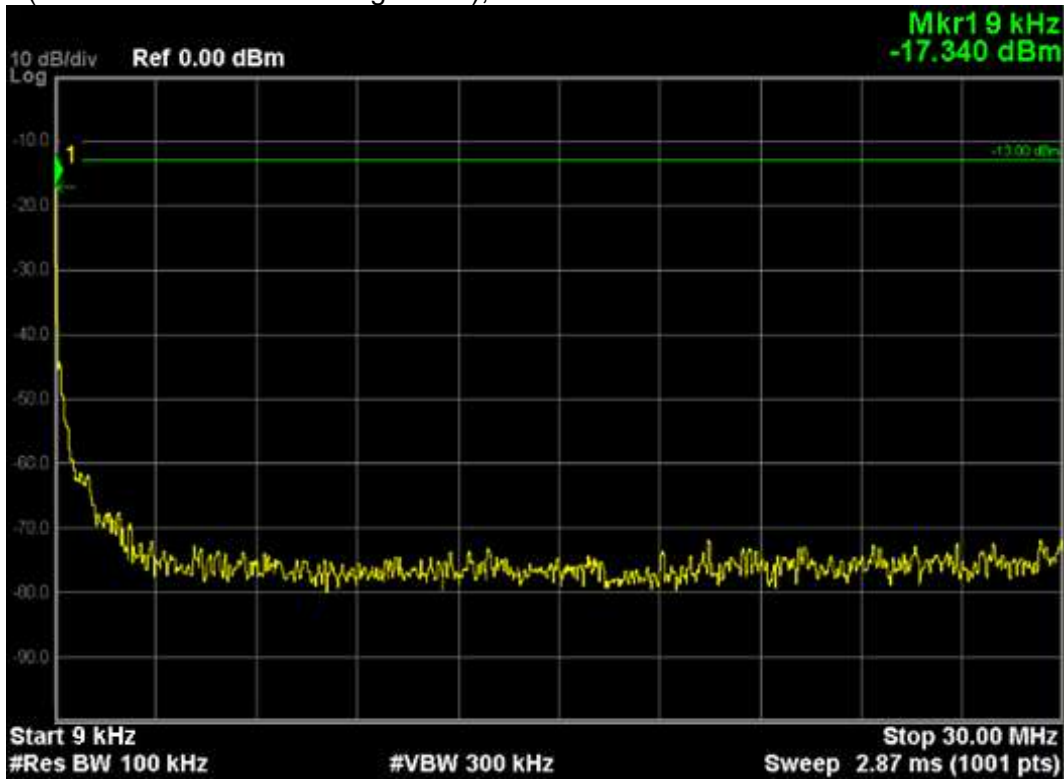

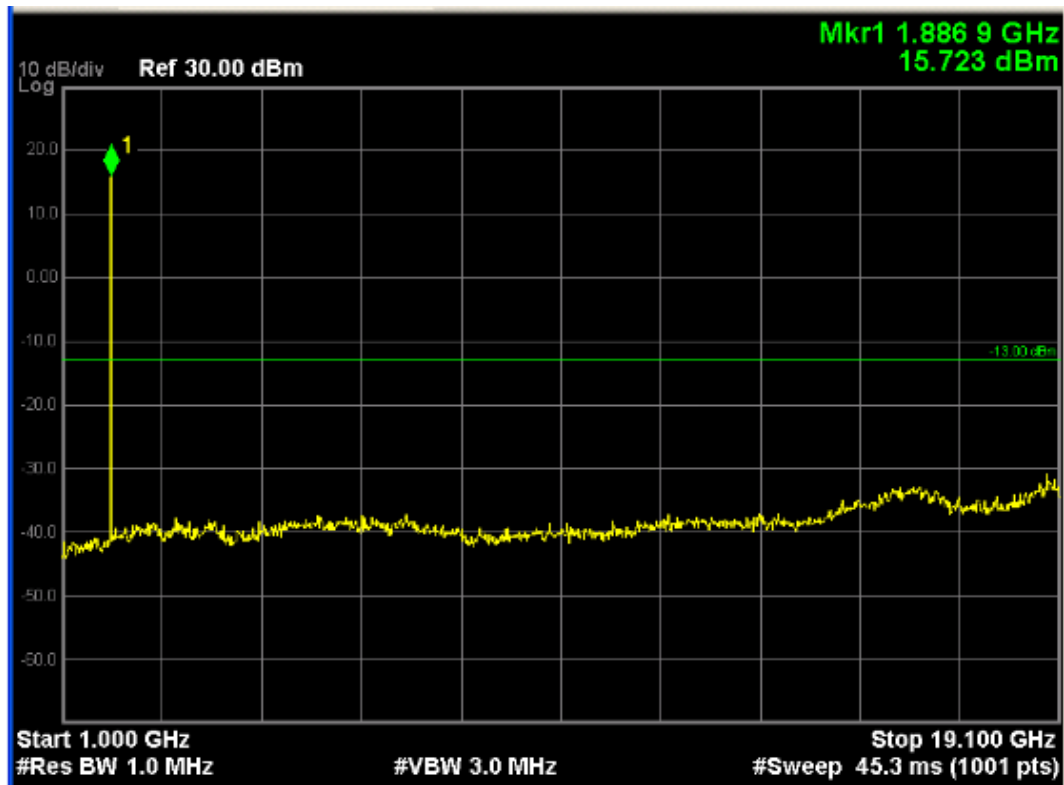

Note: The signal at point 1 is carrier

Radiated Spurious Measurement:

9KHz to 30MHz

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line, and that was not reported per 2.1057 (c).

Above 30MHz

GSM850 (GSM Link EUT Voltage: 12V), 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 189 (836.40MHz)							
236.5	H	-60.21	2.10	-0.70	-63.01	-13.00	-50.01
845.2	H	-65.32	3.42	-2.32	-71.06	-13.00	-58.06
236.5	V	-61.14	2.10	-0.70	-63.96	-13.00	-50.96
845.2	V	-67.20	3.42	-2.32	-72.94	-13.00	-59.94

GSM850 (GSM Link EUT Voltage: 12V), Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 189 (836.40MHz)							
1662.3	H	-51.24	5.82	7.62	-49.44	-13.00	-36.44
3321.4	H	-42.32	7.21	8.20	-41.33	-13.00	-28.33
1662.3	V	-53.50	5.82	7.62	-51.70	-13.00	-38.70
3321.4	V	-46.41	7.21	8.20	-45.42	-13.00	-32.42

GSM850 (GSM Link EUT Voltage: 24V), 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 189 (836.40MHz)							
244.5	H	-60.41	2.10	6.70	-55.81	-13.00	-42.81
875.2	H	-63.32	3.42	5.80	-60.94	-13.00	-47.94
244.5	V	-61.04	2.10	6.70	-57.34	-13.00	-44.34
875.2	V	-65.20	3.42	5.80	-62.82	-13.00	-49.82

GSM850 (GSM Link EUT Voltage: 24V), Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 189 (836.40MHz)							
1659.0	H	-50.34	5.82	7.62	-48.54	-13.00	-35.54
3521.0	H	-41.42	7.21	8.20	-40.43	-13.00	-27.43
1659.0	V	-51.60	5.82	7.62	-49.80	-13.00	-36.80
3521.0	V	-45.71	7.21	8.20	-44.72	-13.00	-31.72

GSM850 (GPRS 8 Link EUT Voltage: 12V), 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 189 (836.40MHz)							
236.5	H	-61.35	2.10	-0.70	-64.15	-13.00	-51.15
845.2	H	-67.20	3.42	-2.32	-72.94	-13.00	-59.94
236.5	V	-63.27	2.10	-0.70	-66.07	-13.00	-53.07
845.2	V	-66.41	3.42	-2.32	-72.15	-13.00	-59.15

GSM850 (GPRS 8 Link EUT Voltage:12V), Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 189 (836.40MHz)							
1662.3	H	-51.40	5.82	7.62	-50.00	-13.00	-37.00
3321.4	H	-43.56	7.21	8.20	-42.57	-13.00	-29.57
1662.3	V	-53.82	5.82	7.62	-52.02	-13.00	-39.02
3321.4	V	-45.15	7.21	8.20	-44.16	-13.00	-31.16

GSM850 (GPRS 8 Link EUT Voltage:24V), 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 189 (836.40MHz)							
255.0	H	-60.44	2.10	-0.70	-63.24	-13.00	-50.24
845.7	H	-66.21	3.42	-2.32	-71.95	-13.00	-58.95
255.0	V	-62.23	2.10	-0.70	-65.03	-13.00	-52.03
845.7	V	-65.42	3.42	-2.32	-71.16	-13.00	-58.16

GSM850 (GPRS 8 Link EUT Voltage:24V), Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 189 (836.40MHz)							
1680.0	H	-53.60	6.00	9.40	-50.02	-13.00	-38.00
2513.0	H	-46.92	7.36	10.6	-43.68	-13.00	-30.68
1680.0	V	-53.66	6.00	9.40	-50.26	-13.00	-37.26
2513.0	V	-48.71	7.36	10.6	-45.47	-13.00	-32.47

PCS1900 (GSM Link EUT Voltage:12V), 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 661 (1880.00MHz)							
312.4	H	-62.53	2.17	1.58	-63.12	-13.00	-50.12
824.5	H	-68.27	3.85	-0.35	-72.47	-13.00	-59.47
312.4	V	-70.15	2.17	1.58	-70.74	-13.00	-57.74
824.5	V	-70.20	3.85	-0.35	-74.40	-13.00	-61.40

PCS1900 (GSM Link EUT Voltage:12V), Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 661 (1880.00MHz)							
3742.5	H	-58.32	8.98	12.84	-54.46	-13.00	-41.46
8405.3	H	-63.20	11.35	13.24	-61.31	-13.00	-48.31
3742.5	V	-60.41	8.98	12.84	-56.55	-13.00	-43.55
8405.3	V	-65.82	11.35	13.24	-63.93	-13.00	-50.93

PCS1900 (GSM Link EUT Voltage:24V), 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 661 (1880.00MHz)							
141.5	H	-61.54	1.62	0.80	-62.36	-13.00	-49.36
66.86	H	-63.65	1.10	-5.8	-70.55	-13.00	-57.55
141.5	V	-68.84	1.62	0.80	-69.66	-13.00	-56.66
66.86	V	-66.80	1.10	-5.8	-73.70	-13.00	-60.70

PCS1900 (GSM Link EUT Voltage:24V), Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 661 (1880.00MHz)							
7528.0	H	-57.69	8.98	11.30	-55.37	-13.00	-42.37
15042.0	H	-54.01	18.02	13.60	-58.42	-13.00	-45.42
7528.0	V	-61.30	8.98	11.30	-58.98	-13.00	-45.98
15042.0	V	-55.12	18.02	13.60	-59.54	-13.00	-46.54

PCS1900 (GPRS 8 Link EUT Voltage:12V), 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 661 (1880.00MHz)							
312.4	H	-63.50	2.17	1.58	-64.09	-13.00	-51.09
824.5	H	-68.46	3.85	-0.35	-72.66	-13.00	-59.66
312.4	V	-71.28	2.17	1.58	-71.87	-13.00	-58.87
824.5	V	-70.51	3.85	-0.35	-74.71	-13.00	-61.71

PCS1900 (GPRS 8 Link EUT Voltage:12V), Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 661 (1880.00MHz)							
3742.5	H	-59.12	8.98	12.84	-55.26	-13.00	-42.26
8405.3	H	-63.38	11.35	13.24	-61.49	-13.00	-48.49
3742.5	V	-61.15	8.98	12.84	-57.29	-13.00	-44.29
8405.3	V	-65.24	11.35	13.24	-63.35	-13.00	-50.35

PCS1900 (GPRS 8 Link EUT Voltage:24V), 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 661 (1880.00MHz)							
414.4	H	-64.10	2.15	1.58	-66.82	-13.00	-53.82
836.5	H	-67.36	3.84	-0.35	-74.70	-13.00	-61.70
414.4	V	-70.48	2.15	1.58	-73.20	-13.00	-60.20
836.5	V	-71.61	3.84	-0.35	-77.95	-13.00	-64.95

PCS1900 (GPRS 8 Link EUT Voltage:24V), Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 661 (1880.00MHz)							
3754.0	H	-60.20	8.95	12.84	-56.31	-13.00	-43.31
9398.0	H	-58.07	14.30	11.90	-60.47	-13.00	-47.47
3754.0	V	-60.23	8.95	12.84	-56.34	-13.00	-43.34
9398.0	V	-59.92	14.30	11.90	-62.32	-13.00	-49.32


7. Frequency Stability Under Temperature & Voltage Variations

7.1. Test Equipment

Instrument	Manufacturer	Model	Serial No.	Cali. Due Date
Spectrum Analyzer	Agilent	N9038A	MY51210142	2014.07.27
Radio Communication Tester	Agilent	E5515C	GB46581718	2014.10.24
DC Power Supply	Agilent	6612C	MY43002989	2015.03.03
Temperature Chamber	WEISS	DU/20/40	58226017340050	2015.01.03

The measure equipment had been calibrated once a year.

7.2. Test Setup

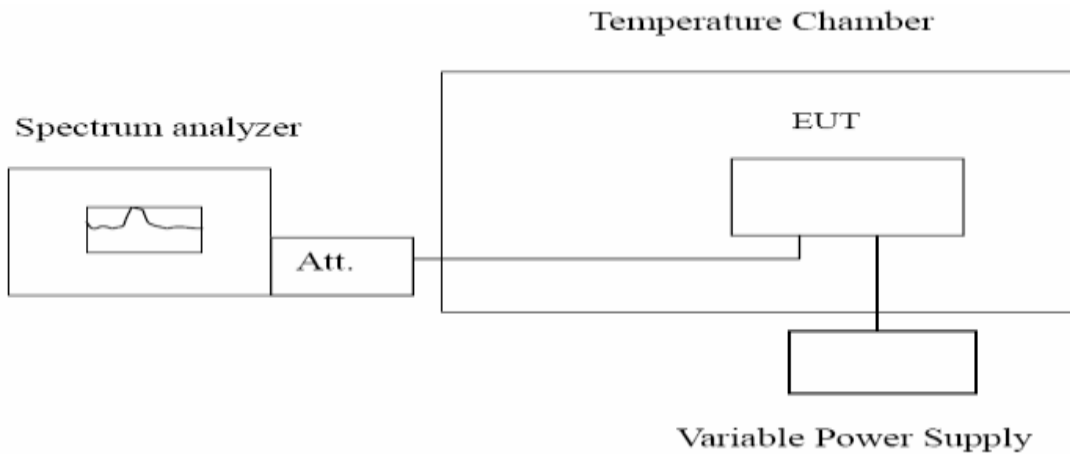

7.3. Limit

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Limit	< ± 2.5 ppm
-------	-----------------

7.4. Test Procedure

Frequency Stability Under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.5. Uncertainty

The measurement uncertainty is defined as ± 10 Hz.

7.6. Test Result

GSM850 (GSM Link EUT Voltage:12V):

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation	Limit (Hz)
		(Hz)	
-20	836.40	-25.30	±2091
-10	836.40	-11.20	±2091
0	836.40	-14.26	±2091
10	836.40	-17.05	±2091
20	836.40	-34.02	±2091
30	836.40	-18.26	±2091
40	836.40	-20.23	±2091
50	836.40	-31.24	±2091

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
10.2	836.40	-14.23	±2091
12	836.40	-21.24	±2091
13.8	836.40	-20.16	±2091

Notes: the manufacture declared that the EUT could work between voltages 8V~32V, and this EUT could normally work under the condition from -20°C to 60°C, otherwise this EUT will shut down and not transmit.

GSM850 (GSM Link EUT Voltage:24V):

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation	Limit (Hz)
		(Hz)	
-20	836.40	-25.31	±2091
-10	836.40	-11.17	±2091
0	836.40	-14.29	±2091
10	836.40	-17.11	±2091
20	836.40	-34.05	±2091
30	836.40	-18.21	±2091
40	836.40	-20.26	±2091
50	836.40	-31.21	±2091

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
20.4	836.40	-14.33	±2091
24	836.40	-21.27	±2091
27.6	836.40	-20.13	±2091

Notes: the manufacture declared that the EUT could work between voltages 8V~32V, and this EUT could normally work under the condition from -20°C to 60°C, otherwise this EUT will shut down and not transmit.

GSM850 (GPRS 8 Link EUT Voltage:12V):

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation	Limit (Hz)
		(Hz)	
-20	836.40	-20.62	±2091
-10	836.40	-17.52	±2091
0	836.40	-18.56	±2091
10	836.40	-17.20	±2091
20	836.40	-21.22	±2091
30	836.40	-30.61	±2091
40	836.40	-18.22	±2091
50	836.40	-20.16	±2091

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
10.2	836.40	-13.55	±2091
12	836.40	-27.20	±2091
13.8	836.40	-31.16	±2091

Notes: the manufacture declared that the EUT could work between voltages 8V~32V, and this EUT could normally work under the condition from -20°C to 60°C, otherwise this EUT will shut down and not transmit.

GSM850 (GPRS 8 Link EUT Voltage:24V):

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation	Limit (Hz)
		(Hz)	
-20	836.40	-20.60	±2091
-10	836.40	-17.54	±2091
0	836.40	-18.53	±2091
10	836.40	-17.28	±2091
20	836.40	-21.24	±2091
30	836.40	-30.58	±2091
40	836.40	-18.24	±2091
50	836.40	-20.19	±2091

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
20.4	836.40	-13.54	±2091
24	836.40	-27.27	±2091
27.6	836.40	-31.19	±2091

Notes: the manufacture declared that the EUT could work between voltages 8V~32V, and this EUT could normally work under the condition from -20°C to 60°C, otherwise this EUT will shut down and not transmit.

PCS1900 (GSM Link EUT Voltage:12V):

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-20	1880.00	-30.46	±4700
-10	1880.00	-20.12	±4700
0	1880.00	-18.22	±4700
10	1880.00	-20.33	±4700
20	1880.00	-19.26	±4700
30	1880.00	-27.56	±4700
40	1880.00	-51.02	±4700
50	1880.00	-41.22	±4700

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
10.2	1880.00	-17.25	±4700
12	1880.00	-16.85	±4700
13.8	1880.00	-27.33	±4700

Notes: the manufacture declared that the EUT could work between voltages 8V~32V, and this EUT could normally work under the condition from -20°C to 60°C, otherwise this EUT will shut down and not transmit.

PCS1900 (GSM Link EUT Voltage:24V):

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-20	1880.00	-30.49	±4700
-10	1880.00	-20.15	±4700
0	1880.00	-18.21	±4700
10	1880.00	-20.34	±4700
20	1880.00	-19.29	±4700
30	1880.00	-27.51	±4700
40	1880.00	-51.11	±4700
50	1880.00	-41.24	±4700

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
20.4	1880.00	-17.31	±4700
24	1880.00	-16.79	±4700
27.6	1880.00	-27.34	±4700

Notes: the manufacture declared that the EUT could work between voltages 8V~32V, and this EUT could normally work under the condition from -20°C to 60°C, otherwise this EUT will shut down and not transmit.

PCS1900 (GPRS 8 Link EUT Voltage:12V):

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-20	1880.00	-30.61	±4700
-10	1880.00	-20.47	±4700
0	1880.00	-19.63	±4700
10	1880.00	-20.16	±4700
20	1880.00	-35.32	±4700
30	1880.00	-18.03	±4700
40	1880.00	-42.31	±4700
50	1880.00	-50.58	±4700

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
10.2	1880.00	-17.53	±4700
12	1880.00	-21.24	±4700
13.8	1880.00	-10.31	±4700

Notes: the manufacture declared that the EUT could work between voltages 8V~32V, and this EUT could normally work under the condition from -20°C to 60°C, otherwise this EUT will shut down and not transmit.

PCS1900 (GPRS 8 Link EUT Voltage:24V):

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
-20	1880.00	-30.58	±4700
-10	1880.00	-20.46	±4700
0	1880.00	-19.65	±4700
10	1880.00	-20.18	±4700
20	1880.00	-35.27	±4700
30	1880.00	-18.02	±4700
40	1880.00	-42.28	±4700
50	1880.00	-50.62	±4700

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit (Hz)
20.4	1880.00	-17.47	±4700
24	1880.00	-21.30	±4700
27.6	1880.00	-10.32	±4700

Notes: the manufacture declared that the EUT could work between voltages 8V~32V, and this EUT could normally work under the condition from -20°C to 60°C, otherwise this EUT will shut down and not transmit.

8.Attachment

PHOTOGRAPHS OF TEST SETUP

Please refer to the file named “YQD-GMT100_RF Setup Photos”.

PHOTOGRAPHS OF EUT

Please refer to the two files named “YQD-GMT100_EUT External Photos” and “YQD-GMT100_EUT Internal Photos”.

----End of the report----