

SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
Orbis Datalogger

**FCC ID: YQMGS610390
Model Name: Orbis Datalogger**

**Report Number: 4790982166-US-S0-V0
Issue Date: 2023/11/28**

Prepared for
**FARO Technologies, Inc.
125 Technology Park, Lake Mary, FL 32746, USA**

Prepared by
**Underwriters Laboratories Taiwan Co., Ltd.,
Building A, B and E, No. 372-7, Sec. 4, Zhongxing Rd.,
Zhudong Township, Hsinchu County, Taiwan
TEL: +886-2-7737-3000
FAX: +886-3-583-7948
Website: www.ul.com**



The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report are responsible of the test sample(s) provided by the client only and are not to be used to indicate applicability to other similar products.

REVISION HISTORY

Rev.	Date	Revisions	Revised By
V0	2023/11/28	Initial Issue	Sally Lu

Table of Contents

1.	Attestation of Test Results.....	4
2.	Test Specification, Methods and Procedures.....	5
3.	Facilities and Accreditation.....	6
4.	SAR Measurement System & Test Equipment	7
4.1.	SAR Measurement System	7
4.2.	SAR Scan Procedures.....	8
4.3.	Test Equipment	10
5.	Measurement Uncertainty	11
6.	Device Under Test (DUT) Information	13
6.1.	DUT Description	13
6.2.	Wireless Technologies	14
7.	RF Exposure Conditions (Test Configurations)	15
7.1.	Standalone SAR Test Exclusion Considerations.....	15
8.	Dielectric Property Measurements & System Check.....	17
8.1.	Dielectric Property Measurements.....	17
8.2.	System Check.....	19
9.	Conducted Output Power Measurements.....	20
9.1.	Wi-Fi 2.4GHz (DTS Band)	20
9.2.	Wi-Fi 5GHz (U-NII Bands)	21
10.	Measured and Reported (Scaled) SAR Results.....	25
10.1.	Test Condition	26
10.2.	Wi-Fi (DTS Band).....	27
10.3.	Wi-Fi (U-NII Band).....	27
11.	Simultaneous Transmission SAR Analysis	28
11.1.	Sum of the SAR for Wi-Fi.....	30
Appendixes.....		31
	4790982166-US-S0-V0_Appendix A: SAR Setup Photos	31
	4790982166-US-S0-V0_Appendix B: Antenna Dimensions and Separation Distances	31
	4790982166-US-S0-V0_Appendix C: SAR System Check Plots	31
	4790982166-US-S0-V0_Appendix D: Highest SAR Test Plots	31
	4790982166-US-S0-V0_Appendix E: SAR Probe and Dipole Calibration Certificates.....	31

1. Attestation of Test Results

Applicant Name	FARO Technologies, Inc.	
FCC ID	YQMGS610390	
Model Name	Orbis Datalogger	
Exposure Category	General Population/Uncontrolled Exposure	
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013	
Exposure Category	SAR Limits (W/Kg)	
	Peak spatial-average(1g of tissue)	Extremities (hands, wrists, ankles, etc.) (10g of tissue)
General population/Uncontrolled exposure	1.6	4
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)	
	DTS	NII
Standalone	0.556	0.685
Simultaneous TX	1.301	
Date Tested	2023/9/15 ~ 2023/10/4	
Test Results	Pass	
Underwriters Laboratories Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Underwriters Laboratories Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Underwriters Laboratories Taiwan Co., Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Underwriters Laboratories Taiwan Co., Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of any government. This report is written to support regulatory compliance of the applicable standards stated above.		
Approved and Authorized By:		Prepared By:
		
Kent Liu Senior Laboratory Engineer Underwriters Laboratories Taiwan Co., Ltd.		Sally Lu Project Handler Underwriters Laboratories Taiwan Co., Ltd.

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


Underwriters Laboratories Taiwan Co., Ltd.,
SAR Room

Underwriters Laboratories Taiwan Co., Ltd. is accredited by TAF, Laboratory Code 3398.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

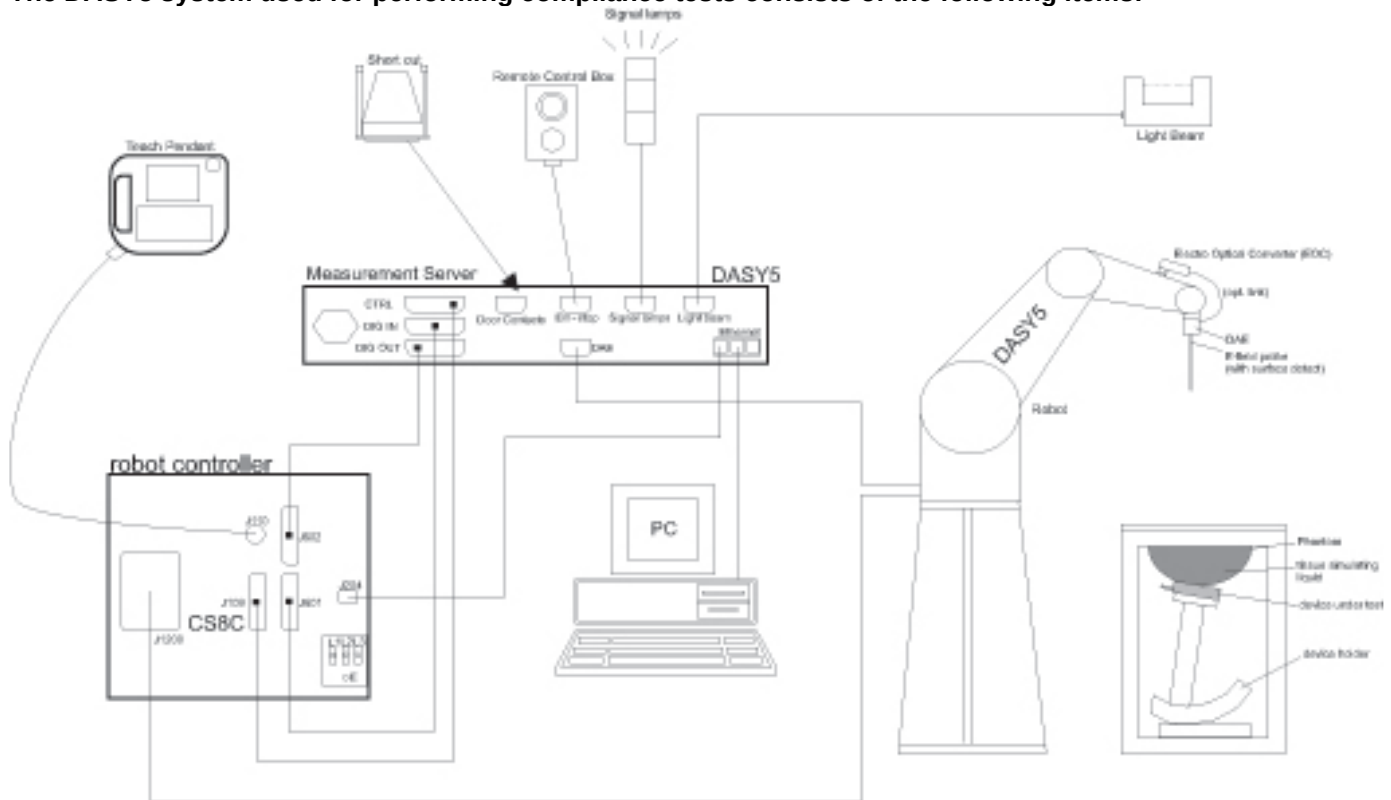

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 or Win10 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Date
Network Analyzer	Anritsu	MS46322B	1740002	2023/2/7
Dielectric Assessment Kit	SPEAG	DAK-3.5	1058	2023/6/15
Humidity/Temp meter	TECPEL	DTM-20	17020736	2023/5/3

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Date
EXG-B RF Vector Signal Generator	Keysight Technologies	N5172B	MY56200320	2023/5/12
Power Meter	Keysight Technologies	N1914A	MY56360007	2022/12/20
Power Sensor	Keysight Technologies	N8481H	MY56350009	2022/12/20
Power Meter	Anritsu	ML2495A	1645002	2023/1/4
Power Sensor	Anritsu	MA2411B	1531202	2023/1/4
Dosimetric E-Field Probe	SPEAG	EX3DV4	3901	2023/5/23
Data Acquisition Electronics	SPEAG	DAE3	393	2023/4/13
System Validation Dipole	SPEAG	D2450V2	735	2022/12/22
System Validation Dipole	SPEAG	D5GHzV2	1244	2023/6/19
Humidity/Temp meter	TECPEL	DTM-20	17020735	2023/4/11

UL Software

Software Version
DASY NEO52 D10.4 S14.6.14
SEMCAD-X-PostPro

5. Measurement Uncertainty

Measurement uncertainty for 300 MHz to 3 GHz

Source of Uncertainty	Tolerance (± %)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (± %, 1g)	Standard Uncertainty (± %, 10g)	(Vi) Veff
Measurement System								
Probe Calibration	6	Normal	1	1	1	6.00	6.00	∞
Axial Isotropy	4.7	Rectangular	1.732	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.6	Rectangular	1.732	0.7	0.7	3.88	3.88	∞
Boundary Effect	1	Rectangular	1.732	1	1	0.58	0.58	∞
Probe Linearity	4.7	Rectangular	1.732	1	1	2.71	2.71	∞
System Detection Limits	1	Rectangular	1.732	1	1	0.58	0.58	∞
Readout Electronics	0.3	Normal	1	1	1	0.30	0.30	∞
Probe Modulation Response	2.61	Rectangular	1.732	1	1	1.51	1.51	∞
Response Time	0.8	Rectangular	1.732	1	1	0.46	0.46	∞
Integration Time	2.6	Rectangular	1.732	1	1	1.50	1.50	∞
RF Ambient Conditions – Noise	3	Rectangular	1.732	1	1	1.73	1.73	∞
RF Ambient Conditions – Reflections	3	Rectangular	1.732	1	1	1.73	1.73	∞
Probe Positioner Mechanical Restrictions	0.4	Rectangular	1.732	1	1	0.23	0.23	∞
Probe Positioning with Respect to Phantom Shell	2.9	Rectangular	1.732	1	1	1.67	1.67	∞
Interpolation, Extrapolation and Averaged SAR calculation algorithms of the Postprocessor	2	Rectangular	1.732	1	1	1.15	1.15	∞
Test Sample Related								
Device Positioning	3	Normal	1	1	1	3.00	3.00	47
Device Holder Disturbance	3.6	Normal	1	1	1	3.60	3.60	2
DUT Power Drift of Measured SAR	5	Rectangular	1.732	1	1	2.89	2.89	∞
SAR Scaling	0	Rectangular	1.732	1	1	0.00	0.00	∞
Phantom and Setup								
Phantom Uncertainty - Shape, Thickness and Permittivity	6.1	Rectangular	1.732	1	1	3.52	3.52	∞
SAR Correction for Deviations in Permittivity and Conductivity	1.9	Normal	1	1	0.84	1.90	1.60	∞
Liquid Conductivity - measurement(DAK)	2.5	Normal	1	0.78	0.71	1.95	1.78	∞
Liquid Permittivity - measurement(DAK)	2.5	Normal	1	0.23	0.26	0.58	0.65	∞
Liquid Conductivity – Temperature Uncertainty	2.32	Rectangular	1.732	0.78	0.71	1.04	0.95	4
Liquid Permittivity – Temperature Uncertainty	0.85	Rectangular	1.732	0.23	0.26	0.11	0.13	4
Combined Standard Uncertainty (K=1)						11.37	11.29	185
Expanded Uncertainty U (K=2)						22.74	22.58	

Measurement uncertainty for 3 GHz to 6 GHz

Source of Uncertainty	Tolerance (± %)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (± %, 1g)	Standard Uncertainty (± %, 10g)	(Vi) Veff
Measurement System								
Probe Calibration	6.55	Normal	1	1	1	6.55	6.55	∞
Axial Isotropy	4.7	Rectangular	1.732	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.6	Rectangular	1.732	0.7	0.7	3.88	3.88	∞
Boundary Effect	2	Rectangular	1.732	1	1	1.15	1.15	∞
Probe Linearity	4.7	Rectangular	1.732	1	1	2.71	2.71	∞
System Detection Limits	1	Rectangular	1.732	1	1	0.58	0.58	∞
Readout Electronics	0.3	Normal	1	1	1	0.30	0.30	∞
Probe Modulation Response	2.61	Rectangular	1.732	1	1	1.51	1.51	∞
Response Time	0.8	Rectangular	1.732	1	1	0.46	0.46	∞
Integration Time	2.6	Rectangular	1.732	1	1	1.50	1.50	∞
RF Ambient Conditions – Noise	3	Rectangular	1.732	1	1	1.73	1.73	∞
RF Ambient Conditions – Reflections	3	Rectangular	1.732	1	1	1.73	1.73	∞
Probe Positioner Mechanical Restrictions	0.8	Rectangular	1.732	1	1	0.46	0.46	∞
Probe Positioning with Respect to Phantom Shell	6.7	Rectangular	1.732	1	1	3.87	3.87	∞
Interpolation, Extrapolation and Averaged SAR calculation algorithms of the Postprocessor	4	Rectangular	1.732	1	1	2.31	2.31	∞
Test Sample Related								
Device Positioning	3	Normal	1	1	1	3.00	3.00	47
Device Holder Disturbance	3.6	Normal	1	1	1	3.60	3.60	2
DUT Power Drift of Measured SAR	5	Rectangular	1.732	1	1	2.89	2.89	∞
SAR Scaling	0	Rectangular	1.732	1	1	0.00	0.00	∞
Phantom and Setup								
Phantom Uncertainty - Shape, Thickness and Permittivity	6.6	Rectangular	1.732	1	1	3.81	3.81	∞
SAR Correction for Deviations in Permittivity and Conductivity	1.9	Normal	1	1	0.84	1.90	1.60	∞
Liquid Conductivity - measurement(DAK)	2.5	Normal	1	0.78	0.71	1.95	1.78	∞
Liquid Permittivity - measurement(DAK)	2.5	Normal	1	0.23	0.26	0.58	0.65	∞
Liquid Conductivity – Temperature Uncertainty	2.32	Rectangular	1.732	0.78	0.71	1.04	0.95	4
Liquid Permittivity – Temperature Uncertainty	0.85	Rectangular	1.732	0.23	0.26	0.11	0.13	4
Combined Standard Uncertainty (K=1)						12.47	12.40	269
Expanded Uncertainty U (K=2)						24.95	24.80	

6. Device Under Test (DUT) Information

6.1. DUT Description

Product	Orbis Datalogger
Brand Name	FARO
Model Name	Orbis Datalogger
Operating Frequency	Wi-Fi 2.4GHz : 2412 MHz ~ 2462 MHz Wi-Fi 5GHz : 5180 ~ 5240 MHz, 5260 ~ 5320 MHz, 5500 ~ 5720 MHz, 5745 ~ 5825 MHz
Modulation	Wi-Fi 2.4GHz & Wi-Fi 5GHz : CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK
SN	Compliance.05
Sample ID	6405689
Received Date	2023/9/1

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20) 802.11n (HT40) 802.11ax (HE20) 802.11ax (HE40)	WLAN2.4GHz Chain 1: 98.96% WLAN2.4GHz Chain 2: 98.88%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80) 802.11ac (VHT160) 802.11ax (HE20) 802.11ax (HE40) 802.11ax (HE80) 802.11ax (HE160)	WLAN5.3GHz Chain 1: 96.88.% WLAN5.3GHz Chain 2: 96.69% WLAN 5.5GHz Chain 1: 97.07% WLAN 5.5GHz Chain 2: 97.03 %
	Does this device support bands 5.60 ~ 5.65 GHz? ☒ Yes ☐ No		

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix B for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

7.1. Standalone SAR Test Exclusion Considerations

Since the *Dedicated Host Approach* is applied, the standalone SAR test exclusion procedure in KDB 447498 § 4.3.1 (RSS-102 Issue 5 § 2.5.1) is applied in conjunction with KDB 616217 § 4.3 to determine the minimum test separation distance:

- When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.
- When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.

SAR Test Exclusion Calculations for WLAN**Antennas < 50mm to adjacent edges**

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
		dBm	mW	Front	Back	Edge 1	Edge 2	Edge 3	Edge 4	Front	Back	Edge 1	Edge 2	Edge 3	Edge 4
Wi-Fi Antenna 1															
Wi-Fi 2.4 GHz	2450	14.00	25	14	29	23	116	111	9	2.8 -EXEMPT-	1.3 -EXEMPT-	1.7 -EXEMPT-	> 50 mm	> 50 mm	4.3 -MEASURE-
Wi-Fi 5.2 GHz	5250	10.00	10	14	29	23	116	111	9	1.6 -EXEMPT-	0.8 -EXEMPT-	1 -EXEMPT-	> 50 mm	> 50 mm	2.5 -EXEMPT-
Wi-Fi 5.3 GHz	5320	11.00	13	14	29	23	116	111	9	2.1 -EXEMPT-	1 -EXEMPT-	1.3 -EXEMPT-	> 50 mm	> 50 mm	3.3 -MEASURE-
Wi-Fi 5.5 GHz	5720	9.00	8	14	29	23	116	111	9	1.4 -EXEMPT-	0.7 -EXEMPT-	0.8 -EXEMPT-	> 50 mm	> 50 mm	2.1 -EXEMPT-
Wi-Fi 5.8 GHz	5825	10.50	11	14	29	23	116	111	9	1.9 -EXEMPT-	0.9 -EXEMPT-	1.2 -EXEMPT-	> 50 mm	> 50 mm	2.9 -EXEMPT-
Wi-Fi Antenna 2															
Wi-Fi 2.4 GHz	2450	12.00	16	13	19	66	113	99	9	1.9 -EXEMPT-	1.3 -EXEMPT-	> 50 mm	> 50 mm	> 50 mm	2.8 -EXEMPT-
Wi-Fi 5.2 GHz	5250	11.00	13	13	19	66	113	99	9	2.3 -EXEMPT-	1.6 -EXEMPT-	> 50 mm	> 50 mm	> 50 mm	3.3 -MEASURE-
Wi-Fi 5.3 GHz	5320	12.00	16	13	19	66	113	99	9	2.8 -EXEMPT-	1.9 -EXEMPT-	> 50 mm	> 50 mm	> 50 mm	4.1 -MEASURE-
Wi-Fi 5.5 GHz	5720	10.00	10	13	19	66	113	99	9	1.8 -EXEMPT-	1.3 -EXEMPT-	> 50 mm	> 50 mm	> 50 mm	2.7 -EXEMPT-
Wi-Fi 5.8 GHz	5825	9.00	8	13	19	66	113	99	9	1.5 -EXEMPT-	1 -EXEMPT-	> 50 mm	> 50 mm	> 50 mm	2.1 -EXEMPT-

Note:

The device is placed or fixed on a flat surface and user is not near the rear of the device, therefore, not need to evaluate the rear.

Note(s):

According to KDB 447498 § 4.3.1 (RSS-102 Issue 5 § 2.5.1), if the calculated threshold value is >3 then SAR testing is required.

Antennas > 50mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
		dBm	mW	Front	Back	Edge 1	Edge 2	Edge 3	Edge 4	Front	Back	Edge 1	Edge 2	Edge 3	Edge 4
Wi-Fi Antenna 1															
Wi-Fi 2.4 GHz	2462	14.00	25	14	29	23	116	111	9	< 50 mm	< 50 mm	< 50 mm	755.6 mW -EXEMPT-	705.6 mW -EXEMPT-	< 50 mm
Wi-Fi 5.2 GHz	5250	10.00	10	14	29	23	116	111	9	< 50 mm	< 50 mm	< 50 mm	725.5 mW -EXEMPT-	675.5 mW -EXEMPT-	< 50 mm
Wi-Fi 5.3 GHz	5320	11.00	13	14	29	23	116	111	9	< 50 mm	< 50 mm	< 50 mm	725 mW -EXEMPT-	675 mW -EXEMPT-	< 50 mm
Wi-Fi 5.5 GHz	5720	9.00	8	14	29	23	116	111	9	< 50 mm	< 50 mm	< 50 mm	722.7 mW -EXEMPT-	672.7 mW -EXEMPT-	< 50 mm
Wi-Fi 5.8 GHz	5825	10.50	11	14	29	23	116	111	9	< 50 mm	< 50 mm	< 50 mm	722.2 mW -EXEMPT-	672.2 mW -EXEMPT-	< 50 mm
Wi-Fi Antenna 2															
Wi-Fi 2.4 GHz	2462	12.00	16	13	19	66	113	99	9	< 50 mm	< 50 mm	255.6 mW -EXEMPT-	725.6 mW -EXEMPT-	585.6 mW -EXEMPT-	< 50 mm
Wi-Fi 5.2 GHz	5250	11.00	13	13	19	66	113	99	9	< 50 mm	< 50 mm	225.5 mW -EXEMPT-	695.5 mW -EXEMPT-	555.5 mW -EXEMPT-	< 50 mm
Wi-Fi 5.3 GHz	5320	12.00	16	13	19	66	113	99	9	< 50 mm	< 50 mm	225 mW -EXEMPT-	695 mW -EXEMPT-	555 mW -EXEMPT-	< 50 mm
Wi-Fi 5.5 GHz	5720	10.00	10	13	19	66	113	99	9	< 50 mm	< 50 mm	222.7 mW -EXEMPT-	692.7 mW -EXEMPT-	552.7 mW -EXEMPT-	< 50 mm
Wi-Fi 5.8 GHz	5825	9.00	8	13	19	66	113	99	9	< 50 mm	< 50 mm	222.2 mW -EXEMPT-	692.2 mW -EXEMPT-	552.2 mW -EXEMPT-	< 50 mm

Note:

The device is placed or fixed on a flat surface and user is not near the rear of the device, therefore, not need to evaluate the rear.

Note(s):

According to KDB 447498 § 4.3.1 (RSS-102 Issue 5 § 2.5.1), if the calculated Power threshold is less than the output power then SAR testing is required.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
150	52.3	0.76
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
915	41.5	0.98
1450	40.5	1.20
1610	40.3	1.29
1800 – 2000	40.0	1.40
2450	39.2	1.80
3000	38.5	2.40
5000	36.2	4.45
5100	36.1	4.55
5200	36.0	4.66
5300	35.9	4.76
5400	35.8	4.86
5500	35.6	4.96
5600	35.5	5.07
5700	35.4	5.17
5800	35.3	5.27

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

Date	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
			Measured	Target	Delta (%)	Measured	Target	Delta (%)
2023/9/15	Head	2412	38.26	39.26	-2.54	1.77	1.76	0.58
		2422	38.14	39.24	-2.80	1.79	1.77	0.72
		2437	38.20	39.22	-2.59	1.80	1.79	0.42
		2450	38.10	39.20	-2.80	1.81	1.80	0.40
		2452	38.10	39.20	-2.80	1.81	1.80	0.34
		2462	38.04	39.18	-2.92	1.81	1.81	0.10
2023/9/20	Head	5180	35.79	36.02	-0.63	4.57	4.64	-1.55
		5190	35.69	36.01	-0.88	4.58	4.65	-1.39
		5200	35.77	36.00	-0.65	4.63	4.66	-0.67
		5210	35.78	35.99	-0.59	4.61	4.67	-1.33
		5220	35.70	35.98	-0.77	4.621	4.68	-1.27
		5230	35.67	35.97	-0.84	4.63	4.69	-1.28
		5240	35.63	35.96	-0.93	4.66	4.70	-0.85
		5250	35.68	35.95	-0.75	4.67	4.71	-0.78
		5260	35.63	35.94	-0.86	4.67	4.72	-0.98
		5270	35.54	35.93	-1.08	4.68	4.73	-1.02
		5280	35.58	35.92	-0.94	4.69	4.74	-1.06
		5290	35.52	35.91	-1.09	4.71	4.75	-0.91
		5300	35.56	35.90	-0.95	4.71	4.76	-1.15
		5310	35.50	35.89	-1.09	4.73	4.77	-0.86
		5320	35.48	35.88	-1.12	4.74	4.78	-0.80
2023/9/28	Head	5745	34.37	35.36	-2.79	5.29	5.21	1.37
		5750	34.36	35.35	-2.81	5.24	5.22	0.47
		5755	34.56	35.35	-2.22	5.27	5.22	0.96
		5775	34.27	35.33	-2.98	5.32	5.24	1.50
		5785	34.23	35.32	-3.09	5.31	5.25	1.00
		5795	34.04	35.31	-3.60	5.28	5.26	0.29
		5800	34.38	35.30	-2.61	5.33	5.27	1.12
		5825	34.29	35.28	-2.79	5.38	5.30	1.54
2023/10/4	Head	5745	34.16	35.36	-3.38	5.24	5.21	0.58
		5750	34.22	35.35	-3.20	5.190	5.22	-0.57
		5755	34.35	35.35	-2.82	5.233	5.22	0.17
		5775	34.02	35.33	-3.68	5.26	5.24	0.27
		5785	34.09	35.32	-3.48	5.25	5.25	-0.04
		5795	33.93	35.31	-3.91	5.25	5.26	-0.27
		5800	34.30	35.30	-2.83	5.30	5.27	0.63
		5825	34.06	35.28	-3.44	5.30	5.30	0.01

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

Date	Tissue Type	Dipole S/N	Input Power (mW)	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Delta 1g ± 10 (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Delta 10g ± 10 (%)
2023/9/15	Head	D2450V2-735	250	13.70	54.00	54.8	1.48	6.28	25.30	25.12	-0.71
2023/9/20	Head	D5GHzV2-1244-5250	100	8.44	79.70	84.4	5.90	2.34	22.80	23.4	2.63
2023/9/28	Head	D5GHzV2-1244-5750	100	8.34	79.30	83.4	5.17	2.32	22.50	23.2	3.11
2023/10/4	Head	D5GHzV2-1244-5750	100	8.13	79.30	81.3	2.52	2.30	22.50	23	2.22

9. Conducted Output Power Measurements

9.1. Wi-Fi 2.4GHz (DTS Band)

Measured Results

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Tune-up Limit (dBm)		SAR Test (Yes/No)	
					Antenna 1	Antenna 2	Antenna 1	Antenna 2	Antenna 1	Antenna 2
2.4GHz (DTS)	802.11b	1 Mbps	1	2412	13.84	11.77	14.0	12.0	Yes	Yes
			6	2437	13.82	11.63	14.0	12.0		
			11	2462	13.63	11.84	14.0	12.0		
	802.11g	6 Mbps	1	2412	NR	NR	13.0	11.0	No	No
			6	2437			13.0	11.0		
			11	2462			13.0	11.0		
	802.11n (HT20)	MCS0	1	2412	NR	NR	13.0	11.0	No	No
			6	2437			13.0	11.0		
			11	2462			13.0	11.0		
	802.11n (HT40)	MCS0	3	2422	NR	NR	10.0	10.0	No	No
			6	2437			10.0	10.0		
			9	2452			10.0	10.0		
	802.11ax (HE20)	MCS0	1	2412	NR	NR	13.0	11.0	No	No
			6	2437			13.0	11.0		
			11	2462			13.0	11.0		
	802.11ax (HE40)	MCS0	3	2422	NR	NR	10.0	10.0	No	No
			6	2437			10.0	10.0		
			9	2452			10.0	10.0		

Note(s):

- SAR is not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.
- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.
- According to TCB Workshop April 2019:
When SAR testing for 802.11ax is required:
 - If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power.
 - Otherwise, consider the fully allocated channel for SAR testing.
 - When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel.

9.2. Wi-Fi 5GHz (U-NII Bands)

Measured Results

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Tune-up Limit (dBm)		SAR Test (Yes/No)	
					Antenna 1	Antenna 2	Antenna 1	Antenna 2	Antenna 1	Antenna 2
5.2GHz (U-NII 1)	802.11a	6 Mbps	36	5180	NR	NR	10.0	11.0	No	No
			40	5200			10.0	11.0		
			44	5220			10.0	11.0		
			48	5240			10.0	11.0		
	802.11n (HT20)	MCS0	36	5180	NR	NR	10.0	11.0	No	No
			40	5200			10.0	11.0		
			44	5220			10.0	11.0		
			48	5240			10.0	11.0		
	802.11n (HT40)	MCS0	38	5190	NR	NR	10.0	11.0	No	No
			46	5230			10.0	11.0		
	802.11ac (VHT20)	MCS0	36	5180	NR	NR	10.0	11.0	No	No
			40	5200			10.0	11.0		
			44	5220			10.0	11.0		
			48	5240			10.0	11.0		
	802.11ac (VHT40)	MCS0	38	5190	NR	NR	10.0	11.0	No	No
			46	5230			10.0	11.0		
	802.11ac (VHT80)	MCS0	42	5210	NR	NR	7.5	7.5	No	No
	802.11ax (HE20)	MCS0	36	5180	NR	NR	10.0	11.0	No	No
			40	5200			10.0	11.0		
			44	5220			10.0	11.0		
			48	5240			10.0	11.0		
	802.11ax (HE40)	MCS0	38	5190	NR	NR	10.0	10.5	No	No
			46	5230			10.0	10.5		
	802.11ax (HE80)	MCS0	42	5210	NR	NR	7.5	7.5	No	No
	802.11ax (HE160)	MCS0	50	5250	NR	NR	8.0	8.0	No	No

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Tune-up Limit (dBm)		SAR Test (Yes/No)	
					Antenna 1	Antenna 2	Antenna 1	Antenna 2	Antenna 1	Antenna 2
5.3GHz (U-NII 2A)	802.11a	6 Mbps	52	5260	10.53	11.41	11.0	12.0	Yes	Yes
			56	5280	10.65	11.53	11.0	12.0		
			60	5300	10.89	11.35	11.0	12.0		
			64	5320	10.81	11.43	11.0	12.0		
	802.11n (HT20)	MCS0	52	5260	NR	NR	10.0	11.0	No	No
			56	5280			10.0	11.0		
			60	5300			10.0	11.0		
			64	5320			10.0	11.0		
	802.11n (HT40)	MCS0	54	5270	NR	NR	10.0	10.0	No	No
			62	5310			10.0	10.0		
	802.11ac (VHT20)	MCS0	52	5260	NR	NR	10.0	11.0	No	No
			56	5280			10.0	11.0		
			60	5300			10.0	11.0		
			64	5320			10.0	11.0		
	802.11ac (VHT40)	MCS0	54	5270	NR	NR	10.0	10.0	No	No
			62	5310			10.0	10.0		
	802.11ac (VHT80)	MCS0	58	5290	NR	NR	9.0	9.0	No	No
	802.11ax (HE20)	MCS0	52	5260	NR	NR	10.0	11.0	No	No
			56	5280			10.0	11.0		
			60	5300			10.0	11.0		
			64	5320			10.0	11.0		
	802.11ax (HE40)	MCS0	54	5270	NR	NR	10.0	10.0	No	No
			62	5310			10.0	10.0		
	802.11ax (HE80)	MCS0	58	5290	NR	NR	9.0	9.0	No	No

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Tune-up Limit (dBm)		SAR Test (Yes/No)	
					Antenna 1	Antenna 2	Antenna 1	Antenna 2	Antenna 1	Antenna 2
5.5GHz (U-NII 2C)	802.11a	6 Mbps	100	5500	8.78	9.63	9.0	10.0	Yes	Yes
			116	5580	8.97	9.57	9.0	10.0		
			124	5620	8.85	9.40	9.0	10.0		
			132	5660	8.48	9.51	9.0	10.0		
			140	5700	8.29	6.24	9.0	7.0		
			144	5720	8.40	6.31	9.0	7.0		
	802.11n (HT20)	MCS0	100	5500	NR	NR	8.0	7.0	No	No
			116	5580			8.0	7.0		
			124	5620			8.0	7.0		
			132	5660			8.0	7.0		
			140	5700			8.0	7.0		
			144	5720			8.0	7.0		
	802.11n (HT40)	MCS0	102	5510	NR	NR	8.0	7.0	No	No
			110	5550			8.0	7.0		
			126	5630			8.0	7.0		
			134	5670			8.0	7.0		
			142	5710			8.0	7.0		
	802.11ac (VHT20)	MCS0	100	5500	NR	NR	8.0	7.0	No	No
			116	5580			8.0	7.0		
			124	5620			8.0	7.0		
			132	5660			8.0	7.0		
			140	5700			8.0	7.0		
			144	5720			8.0	7.0		
	802.11ac (VHT40)	MCS0	102	5510	NR	NR	8.0	7.0	No	No
			110	5550			8.0	7.0		
			126	5630			8.0	7.0		
			134	5670			8.0	7.0		
			142	5710			8.0	7.0		
	802.11ac (VHT80)	MCS0	106	5530	NR	NR	8.0	7.0	No	No
			122	5610			8.0	7.0		
			138	5690			8.0	7.0		
	802.11ac (VHT160)	MCS0	114	5570	NR	NR	8.0	7.0	No	No
	802.11ax (HE20)	MCS0	100	5500	NR	NR	8.0	7.0	No	No
			116	5580			8.0	7.0		
			124	5620			8.0	7.0		
			132	5660			8.0	7.0		
			140	5700			8.0	7.0		
			144	5720			8.0	7.0		
	802.11ax (HE40)	MCS0	102	5510	NR	NR	8.0	7.0	No	No
			110	5550			8.0	7.0		
			126	5630			8.0	7.0		
			134	5670			8.0	7.0		
			142	5710			8.0	7.0		
	802.11ax (HE80)	MCS0	106	5530	NR	NR	8.0	7.0	No	No
			122	5610			8.0	7.0		
			138	5690			8.0	7.0		
	802.11ax (HE160)	MCS0	114	5570	NR	NR	8.0	7.0	No	No

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Tune-up Limit (dBm)		SAR Test (Yes/No)	
					Antenna 1	Antenna 2	Antenna 1	Antenna 2	Antenna 1	Antenna 2
5.8GHz (U-NII 3)	802.11a	6 Mbps	149	5745	10.17	8.48	10.5	9.0	Yes	Yes
			157	5785	10.44	8.16	10.5	9.0		
			165	5825	10.23	8.27	10.5	9.0		
	802.11n (HT20)	MCS0	149	5745	NR	NR	10.0	8.0	No	No
			157	5785			10.0	8.0		
			165	5825			10.0	8.0		
	802.11n (HT40)	MCS0	151	5755	NR	NR	10.0	8.0	No	No
			159	5795			10.0	8.0		
	802.11ac (VHT20)	MCS0	149	5745	NR	NR	10.0	8.0	No	No
			157	5785			10.0	8.0		
			165	5825			10.0	8.0		
	802.11ac (VHT40)	MCS0	151	5755	NR	NR	10.0	8.0	No	No
			159	5795			10.0	8.0		
	802.11ac (VHT80)	MCS0	155	5775	NR	NR	10.0	8.0	No	No
	802.11ax (HE20)	MCS0	149	5745	NR	NR	10.0	8.0	No	No
			157	5785			10.0	8.0		
			165	5825			10.0	8.0		
	802.11ax (HE40)	MCS0	151	5755	NR	NR	10.0	8.0	No	No
			159	5795			10.0	8.0		
	802.11ax (HE80)	MCS0	155	5775	NR	NR	10.0	8.0	No	No

Note(s):

- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band I
 - > 1.2 W/kg, both bands should be tested independently for SAR.
- According to TCB Workshop April 2019:
When SAR testing for 802.11ax is required:
 - If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power.
 - Otherwise, consider the fully allocated channel for SAR testing.
 - When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. Test Condition

Test Item	Test Site No.	Test Date	Tested by
SAR	SAR1	2023/9/15 ~ 2023/10/4	Edison Hu

10.2. Wi-Fi (DTS Band)

RF Exposure Conditions	Mode	Test Position	Dist. (mm)	Ch #.	Freq. (MHz)	Duty Cycle	Tune-up Limit (dBm)	Meas Power (dBm)	Meas 1-g SAR (W/kg)	Scaled 1-g SAR (W/kg)	Meas 10-g SAR (W/kg)	Scaled 10-g SAR (W/kg)	Power Drift	Antenna	Plot No.
Body	802.11b(1Mbps)	Edge 4	0	1	2412	98.96%	14.0	13.84	0.372	0.390	0.159	0.167	0.20	1	
Body	802.11b(1Mbps)	Edge 4	0	6	2437	98.96%	14.0	13.82	0.362	0.381	0.152	0.160	-0.08	1	
Body	802.11b(1Mbps)	Edge 4	0	11	2462	98.96%	14.0	13.63	0.429	0.472	0.180	0.198	-0.06	1	1
Body	802.11b(1Mbps)	Front	0	11	2462	98.88%	12.0	11.84	0.022	0.023	0.014	0.014	0.20	2	
Body	802.11b(1Mbps)	Edge 4	0	11	2462	98.88%	12.0	11.84	0.447	0.469	0.195	0.205	0.12	2	
Body	802.11b(1Mbps)	Edge 4	0	1	2412	98.88%	12.0	11.77	0.477	0.509	0.208	0.222	0.10	2	
Body	802.11b(1Mbps)	Edge 4	0	6	2437	98.88%	12.0	11.63	0.505	0.556	0.223	0.246	-0.10	2	2

10.3. Wi-Fi (U-NII Band)

RF Exposure Conditions	Mode	Test Position	Dist. (mm)	Ch #.	Freq. (MHz)	Duty Cycle	Tune-up Limit (dBm)	Meas Power (dBm)	Meas 1-g SAR (W/kg)	Scaled 1-g SAR (W/kg)	Meas 10-g SAR (W/kg)	Scaled 10-g SAR (W/kg)	Power Drift	Antenna	Plot No.
Body	802.11a(6Mbps)	Edge 4	0	60	5300	96.88%	11.0	10.89	0.420	0.445	0.115	0.122	0.05	1	
Body	802.11a(6Mbps)	Edge 4	0	52	5260	96.88%	11.0	10.53	0.520	0.598	0.129	0.148	-0.19	1	
Body	802.11a(6Mbps)	Edge 4	0	56	5280	96.88%	11.0	10.65	0.542	0.606	0.136	0.152	-0.18	1	
Body	802.11a(6Mbps)	Edge 4	0	64	5320	96.88%	11.0	10.81	0.572	0.617	0.145	0.156	0.08	1	3
Body	802.11a(6Mbps)	Edge 4	0	56	5280	96.69%	12.0	11.53	0.394	0.454	0.113	0.130	0.11	2	
Body	802.11a(6Mbps)	Edge 4	0	52	5260	96.69%	12.0	11.41	0.369	0.437	0.121	0.143	-0.08	2	
Body	802.11a(6Mbps)	Edge 4	0	60	5300	96.69%	12.0	11.35	0.412	0.495	0.118	0.142	-0.05	2	4
Body	802.11a(6Mbps)	Edge 4	0	64	5320	96.69%	12.0	11.43	0.359	0.423	0.100	0.118	0.06	2	
Body	802.11a(6Mbps)	Front	0	157	5785	96.78%	10.5	10.44	0.186	0.195	0.056	0.058	-0.10	1	
Body	802.11a(6Mbps)	Edge 1	0	157	5785	96.78%	10.5	10.44	0.091	0.095	0.030	0.031	0.07	1	
Body	802.11a(6Mbps)	Edge 4	0	157	5785	96.78%	10.5	10.44	0.435	0.456	0.108	0.113	0.09	1	
Body	802.11a(6Mbps)	Edge 4	0	149	5745	96.78%	10.5	10.17	0.540	0.602	0.131	0.146	-0.05	1	
Body	802.11a(6Mbps)	Edge 4	0	165	5825	96.78%	10.5	10.23	0.623	0.685	0.148	0.163	0.01	1	5
Body	802.11a(6Mbps)	Front	0	149	5745	97.11%	9.0	8.48	0.028	0.033	0.009	0.011	0.03	2	
Body	802.11a(6Mbps)	Back	0	149	5745	97.11%	9.0	8.48	0.000	0.000	0.000	0.000	-	2	
Body	802.11a(6Mbps)	Edge 4	0	149	5745	97.11%	9.0	8.48	0.531	0.616	0.154	0.179	-0.01	2	6
Body	802.11a(6Mbps)	Edge 4	0	157	5785	97.11%	9.0	8.16	0.395	0.494	0.115	0.144	0.160	2	
Body	802.11a(6Mbps)	Edge 4	0	165	5825	97.11%	9.0	8.27	0.300	0.365	0.088	0.107	-0.200	2	

11. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance explains how to calculate the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri \leq 0.04$$

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations		
Standalone	1	DTS	+	DTS
	2	DTS	+	U-NII
	3	DTS	+	U-NII
	4	U-NII	+	U-NII

Estimated SAR for Simultaneous Transmission SAR Analysis

Considerations for SAR estimation

- When standalone SAR test exclusion applies, standalone SAR must also be estimated to determine simultaneous transmission SAR test exclusion.
- Dedicated Host Approach criteria for SAR test exclusion is likewise applied to SAR estimation, with certain distinctions between test exclusion and SAR estimation:
 - When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied for SAR estimation; this is the same between test exclusion and SAR estimation calculations.
 - When the separation distance from the antenna to an adjacent edge is > 5 mm but ≤ 50 mm, the actual antenna-to-edge separation distance is applied for SAR estimation.
 - When the minimum test separation distance is > 50 mm, the estimated SAR value is 0.4 W/kg
- Please refer to Estimated SAR Tables to see which test positions are inherently compliant as they consist of only estimated SAR values for all applicable transmitters and consequently will always have sum of SAR values < 1.2 W/kg. Simultaneous transmission SAR analysis was therefore not performed for these test positions.

Estimated SAR for WLAN

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Estimated 1-g SAR Value (W/kg)					
		dBm	mW	Front	Back	Edge 1	Edge 2	Edge 3	Edge 4	Front	Back	Edge 1	Edge 2	Edge 3	Edge 4
Wi-Fi Antenna 1															
Wi-Fi 2.4 GHz	2462	14.00	25	14	29	23	116	111	9	0.374	0.180	0.227	0.400	0.400	-MEASURE-
Wi-Fi 5 GHz	5250	10.00	10	14	29	23	116	111	9	0.218	0.105	0.133	0.400	0.400	0.339
Wi-Fi 5 GHz	5320	11.00	13	14	29	23	116	111	9	0.286	0.138	0.174	0.400	0.400	-MEASURE-
Wi-Fi 5 GHz	5720	9.00	8	14	29	23	116	111	9	0.182	0.088	0.111	0.400	0.400	0.283
Wi-Fi 5 GHz	5825	10.50	11	14	29	23	116	111	9	0.253	0.122	0.154	0.400	0.400	0.393
Wi-Fi Antenna 2															
Wi-Fi 2.4 GHz	2462	12	16	13	19	66	113	99	9	0.257	0.176	0.400	0.400	0.400	0.372
Wi-Fi 5 GHz	5250	11	13	13	19	66	113	99	9	0.306	0.209	0.400	0.400	0.400	-MEASURE-
Wi-Fi 5 GHz	5320	12	16	13	19	66	113	99	9	0.379	0.259	0.400	0.400	0.400	-MEASURE-
Wi-Fi 5 GHz	5720	10	10	13	19	66	113	99	9	0.245	0.168	0.400	0.400	0.400	0.354
Wi-Fi 5 GHz	5825	12	16	13	19	66	113	99	9	0.198	0.135	0.400	0.400	0.400	0.286

Note(s):

The device is placed or fixed on a flat surface and user is not near the rear of the device, therefore, not need to evaluate the rear.

11.1. Sum of the SAR for Wi-Fi

Test Position	Standalone SAR (W/kg)				Σ 10-g SAR (W/kg)			
	① WLAN 2.4 GHz Antenna 1	② WLAN 2.4 GHz Antenna 2	③ WLAN 5 GHz Antenna 1	④ WLAN 5 GHz Antenna 2	①+②	②+③	①+④	③+④
Front	0.374*	0.023	0.195	0.033	0.397*	0.218	0.407	0.228
Back	0.180*	0.176*	0.138*	0.000	0.356*	0.314*	0.18*	0.138*
Edge 1	0.227*	0.4*	0.174*	0.4*	0.627*	0.574*	0.627*	0.574*
Edge 2	0.4*	0.4*	0.4*	0.4*	0.8*	0.8*	0.8*	0.8*
Edge 3	0.4*	0.4*	0.4*	0.4*	0.8*	0.8*	0.8*	0.8*
Edge 4	0.472	0.556	0.685	0.616	1.028	1.241	1.088	1.301

Note(s):

*=Estimated SAR

Appendixes

Refer to separated files for the following appendixes.

4790982166-US-S0-V0_Appendix A: SAR Setup Photos

4790982166-US-S0-V0_Appendix B: Antenna Dimensions and Separation Distances

4790982166-US-S0-V0_Appendix C: SAR System Check Plots

4790982166-US-S0-V0_Appendix D: Highest SAR Test Plots

4790982166-US-S0-V0_Appendix E: SAR Probe and Dipole Calibration Certificates

END OF REPORT