

Bluetooth 4.0
Cycling Computer

User Manual

Cyclaid 10



ALATECH
www.alatech.com



Congratulations on your purchase of the **ALATECH** Cyclaid 10 Bluetooth Cycling Computer !



Your Cycling Computer employs low power Bluetooth 4.0 technology for you to exercise together with mobile devices or sensor accessories.

It helps a lot in your daily exercise training program.

About this manual

- Please read this manual carefully before using this product for its correct and effective use.

- Icons you may find in this manual:

	Notes.
	Tips and remarks.
Appendix	For other information and battery replacement, please refer to appendix.

- Please download and view the latest release of this manual at www.alatech.com.

Items included with your product

- **Cyclaid 10** Bluetooth 4.0 Cycling Computer
- Accessories: Fixer, Fixing Pad and Ties
- Quick Start Guide
- Warranty Card

Trademark

- Bluetooth® is the registered trademark of Bluetooth SIG, Inc.
- iPhone is the registered trademark of Apple Inc.
- App store is the service trademark of Apple Inc.

1 Getting to Know Your Cyclaid 10 4

1-1 Applications	4
1-2 Keys	6
1-3 Screen overview	7
1-4 Switch the function mode	8
Function modes	9

2 Pairing with Sensor 10

2-1 Pair with your HRM	10
2-2 Pair with your Speed and Cadence Sensor	11

3 Basic Setup 12

3-1 System setup	12
Tire circumference (L) cross reference table	13
3-2 User setup	14
3-3 Hot Key setup	15
3-4 Sensor setup	15

4 Install the Cycling Computer 16

5 Exercise Mode 17

Training program cross reference table	18
Instant exercise screen	19

6 Log Function 20

6-1 Browse and delete file	20
6-2 Upload file	21

7 Exercise Statistics 22

8 Connect to Smartphone or Mobile Device 23

8-1 Install App and enable the Bluetooth function	23
8-2 Pair your Cycling Computer with mobile device	24
8-3 iPhone exercise sync.	25
8-4 Synchronize with smartphone	26


S Specifications 28

A Appendix 29

Please refer to the following application and operation index to know more about using your Cyclaid 10.

Use with sensor alone:

Your Cycling Computer may connect to two sensors with low power Bluetooth 4.0 technology^{Note 1} at the same time.

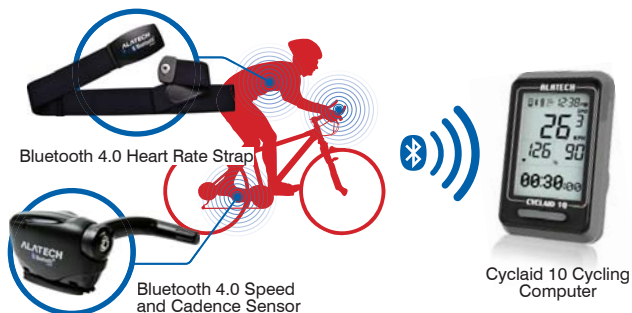

Bicycling with your smartphone:

Bicycling with your smartphone or mobile devices connected with low power Bluetooth 4.0 technology^{Note 2}.




- Note 1: Compatible with ALATECH Heart Rate Strap (model CS009/CS010/CS011) ALATECH Speed and Cadence Sensor (model SC001BLE)
- Note 2: Compatible with mobile device running iOS 5.0 or later and features Bluetooth 4.0 (require installation of App: **ALA COACH+**).
- For more information on compatible mobile devices and supported accessories, please refer to page 23 or browse web site at www.alatech.com.

Application cross reference table:


	Application	Exercise readings					Recording method			
		Heartbeat	Calories	Distance	Speed	Cadence	Slope and height	Track	Diagram	Summary
Bicycling together with your smartphone	📱 + 📱 + 🚴	●	●	● Mobile phone GPS	● Mobile phone GPS		● Mobile phone GPS	● Mobile phone GPS	●	●
	📱 + 📱 + 📶			●	●	●	● Mobile phone GPS	● Mobile phone GPS	●	●
	📱 + 📱 + 🚴 + 📶	●	●	●	●	●	● Mobile phone GPS	● Mobile phone GPS	●	●
Use with sensor alone	📱 + 🚴	●	●							● Cycling Computer
	📱 + 📶			●	●	●				● Cycling Computer
	📱 + 🚴 + 📶	●	●	●	●	●				● Cycling Computer

Operation index:

Use with sensors



Bicycling with your smartphone



- Please pair the optional sensor device with your cycling computer before its first use. (Page 10-11)
- Please complete the following pairing before using it together with smartphone for the first time: Pair the Cycling Computer with your smartphone or mobile device. (Page 24) Pair the optional sensor with your smartphone or mobile device.

1

1-2 Keys



- OK
- In the standby mode, this may be the: Exercise Hot Key or iPhone Hot Key
- Start bicycling
- Turn backlight



•Right/Down arrow key




- Exit/Back
- Stop bicycling



- Press and hold the / keys until the screen fully display to reset the Cycling Computer.
- Do the basic setups described in page 12-15 after Cycling Computer reset. If you have setup Cycling Computer with the ALA COACH+ App, you may re-sync settings to your Cycling Computer as described in "Phone sync" on page 26-27.

1

1-3 Screen Overview

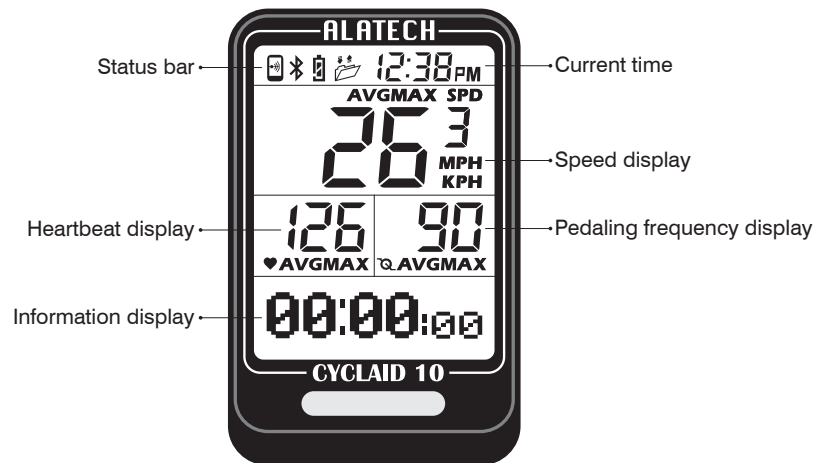

Symbol	Name	Symbol	Name
	Connection to Mobile Phone	SPD	Speed
	Connection to Sensor		Heartbeat
	Cycling Computer Battery Power		Padling Frequency
	Upload File	AVG	Average
PM	AM	MAX	Maximum
PM	PM	MPH	Speed in Imperial UOM
	Target Achievement Trophy	KPH	Speed in metric UOM





- Screen of the Cycling Computer sleeps when the latter being in standby mode.
- The screen displays symbol of currently active mode or the one you are about to enter into.

1



1-4 Switch the Function Mode

1. In standby mode, Press to switch the screen from sleep to individual window^{Note 1}.
2. In the selected window, Press to enter.
3. Press to switch flashing setup item or page, Press to change settings.
4. Press 2~3 times in any window to exit to standby mode.



Press to enter the bicycling mode in standby mode^{Note 2}.

Starts timing

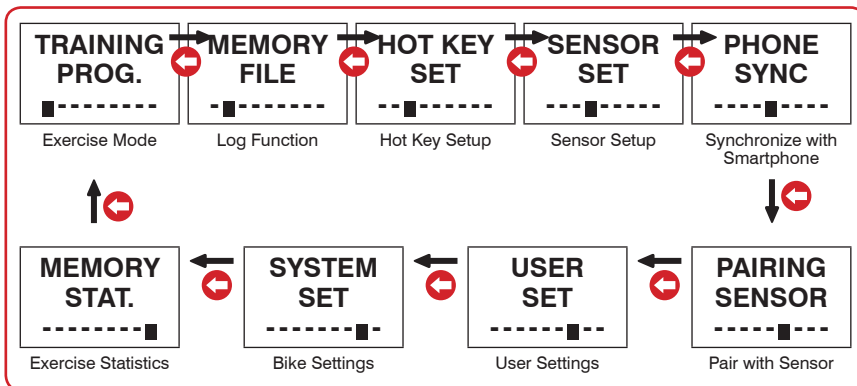

Standby mode



- Note 1: Press to switch to individual setup window in standby mode.
- Note 2: Press to switch to bicycling mode and start timing. (Refer to page 15 Hot Key setup.)

1

1-4 Switch the Function Mode


Function modes:

Function modes	Description
TRAINING PROG. ■-----	<ol style="list-style-type: none"> 1. Your Cycling Computer comes with low, moderate, and high exercise intensity and customizable training programs including: target heart rate zone and target time, distance, and calories. (Page 17-18) 2. Execute training program and view instant exercise information. (Page 17 and 19)
MEMORY FILE -■-----	<ol style="list-style-type: none"> 1. You can keep up to 7 records. 2. Browse and delete file. (Page 20) 3. Upload file. (Page 21)
HOT KEY SET --■-----	Switch between hotkeys. (Page 15)
SENSOR SET ---■-----	Sensor setup. (Page 15)
PHONE SYNC -----■---	Sync. with Smartphone. (Page 26-27)
PAIRING SENSOR -----■---	<ol style="list-style-type: none"> 1. Pair with Your HRM. (Page 10) 2. Pair with Your Speed and Cadence Sensor. (Page 11)
USER SET -----■---	Setup personal data. (Page 14)
SYSTEM SET -----■---	Setup tire circumference (L), enable auto lap counting and setup single lap distance, enable backlight, setup date and time. (Page 12-13)
MEMORY STAT. -----■---	View total exercise amount including accumulated exercise time, distance and energy burnt. (Page 22)

2

2-1 Pair with Your HRM

1. In standby mode, Press **←** to point to **PAIRING SET**, Press **↵** to enter.
2. In the **PAIRING HRM** window, Press **↵** to create Bluetooth connection and start pairing.
3. Paired successfully, message **OK** prompts, Press **↵** to exit.
Pairing failed, message **NO-DEV** prompts, Press **↵** to exit to **PAIRING HRM** and starts from STEP 2 again.

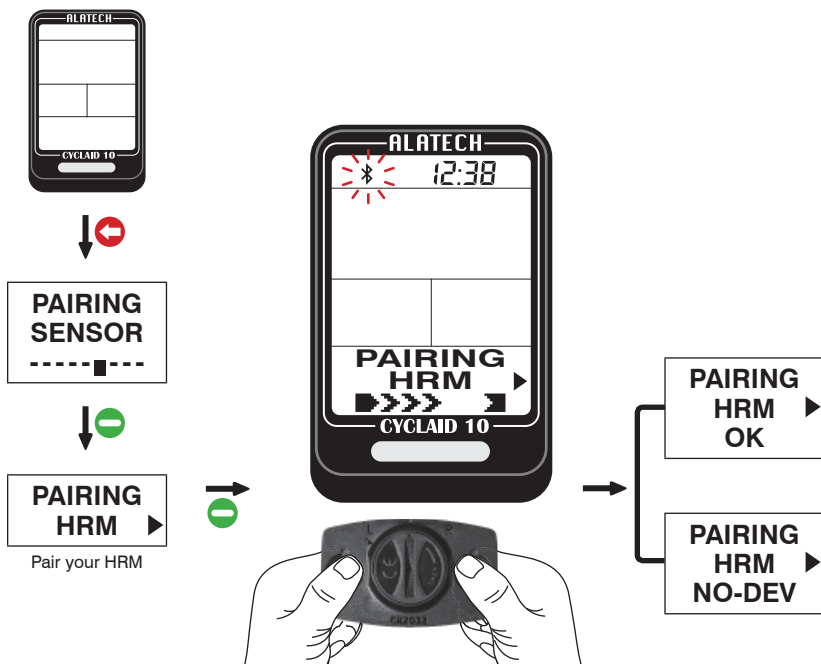

Please refer to the Heart Rate Strap manual on wearing it properly, or press and hold the metal button at the back of the heart rate sensor (HRM) with both hands until the "OK" message prompts in your Cycling Computer.




- Make sure **HRM** is set to **ON** in the Sensor Setup window. (Page 15)
- Keep your heart rate sensor and Cycling Computer within 10cm from each other. Keep both away from other Bluetooth devices to prevent incorrect pairing.

2

2-2 Pair with Your Speed and Cadence Sensor

1. In standby mode, Press **←** to point to **PAIRING SET**, Press **↵** to enter.
2. Press **←** to point to **PAIRING BIKE**, Press **↵** to create Bluetooth connection and start pairing.
3. Paired successfully, message **OK** prompts, Press **↵** to exit.
Pairing failed, message **NO-DEV** prompts, Press **↵** to exit to **PAIRING BIKE** and starts from STEP 2 again.

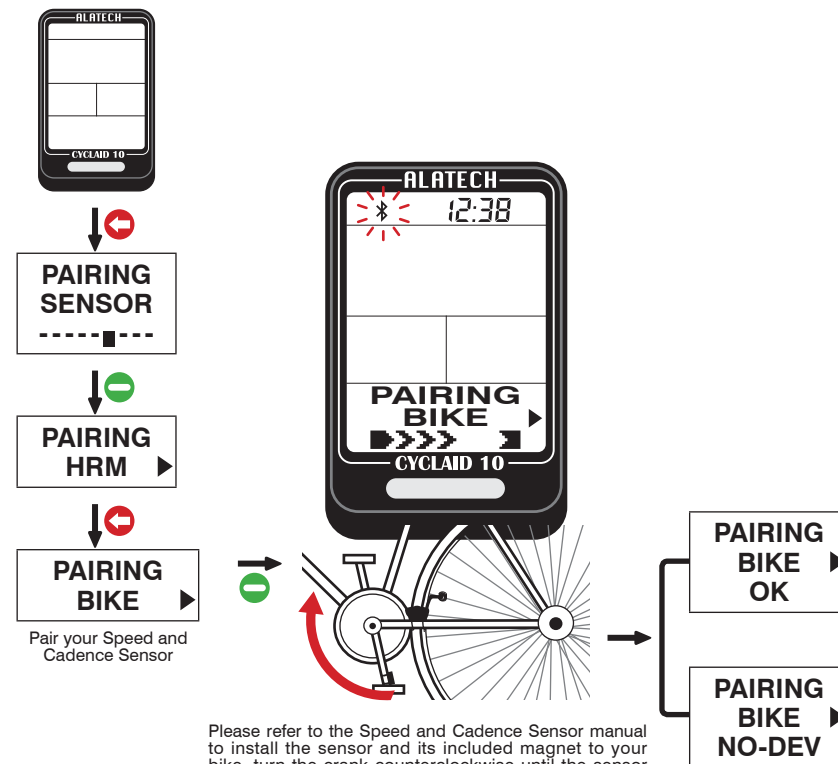

Please refer to the Speed and Cadence Sensor manual to install the sensor and its included magnet to your bike, turn the crank counterclockwise until the sensor is connected to the Cycling Computer and the "OK" message prompts.



- Make sure **SPD/CAD** is set to **ON** in the Sensor Setup window. (Page 15)
- Activate your Speed and Cadence Sensor before pairing by cranking to start the sensor and establish connection. Your Speed and Cadence Sensor remains awake for one minute. It goes back to sleep mode again if no Bluetooth connection is enabled.
- Keep your Speed and Cadence Sensor and Cycling Computer close to each other and away from other Bluetooth devices for correct pairing.


3-1 System Setup

Please setup your basic data before using your product.


You may setup your basic data with the ALA COAH+ App on your mobile phone or devices and synchronized it to your Cycling Computer.

See Page 26-27 for its operation.

3-1 System setup

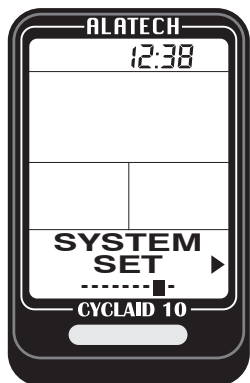

1. In standby mode, Press to point to **SYSTEM SET**, Press to enter.
2. Press to point to the next setup item or page.
3. Press to change settings.
4. Press to exit after setup is completed.

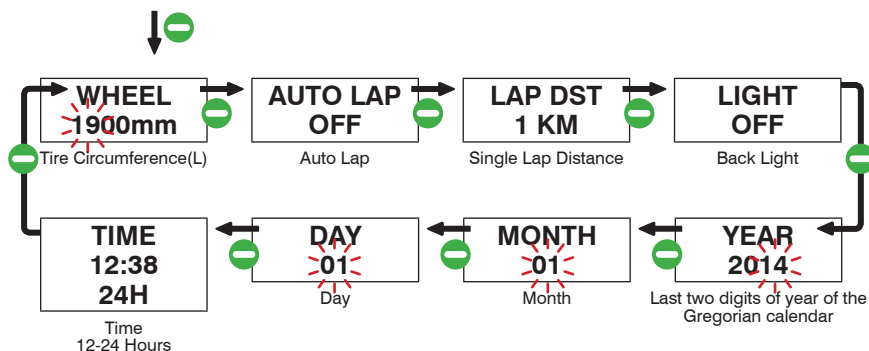

3-1 System Setup

Tire size:



You can find the tire size indicated at both sides of your wheel. For your reference, use the tire circumference (L) chart below.

ETRTO	Tire size	L(mm)	ETRTO	Tire size	L(mm)	ETRTO	Tire size	L(mm)
	12×1.75	935		26×7/8	935	32-630	27×1-1/4	2161
	14×1.50	1020	23-571	26×1(59)	1020		27×1-3/8	2169
	14×1.75	1055		26×1(65)	1055		650×35A	2090
	16×1.50	1185		26×1.25	1185		650×38A	2125
47-305	16×1.75	1195		26×1-1/8	1195	18-622	650×38B	2105
	18×1.50	1340	37-590	26×1-3/8	1340		700×18C	2070
	18×1.75	1350		26×1-1/2	1350		700×19C	2080
47-406	20×1.75	1515		26×1.40	1515	20-622	700×20C	2086
	20×1-3/8	1615	40-559	26×1.50	1615	23-622	700×23C	2096
	22×1-3/8	1770	47-559	26×1.75	1770	25-622	700×25C	2105
	22×1-1/2	1785	50-559	26×1.95	1785	28-622	700×28C	2136
	24×1	1753	54-559	26×2.00	1753		700×30C	2170
	24×3.4 Tubular	1785		26×2.10	1785	32-622	700×32C	2155
	24×1-1/8	1795	57-559	26×2.125	1795		700C Tubular	2130
	24×1-1/4	1905		26×2.35	1905		700×35C	2168
47-507	24×1.75	1890	57-559	26×3.00	1890		700×38C	2180
	24×2.00	1925		27×1	1925	40-522	700×40C	2200
	24×2.125	1965		27×1-1/8	1965			


• Tire size setup range: **1900mm** (10-25) **1900mm** (00-99)

• Single lap distance setup range: **1-5 kilometers.**
1-5 miles.


• You may turn on the backlight for 5 seconds by pressing the key after the backlight option is selected.

• The back light may be too dim to be noticed under direct sun light.

3-2 User Setup

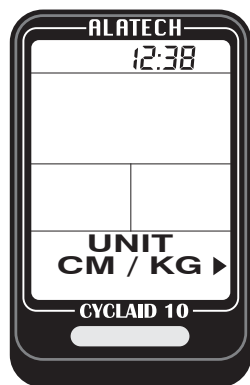

1. In standby mode, Press to point to **USER SET**, Press to enter.
2. Press to change setup page.
3. Press to change settings.
4. Press to exit after setup is completed.

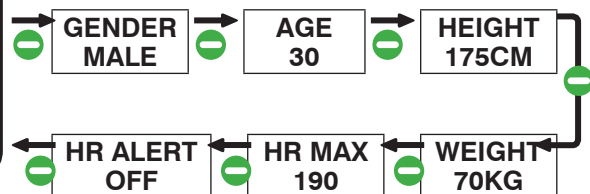


Setup page:

Setup page	Description
UNIT (Unit of measure)	•UOM option: metric CM / KG or Imperial FT / LB
GENDER	•MALE or FEMALE
AGE	•Setup range: 10-99 year-old
HEIGHT	•Setup range: 120-230 cm (3' 11" ~ 7' 5")
WEIGHT	•Setup range: 30-150 KG (67-330LB)
HR MAX (Maximum heart rate)	•Setup range: 130-220 bpm
HR ALERT ^{NOTE 1}	•ON or OFF

- Please enter your age, gender, height and weight accurately as these may determine the accuracy in calculating your target training heartbeat and burnt calories range.
- The maximum heart rate is derived from the "**Age Formula: 220 - Age**" formula automatically. It is highly recommended to change these settings only with more accurate values arrived with physicians and professional lab monitoring.
- Note 1: If you are above your target heart rate zone limits, the heart rate value starts flashing.

3-3 Hot Key Setup, 3-4 Sensor Setup

3-3 Hot Key Setup

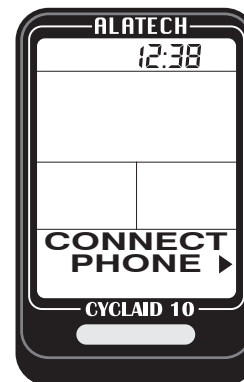


iPhone Hot Key

1. In standby mode, Press to point to **HOT KEY SET**, Press to enter.
2. Press to switch between hotkeys:
CONNECT PHONE (iPhone Hot Key) or **CONNECT SENSOR** (Exercise Hot Key).
3. Press to exit after setup is completed.



- Press to enter iPhone Sync. Bicycling in standby mode directly once the Hot Key is set to **CONNECT PHONE**. (Page 25)
- Press to enter Bicycling Training in standby mode directly once the Hot Key is set to **CONNECT SENSOR**. (Page17-19)

3-4 Sensor Setup

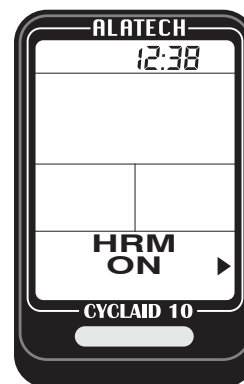


Connection with Heart Rate Strap

1. In standby mode, Press to point to **SENSOR SET**, Press to enter.
2. Press to switch between **HRM** or **SPD/CAD** setup screen.
3. Press to select **ON** (connect) or **OFF** (disconnect).
4. Press to exit after setup is completed.




- Your Cycling Computer can connect to two Bluetooth 4.0 sensors (Heart Rate Strap and Speed and Cadence Sensor) at one time.
- Please only connect sensors required by specific exercises to save time in search for Bluetooth connections.

Accessories included with your product:

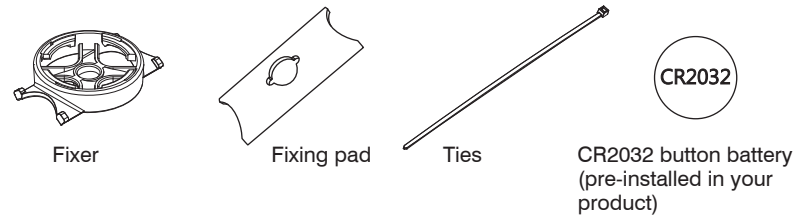


Installation method:

1. Place the fixing pad under the fixer and attach both to the bike frame.
2. Tie the fixer with straps.
3. Place the Cycling Computer in the fixer 45 degree to the frame as shown in the diagram.
4. Turn the Cycling Computer clockwise until it clicks into the 12-o'clock position.

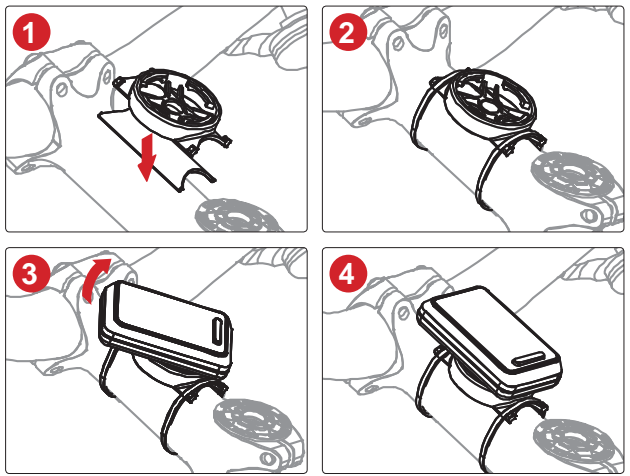

1. In standby mode, Press **←** to point to **TRAINING PROG.**, Press **⏏** to enter.
2. Press **←** to switch between training programs.
3. When pointed to training target area for manual setup (e.g. the green labeled area), Press **⏏** to point to flashing setup item, Press **←** to change settings. (See crossreference in page 18)
4. After setup, Press **⏏** to start bicycling.
5. Press **⏏** to view instant information during bicycling. (See crossreference in page 19)
6. Stop bicycling, Press **↶** to end, **←** Select **Exit**, press **YES/NO**, **⏏** to confirm, Press again **⏏** to view results of current bicycling, Press **↶** to exit, **←** Select **Save**, press **YES/NO**, **⏏** to confirm, the system returns to standby mode after bicycling data is saved.

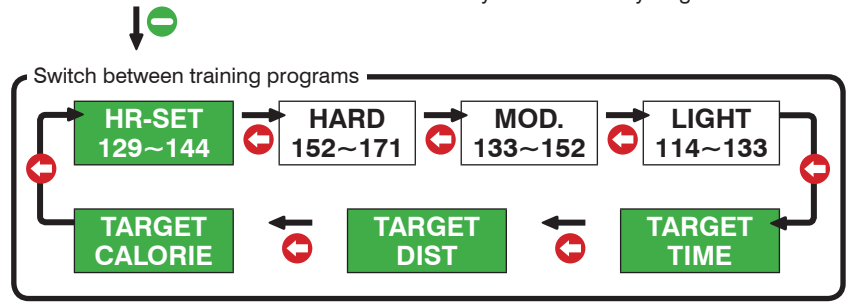

Instant bicycling screen



Training programs:


Training program	Name	Description
LIGHT* 114~133	Light*	<ul style="list-style-type: none"> Intensity: 60~70% of the maximum heart rate. Application: health upkeep and weight control.
MOD.* 133~152	Medium*	<ul style="list-style-type: none"> Intensity: 70~80% of the maximum heart rate. Application: aerobic exercise and advanced fitness training.
HARD* 152~171	Strong*	<ul style="list-style-type: none"> Intensity: 80~90% of the maximum heart rate. Application: sports games and athletic training.
HR-SET 129~144	Target Heart Rate Zone	<ul style="list-style-type: none"> Setup range: 129~144 (lower limit 70-144 bpm) 129~144 (upper limit 144-220 bpm)
TARGET TIME	Target Training Time	<ul style="list-style-type: none"> Setup range: 0:30 (0-99 hours) 0:30 (5-55 minutes)
TARGET DIST	Target Distance	<ul style="list-style-type: none"> Setup range in metric unit: 0.5-999.9 kilometer. Setup range in Imperial unit: 0.5-619.5 miles.
TARGET CALORIE	Target Burning Calorie	<ul style="list-style-type: none"> Setup range: 50-10,000 Cal (Kcal).



- Training program marked with "*" symbol is calculated by your Cycling Computer system according to your age setup. You may customize the target heart rate range with the **HR-SET** program.
- The upper and lower limit of heartbeat varies with your age. Please choose and set a proper training target on the basis of your physical fitness before every exercise session.
- After a custom training target is achieved, a champion trophy 🏆 displays on the screen.
- Precautions before exercising:

- Make sure the optional sensor has been paired with your Cycling Computer. (Page 10-11)
- Press the Cycling Computer Hot Key to **CONNECT SENSOR**. If you have set HOT KEY to **CONNECT SENSOR**, you may skip the training program selection by pressing key **⏪** in the sleep mode to start exercise timing directly. (Page 15)
- Please only connect sensors required by specific exercises to save time in search for Bluetooth connections. (Page 15)
- Activate your Speed and Cadence Sensor before using by cranking to start the sensor and establish connection. Your Speed and Cadence Sensor remains awake for one minute. It goes back to sleep mode again if no Bluetooth connection is enabled.
- In case your Cycling Computer lost connection with the sensor during bicycling, the message **"LINK HR or LINK SC"** prompts, Press **⏪** to select option **YES** or **NO**, Press **⏩** to confirm your choice. If you choose option **YES**, your Cycling Computer starts searching for the sensor again, searched successfully, continue timing. If you choose option **NO**, your Cycling Computer continues the timing without searching for the sensor.

Instant exercise screen:

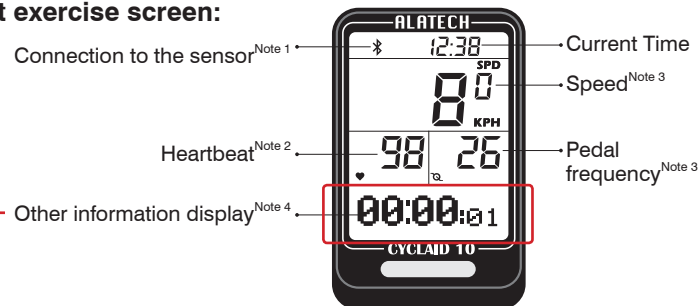


Indicator	Name	Description
SPD	Speed ^{Note 3}	<ul style="list-style-type: none"> Kilometers (Miles) per hour Display in metric unit: KPH (KM per Hour) Display in Imperial unit: MPH (Mile per Hour)
♥	Heartbeat ^{Note 2}	<ul style="list-style-type: none"> Heartbeat per minute Display unit: BPM (Heartbeat per Minute)
🚲	Pedal Frequency ^{Note 3}	<ul style="list-style-type: none"> Pedaling frequency in minute Display unit: RPM (Rate per Minute)
🕒	Exercise Timing	<ul style="list-style-type: none"> Display format: HH:MM:SS 00:00:01
📏	Trip Distance	<ul style="list-style-type: none"> The minimum metric display unit: 0.1 KM The minimum Imperial display unit: 0.1 ML
🔥	Calories ^{Note 2}	<ul style="list-style-type: none"> Display in unit of Kcal (Cal)
📈	Slope ^{Note 5}	<ul style="list-style-type: none"> In unit of percentage (%)
🏔️	Height ^{Note 5}	<ul style="list-style-type: none"> The metric display unit: 1 meter (M) The Imperial display unit: 1 foot (FT)



- Note 1: The **📶** symbol display at top of screen once connected with the sensor and **📱** with smartphone.
- Note 2: Value of heartbeat and calories display only when worked together with Heart Rate Strap. The heartbeat reading flashes once the target area is exceeded.
- Note 3: Value of speed, pedal frequency and trip distance display only when worked together with Speed and Cadence Sensor.
- Note 4: When viewing current other information, name of the reading displays 1 second before its value does.
- Note 5: Slope and height readings derived from GPS of your phone display only when a smartphone or mobile device is connected.

6-1 Browse and Delete File

1. In standby mode, Press **←** to point to **MEMORY FILE**, Press **↵** to enter.
2. Press **←** to point to file selection, **↵** to enter, Press **↵** to page through the file.
3. Viewing single lap data^{Note 1}: in the **VIEW LAPS** window, **←** Select **YES**, **↵** to confirm, Press **←** to view single lap data in sequence, Press **↶** after viewing to back to last page.
4. To delete a file: in the **DELETE FILE** window, **←** Select **YES**, **↵** to confirm the deletion.
5. Press **↶** to exit after the operation is completed.

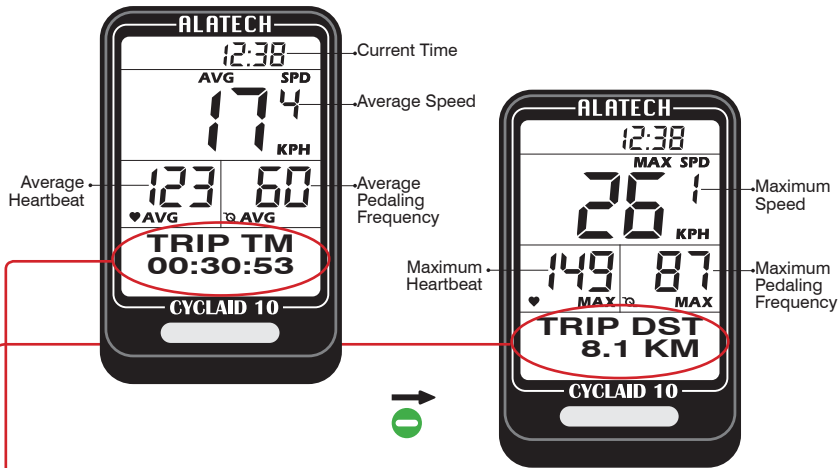


Other information reference table:

File information	Name	File information	Name
TRIP TM 00:30:53	Exercise Time	VIEW LAPS	Select to view single lap data ^{Note 1} (See STEP 4)
TRIP DST 8.1 KM	Distance	UPLOAD FILE	Upload File (See page 21)
CALORIE 174 Cal	Calories	DELETE FILE	Delete File (See STEP 5)
LAPS 08	Number of Laps		

• Note 1: You may get to view average speed/heartbeat/pedaling frequency/time per laps.
 • Maximum number of laps: 50, lap equivalence: metric: one kilometer per lap. Imperial: one mile per lap.


6-2 Upload File

1. Open **ALA COACH+ App**>Settings>My Sensors>Cycling Computer>Cycling Computer Data Import>SMART CYCLING.
2. In the Cycling Computer **MEMORY FILE**>desired file selection>**UPLOAD FILE** window, Press **←** to select **YES**, **↵** to confirm and create Bluetooth connection, connected, Press App **Start** button.
3. After the uploading is completed, the App prompts **OK**, Press App **Save** button and then press the button at upper left corner to exit the mobile device, Press **↶** at your Cycling Computer to exit.


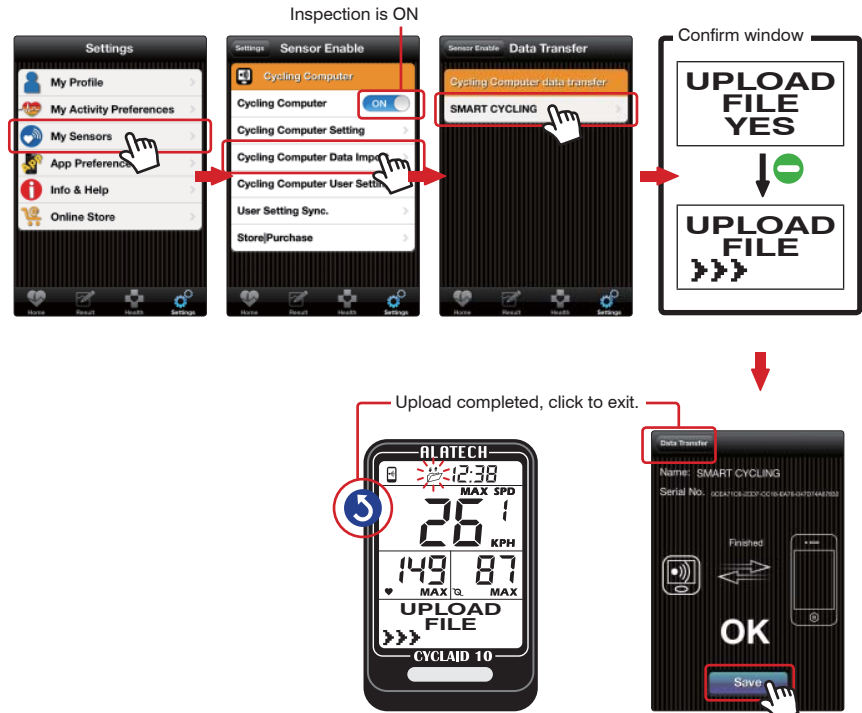


• Precautions on file uploading:
 1. Make sure the mobile device has paired with your Cycling Computer. (Page 24)
 2. Check the mobile device>Settings>Bluetooth® system and ALA COACH+ App>Settings>My Sensors>Cycling Computer is ON.

7 View Exercise Statistics

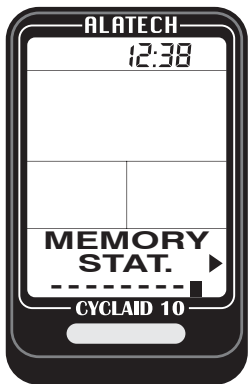

1. In standby mode, Press **←** to point to **MEMORY STAT.**, Press **⏏** to enter.
2. Press **←** to page through accumulation data.
3. Press again **⏏** to enter the **RESET** window, To reset accumulation data^{Note 1}, **←** Select **YES**, **⏏** to confirm your choice.
4. Press **↶** to exit after the operation is completed.

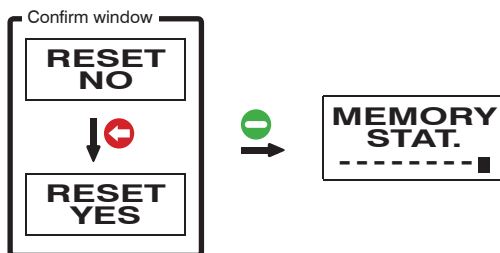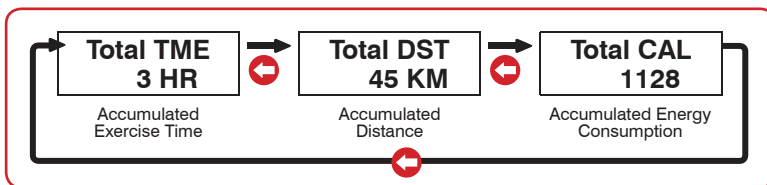

- Execute **RESET** to clear total exercise amount data.
- The **RESET** function does not erase the exercise file. To delete it, go to **MEMORY FILE**, and select individual file for deletion.

8-1 Install App and Enable the Bluetooth Function


8

Please install the **ALA COACH+ App** on your mobile device before connecting to it and open your mobile device's **Bluetooth®** function for functions including pairing, synchronizing exercises, and file uploading.

- ▶ Apple App Store search and install: **ALA COACH+**



Please scan to download immediately



- ▶ Supported OS: Apple iOS 5.0 or later

- ▶ Compatible mobile devices:

- iPhone 4S or later
- iPod Touch 5 or later
- iPad 3 or later
- iPad mini or later




• Please visit us at www.alatech.com to learn more about the latest information on compatible mobile devices and supported accessories.

- ▶ Please make sure you have turned on your mobile device >Settings>**Bluetooth®** system in advance.



Settings




- ▶ Please pair your optional sensor with the mobile device. (See user manual included with the sensor for the pairing procedure.)

8-2 Pair Your Cycling Computer with Mobile Device

STEP1 Check your mobile device>Settings>**Bluetooth**® system is open. (Page 28)

STEP2 Set Cycling Computer Hot Key to **CONNECT PHONE**. (Page14)


STEP3 Open **ALA COACH+ App**>Settings>My Sensors>Cycling Computer >Cycling Computer Setting>Add New Sensor.

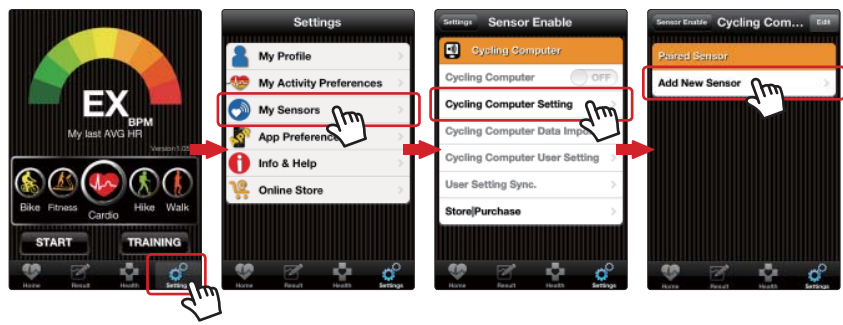

STEP4 Pairing steps:
1. When Cycling Computer is in standby mode, Press **⏻** to create Bluetooth connection.

2. Once your Cycling Computer is discovered by the App, press **SMART CYCLING** to start pairing.

3. Once pairing is completed, the App prompts **OK**, press the upper left button to exit the mobile device and key **↵** to exit your Cycling Computer.

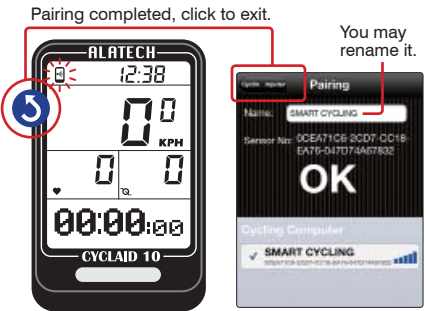


⚠️ •Keep your mobile device and Cycling Computer within 10cm from each other and keep both away from other Bluetooth devices to prevent incorrect pairing.

8-3 iPhone Exercise Sync.

STEP1 Open **ALA COACH+ App**>Homepage, scroll to **Bike** and press **Start** button.



STEP2 Operation steps:
1. When Cycling Computer is in standby mode, Press **⏻** to create Bluetooth connection.
2. When the App prompts every device is discovered and ready, after countdown, the App and your Cycling Computer sync. starts timing.
3. Press **⏻** to view instant information during bicycling.
4. Stop bicycling, press Cycling Computer's **↵** key and **OK** to exit, the Cycling Computer exit to standby mode to sleep, the App exit to the Homepage and save data of current results.

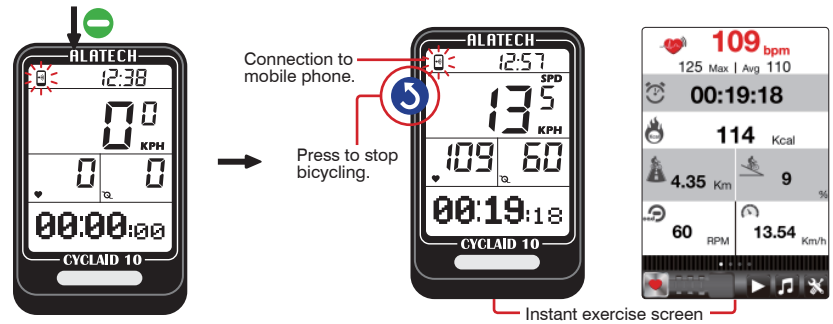

⚠️ •Precautions on connecting smartphone for Exercise Sync.:
1. Make sure your mobile device has been paired with your Cycling Computer. (Page 24)
2. Make sure your mobile device has been paired with your optional sensors (see user manual included with sensors on pairing).
3. Make sure the Cycling Computer Hot Key is set to **CONNECT PHONE**. (Page 15)
4. Check the mobile device>Settings>Bluetooth® and ALA COACH+ App>Settings>My Sensors>Cycling Computer is ON.

(Continued on next page.)

8-4 Synchronize with Smartphone

! (...Continued from previous page.)


- Precautions on connecting smartphone for Exercise Sync.:
- %Basic settings from ALA COACH+ App in your mobile device applies when bicycling with synchronized smartphone.
- &.Please keep the mobile device and Cycling Computer within 10 meter direct sight distance from each other during exercise sync.
- 3.The exercise result data would be saved in ALA COACH+ App>FILE instead of your Cycling Computer after the exercise is ended.

8-4 Synchronize with Smartphone

STEP1 Open ALA COACH+ App>Settings>My Sensors>Cycling Computer >Cycling Computer User Setting.



STEP2 Setup in sequence.

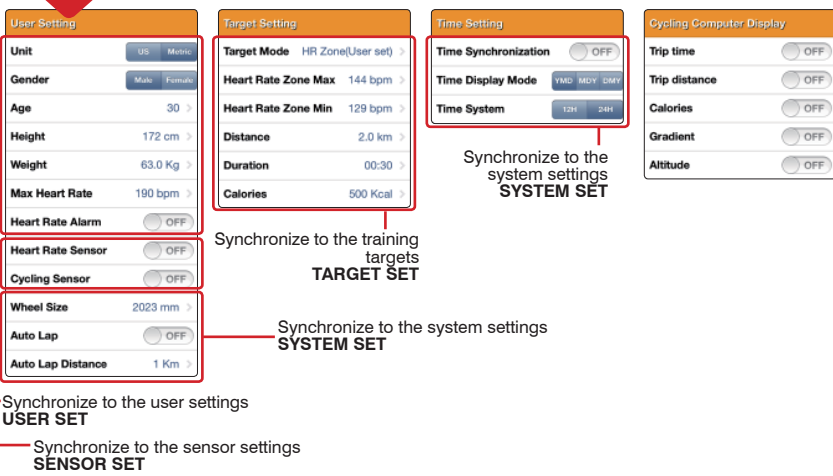

8-4 Synchronize with Smartphone

STEP3 Open ALA COACH+ App>Settings>My Sensors>Cycling Computer >User Setting Sync. >SMART CYCLING.



STEP4 Synchronization steps:

- 1.When Cycling Computer is in standby mode, Press **PHONE SYNC.**, Press **←** to point to **PHONE SYNC.**, Press **↵** to create Bluetooth connection, after connected, press the App **Start** button.
- 2.Once Sync. is completed, the App prompts **OK**, press the App upper left button to exit the mobile device, and Key **↵** to exit your Cycling Computer.



! Precautions on connecting smartphone for Synchronizing with Smartphone:

- Check the mobile device>Settings>Bluetooth® system and ALA COACH+ App>Settings>My Sensors>Cycling Computer is ON.
- Make sure your smartphone or mobile device has been paired with your Cycling Computer otherwise, please pair the two in advance. (Page 24)
- Keep your mobile device and Cycling Computer within 10cm from each other and keep both away from other Bluetooth devices during synchronization.

- Product: **Cyclaid 10** Bluetooth Cycling Computer
- Model: CB300
- Operation temperature: 10°C to 60°C (50°F to 140°F)
- Battery type: CR2032
- Battery life: Around one year on average
(on the basis of exercise seven days per week and one hour per day)
- Battery low indicator
- Backlight: EL

- Transmission technology: Bluetooth 4.0 (Bluetooth® Smart)
- Receiving transmission distance: around 10 meters (light of sight)
- Compatible accessories:
ALATECH Bluetooth 4.0 Heart Rate Strap (Optional)
ALATECH Bluetooth 4.0 Speed and Cadence Sensor (Optional)
- Compatible devices:
Mobile devices with iOS 5.0 or later system version (iPhone 4S or later)

- Dimension: L60.5×W37.5×D13.5mm
- Weight: 27.8g
- Material employed: ABS case


■ Precautions for use with Cyclaid 10

- Due to we cannot guarantee compatibility with other manufacturer's sensors, we sincerely recommend you use ALATECH Bluetooth sensors with your Cyclaid 10 for bicycle activity tracking. Recommend compatible sensors as below:
ALATECH Heart Rate Strap (model CS009/CS010/CS011)
ALATECH Speed and Cadence Sensor (model SC001BLE)
- To ensure sufficient transmission range from your heart rate strap to your smartphone, keep your smartphone in front of you. We recommend you do not put it in a back pocket or backpack during iPhone Exercise Sync.

■ Take Care of your Cyclaid 10

- DO NOT drop or hit your Cycling Computer.
- DO NOT expose your Cycling Computer to extreme temperature or humidity.
- DO NOT use general purpose non-adhesive screen sheet to protect the panel from scratching.
- DO NOT try to disassemble, repair or modify your Cycling Computer. Failure to do so may void the warranty.

■ Fail to Connect to Bluetooth Devices

- In case your Cyclaid 10 failed to connect to a Bluetooth device, please do the following:
 1. Check battery power in your Cycling Computer and the mobile device.
 2. Make sure the Cycling Computer HOT KEY is set to **CONNECT PHONE**. (Page 15)
 3. Check whether your Cycling Computer is enabled, ALA COACH+ App > Settings > My Sensors > Cycling Computer.
 4. Keep the mobile device and your Cycling Computer within 10 meters direct sight distance from each other.
 5. If the Bluetooth indicator on the device status bar turns from white to semi-transparent, restart the mobile device, Bluetooth® system and ALA COACH+ App. 
 6. Restart the mobile device, Bluetooth® system and ALA COACH+ App.
 7. If the problem persists, please try pairing the mobile device with other Bluetooth device to find out the cause is caused by any of your Cycling Computer, the mobile device, or the Bluetooth® system.
- If your Cyclaid 10 failed to connect with sensors through Bluetooth, please do the following:
 1. Check battery power in your Cycling Computer and the sensor.
 2. Make sure the Cycling Computer HOT KEY is set to **CONNECT SENSOR**. (Page 15)

Health Warnings


- Consult your doctor before starting or changing your exercise routine.

Battery Low Indicator

The battery low indicator prompts once the battery power is down to a certain level; the following functions may be affected or limited:

- Bluetooth connection lost and link with sensor or mobile device failed.
- Backlight failed to turn on.

In case the power low indicator persists displaying, get the battery replaced immediately.

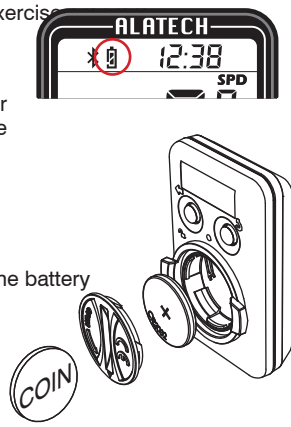

Replace Battery

- 1.Use a coin to twist it counter-clockwise to .
- 2.Remove the cover and insert (replace) the battery (type: CR2032) into the sensor with positive (+) side facing up.
- 3.Place the battery cover (points to). Use a coin to twist the cover clockwise to close (points to).

•Do the basic setups described in page 12-15 after every battery replacement. If you have done the Cycling Computer user setup with the ALA COACH+ App, you may re-sync settings to your Cycling Computer as described in "Phone sync." on page 26-27.

Precautions on the Use of Battery

Button battery in your Cycling Computer may suffer shortened life cycle or cause damage to the core, fire, chemical burns, electrolyte leakage, and/or personal injury.

- DO NOT expose your device to a heat source or high temperatures.
- DO NOT burn or drill your device or its battery.
- Please store your device in environment with a temperature range from 10°C to 60°C (50°F to 140°F) if it is not to be used for long time.
- DO NOT use your device in environment with temperatures exceeding 10°C to 60°C (50°F to 140°F).
- Please check local regulations for disposal of your device / battery or contact local waste disposal agencies.

Warnings on replaceable batteries:

- DO NOT remove batteries with pointed object.
- Keep batteries out of children's reach.
- DO NOT disassemble, drill, or damage batteries.
- Please replace batteries with correct ones. Fail to do so may lead to fire or explosion.
- Replaced button battery may contain perchlorate substance and require special disposal. Warnings on non-replacement battery: DO NOT try to remove nonreplacement battery.

CAUTION

RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE.

DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.



Please check local waste disposal regulations to dispose your wasted battery.

FCC Declaration of Conformity

This device complies with Part 15, FCC Code. Operation of this device is subject to the following two conditions:

- 1.Devices may not cause interference.
- 2.Must accept interference from other sources, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

•**FCC Caution:**
Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.



© 2014 ALATECH Technology Limited. All rights reserved.

2PF182128100004 (2014.04)

Ver:1