

# EMC

## TEST REPORT

**Report No. : TS11090148-EME**  
**Model No. : GS001**  
**Issued Date : Oct. 18, 2011**

**Applicant: ALATECH Technology Limited Co.**  
**39F., No.758, Jungming S.RD. Taichung, Taiwan**

**Test Method/ Standard: 47 CFR FCC Part 15.249 & ANSI C63.4 2003**

**Test By: Intertek Testing Services Taiwan Ltd.**  
**No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,**  
**Shiang-Shan District, Hsinchu City, Taiwan**

It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Intertek Laboratory. The test result(s) in this report only applies to the tested sample(s).

**The test report was prepared by:** Sign on File  
Julie Wang / Senior Assistant

**These measurements were taken by:** Sign on File  
Terry Hsu/ Engineer

**The test report was reviewed by:**

**Name Jimmy Yang**  
**Title Engineer**



## Table of Contents

Summary of Tests .....	3
1. General information.....	4
1.1 Identification of the EUT.....	4
1.2 Additional information about the EUT .....	5
1.3 Antenna description .....	5
2. Test specifications.....	6
2.1 Test standard .....	6
2.2 Operation mode .....	6
2.3 Test equipment.....	7
3. Radiated emission test .....	8
3.1 Operating environment .....	8
3.2 Test setup & procedure .....	8
3.3 Emission limit.....	9
3.3.1 Fundamental and harmonics emission limits .....	9
3.3.2 General radiated emission limits .....	9
3.4 Radiated spurious emission test data .....	10
3.4.1 Measurement results: frequencies equal to or less than 1 GHz.....	10
3.4.2 Measurement results: frequency above 1GHz.....	11
3.4.3 Measurement results: Fundamental emission.....	14
4. Radiated emission on the band edge FCC 15.209.....	16
5. Calculation of Average Factor .....	18
6. 20dB Bandwidth test .....	22
6.1 Operating environment.....	22
6.2 Test setup & procedure .....	22
6.3 Measured data of modulated bandwidth test results.....	22



**Summary of Tests**

Test	Reference	Results
Radiated Emission test	15.249(a), (c), (d), 15.209	Pass
Emission on the Band Edge	15.209	Pass
Conducted Emission of AC Power	15.207	N/A (DC Source)
Calculation of Average Factor	15.35	Pass
20dB Bandwidth	15.215(c)	Pass



## 1. General information

### 1.1 Identification of the EUT

Product: Pedometer  
Model No.: GS001  
FCC ID.: YQOGS001  
Frequency Range: 2401 MHz, 2450 MHz, 2480 MHz  
Channel Number: 3 channels  
Frequency of Each Channel: 2401 MHz, 2450 MHz, 2480 MHz  
Type of Modulation: GFSK  
Rated Power: DC 3 V from battery  
Power Cord: N/A  
Data Cable: N/A  
Sample Received: Sep. 28, 2011  
Test Date(s): Sep. 29, 2011 ~ Oct. 13, 2011  
Note 1:

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Note 2: When determining the test conclusion, the Measurement Uncertainty of test has been considered.

## **1.2 Additional information about the EUT**

The EUT is a Pedometer, and was defined as information technology equipment.

For more detail features, please refer to User's manual as file name "Installation guide.pdf"

## **1.3 Antenna description**

The EUT uses a permanently connected antenna.

Antenna Gain: 0 dBi max

Antenna Type: PCB antenna

Connector Type: N/A

## 2. Test specifications

### 2.1 Test standard

The EUT was performed according to the procedures in FCC Part 15 Subpart C Paragraph 15.249 for non-spread spectrum devices.

The test of radiated measurements according to FCC Part15 Section 15.33(a) had been conducted and the field strength of this frequency band was all meet limit requirement, thus we evaluate the EUT pass the specified test.

### 2.2 Operation mode

The EUT was supplied with 3 Vdc from battery.

The EUT was operated under Tx and Rx mode during all the test.

For the signal from Heart rate monitor is maximized through rotation and placement in the three orthogonal axes.



After verifying three axes, we found the maximum electromagnetic field was occurred at Y axis. The final test data was executed under this configuration.

The EUT configuration please refer to the “Spurious set-up photo.pdf”.

### 2.3 Test equipment

Equipment	Brand	Frequency range	Model No.	Last Cal.	Cal. interval
EMI Test Receiver	Rohde & Schwarz	9kHz~2.75GHz	ESCS 30	2010/9/3	1 year
EMI Test Receiver	Rohde & Schwarz	9kHz~3GHz	ESCI	2009/12/8	1 year
Spectrum Analyzer	Rohde & Schwarz	9kHz~30GHz	FSP 30	2010/8/16	1 year
Spectrum Analyzer	Rohde & Schwarz	20Hz~40GHz	FSEK 30	2010/1/18	1 year
Horn Antenna	SCHWARZBECK	1GHz~18GHz	BBHA9120D	2010/8/31	2 years
Bilog Antenna	SCHWARZBECK	25MHz~1.7GHz	VULB 9168	2009/9/22	2 years
Turn Table	HDGmbH	N/A	DS 420S	N/A	N/A
Antenna Tower	HDGmbH	N/A	MA 240	N/A	N/A
Pre-Amplifier	MITER	100MHz~26.5GHz	AFS42-00102 650	2009/10/27	2 years
LISN	Rohde & Schwarz	9KHz~30MHz	ESH3-Z5	2009/3/13	2 years
Power Meter	Anritsu	N/A	2495A	2010/10/20	1 year
Power Sensor	Anritsu	N/A	2411B	2010/10/20	1 year

Note: The above equipments are within the valid calibration period.


**3. Radiated emission test**

**3.1 Operating environment**

Temperature: 22 °C  
 Relative Humidity: 56 %  
 Atmospheric Pressure 1008 hPa

**3.2 Test setup & procedure**

The Diagram below shows the test setup, which is utilized to make these measurements.

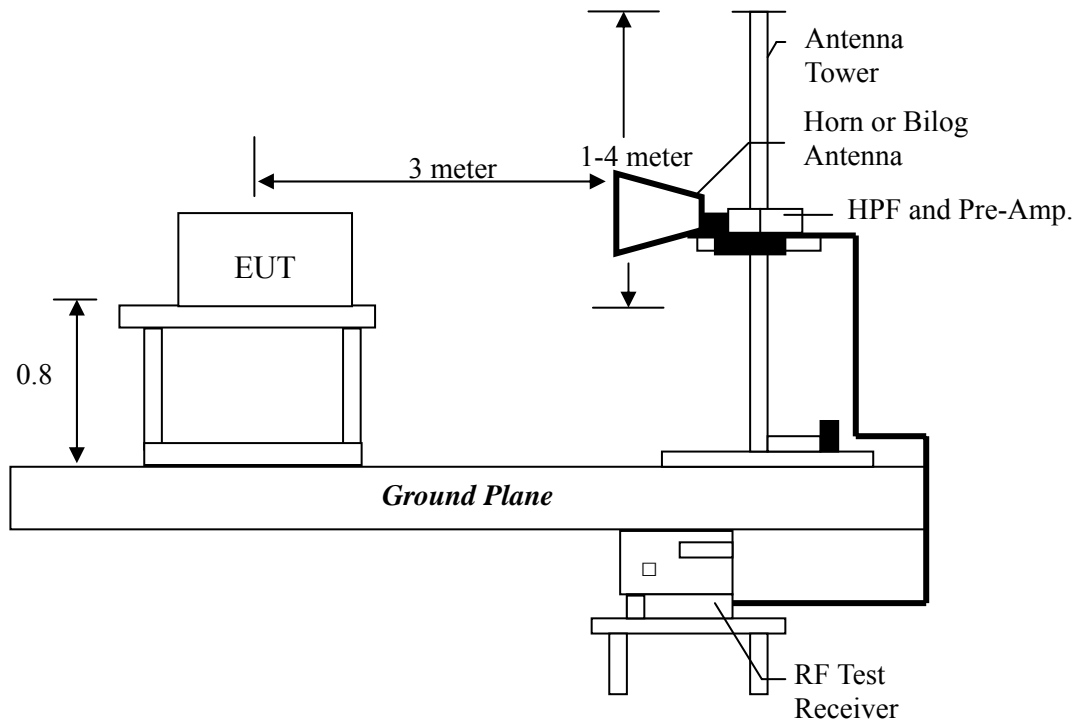

The signal is maximized through rotation and placement in the three orthogonal axes.

Radiated emissions were investigated cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 10Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1MHz RBW/VBW) recorded also on the report. The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.



The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

The EUT configuration please refer to the “Spurious set-up photo.pdf”.

### 3.3 Emission limit

#### 3.3.1 Fundamental and harmonics emission limits

Frequency (MHz)	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m@3m)	(dBuV/m@3m)	(uV/m@3m)	(dBuV/m@3m)
2400-2483.5	50	94	500	54

#### 3.3.2 General radiated emission limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

Frequency MHz	15.209 Limits (dB $\mu$ V/m@3m)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

Measurement uncertainty was calculated in accordance with TR 100 028-1.

Parameter	Uncertainty
Radiated Emission	$\pm 5.10$ dB
Conducted Emission	$\pm 2.786$ dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

### 3.4 Radiated spurious emission test data

#### 3.4.1 Measurement results: frequencies equal to or less than 1 GHz

The test was performed on EUT under continuously transmitting mode. Low, middle and high channels were verified. The worst case occurred Tx at high channel.

EUT : GS001  
 Worst Case : Tx at high channel

Polarization (circle)	Frequency (MHz)	Detector	Corr. Factor (dB/m)	Reading (dBuV)	Calculated dBuV/m	Limit (dBuV/m)	Margin (dB)
Vertical	53.28	QP	12.90	8.23	21.12	40.00	-18.88
Vertical	228.85	QP	12.08	10.72	22.80	46.00	-23.20
Vertical	247.28	QP	12.22	11.44	23.65	46.00	-22.35
Vertical	317.12	QP	14.10	13.48	27.58	46.00	-18.42
Vertical	353.01	QP	15.06	15.56	30.62	46.00	-15.38
Vertical	423.82	QP	16.47	13.98	30.45	46.00	-15.55
Horizontal	85.29	QP	9.45	8.39	17.83	40.00	-22.17
Horizontal	228.85	QP	11.63	8.75	20.37	46.00	-25.63
Horizontal	247.28	QP	12.36	8.44	20.80	46.00	-25.20
Horizontal	317.12	QP	14.32	10.09	24.40	46.00	-21.60
Horizontal	514.03	QP	18.77	10.29	29.06	46.00	-16.94
Horizontal	661.47	QP	21.52	9.03	30.54	46.00	-15.46

Remark:

1. Corr. Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Corr. Factor

**3.4.2 Measurement results: frequency above 1GHz**

EUT : GS001  
 Test Condition : Tx at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Average Factor (dB)	Corrected Reading (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4802.00	PK	V	35.1	38.54	56.66	-	60.10	74	-13.90
4802.00	AV	V	35.1	38.54	56.66	-58.998	1.10	54	-52.90
4802.00	PK	H	35.1	38.54	47.45	-	50.89	74	-23.11
4802.00	AV	H	35.1	38.54	47.45	-58.998	-8.11	54	-62.11

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. According to 15.31 (o), the amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported.
4. Average value = peak value + average factor

EUT : GS001  
 Test Condition : Tx at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Average Factor (dB)	Corrected Reading (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4900.00	PK	V	35.1	38.54	52.48	-	55.92	74	-18.08
4900.00	AV	V	35.1	38.54	52.48	-58.998	-3.08	54	-57.08
4900.00	PK	H	35.1	38.54	45.48	-	48.92	74	-25.08
4900.00	AV	H	35.1	38.54	45.48	-58.998	-10.08	54	-64.08
7350.00	PK	H	33	44.6	35.89	-	47.49	74	-26.51
7350.00	AV	H	33	44.6	35.89	-58.998	-11.51	54	-65.51

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. According to 15.31 (o), the amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported.
4. Average value = peak value + average factor

EUT : GS001  
 Test Condition : Tx at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Average Factor (dB)	Corrected Reading (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4960.00	PK	V	35.1	38.54	50.61	-	54.05	74	-19.95
4960.00	AV	V	35.1	38.54	50.61	-58.998	-4.95	54	-58.95
7440.00	PK	V	33	44.6	40.78	-	52.38	74	-21.62
7440.00	AV	V	33	44.6	40.78	-58.998	-6.62	54	-60.62
4960.00	PK	H	35.1	38.54	47.7	-	51.14	74	-22.86
4960.00	AV	H	35.1	38.54	47.7	-58.998	-7.86	54	-61.86
7440.00	PK	H	33	44.6	43.92	-	55.52	74	-18.48
7440.00	AV	H	33	44.6	43.92	-58.998	-3.48	54	-57.48

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. According to 15.31 (o), the amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported.
4. Average value = peak value + average factor

### 3.4.3 Measurement results: Fundamental emission

EUT : GS001

Test Condition : Tx at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Average Factor (dB)	Corrected Reading (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
2401.00	PK	H	32.81	56.68	-	89.49	113.9794	-24.49
2401.00	AV	H	32.81	56.68	-58.998	30.49	93.9794	-63.49

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor
3. Average value = peak value + average factor

EUT : GS001

Test Condition : Tx at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Average Factor (dB)	Corrected Reading (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
2450.00	PK	H	33	60.46	-	93.46	113.9794	-20.52
2450.00	AV	H	33	60.46	-58.998	34.46	93.9794	-59.52

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor
3. Average value = peak value + average factor

EUT : GS001  
Test Condition : Tx at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Average Factor (dB)	Corrected Reading (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
2480.00	PK	H	33.12	62.98	-	96.10	113.9794	-17.88
2480.00	AV	H	33.12	62.98	-58.998	37.10	93.9794	-56.88

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor
3. Average value = peak value + average factor



#### 4. Radiated emission on the band edge FCC 15.209

##### Method of Measurement:

The frequency range from 30 MHz to 1000 MHz using Bilog Antenna.  
The frequency range over 1 GHz using Horn Antenna.


Radiated emissions were investigated cover the frequency range from 30 MHz to 1000 MHz using a receiver RBW of 120 kHz record QP reading, and the frequency over 1 GHz using a spectrum analyzer RBW of 1 MHz and 10 Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/VBW) recorded also on the report.

Channel	Measurement Freq.Band (MHz)	Detector	Average Factor (dB)	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
1 (lowest)	2310-2390	PK	-	57.19	74	-16.81
1 (lowest)	2310-2390	AV	-58.998	-1.808	54	-55.808
3 (highest)	2483.5-2500	PK	-	57.47	74	-16.53
3 (highest)	2483.5-2500	AV	-58.998	-1.528	54	-55.528


Please see the plots below.



### Band Edge @ channel 1 (PK)

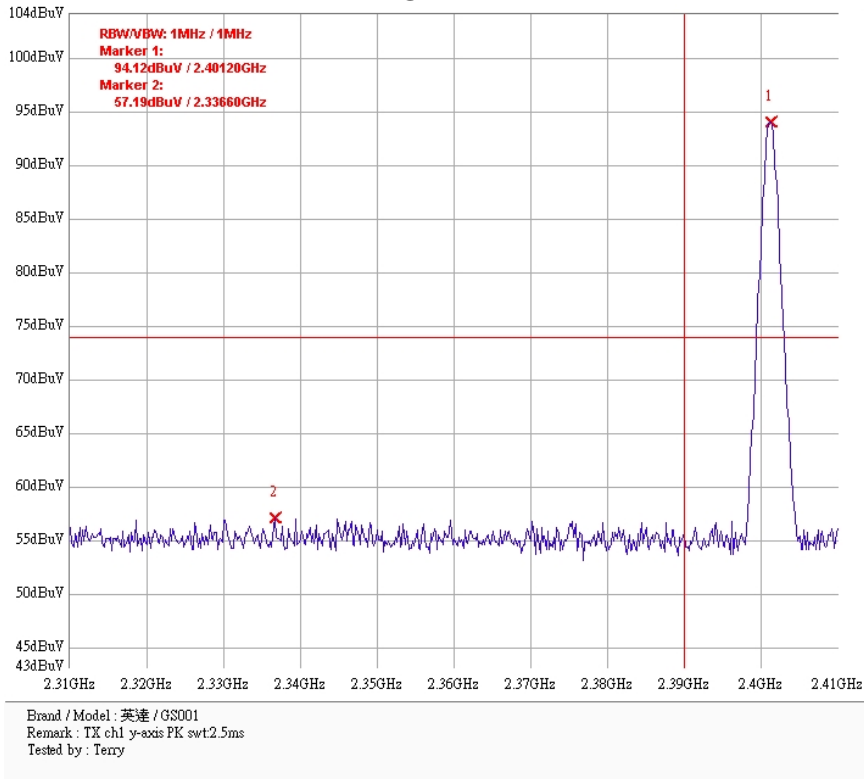

### Band Edge @ channel 3 (PK)

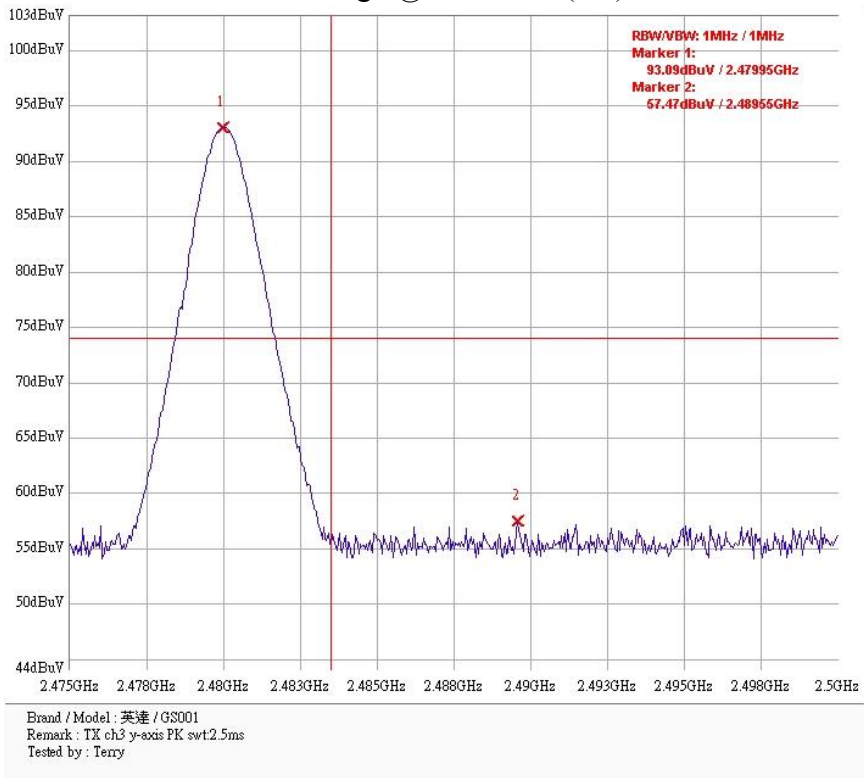

## 5. Calculation of Average Factor

The specification for output field strengths in accordance with the FCC rules specify measurements with an average detector. During testing, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The time period over which the duty cycle is measured is 100 ms or the repetition cycle, whichever is a shorter time frame. The duty cycle is measured by placing the spectrum analyzer in zero span mode.


The duty cycles of handset and base unit are exactly the same.

Duty cycle correction factor in dB =  $20 \log (\text{on-time}/100\text{ms})$  or  $20 \log (\text{on-time}/\text{period})$  #If period is less than 100ms

Therefore, duty cycle correction factor =  $20 \log_{10} (0.112/100) = -58.998 \text{ dB}$


Please see the plot below.

### Duty Cycle at low channel: the period

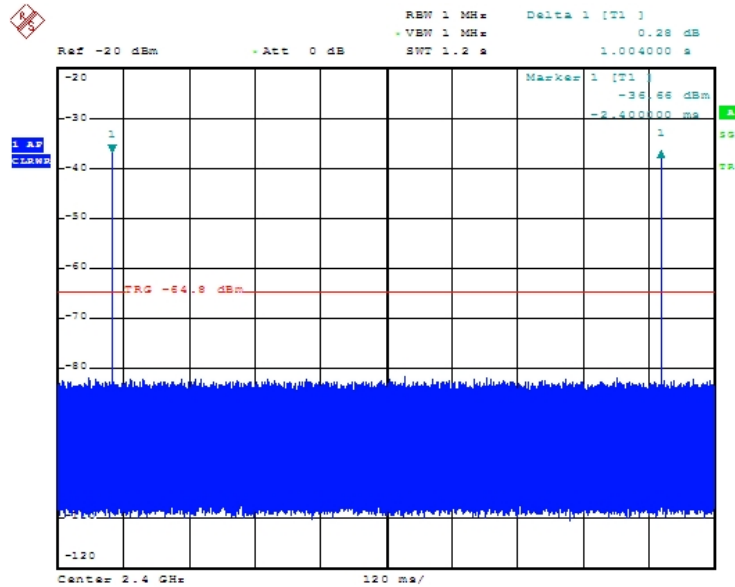


2nd comment ...

### Duty Cycle at low channel: the pulse

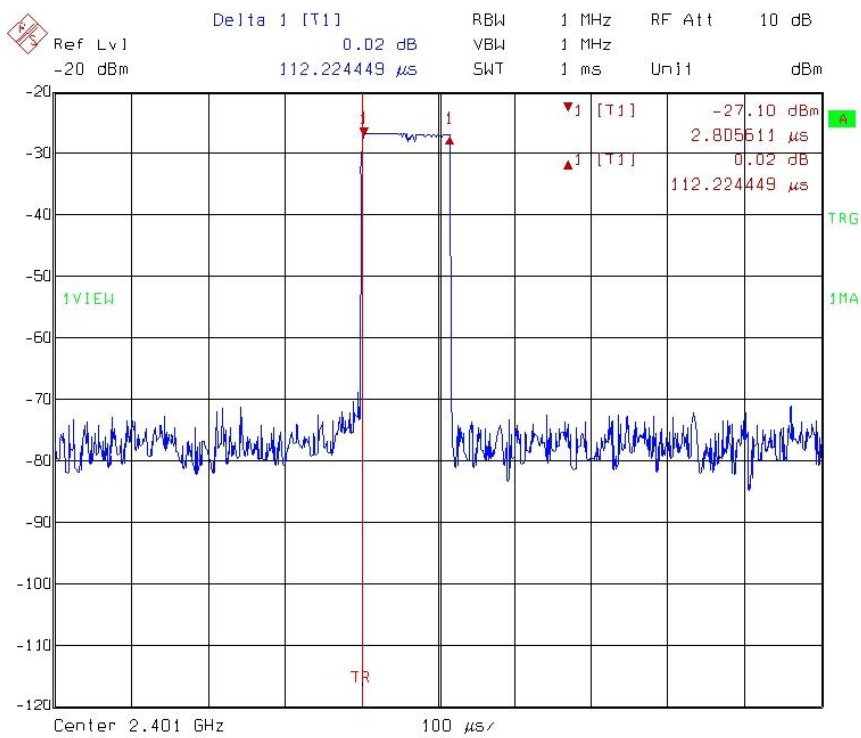


### Duty Cycle at middle channel: the period

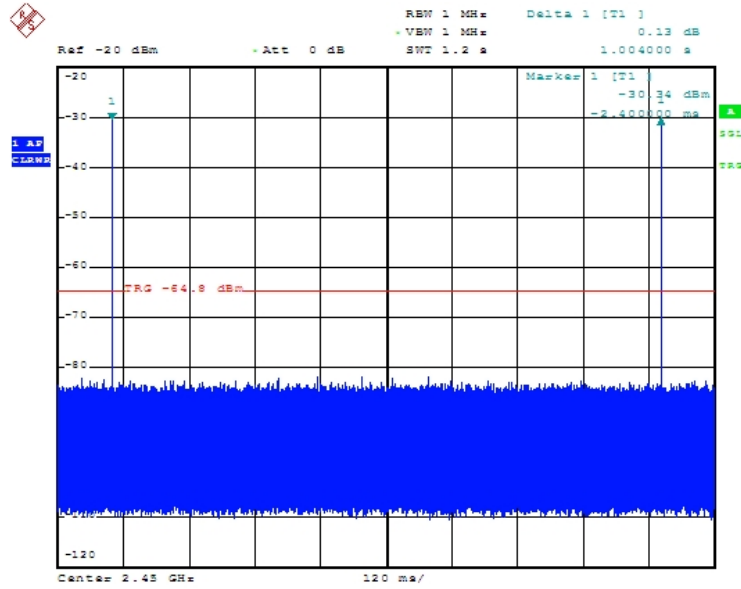


2nd comment ...

### Duty Cycle at middle channel: the pulse

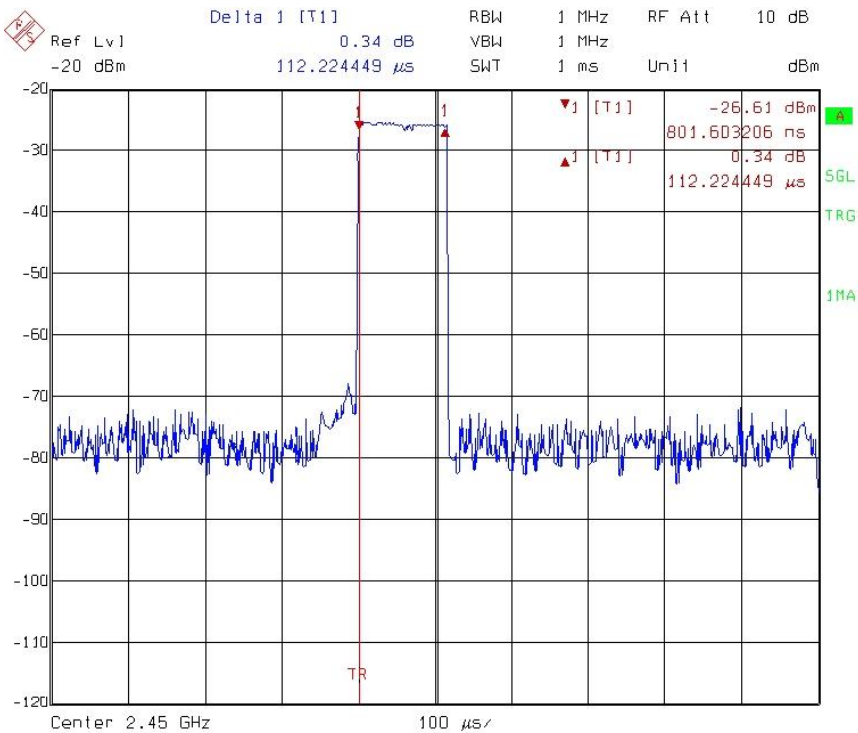


### Duty Cycle at high channel: the period

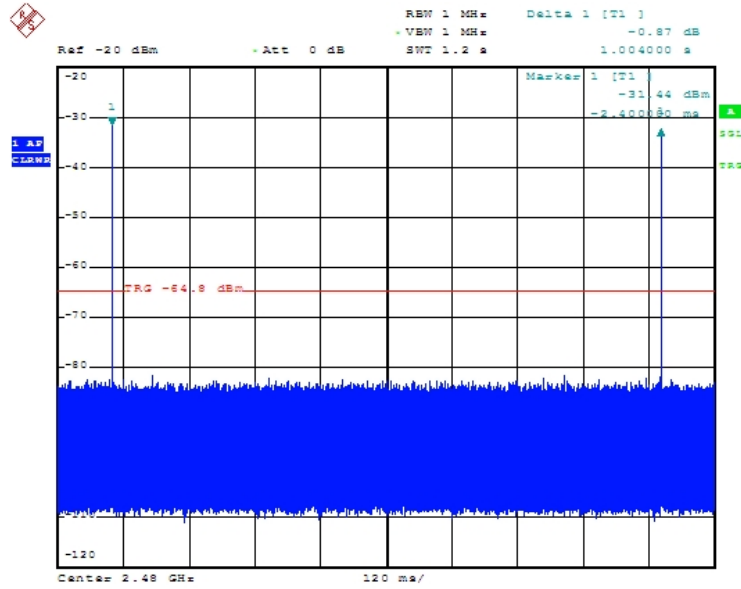

2nd comment ...

### Duty Cycle at high channel: the pulse

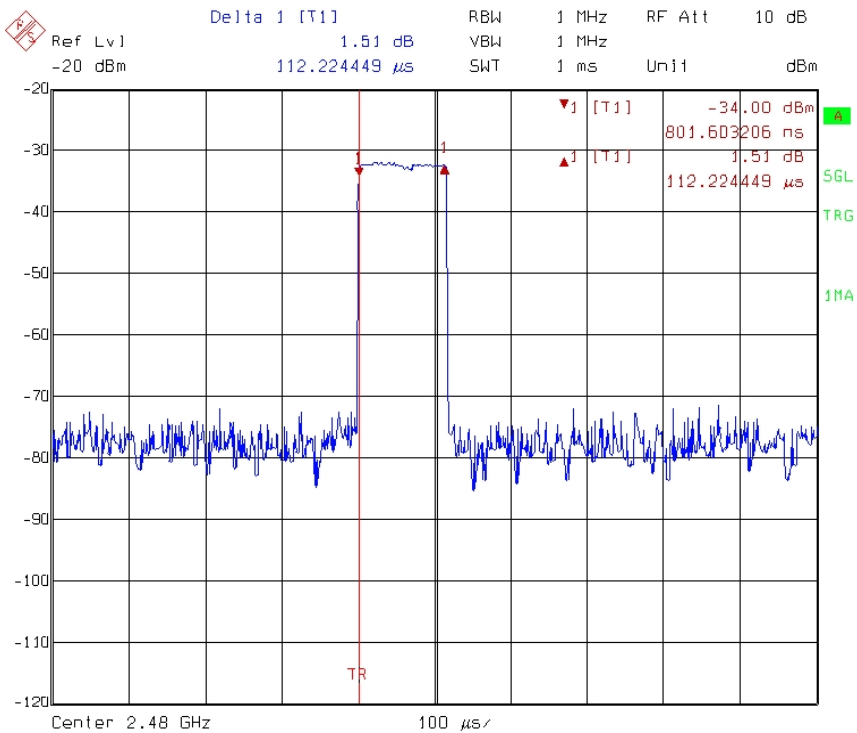

## 6. 20dB Bandwidth test

### 6.1 Operating environment

Temperature: 22 °C  
Relative Humidity: 56 %  
Atmospheric Pressure: 1008 hPa

### 6.2 Test setup & procedure

The 20dB bandwidth was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at 100 kHz, the video bandwidth  $\geq$  RBW, and the SPAN may equal to approximately 2 to 3 times the 20dB bandwidth. The test was performed at 3 channels (lowest, middle and highest channel). The maximum 20dB modulation bandwidth is in the following Table.


### 6.3 Measured data of modulated bandwidth test results

Channel	Frequency (MHz)	Bandwidth (kHz)
low	2401	961.924
middle	2450	671.343
high	2480	480.962


Please see the plot below.



### 20 dB Bandwidth @ low channel

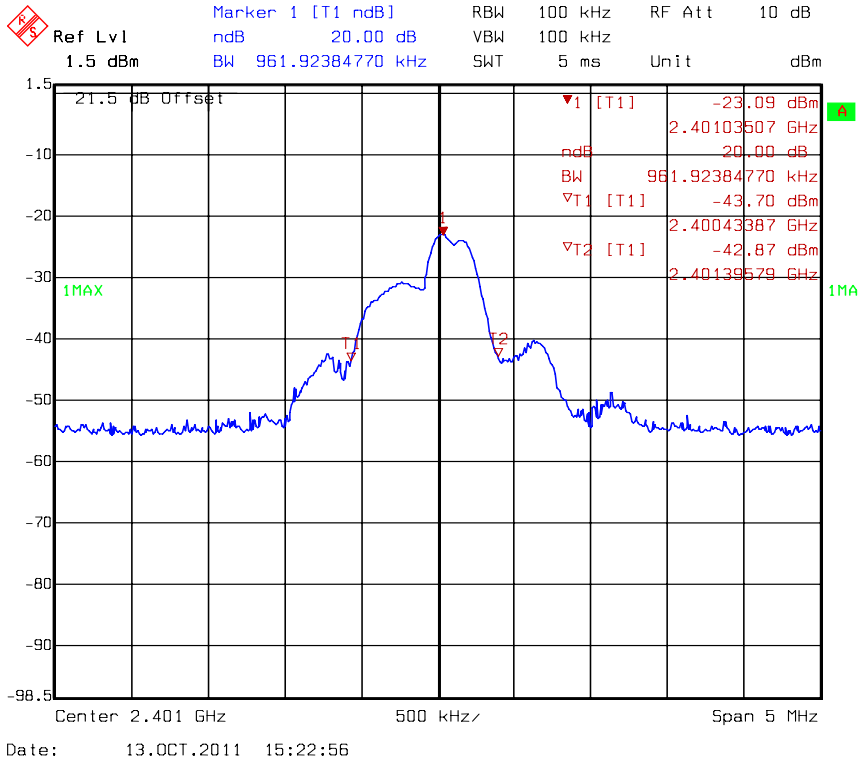

### 20 dB Bandwidth @ middle channel

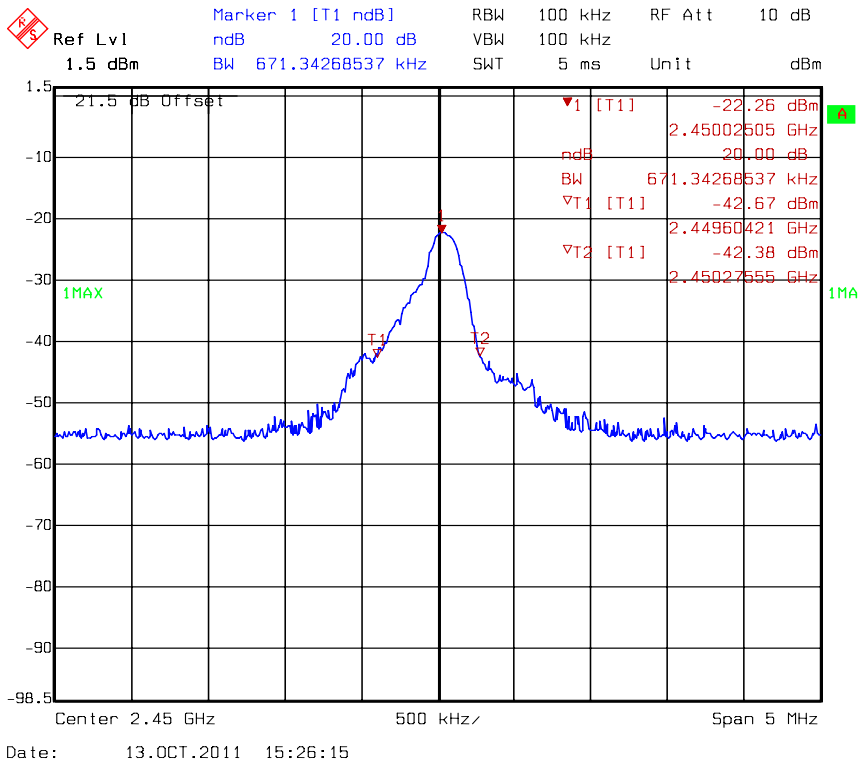

### 20 dB Bandwidth @ high channel

