


025: Touch Right_Wi-Fi_5GHz_802.11a_6Mbps_CH52

Date: 17/04/2015

DUT: A1428; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

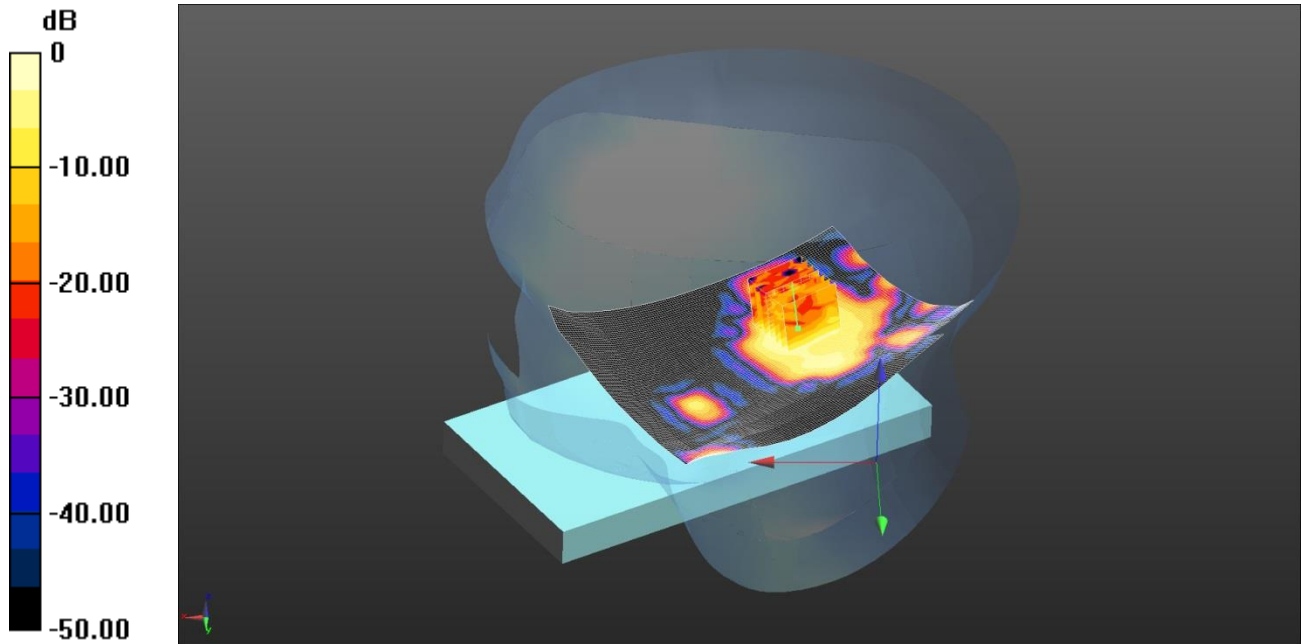

0 dB = 0.337 W/kg = -4.72 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz HSL Medium parameters used (interpolated): f = 5260 MHz; $\sigma = 4.594$ S/m; $\epsilon_r = 34.48$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(5.3, 5.3, 5.3); Calibrated: 17/03/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 16/09/2014
- Phantom: SAM (20deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Touch Right/Area Scan (131x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.331 W/kg

Configuration/Touch Right/Zoom Scan (7x7x12) 2 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.792 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.941 W/kg


SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.337 W/kg

026: Front of EUT-Body-Worn_Wi-Fi 5GHz_802.11a 6Mbps_CH64

Date: 10/04/15

DUT: A1428; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDTECSBT301

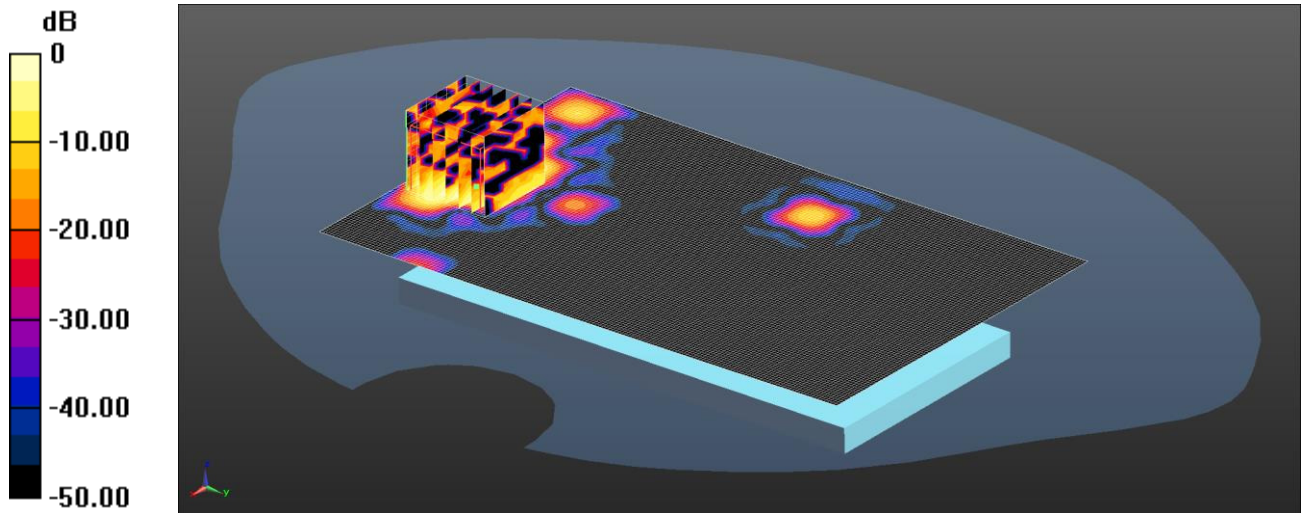

0 dB = 0.0588 W/kg = -12.31 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: 5GHz MSL Medium parameters used (interpolated): $f = 5320$ MHz; $\sigma = 5.433$ S/m; $\epsilon_r = 48.377$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.18, 4.18, 4.18); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 15/04/14
- Phantom: SAM (20deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Front of EUT Facing Phantom/Area Scan (101x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.125 W/kg

Configuration/Front of EUT Facing Phantom/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.999 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.540 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.017 W/kg


Maximum value of SAR (measured) = 0.0588 W/kg

Note: SAR level measured is very low as equivalent to noise floor.

027: Touch Right_Wi-Fi_5GHz_802.11a_6Mbps_CH136

Date: 17/04/2015

DUT: A1428; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDTECSBT301

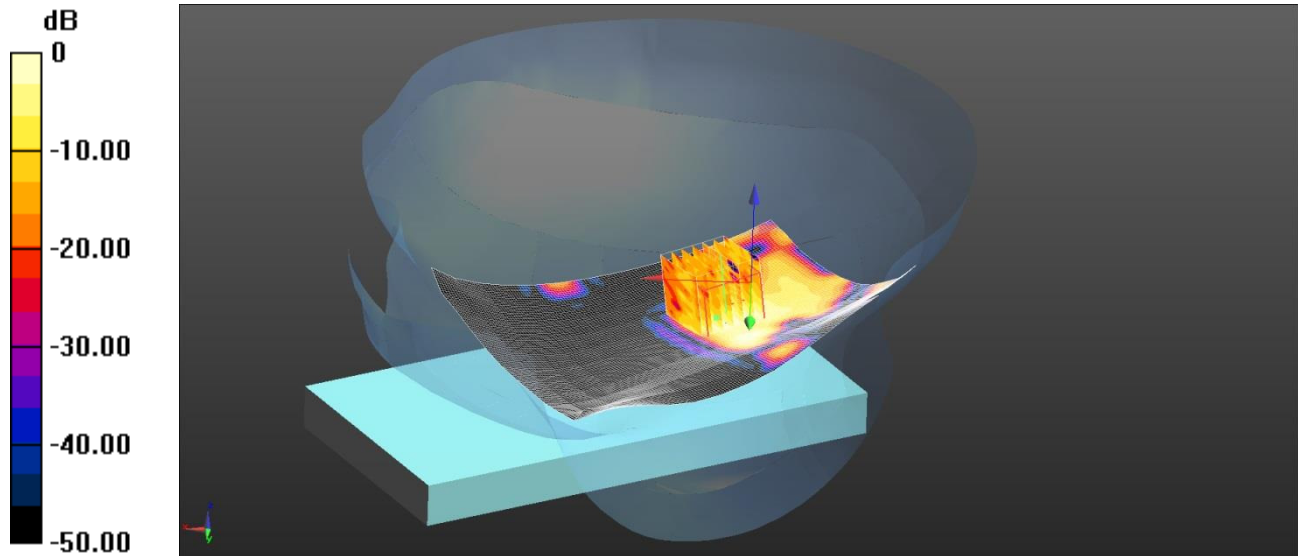

0 dB = 0.268 W/kg = -5.72 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5680 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz HSL Medium parameters used (interpolated): $f = 5680$ MHz; $\sigma = 5.026$ S/m; $\epsilon_r = 33.896$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(4.77, 4.77, 4.77); Calibrated: 17/03/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 16/09/2014
- Phantom: SAM (20deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Touch Right/Area Scan (131x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.492 W/kg

Configuration/Touch Right/Zoom Scan (7x7x12) 2 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.672 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.791 W/kg


SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.268 W/kg

028: Front of EUT-Body-Worn_Wi-Fi 5GHz_802.11a 6Mbps_CH124

Date: 14/04/15

DUT: A1428; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

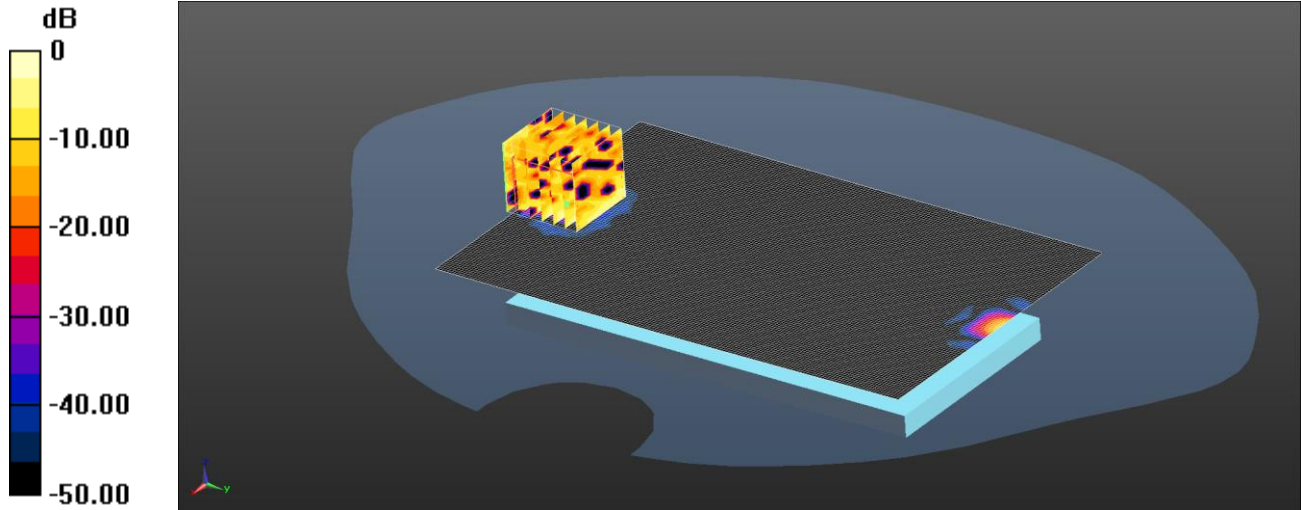

0 dB = 0.0388 W/kg = -14.11 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5620 MHz; Duty Cycle: 1:1

Medium: 5GHz MSL Medium parameters used (interpolated): $f = 5620$ MHz; $\sigma = 5.921$ S/m; $\epsilon_r = 47.376$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(3.79, 3.79, 3.79); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 15/04/14
- Phantom: SAM (20deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Front of EUT Facing Phantom 2/Area Scan (101x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0293 W/kg

Configuration/Front of EUT Facing Phantom 2/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.877 V/m; Power Drift = 1.58 dB

Peak SAR (extrapolated) = 0.747 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.011 W/kg


Maximum value of SAR (measured) = 0.0388 W/kg

Note: SAR level measured is very low as equivalent to noise floor.

029: Touch Right_Wi-Fi_5GHz_802.11a_6Mbps_CH157

Date: 17/04/2015

DUT: A1428; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

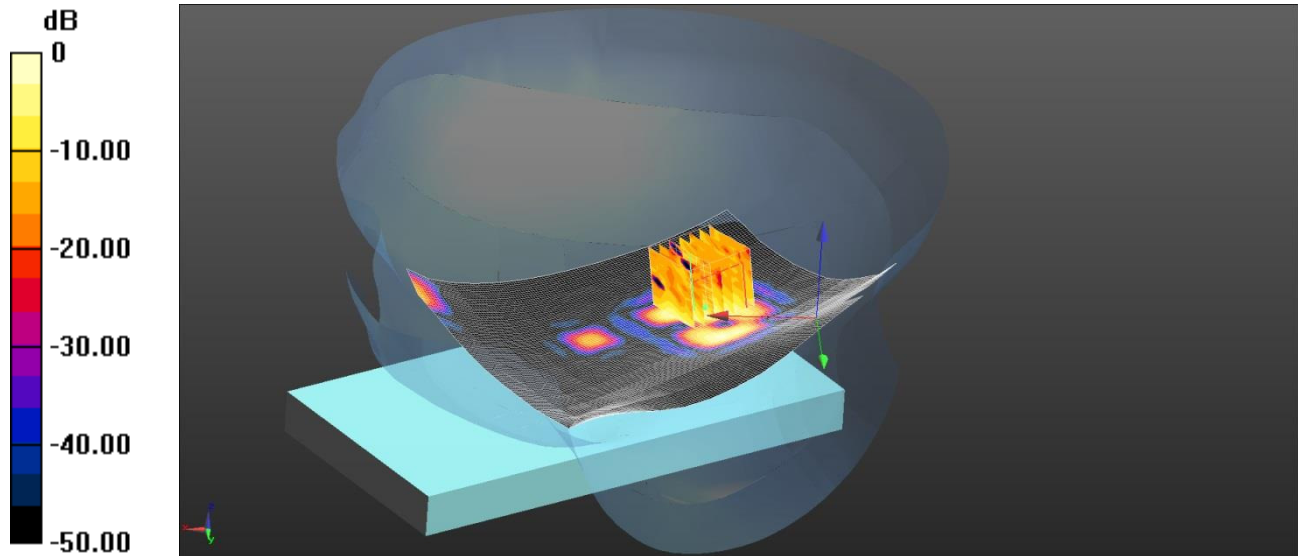

0 dB = 0.418 W/kg = -3.79 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz HSL Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.134$ S/m; $\epsilon_r = 33.784$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(4.73, 4.73, 4.73); Calibrated: 17/03/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 16/09/2014
- Phantom: SAM (20deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)


Configuration/Touch Right/Area Scan (131x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.844 W/kg

Configuration/Touch Right/Zoom Scan (7x7x12) 2 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 2.398 V/m; Power Drift = 0.20 dB
Peak SAR (extrapolated) = 1.42 W/kg
SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.077 W/kg
Maximum value of SAR (measured) = 0.418 W/kg

030: Front of EUT-Body-Worn_Wi-Fi 5GHz_802.11a 6Mbps_CH149

Date: 14/04/15

DUT: A1428; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

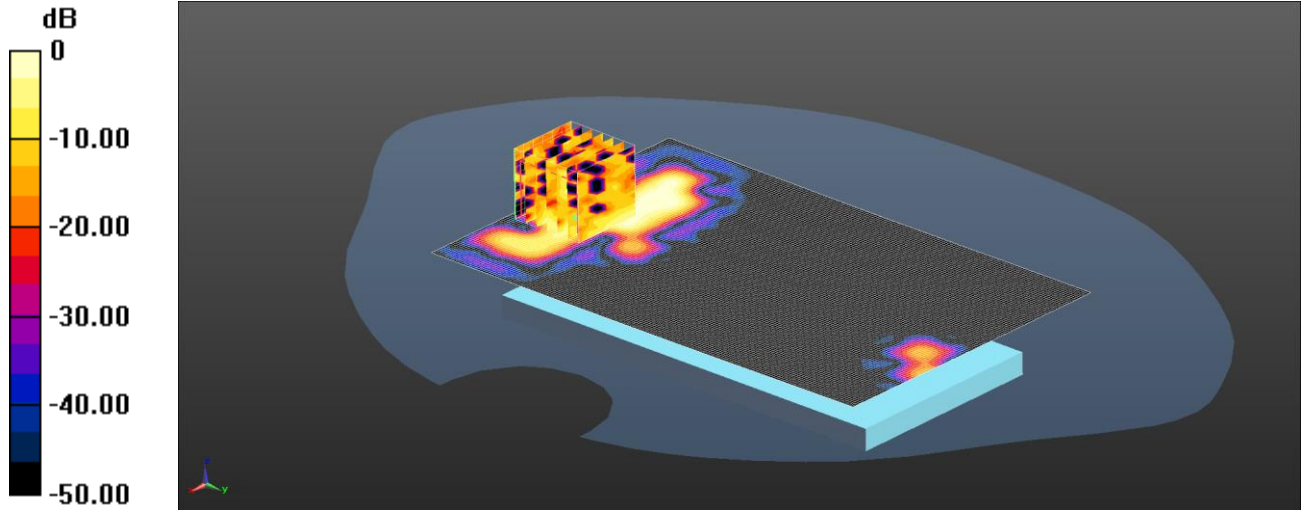

0 dB = 0.0573 W/kg = -12.42 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: 5GHz MSL Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 6.122$ S/m; $\epsilon_r = 47.066$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.06, 4.06, 4.06); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 15/04/14
- Phantom: SAM (20deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom/Area Scan (101x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.134 W/kg

Configuration/Back of EUT Facing Phantom/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.288 V/m; Power Drift = 0.28 dB

Peak SAR (extrapolated) = 0.541 W/kg

SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.016 W/kg


Maximum value of SAR (measured) = 0.0573 W/kg

Note: SAR level measured is very low as equivalent to noise floor.

031: Back of EUT-Body-Worn_Bluetooth_1Mbps_CH39

Date: 29/04/2015

DUT: A1428; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

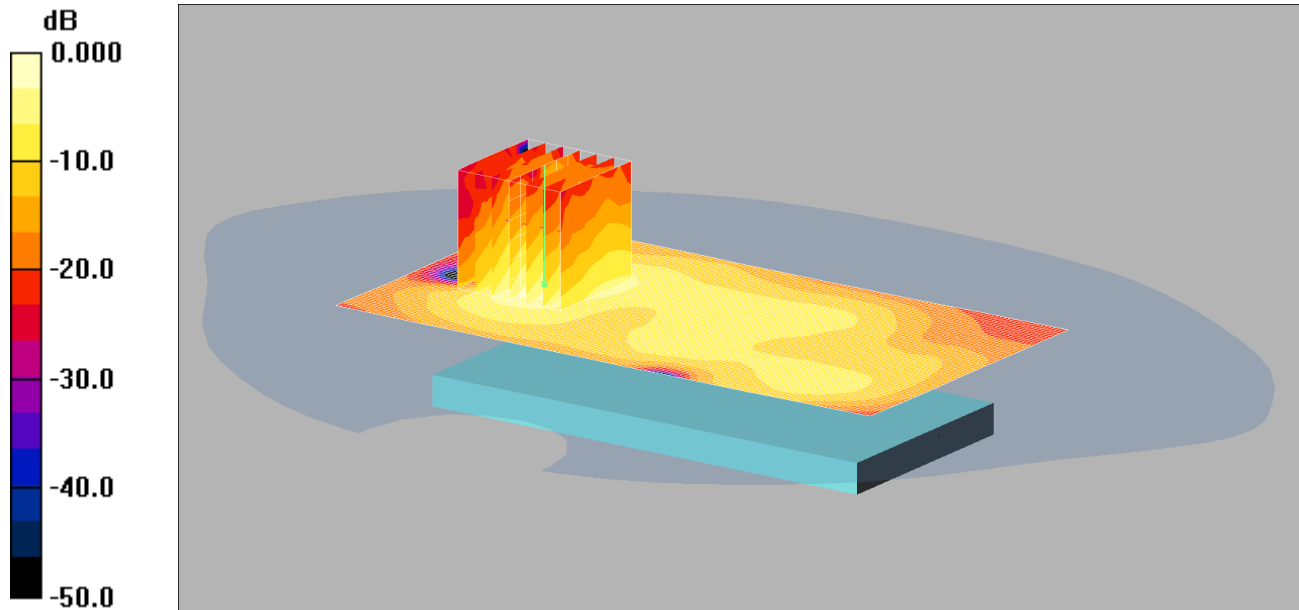

0 dB = 0.063mW/g

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(3.95, 3.95, 3.95);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 16/05/2014
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back - Middle/Area Scan (71x131x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.071 mW/g

Back - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.24 V/m; Power Drift = 0.176 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.063 mW/g

12.4. SAR Test Plots – A1429

This appendix contains the following SAR distribution scans.


Lower Antenna

Scan Reference Number	Title
001	Touch Left_GSM850_Voice_CH190
002	Back of EUT-Body-Worn_GSM850_Voice_CH251
003	Back of EUT-Hotspot_GSM850_GPRS 2Tx_CH251
004	Touch Right_PCS1900_Voice_CH810
005	Back of EUT_Body-Worn_PCS1900_Voice_CH810
006	Back of EUT_Body-Worn_PCS1900_GPRS 2Tx_CH512
007	Touch Right_UMTS FDD 2_RMC 12.2kbps_CH9262
008	Back of EUT_Body-Worn_UMTS FDD 2_RMC 12.2kbps_CH9400
009	Touch Left_UMTS FDD 5_RMS 12.2kbps_CH4132
010	Back of EUT-Body-Worn_UMTS FDD 5_RMC 12.2kbps_CH4233
011	Touch Left_CDMA BC0_1xRTT_CH777
012	Back of EUT-Body-Worn_CDMA BC0_1xRTT_CH777
013	Back of EUT-Body-Worn_CDMA BC0_1xEVDO Rel 0_CH777
014	Touch Right_CDMA BC1_1xRTT_CH600
015	Back of EUT_Body-Worn_CDMA BC1_1xRTT_CH600
016	Back of EUT_Body-Worn_CDMA BC1_1xEVDO Rel 0_CH600
017	Touch Left_CDMA BC10_1xRTT_CH684
018	Back of EUT-Body-Worn_CDMA BC10_1xRTT_CH684
019	Back of EUT-Body-Worn_CDMA BC10_1xEVDO Rel 0_CH684
020	Back of EUT-Body-Worn_LTE FDD 5_10MHz_1RB_Mid_CH20525
021	Touch Left_LTE FDD 13_10MHz_1RB_Mid_CH23230
022	Back of EUT-Body-Worn_LTE FDD 13_10MHz_1RB_Low_CH23230
023	Back of EUT_Body-Worn_LTE FDD 25_20MHz_1RB_Mid_CH26365
024	Touch Right_Wi-Fi 2.4GHz_802.11b_1Mbps_CH6
025	Back of EUT-Body-Worn_Wi-Fi 2.4GHz_802.11b_1Mbps_CH6
026	Touch_Right_Wi-Fi 5GHz_802.11a_6Mbps_CH48
027	Front of EUT-Body-Worn_Wi-Fi 5GHz_802.11a_6Mbps_CH48
028	Touch_Right_Wi-Fi 5GHz_802.11a_6Mbps_CH52
029	Front_of_EUT-Body-Worn_Wi-Fi 5GHz_802.11a_6Mbps_CH64
030	Touch_Right_Wi-Fi 5GHz_802.11a_6Mbps_CH124
031	Front_of_EUT-Body-Worn_Wi-Fi 5GHz_802.11a_6Mbps_CH116
032	Touch_Right_Wi-Fi 5GHz_802.11a_6Mbps_CH157
033	Front_of_EUT-Body-Worn_Wi-Fi 5GHz_802.11a_6Mbps_CH149
034	Back of EUT-Body-Worn_Bluetooth_1Mbps_CH39

001: Touch Left_GSM850_Voice_CH190

Date: 31/03/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

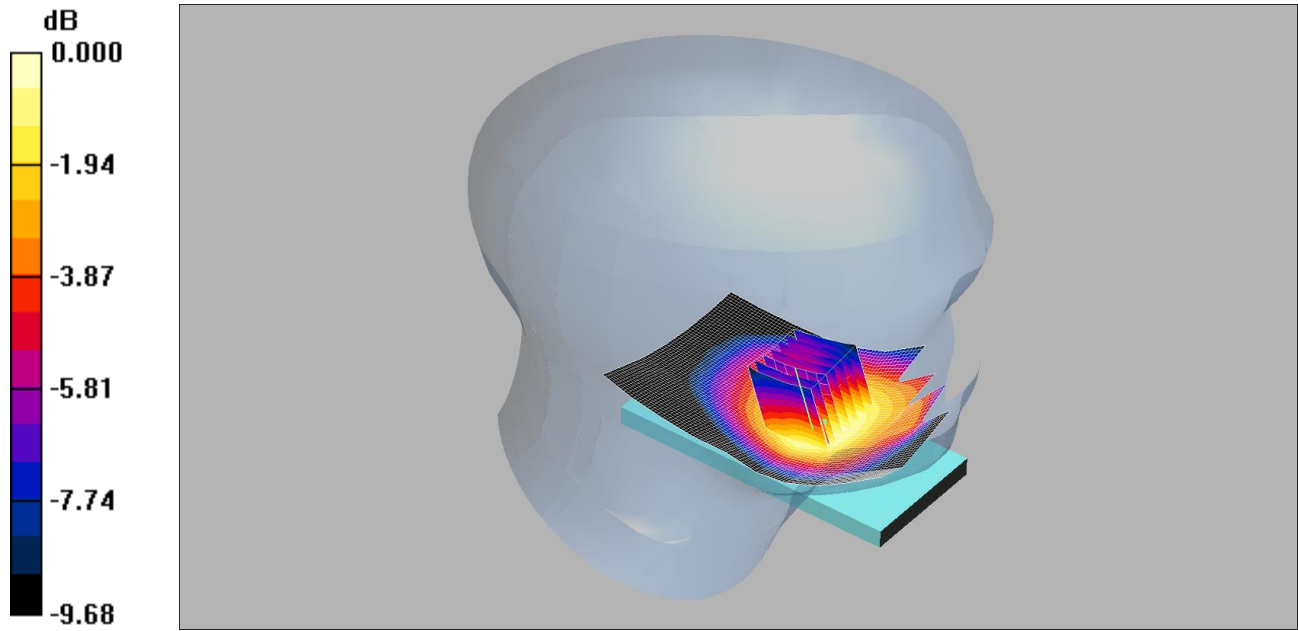

0 dB = 0.025mW/g

Communication System: GSM 850 MHz; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.28, 6.28, 6.28);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 16/05/2014
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Touch Left - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.025 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.70 V/m; Power Drift = 0.198 dB

Peak SAR (extrapolated) = 0.030 W/kg

SAR(1 g) = 0.024 mW/g; SAR(10 g) = 0.018 mW/g


Maximum value of SAR (measured) = 0.025 mW/g

Note: SAR level measured is very low as equivalent to noise floor.

002: Back of EUT-Body-Worn_GSM850_Voice_CH251

Date: 30/03/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

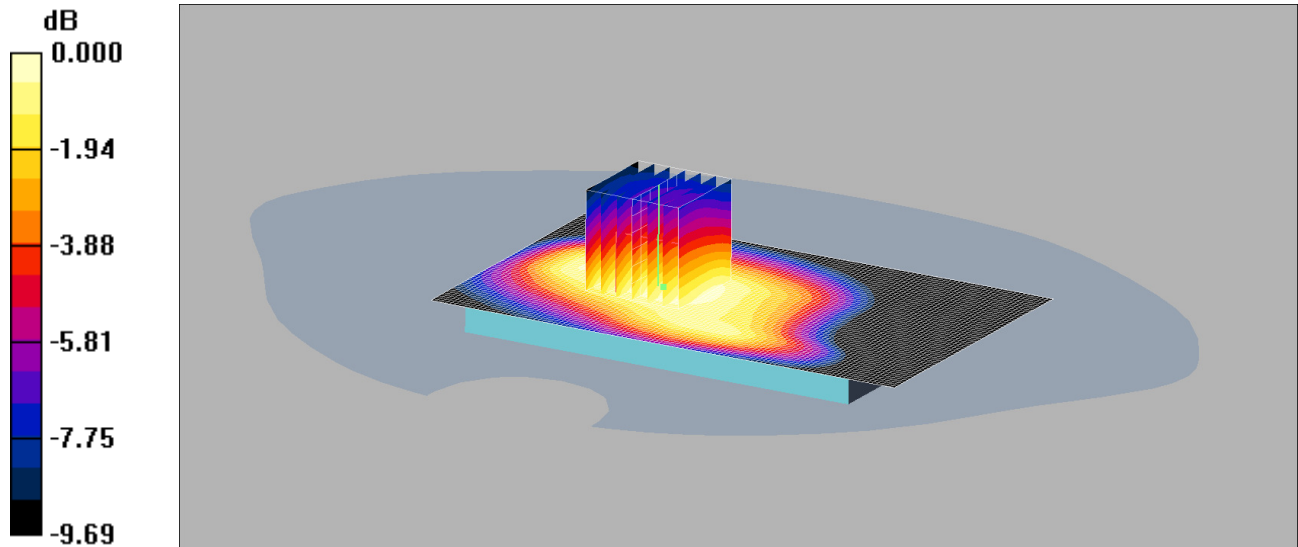

0 dB = 0.063mW/g

Communication System: GSM 850 MHz; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6, 6, 6);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 16/05/2014
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back of EUT Facing Phantom - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.064 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.04 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.077 W/kg

SAR(1 g) = 0.060 mW/g; SAR(10 g) = 0.043 mW/g


Maximum value of SAR (measured) = 0.063 mW/g

Note: SAR level measured is very low as equivalent to noise floor.

003: Back of EUT-Hotspot_GSM850_GPRS 2Tx_CH251

Date: 30/03/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

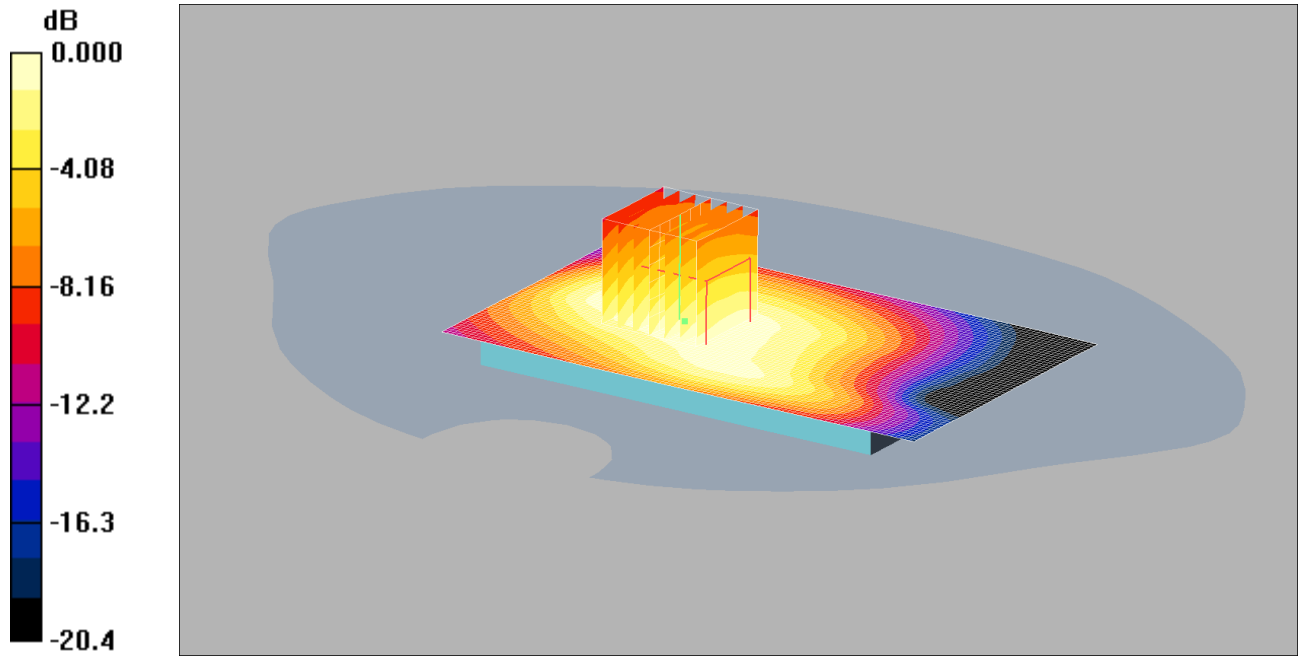

0 dB = 0.098mW/g

Communication System: GPRS 850 MHz 2TX; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6, 6, 6);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 16/05/2014
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back of EUT Facing Phantom - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.098 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.0 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.092 mW/g; SAR(10 g) = 0.066 mW/g


Maximum value of SAR (measured) = 0.098 mW/g

Note: SAR level measured is very low as equivalent to noise floor.

004: Touch Right_PCS1900_Voice_CH810

Date: 15/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

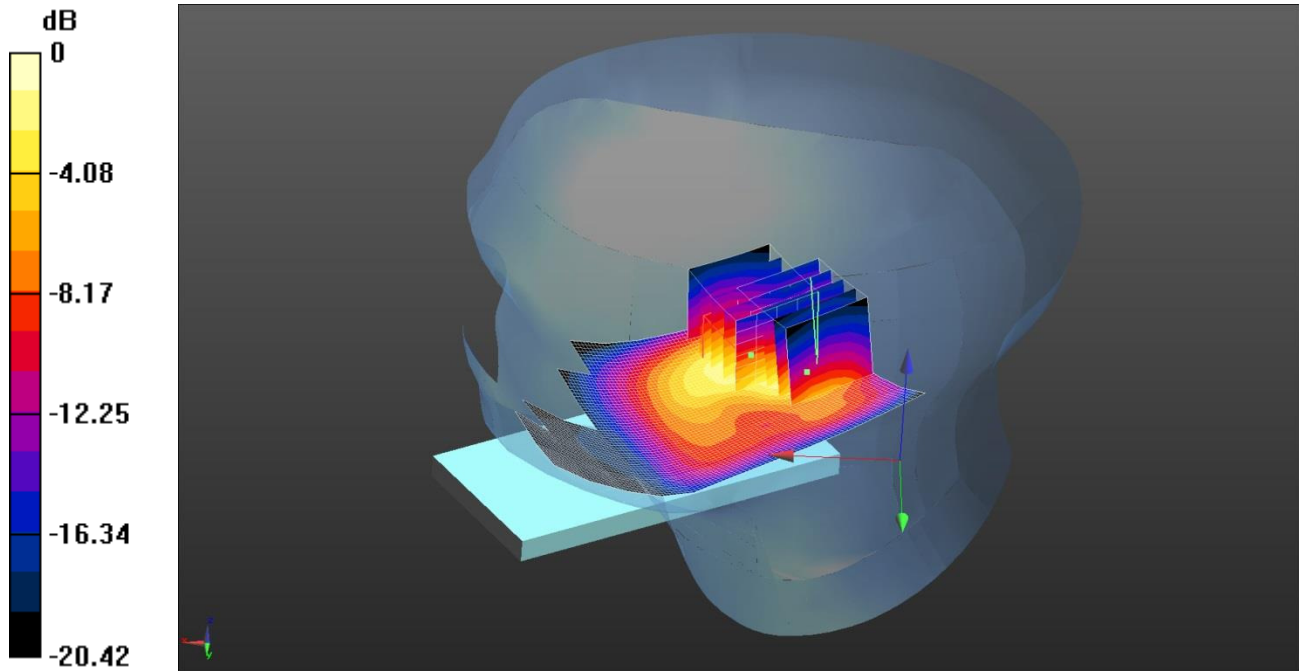

0 dB = 0.694 W/kg = -1.59 dBW/kg

Communication System: UID 0 - n/a, Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium: 1900 MHz HSL Medium parameters used (interpolated): f = 1909.8 MHz; $\sigma = 1.439$ S/m; $\epsilon_r = 38.985$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(5.07, 5.07, 5.07); Calibrated: 29/08/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 04/11/2014
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Right- Low/Area Scan 2 (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.664 W/kg

Configuration/Touch Right- Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.377 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.612 W/kg; SAR(10 g) = 0.305 W/kg

Maximum value of SAR (measured) = 0.727 W/kg

Configuration/Touch Right- Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.377 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.275 W/kg


Maximum value of SAR (measured) = 0.694 W/kg

Note: DASY system is configured to measure any secondary maxima that are within 2dB of the measured SAR level.

005: Back of EUT_Body-Worn_PCS1900_Voice_CH810

Date: 16/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

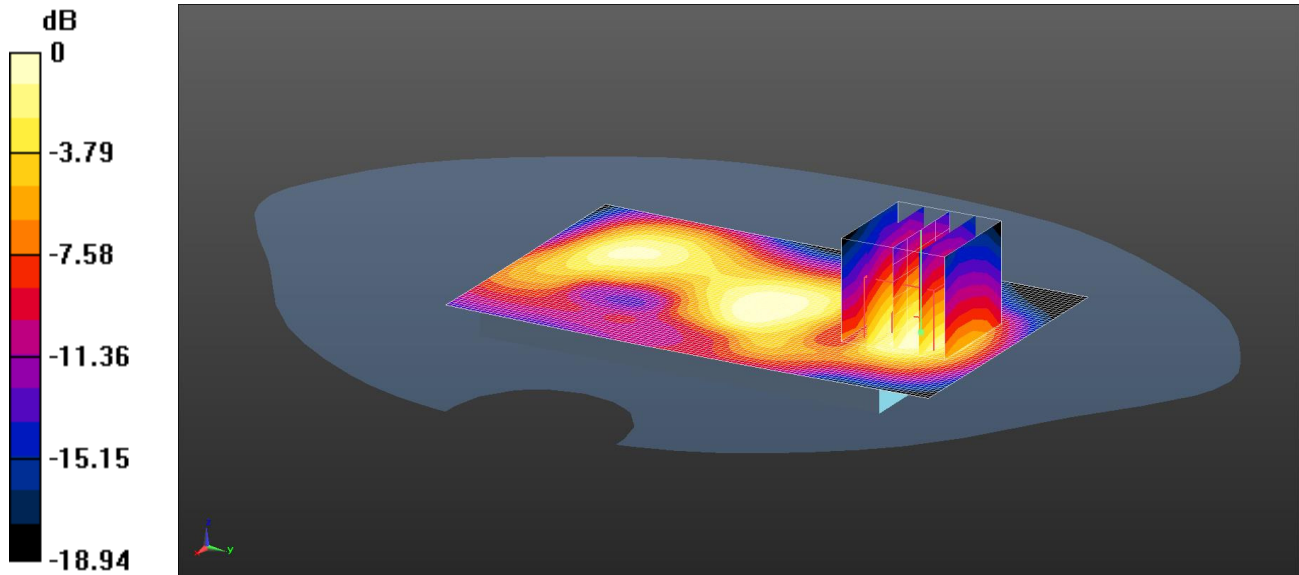

0 dB = 0.325 W/kg = -4.88 dBW/kg

Communication System: UID 0 - n/a, Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.30042

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.585$ S/m; $\epsilon_r = 54.123$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(4.69, 4.69, 4.69); Calibrated: 29/08/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 04/11/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Back of EUT Facing Phantom - Middle 2 2/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.350 W/kg

Configuration/Back of EUT Facing Phantom - Middle 2 2/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.453 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.490 W/kg


SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.325 W/kg

006: Back of EUT_Body-Worn_PCS1900_GPRS 2Tx_CH512

Date: 16/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

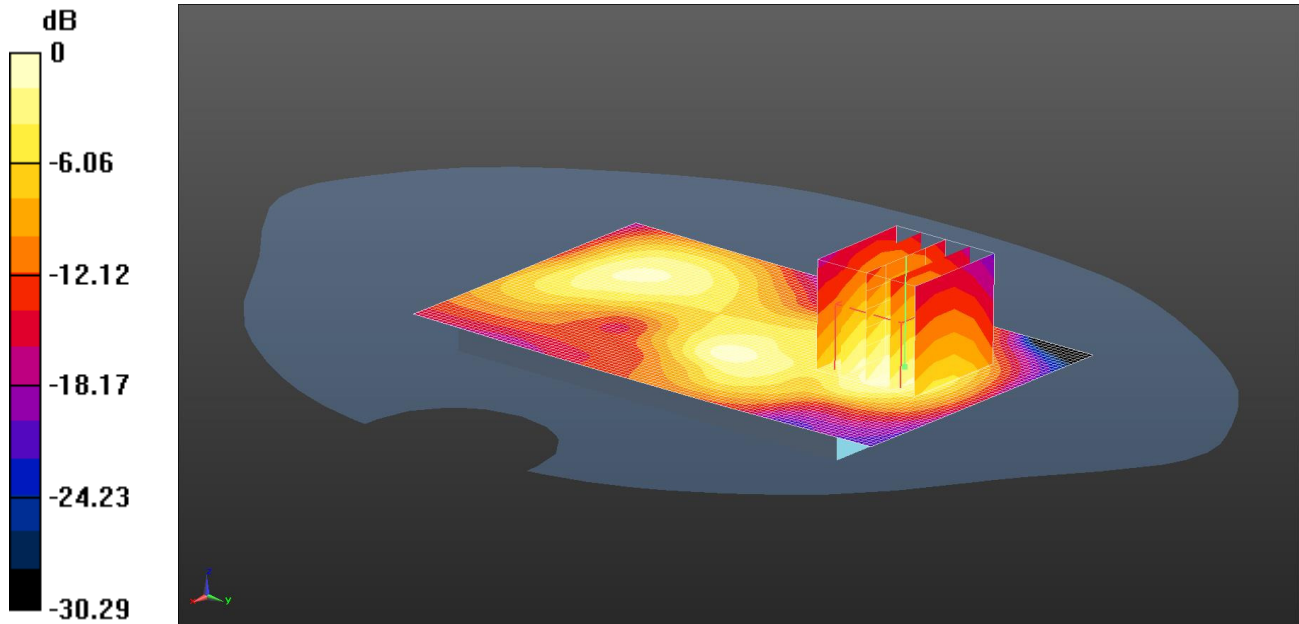

0 dB = 0.427 W/kg = -3.70 dBW/kg

Communication System: UID 0 - n/a, GPRS 2Tx; Frequency: 1850.2 MHz; Duty Cycle: 1:4.00037

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.529$ S/m; $\epsilon_r = 54.36$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(4.69, 4.69, 4.69); Calibrated: 29/08/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 04/11/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Back of EUT Facing Phantom - Middle/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.445 W/kg

Configuration/Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.429 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.751 W/kg


SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.225 W/kg

Maximum value of SAR (measured) = 0.427 W/kg

007: Touch Right_UMTS FDD 2_RMC 12.2kbps_CH9262

Date: 15/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

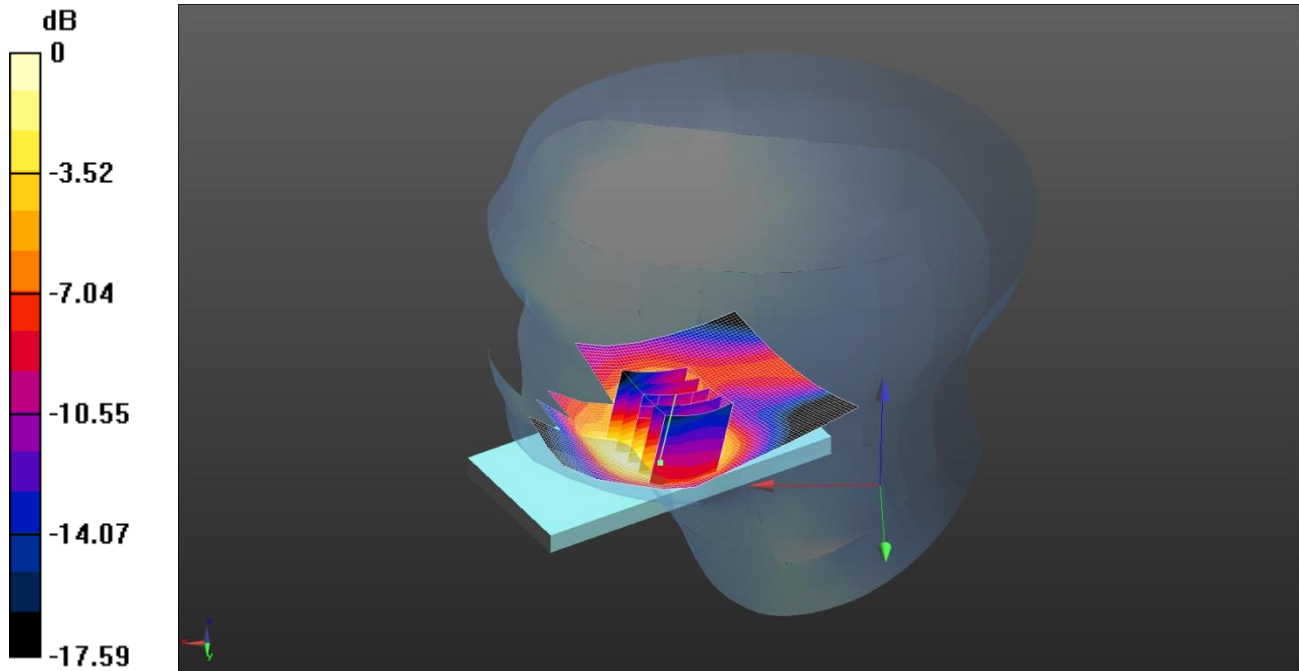

0 dB = 0.213 W/kg = -6.72 dBW/kg

Communication System: UID 0 - n/a, UMTS FDD ; Frequency: 1852.4 MHz;Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): f = 1852.4 MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 39.25$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(5.07, 5.07, 5.07); Calibrated: 29/08/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 04/11/2014
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Right- Low/Area Scan 2 (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.227 W/kg

Configuration/Touch Right- Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.344 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.306 W/kg


SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.213 W/kg

008: Back of EUT_Body-Worn_UMTS FDD 2_RMC 12.2kbps_CH9400

Date: 17/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

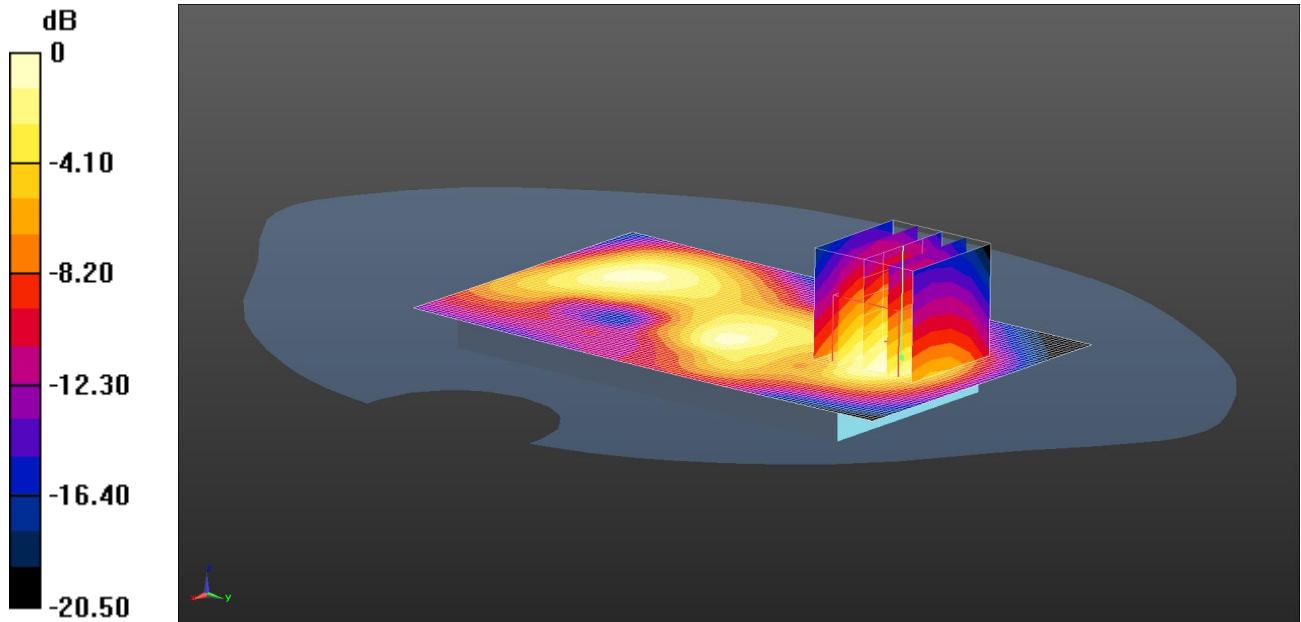

0 dB = 0.462 W/kg = -3.35 dBW/kg

Communication System: UID 0 - n/a, UMTS FDD ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1880 MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 54.245$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(4.69, 4.69, 4.69); Calibrated: 29/08/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 04/11/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Back of EUT Facing Phantom - Middle 2/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.475 W/kg

Configuration/Back of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.283 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.692 W/kg


SAR(1 g) = 0.437 W/kg; SAR(10 g) = 0.243 W/kg

Maximum value of SAR (measured) = 0.462 W/kg

009: Touch Left_UMTS FDD 5_RMS 12.2kbps_CH4132

Date: 31/03/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

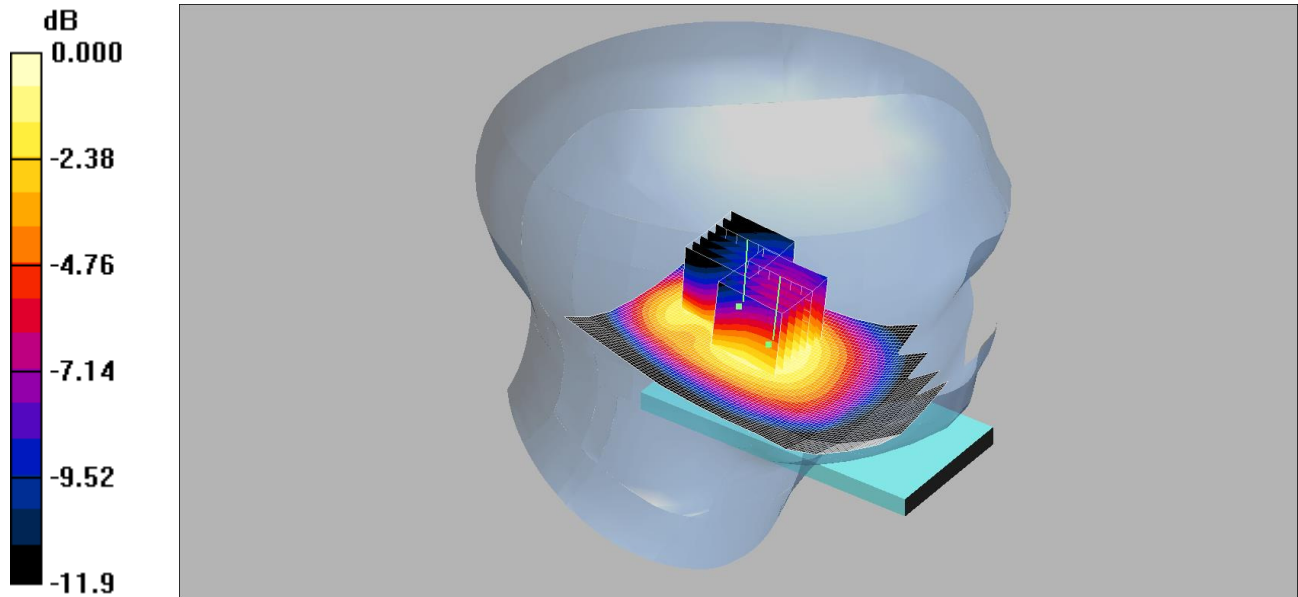

0 dB = 0.686mW/g

Communication System: UMTS-FDD 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.882$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.28, 6.28, 6.28);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 16/05/2014
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Touch Left - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.755 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.1 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.621 mW/g; SAR(10 g) = 0.396 mW/g

Maximum value of SAR (measured) = 0.689 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) 2 (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.1 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.853 W/kg

SAR(1 g) = 0.645 mW/g; SAR(10 g) = 0.462 mW/g


Maximum value of SAR (measured) = 0.686 mW/g

Note: DASY system is configured to measure any secondary maxima that are within 2dB of the measured SAR level.

010: Back of EUT-Body-Worn_UMTS FDD 5_RMC 12.2kbps_CH4233

Date: 01/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDTECSBT301

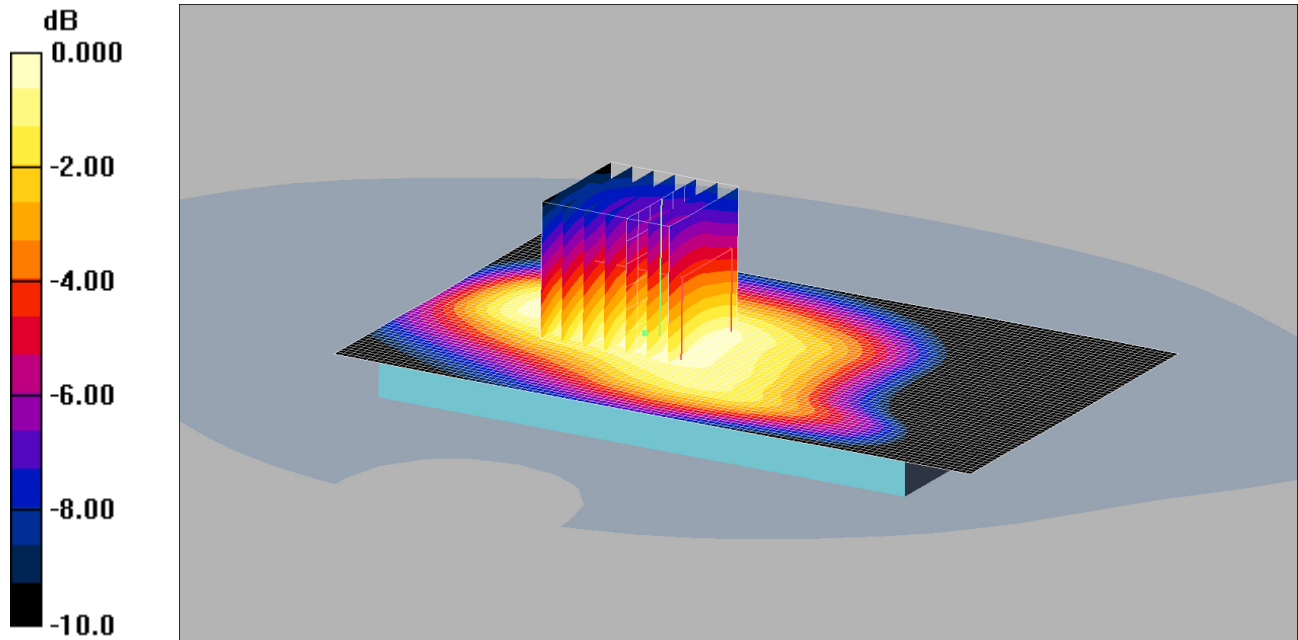

0 dB = 0.064mW/g

Communication System: UMTS-FDD 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6, 6, 6);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 16/05/2014
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back of EUT Facing Phantom - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.065 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.23 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.078 W/kg

SAR(1 g) = 0.060 mW/g; SAR(10 g) = 0.043 mW/g


Maximum value of SAR (measured) = 0.064 mW/g

Note: SAR level measured is very low as equivalent to noise floor.

011: Touch Left_CDMA BC0_1xRTT_CH777

Date: 07/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

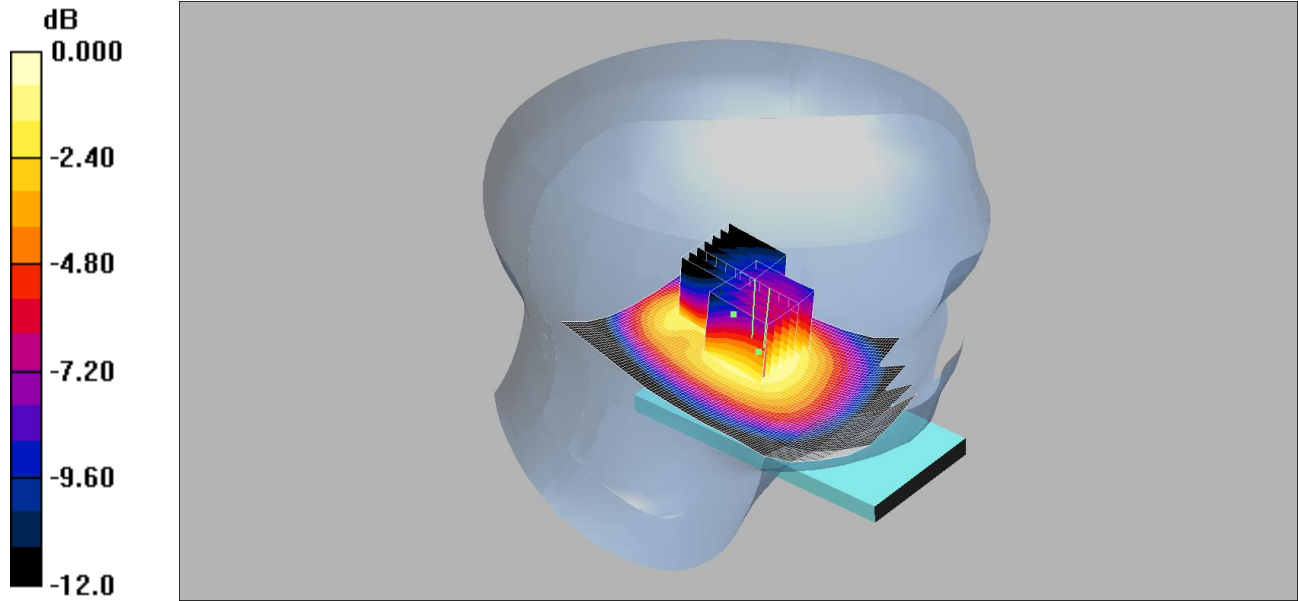

0 dB = 0.726mW/g

Communication System: CDMA 2000 BC0 US; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 848.31 \text{ MHz}$; $\sigma = 0.912 \text{ mho/m}$; $\epsilon_r = 41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.28, 6.28, 6.28);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 16/05/2014
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Touch Left - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.797 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.4 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.642 mW/g; SAR(10 g) = 0.404 mW/g

Maximum value of SAR (measured) = 0.704 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) 2 (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.4 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.895 W/kg

SAR(1 g) = 0.680 mW/g; SAR(10 g) = 0.488 mW/g


Maximum value of SAR (measured) = 0.726 mW/g

Note: DASY system is configured to measure any secondary maxima that are within 2dB of the measured SAR level.

012: Back of EUT-Body-Worn_CDMA BC0_1xRTT_CH777

Date: 01/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

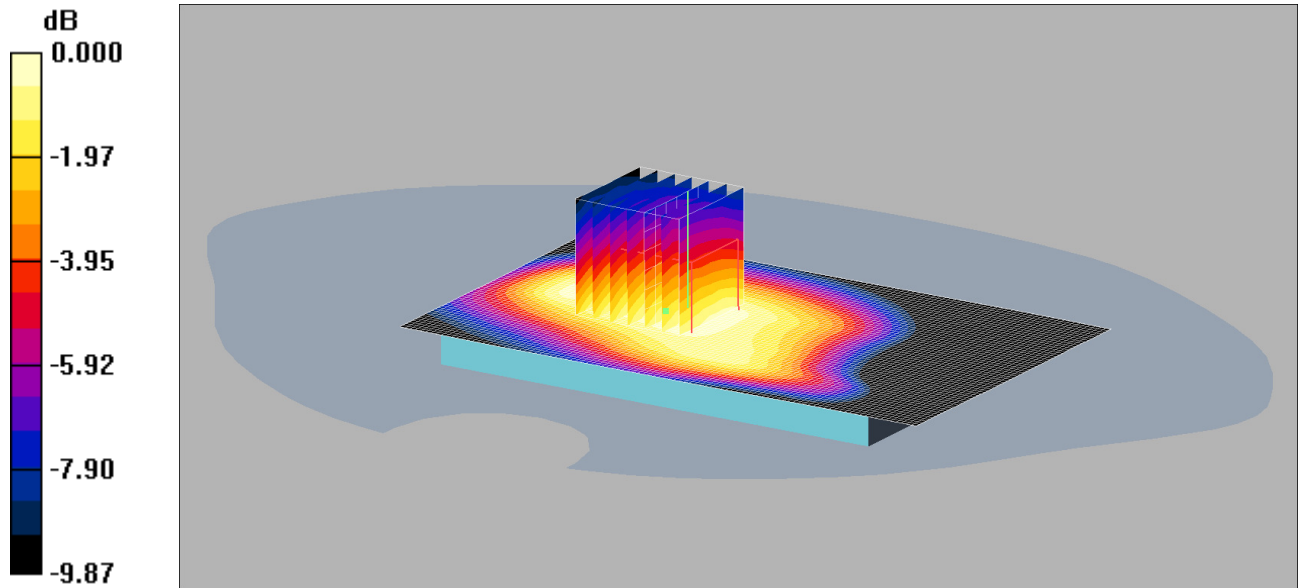

0 dB = 0.056mW/g

Communication System: CDMA 2000 BC0 US; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6, 6, 6);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 16/05/2014
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back of EUT Facing Phantom - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.057 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.65 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.068 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.038 mW/g


Maximum value of SAR (measured) = 0.056 mW/g

Note: SAR level measured is very low as equivalent to noise floor.

013: Back of EUT-Body-Worn_CDMA BC0_1xEVDO Rel 0_CH777

Date: 08/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

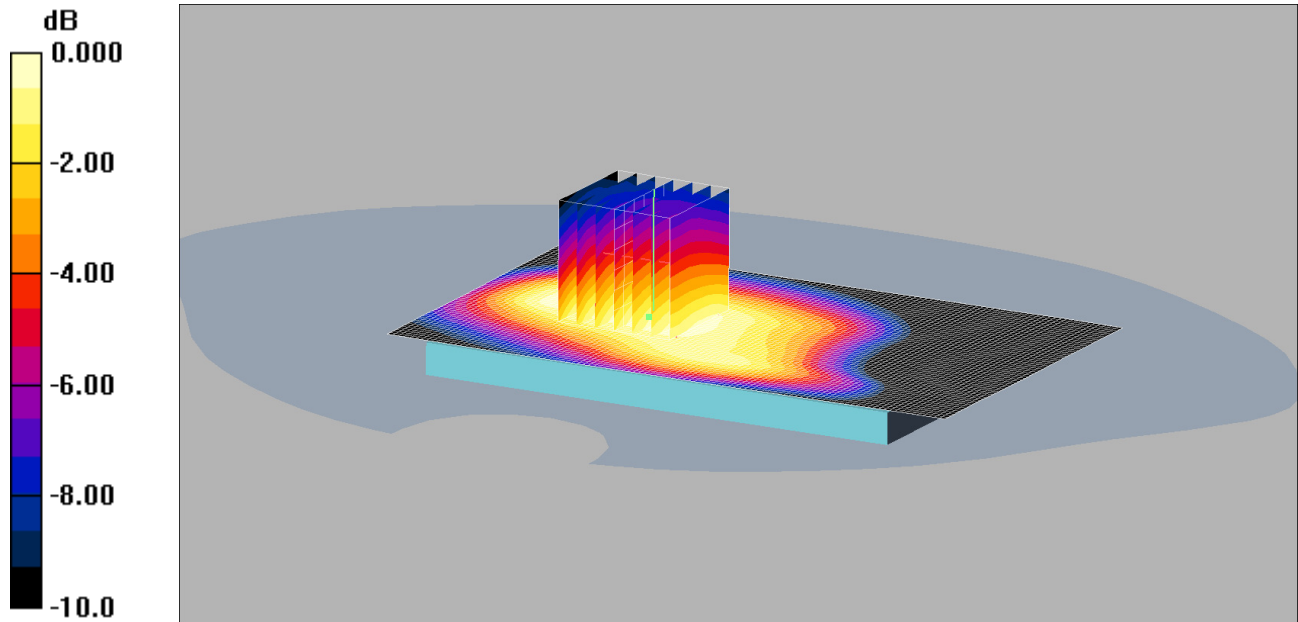

0 dB = 0.054mW/g

Communication System: CDMA 2000 BC0 US; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6, 6, 6);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 16/05/2014
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back of EUT Facing Phantom - Middle 2/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.053 mW/g

Back of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.35 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 0.066 W/kg

SAR(1 g) = 0.051 mW/g; SAR(10 g) = 0.036 mW/g


Maximum value of SAR (measured) = 0.054 mW/g

Note: SAR level measured is very low as equivalent to noise floor.

014: Touch Right_CDMA BC1_1xRTT_CH600

Date: 15/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

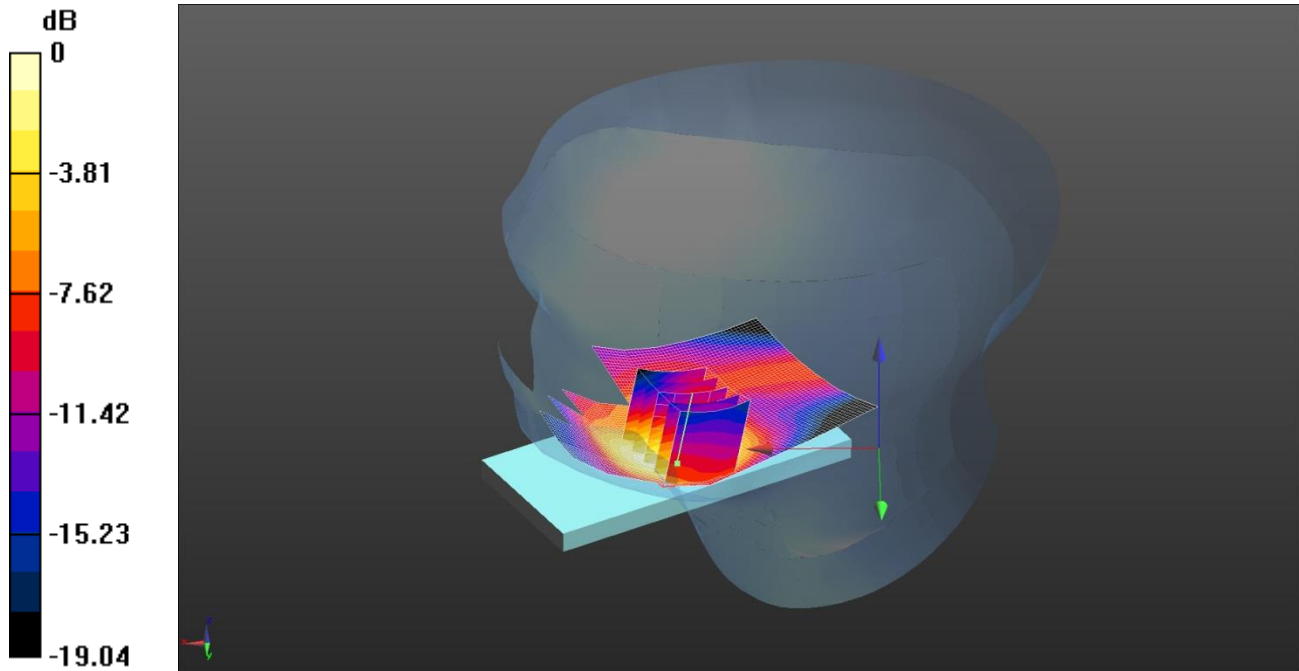

0 dB = 0.436 W/kg = -3.61 dBW/kg

Communication System: UID 0 - n/a, CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz HSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 39.125$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(5.07, 5.07, 5.07); Calibrated: 29/08/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 04/11/2014
- Phantom: SAM B (Site 58); Type: Twin Phantom; Serial: TP:1020
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Touch Right- Low/Area Scan 2 (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.477 W/kg

Configuration/Touch Right- Low/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.877 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.626 W/kg


SAR(1 g) = 0.401 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.436 W/kg

015: Back of EUT_Body-Worn_CDMA BC1_1xRTT_CH600

Date: 17/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

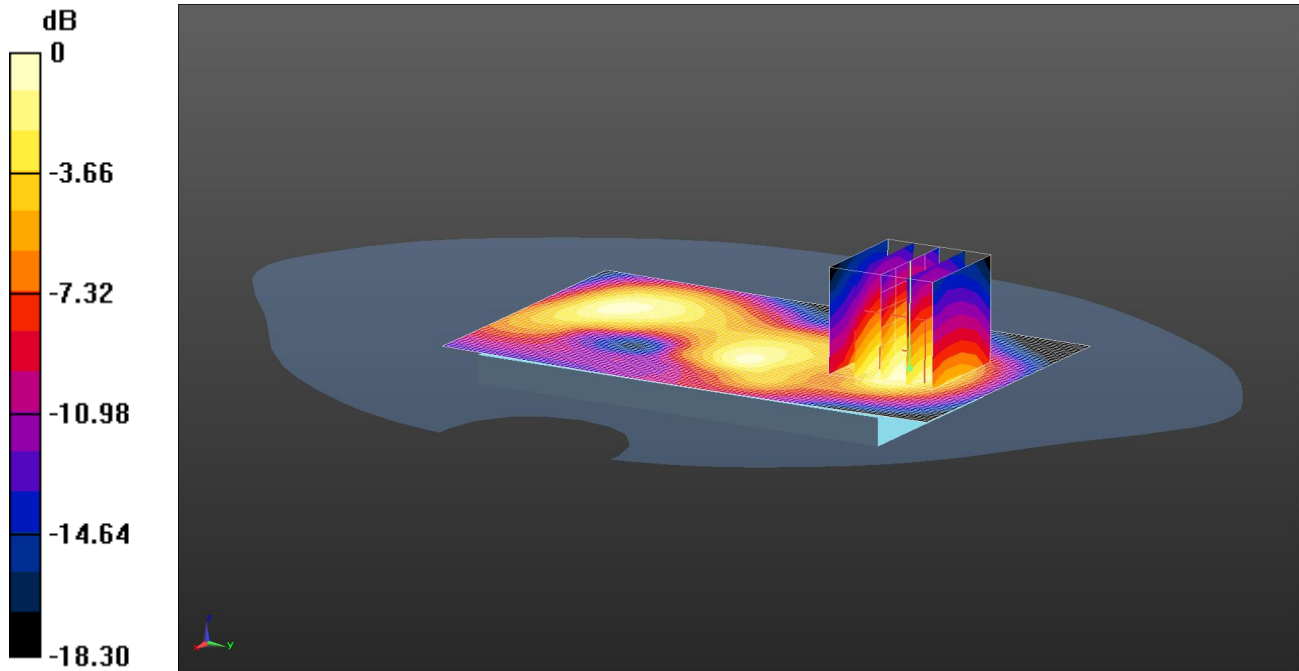

0 dB = 0.456 W/kg = -3.41 dBW/kg

Communication System: UID 0 - n/a, CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 54.245$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(4.69, 4.69, 4.69); Calibrated: 29/08/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 04/11/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Back of EUT Facing Phantom - Middle 2/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.448 W/kg

Configuration/Back of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.118 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.667 W/kg


SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.238 W/kg

Maximum value of SAR (measured) = 0.456 W/kg

016: Back of EUT_Body-Worn_CDMA BC1_1xEVDO Rel 0_CH600

Date: 17/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

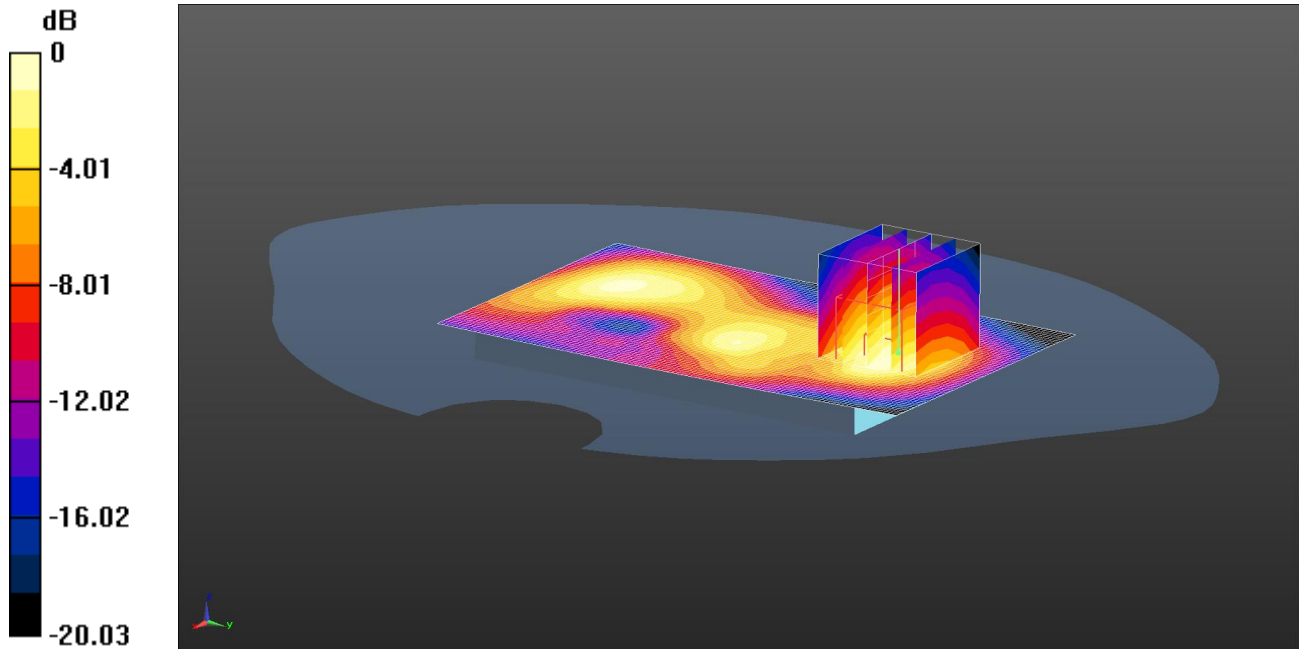

0 dB = 0.484 W/kg = -3.15 dBW/kg

Communication System: UID 0 - n/a, CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 MHz MSL Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.557$ S/m; $\epsilon_r = 54.245$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(4.69, 4.69, 4.69); Calibrated: 29/08/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 04/11/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Back of EUT Facing Phantom - Middle 2/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.494 W/kg

Configuration/Back of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.112 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.711 W/kg


SAR(1 g) = 0.455 W/kg; SAR(10 g) = 0.256 W/kg

Maximum value of SAR (measured) = 0.484 W/kg

017: Touch Left_CDMA BC10_1xRTT_CH684

Date: 02/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

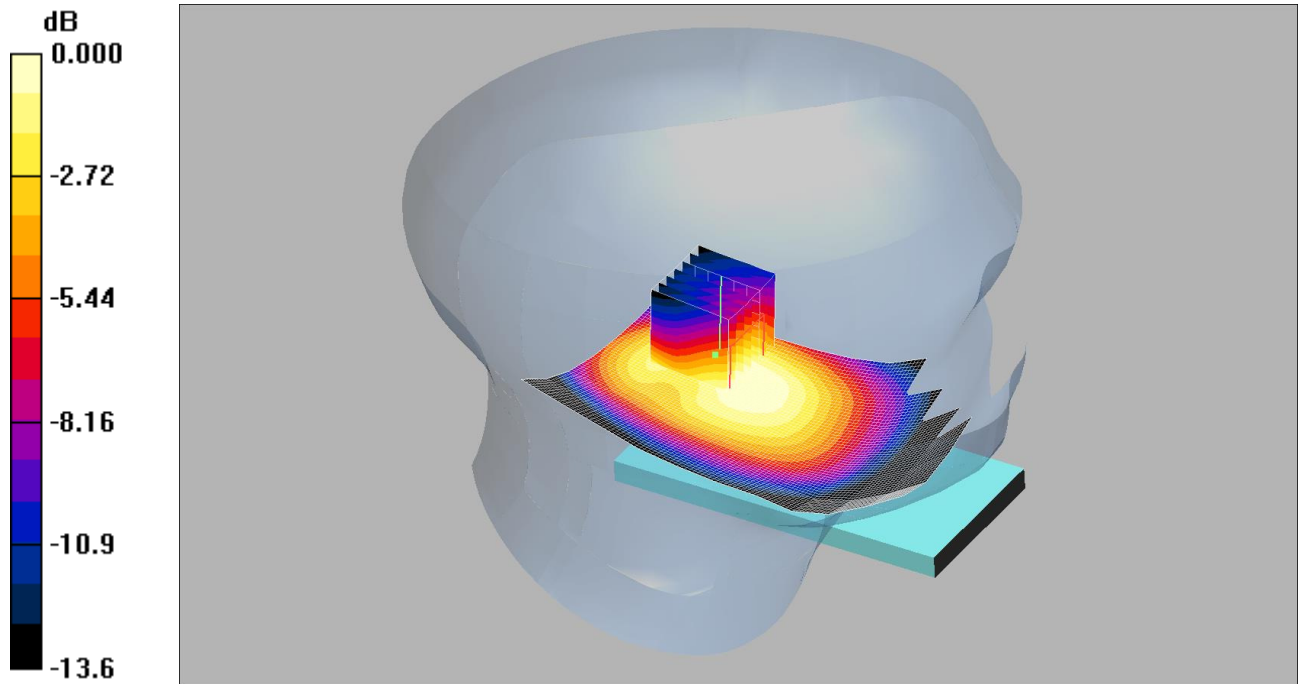

0 dB = 0.593mW/g

Communication System: CDMA 2000 BC10; Frequency: 823.1 MHz; Duty Cycle: 1:1

Medium: 900 MHz HSL Medium parameters used (interpolated): $f = 823.1$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.28, 6.28, 6.28);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 16/05/2014
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Touch Left - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.633 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.3 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 1.03 W/kg


SAR(1 g) = 0.534 mW/g; SAR(10 g) = 0.342 mW/g

Maximum value of SAR (measured) = 0.593 mW/g

018: Back of EUT-Body-Worn_CDMA BC10_1xRTT_CH684

Date: 01/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

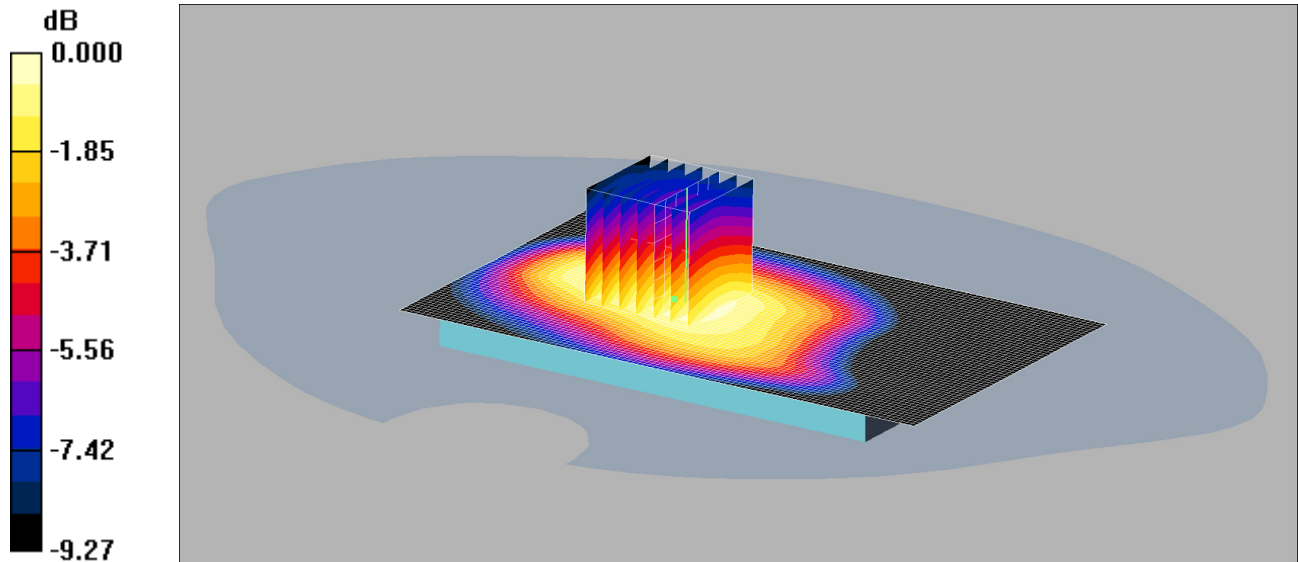

0 dB = 0.080mW/g

Communication System: CDMA 2000 BC10; Frequency: 823.1 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 823.1$ MHz; $\sigma = 0.994$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6, 6, 6);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 16/05/2014
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back of EUT Facing Phantom - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.079 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.31 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.097 W/kg

SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.054 mW/g


Maximum value of SAR (measured) = 0.080 mW/g

Note: SAR level measured is very low as equivalent to noise floor.

019: Back of EUT-Body-Worn_CDMA BC10_1xEVDO Rel 0_CH684

Date: 08/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDTECSBT301

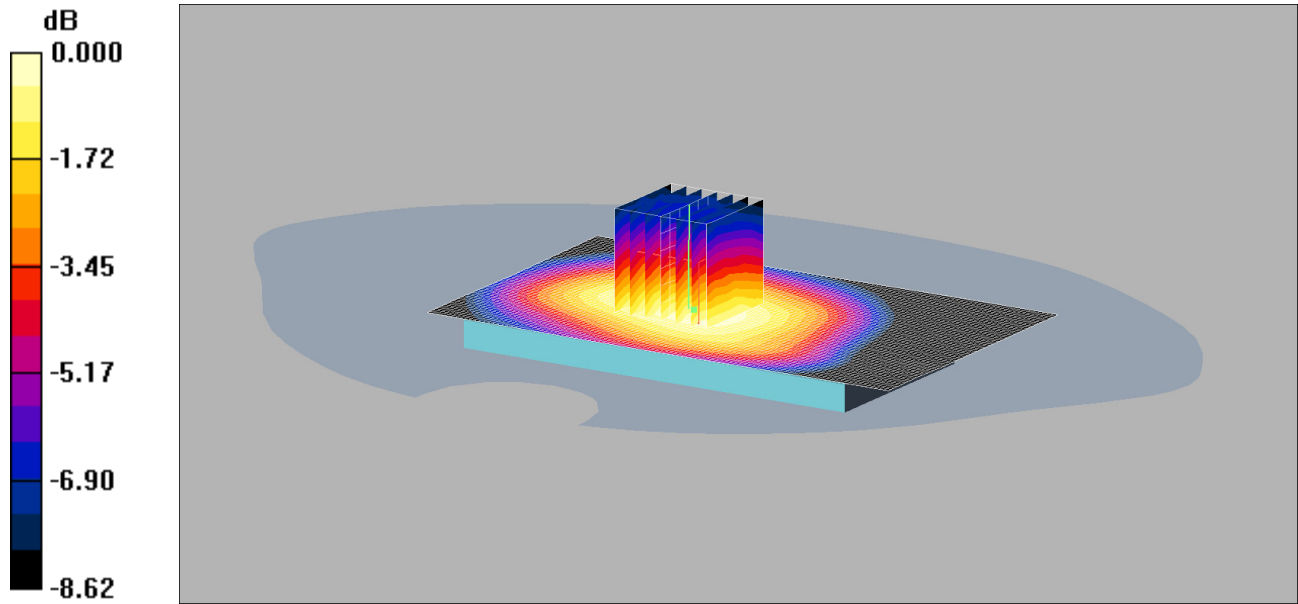

0 dB = 0.040mW/g

Communication System: CDMA 2000 BC10; Frequency: 823.1 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 823.1$ MHz; $\sigma = 0.994$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6, 6, 6);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 16/05/2014
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back of EUT Facing Phantom - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.039 mW/g

Back of EUT Facing Phantom - Middle/Zoom Scan (5x5x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.65 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 0.049 W/kg

SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.028 mW/g


Maximum value of SAR (measured) = 0.040 mW/g

Note: SAR level measured is very low as equivalent to noise floor.

020: Back of EUT-Body-Worn_LTE FDD 5_10MHz_1RB_Mid_CH20525

Date: 08/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATPCSBT301

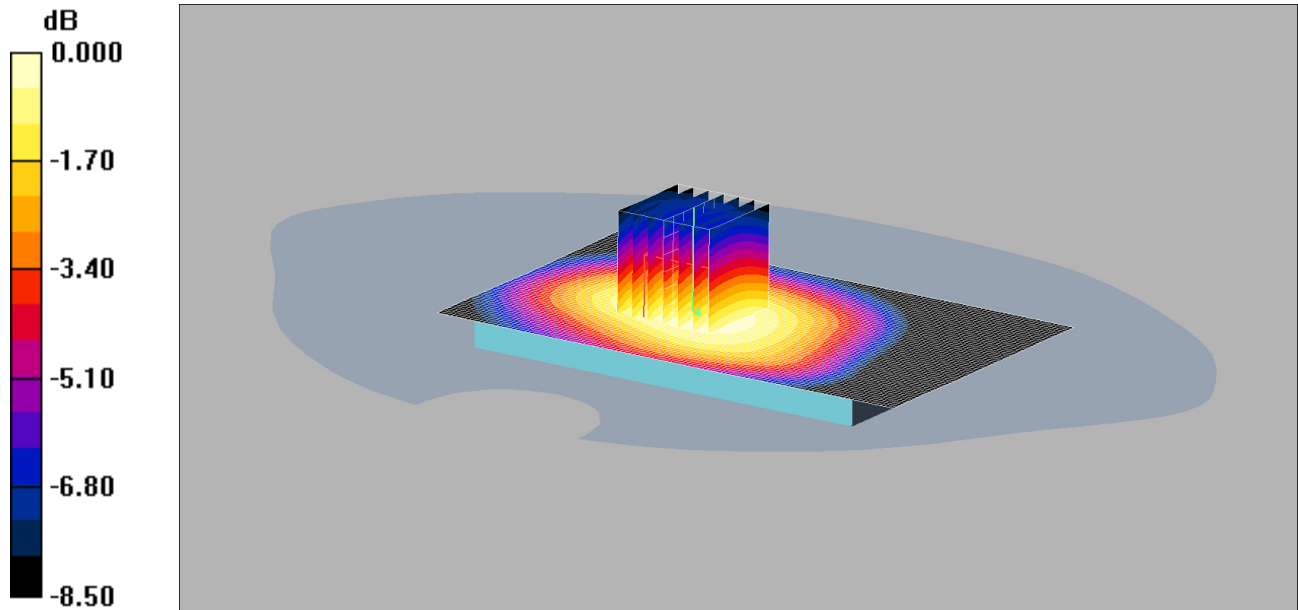

0 dB = 0.040mW/g

Communication System: LTE Band 5 / 10MHz; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 900 MHz MSL Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6, 6, 6);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 16/05/2014
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back of EUT Facing Phantom - Middle 2/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.040 mW/g

Back of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.63 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.048 W/kg

SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.028 mW/g


Maximum value of SAR (measured) = 0.040 mW/g

Note: SAR level measured is very low as equivalent to noise floor.

021: Touch Left_LTE FDD 13_10MHz_1RB_Mid_CH23230

Date: 09/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

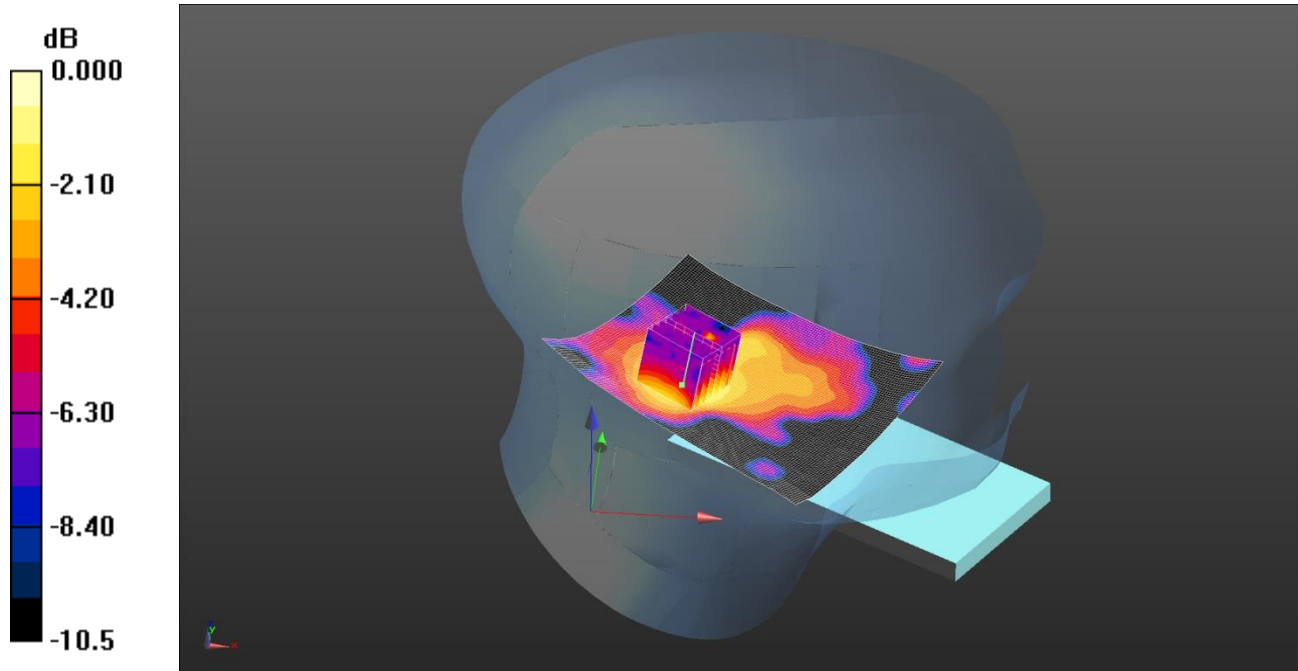

0 dB = 0.245mW/g

Communication System: LTE - Band 13 / 10MHz Channel; Frequency: 782 MHz;Duty Cycle: 1:1

Medium: 750 MHz HSL Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.873$ mho/m; $\epsilon_r = 42.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.6, 6.6, 6.6);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 16/05/2014
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Touch Left - Middle/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.248 mW/g

Touch Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 0.296 W/kg


SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.178 mW/g

Maximum value of SAR (measured) = 0.245 mW/g

022: Back of EUT-Body-Worn_LTE FDD 13_10MHz_1RB_Low_CH23230

Date: 09/04/2015

DUT: A1428; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDTECSBT301

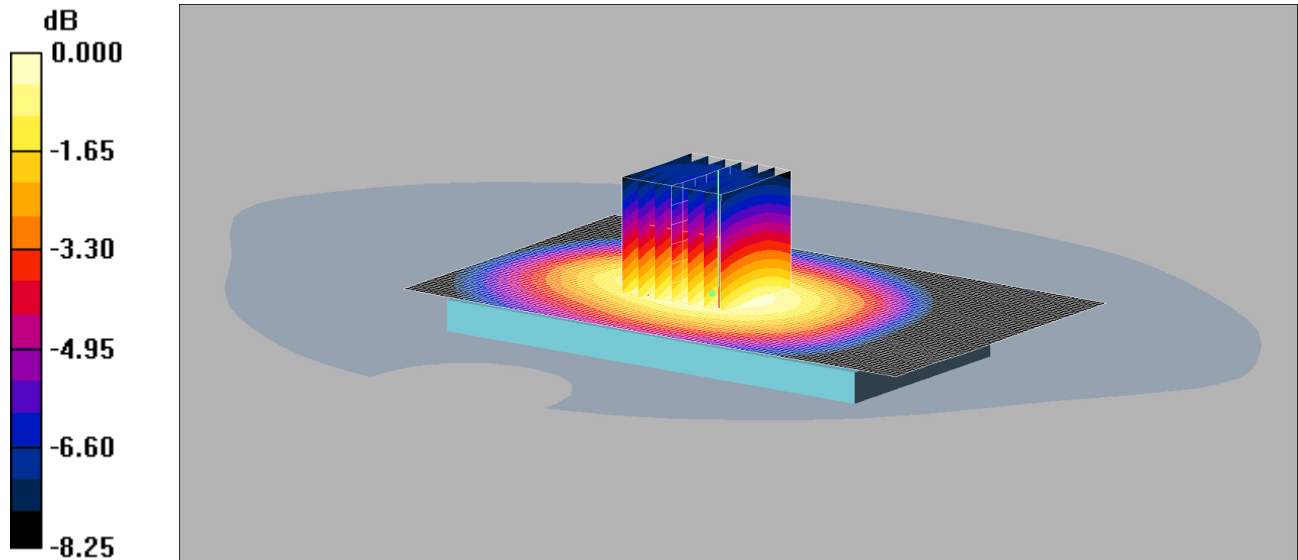

0 dB = 0.105mW/g

Communication System: LTE - Band 13 / 10MHz Channel; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750/900 MHz MSL Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(6.15, 6.15, 6.15);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 16/05/2014
- Phantom: SAM 12a (Site 56); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back of EUT Facing Phantom - Middle 2/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.106 mW/g

Back of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.099 mW/g; SAR(10 g) = 0.073 mW/g


Maximum value of SAR (measured) = 0.105 mW/g

Note: SAR level measured is very low as equivalent to noise floor.

023: Back of EUT_Body-Worn_LTE FDD 25_20MHz 1RB Mid_CH26365

Date: 17/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

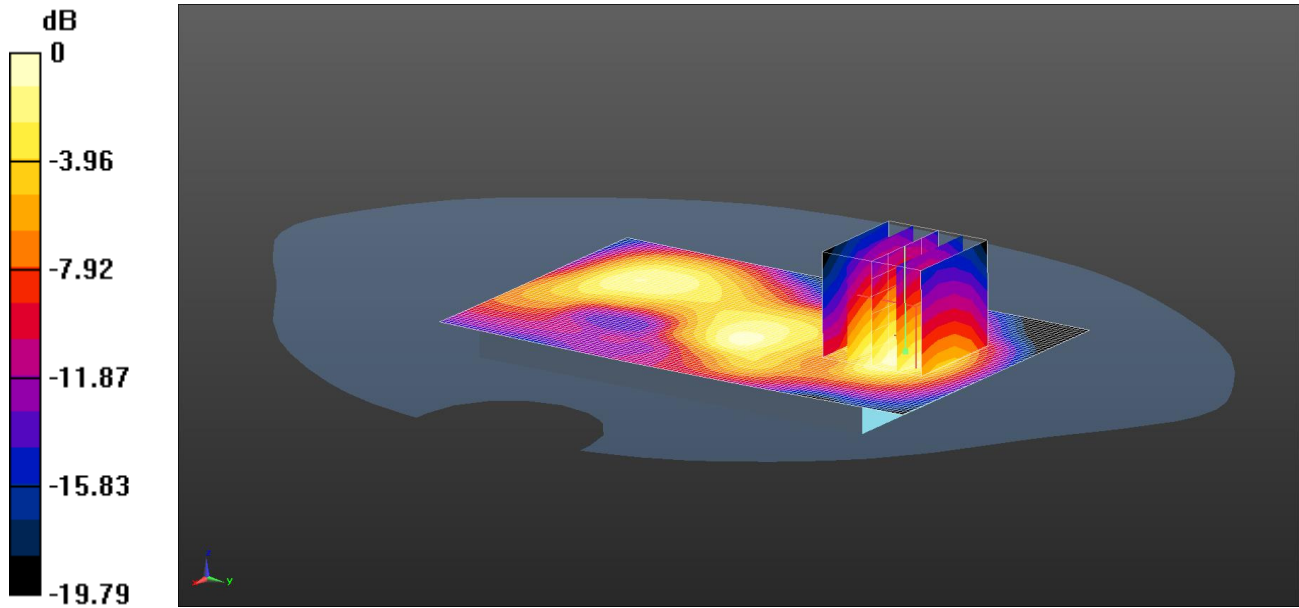

0 dB = 0.371 W/kg = -4.31 dBW/kg

Communication System: UID 0 - n/a, LTE FDD Bands - 20MHz Channel BW ; Frequency: 1882.5 MHz; Duty Cycle: 1:1
 Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1882.5 MHz; $\sigma = 1.559$ S/m; $\epsilon_r = 54.235$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3335; ConvF(4.69, 4.69, 4.69); Calibrated: 29/08/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn431; Calibrated: 04/11/2014
- Phantom: SAM A (Site 58); Type: QD000P40Ca; Serial: TP:1193
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Back of EUT Facing Phantom - Middle 2/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.372 W/kg

Configuration/Back of EUT Facing Phantom - Middle 2/Zoom Scan (5x5x7) 2 (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.187 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.548 W/kg


SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.188 W/kg

Maximum value of SAR (measured) = 0.371 W/kg

024: Touch Right_Wi-Fi 2.4GHz_802.11b 1Mbps_CH6

Date: 15/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDTECSBT301

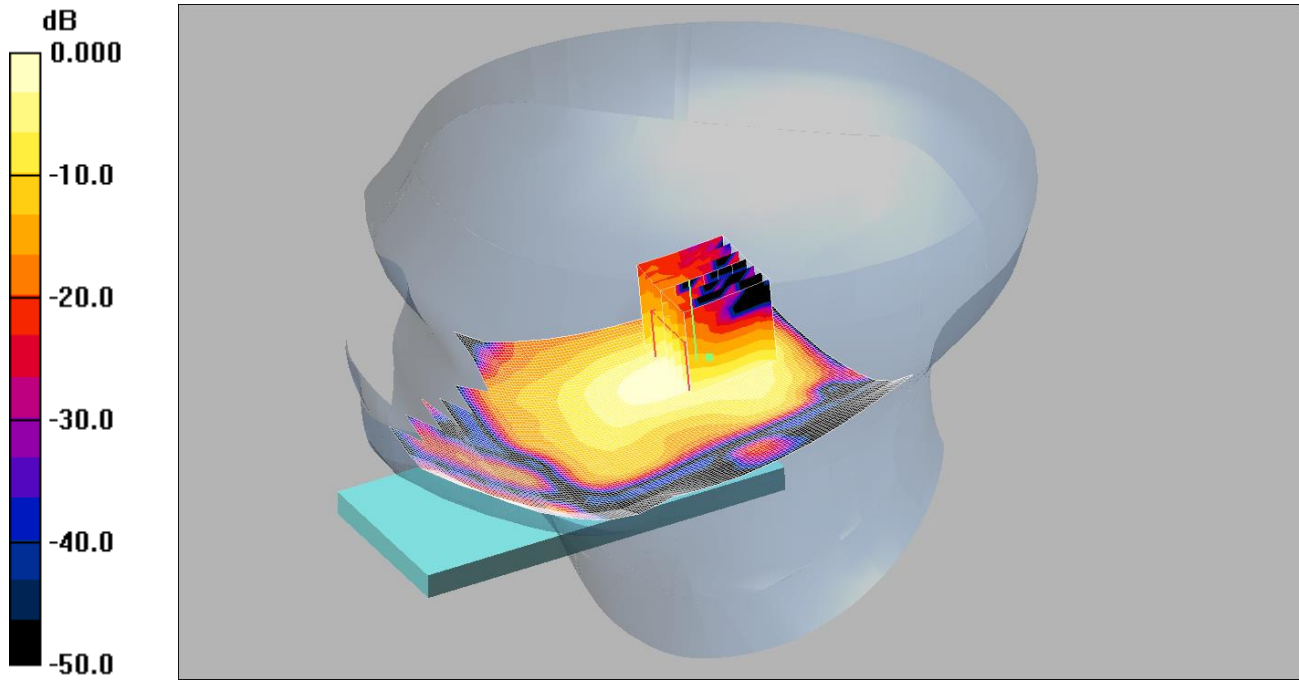

0 dB = 0.108mW/g

Communication System: WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz HSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.24, 4.24, 4.24);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: SAM 12a (Site 57); Type: SAM 4.0; Serial: TP:1020
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch Right - Middle/Area Scan (91x151x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (interpolated) = 0.116 mW/g


Touch Right - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 7.61 V/m; Power Drift = 0.146 dB
 Peak SAR (extrapolated) = 0.230 W/kg
SAR(1 g) = 0.094 mW/g; SAR(10 g) = 0.040 mW/g
 Maximum value of SAR (measured) = 0.108 mW/g

Note: SAR level measured is very low as equivalent to noise floor.

025: Back of EUT-Body-Worn-Wi-Fi 2.4GHz_802.11b 1Mbps_CH6

Date: 10/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATCSBT301

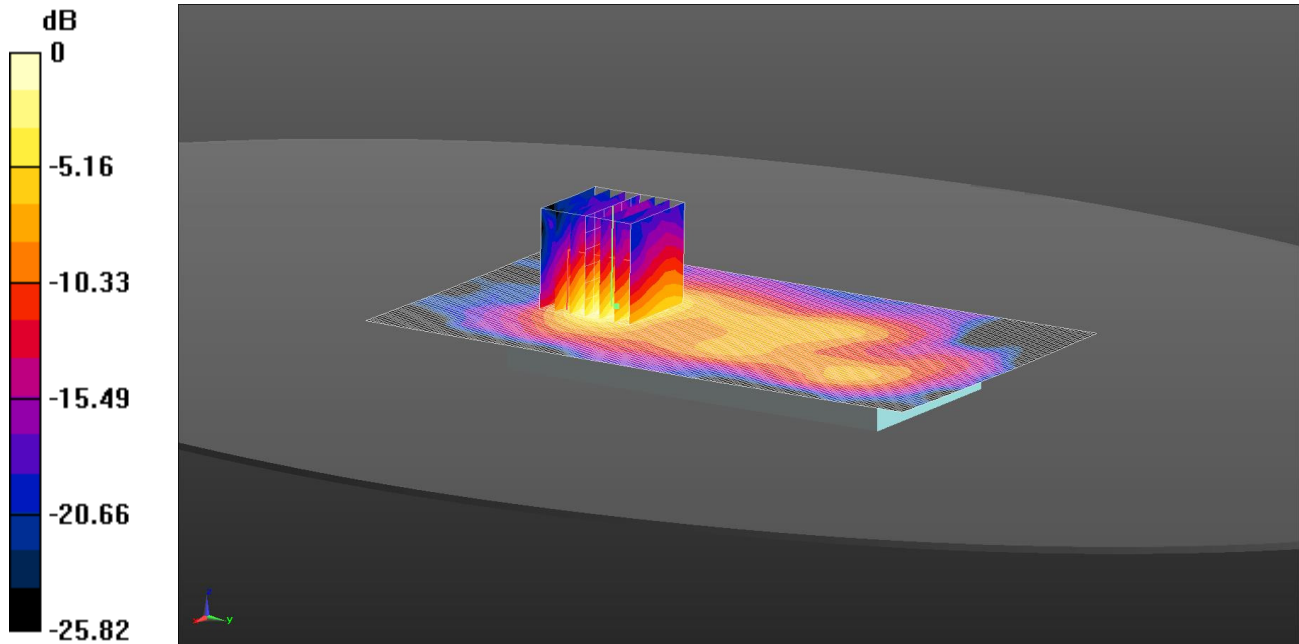

0 dB = 0.0843 W/kg = -10.74 dBW/kg

Communication System: UID 0 - n/a, WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.006$ S/m; $\epsilon_r = 52.601$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV3 - SN3304; ConvF(4.24, 4.24, 4.24); Calibrated: 21/08/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.9 (7117)

Configuration/Back of EUT Facing Phantom - Middle 2/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0834 W/kg

Configuration/Back of EUT Facing Phantom - Middle 2/Zoom Scan (7x7x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.640 V/m; Power Drift = 0.33 dB

Peak SAR (extrapolated) = 0.148 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.031 W/kg


Maximum value of SAR (measured) = 0.0843 W/kg

Note: SAR level measured is very low as equivalent to noise floor.

026: Touch_Right_Wi-Fi 5GHz_802.11a_6Mbps_CH48

Date: 16/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

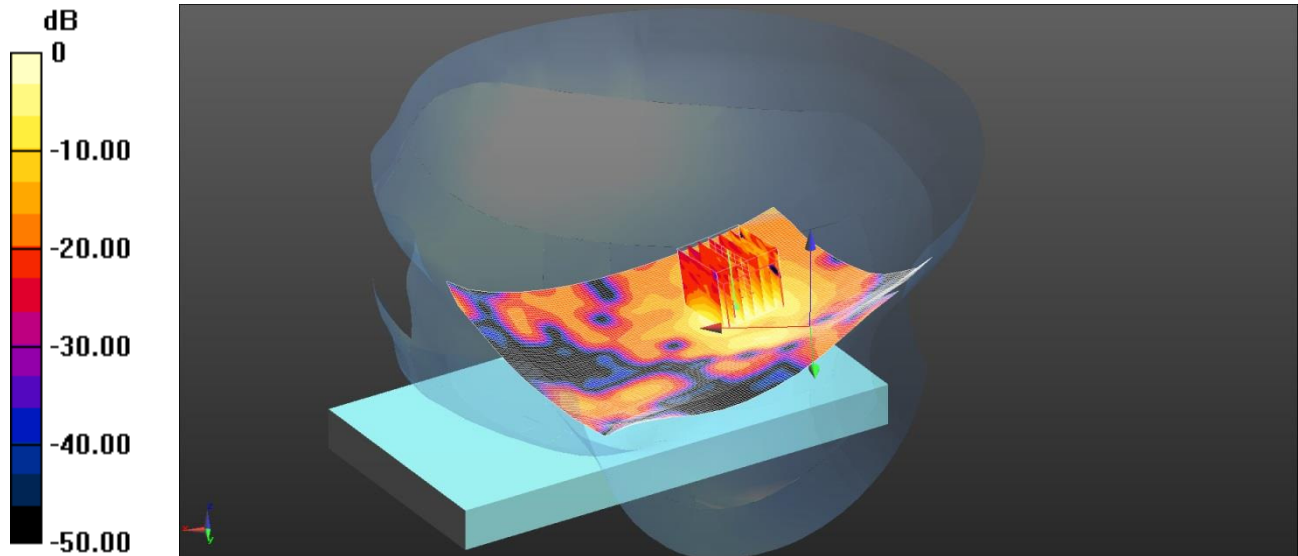

0 dB = 0.513 W/kg = -2.90 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz HSL Medium parameters used (interpolated): $f = 5240$ MHz; $\sigma = 4.572$ S/m; $\epsilon_r = 34.511$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3994; ConvF(5.3, 5.3, 5.3); Calibrated: 17/03/2015;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 16/09/2014
- Phantom: SAM (20deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Touch Right/Area Scan (131x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.521 W/kg

Configuration/Touch Right/Zoom Scan (7x7x12) 2 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.025 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.77 W/kg


SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.121 W/Kg

Maximum value of SAR (measured) = 0.513 W/kg

027: Front of EUT-Body-Worn_Wi-Fi 5GHz_802.11a 6Mbps_CH48

Date: 13/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

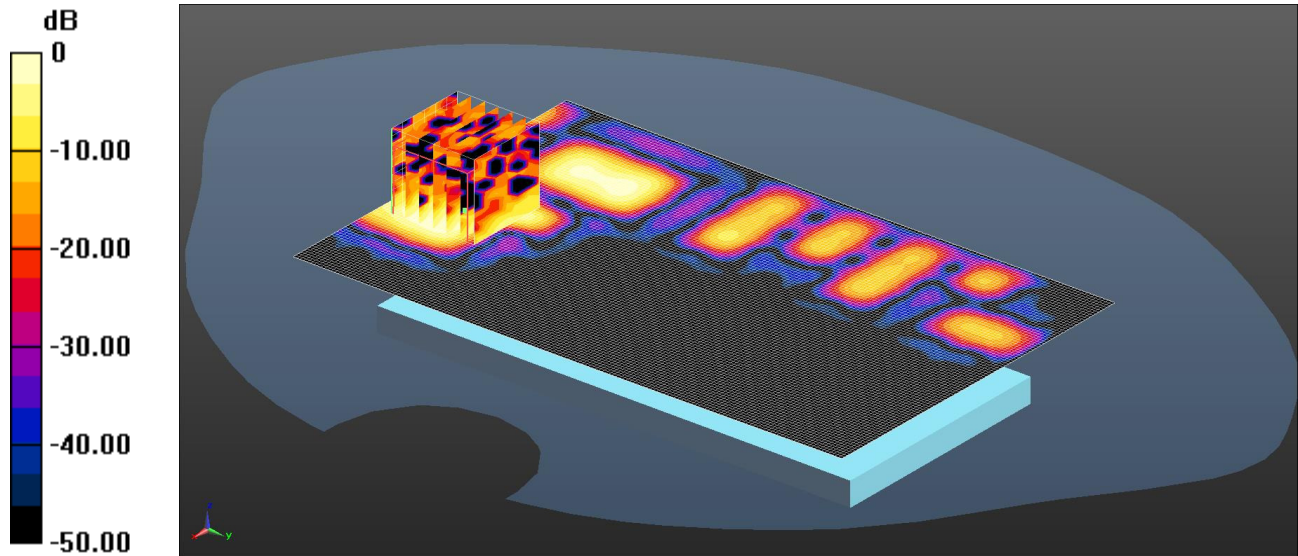

0 dB = 0.0892 W/kg = -10.50 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: 5GHz MSL Medium parameters used (interpolated): $f = 5240$ MHz; $\sigma = 5.321$ S/m; $\epsilon_r = 48.294$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.38, 4.38, 4.38); Calibrated: 18/09/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 15/04/2014
- Phantom: SAM (20deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Bottom of EUT Facing Phantom/Area Scan (101x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.182 W/kg

Configuration/Bottom of EUT Facing Phantom/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.025 V/m; Power Drift = 1.47 dB

Peak SAR (extrapolated) = 0.273 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.019 W/kg


Maximum value of SAR (measured) = 0.0892 W/kg

Note: SAR level measured is very low as equivalent to noise floor.

028: Touch_Right_Wi-Fi 5GHz_802.11a_6Mbps_CH52

Date: 15/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATTECSBT301

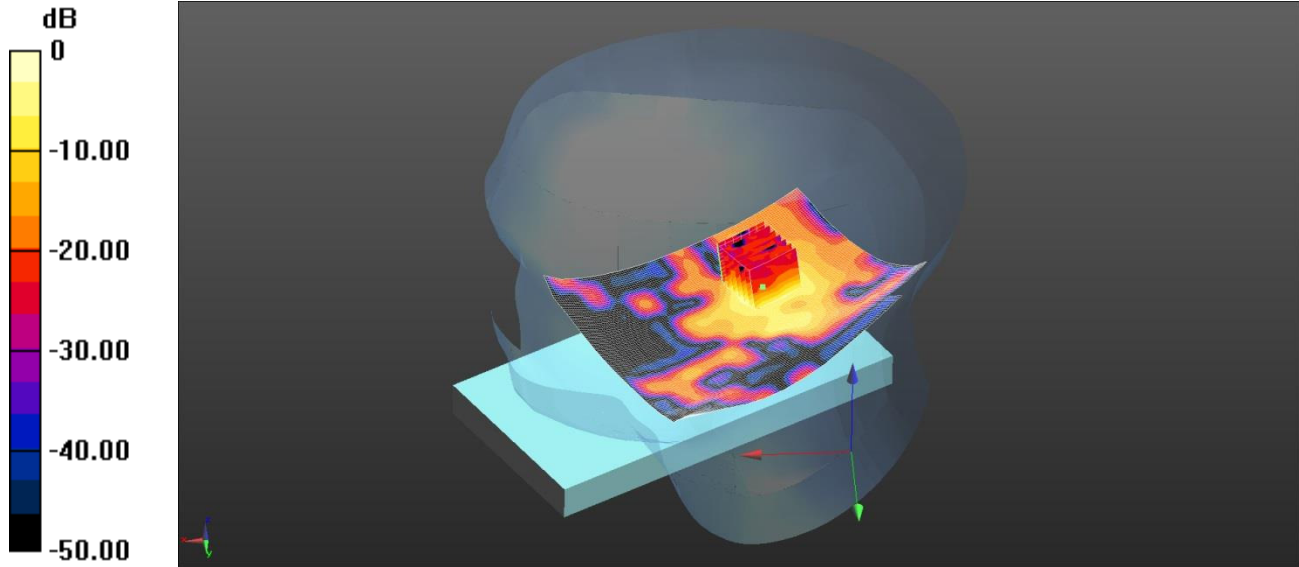

0 dB = 0.469 W/kg = -3.29 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz HSL Medium parameters used (interpolated): f = 5260 MHz; $\sigma = 4.592$ S/m; $\epsilon_r = 34.595$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3995; ConvF(5.14, 5.14, 5.14); Calibrated: 09/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 16/09/2014
- Phantom: SAM (20deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Touch Right/Area Scan (131x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.463 W/kg

Configuration/Touch Right/Zoom Scan (7x7x12) 2 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.267 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.08 W/kg


SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.469 W/kg

029: Front_of_EUT-Body-Worn_Wi-Fi 5GHz_802.11a 6Mbps_CH64

Date: 14/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

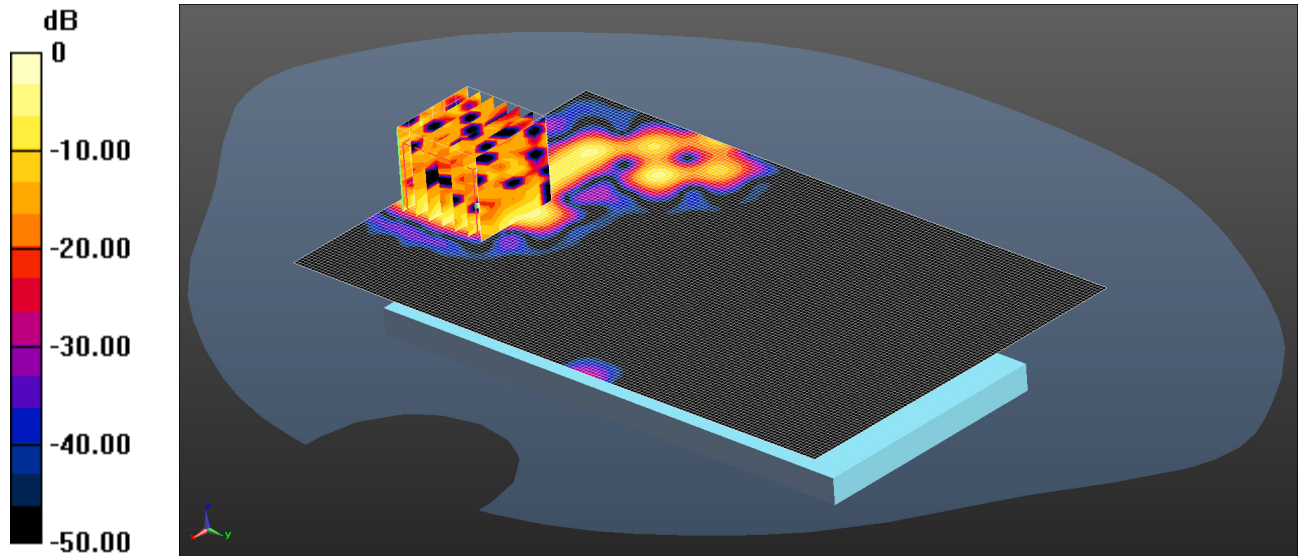

0 dB = 0.0866 W/kg = -10.62 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: 5GHz MSL Medium parameters used (interpolated): $f = 5320$ MHz; $\sigma = 5.436$ S/m; $\epsilon_r = 48.099$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.18, 4.18, 4.18); Calibrated: 18/09/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 15/04/2014
- Phantom: SAM (20deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Back of EUT Facing Phantom/Area Scan (101x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.261 W/kg

Configuration/Back of EUT Facing Phantom/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.551 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.358 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.018 W/kg


Maximum value of SAR (measured) = 0.0866 W/kg

Note: SAR level measured is very low as equivalent to noise floor.

030: Touch_Right_Wi-Fi 5GHz_802.11a_6Mbps_CH124

Date: 15/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

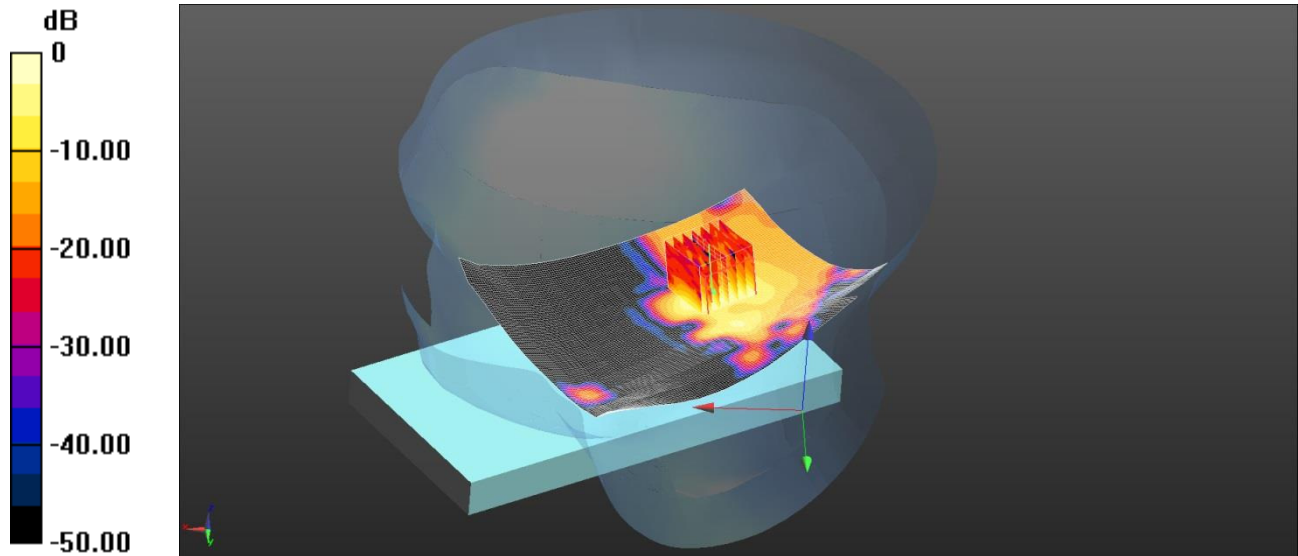

0 dB = 0.386 W/kg = -4.13 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5620 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz HSL Medium parameters used (interpolated): $f = 5620$ MHz; $\sigma = 4.969$ S/m; $\epsilon_r = 34.078$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3995; ConvF(5, 5, 5); Calibrated: 09/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 16/09/2014
- Phantom: SAM (20deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Touch Right/Area Scan (131x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.417 W/kg

Configuration/Touch Right/Zoom Scan (7x7x12) 2 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.674 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.02 W/kg


SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.085 W/Kg

Maximum value of SAR (measured) = 0.386 W/kg

031: Front_of_EUT-Body-Worn_Wi-Fi 5GHz_802.11a 6Mbps_CH116

Date: 14/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

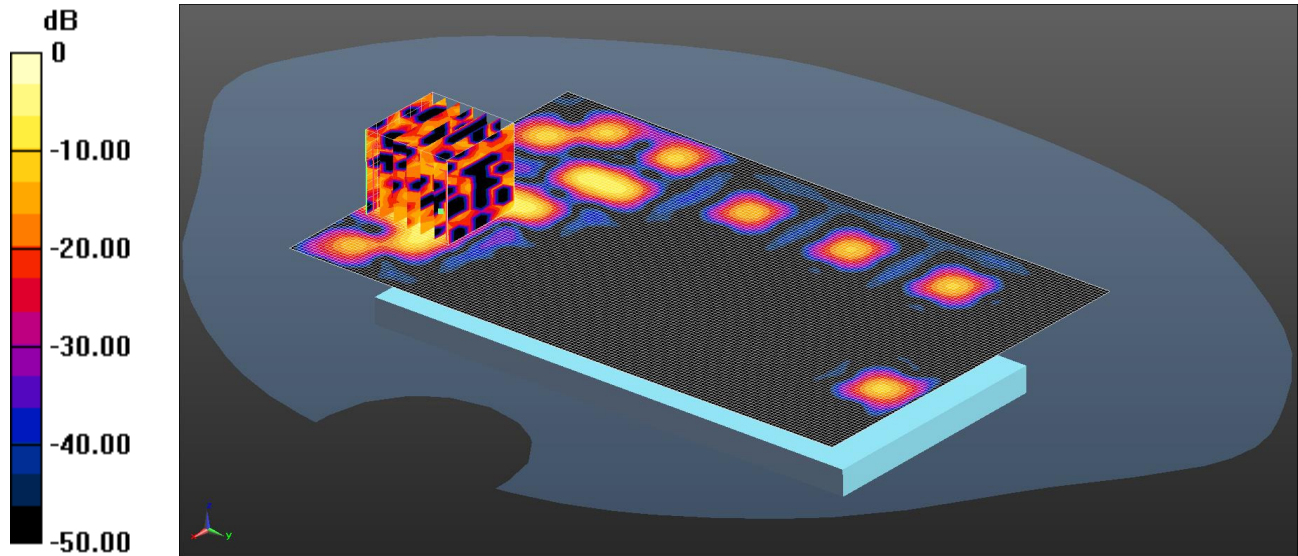

0 dB = 0.134 W/kg = -8.73 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5580 MHz; Duty Cycle: 1:1

Medium: 5GHz MSL Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.848$ S/m; $\epsilon_r = 47.494$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(3.79, 3.79, 3.79); Calibrated: 18/09/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 15/04/2014
- Phantom: SAM (20deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Back of EUT Facing Phantom/Area Scan (101x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.150 W/kg

Configuration/Back of EUT Facing Phantom/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.659 V/m; Power Drift = 3.08 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.010 W/kg


Maximum value of SAR (measured) = 0.134 W/kg

Note: SAR level measured is very low as equivalent to noise floor.

032: Touch_Right_Wi-Fi 5GHz_802.11a_6Mbps_CH157

Date: 15/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

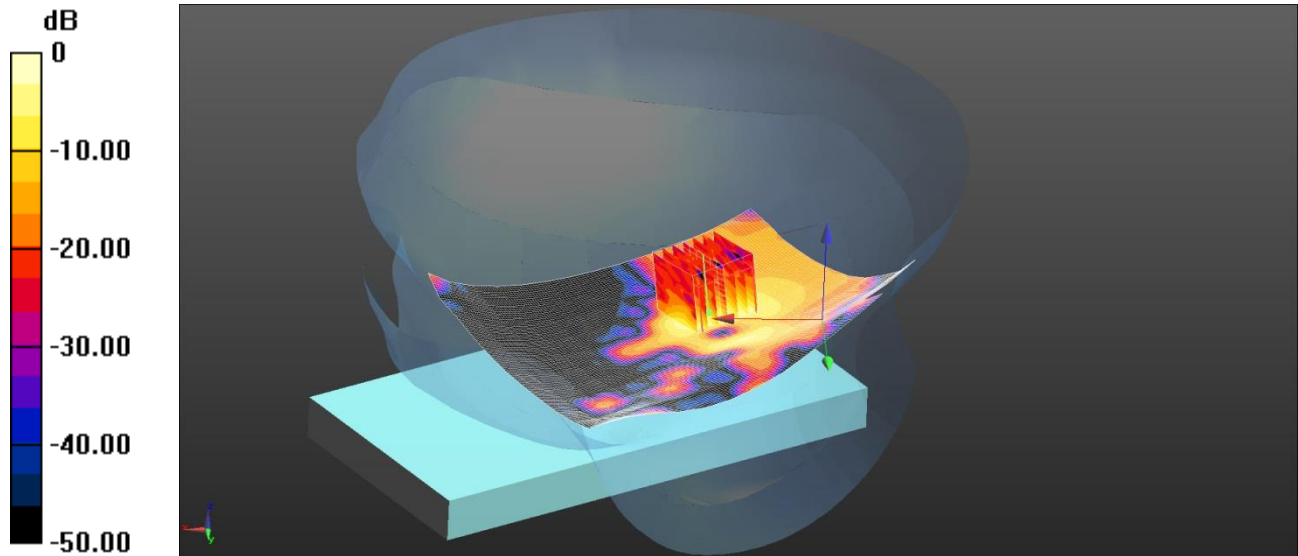

0 dB = 0.377 W/kg = -4.24 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: 5200/5500/5800 MHz HSL Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.128$ S/m; $\epsilon_r = 33.833$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3995; ConvF(5.06, 5.06, 5.06); Calibrated: 09/05/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn450; Calibrated: 16/09/2014
- Phantom: SAM (20deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Touch Right/Area Scan (131x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.402 W/kg

Configuration/Touch Right/Zoom Scan (7x7x12) 2 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.245 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.30 W/kg


SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.377 W/kg

033: Front_of_EUT-Body-Worn_Wi-Fi 5GHz_802.11a 6Mbps_CH149

Date: 14/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

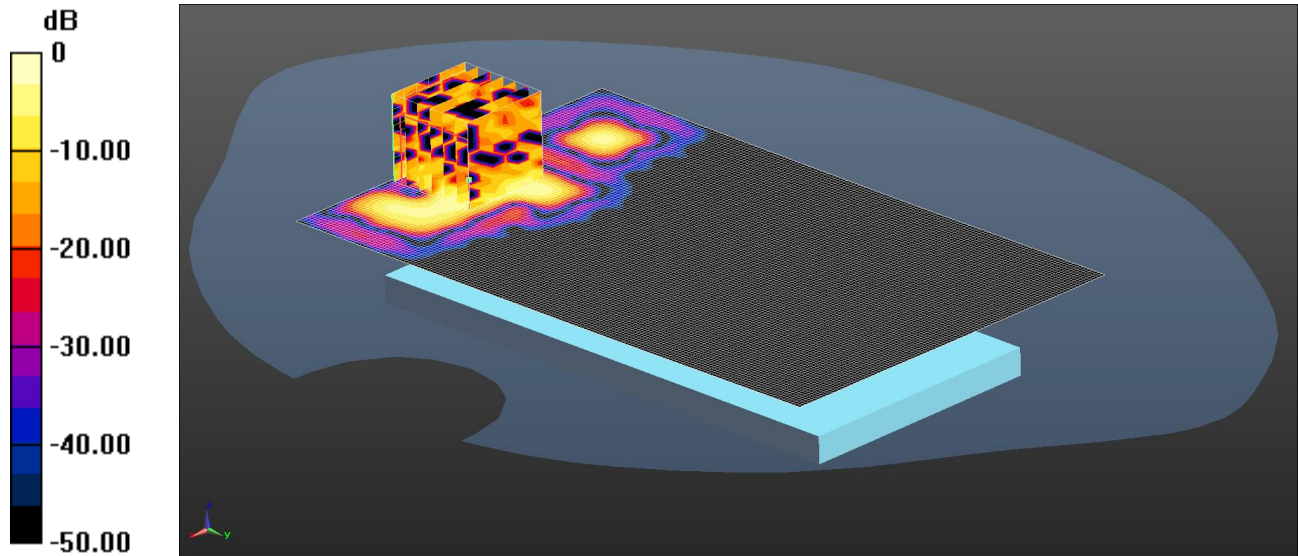

0 dB = 0.0507 W/kg = -12.95 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: 5GHz MSL Medium parameters used (interpolated): $f = 5745$ MHz; $\sigma = 6.122$ S/m; $\epsilon_r = 47.066$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3814; ConvF(4.06, 4.06, 4.06); Calibrated: 18/09/2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 15/04/2014
- Phantom: SAM (20deg probe tilt) with CRP v4.0; Type: QD000P40CC; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7164)

Configuration/Back of EUT Facing Phantom/Area Scan (101x161x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0474 W/kg

Configuration/Back of EUT Facing Phantom/Zoom Scan (7x7x12) (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.358 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.62 W/kg


SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0507 W/kg

034: Back of EUT-Body-Worn_Bluetooth_1Mbps_CH39

Date: 29/04/2015

DUT: A1429; Sleeve: Linea Pro 5; Sleeve contains FCC ID: YRWDATECSBT301

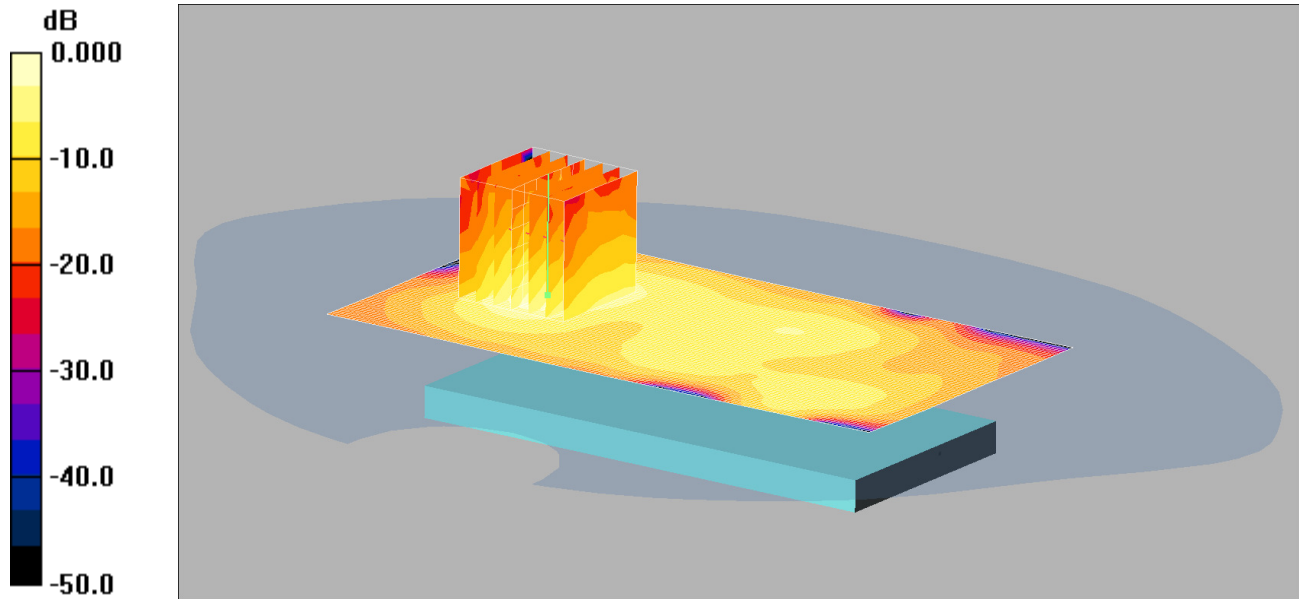

0 dB = 0.045mW/g

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: 2450 MHz MSL Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1529; ConvF(3.95, 3.95, 3.95);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn394; Calibrated: 16/05/2014
- Phantom: SAM 12b (Site 56); Type: SAM 4.0; Serial: TP:1192
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Back - Middle/Area Scan (71x131x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.042 mW/g

Back - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.89 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.092 W/kg

SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.045 mW/g

Note: SAR level measured is very low, equivalent to noise floor.