



**KDB 865664 D01 SAR Measurement 100MHz to 6GHz  
FCC 47 CFR part 2 (2.1093)**

**SAR EVALUATION REPORT**

*For*

**Barcode reader and Magnetic stripe reader with Bluetooth**

**Model Name: Infinea TAB Mini (Linea TAB Mini)  
(Contains FCC ID: YRWDATECSBT301)**

**Report Number UL-SAR-RP10488894JD03A V3.0  
ISSUE DATE: 24 May 2016**

*Prepared for*

**DATECS LTD  
4 DATECS STR  
9B ILIA BESHKOV  
SOFIA 1592  
BULGARIA**

*Prepared by*

**UL VS LTD  
PAVILION A, ASHWOOD PARK, ASHWOOD WAY  
BASINGSTOKE, HAMPSHIRE, RG23 8BG, UK  
TEL: +44 (0) 1256 312000  
FAX: +44 (0) 1256 312001**





**REVISION HISTORY**

| Rev. | Issue Date       | Revisions   | Revised By    |
|------|------------------|---|---------------|
| --   | 15 December 2015 | Initial Issue   | --            |
| 1    | 29 February 2016 | The following amendments are made in the report: <ol style="list-style-type: none"> <li>1. In Section 2, KDB list is updated to include latest KDB versions</li> <li>2. In Section 2, typo in Test specification – purpose of test is amended</li> <li>3. In Section 6.3., the date of the original report is added</li> <li>4. In Section 7, the date of the original report is added</li> <li>5. In Section 10.2., host test separation distance note is added</li> <li>6. In Section 12.3., the FCC ID of the sleeve is added</li> </ol> | Sandhya Menon |
| 2    | 24 May 2016      | The following amendments are made in the report: <ol style="list-style-type: none"> <li>1. FCC ID of the sleeve is updated</li> <li>2. EUT description updated in section 6.1.</li> </ol>   | Sandhya Menon |
|      |                  |   |               |
|      |                  |   |               |
|      |                  |   |               |

## TABLE OF CONTENTS

|   |           |
|---|-----------|
| <b>1. Attestation of Test Results</b> .....                         | <b>4</b>  |
| <b>2. Test Specification, Methods and Procedures</b> .....          | <b>5</b>  |
| 2.1. Test Specification   | 5         |
| 2.2. Methods and Procedures Reference Documentation                 | 5         |
| 2.3. Definition of Measurement Equipment                            | 5         |
| <b>3. Facilities and Accreditation</b> .....                        | <b>6</b>  |
| <b>4. SAR Measurement System &amp; Test Equipment</b> .....         | <b>7</b>  |
| 4.1. SAR Measurement System   | 7         |
| 4.2. SAR Measurement Procedure                                      | 8         |
| 4.3. Volumetric Scan Procedure                                      | 10        |
| 4.4. Test Equipment   | 11        |
| 4.5. SAR System Specifications                                      | 12        |
| 4.6. SAR Measurement Procedure                                      | 14        |
| 4.7. Volumetric Scan Procedure                                      | 16        |
| <b>5. Measurement Uncertainty</b> .....                             | <b>17</b> |
| 5.1. Uncertainty –Wi-Fi 2450 MHz Body Configuration 1g              | 18        |
| 5.2. Uncertainty - Wi-Fi 5GHz Body Configuration 1g                 | 19        |
| <b>6. Device Under Test (DUT) Information</b> .....                 | <b>20</b> |
| 6.1. DUT Description  | 20        |
| 6.2. Wireless Technologies  | 21        |
| 6.3. Nominal and Maximum Output Power                               | 21        |
| <b>7. RF Exposure Conditions (Test Configurations)</b> .....        | <b>22</b> |
| <b>8. Conducted output power measurements</b> .....                 | <b>23</b> |
| <b>9. Dielectric Property Measurements &amp; System Check</b> ..... | <b>24</b> |
| 9.1. Tissue Dielectric Parameters                                   | 24        |
| 9.2. System Check   | 25        |
| 9.3. Reference Target SAR Values                                    | 25        |
| 9.4. Dielectric Property Measurements & System Check Results        | 26        |
| <b>10. Measurements, Examinations and Derived Results</b> .....     | <b>27</b> |
| 10.1. General Comments  | 27        |
| 10.2. Specific Absorption Rate - Test Results – A1489               | 28        |
| 10.3. Bluetooth (Sleeve)  | 29        |
| <b>11. Simultaneous Transmission Analysis</b> .....                 | <b>30</b> |
| <b>12. Appendixes</b> .....   | <b>31</b> |
| 12.1. Photos and Ports Location                                     | 31        |
| 12.2. System Check Plots – A1489                                    | 41        |
| 12.3. SAR Test Plots  | 46        |
| 12.4. Calibration Certificate for E-Field Probe                     | 52        |
| 12.5. Calibration Certificate for Dipole                            | 53        |
| 12.6. Tissues-Equivalent Media Recipes                              | 54        |
| 12.7. Standalone SAR plots  | 55        |

### 1. Attestation of Test Results

|  |   |                 |  |            |            |
|--|---|-----------------|--|------------|------------|
| Applicant Name:  | Datecs Ltd  |                 |  |            |            |
| Application Purpose  | <input checked="" type="checkbox"/> Original Grant                  |                 |  |            |            |
| Model Name   | Infinea TAB mini (Linea TAB mini)                                   |                 |  |            |            |
| Test Device is   | An identical prototype  |                 |  |            |            |
| Device category  | Portable  |                 |  |            |            |
| Exposure Category  | General Population/Uncontrolled Exposure (1g SAR limit: 1.6 W/kg)   |                 |  |            |            |
| Date Tested  | 05 May 2015 to 08 May 2015  |                 |  |            |            |
| The highest reported SAR values  | RF Exposure Conditions  | Equipment Class |  |            |            |
|  |   | Licensed        | DTS  | UNII       | DSS        |
| Host Device Model: A1489   | Standalone  | N/A             | 0.055 W/kg   | 0.293 W/kg | 0.001 W/kg |
|  | Simultaneous Transmission   | N/A             | 0.346 W/kg   | 0.346 W/kg | 0.023 W/kg |
| Applicable Standards   | FCC 47 CFR part 2 (2.1093)<br>KDB publication<br>IEEE Std 1528-2013 |                 |  |            |            |
| Test Results   | Pass  |                 |  |            |            |
| <p>UL VS Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL VS Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties are in accordance with the above standard and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p><b>Note:</b> The results documented in this report apply only to the tested sample(s), under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL VS Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL VS Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by UKAS. This report is written to support regulatory compliance of the applicable standards stated above.</p> |   |                 |  |            |            |
| Approved & Released By:  |   |                 | Prepared By:   |            |            |
|   |   |                 |  |            |            |
| Naseer Mirza<br>Project Lead<br>UL VS Ltd.   |   |                 | Sandhya Menon<br>Senior Engineer<br>UL VS Ltd.                                       |            |            |

**2. Test Specification, Methods and Procedures**

**2.1. Test Specification**

|   |   |
|---|---|
| <b>Reference:</b>   | KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04  |
| <b>Title:</b>   | SAR Measurement Requirements for 100 MHz to 6 GHz   |
| <b>Purpose of Test:</b>   | Field probes, tissue dielectric properties, SAR scans, measurement accuracy and variability of the measured results are discussed. The field probe and SAR scan requirements are derived from criteria considered in IEEE 1528: 2013. |
| The Equipment Under Test complied with the Specific Absorption Rate for general population/uncontrolled exposure limit of 1.6 W/kg as specified in FCC 47 CFR part 2 (2.1093) and ANSI C95.1-1992 and has been tested in accordance with the reference documents in section 2.2 of this report. |   |

**2.2. Methods and Procedures Reference Documentation**

The methods and procedures used were as detailed in:

**IEEE 1528: 2013**

IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques

Thomas Schmid, Oliver Egger and Neils Kuster, “Automated E-field scanning system for dosimetric assessments”, IEEE Transaction on microwave theory and techniques, Vol. 44, pp. 105-113, January 1996.

Neils Kuster, Ralph Kastle and Thomas Schmid, “Dosimetric evaluation of mobile communications equipment with known precision”, IEICE Transactions of communications, Vol. E80-B, No.5, pp. 645-652, May 1997.

**FCC KDB Publication:**

- 248227 D01 802.11 Wi-Fi SAR v02 r02
- 447498 D01 General RF Exposure Guidance v06
- 648474 D04 Handset SAR v01r03
- 941225 D06 Hotspot Mode v02r01
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 SAR Reporting v01r02
- Interim Sleeve Procedures
- RF Exposure Procedures TCB Workshop April 2015

**2.3. Definition of Measurement Equipment**

The measurement equipment used complied with the requirements of the standards referenced in the methods & procedures section above. Appendix 1 contains a list of the test equipment used.

### **3. Facilities and Accreditation**

The test sites and measurement facilities used to collect data are located at


| Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG UK | Facility Type                  |
|--|--------------------------------|
| SAR Lab 59   | Controlled Environment Chamber |
| SAR Lab 61   | Controlled Environment Chamber |

UL VS Ltd, is accredited by UKAS (United Kingdom Accreditation Service), Laboratory UKAS Code 0644.

## 4. SAR Measurement System & Test Equipment

### 4.1. SAR Measurement System

The DASY system used for performing compliance tests consists of the following items:

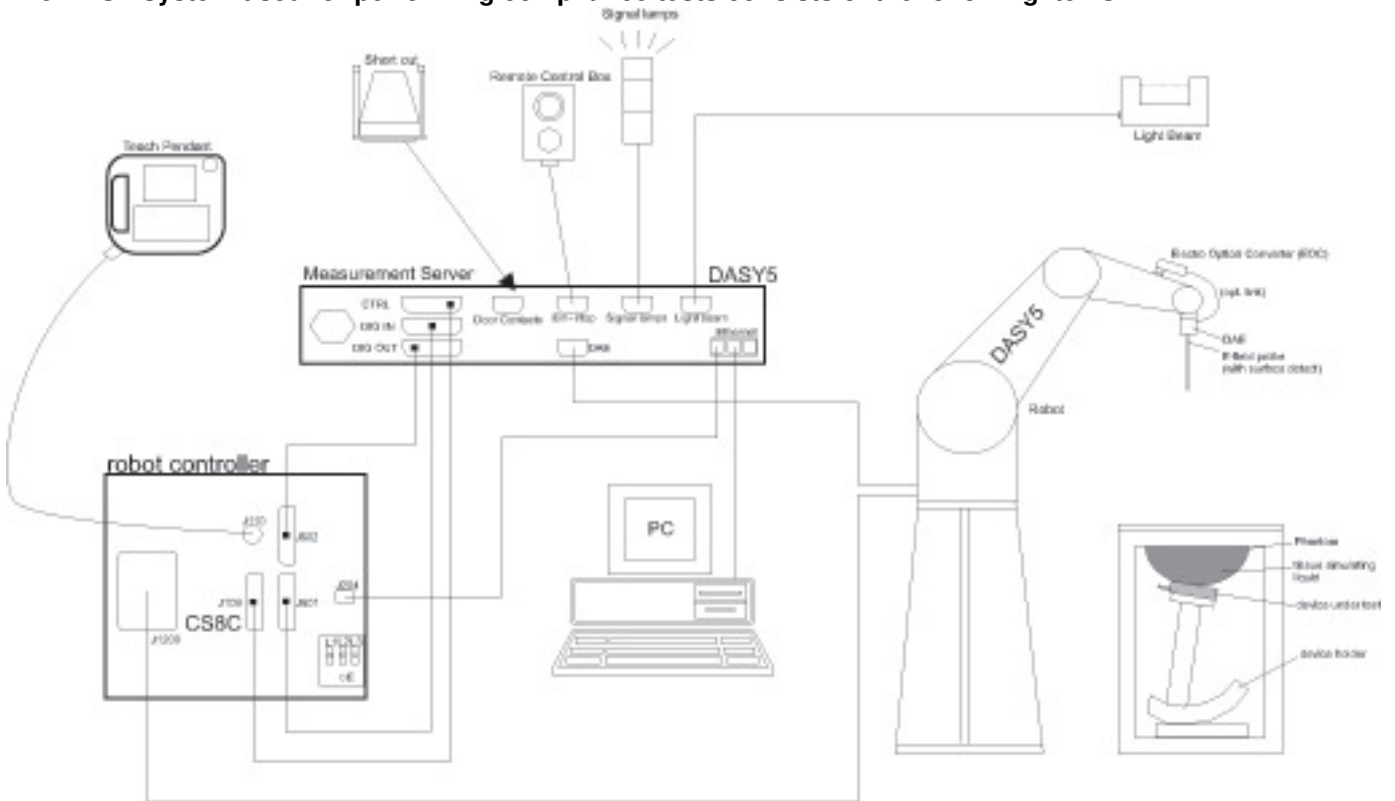

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 4.2. SAR Measurement Procedure

### 4.2.1. Normal SAR Measurement Procedure

#### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties

#### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in following standards: IEEE 1528 -2013 and IEC 62209-1: 2005 / IEC 62209-2: 2010 standards. If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

|  | ≤ 3 GHz   | > 3 GHz   |
|--|---|---|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 mm ± 1 mm   | $\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location              | 30° ± 1°  | 20° ± 1°  |
| Maximum area scan spatial resolution: $\Delta X_{Area}$ , $\Delta Y_{Area}$                            | ≤ 2 GHz: ≤ 15 mm<br>2 – 3 GHz: ≤ 12 mm  | 3 – 4 GHz: ≤ 12 mm<br>4 – 6 GHz: ≤ 10 mm            |
|  | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |   |



**Step 3: Zoom Scan**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

|  |                                    |  | ≤ 3 GHz  | > 3 GHz   |
|--|------------------------------------|--|--|---|
| Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$  |                                    |  | ≤ 2 GHz: ≤ 8 mm<br>2 – 3 GHz: ≤ 5 mm*                          | 3 – 4 GHz: ≤ 5 mm*<br>4 – 6 GHz: ≤ 4 mm*                      |
| Maximum zoom scan spatial resolution, normal to phantom surface  | uniform grid: $\Delta z_{Zoom}(n)$ |  | ≤ 5 mm   | 3 – 4 GHz: ≤ 4 mm<br>4 – 5 GHz: ≤ 3 mm<br>5 – 6 GHz: ≤ 2 mm   |
|  | graded grid                        | $\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | ≤ 4 mm   | 3 – 4 GHz: ≤ 3 mm<br>4 – 5 GHz: ≤ 2.5 mm<br>5 – 6 GHz: ≤ 2 mm |
|  |                                    | $\Delta z_{Zoom}(n>1)$ : between subsequent points                                   | $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$                          |   |
| Minimum zoom scan volume   | x, y, z                            | ≥ 30 mm  | 3 – 4 GHz: ≥ 28 mm<br>4 – 5 GHz: ≥ 25 mm<br>5 – 6 GHz: ≥ 22 mm |   |
| Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.<br>* When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. |                                    |  |  |   |

**Step 4: Power drift measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

**Step 5: Z-Scan (FCC only)**

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z- direction.

### **4.3. Volumetric Scan Procedure**

#### **Step 1: Repeat Step 1-4 in Section 4.3**

#### **Step 2: Volume Scan**

Volume Scans are used to assess peak SAR and averaged SAR measurements in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location.

#### **Step 3: Power drift measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

#### 4.4. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

| UL No. | Instrument                   | Manufacturer         | Type No.      | Serial No.      | Date Last Calibrated         | Cal. Interval (Months) |
|--------|------------------------------|----------------------|---------------|-----------------|------------------------------|------------------------|
| A1234  | Data Acquisition Electronics | SPEAG                | DAE3          | 450             | 16 Sept 2014                 | 12                     |
| A2546  | Data Acquisition Electronics | SPEAG                | DAE4          | 1435            | 15 Apr 2014                  | 12                     |
| A2544  | Probe                        | SPEAG                | EX3 DV4       | 3994            | 17 Mar 2015                  | 12                     |
| A2077  | Probe                        | SPEAG                | EX3 DV4       | 3814            | 18 Sept 2014                 | 12                     |
| A1322  | 2450 MHz Dipole Kit          | SPEAG                | D2450V2       | 725             | 08 Dec 2014                  | 12                     |
| A1377  | 5.0 GHz Dipole Kit           | SPEAG                | D5GHzV2       | 1016            | 24 Feb 2015                  | 12                     |
| G0610  | Robot Power Supply           | SPEAG                | DASY52        | None            | Calibrated before use        | -                      |
| G0612  | Robot Power Supply           | SPEAG                | DASY52        | None            | Calibrated before use        | -                      |
| M1875  | Robot Arm                    | Staubli              | TX60 L        | F13/5SC6F1/A/01 | Calibrated before use        | -                      |
| M1877  | Robot Arm                    | Staubli              | TX60 L        | F14/5UA6A1/A/01 | Calibrated before use        | -                      |
| A2443  | Handset Positioner           | SPEAG                | MD4HHTV5      | None            | -                            | -                      |
| A172   | Handset Positioner           | SPEAG                | MD4HHTV5      | None            | -                            | -                      |
| M1755  | DAK Fluid Probe              | SPEAG                | SM DAK 040 CA | 1089            | Calibrated before use        | -                      |
| M1015  | Network Analyser             | Agilent Technologies | 8753ES        | US39172406      | 26 Sept 2014                 | 12                     |
| A2621  | Digital Camera               | Nikon                | S3600         | 41010357        | -                            | -                      |
| M1908  | Signal Generator             | R&S                  | SMIQ03B       | 1125555503      | 02 Dec 2014                  | 12                     |
| M1839  | Signal Generator             | R&S                  | SME06         | 837633/001      | 27 Mar 2015                  | 12                     |
| M1841  | Dual Channel Power Meter     | R & S                | NRVD          | 834501/069      | 27 Mar 2015                  | 12                     |
| M1023  | Dual Channel Power Meter     | R & S                | NRVD          | 863715/030      | 01 May 2014                  | 12                     |
| M1634  | Power Sensor                 | R & S                | NRVZ1         | 860462/016      | 02 May 2014                  | 12                     |
| M1635  | Power Sensor                 | R & S                | ZRPZ1         | 826515/015      | 02 May 2014                  | 12                     |
| M1848  | Power Sensor                 | R & S                | ZRPZ1         | 831430/004      | 20 Apr 2015                  | 12                     |
| M1847  | Power Sensor                 | R & S                | ZRPZ1         | 831430/003      | 20 Apr 2015                  | 12                     |
| A2100  | Directional Coupler          | RF-Lambda            | 11101300748   | None            | Calibrated as part of system | -                      |
| A1097  | Directional Coupler          | MidISCO              | MDC6223-30    | None            | Calibrated as part of system | -                      |
| A1474  | Amplifier                    | Mini-Circuits        | ZVE-8G        | 638700305       | Calibrated as part of system | -                      |
| A2403  | Amplifier                    | Mini-Circuits        | ZHL-42W       | 15542           | Calibrated as part of system | -                      |

#### 4.5. SAR System Specifications

| <b>Robot System</b>                             |   |
|---|---|
| <b>Positioner:</b>                              | Stäubli Unimation Corp. Robot Model: TX60L  |
| <b>Repeatability:</b>                           | ±0.030 mm   |
| <b>No. of Axis:</b>                             | 6   |
| <b>Serial Number(s):</b>                        | F12/5MZ7A1/A/01; F14/5UA6A1/A/01  |
| <b>Reach:</b>                                   | 920 mm  |
| <b>Payload:</b>                                 | 2.0 kg  |
| <b>Control Unit:</b>                            | CS8C  |
| <b>Programming Language:</b>                    | V+  |
| <b>Data Acquisition Electronic (DAE) System</b> |   |
| <b>Serial Number:</b>                           | DAE3 SN: 450<br>DAE4 SN: 1435   |
| <b>PC Controller</b>                            |   |
| <b>PC:</b>                                      | Dell Precision 340  |
| <b>Operating System:</b>                        | Windows 2000  |
| <b>Data Card:</b>                               | DASY4 and DASY5 Measurement Servers   |
| <b>Serial Number:</b>                           | 1080  |
| <b>Data Converter</b>                           |   |
| <b>Features:</b>                                | Signal Amplifier, multiplexer, A/D converted and control logic.   |
| <b>Software:</b>                                | DASY4 and DASY5 PRO Software  |
| <b>Connecting Lines:</b>                        | Optical downlink for data and status info.<br>Optical uplink for commands and clock.  |
| <b>PC Interface Card</b>                        |   |
| <b>Function:</b>                                | 24 bit (64 MHz) DSP for real time processing Link to DAE3 and DAE4 16 bit A/D converter for surface detection system serial link to robot direct emergency stop output for robot. |

**SAR System Specifications (Continued):**

| <b>E-Field Probe</b>         |                           |
|------------------------------|---------------------------|
| <b>Model:</b>                | EX3DV6                    |
| <b>Serial No:</b>            | 3994; 3814                |
| <b>Construction:</b>         | Triangular core           |
| <b>Frequency:</b>            | 10 MHz to 6 GHz           |
| <b>Linearity:</b>            | ±0.2 dB (30 MHz to 6 GHz) |
| <b>Probe Length (mm):</b>    | 337                       |
| <b>Probe Diameter (mm):</b>  | 10                        |
| <b>Tip Length (mm):</b>      | 9                         |
| <b>Tip Diameter (mm):</b>    | 2.5                       |
| <b>Sensor X Offset (mm):</b> | 1                         |
| <b>Sensor Y Offset (mm):</b> | 1                         |
| <b>Sensor Z Offset (mm):</b> | 1                         |
| <b>E- Phantom</b>            |                           |
| <b>Phantom:</b>              | Eli Phantom               |
| <b>Shell Material:</b>       | Fibreglass                |
| <b>Thickness:</b>            | 2.0 ±0.1 mm               |

**4.6. SAR Measurement Procedure**

**4.6.1. Normal SAR Measurement Procedure**

**Step 1: Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties

**Step 2: Area Scan**

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209-1 / IEC 62209-2 standards. If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

|  | ≤ 3 GHz   | > 3 GHz  |
|--|---|--|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 ± 1 mm  | $\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location              | 30° ± 1°  | 20° ± 1°   |
| Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$                            | ≤ 2 GHz: ≤ 15 mm<br>2 – 3 GHz: ≤ 12 mm  | 3 – 4 GHz: ≤ 12 mm<br>4 – 6 GHz: ≤ 10 mm           |
|  | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |  |

**Step 3: Zoom Scan**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

|  |                                    |  | ≤ 3 GHz  | > 3 GHz   |
|--|------------------------------------|--|--|---|
| Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$  |                                    |  | ≤ 2 GHz: ≤ 8 mm<br>2 – 3 GHz: ≤ 5 mm*                          | 3 – 4 GHz: ≤ 5 mm*<br>4 – 6 GHz: ≤ 4 mm*                      |
| Maximum zoom scan spatial resolution, normal to phantom surface  | uniform grid: $\Delta z_{Zoom}(n)$ |  | ≤ 5 mm   | 3 – 4 GHz: ≤ 4 mm<br>4 – 5 GHz: ≤ 3 mm<br>5 – 6 GHz: ≤ 2 mm   |
|  | graded grid                        | $\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | ≤ 4 mm   | 3 – 4 GHz: ≤ 3 mm<br>4 – 5 GHz: ≤ 2.5 mm<br>5 – 6 GHz: ≤ 2 mm |
|  |                                    | $\Delta z_{Zoom}(n>1)$ : between subsequent points                                   | $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$                          |   |
| Minimum zoom scan volume   | x, y, z                            | ≥ 30 mm  | 3 – 4 GHz: ≥ 28 mm<br>4 – 5 GHz: ≥ 25 mm<br>5 – 6 GHz: ≥ 22 mm |   |
| Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.<br>* When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. |                                    |  |  |   |

**Step 4: Power drift measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

**Step 5: Z-Scan (FCC only)**

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z- direction.

## **4.7. Volumetric Scan Procedure**

### **Step 1: Repeat Step 1-4 in Section 4.3**

### **Step 2: Volume Scan**

Volume Scans are used to assess peak SAR and averaged SAR measurements in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location.

### **Step 3: Power drift measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.



## **5. Measurement Uncertainty**

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

| <b>Test Name</b>   | <b>Confidence Level</b> | <b>Calculated Uncertainty</b> |
|--|-------------------------|-------------------------------|
| Specific Absorption Rate- Wi-Fi 2450 MHz Body Configuration 1g | 95%                     | ±18.35%                       |
| Specific Absorption Rate-Wi-Fi 5GHz Body Configuration 1g      | 95%                     | ±19.90%                       |

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

**5.1. Uncertainty –Wi-Fi 2450 MHz Body Configuration 1g**

| Type | Source of uncertainty                                  | + Value | - Value | Probability Distribution | Divisor | C <sub>i</sub> (1g) | Standard Uncertainty |         | U <sub>i</sub> or U <sub>eff</sub> |
|------|--|---------|---------|--------------------------|---------|---------------------|----------------------|---------|------------------------------------|
|      |  |         |         |                          |         |                     | + u (%)              | - u (%) |                                    |
| B    | Probe calibration                                      | 6.000   | 6.000   | normal (k=1)             | 1.0000  | 1.0000              | 6.000                | 6.000   | ∞                                  |
| B    | Axial Isotropy   | 0.250   | 0.250   | normal (k=1)             | 1.0000  | 1.0000              | 0.250                | 0.250   | ∞                                  |
| B    | Hemispherical Isotropy                                 | 1.300   | 1.300   | normal (k=1)             | 1.0000  | 1.0000              | 1.300                | 1.300   | ∞                                  |
| B    | Spatial Resolution                                     | 0.500   | 0.500   | Rectangular              | 1.7321  | 1.0000              | 0.289                | 0.289   | ∞                                  |
| B    | Boundary Effect  | 0.769   | 0.769   | Rectangular              | 1.7321  | 1.0000              | 0.444                | 0.444   | ∞                                  |
| B    | Linearity  | 0.600   | 0.600   | Rectangular              | 1.7321  | 1.0000              | 0.346                | 0.346   | ∞                                  |
| B    | Detection Limits                                       | 0.200   | 0.200   | Rectangular              | 1.7321  | 1.0000              | 0.115                | 0.115   | ∞                                  |
| B    | Readout Electronics                                    | 0.160   | 0.160   | normal (k=1)             | 1.0000  | 1.0000              | 0.160                | 0.160   | ∞                                  |
| B    | Response Time  | 0.000   | 0.000   | Rectangular              | 1.7321  | 1.0000              | 0.000                | 0.000   | ∞                                  |
| B    | Integration Time                                       | 0.000   | 0.000   | Rectangular              | 1.7321  | 1.0000              | 0.000                | 0.000   | ∞                                  |
| B    | RF Ambient conditions                                  | 3.000   | 3.000   | Rectangular              | 1.7321  | 1.0000              | 1.732                | 1.732   | ∞                                  |
| B    | Probe Positioner Mechanical Restrictions               | 4.000   | 4.000   | Rectangular              | 1.7321  | 1.0000              | 2.309                | 2.309   | ∞                                  |
| B    | Probe Positioning with regard to Phantom Shell         | 2.850   | 2.850   | Rectangular              | 1.7321  | 1.0000              | 1.645                | 1.645   | ∞                                  |
| B    | Extrapolation and integration / Maximum SAR evaluation | 5.080   | 5.080   | Rectangular              | 1.7321  | 1.0000              | 2.933                | 2.933   | ∞                                  |
| A    | Test Sample Positioning                                | 2.440   | 2.440   | normal (k=1)             | 1.0000  | 1.0000              | 2.440                | 2.440   | 10                                 |
| A    | Device Holder uncertainty                              | 0.154   | 0.154   | normal (k=1)             | 1.0000  | 1.0000              | 0.154                | 0.154   | 10                                 |
| B    | Phantom Uncertainty                                    | 4.000   | 4.000   | Rectangular              | 1.7321  | 1.0000              | 2.309                | 2.309   | ∞                                  |
| B    | Drift of output power                                  | 5.000   | 5.000   | Rectangular              | 1.7321  | 1.0000              | 2.887                | 2.887   | ∞                                  |
| B    | Liquid Conductivity (target value)                     | 5.000   | 5.000   | Rectangular              | 1.7321  | 0.6400              | 1.848                | 1.848   | ∞                                  |
| A    | Liquid Conductivity (measured value)                   | 2.260   | 2.260   | normal (k=1)             | 1.0000  | 0.6400              | 1.446                | 1.446   | 5                                  |
| B    | Liquid Permittivity (target value)                     | 5.000   | 5.000   | Rectangular              | 1.7321  | 0.6000              | 1.732                | 1.732   | ∞                                  |
| A    | Liquid Permittivity (measured value)                   | 2.150   | 2.150   | normal (k=1)             | 1.0000  | 0.6000              | 1.290                | 1.290   | 5                                  |
|      | Combined standard uncertainty                          |         |         | t-distribution           |         |                     | 9.36                 | 9.36    | >500                               |
|      | Expanded uncertainty                                   |         |         | k = 1.96                 |         |                     | 18.35                | 18.35   | >500                               |

**5.2. Uncertainty - Wi-Fi 5GHz Body Configuration 1g**

| Type | Source of uncertainty                                  | + Value | - Value | Probability Distribution | Divisor | C <sub>i</sub> (1g) | Standard Uncertainty |         | u <sub>i</sub> or u <sub>eff</sub> |
|------|--|---------|---------|--------------------------|---------|---------------------|----------------------|---------|------------------------------------|
|      |  |         |         |                          |         |                     | + u (%)              | - u (%) |                                    |
| B    | Probe calibration                                      | 6.550   | 6.550   | normal (k=1)             | 1.0000  | 1.0000              | 6.550                | 6.550   | ∞                                  |
| B    | Axial Isotropy   | 0.250   | 0.250   | normal (k=1)             | 1.0000  | 1.0000              | 0.250                | 0.250   | ∞                                  |
| B    | Hemispherical Isotropy                                 | 1.300   | 1.300   | normal (k=1)             | 1.0000  | 1.0000              | 1.300                | 1.300   | ∞                                  |
| B    | Spatial Resolution                                     | 0.500   | 0.500   | Rectangular              | 1.7321  | 1.0000              | 0.289                | 0.289   | ∞                                  |
| B    | Boundary Effect  | 0.769   | 0.769   | Rectangular              | 1.7321  | 1.0000              | 0.444                | 0.444   | ∞                                  |
| B    | Linearity  | 0.600   | 0.600   | Rectangular              | 1.7321  | 1.0000              | 0.346                | 0.346   | ∞                                  |
| B    | Detection Limits                                       | 0.200   | 0.200   | Rectangular              | 1.7321  | 1.0000              | 0.115                | 0.115   | ∞                                  |
| B    | Readout Electronics                                    | 0.160   | 0.160   | normal (k=1)             | 1.0000  | 1.0000              | 0.160                | 0.160   | ∞                                  |
| B    | Response Time  | 0.000   | 0.000   | Rectangular              | 1.7321  | 1.0000              | 0.000                | 0.000   | ∞                                  |
| B    | Integration Time                                       | 0.000   | 0.000   | Rectangular              | 1.7321  | 1.0000              | 0.000                | 0.000   | ∞                                  |
| B    | RF Ambient conditions                                  | 3.000   | 3.000   | Rectangular              | 1.7321  | 1.0000              | 1.732                | 1.732   | ∞                                  |
| B    | Probe Positioner Mechanical Restrictions               | 4.000   | 4.000   | Rectangular              | 1.7321  | 1.0000              | 2.309                | 2.309   | ∞                                  |
| B    | Probe Positioning with regard to Phantom Shell         | 2.850   | 2.850   | Rectangular              | 1.7321  | 1.0000              | 1.645                | 1.645   | ∞                                  |
| B    | Extrapolation and integration / Maximum SAR evaluation | 5.080   | 5.080   | Rectangular              | 1.7321  | 1.0000              | 2.933                | 2.933   | ∞                                  |
| A    | Test Sample Positioning                                | 1.960   | 1.960   | normal (k=1)             | 1.0000  | 1.0000              | 1.960                | 1.960   | 10                                 |
| A    | Device Holder uncertainty                              | 0.154   | 0.154   | normal (k=1)             | 1.0000  | 1.0000              | 0.154                | 0.154   | 10                                 |
| B    | Phantom Uncertainty                                    | 4.000   | 4.000   | Rectangular              | 1.7321  | 1.0000              | 2.309                | 2.309   | ∞                                  |
| B    | Drift of output power                                  | 5.000   | 5.000   | Rectangular              | 1.7321  | 1.0000              | 2.887                | 2.887   | ∞                                  |
| B    | Liquid Conductivity (target value)                     | 5.000   | 5.000   | Rectangular              | 1.7321  | 0.6400              | 1.848                | 1.848   | ∞                                  |
| A    | Liquid Conductivity (measured value)                   | 4.370   | 4.370   | normal (k=1)             | 1.0000  | 0.6400              | 2.797                | 2.797   | 5                                  |
| B    | Liquid Permittivity (target value)                     | 5.000   | 5.000   | Rectangular              | 1.7321  | 0.6000              | 1.732                | 1.732   | ∞                                  |
| A    | Liquid Permittivity (measured value)                   | 4.270   | 4.270   | normal (k=1)             | 1.0000  | 0.6000              | 2.562                | 2.562   | 5                                  |
|      | Combined standard uncertainty                          |         |         | t-distribution           |         |                     | 10.15                | 10.15   | >450                               |
|      | Expanded uncertainty                                   |         |         | k = 1.96                 |         |                     | 19.90                | 19.90   | >450                               |

## 6. Device Under Test (DUT) Information

### 6.1. DUT Description

#### Phone Cover (Sleeve)

|                                 |   |
|---------------------------------|---|
| <b>DUT Description:</b>         | The InfineaTAB mini is a small handheld secured payment terminal with barcode reader, Magnetic Stripe reader and Bluetooth. It is compatible with iPad mini, iPad mini with Retina display, iPad Air, iPhone 6 Plus and iPhone 6S Plus. |
| <b>Model Number:</b>            | Infinea TAB mini  |
| <b>Serial Number:</b>           | MAR00341SUN14   |
| <b>Hardware Version Number:</b> | MBN0100   |
| <b>Software Version Number:</b> | None Stated   |
| <b>Country of Manufacture:</b>  | Bulgaria  |
| <b>Date of Receipt:</b>         | 26 March 2015   |
| <b>EUT Dimensions:</b>          | 103.0 x 88.0 x 23.5 mm (LxWxD)  |

#### Host Device

|                         |   |
|-------------------------|---|
| <b>DUT Description:</b> | Model A1489 is a tablet with multimedia functions (music, application support and video), IEEE 802.11a/b/g/n, MIMO 2x2, Bluetooth radio   |
| <b>Serial Number:</b>   | DLXLLNA3FCM8: Used to perform radiated and conducted power measurements on WLAN 2.4GHz<br>AOJ456974 (ID number): Used to perform radiated and conducted power measurements on WLAN 5.2GHz<br>DLXLM6YRFCM5: Used to perform radiated and conducted power measurements on WLAN 5.3/5.5/5.8GHz |

## 6.2. Wireless Technologies

### Phone Cover (Sleeve)

|                |                            |
|----------------|----------------------------|
| Tx Frequencies | Bluetooth: 2402 – 2480 MHz |
| Mode           | Bluetooth 2.0 Class 2      |

### Host Device

|                       |   |
|-----------------------|---|
|                       | <b>Model: 1489</b>  |
| <b>Tx Frequencies</b> | <ul style="list-style-type: none"> <li>• 802.11 a/b/g/n: 2412-2462 MHz<br/>5180-5825 MHz</li> <li>• Bluetooth: 2402-2480 MHz</li> </ul> |
| <b>Mode</b>           | <ul style="list-style-type: none"> <li>• 802.11 a/b/g/n HT20</li> <li>• Bluetooth 4.0 LE</li> </ul>                                     |

## 6.3. Nominal and Maximum Output Power

### Host Device

All nominal and maximum output power measurements are as documented in original FCC SAR report **13U15668-13A** issued on **23 Sept 2013**.

## **7. RF Exposure Conditions (Test Configurations)**

Standalone measurements are performed on the host device and compared to the original grant reported levels for all bands on the indicated worst case position in the original SAR report for the host device.

As per the interim sleeve procedure, the highest SAR configuration among the different wireless modes in each frequency band and any SAR configuration in the original report > 75% of the SAR limit; should be measured separately for head, body-worn accessories and hotspot modes when applicable on the host device. When the measured SAR values of the highest SAR configurations are identical (before rounding up), select the configuration with the highest maximum output power. The SAR results should be each scaled with respect to the power level tested by to determine compliance.

After completing the Standalone measurements on the host device, the runs are repeated using the phone cover attached. Section 10 contains the SAR test results obtained with and without the phone cover attached along with the deviation in results with respect to the original FCC SAR report **13U15668-13A** issued on **23 Sept 2013**.

## **8. Conducted output power measurements**

This section contains the conducted power measurements that are carried out on the host device prior to performing the Standalone testing.

Bluetooth power measurements with sleeve attached are taken from Report **15U22277-S3V1**.

### **A1489**

| Technology/Band | Test Configuration | Mode               | Antenna   | Channel # | Frequency (MHz) | Meas. power (dBm) | Tune up Power (dBm) |
|-----------------|--------------------|--------------------|-----------|-----------|-----------------|-------------------|---------------------|
| WiFi 2.4 GHz    | Body               | 802.11g CDD        | 2TX Ant 1 | 2         | 2417.0          | 16.40             | 16.50               |
| WiFi 5.2 GHz    | Body               | 802.11 n HT40 SISO | 1TX Ant 2 | 46        | 5230.0          | 15.80             | 16.00               |
| WiFi 5.3 GHz    | Body               | 802.11a CDD        | 2TX Ant 2 | 52        | 5260.0          | 16.00             | 16.00               |
| WiFi 5.5 GHz    | Body               | 802.11a            | 1TX Ant 2 | 136       | 5680.0          | 15.40             | 15.50               |
| WiFi 5.8 GHz    | Body               | 802.11a            | 1TX Ant 2 | 165       | 5825.0          | 15.40             | 15.50               |

## 9. Dielectric Property Measurements & System Check

### 9.1. Tissue Dielectric Parameters

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

#### FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz; IEEE1528:2013 & IEC 62209-1:2005

| Target Frequency (MHz) | Head         |                | Body (FCC only) |                |
|------------------------|--------------|----------------|-----------------|----------------|
|                        | $\epsilon_r$ | $\sigma$ (S/m) | $\epsilon_r$    | $\sigma$ (S/m) |
| 150                    | 52.3         | 0.76           | 61.9            | 0.80           |
| 300                    | 45.3         | 0.87           | 58.2            | 0.92           |
| 450                    | 43.5         | 0.87           | 56.7            | 0.94           |
| 750                    | 41.9         | 0.89           | -               | -              |
| 835                    | 41.5         | 0.90           | 55.2            | 0.97           |
| 900                    | 41.5         | 0.97           | 55.0            | 1.05           |
| 915                    | 41.5         | 0.98           | 55.0            | 1.06           |
| 1450                   | 40.5         | 1.20           | 54.0            | 1.30           |
| 1500                   | 40.4         | 1.23           | -               | -              |
| 1610                   | 40.3         | 1.29           | 53.8            | 1.40           |
| 1640                   | 40.2         | 1.31           | -               | -              |
| 1750                   | 40.1         | 1.37           | -               | -              |
| 1800                   | 40           | 1.40           | 53.3            | 1.52           |
| 1900                   | 40           | 1.40           | 53.3            | 1.52           |
| 2000                   | 40           | 1.40           | 53.3            | 1.52           |
| 2100                   | 39.8         | 1.49           | -               | -              |
| 2300                   | 39.5         | 1.67           | -               | -              |
| 2450                   | 39.2         | 1.80           | 52.7            | 1.95           |
| 2600                   | 39           | 1.96           | -               | -              |
| 3000                   | 38.5         | 2.40           | 52.0            | 2.73           |
| 3500                   | 37.9         | 2.91           | -               | -              |
| 4000                   | 37.4         | 3.43           | -               | -              |
| 4500                   | 36.8         | 3.94           | -               | -              |
| 5000                   | 36.2         | 4.45           | 49.3            | 5.07           |
| 5100                   | 36.1         | 4.55           | 49.1            | 5.18           |
| 5200                   | 36.0         | 4.66           | 49.0            | 5.30           |
| 5300                   | 35.9         | 4.76           | 48.9            | 5.42           |
| 5400                   | 35.8         | 4.86           | 48.7            | 5.53           |
| 5500                   | 35.6         | 4.96           | 48.6            | 5.65           |
| 5600                   | 35.5         | 5.07           | 48.5            | 5.77           |
| 5700                   | 35.4         | 5.17           | 48.3            | 5.88           |
| 5800                   | 35.3         | 5.27           | 48.2            | 6.00           |
| 6000                   | 35.1         | 5.48           | -               | -              |

**NOTE:** For convenience, permittivity and conductivity values at some frequencies that are not part of the original data from Drossos et al. [B60] or the extension to 5800 MHz are provided (i.e., the values shown in italics). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6000 MHz that were linearly extrapolated from the values at 3000 MHz and 5800 MHz.



## 9.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

## 9.3. Reference Target SAR Values

The reference SAR values are obtained from the calibration certificate of system validation dipoles. The measured values are normalised to 1 Watt.

| System Dipole | Serial No. | Cal. Date   | Freq. (MHz) | Target SAR Values (mW/g) |       |       |
|---------------|------------|-------------|-------------|--------------------------|-------|-------|
|               |            |             |             | 1g/10g                   | Head  | Body  |
| D2450V2       | 725        | 08 Dec 2014 | 2450        | 1g                       | 50.80 | 49.90 |
|               |            |             |             | 10g                      | 23.70 | 23.20 |
| D5GHzV2       | 1016       | 24 Feb 2015 | 5250        | 1g                       | 79.00 | 76.00 |
|               |            |             |             | 10g                      | 22.70 | 21.20 |
|               |            |             | 5600        | 1g                       | 80.90 | 77.70 |
|               |            |             |             | 10g                      | 23.00 | 21.40 |
|               |            |             | 5750        | 1g                       | 35.40 | 74.40 |
|               |            |             |             | 10g                      | 5.22  | 20.50 |

## 9.4. Dielectric Property Measurements & System Check Results

The 1-g SAR and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target. The internal limit is set to 5%.

### SAR Lab 59

#### System Check 2450 Body

Date: 07/05/2015

Validation Dipole and Serial Number: D2450V2 SN: 725

| Simulant | Frequency (MHz) | Room Temp | Liquid Temp | Parameters   | Target Value | Measured Value | Deviation (%) | Limit (%) |
|----------|-----------------|-----------|-------------|--------------|--------------|----------------|---------------|-----------|
| Body     | 2450            | 23.0      | 24.0        | $\epsilon_r$ | 52.70        | 50.93          | -3.36         | 5.00      |
|          |                 |           |             | $\sigma$     | 1.95         | 2.01           | 2.96          | 5.00      |
|          |                 |           |             | 1g SAR       | 49.90        | 49.20          | -1.40         | 5.00      |
|          |                 |           |             | 10g SAR      | 23.20        | 22.76          | -1.90         | 5.00      |

### SAR Lab 61

#### System Check 5.25/5.6/5.75 GHz Body

Date: 05/05/2015

Validation Dipole and Serial Number: D1016V2 SN: 1016

| Simulant | Frequency (MHz) | Room Temp | Liquid Temp | Parameters   | Target Value | Measured Value | Deviation (%) | Limit (%) |
|----------|-----------------|-----------|-------------|--------------|--------------|----------------|---------------|-----------|
| Body     | 5250            | 24.0      | 23.0        | $\epsilon_r$ | 48.90        | 48.06          | -1.72         | 5.00      |
|          |                 |           |             | $\sigma$     | 5.36         | 5.44           | 5.36          | 5.00      |
|          |                 |           |             | 1g SAR       | 76.00        | 76.10          | 0.13          | 5.00      |
|          |                 |           |             | 10g SAR      | 21.20        | 21.20          | 0.00          | 5.00      |
| Body     | 5600            | 24.0      | 23.0        | $\epsilon_r$ | 48.50        | 47.17          | -2.74         | 5.00      |
|          |                 |           |             | $\sigma$     | 5.77         | 5.98           | 3.69          | 5.00      |
|          |                 |           |             | 1g SAR       | 77.70        | 80.30          | 3.35          | 5.00      |
|          |                 |           |             | 10g SAR      | 21.40        | 22.20          | 3.74          | 5.00      |
| Body     | 5750            | 24.0      | 23.0        | $\epsilon_r$ | 48.30        | 46.71          | -3.29         | 5.00      |
|          |                 |           |             | $\sigma$     | 5.94         | 6.19           | 4.22          | 5.00      |
|          |                 |           |             | 1g SAR       | 74.40        | 72.90          | -2.02         | 5.00      |
|          |                 |           |             | 10g SAR      | 20.50        | 20.20          | -1.46         | 5.00      |

## **10. Measurements, Examinations and Derived Results**

### **10.1. General Comments**

This section contains test results only.

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to section 5 for details of measurement uncertainties.

### 10.2. Specific Absorption Rate - Test Results – A1489

For All SAR measurement in this report the 1g-SAR limit tested to is 1.6 W/Kg

| Technology/Band | WORST CASE DETERMINED FROM ORIGINAL FCC SAR REPORT |        |                    |           |           |                 |                     |                                 | STANDALONE MEASUREMENTS (Host Device) |                             |                                       |            | Host Device + Sleeve        |                                       |            |                                 | Scan No. |
|-----------------|--|--------|--------------------|-----------|-----------|-----------------|---------------------|---------------------------------|---------------------------------------|-----------------------------|---------------------------------------|------------|-----------------------------|---------------------------------------|------------|---------------------------------|----------|
|                 | Test Configuration                                 |        | Mode               | Antenna   | Channel # | Frequency (MHz) | Tune up Power (dBm) | Highest 1g Reported. SAR (W/Kg) | Meas. power (dBm)                     | Highest 1g SAR Meas. (W/Kg) | Highest 1g SAR <u>Reported</u> (W/Kg) | Difference | Highest 1g SAR Meas. (W/Kg) | Highest 1g SAR <u>Reported</u> (W/Kg) | Difference | Final Result for Report (W/kg)* |          |
| WiFi 2.4 GHz    | Body   | Bottom | 802.11g CDD        | 2TX Ant 1 | 10        | 2457.0          | 16.50               | 1.170                           | 16.40                                 | 1.060                       | 1.085                                 | -7.3%      | 0.038                       | 0.051                                 | -95.6%     | 0.055                           | 1        |
| WiFi 5.2 GHz    | Body   | Bottom | 802.11 n HT40 SISO | 1TX Ant 2 | 46        | 5230.0          | 16.00               | 1.190                           | 15.80                                 | 0.832                       | 0.871                                 | -26.8%     | 0.128                       | 0.176                                 | -85.2%     | 0.241                           | 3        |
| WiFi 5.3 GHz    | Body   | Bottom | 802.11a CDD        | 2TX Ant 2 | 52        | 5260.0          | 16.00               | 1.150                           | 16.00                                 | 0.758                       | 0.758                                 | -34.1%     | 0.148                       | 0.193                                 | -83.2%     | 0.293                           | 4        |
| WiFi 5.5 GHz    | Body   | Bottom | 802.11a            | 1TX Ant 2 | 136       | 5680.0          | 15.50               | 0.873                           | 15.40                                 | 0.836                       | 0.855                                 | -2.0%      | 0.130                       | 0.163                                 | -81.4%     | 0.166                           | 5        |
| WiFi 5.8 GHz    | Body   | Bottom | 802.11a            | 1TX Ant 2 | 165       | 5825.0          | 15.50               | 1.110                           | 15.40                                 | 0.774                       | 0.792                                 | -28.6%     | 0.133                       | 0.176                                 | -84.2%     | 0.246                           | 6        |

**Note(s):**

\* Body testing in the original report was performed at 0mm.

\* Scaled 1g SAR Reported is calculated based on the following KDB inquiry response:

1. When the reported SAR of the test sample measured without accessory (sleeve) attached is equal to or higher than the reported SAR of the same test configuration in the original equipment certification filing, used the reported SAR of the test sample with accessory (sleeve) attached as the SAR result for the test configuration.

2. When the reported SAR of the test sample measured without accessory (sleeve) attached is lower than the reported SAR of the same test configuration in the original equipment certification filing, adjust the reported SAR of the test sample **with accessory (sleeve) attached** by the ratio of reported SAR in the original filing to the reported SAR of the test sample **without the accessory (sleeve) attached** as the SAR result for the test configuration.

3 Standalone SAR plots have been included for host device runs that were not within ±15% of the original report value. Please refer to section 12.7.

### 10.3. Bluetooth (Sleeve)

#### 10.3.1. Standalone SAR Test Exclusion Considerations

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ , for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

- $f_{(\text{GHz})}$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

#### Body-worn Accessory Exposure Conditions

| Max. tune-up tolerance limit |      | Min. test separation distance (mm) | Frequency (GHz) | Result |
|------------------------------|------|------------------------------------|-----------------|--------|
| (dBm)                        | (mW) |                                    |                 |        |
| 4.0                          | 2.5  | 10                                 | 2.40            | 0.39   |

#### Conclusion:

The computed value is < 3; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

#### 10.3.2. Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$  for test separation distances ≤ 50 mm; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

#### Estimated SAR Result for Body-worn Accessory Conditions:

| Test Configuration | Max. tune-up tolerance limit (mW) | Min. test separation distance (mm) | Frequency (GHz) | Estimated 1-g SAR (W/kg) |
|--------------------|-----------------------------------|------------------------------------|-----------------|--------------------------|
| Back/Front         | 2.5                               | 10                                 | 2.4             | 0.052                    |

## 11. Simultaneous Transmission Analysis

According to the worst case configuration Simultaneous transmission analysis of worst cases is shown in the tables below.

**Overall Worst Case:**

1. WPAN + WLAN 5.0 GHz

**A1489**

| Exposure Configuration | Combination under consideration | Technology Band  | Host Device with Sleeve attached |                 | Highest Reported Sum-1g-SAR (W/kg) | Sleeve | Simultaneous transmission SUM (W/kg) | SPLSR Ratio |
|------------------------|---------------------------------|------------------|----------------------------------|-----------------|------------------------------------|--------|--------------------------------------|-------------|
|                        |                                 |                  | Highest Reported 1g SAR (W/kg)   | Equipment Class |                                    |        |                                      |             |
| BODY-WORN              | WWAN + WPAN                     | Wi-Fi 5.3GHz     | 0.293                            | NII             | 0.294                              | 0.052  | 0.346                                | N/A         |
|                        |                                 | <i>Bluetooth</i> | 0.001                            | DSS             |                                    |        |                                      |             |

\* Bluetooth SAR results for Host Device with sleeve attached are taken from SAR Report **15U22277-S3**.