



Report Number: 12422341-E2V1  
Issue Date: 10/14/2019  
Product Name: Payment Terminal with an integrated smart, magnetic stripe, and contactless card reader with Bluetooth connectivity and barcode reader.  
Model Number: INFINEA TAB M

# **Electromagnetic Compatibility Test Report**

**For**

**DATECS Ltd.  
DEPARTMENT OF INNOVATIVE TECHNOLOGIES  
4 "Datecs" Str.  
1592 SOFIA, BULGARIA**

## Test Report Details

Tests Performed By: UL Verification Services  
47173 Benicia Street, Fremont, CA 94538

Tests Performed For: DATECS Ltd.  
DEPARTMENT OF INNOVATIVE TECHNOLOGIES  
4 "Datecs" Str.  
1592 SOFIA, BULGARIA

Issue Date: 10/14/2019

Product Name: Payment Terminal with an integrated smart, magnetic stripe, and contactless card reader with Bluetooth connectivity and barcode reader.

Model Number: INFINEA TAB M

Sample Serial Number: 1818900019

Product Standards: FCC 47 CFR PART 15 SUBPART B

Testing Start Date: September 28, 2018

Date Testing Complete: October 14, 2019

**Overall Results: Compliant**

UL LLC reports apply only to the specific samples tested under stated test conditions. All samples tested were in good operating condition throughout the entire test program. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. UL LLC shall have no liability for any deductions, inferences or generalizations drawn by the client or others from UL LLC issued reports. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

\*This report may contain test results that are not covered by the NVLAP or A2LA accreditation. The scope of accreditation is limited to the specific tests that are listed on the NVLAP and/or A2LA websites referenced at the end of this report.

## Report Directory

1.0	Summary .....	5
1.1	Deviations from standard test methods .....	5
1.2	Device Modifications Necessary for Compliance .....	5
1.3	Applicable Standards .....	5
1.4	Summary of Tests .....	6
2.0	CALIBRATION AND UNCERTAINTY .....	7
2.1	Measuring Instrument Calibration .....	7
2.2	Sample Calculation .....	7
2.3	Measurement Uncertainty .....	7
3.0	GENERAL - Product Description.....	9
3.1	Equipment Description .....	9
3.2	Equipment Marking Plate .....	9
3.3	Device Configuration During Test .....	10
3.3.1	Equipment Used During Test:.....	10
3.3.2	Input/Output Ports:.....	10
3.3.3	EUT Internal Operating Frequencies:.....	10
3.3.4	Power Interface:.....	10
3.3.5	Software and Firmware.....	11
3.4	Block Diagram:.....	11
3.5	EUT Configurations.....	12
3.6	Rational for EUT Configurations .....	12
4.0	APPLICABLE EMISSIONS LIMITS AND TEST RESULTS .....	13
4.1	Test Conditions and Results - MAINS TERMINAL - CONDUCTED EMISSIONS.....	14
4.2	Test Conditions and Results - RADIATED EMISSIONS.....	19
Appendix A	.....	27
	Facilities, Accreditations and Authorizations.....	27

**Report Revision History**

<b>Revision Date</b>	<b>Revision Version</b>	<b>Description</b>	<b>Revised By</b>	<b>Revision Reviewed By</b>
1/23/19	V1	Initial Issue		
10/14/19	V2	Report revised based on reviewer's comments.	Bobby Bayani	Dan Corona

**1.0 Summary**

The tests listed in the Summary of Testing section of this report have been performed and the results recorded by UL LLC in accordance with the procedures stated in each test requirement and specification. The applicant determined the list of tests performed were applicable to the Equipment Under Test. As a result, the subject product has been verified to comply or not comply as noted in the Summary of Testing with each test specification. The test results relate only to the items tested.

**1.1 Deviations from standard test methods**

None
------

**1.2 Device Modifications Necessary for Compliance**

None
------

**1.3 Applicable Standards**

Standard
FCC 47 CFR PART 15 SUBPART B

1.4 Summary of Tests

This product is considered Class B

Requirement – Test	Result (Compliant / Non-Compliant)
CONDUCTED EMISSIONS	Compliant
RADIATED EMISSIONS	Compliant

Reviewed By:

Prepared By:




---

Bobby Bayani  
Lead Project Engineer  
UL Verification Service Inc.

---

Guangliang Wu  
Laboratory Engineer  
UL Verification Services Inc.

Approved & Released For  
UL Verification Services Inc By:




---

Dan Corona  
Operations Leader  
UL Verification Service Inc.

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL.

**2.0 CALIBRATION AND UNCERTAINTY**

**2.1 Measuring Instrument Calibration**

All test equipment and test accessories are calibrated on a regular basis. The maximum time between calibrations is one year or the manufacturers' recommendation, whichever is less.

All test equipment calibrations are traceable to the National Institute of Standards and Technology (NIST); therefore, all test data recorded in this report is traceable to NIST.

**2.2 Sample Calculation**

**RADIATED EMISSIONS**

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

**MAINS CONDUCTED EMISSIONS**

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

$$36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$$

**2.3 Measurement Uncertainty**

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

PARAMETER	UNCERTAINTY	
	UL Verification Services	EMCE Engineering
Power Line Conducted Emission	3.65 dB	N/A
Radiated Emission, 30 to 1000 MHz	5.36 dB	± 4.98 dB
Radiated Emission, 1 to 6 GHz	4.32 dB	N/A

Uncertainty figures are valid to a confidence level of 95%.



**3.0 GENERAL - Product Description**

**3.1 Equipment Description**

Payment Terminal with an integrated smart, magnetic stripe, and contactless card reader with Bluetooth connectivity and barcode reader.

**3.2 Equipment Marking Plate**

Not Provided

**3.3 Device Configuration During Test**

Mode #	Description
1	Normal

**3.3.1 Equipment Used During Test:**

Use	Product Type	Manufacturer	Model	Comments
EUT	Magnetic Card Reader	Datecs LTD	INFINEA TAB M	None
AE	AC Adapter	Apple	A1265	Support Equipment

Note: EUT - Equipment Under Test, AE - Auxiliary/Associated Equipment, or SIM - Simulator (Not Subjected to Test)

**3.3.2 Input/Output Ports:**

Port #	Name	Type*	Cable Max. >3m (Y/N)	Cable Shielded (Y/N)	Comments
1	USB	DC	N	N	EUT to AC Adapter

\*Note:  
 AC = AC Power Port      DC = DC Power Port      N/E = Non-Electrical  
 I/O = Signal Input or Output Port (Not Involved in Process Control)  
 TP = Telecommunication Ports

**3.3.3 EUT Internal Operating Frequencies:**

Frequency (MHz)	Description
12.000MHz	Main CPU
32.768KHz	Main CPU
27.12MHz	NFC Chip
26.00MHz	Bluetooth IC

**3.3.4 Power Interface:**


Mode # /Rated	Voltage (V)	Current (A)	Power (W)	Frequency (DC/AC-Hz)	Phases (#)	Comments
Rated	5	-	-	DC	Single	Battery

**3.3.5 Software and Firmware**

The test utility software used during testing was IRETest.exe, rev. 2.0.3.

**3.4 Block Diagram:**

The diagram below illustrates the configuration of the equipment above.

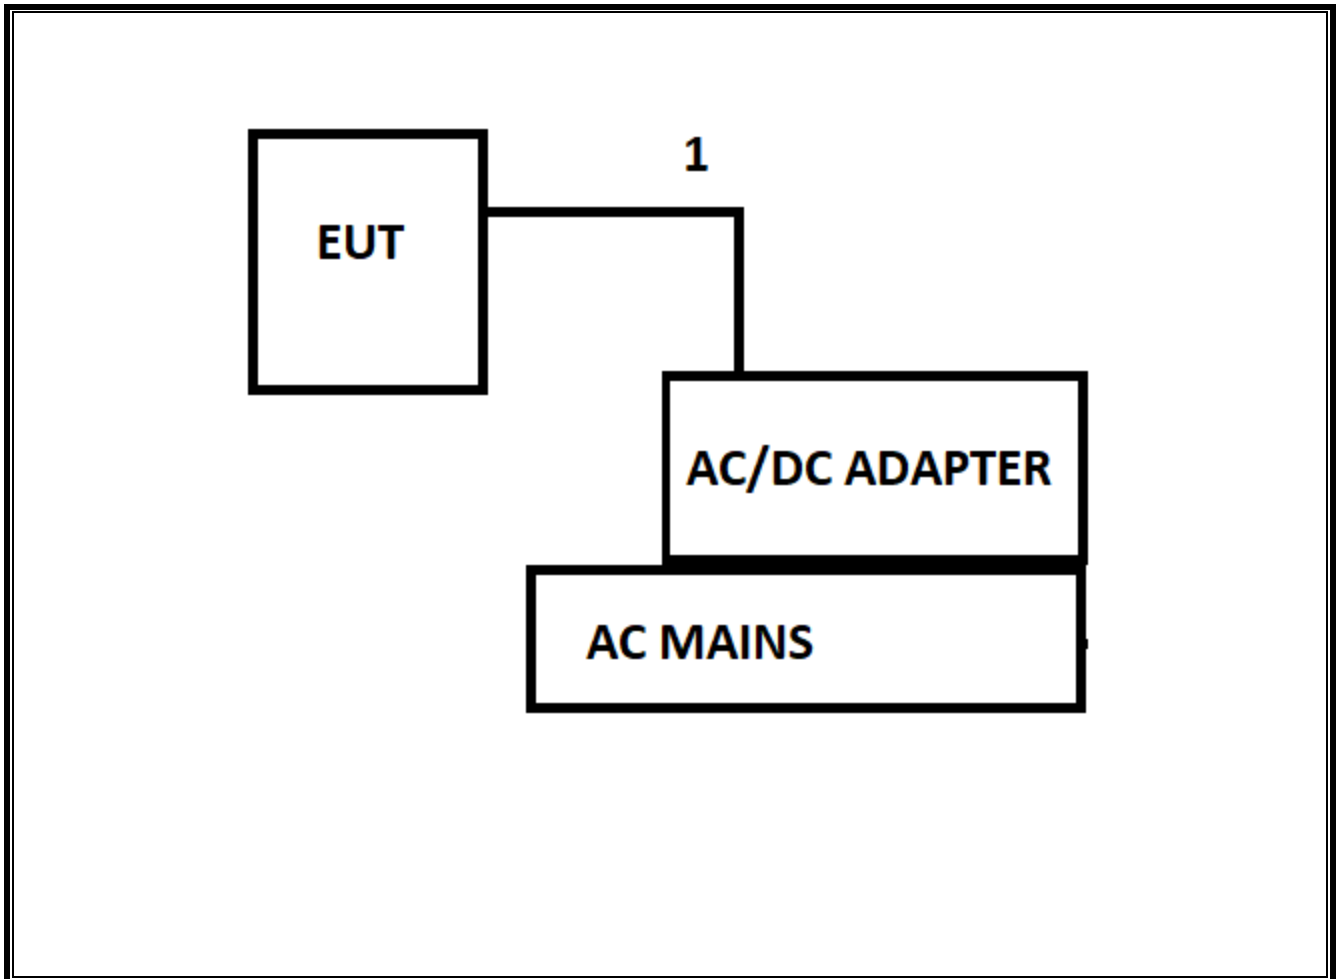

**3.5 EUT Configurations**

<b>Configuration #</b>	<b>Description</b>
1	The EUT was operated in normal condition.

**3.6 Rational for EUT Configurations**

<b>Configuration #</b>	<b>Description</b>
1	The selected EUT configuration was chosen to maximize emissions

**4.0 APPLICABLE EMISSIONS LIMITS AND TEST RESULTS**

The emissions tests were performed according to following regulations:

----- United States -----

Code of Federal Regulations Title 47	Part 15, Subpart B, Radio Frequency Devices – Unintentional Radiators
--------------------------------------	---

----- International -----

EMC Directive:	EMC - 2014/30/EU (OJ C 293 of 2014-04-12)
----------------	---

Unless specified otherwise in the individual Methods, the tests shall be conducted under the following ambient conditions. Confirmation of these conditions shall be verified at the time the test is conducted.

Ambient Temperature, °C	22.5 ± 2.5	Relative Humidity, %	45 ± 15	Barometric Pressure, mBar	950 ± 150
-------------------------	------------	----------------------	---------	---------------------------	-----------

**4.1 Test Conditions and Results - MAINS TERMINAL - CONDUCTED EMISSIONS**

Test Description	Measurements were made on a ground plane. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on mains lines were made at the output of the AMN.	
Standards	FCC Part 15 Subpart B	
Test Engineer	12981 KW	
	Frequency range on each side of line	Measurement Point
Fully configured sample scanned over the following frequency range	150kHz to 30MHz	Mains
<b>Limits - Class A</b>		
Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	79	66
0.5-30	73	60
<b>Limits - Class B</b>		
Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50
Supplementary information: None		

**Conducted Emissions EUT Configuration Settings**


Power Interface Mode #	EUT Configurations Mode #	EUT Operation Mode #
Rated	1	1
Supplementary information: None		

**Conducted Emissions Test Equipment**


Test Equipment List					
Description	Manufacturer	Model	Local ID (T No.)	Cal Date	Cal Due
EMI Test Receiver	Rohde&Schwarz	ESR26	PRE0176493	2/21/2018	2/21/2019
Signal Condition Unit	Schaffner	CCN1000-1	133	8/08/2018	8/08/2019
AC Power source	Schaffner	NSG1007	134	8/08/2018	8/08/2019
L.I.S.N	FCC INC.	FCC LISN 50/250	1310	6/15/2018	6/15/2019

Results – 120 V, 60 Hz

Conducted Emissions Graph

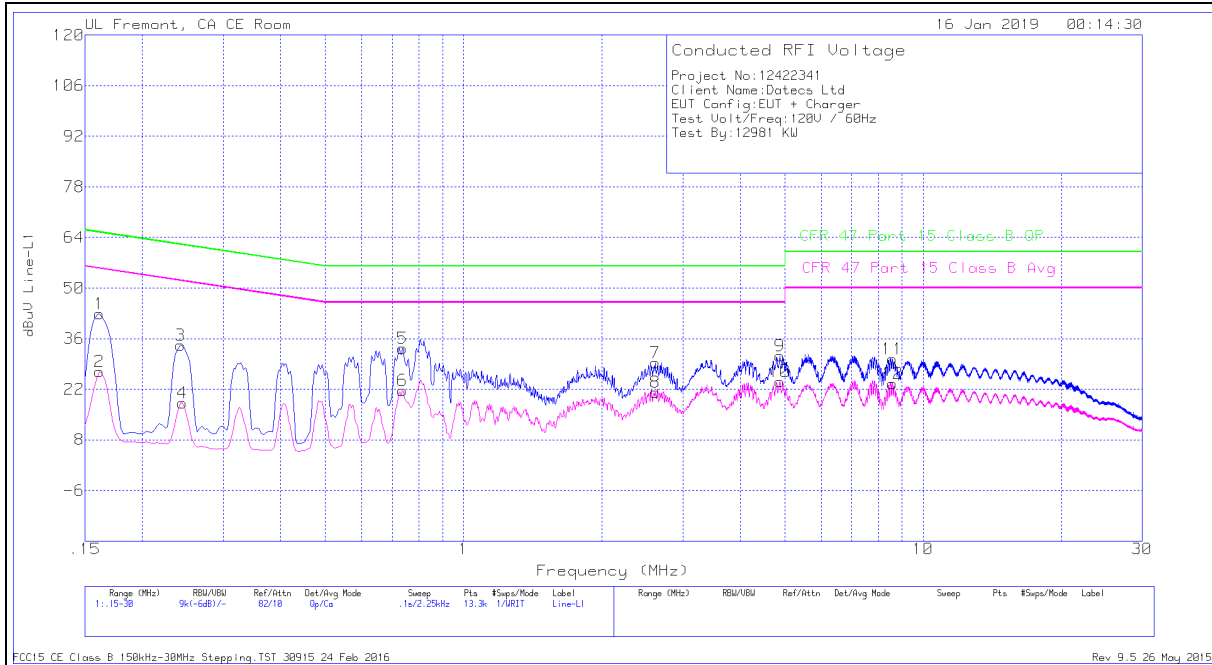

Line 1

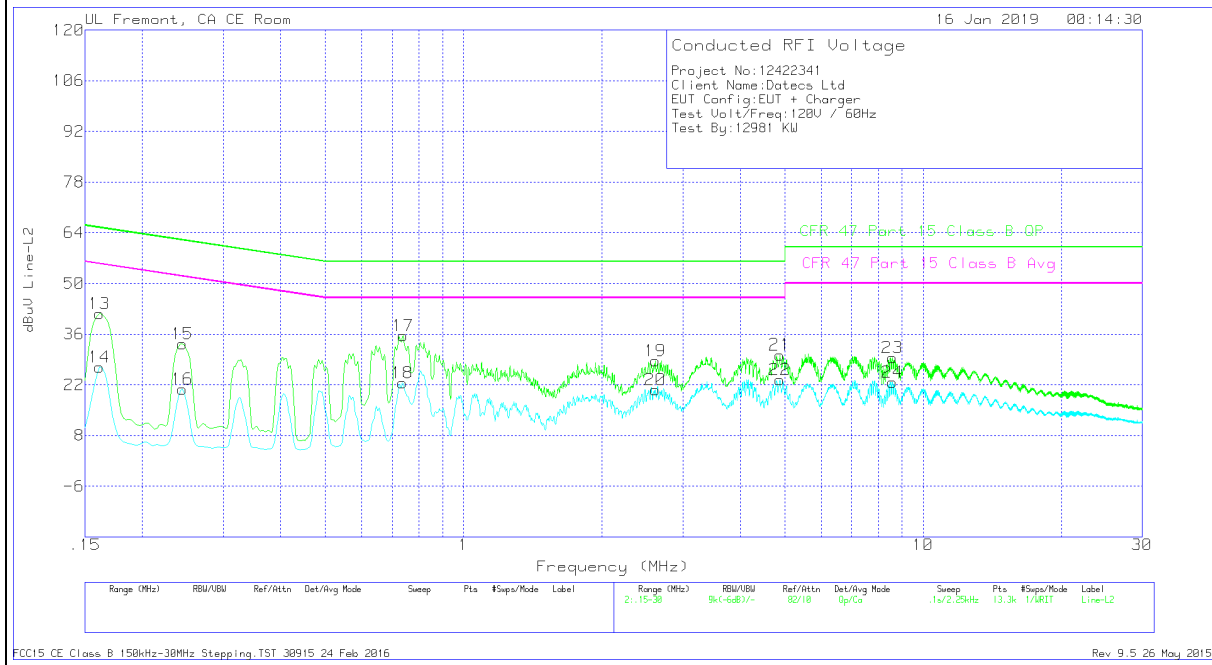

Line 2



**Conducted Emissions Data Points**

**Line-L1 .15 - 30MHz**

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.16125	32.66	Qp	.1	0	10.1	42.86	65.4	-22.54	-	-
2	.16125	16.75	Ca	.1	0	10.1	26.95	-	-	55.4	-28.45
3	.24225	24.06	Qp	0	0	10.1	34.16	62.02	-27.86	-	-
4	.2445	8.08	Ca	0	0	10.1	18.18	-	-	51.94	-33.76
5	.73725	23.15	Qp	0	0	10.1	33.25	56	-22.75	-	-
6	.73725	11.6	Ca	0	0	10.1	21.7	-	-	46	-24.3
7	2.61375	19.04	Qp	0	.1	10.1	29.24	56	-26.76	-	-
8	2.61375	11	Ca	0	.1	10.1	21.2	-	-	46	-24.8
9	4.88175	20.97	Qp	0	.1	10.1	31.17	56	-24.83	-	-
10	4.8795	13.98	Ca	0	.1	10.1	24.18	-	-	46	-21.82
11	8.5695	20.01	Qp	0	.2	10.2	30.41	60	-29.59	-	-
12	8.5695	13.18	Ca	0	.2	10.2	23.58	-	-	50	-26.42

Qp - Quasi-Peak detector

Ca - CISPR average detection

**Line-L2 .15 - 30MHz**

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.16125	31.44	Qp	.1	0	10.1	41.64	65.4	-23.76	-	-
14	.16125	16.72	Ca	.1	0	10.1	26.92	-	-	55.4	-28.48
15	.2445	23.29	Qp	0	0	10.1	33.39	61.94	-28.55	-	-
16	.2445	10.66	Ca	0	0	10.1	20.76	-	-	51.94	-31.18
17	.7395	25.45	Qp	0	0	10.1	35.55	56	-20.45	-	-
18	.73725	12.51	Ca	0	0	10.1	22.61	-	-	46	-23.39
19	2.61375	18.47	Qp	0	.1	10.1	28.67	56	-27.33	-	-
20	2.61263	10.39	Ca	0	.1	10.1	20.59	-	-	46	-25.41
21	4.88175	20.07	Qp	0	.1	10.1	30.27	56	-25.73	-	-
22	4.88063	13.13	Ca	0	.1	10.1	23.33	-	-	46	-22.67
23	8.5695	19.01	Qp	0	.2	10.2	29.41	60	-30.59	-	-
24	8.5695	12.28	Ca	0	.2	10.2	22.68	-	-	50	-27.32

Qp - Quasi-Peak detector

Ca - CISPR average detection

**4.2 Test Conditions and Results - RADIATED EMISSIONS**

Test Description	Measurements were made in a 3-meter/10-meter semi-anechoic chamber that complies to CISPR 16/ANSI C63.4. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3 meter/10-meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in both horizontal and vertical polarities. Final measurements (quasi-peak or average as noted) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4-meters. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable.	
Standards	FCC Part 15 Subpart B	
Test Engineer	19497 AF	
	Frequency range	Measurement Point
Fully configured sample scanned over the following frequency range	30MHz – 40 GHz	(3 meter/10 meter measurement distance)
<b>Limits - Class B</b>		
Frequency (MHz)	Limit (dBµV/m)	
<b>CISPR Limits for radiated disturbance of Class B ITE at measuring distance of 10 m</b>		
	Quasi-Peak	Average
30-230	30	NA
230-1000	37	NA
<b>FCC Limits for radiated disturbance of Class B ITE at measuring distance of 3 m</b>		
30-88	40	NA
88-216	43.5	NA
216-960	46	NA
Above 960	54	NA
	Peak	Average
Above 1 GHz	74	54
<b>CISPR Limits for radiated disturbance of Class B ITE at measuring distance of 3 m</b>		
	Peak	Average
1000-3000	70	50
3000-6000	74	54
Supplementary information: None		

**Radiated Emissions EUT Configuration Settings**

Power Interface Mode #	EUT Configurations Mode #	EUT Operation Mode #
Rated	1	1
Supplementary information: None		

**Radiated Emissions Test Equipment****Test Date: 9/28/2018 – 1/16/2019**

Test Equipment List					
TEST EQUIPMENT LIST	Manufacturer	Model	Local ID (T No.)	Cal Due	Last Cal
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences Corp.	JB1	T130	10/16/2019	10/16/2018
Semianechoic Chamber A	TDK RF SOLUTIONS INC.	N/A	T1199	6/12/2019	6/12/2018
Spectrum Analyzer	Agilent (Keysight) Technologies	N9030A	T818	6/12/2019	6/12/2018
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1466	04/16/2019	04/16/2018
Amplifier, 100KHz to 1GHz, 32dB	Agilent (Keysight) Technologies	8447D	T15	10/16/2019	10/16/2018


**Test Date: 10/14/2019**

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
RF Amplifier, 1-18GHz	MITEQ	AFS42-00101800-25-S-42	171460	8/1/2019	8/1/2019
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T862	5/24/2019	5/24/2019
Semianechoic Chamber I	TDK RF SOLUTIONS INC.	N/A			
EMI TEST RECEIVER	Rohde & Schwarz	ESW	PRE0179376	2/14/2020	2/14/2019


UL SOFTWARE			
Radiated Software	UL	UL EMC	Ver 9.5, Sept 7, 2019

**RADIATED EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)**

**Radiated Emissions Graph**

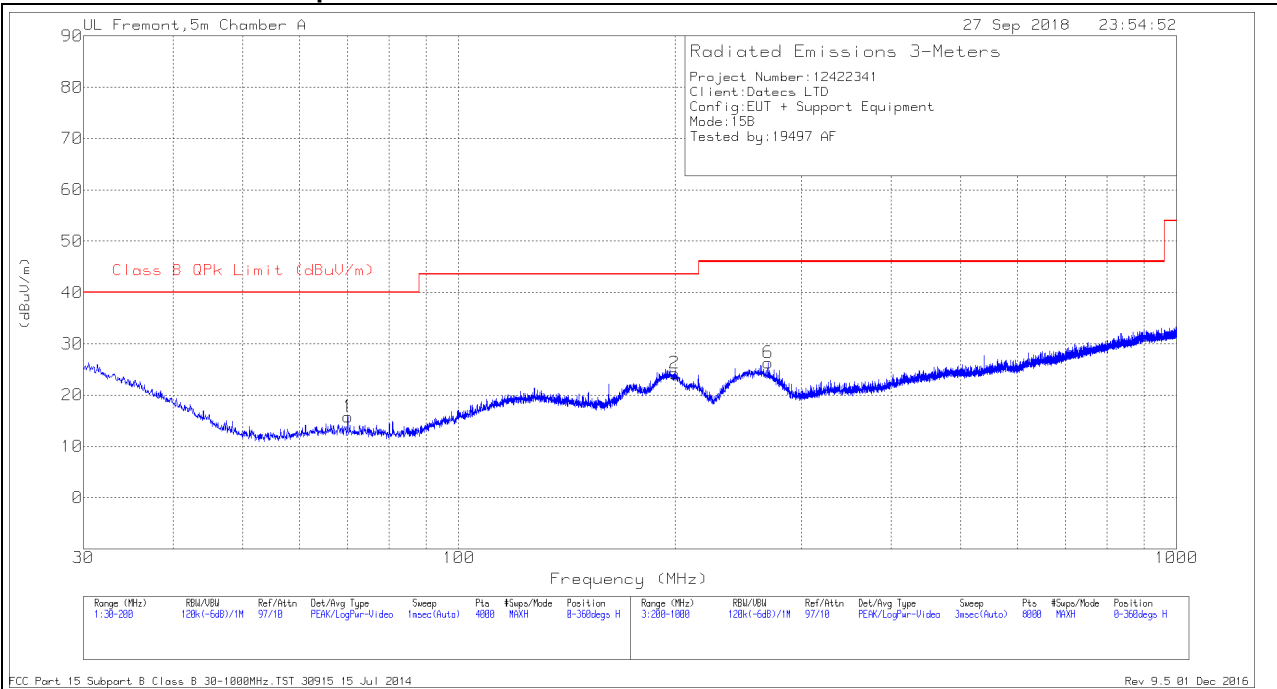

**HORIZONTAL**

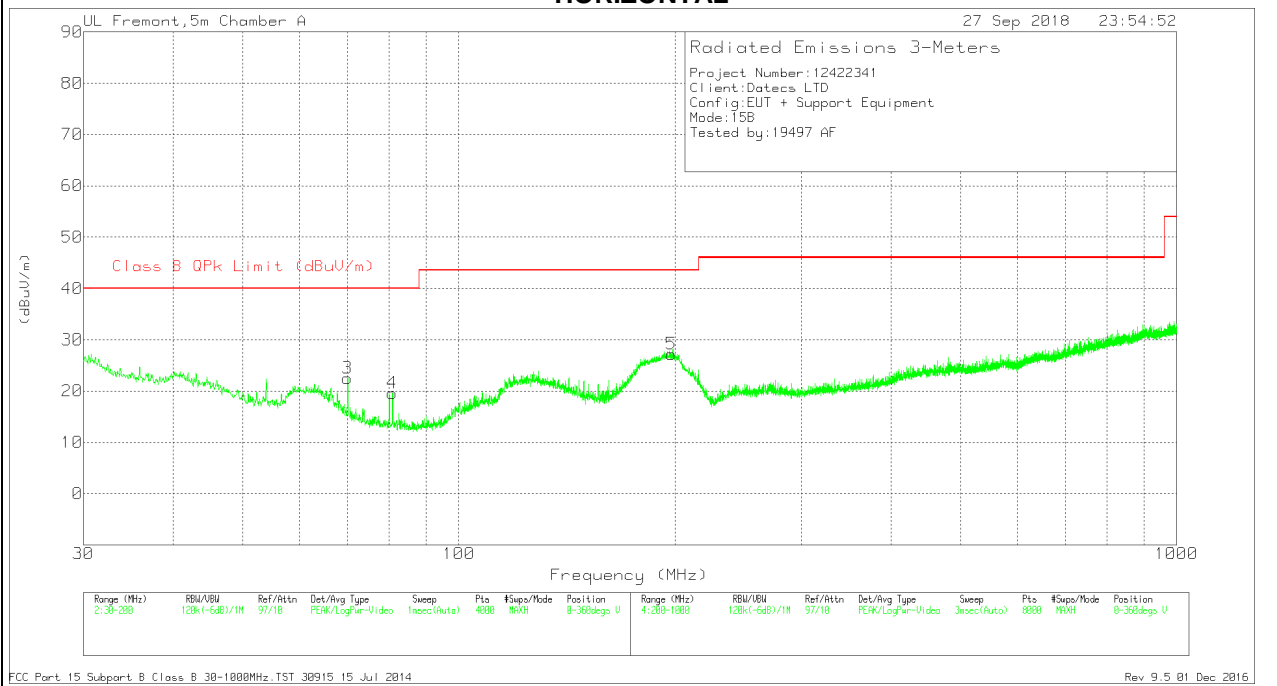

**VERTICAL PLOTS**

**Radiated Emissions Data Points**

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AFT130 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	Class B QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	70.0029	37.09	Pk	12.1	-26.7	22.49	40	-17.51	78	135	V
1	70.0454	30.38	Pk	12.1	-26.7	15.78	40	-24.22	132	165	H
4	80.8432	34.78	Pk	11.4	-26.6	19.58	40	-20.42	46	251	V
5	197.7909	36.22	Pk	16.3	-25.3	27.22	43.52	-16.3	97	152	V
2	199.9165	33.09	Pk	16.5	-25.3	24.29	43.52	-19.23	263	191	H
6	269.509	33.85	Pk	17.2	-24.7	26.35	46.02	-19.67	177	223	H

Pk - Peak detector


Qp - Quasi-Peak detector

**RADIATED EMISSIONS 1000 TO 18,000 MHz - FCC**

**Radiated Emissions Graph**

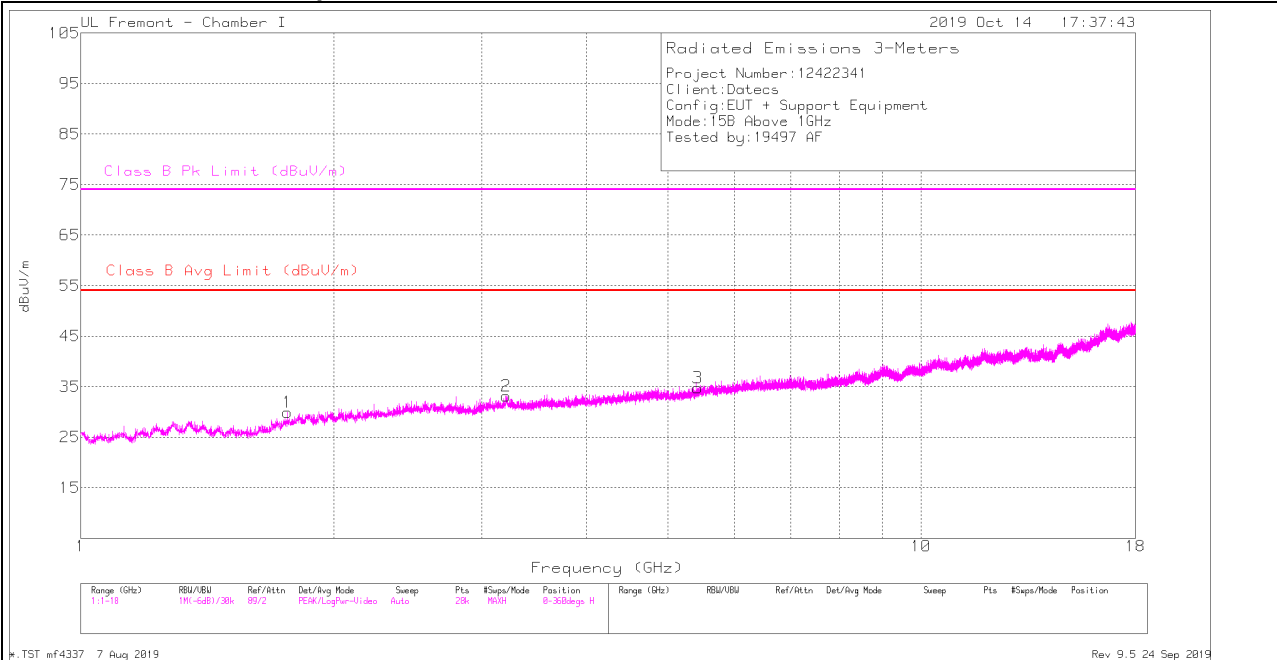

**HORIZONTAL**

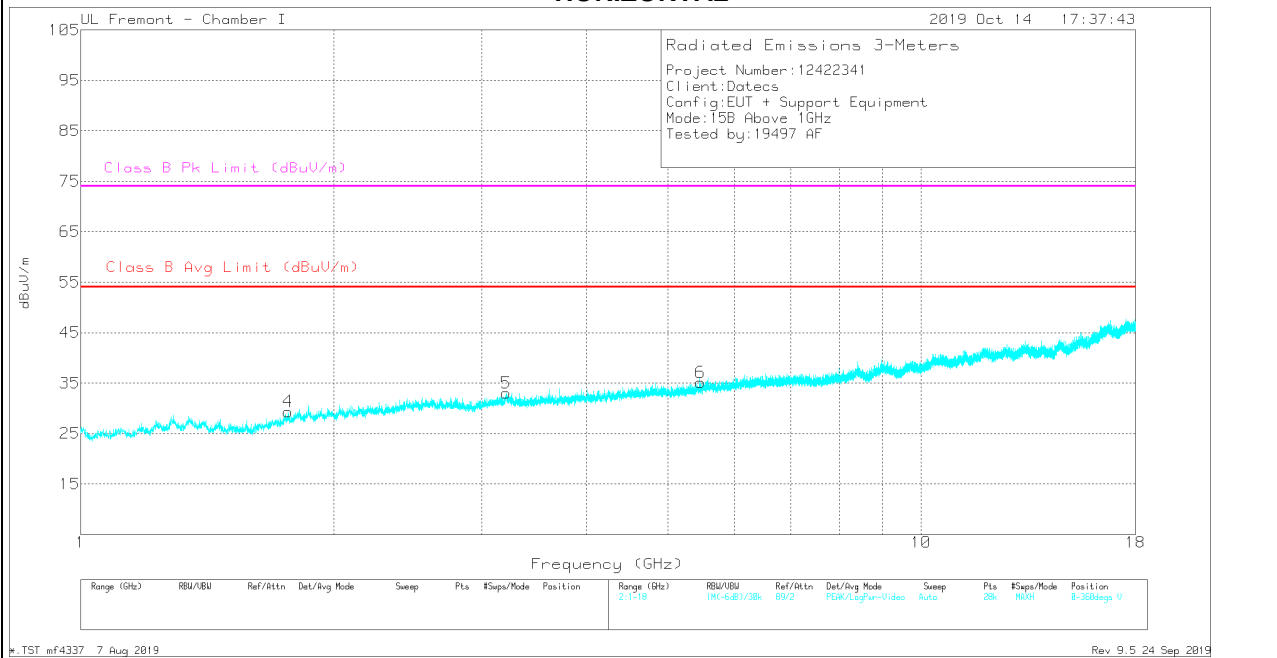

**VERTICAL PLOTS**

**Radiated Emissions Data Points**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	Corrected Reading dBuV/m	Class B Avg Limit (dBuV/m)	Margin (dB)	Class B Pk Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.76257	31.54	Avg	30	-31.6	29.94	54	-24.06	-	-	0-360	98	H
2	3.21121	28.42	Avg	33.6	-28.9	33.12	54	-20.88	-	-	0-360	199	H
3	5.42304	26.58	Avg	34.8	-26.6	34.78	54	-19.22	-	-	0-360	98	H
4	1.76621	30.86	Avg	30.1	-31.6	29.36	54	-24.64	-	-	0-360	101	V
5	3.20757	28.44	Avg	33.5	-28.9	33.04	54	-20.96	-	-	0-360	199	V
6	5.46857	26.53	Avg	34.9	-26.3	35.13	54	-18.87	-	-	0-360	101	V

Avg - Video bandwidth < Resolution bandwidth

**Radiated Emissions**

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl (dB)	Corrected Reading dBuV/m	Class B Avg Limit (dBuV/m)	Margin (dB)	Class B Pk Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.76285	39.15	Pk	30	-31.6	37.55	-	-	74	-36.45	303	368	H
1.76285	26.44	Av	30	-31.6	24.84	54	-29.16	-	-	303	368	H
3.2133	24.27	Av	33.6	-28.9	28.97	54	-25.03	-	-	108	383	H
5.42376	22.12	Av	34.8	-26.6	30.32	54	-23.68	-	-	194	220	H
3.21124	37.67	Pk	33.6	-28.9	42.37	-	-	74	-31.63	108	382	H
5.42104	27.41	Pk	34.8	-26.5	35.71	-	-	74	-38.29	194	221	H
1.76557	40.12	Pk	30	-31.6	38.52	-	-	74	-35.48	94	257	V
1.76557	26.37	Av	30	-31.6	24.77	54	-29.23	-	-	94	257	V
3.20581	38.16	Pk	33.4	-28.9	42.66	-	-	74	-31.34	208	158	V
3.20581	24.27	Av	33.4	-28.9	28.77	54	-25.23	-	-	208	158	V
5.46951	36.28	Pk	34.9	-26.4	44.78	-	-	74	-29.22	18	175	V
5.46951	22.22	Av	34.9	-26.4	30.72	54	-23.28	-	-	18	175	V

Pk - Peak detector

Av - Average detection

**Appendix A****Facilities, Accreditations and Authorizations**

NVLAP Lab code: 200065-0

NVLAP: The National Institute of Standards and Technology (NIST) administers the National Voluntary Laboratory Accreditation Program (NVLAP). NVLAP is comprised of laboratory accreditation programs (LAPs) which are established on the basis of requests and demonstrated need. Each LAP includes specific calibration and/or test standards and related methods and protocols assembled to satisfy the unique needs for accreditation in a field of testing or calibration. NVLAP accredits public and private laboratories based on evaluation of their technical qualifications and competence to carry out specific calibrations or tests. Accreditation criteria are established in accordance with the U.S. Code of Federal Regulations (CFR, Title 15, Part 285), NVLAP Procedures and General Requirements, and encompass the requirements of ISO/IEC 17025. For a full scope listing see <http://ts.nist.gov/standards/scopes/1004140.htm>



FCC: Details of the measurement facilities used for these tests have been filed with the Federal Communications Commission's Laboratory in Columbia, Maryland (Ref. No. 91044).



Industry Canada Industrie Canada

Industry of Canada: Accredited by Industry Canada for performance of radiated measurements. Our test site complies with RSP 100, Issue 7, Section 3.3. File #: IC 2180



VCCI: Accepted as an Associate Member to the VCCI. The measurement facilities detailed in this test report have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. Registration Nos.: Radiated Emissions R-621, Conducted Emissions C-642.





ICASA: ICASA (Independent Communications Authority of South Africa) has appointed UL as a Designated Test Laboratory to test Telecommunications equipment for type approval in compliance with CISPR 22 to assist in fulfilling its mandate under section 54(1) of the Telecommunications Act, 1996 (Act 103 of 1996).

NIST/CAB: Validated by the European Commission as a U.S. Conformity Assessment Body (CAB) of the U.S.-EU



Mutual Recognition Agreement (MRA) for the Electromagnetic Compatibility - Council Directive 2004/108/EC, Annex III (2-3). Also validated for the Telecommunication Equipment-Council Directive 99/5/EC, Annex III and IV, Identification Number: 0983.

NIST/CAB: Provisioned to act as a U.S. Conformity Assessment Body (CAB) under Appendix B, Phase I Procedures, of the Asia Pacific Economic Cooperation (APEC) MRA between the American Institute in Taiwan (AIT) and the United States. Our laboratory is considered qualified to test equipment subject to the applicable EMC regulations of the Chinese Taipei Bureau of Standards, Metrology and Inspection (BSMI) which require testing to CNS 13438 (CISPR 22).

NIST/CAB: Recognized by the Infocomm Development Authority of Singapore (IDA) under the Asia Pacific Economic Cooperation Mutual Recognition Agreement (APEC MRA). Our laboratory is provisionally designated to act as a Conformity Assessment Body (CAB) under Appendix B, Phase I Procedures, of the APEC MRA. Our scope of designation includes IDA TS EMC (CISPR 22), IEC 61000-4-2, -4-3, -4-4, -4-5, and -4-6

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd
<input checked="" type="checkbox"/> Chamber A (ISED:2324B-1)	<input type="checkbox"/> Chamber D (ISED:22541-1)	<input checked="" type="checkbox"/> Chamber I (ISED:2324A-5)
<input type="checkbox"/> Chamber B (ISED:2324B-2)	<input type="checkbox"/> Chamber E (ISED:22541-2)	<input type="checkbox"/> Chamber J (ISED:2324A-6)
<input type="checkbox"/> Chamber C (ISED:2324B-3)	<input type="checkbox"/> Chamber F (ISED:22541-3)	<input type="checkbox"/> Chamber K (ISED:2324A-1)
	<input type="checkbox"/> Chamber G (ISED:22541-4)	<input type="checkbox"/> Chamber L (ISED:2324A-3)
	<input type="checkbox"/> Chamber H (ISED:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

**END OF TEST REPORT**