



LCIE

TEST REPORT

Number
Composition of document

RADIO

112624-622708-K-Cr2012-10-22
45 pages

Standards

ETSI EN 301 839-1 V1.2.1
ETSI EN 301 839-2 V1.3.1
FCC RULES PART 95I
FCC RULES PART 15
FCC RYLES PART 2
IC RADIO STANDARDS RSS-243
Specified low-power radio equipment (Item 8 of Article 2 Paragraph 1 of Certification Ordinance)

Issued to

SORIN CRM
Parc d'affaires NOVEOS
4, Avenue Réaumur
92140 Clamart Cedex , FRANCE

Mme DE JESO

Apparatus under test

Trade mark
Manufacturer
Type
Serial number

Syndeli RF implantable cardioverter defibrillator
SORIN Group
SORIN BIOMEDICA CRM
PARADYM RF — DR model 9550
148YX02B

Test date

2012/03/21 and 2012/03/26 to 2012/03/30

Tests performed by

Stéphane PHOUDIAH & Laurent DENEUX

Test site

Fontenay Aux Roses & Ecuelles

File issued on

2012/10/22

File corrected on

2012/10/22

File initially issued on

2012/04/18

Written by :
Stéphane PHOUDIAH & Laurent DENEUX
Tests operator

Approved by :
Marc CANCOUET
Technical manager

This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the item tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measures.

LCIE
Laboratoire Central
des Industries Electriques
Une société de Bureau Veritas

33, av du Général Leclerc
BP 8
92266 Fontenay-aux-Roses cedex
France

Tél : +33 1 40 95 60 60
Fax : +33 1 40 95 86 56
contact@lcie.fr
www.lcie.fr

Société par Actions Simplifiée
au capital de 15 745 984 €
RCS Nanterre B 408 363 174



SUMMARY

1.	TEST PROGRAM	3
2.	EQUIPMENT DESCRIPTION.....	5
3.	FREQUENCY ERROR & FREQUENCY STABILITY.....	8
4.	EFFECTIVE RADIATED POWER, MAXIMUM TRANSMITTER POWER & ANTENNA POWER	9
5.	EMISSION BANDWIDTH & OCCUPIED BANDWIDTH.....	10
6.	SPURIOUS EMISSIONS OF TRANSMITTER & TOLERANCE OF UNWANTED EMISSION INTENSITY.....	11
7.	UNWANTED RADIATION	14
8.	RECEIVER SPURIOUS RADIATION & SECONDARY RADIATED EMISSION	17
9.	RADIATION EMISSIONS.....	20
10.	TEST EQUIPMENT LIST	22
11.	UNCERTAINTIES CHART	23
12.	ANNEX 1 (GRAPHS)	24
13.	ANNEX 2 (FLUID DATA SHEET MSL 450).....	43



1. TEST PROGRAM

References

Standards : ETSI EN 301 839-1 V1.3.1
 ETSI EN 301 839-2 V1.2.1
 ERC Recommendation 70-03
 FCC RULES PART 95I
 FCC RULES PART 15
 FCC RULES PART 2
 IC RADIO STANDARDS RSS-243
 Specified low-power radio equipment (Item 8 of Article 2 Paragraph 1 of Certification Ordinance)

Transmitter requirement:

Clause (ETSI EN 301 839–1) Clause (FCC PART 95I) Clause (RSS 243) Clause (Specified low-power radio equipment (Item 8 of Article 2 Paragraph 1 of Certification Ordinance)) Test Description	TEST RESULT - Comments
EN § 8.1 – Frequency error FCC § 95.627 (e) – Frequency stability FCC § 2.1055 – Measurements required: Frequency stability RSS § 3.3 – Frequency stability Specified low-power radio equipment (Item 8 of Article 2 Paragraph 1 of Certification Ordinance) –Tolerance of frequency	PASS PASS PASS PASS PASS
EN § 8.3 – Effective radiated power of the fundamental emission FCC § 95.639 (f) – Maximum transmitter power FCC § 2.1046 – Measurements required: RF power output RSS § 5.4 – Maximum transmitter power Specified low-power radio equipment (Item 8 of Article 2 Paragraph 1 of Certification Ordinance) – Antenna gain	PASS PASS PASS PASS PASS
EN § 8.2 – Emission bandwidth FCC § 95.633 (e) – Emission bandwidth FCC § 2.1049 – Measurements required: Occupied bandwidth RSS § 3.2 – Occupied bandwidth Specified low-power radio equipment (Item 8 of Article 2 Paragraph 1 of Certification Ordinance) – Tolerance of occupied bandwidth	PASS PASS PASS PASS PASS
EN § 8.5 – Frequency stability under low voltage conditions	N/A (EUT hermetically sealed: See last paragraph in clause 5.2.2 of ETSI EN 301 839-1 V1.3.1)
EN § 8.4 – Spurious emissions of transmitter Specified low-power radio equipment (Item 8 of Article 2 Paragraph 1 of Certification Ordinance) – Tolerance of unwanted emission intensity	PASS PASS
FCC § 95.635 (d) – Unwanted radiation FCC § 2.1053 – Measurements required: Field strength of spurious radiation RSS § 3.4 – Unwanted radiation Specified low-power radio equipment (Item 8 of Article 2 Paragraph 1 of Certification Ordinance) – Limit of secondary radiated emission	PASS PASS PASS PASS
15.207 – Conducted emission	N/A (Equipment powered by battery)
FCC § 2.1047 – Measurements required: Modulation characteristics	PASS (please refer to §2.1 Equipment information p.5)
FCC § 2.1057 – Frequency spectrum to be investigated	PASS (see §2.1 Equipment information p.5)



Receiver requirement:

Clause (ETSI EN 301 839-1) Clause (FCC PART 15) (only for 400MHz receiver) Clause (FCC PART 95I) Clause (RSS 243-243) Test Description	TEST RESULT - Comments
EN § 9.1 – Spurious radiation of receivers	PASS
FCC § 15.109 – Radiated emissions	PASS
RSS § 3.5 – Radiated emissions	PASS
EN § 10.1 – Monitoring system threshold power level	N/A
FCC § 95.627 (a)(3) – Monitoring system threshold power level	N/A
RSS § 5.7.1 – Monitoring system threshold power level	N/A
EN § 10.2 – Monitoring system bandwidth	N/A
FCC § 95.627 (a)(1) – Monitoring system bandwidth	N/A
RSS § 5.7.2 – Monitoring system bandwidth	N/A
EN § 10.3.1.1 & 10.3.3.1 – Scan cycle time	N/A
FCC § 95.627 (a)(2) – Scan cycle time	N/A
RSS § 5.7.3 – Scan cycle time	N/A
EN § 10.3.1.2 & 10.3.3.2 – Minimum channel monitoring period	N/A
FCC § 95.627 (a)(2) – Minimum channel monitoring period	N/A
RSS § 5.7.4 – Minimum channel monitoring period	N/A
EN § 10.4 – Channel access	N/A
FCC § 95.627 (a)(4) – Channel access	N/A
RSS § 5.7.5 – Channel access	N/A
EN § 10.5 – Discontinuation of MICS session	N/A
95.627 (a)(4) – Discontinuation of MICS session	N/A
RSS § 5.7.6 – Discontinuation of MICS session	N/A
Specified low-power radio equipment (Item 8 of Article 2 Paragraph 1 of Certification Ordinance) – Transmission suspension function due to interruption of communications	N/A
EN § 10.6 – Use of pre-scanned alternate channel	N/A
FCC § 95.627 (a)(5) – Use of pre-scanned alternate channel	N/A
RSS § 5.7.7 – Use of pre-scanned alternate channel	N/A

PASS: EUT complies with standard's requirement
 FAIL: EUT does not comply with standard's requirement
 N/A: Not Applicable
 N/P: Test Not Performed

Remark: The equipment is: - transmitter and receiver at 400MHz
 - only receiver at 2400 MHz.

2. EQUIPMENT DESCRIPTION

2.1. HARDWARE IDENTIFICATION

Equipment under test (EUT):



The EUT is housed in a single cabinet that cannot be readily opened because the enclosure is hermetically sealed.

Auxiliary equipment used for testing:

- Human torso simulator
- Fluid corresponding to human tissue characteristics at that frequency.
- Lead IS-1 LV
- Lead IS-1 RV
- Lead DF-1 SVC
- Lead DF-1 RV

Equipment information:

- External antenna connector: No
- Frequency band allocated: 402MHz to 405MHz
- Frequency used for test:
 - Fmin: 402,15MHz
 - Fnom: 403,65MHz
 - Fmax: 404,85MHz
- Modulation: 2 FSK
- Data rate: 200kb/s
- Number of channel: 10
- Antenna type: Integral
- Equipment intended for use as a mobile station
- Equipment designed for continuous operation
- Stand By mode: No
- Extreme temperature range:
 - Tmin: 25°C
 - Tnom: 37°C
 - Tmax: 45°C
- Source voltage:
 - Vnom: BOL: 3.25 V. ERI: 2.66 V. EOL: 2.5 V (Internal Battery)

2.2. RUNNING MODE


The EUT is set in the following modes during tests:

- Permanent emission with modulation
- Permanent emission without modulation
- Permanent reception

2.3. EQUIPEMENT SET UP AND TESTING CONFIGURATION

Equipment (ULP-AMIs) intended to be implanted in a human body shall be tested in a simulated man constructed as follows in order to simulate operation of the ULP-AMI under actual operation conditions as shown in figure A.2 of EN 301 489-1.


An appropriate simulator for testing ULP-AMI consists of a cylindrical acrylic container with an outside diameter of 300 mm, a sidewall thickness of 6 mm, and a fluid-filled height of 760 mm. It shall be filled with a material that is sufficiently fluid that it will flow around the AIMD without any voids. The dielectric and conductivity properties of this material shall match the dielectric and conductivity properties of human muscle tissue at 403,5 MHz (conductivity = 0,93 and relative permittivity = 57,2). Simple saline solutions do not meet the dielectric and conductivity requirements for use as a substitute for human tissue. All emissions measurements will be made using the above specification with the tissue substitute material at a nominal temperature between 22 °C and 38 °C.

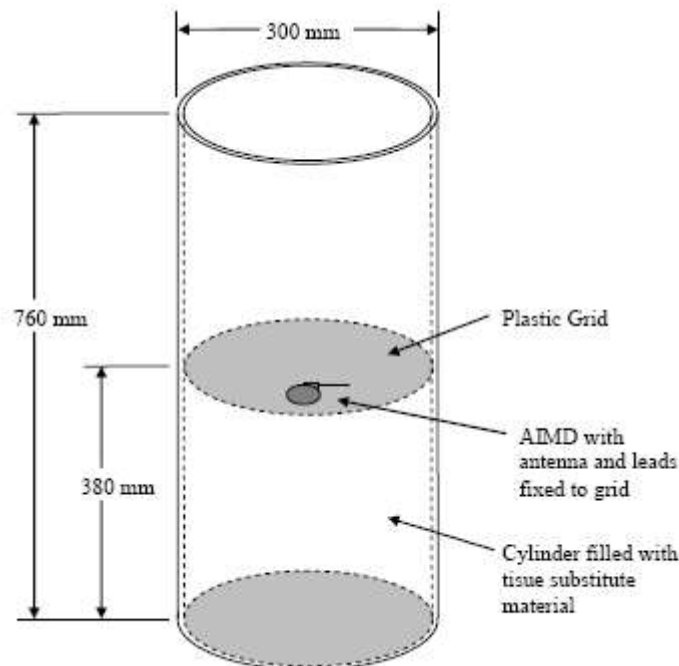

For the testing, the equipment under test (EUT) was suspended in a Plexiglas torso simulator as specified above. The simulator used was constructed in accordance with FCC 95.627(g)(3)(i), EN 301 839-1 (A.113) and EN 301 489-27 annex B.

During the test, the EUT was centred vertically in Plexiglas cylinder. The torso simulator was filled with a fluid formulated in accordance with the specification by using tissue material corresponding to human tissue characteristics at that frequency. The fluid temperature was maintained between 20° to 25° C. There are also the reference for simulator fluid (see annex 2).

2.4. EQUIPEMENT LABELLING

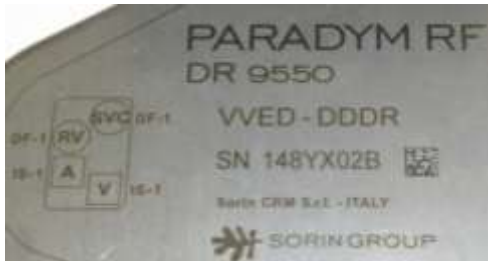

2.5. EQUIPMENT MODIFICATIONS

No equipment modification has been necessary during testing.



3. FREQUENCY ERROR & FREQUENCY STABILITY

3.1. TEST CONDITIONS

Test performed by : Stéphane PHOUDIAH
Date of test : 2012/03/27
Ambient temperature : 24°C
Relative humidity : 32%

3.2. TEST SETUP

FCC 95.627(e)
RSS 243 §3.3
ETSI EN 301 839-1 §8.1
Specified low-power radio equipment (Item 8 of Article 2 Paragraph 1 of Certification Ordinance)

The test is performed on EUT in permanent emission without modulation mode. For measurement under normal and extreme test conditions, the Equipment Under Test is installed in the climatic chamber. A test fixture is created to perform the measurement.

3.3. RESULTS

Frequency: Fmin

Temperature	Tmin	Tnom	Tmax
Power voltage: Vnom			
Frequency (MHz)	402,15	402,1474	402,1502
Frequency Drift (ppm)	0	-6,46	0,49

Frequency: Fnom

Temperature	Tmin	Tnom	Tmax
Power voltage: Vnom			
Frequency (MHz)	403,653	403,6504	403,6522
Frequency Drift (ppm)	7,43	0,99	5,45

Frequency: Fmax

Temperature	Tmin	Tnom	Tmax
Power voltage: Vnom			
Frequency (MHz)	404,853	404,8538	404,852
Frequency Drift (ppm)	7,41	9,39	4,94

See graphics in annex 1

Result: **PASS**

Limit: → ± 100 ppm

**4. EFFECTIVE RADIATED POWER, MAXIMUM TRANSMITTER POWER & ANTENNA POWER****4.1. TEST CONDITIONS**

Test performed by : Stéphane PHOUDIAH
Date of test : 2012/03/26
Ambient temperature : 24°C
Relative humidity : 28%

4.2. TEST SETUP

FCC 95.639(f)
RSS 243 §5.4
ETSI EN 301 839-1 §8.3
Specified low-power radio equipment (Item 8 of Article 2 Paragraph 1 of Certification Ordinance)

The test is performed on EUT in permanent emission without modulation mode on vertically and horizontally position. The setup is 1.5m above the ground reference plane on a wooden table. Distance between measuring antenna and the EUT is 3 meters. The measuring antenna is in vertical and then in horizontal polarization. Measurement bandwidth was 100kHz. Continuous linear turntable azimuth search was performed with 360 degrees range.

The substitution method is used to obtain the effective isotropic radiated power and effective radiated power. (KDB 412172 D01 Determining ERP and EIRP)

4.3. RESULTS

Frequency (MHz)	Generator (dBm)	Cables loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (µW)	ERP (dBm)	ERP (µW)
Fmin	-34,6	1,6	6,6	-39,6	0,109	-41,7	0,067
Fnom	-34,3	1,7	6,6	-39,2	0,120	-41,3	0,073
Fmax	-35,3	1,8	6,6	-40,1	0,098	-42,2	0,059

Result: **PASS**

Limit: → 25µW or -16dBm

**5. EMISSION BANDWIDTH & OCCUPIED BANDWIDTH****5.1. TEST CONDITIONS**

Test performed by : Stéphane PHOUDIAH
Date of test : 2012/03/28
Ambient temperature : 25°C
Relative humidity : 30%

5.2. TEST SETUP

FCC 95.633(e)
RSS 243 §3.2
ETSI EN 301 839-1 §8.2
Specified low-power radio equipment (Item 8 of Article 2 Paragraph 1 of Certification Ordinance)

The test is performed on EUT in permanent emission with modulation. the Equipment Under Test is installed in the climatic chamber. A test fixture is created to perform the measurement. RBW was 3kHz and VBW was 10kHz. The Emission Bandwidth is measured 20dB below the peak power.

5.3. RESULTS

Frequency (MHz)	Emission Bandwidth (kHz)	Occupied Bandwidth (kHz)
Fmin	206,9	210,18
Fnom	206,9	205,33
Fmax	206,9	203,71

See graphics in annex 1

Result: **PASS**

Limit: → Shall not exceed 300kHz

**6. SPURIOUS EMISSIONS OF TRANSMITTER & TOLERANCE OF UNWANTED EMISSION INTENSITY****6.1. TEST CONDITIONS**

Test performed by : Stéphane PHOUDIAH
Date of test : 2012/03/26
Ambient temperature : 23°C
Relative humidity : 30%

6.2. TEST SETUP

ETSI EN 301 839-1 §8.2
Specified low-power radio equipment (Item 8 of Article 2 Paragraph 1 of Certification Ordinance)

The test is performed on EUT in permanent emission with modulation mode.

Method of measurement

- Effective Radiated Power, cabinet radiation
 Effective Radiated Power, cabinet and antenna radiation

Qualification measurements on an open test site (25MHz to 200MHz):

The setup is 1.5m above the ground reference plane.

Distance between measuring antenna and the EUT is 10 meters for frequency 30MHz to 200MHz.

Test is performed in horizontal (H) and vertical (V) polarization with a bilog antenna below 1GHz and with a horn antenna above 1GHz. Measurement bandwidth was 100kHz. Continuous linear turntable azimuth search was performed with 360 degrees range. Vertical search was performed between 1m and 4m with the measuring antenna.

The Substitution Method is applied on the maximum values observed during the azimuth and vertical search in order to obtain the spurious radiated emission.

Qualification measurements in full anechoic chamber (200MHz to 4GHz):

The setup is 1.5m above the ground reference plane.

Distance between measuring antenna and the EUT is 3meters for frequency 200MHz to 4GHz.

Test is performed in horizontal (H) and vertical (V) polarization with a bilog antenna below 1GHz and with a horn antenna above 1GHz. Measurement bandwidth was 100kHz for measurement below 1GHz and 1MHz for measurement above 1GHz. Continuous linear turntable azimuth search was performed with 360 degrees range.

The Normalized Site Attenuation (NSA) is added to the maximum values observed during the azimuth search in order to obtain the spurious radiated emission.

**6.3. RESULTS****Characterization on open test site (25MHz to 200MHz):**

Vertical antenna

Operating		
Frequency (MHz)	Measure E.R.P (dBm)	Limit (dBm)
32.2	-65	-36
32.8	-62	-36
34.5	-63	-36
36.1	-62	-36
39	-63	-36
40	-65	-36
41.7	-66	-36
43.6	-64	-36
48	-67	-54
49.9	-66	-54
57.1	-70	-54
59	-63	-54
72	-64	-54
133	-66	-36
144.2	-67	-36
160	-69	-36
166.2	-70	-36
192	-68	-54
200	-69	-54

Horizontal antenna

Operating		
Frequency (MHz)	Measure E.R.P (dBm)	Limit (dBm)
40	-69	-36
49.9	-68	-54
80	-66	-36
120	-69	-36
132.2	-68	-36
156.3	-68	-36
200	-67	-54

**Characterization in full anechoic chamber (200MHz to 4GHz):**

Operating		
Frequency (MHz)	Measure E.R.P (dBm)	Measure E.I.R.P (dBm)
1881,6	-57,15	-55,01
784,5	-71,28	-69,14

Result: PASS

ETSI EN 301 839-1 §8.2

Limit: → 25MHz to 47MHz: -36dBm (operating)/ -57dBm (Standby)
47MHz to 74MHz: -54dBm (operating)/ -57dBm (Standby)
74MHz to 87,5MHz: -36dBm (operating)/ -57dBm (Standby)
87,5MHz to 118MHz: -54dBm (operating)/ -57dBm (Standby)
118MHz to 174MHz: -36dBm (operating)/ -57dBm (Standby)
174MHz to 230MHz: -54dBm (operating)/ -57dBm (Standby)
230MHz to 470MHz: -36dBm (operating)/ -57dBm (Standby)
470MHz to 862MHz: -54dBm (operating)/ -57dBm (Standby)
862MHz to 1GHz: -36dBm (operating)/ -57dBm (Standby)
1GHz to 4GHz: -30dBm (operating)/ -47dBm (Standby)

Specified low-power radio equipment (Item 8 of Article 2 Paragraph 1 of Certification Ordinance)

Limit: → -36dBm (operating)**See graphics in annex 1**



7. UNWANTED RADIATION

7.1. TEST CONDITIONS

Test performed by : Laurent DENEUX
Date of test : 2012/03/21
Ambient temperature : 21°C
Relative humidity : 48%

7.2. TEST SETUP

FCC 95.635(d)
RSS 243 §3.4

The test is performed on EUT in permanent emission with modulation mode.

Method of measurement

- Effective Radiated Power, cabinet radiation
 Effective Radiated Power, cabinet and antenna radiation

Qualification measurements on an open test site (30MHz to 25GHz):

The setup is 1.5m above the ground reference plane.

Distance between measuring antenna and the EUT is 10 meters for frequency 30MHz to 25GHz.

Test is performed in horizontal (H) and vertical (V) polarization with a bilog antenna below 1GHz and with a horn antenna above 1GHz . Measurement bandwidth was 100kHz and 1MHz for measurement above 1GHz. Continuous linear turntable azimuth search was performed with 360 degrees range. Vertical and horizontal search was performed between 1m and 4m with the measuring antenna.




7.3. RESULTS

Out-Of-Band Emissions

Characterization on open test site (30MHz to 25GHz):

Fcc Part.15 CLASS B

SORIN
IMPLANT
MODEL : PARADYM RF DR 9550
400 Tx

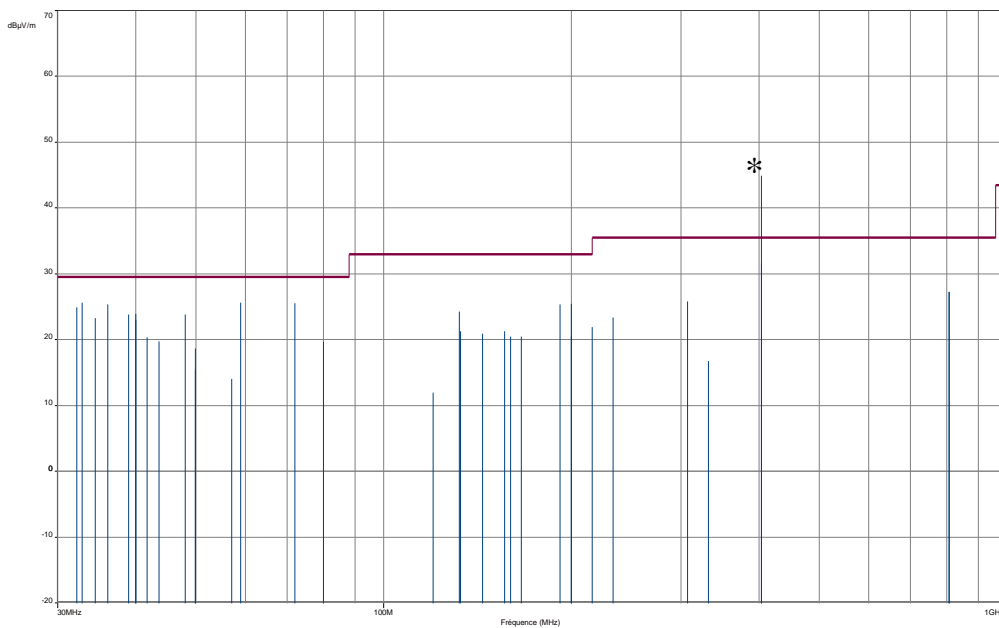

— Limit level

* Transmitter frequency

Remark: During the Scan, no unwanted emission has been detected in the frequency range 1 GHz to 25 GHz.

Result: **PASS**

Limit: → 30MHz to 88MHz: 29.5BµV/m or 100µV/m
88MHz to 216MHz: 33dBµV/m or 150µV/m
216MHz to 960MHz: 35.5dBµV/m or 200µV/m
Above 960MHz: 43.5dBµV/m or 500µV/m

**In-Band Emissions**

The "In band emission" is measured 20dB below the peak power. RBW=3kHz VBW=10kHz

Frequency (MHz)	Measure (kHz)	Limit (kHz)
Fmin	103,5	150
Fnom	103,5	150
Fmax	103,5	150

Result: PASS

Limit: → Emissions within the MEDRADIO band (402 – 405 MHz) more than 150 kHz away from the center frequency of the spectrum the transmission is intended to occupy will be attenuated below the transmitter output power by at least 20 dB

See graphics in annex 1

Band-Edge Emissions

The "In band emission" is measured 20dB below the peak power. RBW=3kHz VBW=10kHz

Frequency (MHz)	Measure (MHz)	Limit (MHz)
Fmin	402,046	Above 401,75
Fmax	404,95	Below 405,25

Result: PASS

Limit: → Emissions 250 kHz or less that are above and below the MEDRADIO band (402 – 405 MHz) will be attenuated below the maximum permitted output power by at least 20 dB.

See graphics in annex 1

**8. RECEIVER SPURIOUS RADIATION & SECONDARY RADIATED EMISSION****8.1. TEST CONDITIONS**

Test performed by : Stéphane PHOUDIAH
Date of test : 2012/03/26
Ambient temperature : 23°C
Relative humidity : 30%

8.2. TEST SETUP

ETSI EN 301 839-1 §9.1

Specified low-power radio equipment (Item 8 of Article 2 Paragraph 1 of Certification Ordinance)

The test is performed on EUT in reception mode.

Method of measurement

- Effective Radiated Power, cabinet radiation
 Effective Radiated Power, cabinet and antenna radiation

Qualification measurements on an open test site (25MHz to 200MHz):

The setup is 1.5m above the ground reference plane.

Distance between measuring antenna and the EUT is 10 meters for frequency 30MHz to 200MHz.

Test is performed in horizontal (H) and vertical (V) polarization with a bilog antenna below 1GHz and with a horn antenna above 1GHz. Measurement bandwidth was 100kHz. Continuous linear turntable azimuth search was performed with 360 degrees range. Vertical search was performed between 1m and 4m with the measuring antenna.

The Substitution Method is applied on the maximum values observed during the azimuth and vertical search in order to obtain the spurious radiated emission.

Qualification measurements in full anechoic chamber (200MHz to 4GHz):

The setup is 1.5m above the ground reference plane.

Distance between measuring antenna and the EUT is 3meters for frequency 200MHz to 4GHz.

Test is performed in horizontal (H) and vertical (V) polarization with a bilog antenna below 1GHz and with a horn antenna above 1GHz. Measurement bandwidth was 100kHz for measurement below 1GHz and 1MHz for measurement above 1GHz. Continuous linear turntable azimuth search was performed with 360 degrees range.

The Normalized Site Attenuation (NSA) is added to the maximum values observed during the azimuth search in order to obtain the spurious radiated emission.

**8.3. RESULTS****Characterization on open test site (25MHz to 200MHz):**

Vertical antenna

Operating		
Frequency (MHz)	Measure E.R.P (dBm)	Limit (dBm)
32.2	-65	-57
32.8	-64	-57
34.5	-66	-57
36.1	-65	-57
39	-67	-57
40	-65	-57
41.7	-66	-57
43.6	-64	-57
48	-67	-57
49.9	-66	-57
57.1	-66	-57
59	-67	-57
72	-68	-57
133	-66	-57
144.2	-67	-57
160	-69	-57
166.2	-70	-57
192	-68	-57
200	-69	-57

Horizontal antenna

Operating		
Frequency (MHz)	Measure E.R.P (dBm)	Limit (dBm)
40	-69	-57
49.9	-68	-57
80	-66	-57
120	-64	-57
132.2	-68	-57
156.3	-68	-57
200	-67	-57

**Characterization in full anechoic chamber (200MHz to 4GHz):**

Frequency (MHz)	Measure E.R.P (dBm)	Measure E.I.R.P (dBm)
3959,8	-59,14	-57
993,8	-70,34	-68,2

Limit: → -57dBm below 1000 MHz
-47dBm above 1000 MHz

Specified low-power radio equipment (Item 8 of Article 2 Paragraph 1 of Certification Ordinance)

Limit: → -54dBm

Result: **PASS**

See graphics in annex 1



9. RADIATION EMISSIONS

9.1. TEST CONDITIONS

Test performed by : Laurent DENEUX
Date of test : 2012/03/21
Ambient temperature : 21°C
Relative humidity : 48%

9.2. TEST SETUP

FCC 15.109
RSS 243 §3.5

The test is performed on EUT in reception mode.

Method of measurement

- Effective Radiated Power, cabinet radiation
 Effective Radiated Power, cabinet and antenna radiation

Qualification measurements on an open test site (30MHz to 25GHz):

The setup is 1.5m above the ground reference plane.

Distance between measuring antenna and the EUT is 10 meters for frequency 30MHz to 25GHz.

Test is performed in horizontal (H) and vertical (V) polarization with a bilog antenna below 1GHz and with a horn antenna above 1GHz . Measurement bandwidth was 100kHz and 1MHz for measurement above 1GHz. Continuous linear turntable azimuth search was performed with 360 degrees range. Vertical and horizontal search was performed between 1m and 4m with the measuring antenna.




9.3. RESULTS

Characterization on open test site (30MHz to 25GHz):

Fcc Part.15 CLASS B

SORIN
IMPLANT
MODEL : PARADYM RF DR 9550
400 Rx and 2.4 Rx mode

Quasi peak measurement

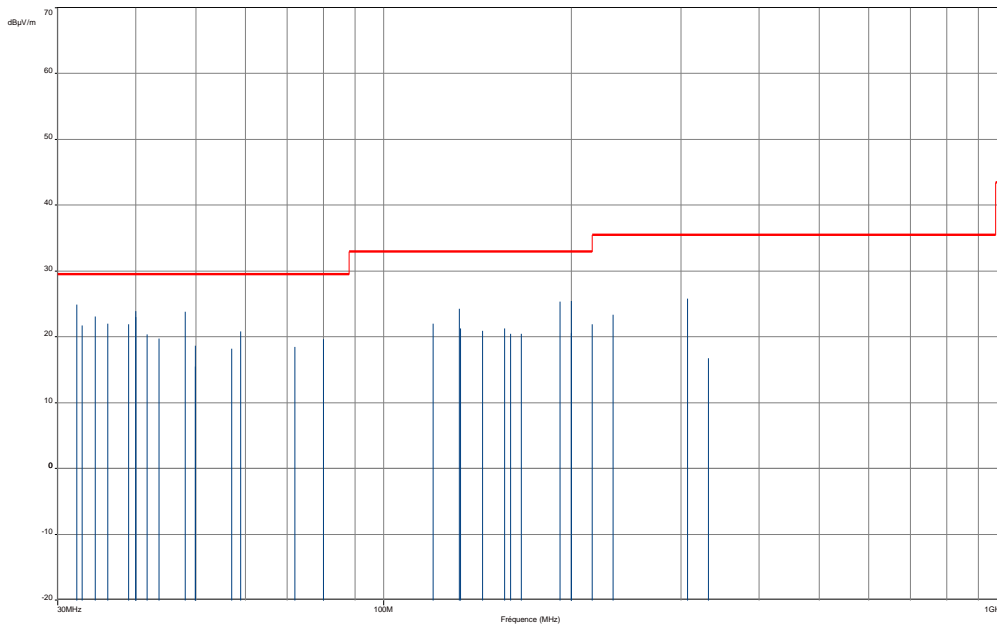

— Limit level

Remark: During the Scan, no radiated emission has been detected in the frequency range 1 GHz to 25 GHz.

Result: **PASS**

Limit: → 30MHz to 88MHz: 29.5BµV/m or 100µV/m
88MHz to 216MHz: 33dBµV/m or 150µV/m
216MHz to 960MHz: 35.5dBµV/m or 200µV/m
Above 960MHz: 43.5dBµV/m or 500µV/m



10. TEST EQUIPMENT LIST

Test	Apparatus	Trade Mark	Type	Registration number
Effective Radiated Power Of The Fundamental Emission, Maximum Transmitter Power & Antenna Power				
X	Full anechoic chamber	SIEPEL	S36	D3044019
X	Logperiodic antenna	AMPLIFIER RESEARCH	ATR80M6G	C2040149
X	EMI Test Receiver	ROHDE & SCHWARZ	ESMI	A2642009
X	Signal Generator	ROHDE & SCHWARZ	SMIQ03b	A5442039
X	Logperiodic antenna	AMPLIFIER RESEARCH	AT1000	C2040002
X	Substitution Cable	-	CNJ01	A5329393
X	Substitution Cable	-	CNS1E 04	A5329434
X	Horn Antenna	A.H. SYSTEMS	SAS-571	C2042041
X	Horn Antenna	EMCO	3117	C2042031
X	Dipole Antenna	SCHWARZBECK	VHAP	C2040020
X	Dipole Antenna	SCHWARZBECK	UHAP	C2040022
Emission Bandwidth, Occupied Bandwidth, Band-Edge Emissions, In-Band Emissions				
X	Antenna	KATHREIN	-	-
X	Climatic Chamber	SECASI Technologies	SLT-34	D1024029
X	Spectrum Analyser	ROHDE & SCHWARZ	FSL	A4060032
Frequency error & Frequency stability				
X	Spectrum Analyser	ROHDE & SCHWARZ	FSL	A4060032
X	Antenna	KATHREIN	-	-
X	Climatic Chamber	SECASI Technologies	SLT-34	D1024029
Transmitter Spurious Emissions & Unwanted Emissions				
X	Full anechoic chamber	SIEPEL	S36	D3044019
X	EMI Test Receiver	ROHDE & SCHWARZ	ESMI	A2642009
X	Preamplifier	BONN Elektronik	BLNA 3018-8F30S	A7080053
X	Horn Antenna	A.H. SYSTEMS	SAS-571	C2042041
X	Logperiodic antenna	AMPLIFIER RESEARCH	ATR80M6G	C2040149
X	Signal Generator	ROHDE & SCHWARZ	SMR	A5444002
X	Signal Generator	ROHDE & SCHWARZ	SMIQ03b	A5442039
X	Dipole Antenna	SCHWARZBECK	VHAP	C2040020
X	Dipole Antenna	SCHWARZBECK	UHAP	C2040022
X	Open test site	LCIE	-	F2000400
X	EMI Test Receiver	ROHDE & SCHWARZ	ESU	A2642018
X	Preamplifier	HEWLETT PACKARD	8449B	A4069002
X	Bilog antenna	CHASE	CBL 6112A	C2040040
X	Dipole	ROHDE & SCHWARZ	HUF-Z1	C2040011
X	Logperiodic antenna	ROHDE & SCHWARZ	HL 023 A2	C2040001
X	Horn antenna	EMV	3115	C2040023
X	Horn antenna	AH SYSTEMS	SAS-572	C2042026
X	Horn antenna	EMCO	.3115	C2042016
X	Signal Generator	ROHDE & SCHWARZ	SMP02	B2163019
X	Signal Generator	ROHDE & SCHWARZ	SMY02	A5442014
Receiver Spurious Emissions & Radiated Emissions				
X	Full anechoic chamber	SIEPEL	S36	D3044019
X	EMI Test Receiver	ROHDE & SCHWARZ	ESMI	A2642009
X	Preamplifier	BONN Elektronik	BLNA 3018-8F30S	A7080053
X	Horn Antenna	A.H. SYSTEMS	SAS-571	C2042041
X	Logperiodic antenna	AMPLIFIER RESEARCH	ATR80M6G	C2040149
X	Signal Generator	ROHDE & SCHWARZ	SMR	A5444002
X	Signal Generator	ROHDE & SCHWARZ	SMIQ03b	A5442039
X	Dipole Antenna	SCHWARZBECK	VHAP	C2040020
X	Dipole Antenna	SCHWARZBECK	UHAP	C2040022
X	Open test site	LCIE	-	F2000400
X	EMI Test Receiver	ROHDE & SCHWARZ	ESU	A2642018
X	Preamplifier	HEWLETT PACKARD	8449B	A4069002
X	Bilog antenna	CHASE	CBL 6112A	C2040040
X	Dipole	ROHDE & SCHWARZ	HUF-Z1	C2040011
X	Logperiodic antenna	ROHDE & SCHWARZ	HL 023 A2	C2040001
X	Horn antenna	EMV	3115	C2040023



X	Horn antenna	AH SYSTEMS	SAS-572	C2042026
X	Horn antenna	EMCO	.3115	C2042016
X	Signal Generator	ROHDE & SCHWARZ	SMP02	B2163019

11. UNCERTAINTIES CHART

ETSI EN 300 220	Measurement uncertainties (k=2) ±x(dB) / (Hz)	Limit for uncertainties ±y(dB)
TRANSMITTER REQUIREMENTS		
Frequency Error	±2.10 ⁻⁸ Hz	±1.10 ⁻⁷ Hz
Modulation Bandwidth	± 100 kHz	-
Effective Radiated Power	±3.9 dB	±6 dB
Adjacent Channel Power	±1.6 dB	±3 dB
Spurious emissions <ul style="list-style-type: none"> • Frequency < 1000 MHz • Frequency > 1000 MHz 	±3.9 dB ±3.1 dB	±6 dB
Conducted power	±0.6 dB	±1.5 dB
Spectral density in conduction	±0.6 dB	±1.5 dB
Spurious emissions in conduction	±1.6 dB	±3 dB
Temperature	±0.5°C	±1°C
Humidity	±2.5 %	±5 %
RECEIVER REQUIREMENTS		
Spurious emissions <ul style="list-style-type: none"> • Frequency < 1000 MHz • Frequency > 1000 MHz 	±3.9 dB ±3.1 dB	±6 dB
Spurious emissions in conduction	±0.6 dB	±3 dB



12. ANNEX 1 (GRAPHS)

Frequency: Fmin
Frequency error
Temperature: Tmin
Voltage: Vnom




* RBW 1 kHz
* VBW 3 kHz
SWT 100ms

Att 0 dB
Ref -20.0 dBm

M1[1]

-45.38 dBm
402.15000000 MHz

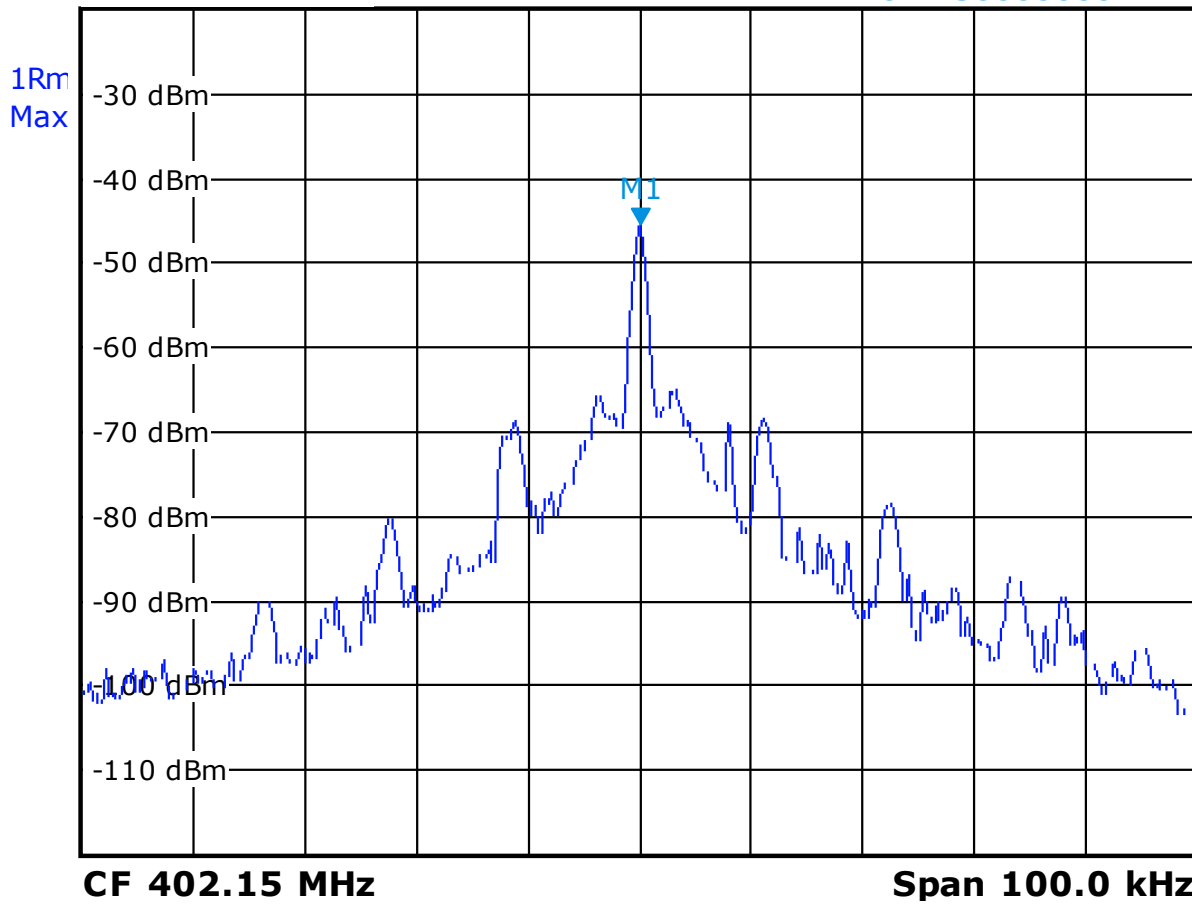

Date: 30.MAR.2012 10:43:55



Frequency: Fmin
Frequency error
Temperature: Tnom
Voltage: Vnom



* RBW 1 kHz

* VBW 3 kHz

Att 0 dB

Ref -20.0 dBm


SWT 100ms

M1[1]

-48.60 dBm

402.147410000 MHz

1Rm
Max

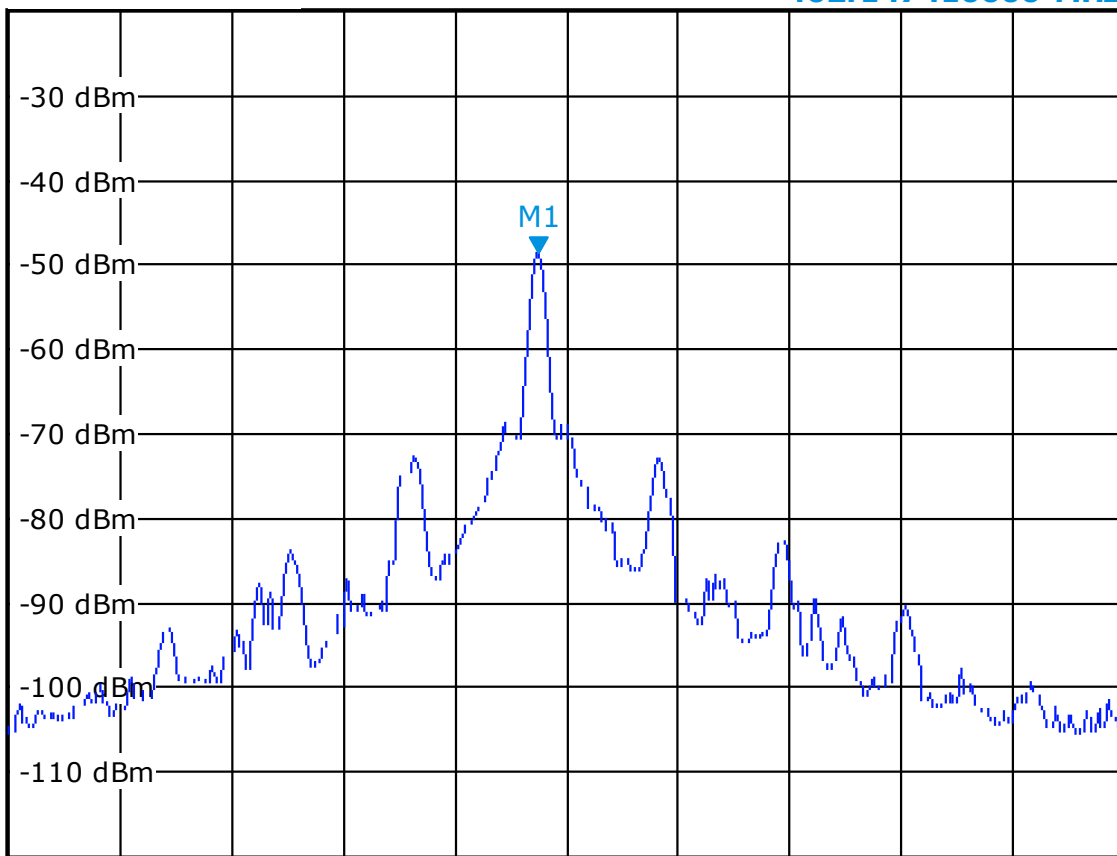

CF 402.15 MHz

Span 100.0 kHz

Date: 30.MAR.2012 15:23:28



Frequency: Fmin
Frequency error
Temperature: Tmax
Voltage: Vnom



* RBW 1 kHz

* VBW 3 kHz

Att 0 dB

Ref -20.0 dBm


SWT 100ms

M1[1]

-46.55 dBm

402.15020000 MHz

1Rm
Max

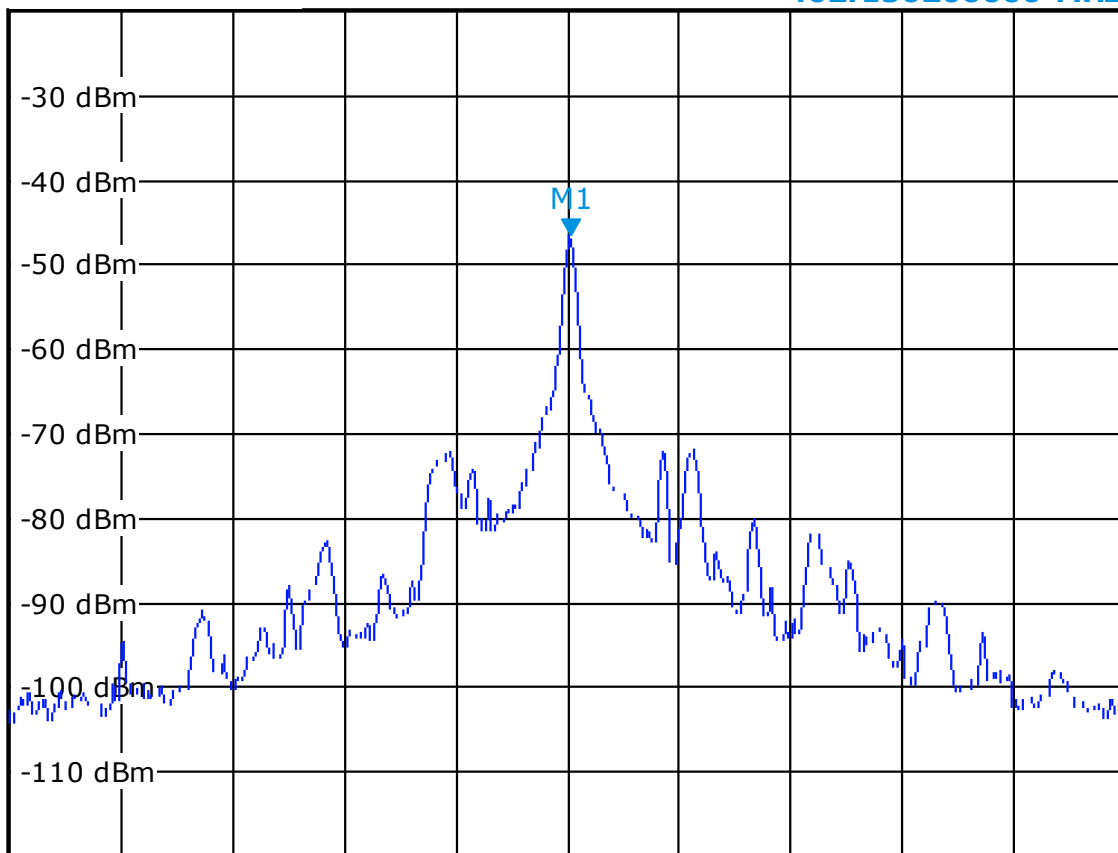

CF 402.15 MHz

Span 100.0 kHz

Date: 30.MAR.2012 16:37:09



Frequency: Fnom
Frequency error
Temperature: Tmin
Voltage: Vnom



* RBW 1 kHz

* VBW 3 kHz

Att 0 dB

Ref -20.0 dBm


SWT 100ms

M1[1]

-45.29 dBm

403.652790000 MHz

1Rm
Max

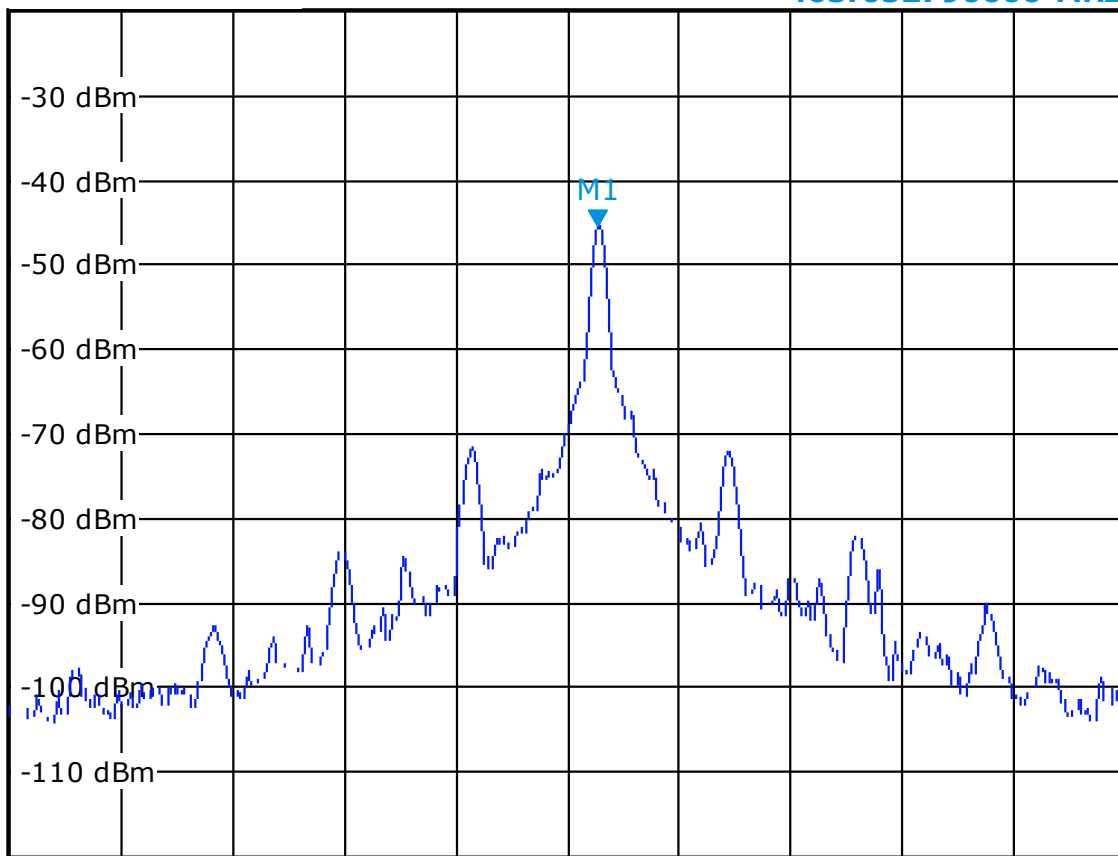

CF 403.65 MHz

Span 100.0 kHz



Frequency: Fnom
Frequency error
Temperature: Tnom
Voltage: Vnom



* RBW 1 kHz

* VBW 3 kHz

Att 0 dB


Ref -20.0 dBm

SWT 100ms

M1[1]

-46.90 dBm

403.65040000 MHz

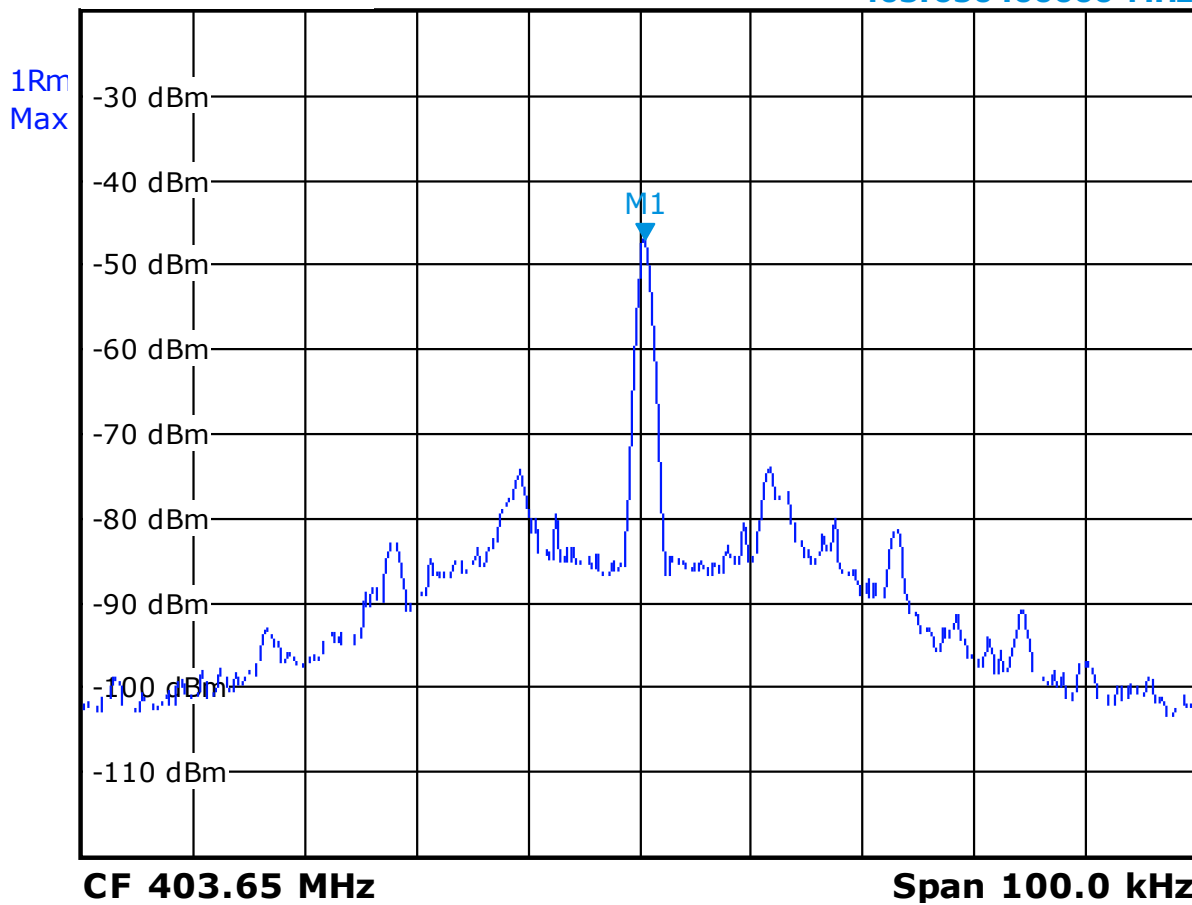

Date: 30.MAR.2012 15:18:24



Frequency: Fnom
Frequency error
Temperature: Tmax
Voltage: Vnom



* RBW 1 kHz

* VBW 3 kHz

Att 0 dB


Ref -20.0 dBm

SWT 100ms

M1[1]

-45.52 dBm

403.65220000 MHz

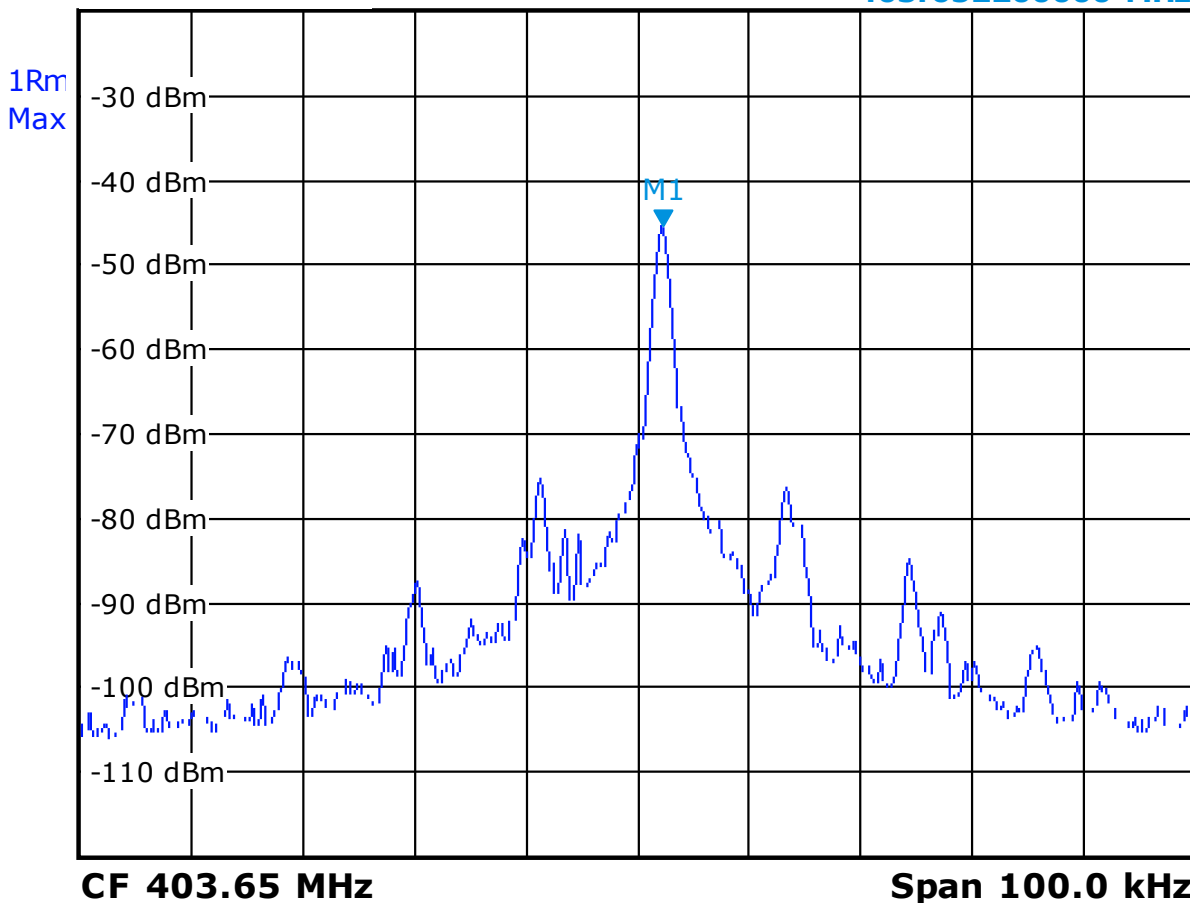

Date: 30.MAR.2012 16:40:41



Frequency: Fmax
Frequency error
Temperature: Tmin
Voltage: Vnom



* RBW 1 kHz

* VBW 3 kHz

Att 0 dB


Ref -20.0 dBm

SWT 100ms

M1[1]

-45.36 dBm

404.85299000 MHz

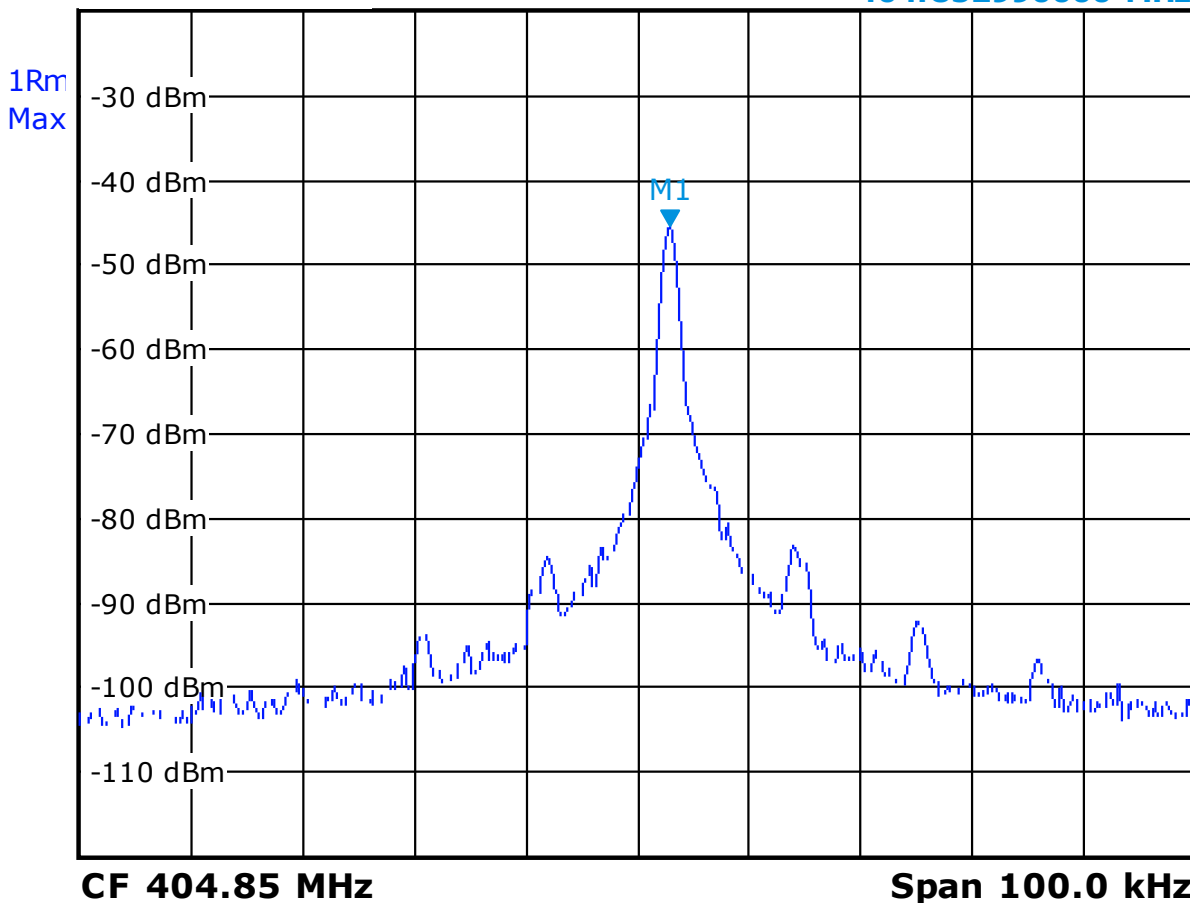


Date: 30.MAR.2012 10:29:33



Frequency: Fmax
Frequency error
Temperature: Tnom
Voltage: Vnom



Att 0 dB * RBW 1 kHz
Ref -20.0 dBm * VBW 3 kHz **M1[1]** **-46.40 dBm**
SWT 100ms **404.85379000 MHz**

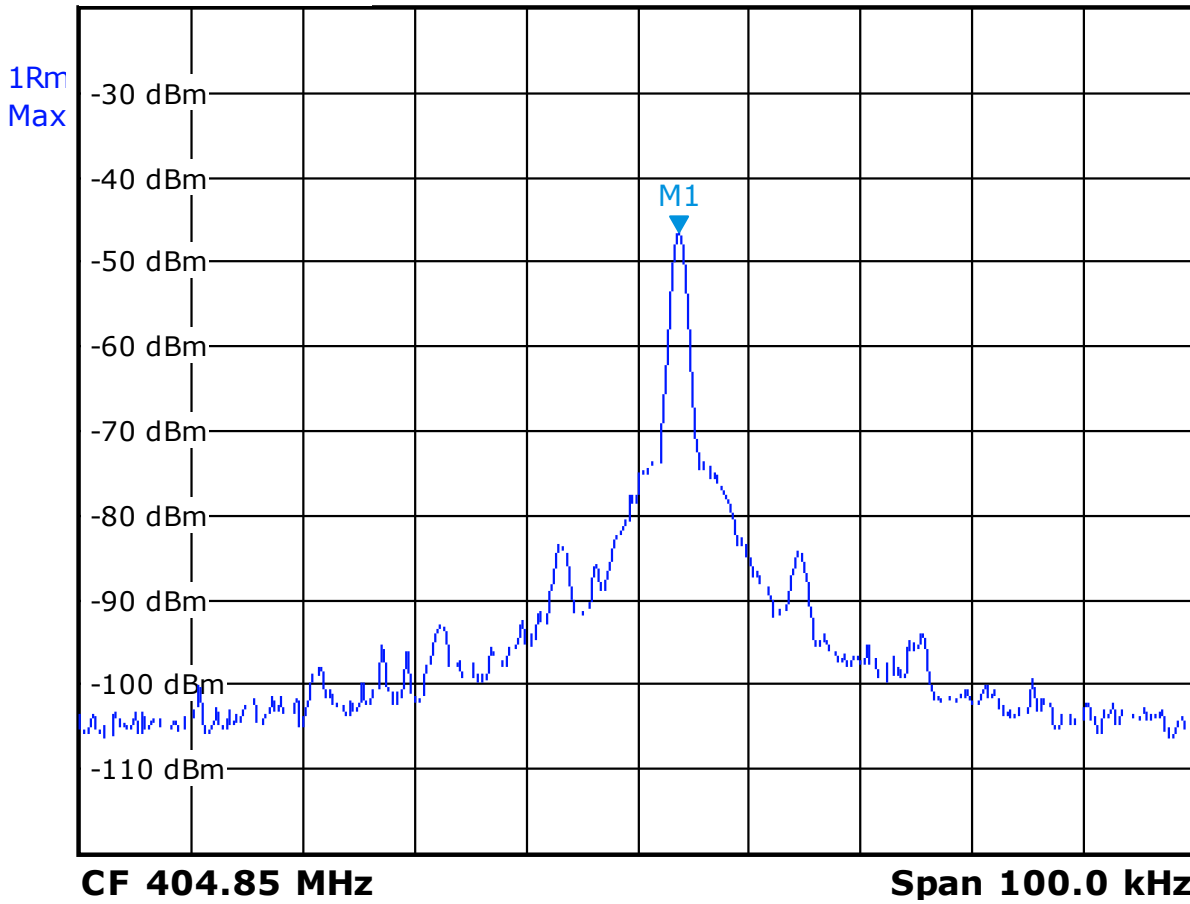

Date: 30.MAR.2012 15:26:09



Frequency: Fmax
Frequency error
Temperature: Tmax
Voltage: Vnom



* RBW 1 kHz

* VBW 3 kHz

Att 0 dB


Ref -20.0 dBm

SWT 100ms

M1[1]

-45.64 dBm


404.85200000 MHz

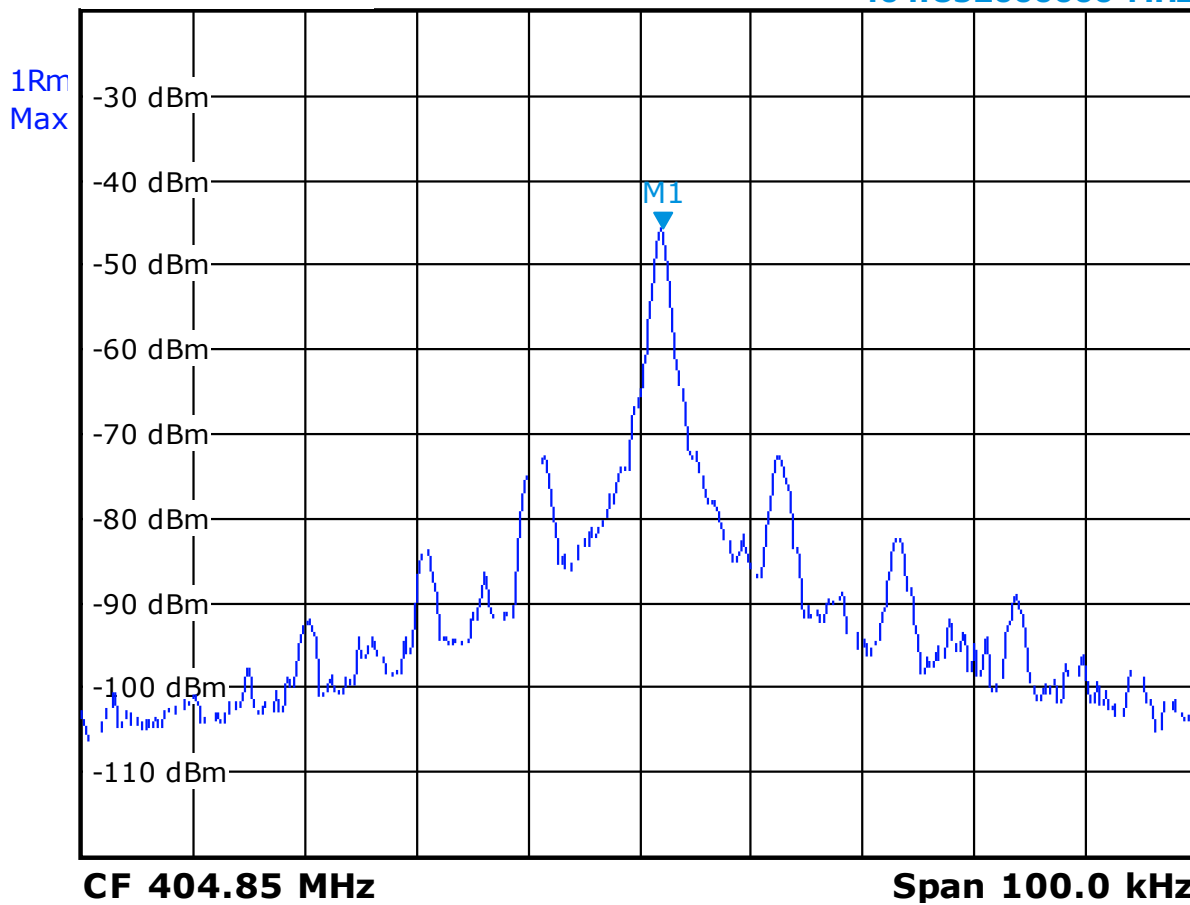


Date: 30.MAR.2012 16:32:02




Spurious emissions
Operating mode
Vertical polarisation

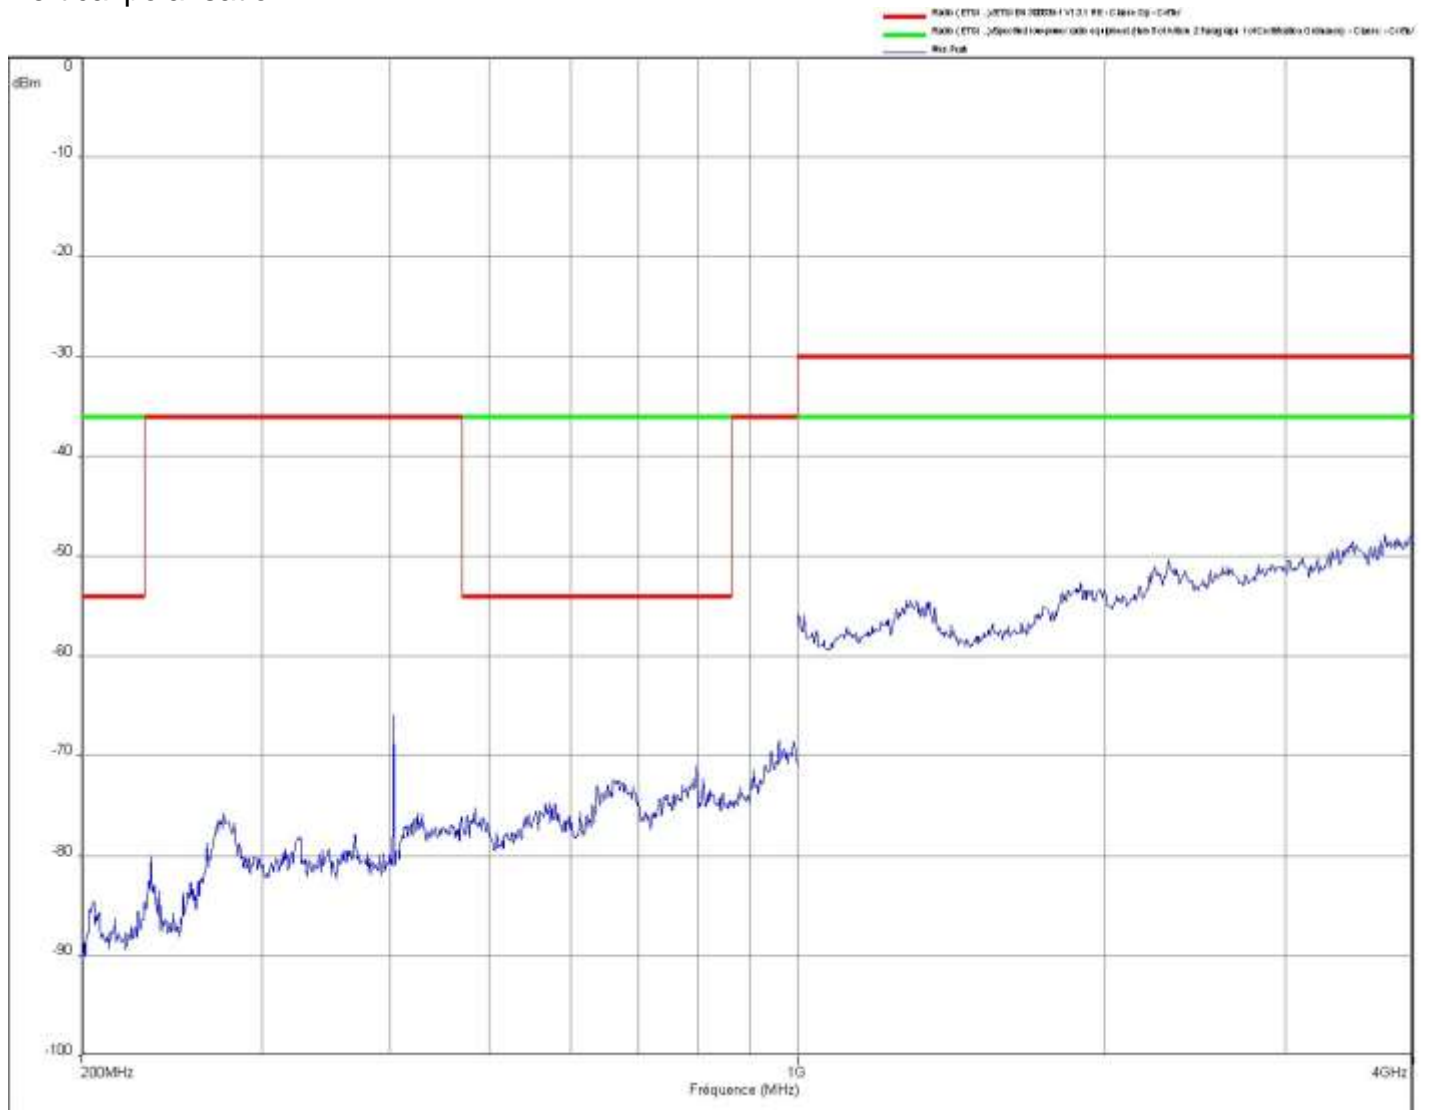

Spurious emissions
 Operating mode
 Horizontal polarisation

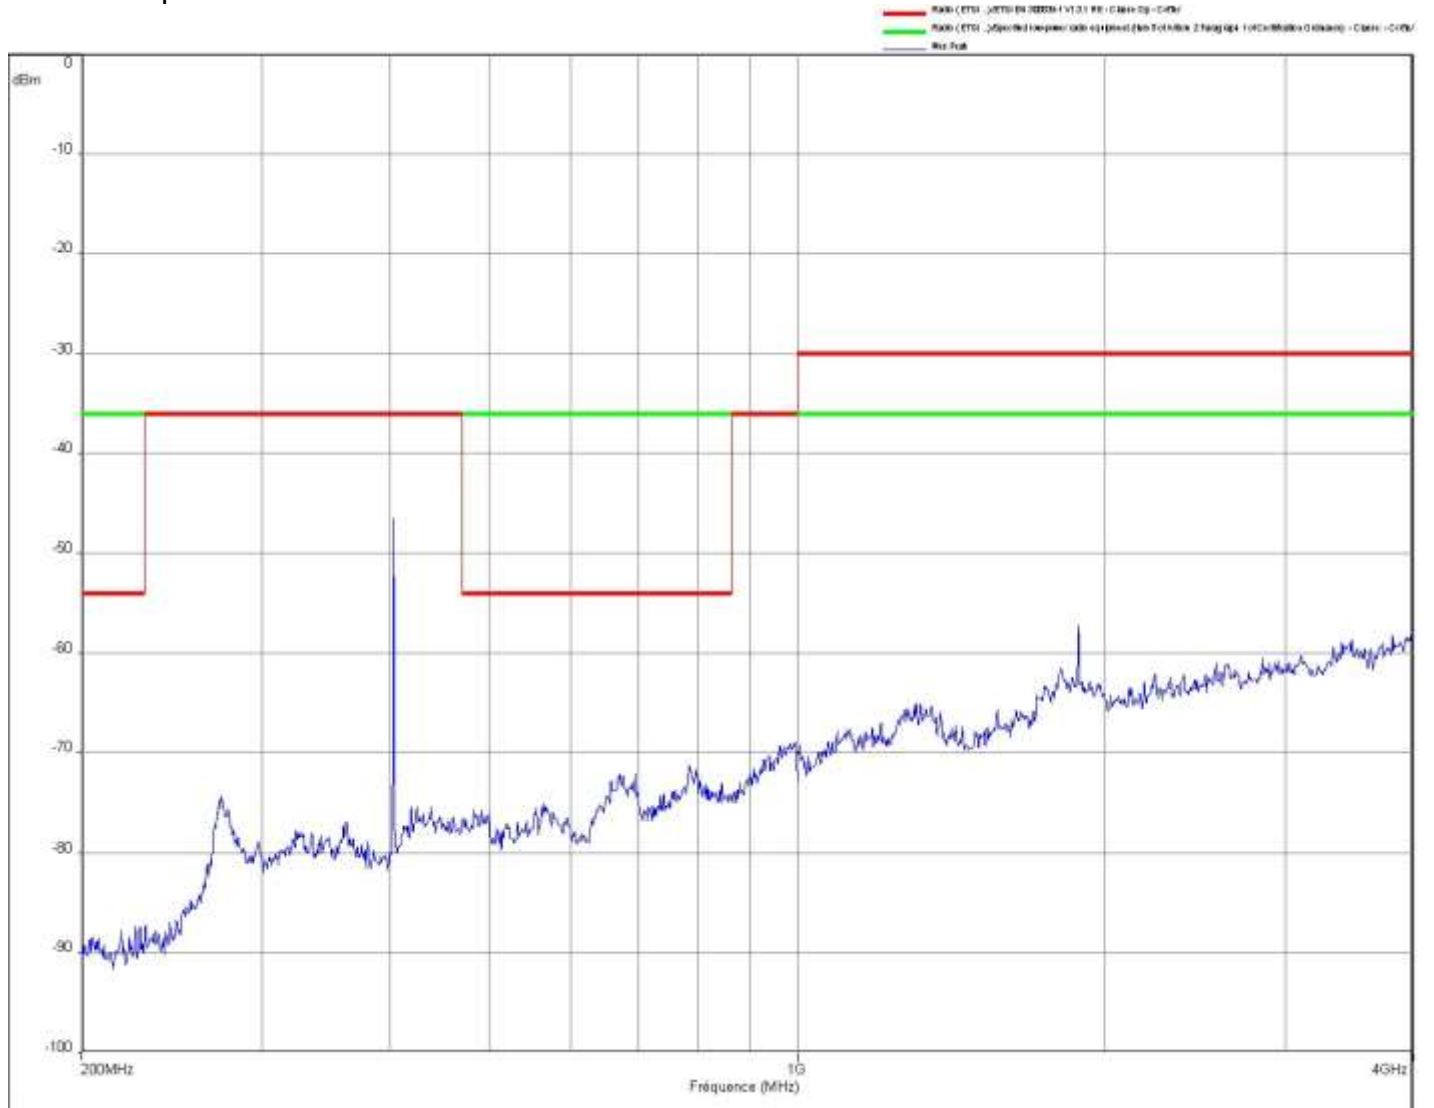

Spurious emissions
Receiver mode
Vertical polarisation

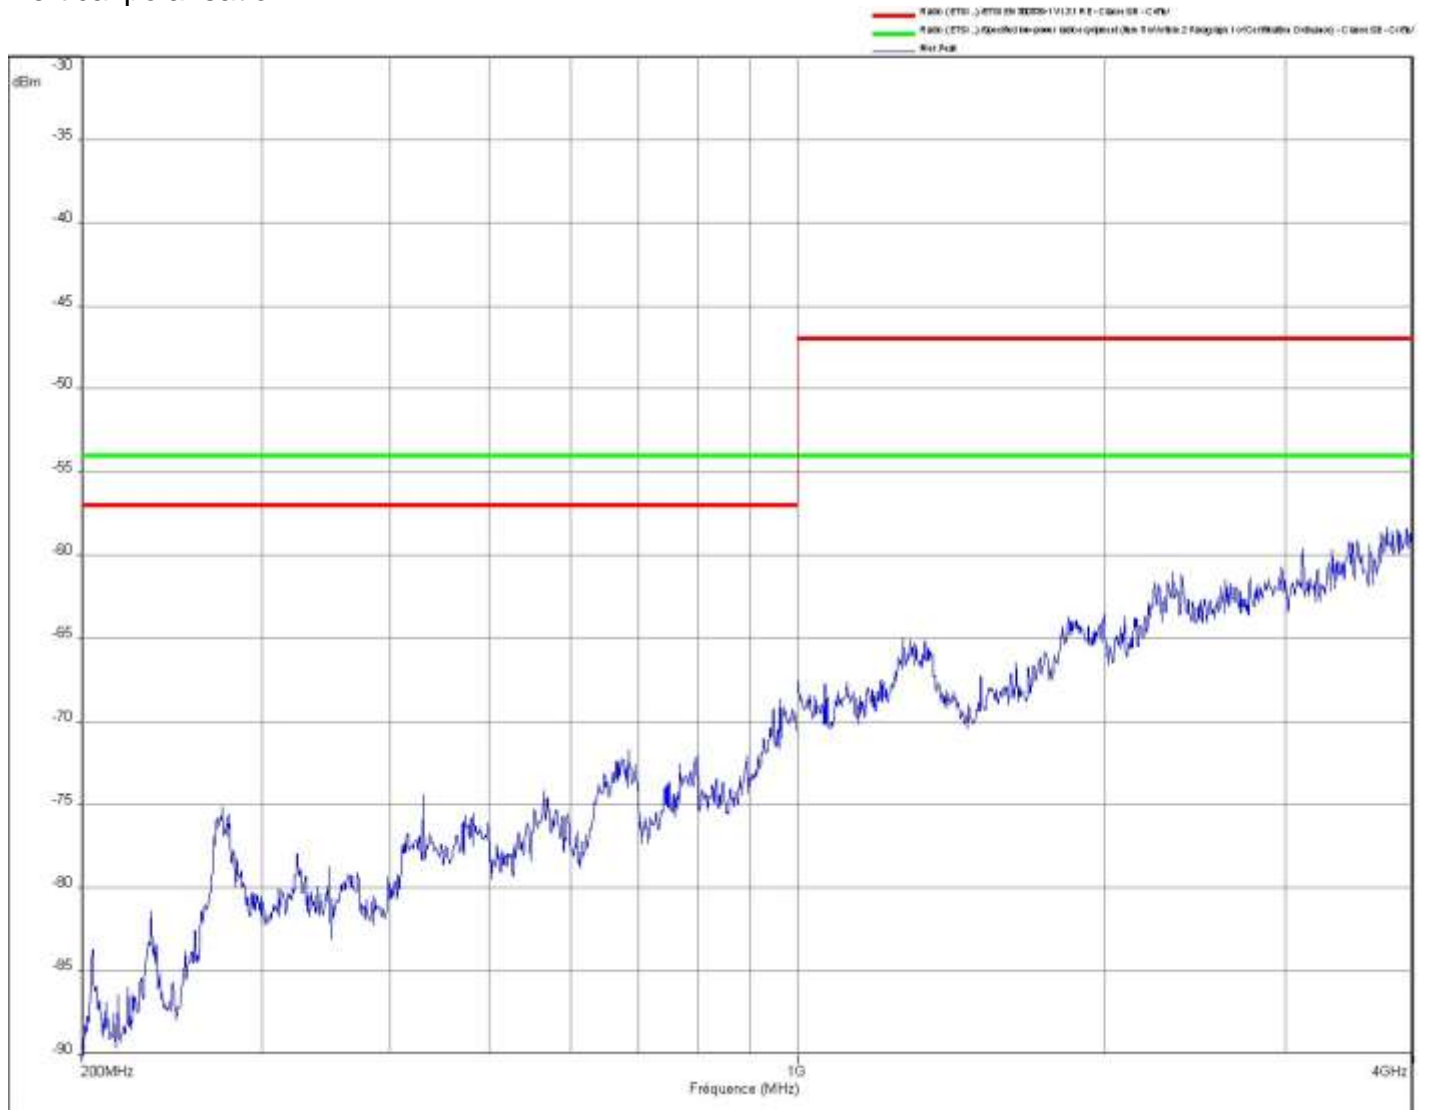


Spurious emissions
Receiver mode
Horizontal polarisation






Frequency: Fmin
Emission Bandwidth
Band-Edge Emissions
In-Band Emissions

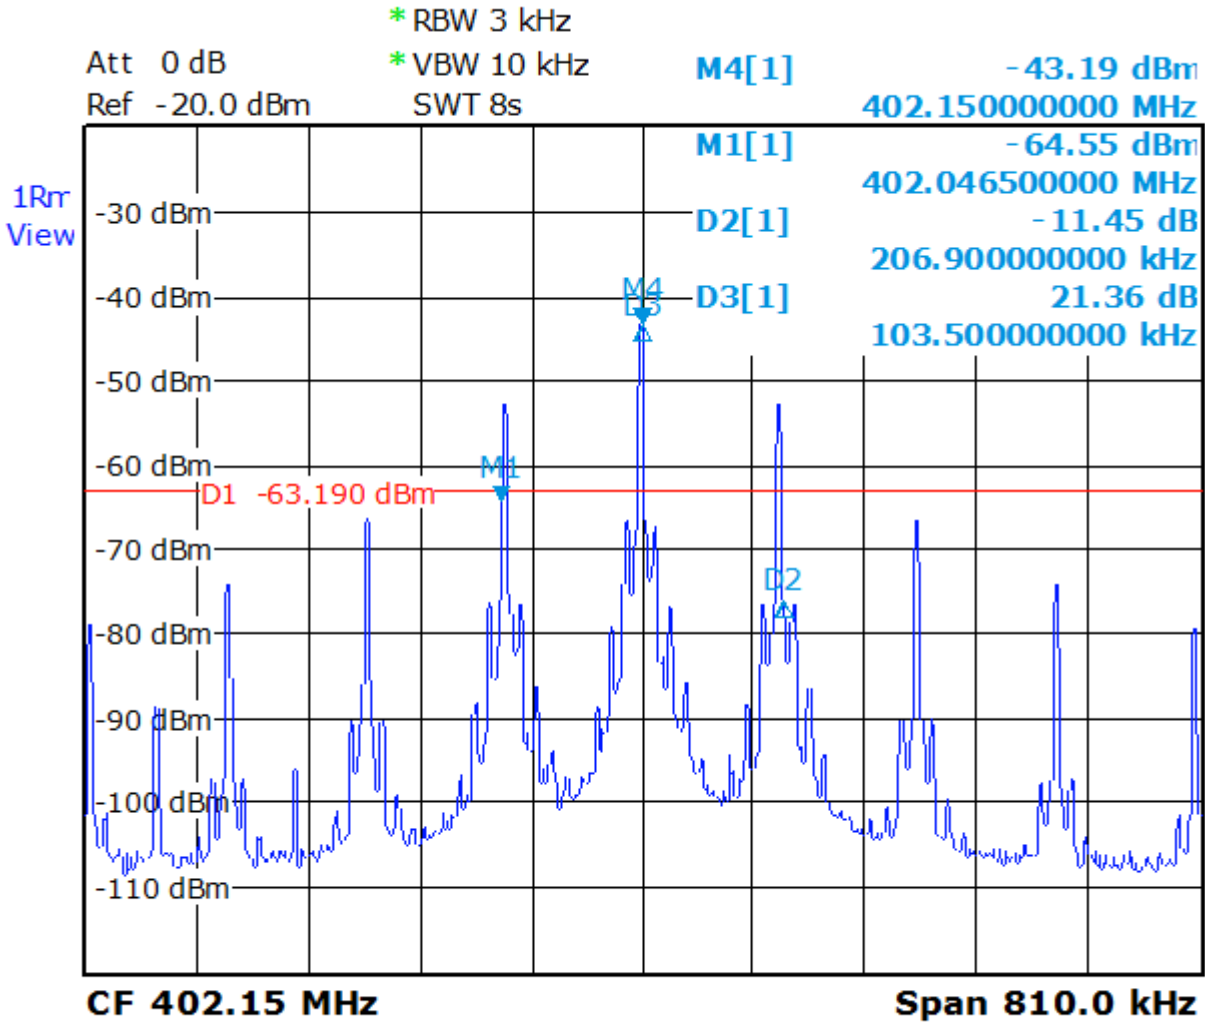

Date: 29.MAR.2012 14:20:33




Frequency: From
Emission Bandwidth
In-Band Emissions

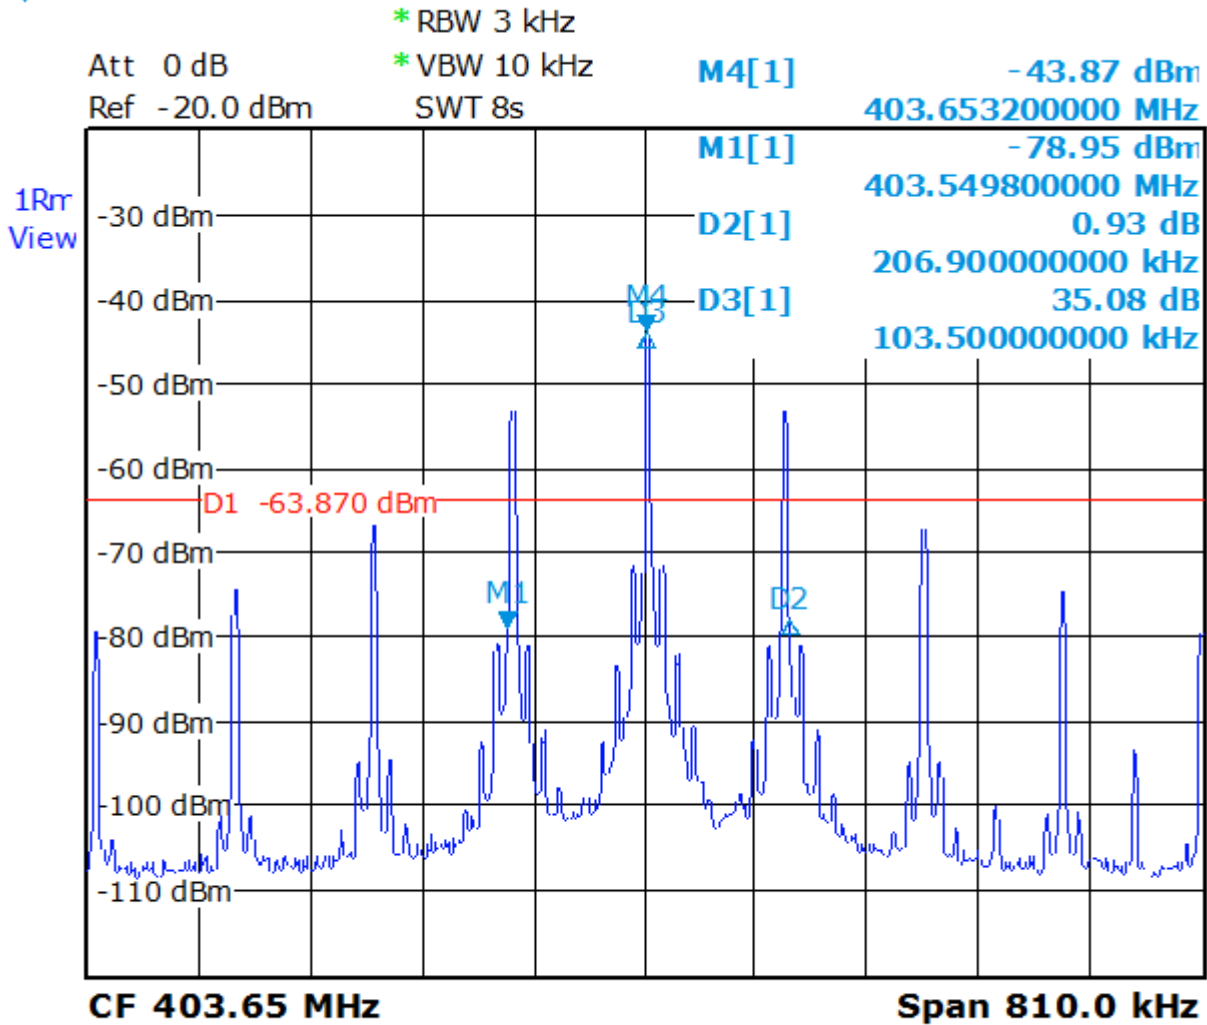

Date: 29.MAR.2012 14:28:58




Frequency: Fmax
Emission Bandwidth
Band-Edge Emissions
In-Band Emission

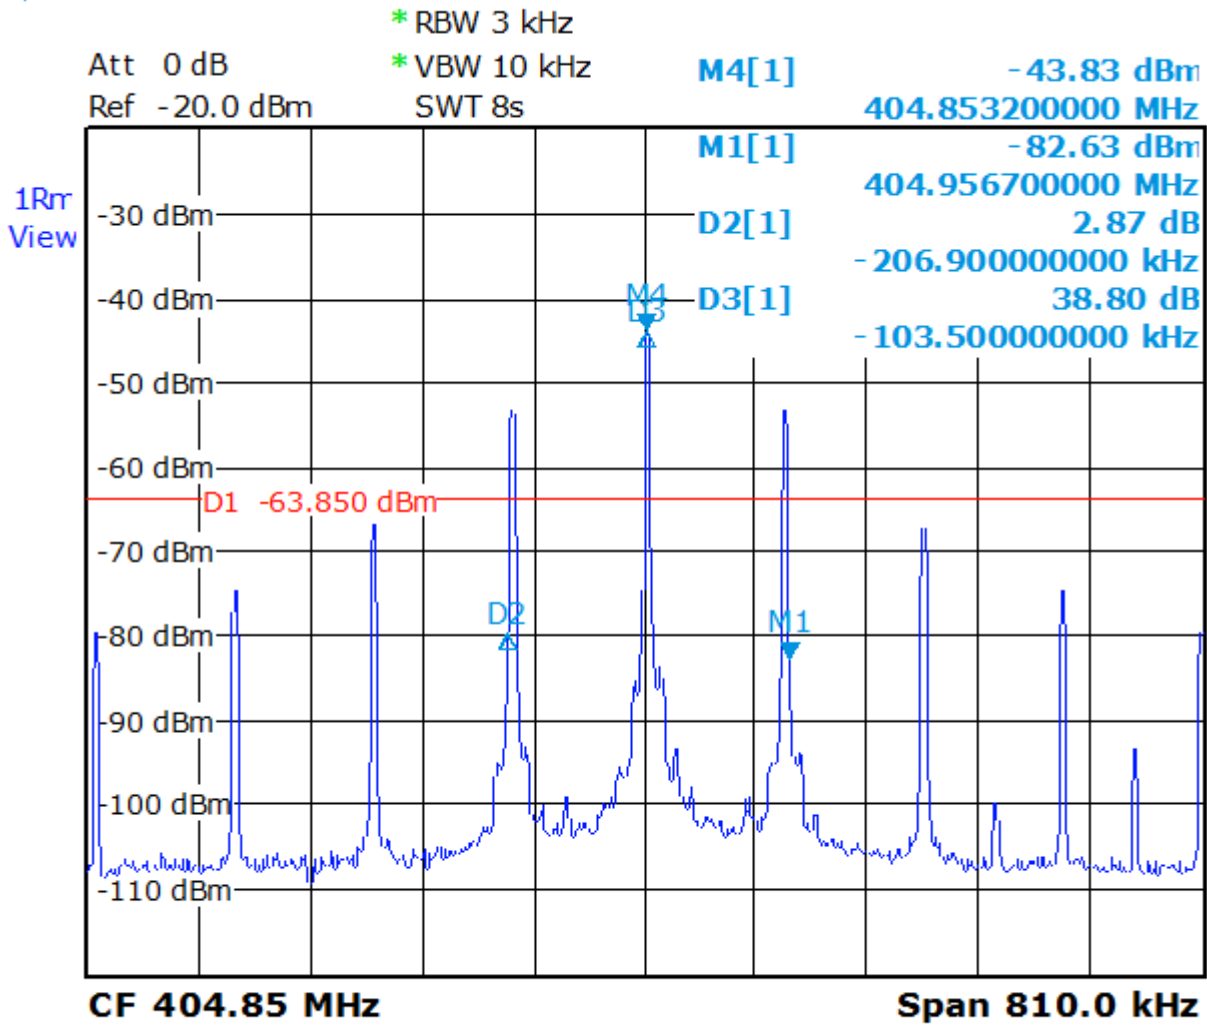

Date: 29.MAR.2012 14:12:25




Frequency: Fmin
Occupied Bandwidth

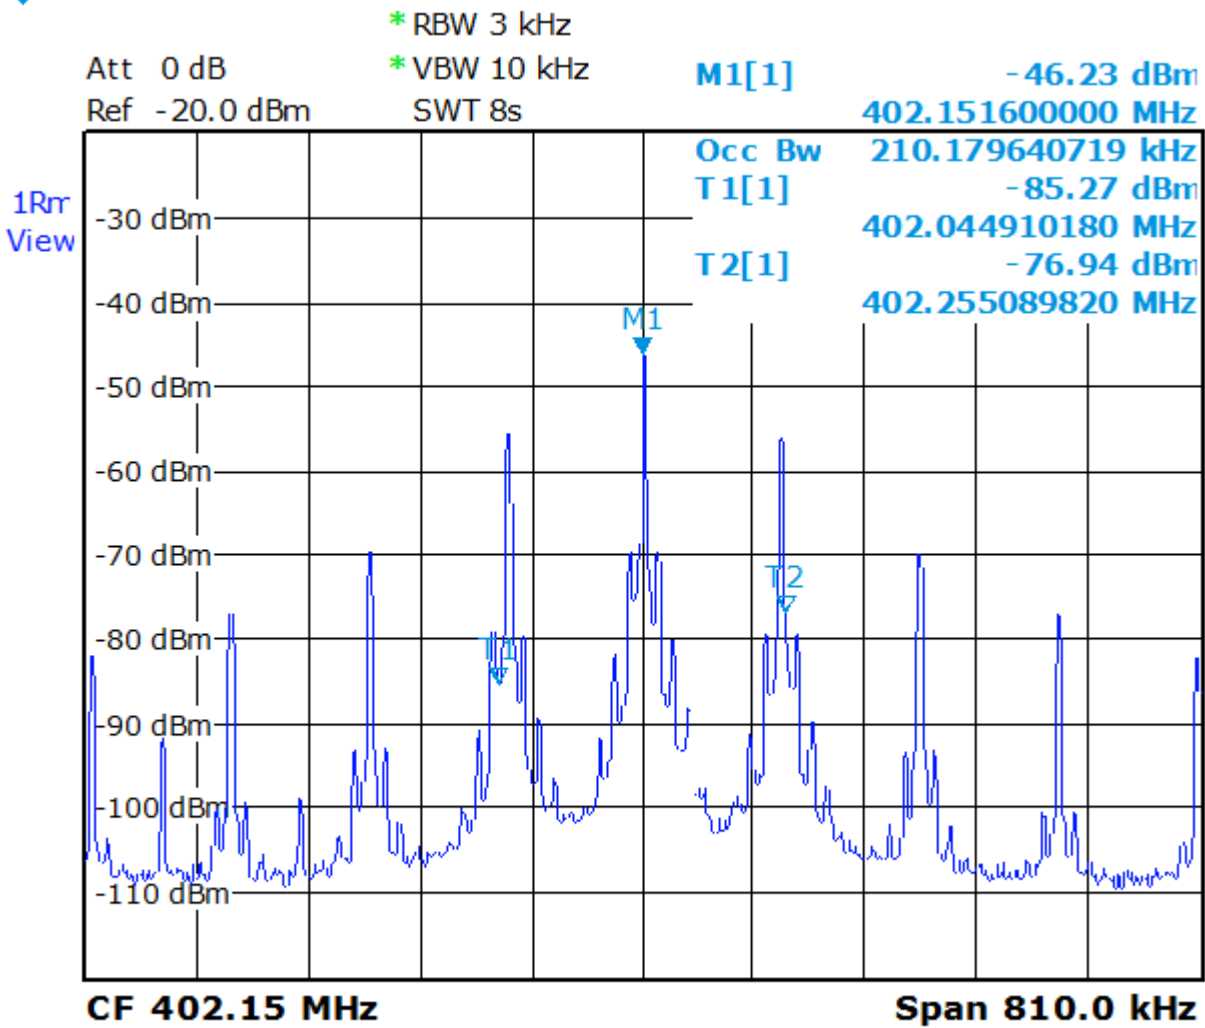

Date: 29.MAR.2012 13:45:01




Frequency: From
Occupied Bandwidth

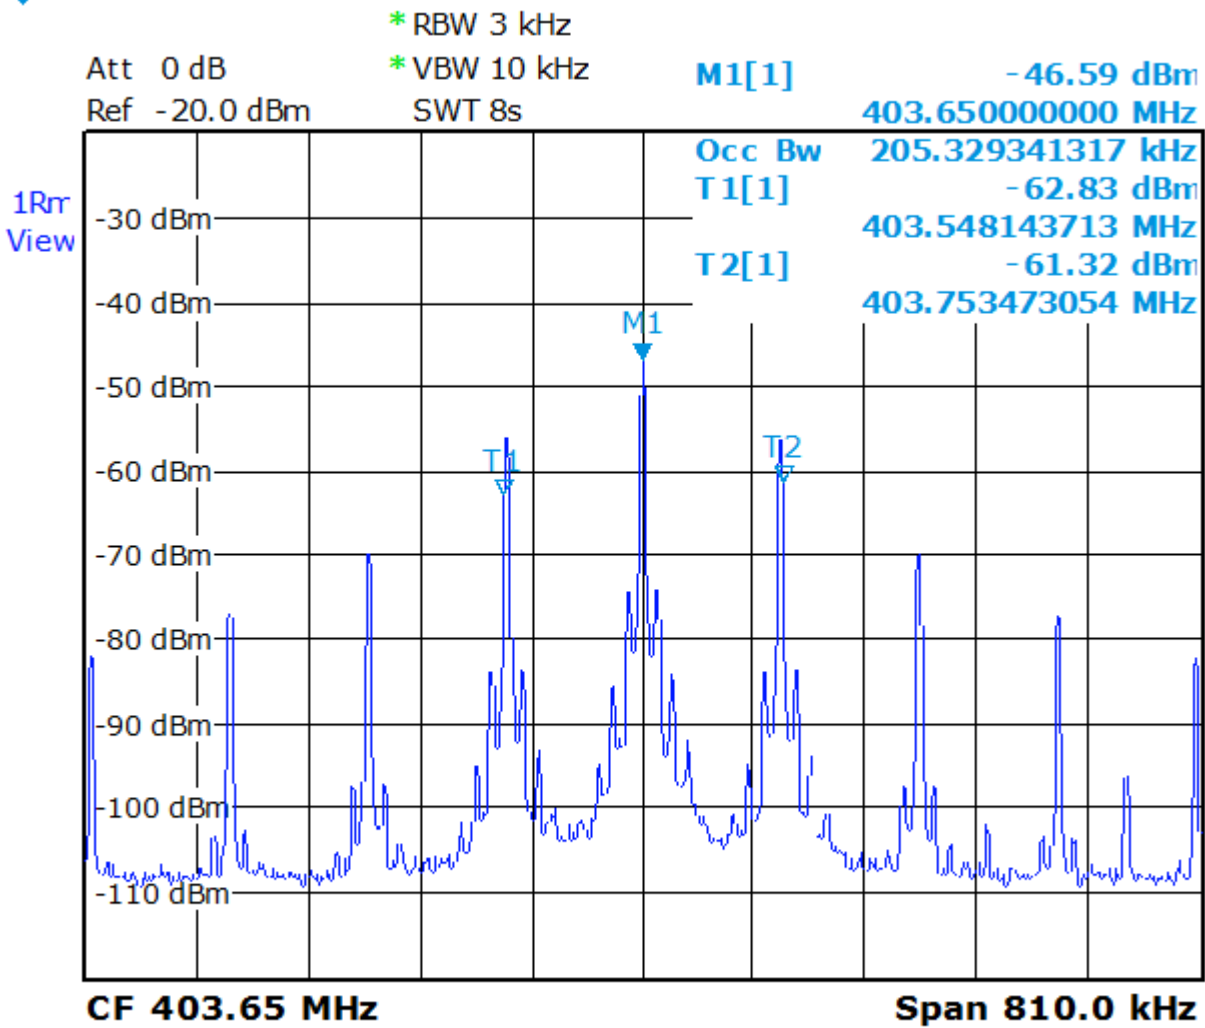

Date: 29.MAR.2012 13:40:11



Frequency: Fmax
Occupied Bandwidth

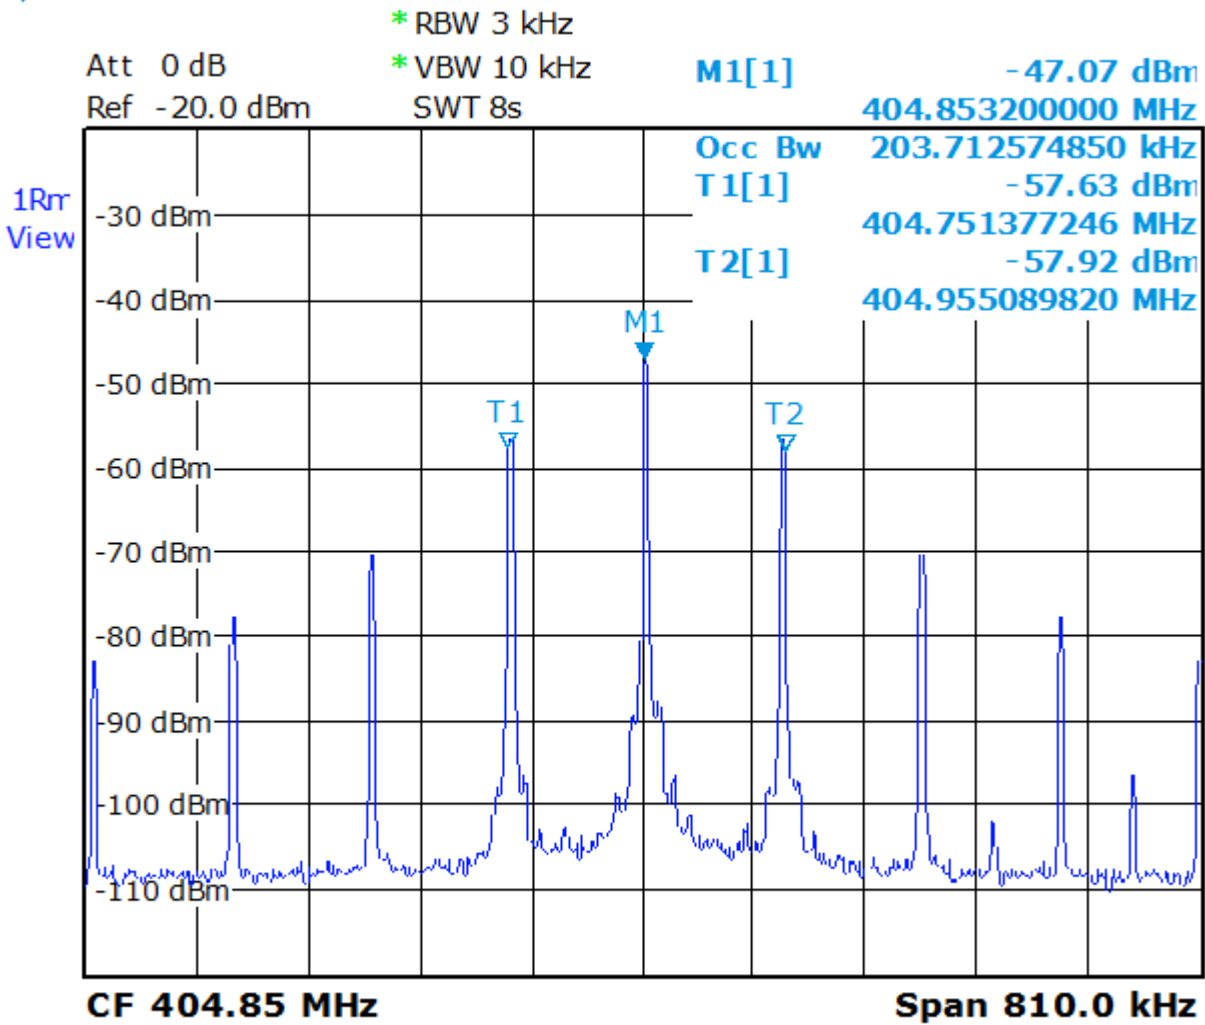

Date: 29.MAR.2012 13:53:19

**13. ANNEX 2 (FLUID DATA SHEET MSL 450)**

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 44 245 9700, Fax +41 44 245 9779
info@speag.com, http://www.speag.com

Material Safety Data Sheet**1 Identification of the substance and of the manufacturer / origin**

Item	Brain Tissue Simulation Liquids B900 Head Tissue Simulation Liquids HSL 175, HSL300, HSL450, HSL750, HSL900 Muscle Tissue Simulation Liquids MBL450, MBL 750, MBL900
Type No	SL AAB 090 SL AAH 017, SL AAH 030, SL AAH 045, SL AAH 075, SL AAH 090 SL AAM 045, SL AAM 075, SL AAM 090
Series No	N/A
Manufacturer / Origin	Schmid & Partner Engineering AG Zeughausstrasse 43 8004 Zürich Switzerland Phone +41 44 245 9700, Fax +41 44 245 9779, support@speag.com

Use of the substance:

Liquid simulating physical parameters of Brain, Head or Muscle Tissue in the RF range below 2GHz.

2 Composition / Information on ingredients

The Item is composed of the following ingredients:

H ₂ O	Water, 35 – 55%
Sucrose	Sugar, white, refined, 40 – 60%
NaCl	Sodium Chloride, 0 – 6%
Hydroxyethyl-cellulose	Medium Viscosity (CAS# 9004-62-0), <0.3%
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1 – 0.7%

Relevant for safety; Refer to the respective Safety Data Sheet".

3 Hazards identification

Symbol	XI	Irritant
R-phrases:	36/38	Irritating to eyes and skin
	43	May cause sensitization by skin contact

4 First aid measures

After skin contact:	Wash off with plenty of water and soap
After eye contact:	Rinse out with plenty of water with the eyelid held open, call an ophthalmologist
After swallowing:	Make victim drink plenty of water, the mouth should be rinsed out several times. Do not induce vomiting.

5 Fire-fighting measures

Not required

6 Accidental release measures

Do not allow to enter sewerage system in large quantities, clean up affected area, forward for disposal. The preservative can be destroyed with sodiumhydrogensulfite. Add plenty of water if spilled.

7 Handling and storage

Handling: Keep in open container only for minimum required time in order to avoid water evaporation.
Storage: No special measures against fire or explosion required.



8 Exposure controls / personal protection

Eye protection: goggles

Hand protection: e.g. rubber or plastic gloves

Avoid contact with skin and eyes. Wash hands after working with substance.

9 Physical and chemical properties

Form: liquid
Colour: yellowish to light brown, transparent
Odour: odourless
pH-Value: neutral, with tendency to lower pH values.
Boiling point: 100°C
Density: 1.2 - 1.4 g/cm³

10 Stability and reactivity

No hazardous decomposition products expected.

11 Toxicological information

Irritation to skin and eyes: tendency to corrosive reaction.

In susceptible people, sensitization is possible.

12 Ecological information

Do not allow to enter waters, waste water, or soil.

In order to avoid adverse effects on the degradation activity of a sewage plant due to the preservative contained, the preservative concentration must not exceed 3mg/l, which up to 1000 times lower than the amount contained. Considerable amounts of water must therefore be added to amounts spilled into sewers or waste water.

13 Disposal considerations

Product: Chemicals must be disposed of in compliance with the respective national regulations.

Packing: Product packing must be disposed of in compliance with respect national regulations.

14 Transport information

Not subject to transport regulations.

No UN number is applicable

Avoid temperatures below 0°C. Keep separated from foodstuffs.

15 Regulatory information

Labeling according to EC Directives

Symbol	Xn	Irritant
R-phrases:	36/38	Irritating to eyes and skin
	43	May cause sensitization by skin contact

MAK value for the preservative is 0.05mg/m³, corresponding to a concentration of <25mg/m³ of the final product.

16 Other information

* Safety relevant information bases on:

[1] MBDS for Preventol D7 (Art.Nr.: 329049/08 by Bayer AG, Leverkusen, Germany)

Release date: 11.06.2009

Responsible: FB



TEST REPORT N° 112624-622708-K-Cr2012-10-22

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Measurement Certificate / Material Test

Item Name	Body Tissue Simulating Liquid (MSL 450)
Product No.	SL AAM 045 BC-A (Charge: 120206-1)
Manufacturer	SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated OCP probe (type DAK).

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

Test Condition

Ambient Condition 22°C ; 30% humidity
 TSL Temperature 22°C
 Test Date 8-Feb-12

Additional Information

TSL Density 1.226 g/cm³
 TSL Heat-capacity 3.001 kJ/(kg*K)

Results

f [MHz]	Measured			Target		Diff. to Target [%]	
	HP-ε'	HP-ε''	sigma	eps	sigma	Δ-eps	Δ-sigma
300	58.0	51.08	0.85	58.2	0.92	0.7	-7.3
325	58.1	48.44	0.87	58.0	0.92	0.2	-5.5
350	57.5	45.81	0.89	57.7	0.93	-0.3	-3.8
363	57.3	44.81	0.90	57.6	0.93	-0.5	-2.9
375	57.1	43.81	0.91	57.5	0.93	-0.6	-2.0
386	56.9	42.81	0.92	57.3	0.93	-0.6	-1.2
400	56.6	41.82	0.93	57.2	0.93	-1.0	-0.3
413	56.4	41.08	0.94	57.1	0.93	-1.1	0.7
425	56.2	40.34	0.95	57.0	0.94	-1.3	1.6
438	56.0	39.60	0.96	56.8	0.94	-1.5	2.6
450	55.8	38.86	0.97	56.7	0.94	-1.6	3.5
463	55.6	38.28	0.98	56.7	0.94	-1.8	4.5
475	55.4	37.70	0.99	56.6	0.94	-2.1	5.6
488	55.2	37.11	1.01	56.6	0.94	-2.3	6.6
500	55.0	36.53	1.02	56.5	0.94	-2.6	7.7
513	54.9	36.04	1.03	56.5	0.94	-2.8	8.7
525	54.7	35.56	1.04	56.4	0.95	-3.1	9.7
538	54.5	35.07	1.05	56.4	0.95	-3.3	10.6
550	54.3	34.58	1.06	56.3	0.95	-3.6	11.6
563	54.1	34.20	1.07	56.3	0.95	-3.8	12.7
575	54.0	33.82	1.08	56.2	0.95	-4.0	13.8
600	53.6	33.05	1.10	56.1	0.95	-4.4	15.9

