

Nemko USA, Inc.

2210 Faraday Ave, Suite 150
Carlsbad, CA 92008
Phone (760) 444-3500 Fax (760) 444-3005

**CERTIFICATION TEST REPORT**

Report Number: 2013 08241153 FCC

Project Number: Q10247985

Nex Number: 241153

Applicant: EXIGENT SENSORS LLC
11331 MARKON DR
Garden Grove CA 92841

Equipment Under Test (EUT): SMOKE ALARM

FCC ID: YST-NX14
Model: EX20 SMK, EX20-HT, EX20-AC SMK

IC: 9299A-NX14
Model: EX20C SMK, EX20C-AC SMK

In Accordance With: FCC Part 15 Subpart C, 15.247
IC RSS-210 Issue 8 December 2010
IC RSS-Gen Issue 3 December 2010

Tested By: Nemko USA Inc.
2210 Faraday Avenue, Suite 150
Carlsbad, CA 92008

A handwritten signature in blue ink, appearing to read "Alan Laudani".

ALAN LAUDANI, EMC/RF Test Engineer

Date: AUG. 2, 2013

Total Number of Pages: 33



Applicant Affirmation

Chad Christensen, representing Exigent Sensors LLC, hereby affirms:

- a) That he/she has reviewed and concurs that the test shown in this report are reflective of the operational characteristics of the device for which certification is sought;
- b) That the device in this test report will be representative of production units;
- c) That all changes (in hardware and software/firmware) to the subject device will be reviewed.
- d) That any changes impacting the attributes, functionality or operational characteristics documented in this report will be communicated to the body responsible for approving (certifying) the subject equipment.

Signature of official, July 29, 2013

Chad Christensen
Exigent Sensors LLC
11331 Markon Dr
Garden Grove CA 92841

(949) 439-1321
cchristensen@exigentsensors.com

NOTE—This affirmation must be signed by the responsible party before it is submitted to a regulatory body for approval.



Section1: Summary of Test Results

1.1 General

All measurements are traceable to national standards

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15; Subpart C and IC RSS-210. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC and IC.

The assessment summary is as follows:

Apparatus Assessed: Smoke Alarm

Model: EX20 SMK, EX20-HT, EX20-AC SMK
EX20C SMK, EX20C-AC SMK

Specification: FCC Part 15 Subpart C, 15.247
IC RSS-210 Issue 8 December 2010

Date Received in Laboratory: July 23, 2013

Compliance Status: Complies

Exclusions: None

Non-compliances: None



1.2 Report Release History

Revision	Date	Comments	
-	Aug. 2, 2013	Prepared By:	Alan Laudani
-	Aug. 2, 2013	Initial Release:	Alan Laudani

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025.

Nemko USA Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.



TABLE OF CONTENTS

Applicant Affirmation.....	2
Section1: Summary of Test Results	3
1.1 General	3
1.2 Report Release History.....	4
Section 2: Equipment Under Test.....	6
2.1 Product Identification	6
2.2 Theory of Operation.....	6
2.3 Technical Specifications of the EUT	7
Section 3: Test Conditions	8
3.1 Specifications	8
3.3 Test Environment.....	8
3.4 Test Equipment.....	9
Section 4: Observations	10
4.1 Modifications Performed During Assessment.....	10
4.2 Record Of Technical Judgements	10
4.3 EUT Parameters Affecting Compliance.....	10
4.4 Deviations From Laboratory Test Procedures.....	10
4.5 Test Deleted	10
4.6 Additional Observations.....	10
Section 5: Results Summary.....	11
5.1 Test Results	11
Appendix A: Test Results.....	12
Power Line Conducted Emissions Conducted Emissions	12
20 dB / 99% Bandwidth.....	16
Minimum 6dB RF Bandwidth.....	19
Spurious RF Conducted Emissions	23
Spurious Radiated Emissions	26
Power Spectral Density for Digitally Modulated Devices	29
Receiver Spurious Radiated Emissions	31



Section 2: Equipment Under Test

2.1 Product Identification

The Equipment Under Test was identified as follows: EX20-AC SMK

All models use the same oscillator, microcontroller, radio, antenna, and basic layout. Each of the Canadian models have identical hardware and software to the USA models, but have different labels. The battery-only models of the smoke alarms are simply de-populated versions of the AC with battery backup models. The carbon monoxide/heat alarms are nearly identical to the smoke/heat alarms, except that the smoke sensor is replaced with a carbon monoxide sensor. The heat alarm is a de-populated version of the smoke/heat alarm, not having AC power regulating components.

2.2 Theory of Operation

The EX20-AC SMK is a Smoke Alarm.

Its function is to alarm when the sensor reads heat and or smoke, and RF transmitting allows it to send the alarm to other units. It was tested standing alone. No special test support equipment was necessary. The product was modified for continuous transmitting by test software. Its normal state is stand-by and wakes every 4 seconds to receive. When triggered by a signal from another unit, it alarms. When not transmitting, it remains in Stand-by with minimum clock activity

Since the difference between the highest and lowest channels is less than 10 MHz, the lowest and highest channels were tested for all modes and required tests. Only 2 channel frequencies: 905.2, 913.2 MHz, software directs communication to use each channel in turn.

The nominal RF output is 10 dBm.

The lowest clock frequency is 100kHz, Radiated Spurious Emissions begin at this frequency.

The modulation type is GFSK. It does not have an antenna port and uses a circuit trace as an antenna of 0 dBi gain.

The EUT is powered by one 3 V Lithium battery or powered by 120 VAC with Battery back-up. The AC line is direct into the mounting junction box. It transmits while connected to the AC grid, so 15.207 testing applies. Industry Canada is quoted, therefore Conducted AC Emissions (15.107 class B limits) for stand-by or receive mode is required and was performed.

FCC ID: YST-NX14
IC: 9299A-NX14Report Number: 2013 08241153 FCC
Specification: FCC Part 15 Subpart C, 15.249

The EUT's performance during test was evaluated against the performance criterion specified by applicable test standards. Performance results are detailed in the test results section of this report

2.3 Technical Specifications of the EUT

Manufacturer: Exigent Sensors LLC

Operating Frequency: 905.2 MHz and 913.2 MHz
in the 902 to 928 MHz Band

Number of Operating Frequencies: 2

Rated Power: 7 mW

Modulation: FSK DTS/FHSS Hybrid

Reference Designator: 552KF1D

Antenna Connector: None, internal circuit board trace

Power Source: 120 Vac 60 Hz, Back up or Direct Function 3
VDC Lithium depending on model.



www.nemko.com



Section 3: Test Conditions

3.1 Specifications

The apparatus was assessed against the following specifications:

FCC Part 15 Subpart C, 15.247

Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5850 MHz and 24.0-24.25 GHz bands.

IC RSS-210 Issue 8 December 2010

Low-power Licence-exempt Radio-communication Devices (All Frequency Bands): Category I Equipment. Annex 8 - Frequency Hopping and Digital Modulation Systems Operating in the Bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

IC RSS-Gen Issue 3 December 2010

General Requirements and Information for the Certification of Radio-communication Equipment

3.3 Test Environment

All tests were performed under the following environmental conditions:

Temperature range	16-22°C
Humidity range	39-45%
Pressure range	102.0 – 102.3 kPa
Power supply range	48VDC nominal



3.4 Test Equipment

4

Asset Tag	Description	Manufacturer	Model	Serial #	Last Cal	Next Cal
111	Antenna, LPA	EMCO	3146	1382	09-Jan-2013	09-Jan-2014
529	Antenna, DRWG	EMCO	3115	2505	31-Oct-2012	31-Oct-2014
552	Antenna, Loop	EMCO	ALR-30M	820	14-Jan-2013	14-Jan-2014
814	Multimeter	Fluke	111	78130063	15-Oct-2012	15-Oct-2013
901	Preamplifier	Sonoma	310 N	130607	15-Oct-2012	15-Oct-2013
911	Spectrum Analyzer	Agilent	E4440A	US41421266	15-Oct-2012	15-Oct-2013
E1017	9kHz to 7GHz Spectrum Analyzer	Rohde & Schwarz	FSP7	839337/0022	18-Jun-2013	18-Jun-2014
E1019	Two Line V-Network	Rohde & Schwarz	ENV216	101045	13-Apr-2013	13-Apr-2014
E1046	Biconical Antenna	A.H. Systems Inc.	SAS-540	736	22-Apr-2013	22-Apr-2014
836	Signal Generator	Agilent	E8254A	US41140229	7-Mar-2013	7-Mar-2014
NA	10 dB Attenuator	Weinschell	24-10-24	NA	Verified	Verified

Registration of the 3m/10m Semi-anechoic chamber is on file with the Federal Communications Commission and with Industry Canada under Site Number 2040B-3.



Section 4: Observations

4.1 Modifications Performed During Assessment

No modifications were performed during assessment.

4.2 Record Of Technical Judgements

No technical judgements were made during the assessment.

4.3 EUT Parameters Affecting Compliance

The user of the apparatus could not alter parameters that would affect compliance.

4.4 Deviations From Laboratory Test Procedures

No deviations from Laboratory Test Procedure

4.5 Test Deleted

No Tests were deleted from this assessment.

4.6 Additional Observations

There were no additional observations made during this assessment.



Section 5: Results Summary

This section contains the following:

FCC Part 15 Subpart C:

IC RSS-210 Issue 7 June 2007 Annex 8

IC RSS-Gen Issue 2 June 2007

The column headed "Required" indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

N No: not applicable / not relevant

Y Yes: Mandatory i.e. the apparatus shall conform to these tests.

N/T Not Tested, mandatory but not assessed. (See section 4.4 Test deleted)

The results contained in this section are representative of the operation of the apparatus as originally submitted.

5.1 Test Results

Part 15C	RSS-210	Test Description	Required	Result
15.207 (a)	RSS-Gen 7.2.4	Conducted Emission Limit	Y	Pass
15.215(c)	RSS-Gen 4.6.1	20 dB & 99% Bandwidth	Y	Pass
15.247(a)(2)	RSS-210 A8.2 (a)	Minimum 6dB RF Bandwidth	Y	Pass
15.247(b)(3)	RSS-210 A8.4 (4)	Peak Output Power	Y	Pass
15.247(d)	RSS-210 A8.5	Band-edge Compliance of RF Conducted Emissions	Y	Pass
15.247 (d)	RSS-210 A8.5	Spurious RF Conducted Emissions	Y	Pass
15.247 (d)	RSS-210 A8.5	Spurious Radiated Emissions	Y	Pass
15.247(e)	RSS-210 A8.2 (b)	Power Spectral Density for Digitally Modulated Devices	Y	Pass
	RSS-Gen 4.10	Receiver Spurious Emissions	Y	Pass


Appendix A: Test Results

Power Line Conducted Emissions Conducted Emissions

Client	Exigent Sensors	Temperature	23	°C
Nex #	241153	Relative Humidity	57	%
EUT Name	Smoke Alarm	Barometric Pressure	100.6	kPa
EUT Model	EX20-AC SMK	Test Location	Enclosure 1	
Governing Doc	CFR 47, Part 15C	Test Engineer	ALAN LAUDANI	
Basic Standard	Sec. 15.207 Transmit with Alarm RSS-Gen 7.2.4	Date of test	7-23-2013	
Test Parameters	Peak RBW: 100kHz VBW: 100kHz Quasi-Peak CIRCLE: RBW 9kHz, VBW 30 kHz Average X: RBW 9kHz, VBW 30 kHz Quasi-Peak Limit Blue Line, Average Limit Green Line			


Transmit—low channel

Nemko USA, Inc.
120VAC @ 60Hz, High Line PK, QP = 0, AV = X
FCC Class B, Conducted Emissions

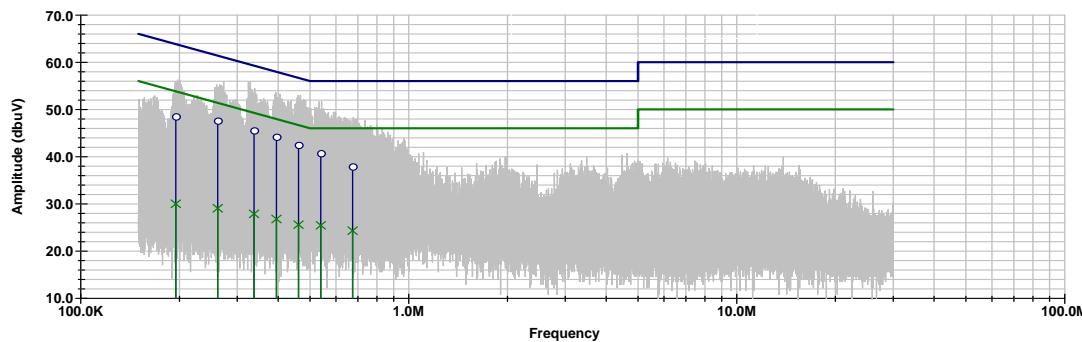

04:50:50 PM, Tuesday, July 23, 2013


Nemko USA, Inc.
120VAC @ 60Hz, Neutral Line PK, QP = 0, AV = X
FCC Class B, Conducted Emissions

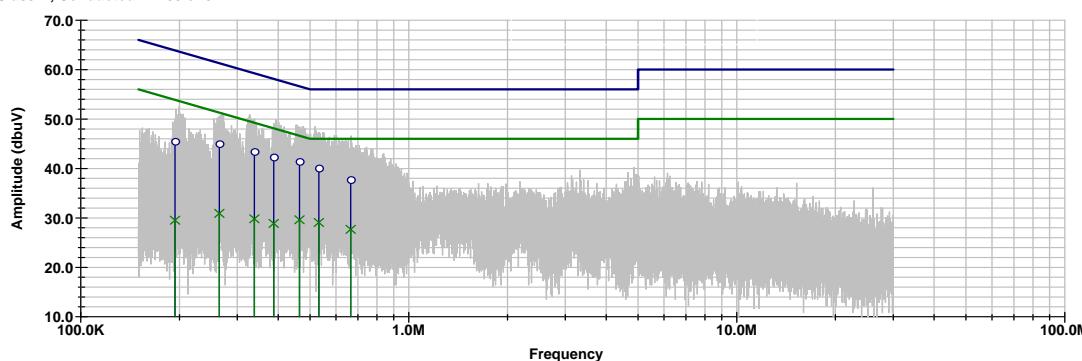


05:02:03 PM, Tuesday, July 23, 2013

**Tabulated values Transmit with Alarm**

Line 1	Corrected Values		Limit		Margin	
	Freq. kHz	Quasi-Peak	Average	Quasi- Peak	Average	Quasi- Peak
674.174	37.1	23.6	56	46	-18.9	-22.4
529.328	40.1	25.1	56	46	-15.9	-20.9
455.293	41.9	25.4	57.3	46.8	-15.4	-21.4
392.345	43	26.3	59.1	48	-16.1	-21.7
335.062	42.2	25.9	60.7	49.3	-18.5	-23.4
261.313	45.8	28.5	62.8	51.4	-17	-22.9
194.906	47.2	30.2	64.7	53.8	-17.5	-23.6
<hr/>						
Line 2						
665.049	37.7	27.7	56	46	-18.3	-18.3
531.753	40.1	29.1	56	46	-15.9	-16.9
464.107	41.4	29.6	57	46.6	-15.6	-17
387.526	42.3	28.9	59.2	48.1	-16.9	-19.2
338.206	43.4	29.8	60.6	49.2	-17.2	-19.4
264.476	45	30.9	62.7	51.3	-17.7	-20.4
193.75	45.5	29.5	64.8	53.9	-19.3	-24.4

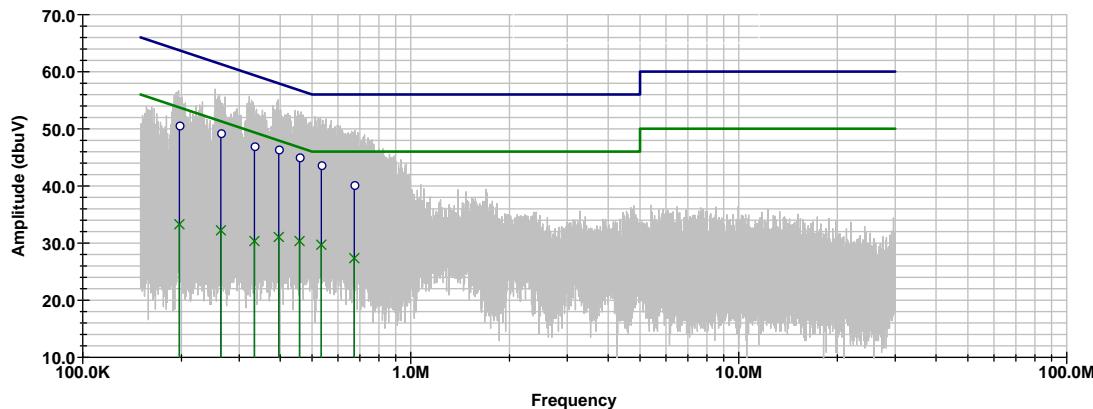Transmit High Channel**Nemko USA, Inc.**120VAC @ 60Hz, Neutral Line PK, QP = 0, AV = X
FCC Class B, Conducted Emissions**Transmit High Channel**

05:12:33 PM, Tuesday, July 23, 2013

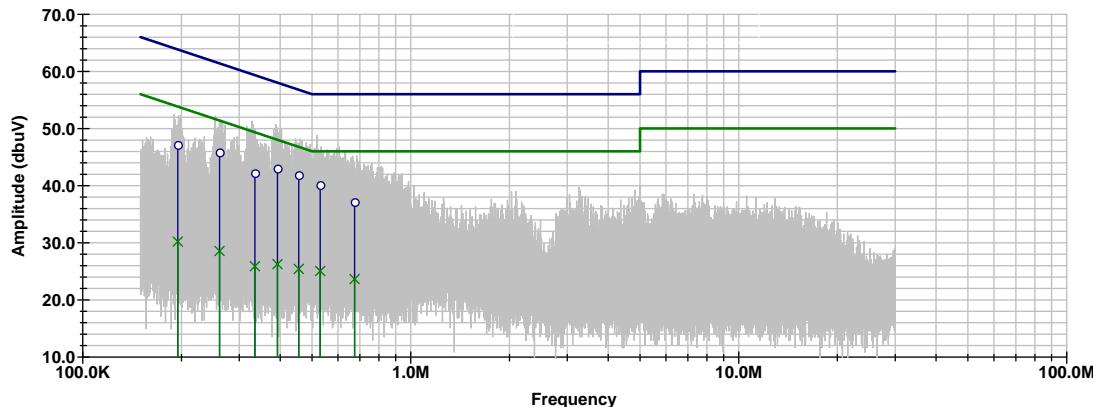Nemko USA, Inc.120VAC @ 60Hz, High Line PK, QP = 0, AV = X
FCC Class B, Conducted Emissions**Transmit High Channel**

05:21:07 PM, Tuesday, July 23, 2013

**Tabulated values Receive**

Line 1	Corrected Values		Limit		Margin	
	Freq. kHz	Quasi-Peak	Average	Quasi- Peak	Average	Quasi- Peak
674.105	37.9	24.3	56	46	-18.1	-21.7
539.613	40.7	25.4	56	46	-15.3	-20.6
461.266	42.5	25.6	57.1	46.7	-14.6	-21.1
395.062	44.2	26.8	59	48	-14.8	-21.2
337.651	45.6	27.9	60.6	49.3	-15	-21.4
261.677	47.6	29.1	62.8	51.4	-15.2	-22.3
194.886	48.5	30	64.7	53.8	-16.2	-23.8
<hr/>						
Line 2						
673.029	40.2	27.4	56	46	-15.8	-18.6
533.935	43.7	29.7	56	46	-12.3	-16.3
458.263	45	30.4	57.2	46.7	-12.2	-16.3
395.806	46.4	31.1	59	47.9	-12.6	-16.8
333.614	47	30.3	60.8	49.4	-13.8	-19.1
263.86	49.3	32.2	62.7	51.3	-13.4	-19.1
197.128	50.6	33.3	64.7	53.7	-14.1	-20.4

20 dB / 99% Bandwidth

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Conditions:



Sample Number:	EX20-AC SMK	Temperature:	21°C
Date:	Aug. 2, 2013	Humidity:	39%
Modification State:	Low and High Channel	Tester:	Alan Laudani
Laboratory:			Nemko

Test Results: See attached plots.

Additional Observations:

- This was a conducted test.
- Span is wide enough to capture the channel transmission
- RBW is 1% of the span
- VBW is 3X RBW
- Sweep is auto
- Detector is Peak
- Trace is Max Hold
- 99% bandwidth: Used Spectrum Analyzer's programmed function.
- 20 dB bandwidth: A peak output max hold reading was taken, a display line was drawn 20 dB lower than peak level. The 20 dB bandwidth was determined from where the channel output spectrum intersected the display line.
- Observed maximum 20 dB BW is 1017 kHz (low channel).
- Observed maximum 20 dB BW is 992 kHz (high channel).
- $905.2 \text{ MHz} - (1.017/2) \text{ MHz} = 904.6915 \text{ MHz}$ (within the frequency band)
- $913.2 \text{ MHz} + (0.992/2) \text{ MHz} = 913.696 \text{ MHz}$ (within the frequency band)

Frequency	20 dB BW	99% BW
905.2 MHz	1017 kHz	552 kHz
913.2 MHz	992 kHz	545 kHz

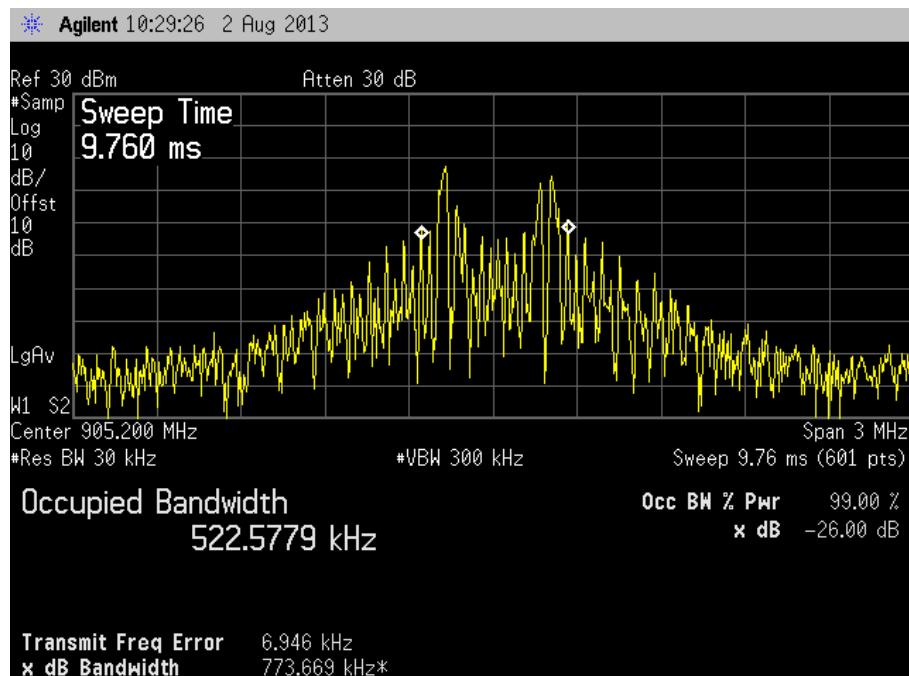
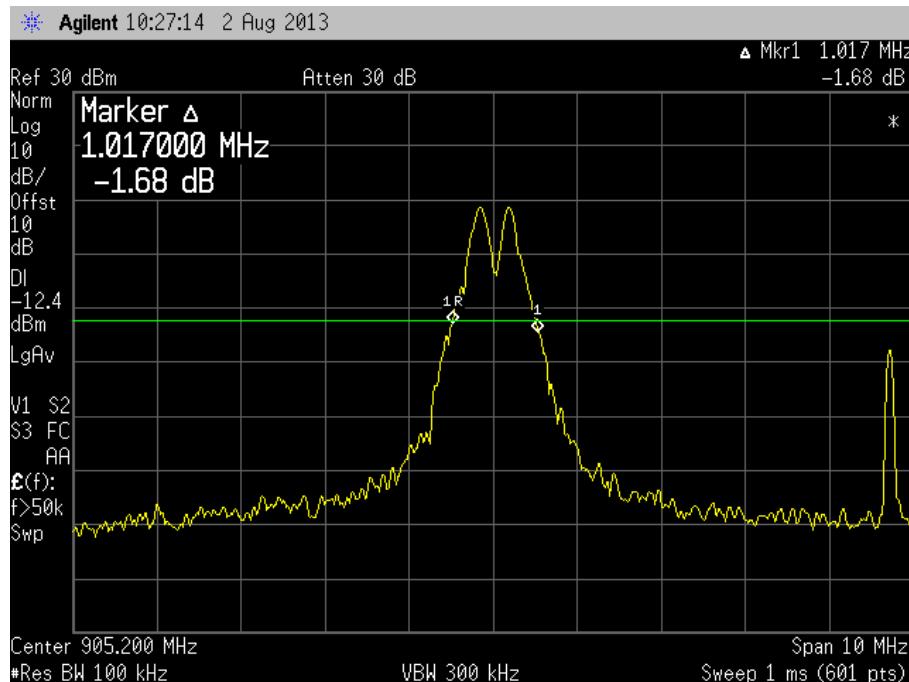
FCC ID: YST-NX14
IC: 9299A-NX14Report Number: 2013 08241153 FCC
Specification: FCC Part 15 Subpart C, 15.249

Nemko USA, Inc.

2210 Faraday Avenue, Suite 150, Carlsbad, CA 92008
Phone (760) 444-3500 Fax (760) 444-3005

FCC ID: YST-NX14
IC: 9299A-NX14

Report Number: 2013 08241153 FCC
Specification: FCC Part 15 Subpart C, 15.249

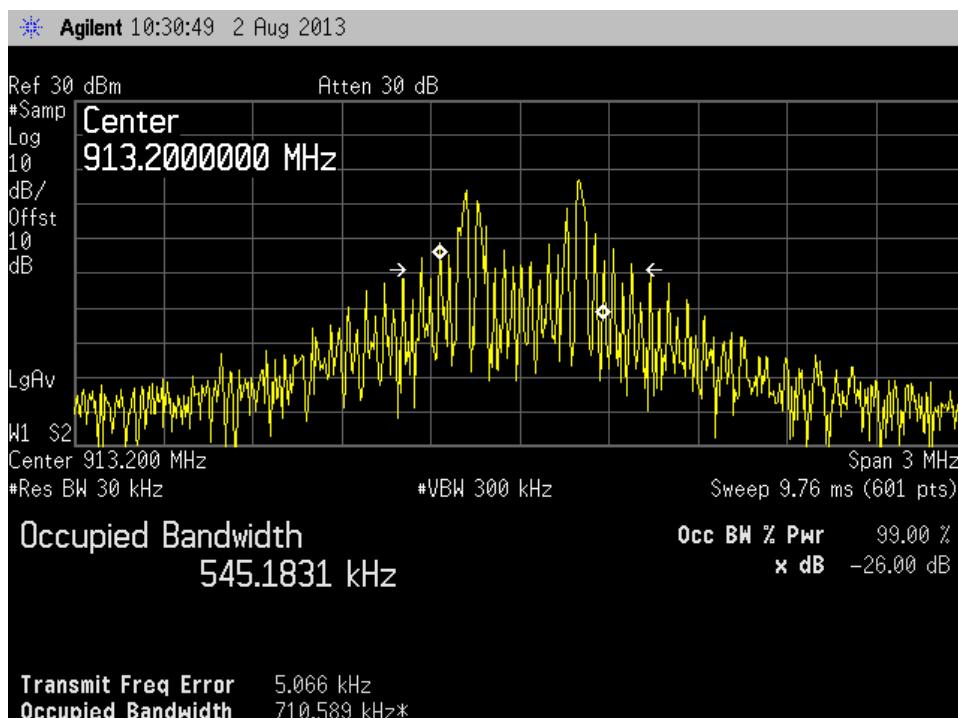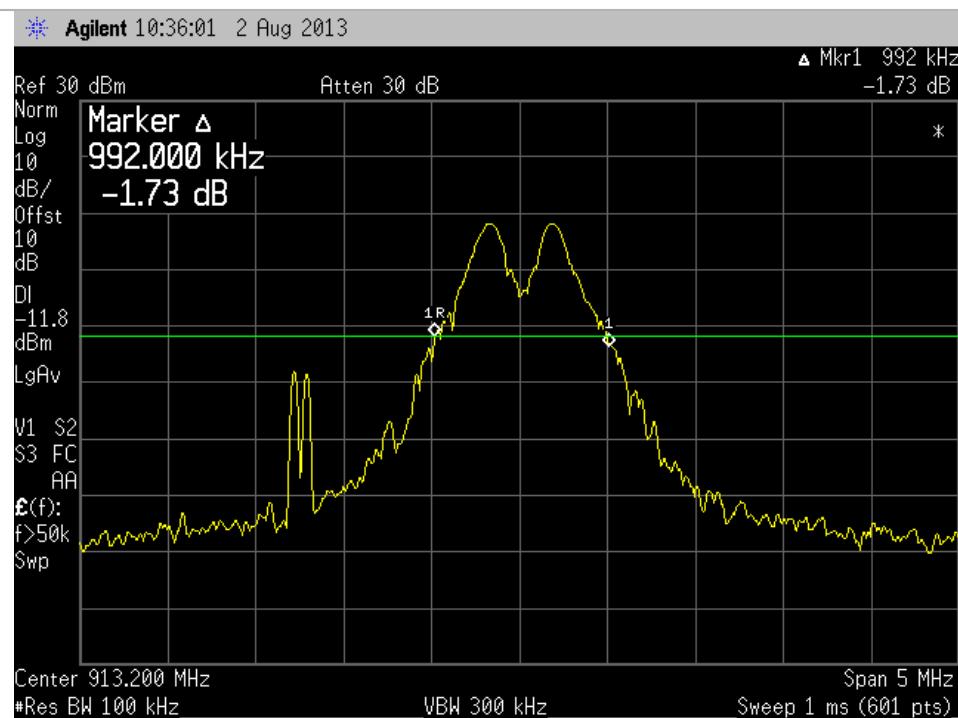

www.nemko.com

**Minimum 6dB RF Bandwidth**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Conditions:

Sample Number:	EX20-AC SMK	Temperature:	21°C
Date:	Aug. 2, 2013	Humidity:	39%
Modification State:	Low, Mid and High Channel	Tester:	Alan Laudani

Laboratory:

Nemko

Test Results: EUT complies, See attached plots.

Additional Observations:



- This is a conducted test
- RBW is set to 100kHz
- VBW is 3X RBW
- Sweep is auto
- Detector is Peak
- Trace is Max Hold
- For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was plotted; a DISPLAY line was drawn 6 dB lower than PEAK level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.
- EUT complies as 6 dB BW > 500 kHz

905.2 MHz: Observed 6 dB Bandwidth is 0.558 MHz

913.5 MHz: Observed 6 dB Bandwidth is 0.575 MHz

FCC ID: YST-NX14
IC: 9299A-NX14

Report Number: 2013 08241153 FCC
Specification: FCC Part 15 Subpart C, 15.249

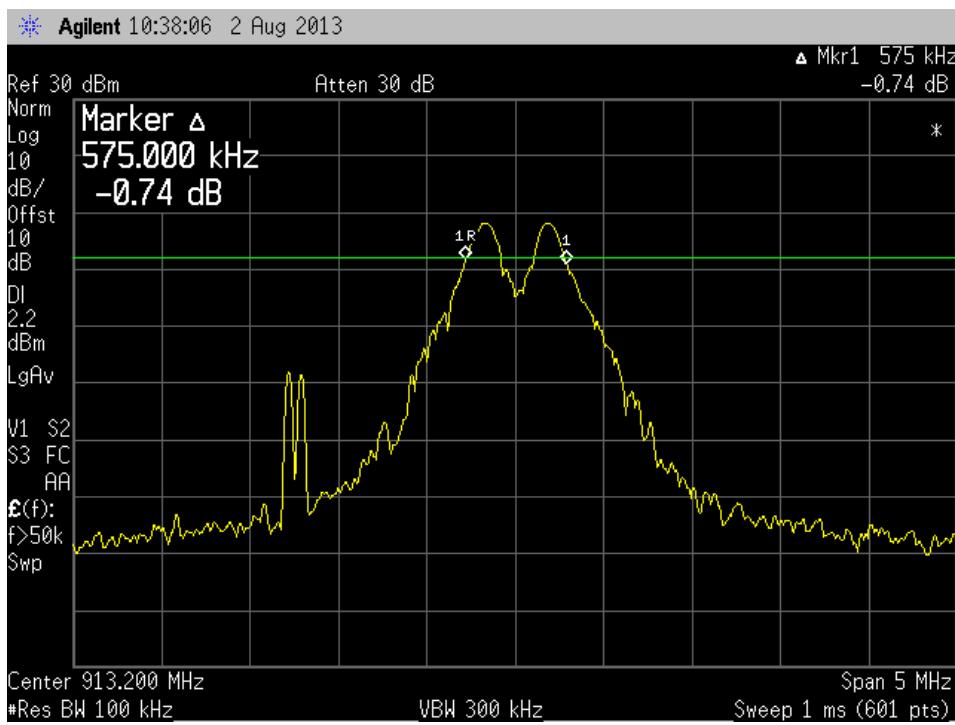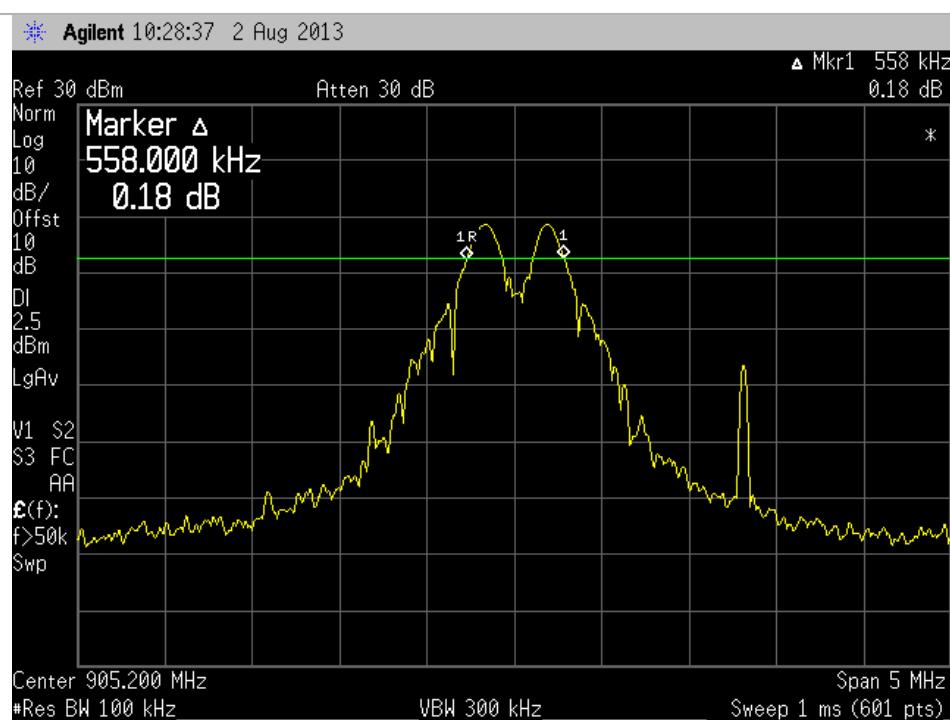



Peak Output Power

(3) For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

Test Conditions:

Sample Number:	EX20-AC SMK	Temperature:	23°C
Date:	Aug. 2, 2013	Humidity:	59%
Modification State:	Low and High Channel	Tester:	Alan Laudani
		Laboratory:	Nemko

Test Results: EUT Complies

See attached plots.


Additional Observations:

- This is a conducted test. 10.0 dB was offset for the attenuator used.
- Input voltage to the EUT was varied from 120 Vac +/-15%. It was repeated with a fresh battery under back up battery power. No variation in results observed.
- RBW = 1 MHz; VBW = 3 MHz.
- Max Hold, Peak


Channel Range	Peak Power Output (dBm)	Antenna Gain	Peak Power Output (W)	EIRP (W)
905.2 MHz	8.52	0 dBi	0.007	0.007
913.2 MHz	8.19	0 dBi	0.007	0.007

Test Plots:

Low Channel

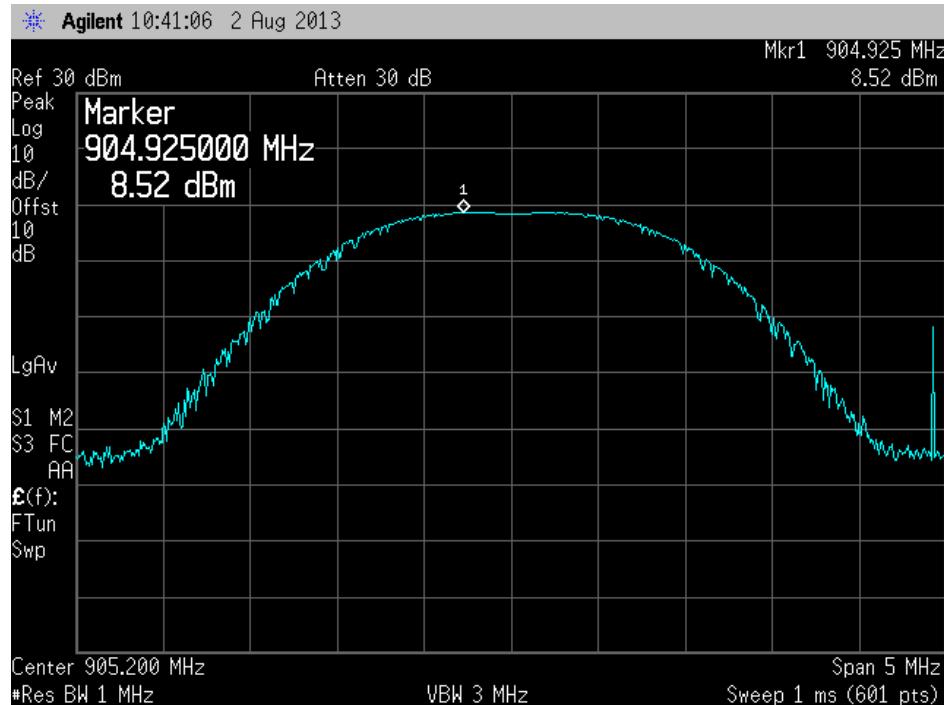

High Channel

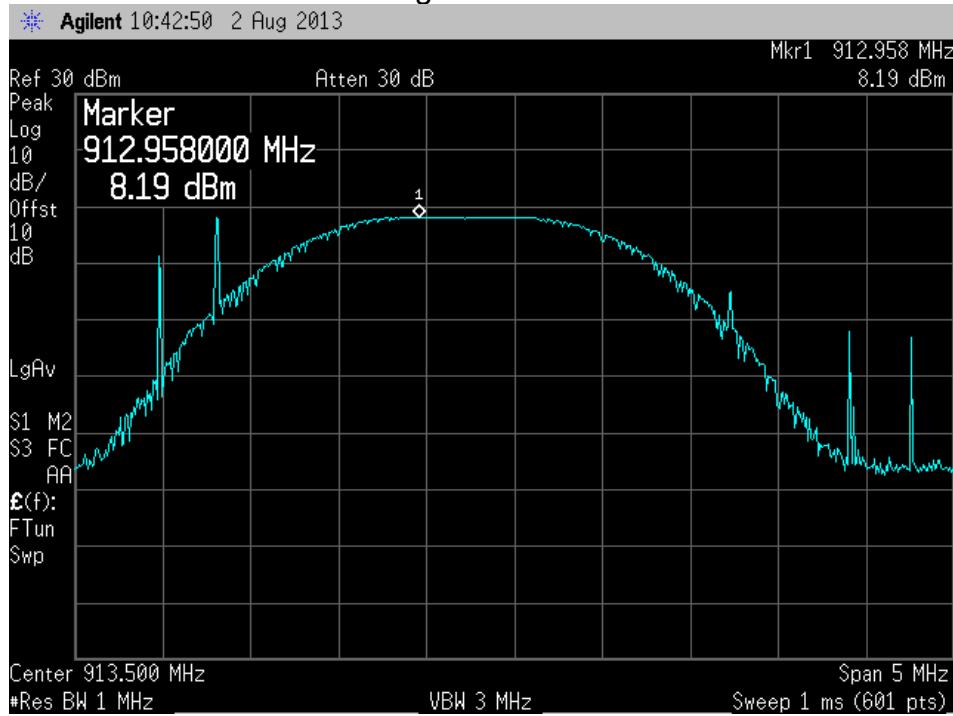



Spurious RF Conducted Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Conditions:

Sample Number:	EX20 SMK	Temperature:	25°C
Date:	7/29/2013	Humidity:	59%
Modification State:	Low and High Channel	Tester:	ALAN LAUDANI
		Laboratory:	3m SAC

Test Results: EUT complies in AC mode and Battery mode for Digital Emission and RF Transmit Harmonics

- RBW = 120 kHz, VBW = 300 kHz, peak hold.
- No peaks were evident so Quasi-peak measurements were deemed unnecessary
- Fresh batteries were used during assessment of Back-up Battery Mode
- RF Transmit Harmonics were deemed worst case in AC powered mode.


Sample Computation (Radiated Emissions Data Sheet):

Average Result @ 7305.6 MHz


Corrected reading



$$\begin{aligned} \text{Correction factor} &= 7.1 \text{ dB}\mu\text{V/m} \\ &= \text{Antenna factor} + \text{Cable loss} - \text{Preamp gain} \\ &= 36.5 + 13.6 - 42.9 = 7.2 \text{ dB}\mu\text{V/m} \\ &= \text{Max reading} + \text{Correction factor} + \text{DCCF} \\ &= 52.6 + 7.2 - 6.3 \\ &= 53.5 \text{ dB}\mu\text{V/m} \end{aligned}$$

AC mode for Digital Emissions

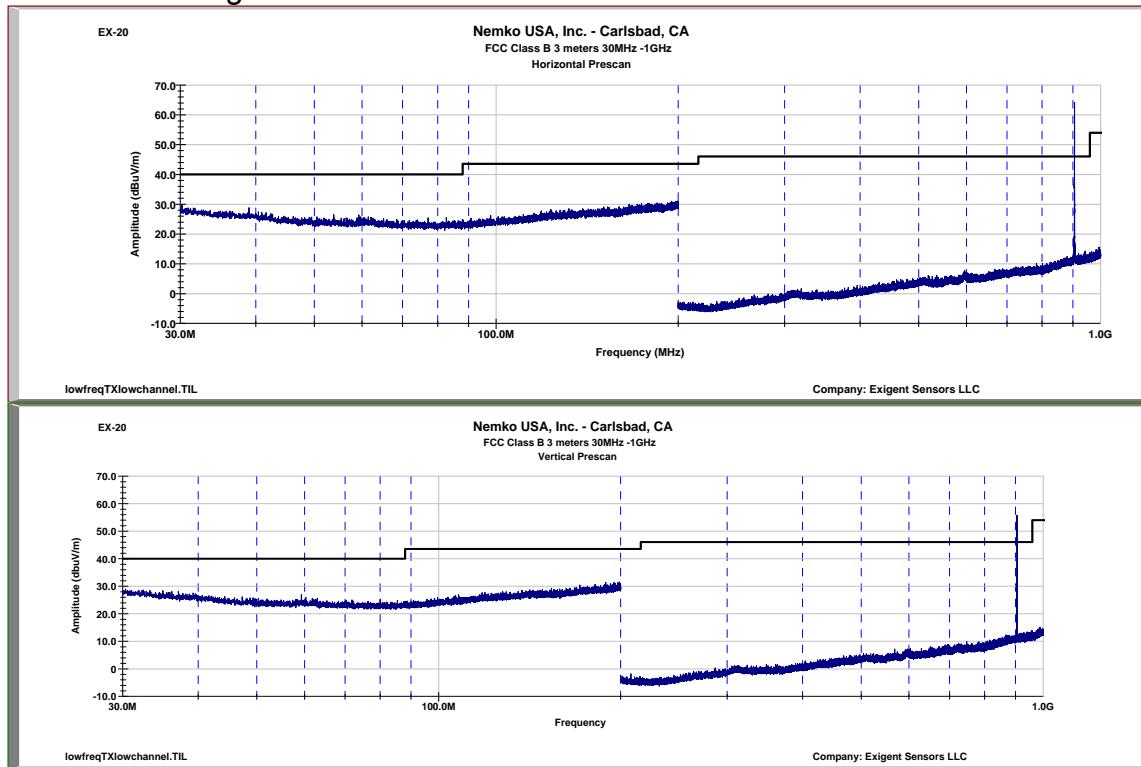

Battery mode for Digital Emission

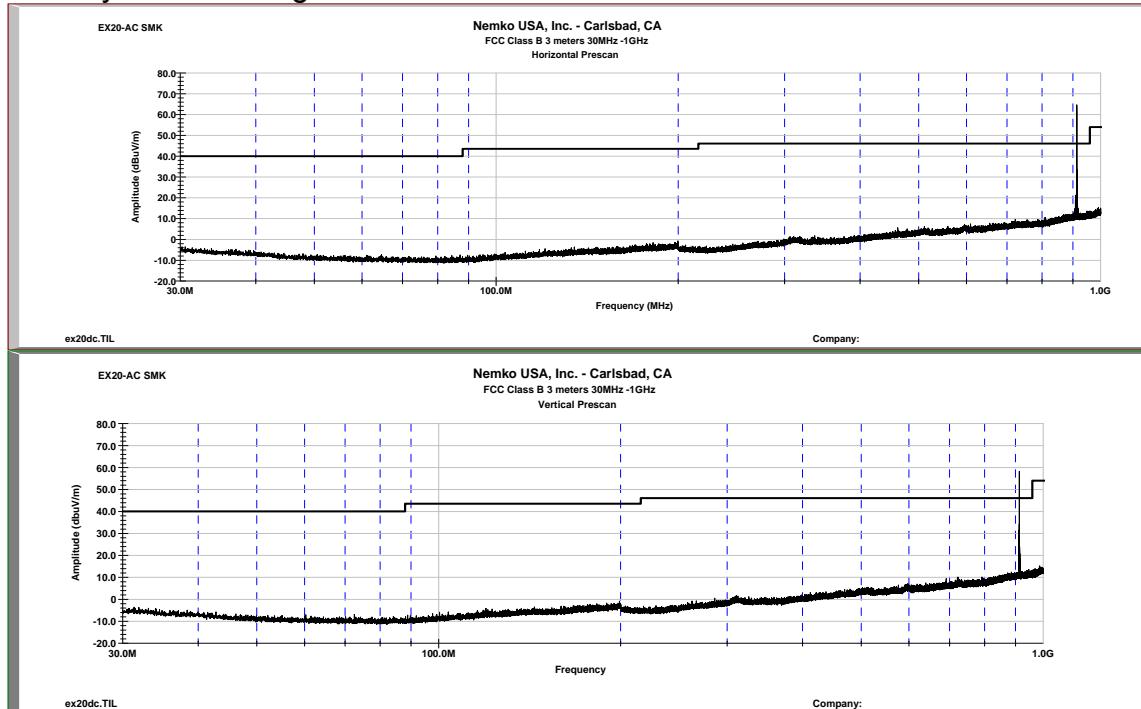

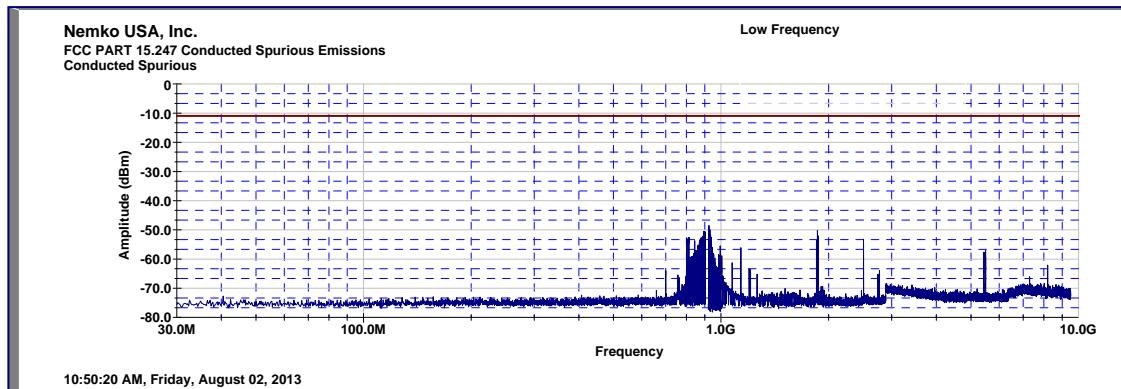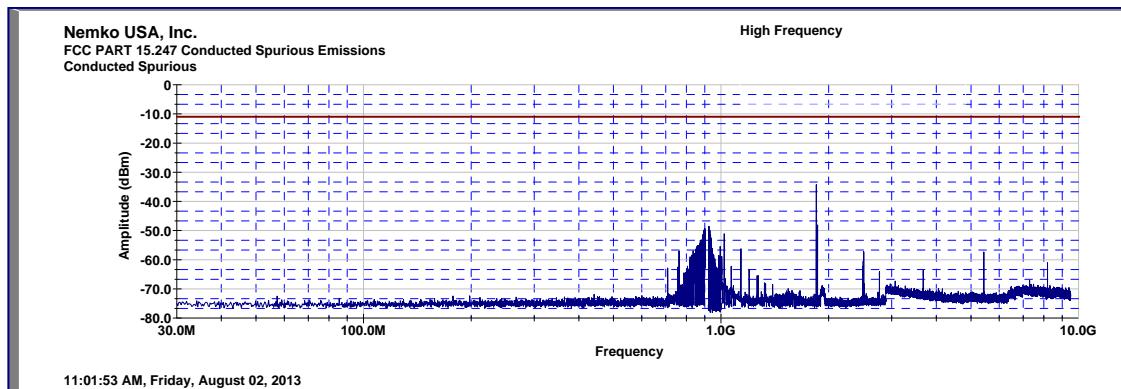FCC ID: YST-NX14
IC: 9299A-NX14Report Number: 2013 08241153 FCC
Specification: FCC Part 15 Subpart C, 15.249**Conducted RF Harmonics****905.2 MHz****913.2 MHz**



Spurious Radiated Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Conditions:

Sample Number:	EX20-AC SMK	Temperature:	22°C
Date:	Aug. 2, 2013	Humidity:	57%
Modification State:	Transmit with modulation	Tester:	Alan Laudani
		Laboratory:	Nemko


Test Results: EUT complies.

Emissions were searched from 30MHz to 9500 MHz, no other emissions within 20 dB of the limit were detected.

Peak hold measurements.

Harmonic measurements were made with EUT in worst case physical mounting orientation of horizontal.

Duty Cycle

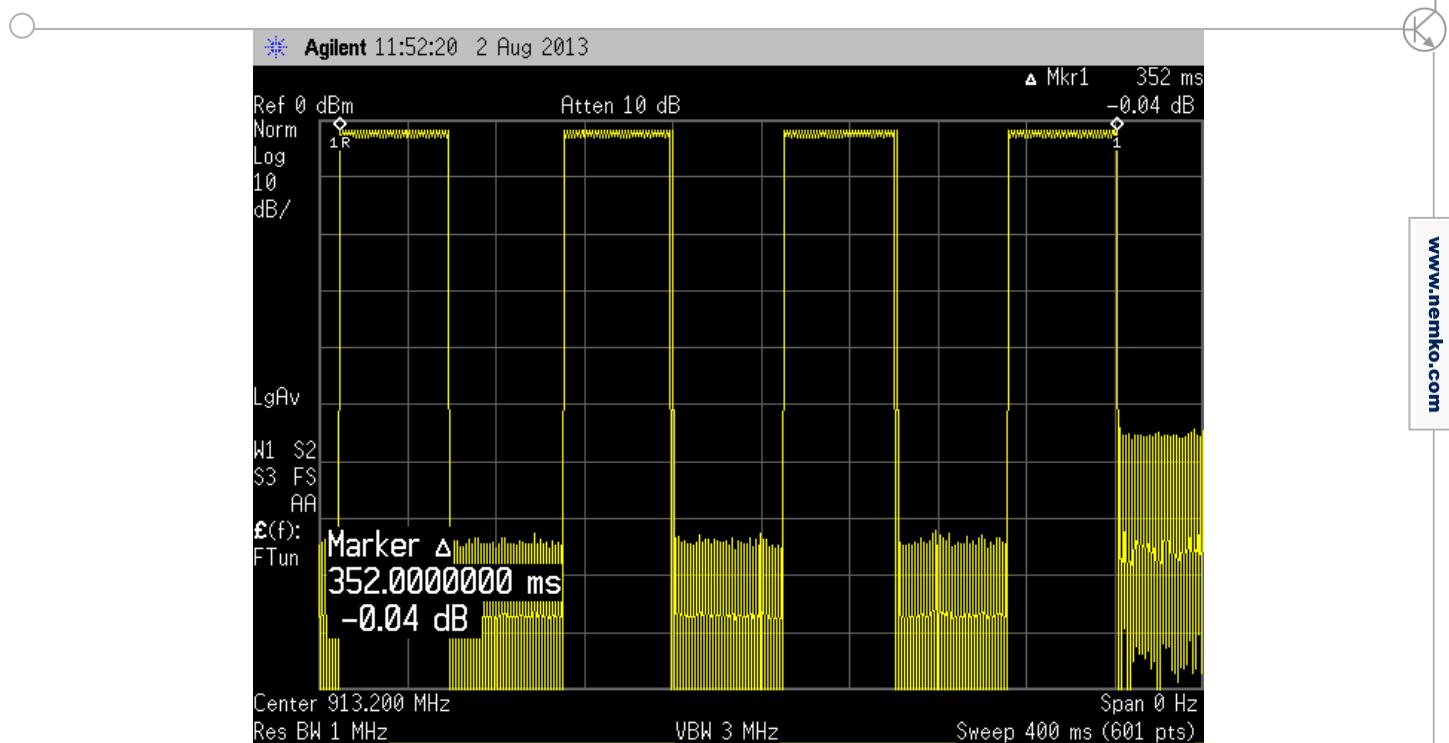FCC ID: YST-NX14
IC: 9299A-NX14Report Number: 2013 08241153 FCC
Specification: FCC Part 15 Subpart C, 15.249DCCF = Duty Cycle Correction Factor = $20 \times \log 48.67\text{ms}/100\text{ms} = -6.3 \text{ dB}$

EX20-AC SMK

Radiated Spurious in the Restricted Bands



Power Spectral Density for Digitally Modulated Devices

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Conditions:

Sample Number:	EX20 SMK	Temperature:	21°C
Date:	August 2, 2013	Humidity:	39%
Modification State:	Low and High Channel	Tester:	Alan Laudani
Laboratory:			Nemko



Test Results:

See attached plots.

Additional Observations:

This is a conducted test. 10 dB was offset for the attenuator used.

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 100 kHz.
3. Set the VBW \geq 300 kHz.
4. Set the span to 5-30 % greater than the EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
10. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100 \text{ kHz}) = -15.2 \text{ dB}$.
11. The resulting peak PSD level must be $\leq 8 \text{ dBm}$.

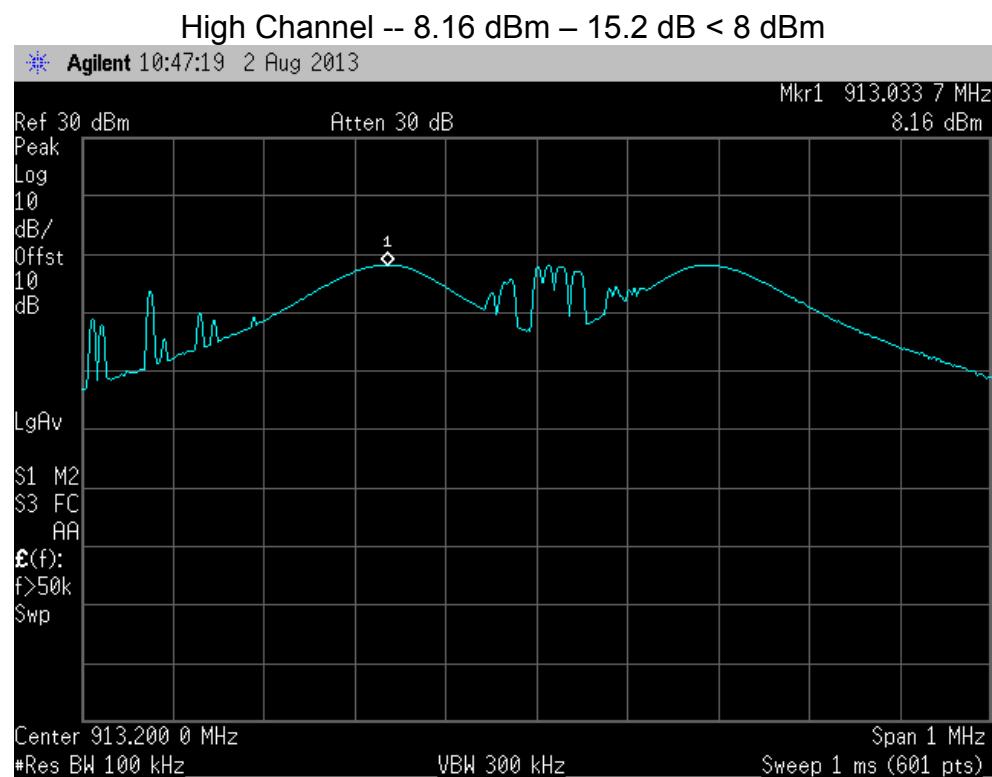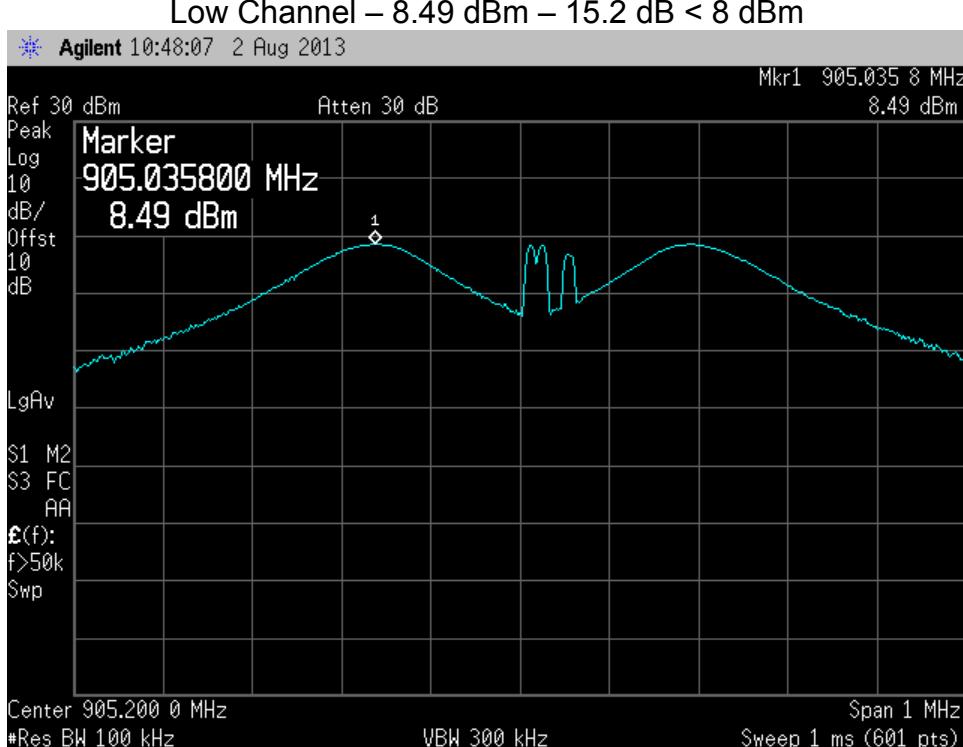FCC ID: YST-NX14
IC: 9299A-NX14Report Number: 2013 08241153 FCC
Specification: FCC Part 15 Subpart C, 15.249



Receiver Spurious Radiated Emissions

The following receiver spurious emission limits shall be complied with:
(a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1.

Table 1 - Spurious Emission Limits for Receivers

Spurious Frequency (MHz)	Field Strength (microvolt/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960	500

Test Conditions:


Sample Number:	EX20-AC SMK	Temperature:	21°C
Date:	Aug. 2, 2013	Humidity:	39%
Modification State:	Receive mode	Tester:	Alan Laudani
Laboratory:			Nemko

Test Results:

See attached test result.

Additional Observations:

- The Spectrum was searched from 30MHz to 5000 MHz.
- EUT operated on “test receive mode”.
- Below 1GHz measurements are measured using CISPR quasi-peak detector while above 1GHz are measured using average detector with 1MHz RBW. No emissions close enough to the limit to warrant QP measurements to be made.

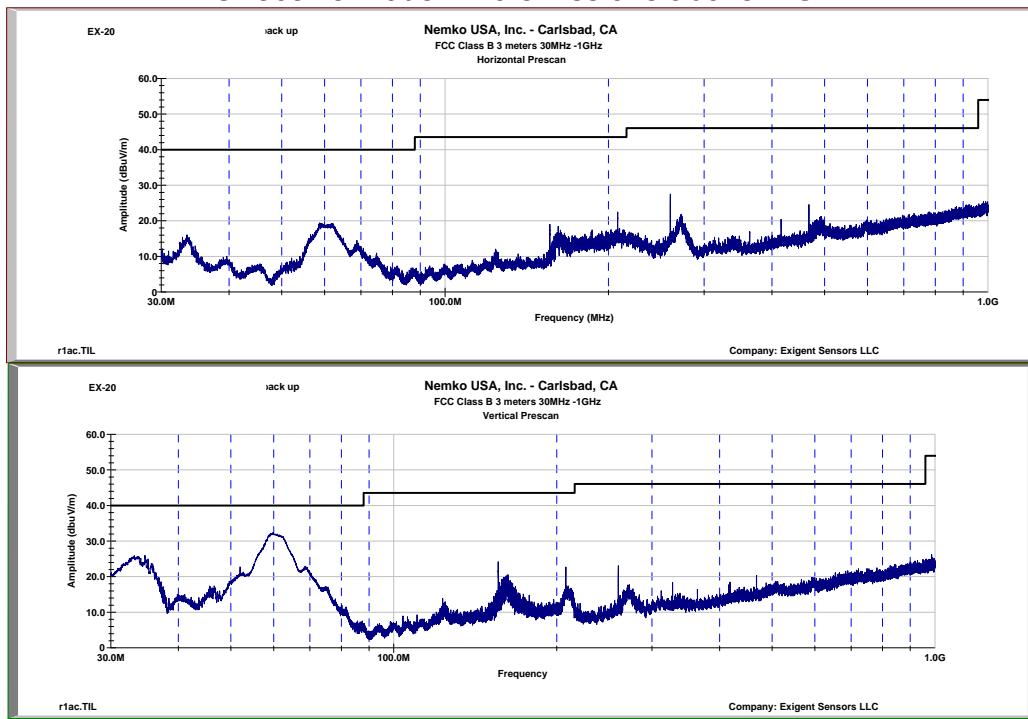FCC ID: YST-NX14
IC: 9299A-NX14Report Number: 2013 08241153 FCC
Specification: FCC Part 15 Subpart C, 15.249www.nemko.com**AC receive mode—No emissions above 1 GHz****DC receive mode—No emissions above 1 GHz**