

Page:

Report No.: SZEM150200081802

1 of 24

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

1

FCC REPORT

Test Result:	PASS *
Date of Issue:	2015-04-07
Date of Test:	2015-03-16 to 2015-04-01
Date of Receipt:	2015-03-13
Standards:	47 CFR Part 15, Subpart C (2014)
FCC ID:	YTT-FLX100
Trade Mark:	Flextone
Model No.(EUT):	FLX100
Product Name:	Vengeance High Definition E-game Call
Factory:	WGI Innovations, Ltd.
Applicant: Manufacturer:	WGI Innovations, Ltd. Jianhui Plastic & Electronic Industry (Shenzhen) Co. Ltd.
Application No.:	SZEM1502000818CR

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM150200081802 Page: 2 of 24

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2015-04-07		Original

Authorized for issue by:		
Tested By	(Owen Zhou) /Project Engineer	2015-04-01
Prepared By	Sade Wo. (Sade Luo) /Clerk	2015-04-07
Checked By	Emen _ Li (Emen Li) /Reviewer	2015-04-07

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150200081802 Page: 3 of 24

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antonno Boguiromont	47 CFR Part 15, Subpart C Section		PASS
Antenna Requirement	15.203	ANSI C63.10(2009)	FA00
Field Strength of the	47 CFR Part 15, Subpart C Section	ANSI C63.10(2009)	PASS
Fundamental Signal	15.231 (b)	ANSI C63.10(2009)	FA00
Spurious Emissions	47 CFR Part 15, Subpart C Section		PASS
Spurious Emissions	15.231 (b)/15.209	ANSI C63.10(2009)	
20dB Bandwidth	47 CFR Part 15, Subpart C Section		PASS
	15.231 (c)	ANSI C63.10(2009)	PA55
Dwell Time	47 CFR Part 15, Subpart C Section		DACC
	15.231 (a)	ANSI C63.10(2009)	PASS



Report No.: SZEM150200081802 Page: 4 of 24

4 Contents

Page

			-
1	COV	/ER PAGE	1
2	VER	SION	2
3	TES	T SUMMARY	3
4	CON	ITENTS	4
5	GEN	IERAL INFORMATION	5
	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10	CLIENT INFORMATION	5 6 6 7 7 7 7 8
6	TES 6.1 6.2 <i>6.2.2</i> 6.3 6.4		10 11 <i>11</i> <i>13</i> 19
7	PHC	DTOGRAPHS - TEST SETUP	23
	7.1	RADIATED EMISSION	23
8	PHC	TOGRAPHS - EUT CONSTRUCTIONAL DETAILS	24





Report No.: SZEM150200081802 Page: 5 of 24

5 General Information

5.1 Client Information

Applicant:	WGI Innovations, Ltd.
Address of Applicant:602 Fountain Parkway Grand Prairie, TX, 75050, USA	
Manufacturer:	Jianhui Plastic & Electronic Industry (Shenzhen) Co. Ltd.
Address of Manufacturer:	No. 127 Sili Road, Guanlan Zhen, Baoan District, Shenzhen, P.R.C
Factory:	WGI Innovations, Ltd.
Address of Factory:	602 Fountain Parkway Grand Prairie, TX, 75050, USA

5.2 General Description of EUT

Product Name:	Vengeance High Definition E-game Call
Mode No.:	FLX100
Trade Mark:	Flextone
Sample Type:	Portable production
Operation Frequency:	433.92MHz
Transmitter/ Receiver Band width	1.8KHz (manufacturer declared)
Modulation Type:	ASK
EUT Function:	Vengeance High Definition E-game Call
Antenna Type:	Integral
Antenna Gain:	0dBi
Power Supply:	Input voltage:
	DC 4.5 V (1.5V x 3 "AAA" Size Battery) for RX
	DC 12 V (1.5V x 8 "AA" Size Battery) for TX
Battery:	DC 4.5V for TX DC12 V for RX

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's company's client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150200081802 Page: 6 of 24

5.3 Test Environment and Mode

Operating Environment:		
Temperature:	26.0 °C	
Humidity:	Humidity: 52 % RH	
Atmospheric Pressure: 1020 mbar		
Test mode:		
Transmitting mode:Keep the EUT in transmitting mode with modulation.		

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

SGS

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM150200081802 Page: 7 of 24

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

• Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM150200081802 Page: 8 of 24

5.10 Equipment List

	RE in Chamber				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	Coaxial cable	SGS	N/A	SEL0027	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0189	2015-05-29
6	Coaxial cable	SGS	N/A	SEL0121	2015-05-29
7	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
8	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24
9	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24
10	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16
11	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24
12	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
13	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
14	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24
15	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24
16	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16
17	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04



Report No.: SZEM150200081802 Page: 9 of 24

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16
8	Band filter	amideon	82346	SEL0094	2015-05-16
9	POWER METER	R & S	NRVS	SEL0144	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM150200081802 Page: 10 of 24

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203		
15.203 requirement:	15.203 requirement:		
An intentional radiator shall t	be designed to ensure that no antenna other than that furnished by the		
responsible party shall be us	ed with the device. The use of a permanently attached antenna or of an		
antenna that uses a unique o	coupling to the intentional radiator, the manufacturer may design the unit		
so that a broken antenna car	n be replaced by the user, but the use of a standard antenna jack		
or electrical connector is pro	hibited.		
erelectrical connector is prohibited.			
The antenna is integrated on	the main PCB and no consideration of replacement. The best case gain		
of the antenna is 0dBi.			



Report No.: SZEM150200081802 Page: 11 of 24

6.2 Spurious Emissions


6.2.1 Duty Cycle

Test Requirement:	47 CFR Part 15C Section 15.35 (c)				
Test Method:	ANSI C63.10:2009				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane				
Limit:	N/A				
Test Mode:	Transmitting mode				
Instruments Used:	Refer to section 5.10 for details				
Test Results:	Pass				

Measurement data:	
Calculate Formula:	PDCF=20 log(Duty cycle)
	Duty cycle= T on time / T period
	Ton time =18.51ms
Test data:	T period =36.83ms
	PDCF= -5.98



Report No.: SZEM150200081802 Page: 12 of 24

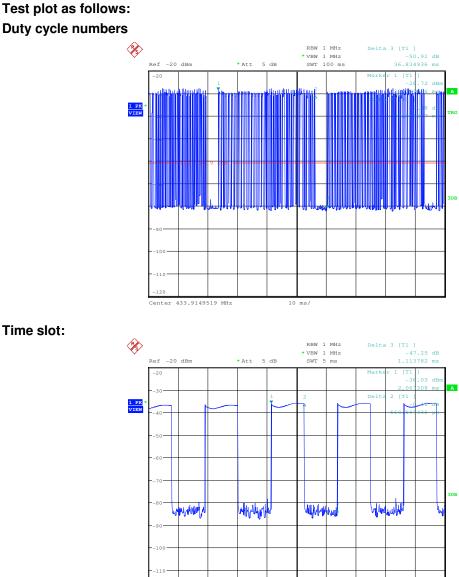

433.9149519 MHz

enter

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms e-document.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

500 µs.

Time slot:



Report No.: SZEM150200081802 Page: 13 of 24

6.2.2 Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.231(b) and 15.209							
Test Method:	ANSI C63.10: 2009							
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark			
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak			
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average			
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak			
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average			
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak			
	Above 1011-	Peak	1MHz	3MHz	Peak			
	Above 1GHz	Peak	1MHz	10Hz	Average			
Limit: (Spurious Emissions)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)			
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30			
	1.705MHz-30MHz	30	-	-	30			
	30MHz-88MHz	100	40.0	Quasi-peak	3			
	88MHz-216MHz	150	43.5	Quasi-peak	3			
	216MHz-960MHz	200	46.0	Quasi-peak	3			
	960MHz-1GHz	500	54.0	Quasi-peak	3			
	Above 1GHz	500	54.0	Average	3			
	Note: 15.35(b), Unless o	therwise specified,	the limit on	peak radio frec	luency			
	emissions is 20dB above the maximum permitted average emission limit							
	applicable to the e	quipment under tes	t. This peak	limit applies to	the total peak			
	emission level radiated by the device.							
Limit:	Frequency	Limit (dBuV/i	m @3m)	Remark				
(Field strength of the	433.92MHz	80.8		Average Valu	le			
fundamental signal)	400.921VIF12	100.8	3	Peak Value)			

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150200081802 Page: 14 of 24

Test Procedure:	 a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the
	 d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find
	 the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the
	EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Setup:	

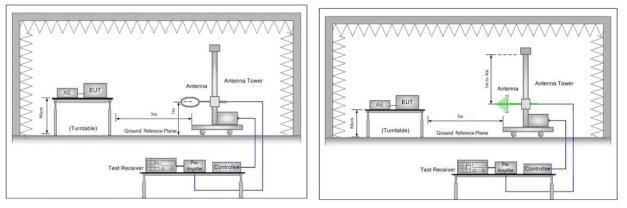


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz





Report No.: SZEM150200081802 Page: 15 of 24




Figure 3. Above 1 GHz

Test Mode:	Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Measurement Data

6.2.2.1 Field Strength Of The Fundamental Signal

Peak value:								
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
433.92	10.38	16.58	27.33	86.55	82.18	100.83	-18.65	Horizontal
433.92	10.38	16.58	27.33	75.13	74.80	100.83	-26.03	Vertical

Average value=Peak value + PDCF


Average value:								
Frequency Level (MHz) (dBuV/m)		Limit Line (dBuV/m)	Over Limit (dB)	Polarization				
433.92	433.92 76.20		-4.63	Horizontal				
433.92	68.82	80.83	-12.01	Vertical				

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150200081802 Page: 16 of 24

6.2.2.2 Spurious Emissions

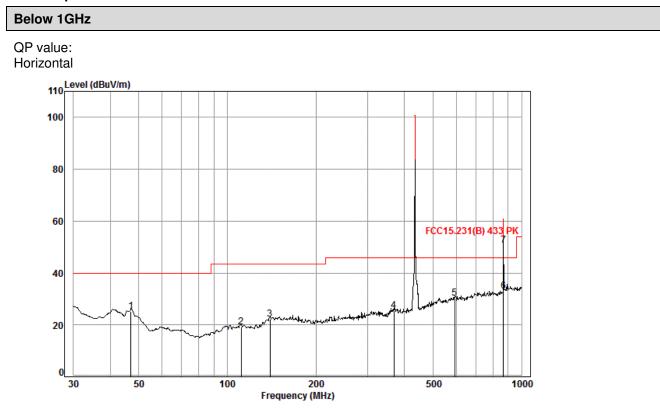

Condition: FCC15.231(B) 433 PK 3m 3142C Horizontal Job No. : 0818CR Test mode: TX mode


		Cable	Ant	Preamp	Read		Limit	0ver	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	46.99	17.46	10.02	27.30	25.05	25.23	40.00	-14.77	
2	111.35	11.77	8.51	27.13	25.95	19.10	43.50	-24.40	
3	139.85	14.85	8.09	26.96	26.14	22.12	43.50	-21.38	
4	368.11	11.23	15.42	26.93	25.84	25.56	46.00	-20.44	
5	593.05	11.39	19.61	27.55	26.85	30.30	46.00	-15.70	
6	867.83	10.77	22.83	26.92	44.10	50.78	80.83	-30.05	Peak

Average value=Peak value + PDCF

Average value:								
Frequency (MHz)			Over Limit (dB)	Polarization				
867.83	44.80	60.83	-16.03	Horizontal				



Report No.: SZEM150200081802 Page: 17 of 24

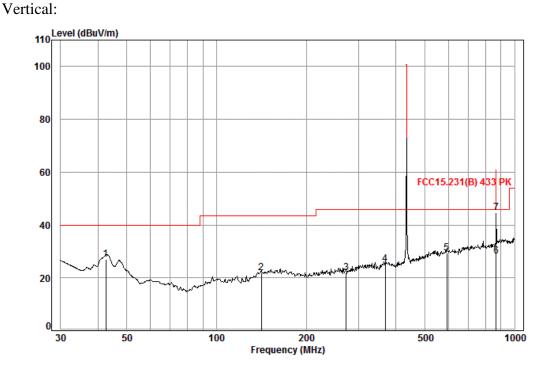

Condition: FCC15.231(B) 433 PK 3m 3142C Vertical Job No. : 0818CR Test mode: TX mode

	moue. IX	moure							
		Cable	Ant	Preamp	Read		Limit	0ver	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	42.60	14.08	11.96	27.31	28.14	26.87	40.00	-13.13	
2	141.33	14.78	8.22	26.95	25.79	21.84	43.50	-21.66	
3	272.28	10.86	12.75	26.47	24.68	21.82	46.00	-24.18	
4	368.11	11.23	15.42	26.93	25.53	25.25	46.00	-20.75	
5	593.05	11.39	19.61	27.55	25.79	29.24	46.00	-16.76	
6	867.83	10.77	22.83	26.92	38.00	44.68	80.83	-36.15	Peak

Average value=Peak value + PDCF

Average value:								
Frequency Level (MHz) (dBuV/m)		Limit Line (dBuV/m)	Over Limit (dB)	Polarization				
867.83	38.70	60.83	-22.13	Vertical				



Above 1GHz

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM150200081802 Page: 18 of 24

	-							
Peak value:		-						
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1301.76	3.50	27.71	38.35	46.83	39.69	74	-34.31	Vertical
1735.68	3.99	29.82	38.40	44.34	39.75	74	-34.25	Vertical
2169.60	4.58	31.15	38.44	49.03	46.32	74	-27.68	Vertical
2603.52	5.21	32.47	38.47	48.57	47.78	74	-26.22	Vertical
3037.44	5.77	31.89	38.52	46.69	45.83	74	-28.17	Vertical
3471.36	5.90	32.86	38.73	46.60	46.63	74	-27.37	Vertical
1301.76	3.50	27.71	38.35	46.63	39.49	74	-34.51	Horizontal
1735.68	3.99	29.82	38.40	46.21	41.62	74	-32.38	Horizontal
2169.60	4.58	31.15	38.44	48.22	45.51	74	-28.49	Horizontal
2603.52	5.21	32.47	38.47	48.13	47.34	74	-26.66	Horizontal
3037.44	5.77	31.89	38.52	46.46	45.60	74	-28.40	Horizontal
3471.36	5.90	32.86	38.73	46.50	46.53	74	-27.47	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's company's to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150200081802 Page: 19 of 24

6.3 20dB Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.231 (c)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.		
Test Mode:	Transmitting mode		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

Measurement Data

20dB bandwidth (MHz)	Limit (MHz)	Results
0.015	1.0848	Pass

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's company's client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150200081802 Page: 20 of 24





Report No.: SZEM150200081802 Page: 21 of 24

6.4 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.231 (a) (1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Limit:	Not more than 5 seconds		
Test Mode:	Transmitting mode		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

Measurement Data


Test item	Limit (MHz)	Results
Transmitting time	≤5S	Pass

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150200081802 Page: 22 of 24

Test plot as follows:

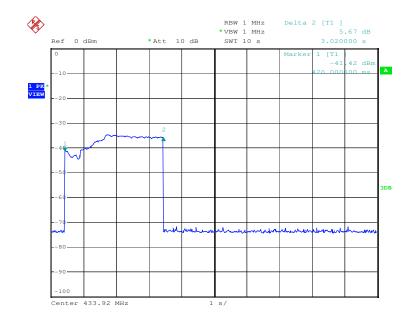




Report No.: SZEM150200081802 Page: 23 of 24

7 Photographs - Test setup

(Test Model No.: FLX100)

7.1 Radiated Emission



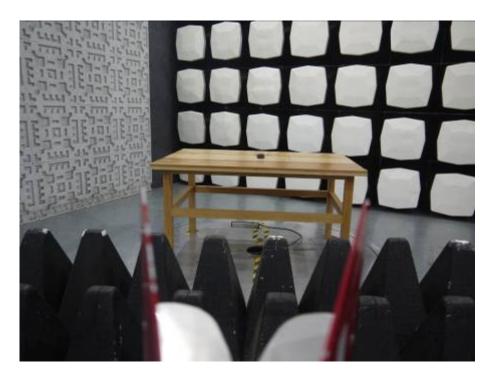



Report No.: SZEM150200081802 Page: 24 of 24

8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1502000818CR.

