

Date: 2015-06-13 Page 1 of 17

No.: DM119794

**Applicant:** WGI Innovations, Ltd.

602 Fountain Parkway, Grand Prairie, TX 75050

**Manufacturer:** WGI Innovations, Ltd.

602 Fountain Parkway, Grand Prairie, TX 75050

**Description of Sample(s):** Submitted sample(s) said to be

Product: E-Game Call
Brand Name: FLEXTONE
Model Number: FLX500

FCC ID: YTT-FLXRMU

**Date Sample(s) Received:** 2015-06-05

**Date Tested:** 2015-06-09 to 2015-06-11

**Investigation Requested:** Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2014 and ANSI C63.4: 2014 for FCC Certification.

**Conclusion(s):** The submitted product <u>COMPLIED</u> with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

**Remark(s):** For additional model(s) details, please page 3.

Authorized Signatory
ElectroMagnetic Compatibility Department
For and on behalf of

STC (Dongguan) Company Limited

LONG Yun Jian, Along



	2015-06-13 DM119794	Page 2 of 17
CON	TENT:	
	Cover Content	Page 1 of 17 Page 2 of 17
<u>1.0</u>	General Details	
1.1	Equipment Under Test [EUT]	Page 3 of 17
1.2	Description of EUT Operation	Page 3 of 17
1.3	Date of Order	Page 3 of 17
1.4	Submitted Sample	Page 3 of 17
1.5	Test Duration	Page 3 of 17
1.6	Country of Origin	Page 3 of 17
<u>2.0</u>	<b>Technical Details</b>	
2.1	Investigations Requested	Page 4 of 17
2.2	Test Standards and Results Summary	Page 4 of 17
<u>3.0</u>	<u>Test Results</u>	
3.1	Emission	Page 5-8 of 17
3.2	Bandwidth Measurement	Page 9-13 of 17
	Appendix A	
	List of Measurement Equipment	Page 14 of 17

Page 15-17 of 17

Appendix B

Photographs



Date: 2015-06-13 Page 3 of 17

No.: DM119794

#### 1.0 General Details

# 1.1 Equipment Under Test [EUT] Description of Sample(s)

Product: E-Game Call

Manufacturer: WGI Innovations, Ltd.

Brand Name: FLEXTONE
Model Number: FLX500
Additional Model Number: FLX1000

Rating: 4.5Vd.c. ("AA" battery  $\times$  3)

### 1.2 Description of EUT Operation

The Equipment Under Test (EUT) is a HD GAME CALL of WGI Innovations, Ltd. The transmitter is a periodically operated transmitter. It is pulse transmitter. The RF signal was modulated by IC, the type of modulation used is FSK.

#### 1.3 Date of Order

2015-06-05

#### 1.4 Submitted Sample(s):

1 Sample

#### 1.5 Test Duration

2015-06-09 to 2015-06-11

### 1.6 Country of Origin

China



Date: 2015-06-13 Page 4 of 17

No.: DM119794

### 2.0 Technical Details

### 2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2014 Regulations and ANSI C63.4:2009 for FCC Certification.

### 2.2 Test Standards and Results Summary Tables

EMISSION Results Summary							
Test Condition	Test Requirement	Test Method	Class /	Te	est Resu	ılt	
			Severity	Pass	Fail	N/A	
Field Strength of Fundamental & Harmonics Emissions	FCC 47CFR 15.249	ANSI C63.4:2009	N/A				
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.4:2009	N/A	$\boxtimes$			

Note: N/A - Not Applicable

Date: 2015-06-13 Page 5 of 17

No.: DM119794

3.0 Test Results

3.1 Emission

#### 3.1.1 Radiated Emissions

Test Requirement: FCC 47CFR 15.249 & FCC 47CFR 15.209

Test Method: ANSI C63.4:2009
Test Date: 2015-06-11

Mode of Operation: Communication mode

#### **Test Method:**

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\*: Semi-anechoic chamber located on the STC (Dongguan) Company Ltd. 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, PRC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.



Date: 2015-06-13 Page 6 of 17

No.: DM119794

#### **Spectrum Analyzer Setting:**

9KHz – 30MHz (Pk & Av) RBW: 10kHz

VBW: 30kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

30MHz – 1GHz (QP) RBW: 120kHz

VBW: 120kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold


Above 1GHz (Pk & Av) RBW: 3MHz

VBW: 3MHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

#### **Test Setup:**

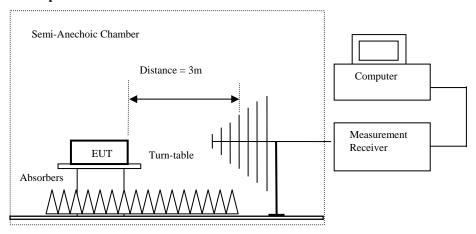

- Ground Plane
- Absorbers placed on top of the ground plane are for measurements above  $1000 \mathrm{MHz}$  only.
- Measurements between 30 MHz to 1000 MHz made with Bi-log antennas, above 1000 MHz horn antennas are used, 9 kHz to 30 MHz loop antennas are used.



Date: 2015-06-13 Page 7 of 17

No.: DM119794

### Limits for Field Strength of Fundamental & Harmonics Emissions [FCC 47CFR 15.249]:

Frequency Range of Fundamental	Field Strength of Fundamental Emission	Field Strength of Harmonics Emission
[MHz]	[microvolts/meter]	[microvolts/meter]
902-928	50,000 [Quasi-Peak]	500 [Average]
2400-2483.5	50,000 [Average]	500 [Average]

#### Results of Tx mode (30MHz- 1.8GHz): Pass

Field Strength of Fundamental Emissions								
Quasi-Peak								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m Factor Strength Strength Polarity							
MHz	dBμV/m	dBμV/m	dBμV/m	μV/m	μV/m			
915.00	63.4	26.2	89.6	30,199.5	50,000	Vertical		

Field Strength of Harmonics Emission									
	Peak Value								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	MHz $dB\mu V/m$ $dB\mu V/m$ $dB\mu V/m$ $\mu V/m$ $\mu V/m$								
1830.0	15.4	35.2	50.6	338.8	5,000	Vertical			
2745.0	14.5	37.4	51.9	393.6	5,000	Vertical			

Field Strength of Harmonics Emission									
	Average Value								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	MHz $dB\mu V/m$ $dB\mu V/m$ $dB\mu V/m$ $\mu V/m$ $\mu V/m$								
1830.0	3.3	35.2	38.5	84.1	500	Vertical			
2745.0	2.4	37.4	39.8	97.7	500	Vertical			

#### Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

Calculated measurement uncertainty (9kHz - 30MHz): 3.3dB

(30MHz – 1GHz): 4.6dB (1GHz - 26GHz): 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date: 2015-06-13 Page 8 of 17

No.: DM119794

#### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Results of TX mode (9kHz - 30MHz): PASS

Emissions detected are more than 20 dB below the FCC Limits

Results of TX mode (30MHz - 1GHz): PASS

	Radiated Emissions								
	Quasi-Peak								
Emission	E-Field	Level	Limit	Level	Limit				
Frequency	Polarity	@3m	@3m	@3m	@3m				
MHz		dBμV/m	dBμV/m	μV/m	μV/m				
30.9	Vertical	30.3	40.0	32.7	100				
559.9	Vertical	37.2	46.0	72.4	200				
716.8	Vertical	37.7	46.0	76.7	200				

#### Results of RX mode (30MHz - 1GHz): PASS

Radiated Emissions									
	Quasi-Peak								
Emission	E-Field	Level	Limit	Level	Limit				
Frequency	Polarity	@3m	@3m	@3m	@3m				
MHz		dBμV/m	dBμV/m	μV/m	μV/m				
30.6	Vertical	28.8	40.0	27.5	100				
546.3	Vertical	36.7	46.0	68.4	200				
764.6	Vertical	37.1	46.0	71.6	200				

#### Remarks:

Calculated measurement uncertainty (9kHz - 30MHz): 3.3dB

(30MHz – 1GHz): 4.6dB (1GHz - 26GHz): 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date: 2015-06-13 Page 9 of 17

No.: DM119794

#### 3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.249
Test Method: ANSI C63.4:2009
Test Date: 2015-06-10
Mode of Operation: Tx mode

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.




Date: 2015-06-13 Page 10 of 17

No.: DM119794

#### **Limits for 20dB Bandwidth of Fundamental Emission:**

Frequency Range	20dB Bandwidth
[MHz]	[MHz]
915.0	0.320

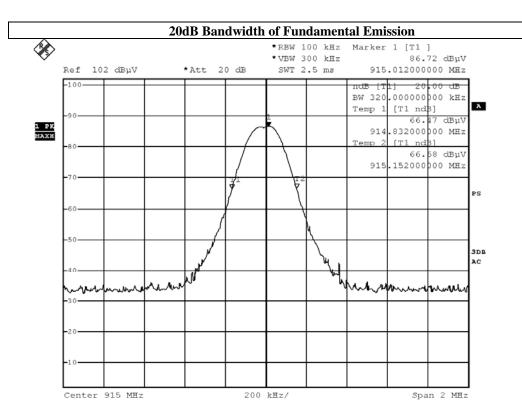

BMP

Date: 10.JUN.2015 15:00:15



Date: 2015-06-13 Page 11 of 17

No.: DM119794


#### **Band-edge Compliance of RF Conducted Emissions Measurement:**

#### Limit:

Emissions radiated outside of the specified frequency bands, except t for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §115.209, whichever is the lesser attenuation.

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
902 – Lowest Fundamental (915)	51.11

#### **Band-edge Compliance of RF Conducted Emissions (Lowest)**

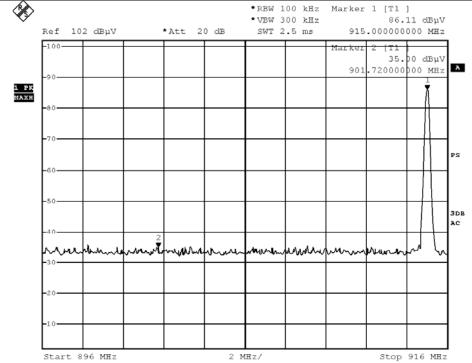

ВМР

Date: 10.JUN.2015 14:57:44




Date: 2015-06-13 Page 12 of 17

No.: DM119794

### **Band-edge Compliance of RF Conducted Emissions Measurement:**

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (915) - 928	51.87

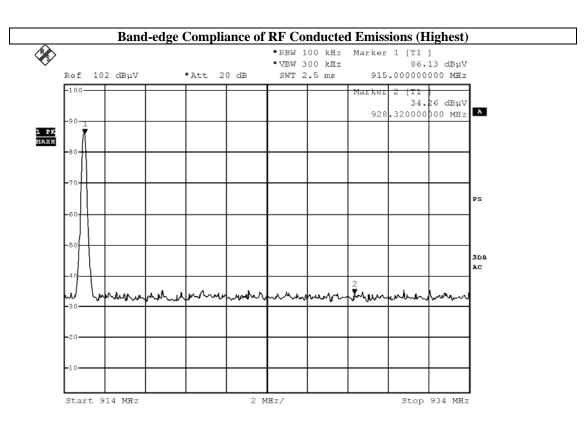

BMP

Date: 10.JUN.2015 14:56:52

Date: 2015-06-13 Page 13 of 17

No.: DM119794

#### **Band-edge Compliance of RF Radiated Emissions Measurement:**

#### Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

#### Result: Band-edge Compliance of RF Radiated Emissions (Lowest)

Field Strength of Band-edge Compliance							
Quasi-Peak							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dBμV/m		
902.0	12.8	26.1	38.9	46.0	7.1	Vertical	

#### Result: Band-edge Compliance of RF Radiated Emissions (Highest)

Field Strength of Band-edge Compliance								
Quasi-Peak								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dΒμV	dB/m	$dB\mu V/m$	dBμV/m	dBμV/m			
928.0	13.1	26.2	39.3	46.0	6.7	Vertical		



Date: 2015-06-13 Page 14 of 17

No.: DM119794

### Appendix A

### List of Measurement Equipment

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EMD004	LISN	ROHDE & SCHWARZ	ESH3-Z5	100102	2015.3.24	2016.3.24
EMD022	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100314	2015.3.24	2016.3.24
EMD035	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100441	2015.3.24	2016.3.24
EMD036	EMI Test Receiver	ROHDE & SCHWARZ	ESIB 26	100388	2015.3.24	2016.3.24
EMD041	TWO-LINE V- NETWORK	ROHDE & SCHWARZ	ENV216	100261	2015.3.24	2016.3.24
EMD061	Biconilog Antenna	ETS.LINDGREN	3142C	00060439	2014.11.29	2016.11.29
EMD062	Double-Ridged Waveguide (1GHz – 18GHz)	ETS.LINDGREN	3117	00075933	2014.11.15	2015.11.15
EMD084	MULTI-DVICE CONTROLLER	ETS.LINDGREN	2090	00060107	N/A	N/A
EMD088	Video Contol Unit	ETS.LINDGREN	Y21953A	2601073	N/A	N/A
EMD093	Monitor	ViewSonic	VA9036	Q8X064201876	N/A	N/A
EMD102	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707454	N/A	N/A
EMD103	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707455	N/A	N/A
EMD105	FACT-3 EMC Chamber	ETS.LINDGREN	FACT-3	3803	N/A	N/A
EMD106	Shielding Room #1	ETS.LINDGREN	RFD-100	3802	N/A	N/A
	100V Insertion Unit	ROHDE & SCHWARZ	URV5-Z4	100464	2015.3.24	2016.3.24
EMD113	Pre-Amplifier	ROHDE & SCHWARZ	N/A	1129588	2015.3.24	2016.3.24
EMD124	Loop Antenna	ETS-Lindgren	6502	00104905	2014.04.28	2016.04.28
EMD131	Standard Gain Horn Antenna (18GHz – 26.5GHz)	Chengdu AINFO Inc.	JXTXLB-42- 15-C-KF	J2021100721001	2013.04.09	2016.04.09

#### Remarks:-

N/A Not Applicable or Not Available



Date: 2015-06-13 Page 15 of 17

No.: DM119794

### Appendix B

### Photographs of EUT

Front View of the product



**Inside View of the product** 



**Inner Circuit Bottom View** 



Rear View of the product



**Inner Circuit Top View** 



**Inner Circuit Bottom View** 







Date: 2015-06-13 Page 16 of 17

No.: DM119794

### Photographs of EUT

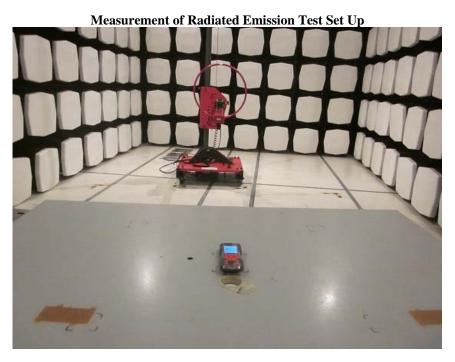

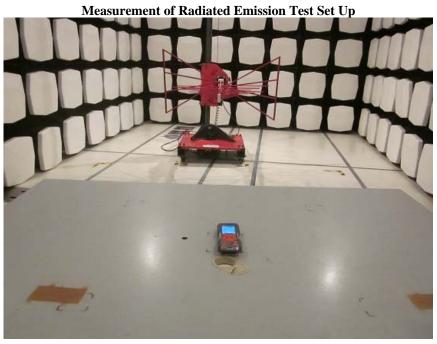


### STC (Dongguan) Company Limited



Date: 2015-06-13 Page 17 of 17

No.: DM119794

Photographs of EUT

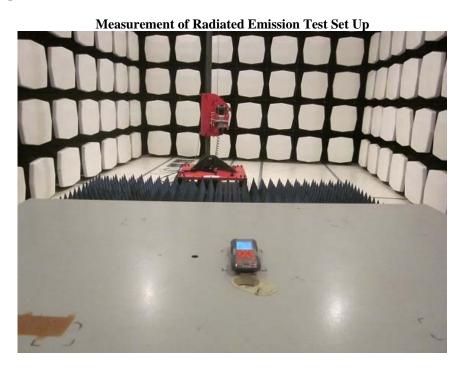

\*\*\*\*\* End of Test Report \*\*\*\*\*