

EMC TEST REPORT

FCC 47 CFR Part 15B
Industry Canada RSS-Gen

Electromagnetic compatibility - Unintentional radiators

Report Reference No. : G0M-1502-4516-EF0115B-V01

Testing Laboratory : Eurofins Product Service GmbH

Address : Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation :



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Filed Test Laboratory, Reg.-No.: 96970
IC OATS Filing assigned code: 3470A

Applicant's name : Roth & Rau - Ortnier GmbH

Address : Manfred-von-Ardenne-Ring 7
01099 Dresden
GERMANY

Test specification:

Standard..... : 47 CFR Part 15 Subpart B
ICES-003, Issue 5:2012
ANSI C63.4:2014

Equipment under test (EUT):

Product description	RFID reader with CAN interface	
Model No.	LF-CAN-M	
Additional Models	None	
Hardware version	v3.1	
Firmware / Software version	UNReader Slave V2.7.hex	
	FCC-ID: YTV-LF-134-CAN	IC: N/A

Test result **Passed**

Test Report No.: G0M-1502-4516-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Possible test case verdicts:

- not applicable to test object: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Date of receipt of test item: 2015-03-13

Date (s) of performance of tests: 2015-03-13 – 2015-05-18

Compiled by: Steffen Zunke


Tested by (+ signature).....: Andreas Pflug

Approved by (+ signature): Jens Marquardt

Deputy Head of Lab

Date of issue: 2015-09-01

Total number of pages: 33

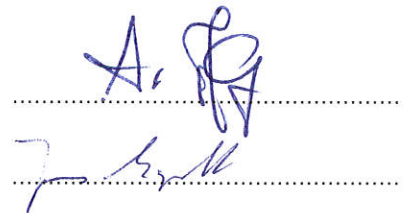
General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
V01	2015-09-01	Initial Release	

REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	9
1.3	Photos – Test setup	10
1.4	Supporting Equipment Used During Testing	11
1.5	Input / Output Ports	11
1.6	Operating Modes and Configurations	12
1.7	Test Equipment Used During Testing	13
1.8	Sample emission level calculation	14
2	RESULT SUMMARY	15
3	TEST CONDITIONS AND RESULTS	16
3.1	Test Conditions and Results – Radiated emissions	16
3.2	Test Conditions and Results – AC power line conducted emissions	28

1 Equipment (Test item) Description

Description	RFID reader with CAN interface	
Model	LF-CAN-M	
Additional Models	None	
Serial number	RRO2xxxxx	
Hardware version	v3.1	
Software / Firmware version	UNIreader Slave V2.7.hex	
Contains FCC-ID	N/A	
Contains IC	N/A	
Power supply	24 VDC via AC/DC adaptor	
AC/DC-Adaptor	Model : SYS1308-2424-W2E Manufacturer : Dehner Elektronik Input : 100-240VAC / 50-60Hz Output : 24VDC / 1.0A	
Radio module	Type	RFID Module
	Model	UNI reader V1.3
	Manufacturer	sitosite
	HW Version	v1.3
	SW Version	UNIreader Slave V2.7.hex
	FCC-ID	-
	IC	-
Manufacturer	Roth & Rau - Ortner GmbH Manfred-von-Ardenne-Ring 7 01099 Dresden GERMANY	
Highest emission frequency	Fmax [MHz] = 17.1776	
Device classification	Class B	
Equipment type	Tabletop	
Number of tested samples	1	

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	CAN2WEB – A - MINI	Roth & Rau – Ortnner GmbH	RRO4000215	
AE	Power Supply	Sunny	SYS1308-2424-W2E	
AE	Tag			
*Note: Use the following abbreviations: AE : Auxiliary/Associated Equipment, or SIM : Simulator (Not Subjected to Test) CABL : Connecting cables				

1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments
1	CAN IN	I/O	100m	Yes	-
2	CAN OUT	I/O	100m	Yes	-
3	Antenna	I/O	2m	Yes	-
4	Power	AC	>3m	No	-
*Note: Use the following abbreviations: AC : AC power port DC : DC power port N/E : Non electrical I/O : Signal input or output port TP : Telecommunication port					

1.6 Operating Modes and Configurations

Mode #	Description
1	CAN-link+ Reading RFID-Tag

Configuration #	EUT Configuration
1	EUT fully assembled with antenna RRO2101953
2	EUT fully assembled with antenna RRO2400007

1.7 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

Radiated emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD-Antenne	R&S	HL 223	EF00187	2014-03	2017-03
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2013-09	2016-09
EMI Test Receiver	R&S	ESU26	EF00887	2015-01	2016-01

Conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2014-11	2016-11
AMN	R&S	ESH3-Z5	EF00036	2014-12	2016-12
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada RSS-Gen				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 RSS-Gen 6.13	Radiated emissions	ANSI C 63.4	PASS	-
47 CFR 15.107 RSS-Gen 8.8	AC power line conducted emissions	ANSI C63.4	PASS	-
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / IC RSS-Gen				Verdict: PASS		
Laboratory Parameters:		Required prior to the test		During the test		
Ambient Temperature		15 to 35 °C		23°C		
Relative Humidity		30 to 60 %		45%		
Test according referenced standards		Reference Method				
		ANSI C63.4				
Sample is tested with respect to the requirements of the equipment class		Equipment class				
		Class B				
Test frequency range determined from highest emission frequency		Highest emission frequency				
		Fmax [MHz] = 17.1776				
Fully configured sample scanned over the following frequency range		Frequency range				
		30 MHz to 4 GHz				
Operating mode		1				
Configuration		1 / 2				
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dBµV/m]	Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments:						

Test Procedure:

The test site is in accordance with ANSI C63-4:2009 requirements and is listed by FCC.

The measurement procedure is as follows:


- 1) The EUT was placed on a 0.8 m non conductive table at a 3 m distance from the receive antenna (ANSI C63.4: 2009 item 6.2)
- 2) The antenna output was connected to the measurement receiver
- 3) A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- 4) Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1502-4516

Applicant: Roth & Rau - Ortner GmbH
 EUT Name: RFID reader with CAN interface
 Model: LF-134-CAN
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: +24VDC (CAN-feeding)
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3m
 Mode: CAN-link with RRO2101953-antenna (ø 12mm)
 Test Date: 2015-05-18
 Note:

Index 6

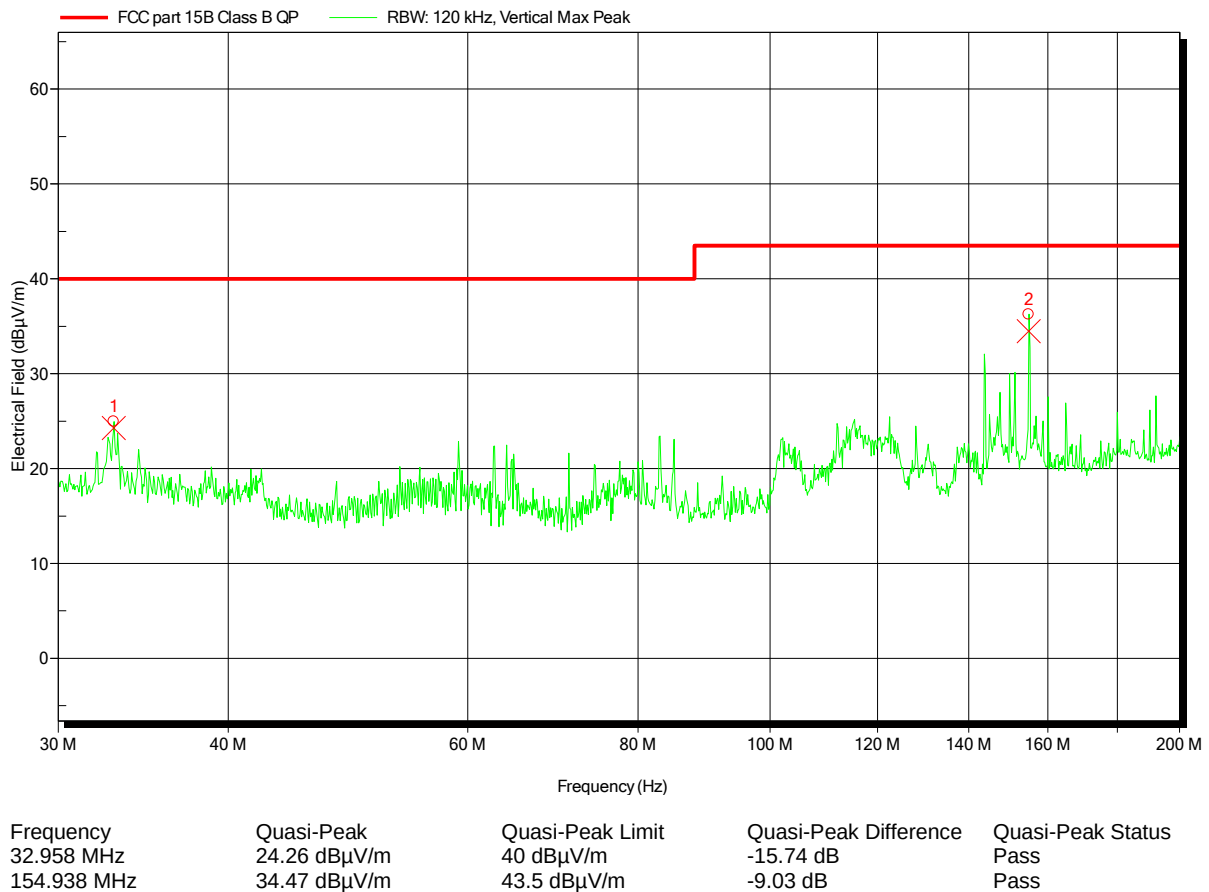


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1502-4516

Applicant:	Roth & Rau - Ortner GmbH
EUT Name:	RFID reader with CAN interface
Model:	LF-134-CAN
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: +24VDC (CAN-feeding)
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m
Mode:	CAN-link with RRO2101953-antenna (Ø 12mm)
Test Date:	2015-05-18
Note:	

Index 10

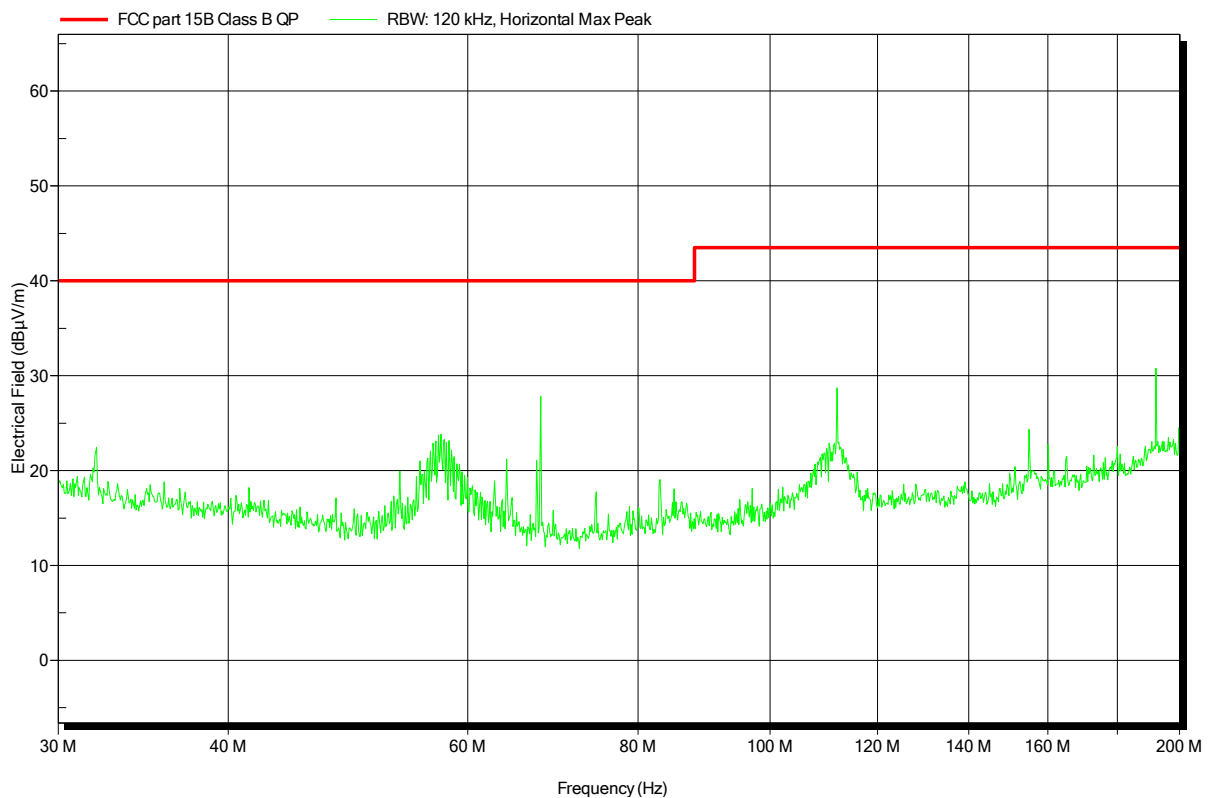

Test Report No.: G0M-1502-4516-EF0115B-V01


Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1502-4516

Applicant: Roth & Rau - Ortner GmbH
 EUT Name: RFID reader with CAN interface
 Model: LF-134-CAN
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: +24VDC (CAN-feeding)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3m
 Mode: CAN-link with RRO2101953-antenna (ø 12mm)
 Test Date: 2015-05-18
 Note:

Index 13

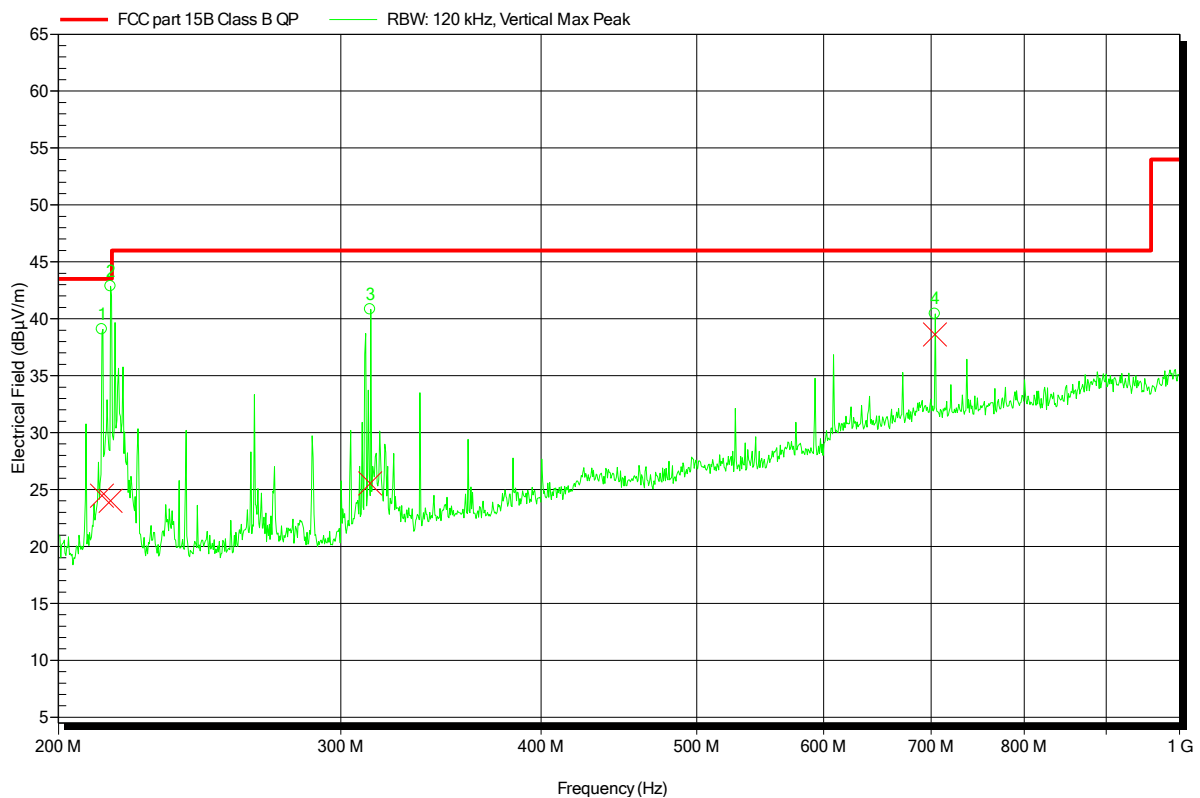


Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
213.032 MHz	24.46 dBµV/m	43.5 dBµV/m	-19.04 dB	Pass
215.648 MHz	24.02 dBµV/m	43.5 dBµV/m	-19.48 dB	Pass
313.004 MHz	25.53 dBµV/m	46 dBµV/m	-20.47 dB	Pass
703.97 MHz	38.62 dBµV/m	46 dBµV/m	-7.38 dB	Pass

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1502-4516

Applicant: Roth & Rau - Ortner GmbH
 EUT Name: RFID reader with CAN interface
 Model: LF-134-CAN
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: +24VDC (CAN-feeding)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: CAN-link with RRO2101953-antenna (ø 12mm)
 Test Date: 2015-05-18
 Note:

Index 14

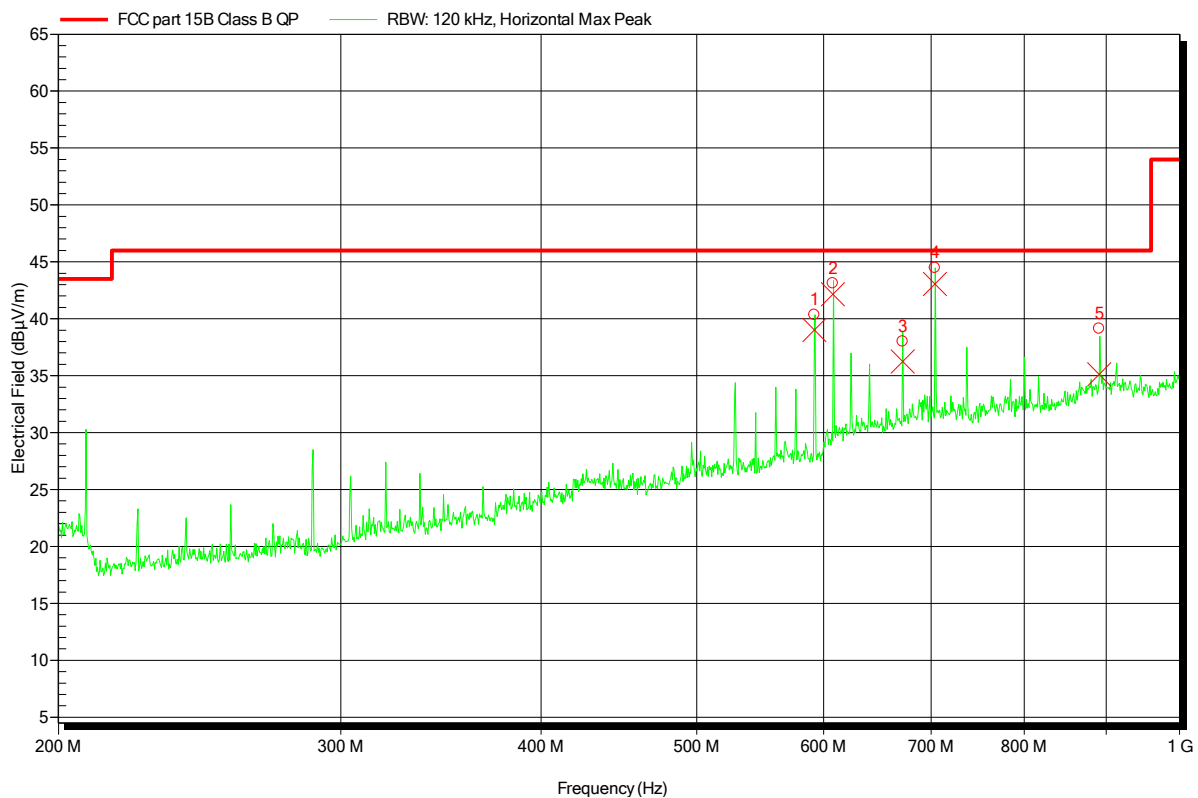

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
591.98 MHz	39.03 dBµV/m	46 dBµV/m	-6.97 dB	Pass
607.98 MHz	42.14 dBµV/m	46 dBµV/m	-3.86 dB	Pass
671.98 MHz	36.24 dBµV/m	46 dBµV/m	-9.76 dB	Pass
703.98 MHz	42.95 dBµV/m	46 dBµV/m	-3.05 dB	Pass
890.719 MHz	35.11 dBµV/m	46 dBµV/m	-10.89 dB	Pass

Test Report No.: G0M-1502-4516-EF0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1502-4516

Applicant: Roth&Rau
 EUT Name: CAN controller
 Model: LF-134-CAN
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom:
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance:
 Mode: CAN-link with RRO2101953-antenna (ø 12mm)
 Test Date: 2015-05-18
 Note:

Index 18

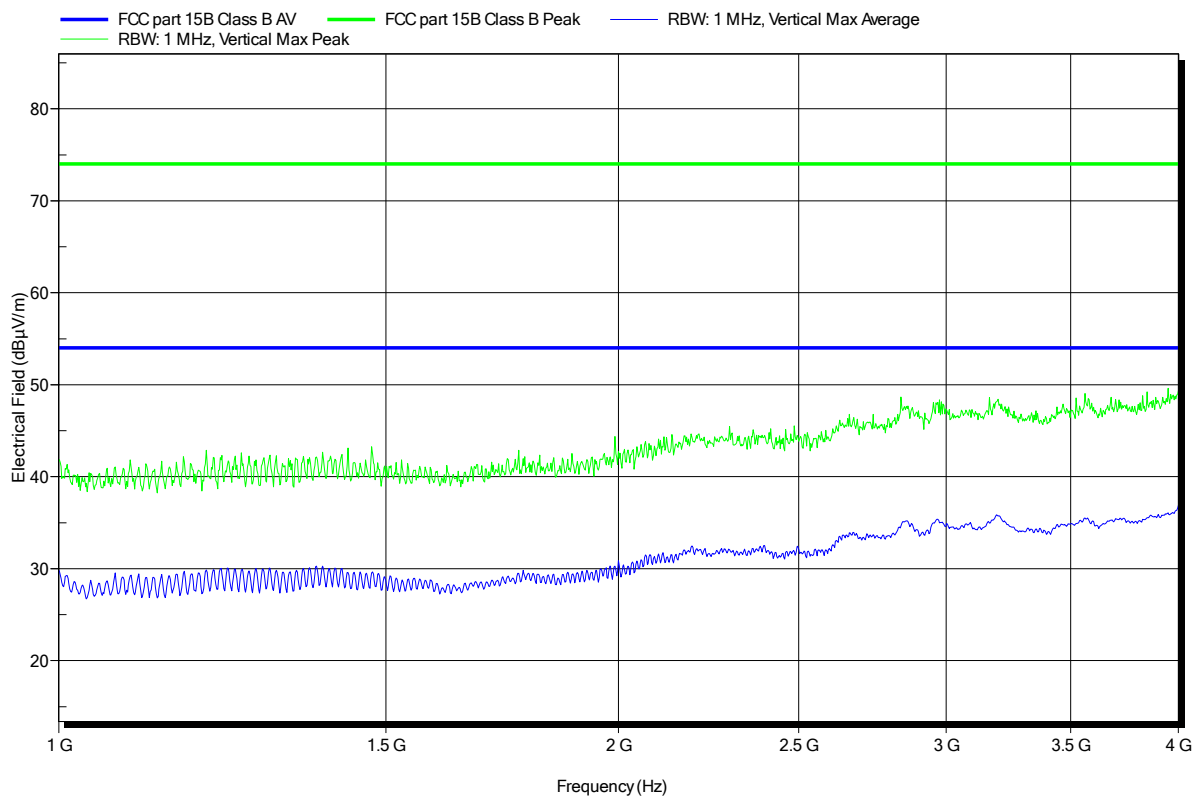

Test Report No.: G0M-1502-4516-EF0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1502-4516

Applicant: Roth&Rau
 EUT Name: CAN controller
 Model: LF-134-CAN
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom:
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance:
 Mode: CAN-link with RRO2101953-antenna (ø 12mm)
 Test Date: 2015-05-18
 Note:

Index 17

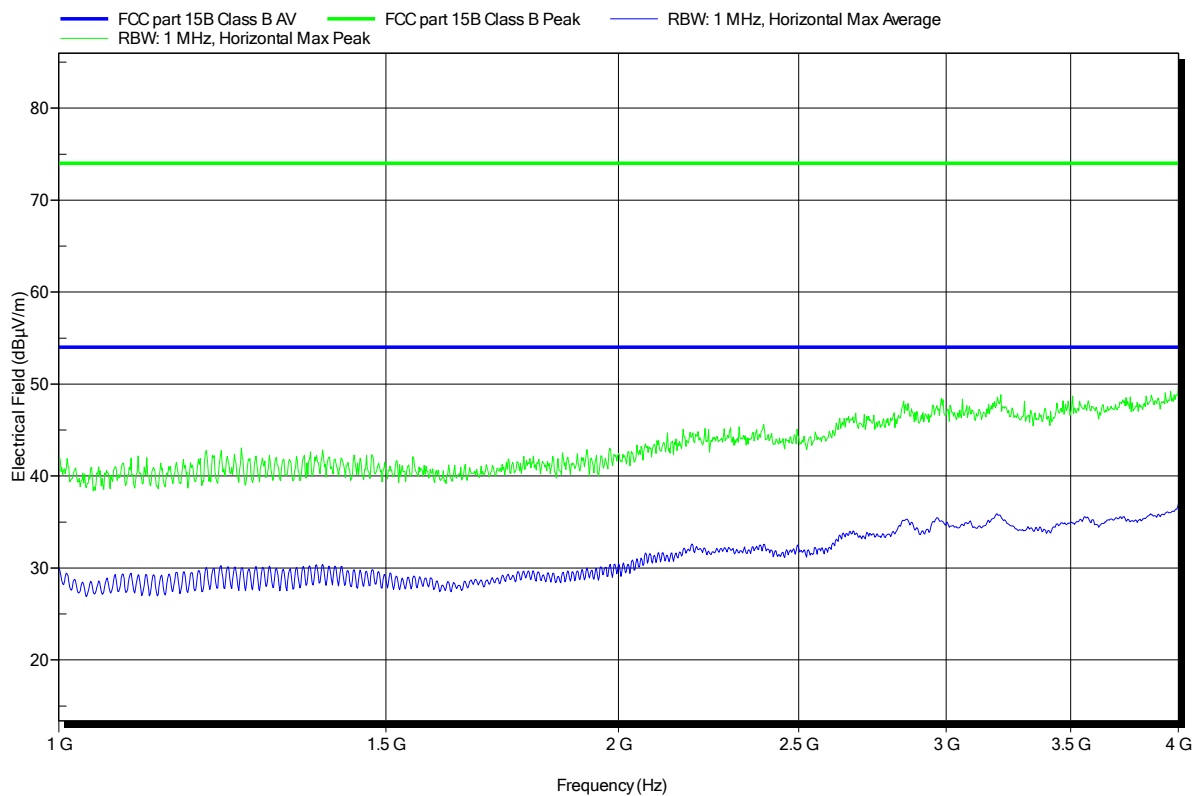


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1502-4516

Applicant: Roth & Rau - Ortner GmbH
 EUT Name: RFID reader with CAN interface
 Model: LF-134-CAN
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: +24VDC (CAN-feeding)
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3m
 Mode: CAN-link with RRO2400007-antenna (ø 20mm)
 Test Date: 2015-05-18
 Note:

Index 1

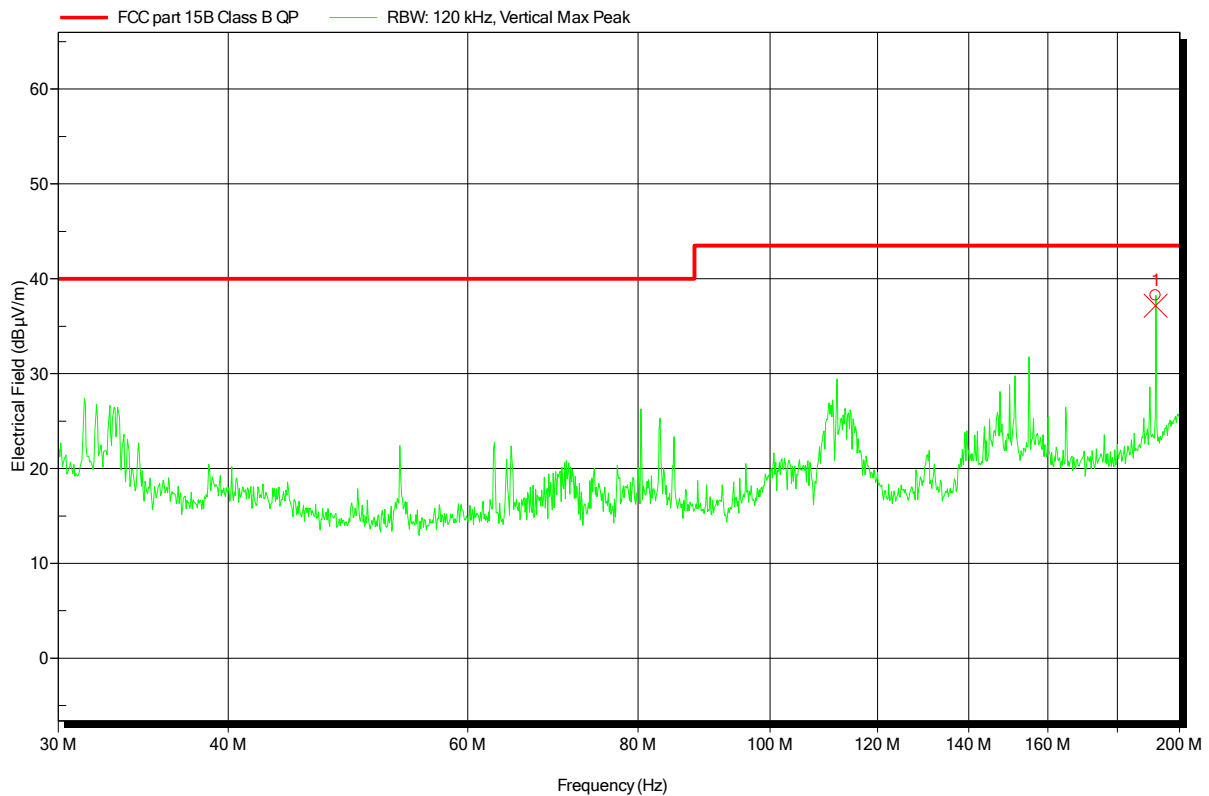


Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
191.994 MHz	37.14 dBµV/m	43.5 dBµV/m	-6.36 dB	Pass

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1502-4516

Applicant: Roth & Rau - Ortner GmbH
 EUT Name: RFID reader with CAN interface
 Model: LF-134-CAN
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: +24VDC (CAN-feeding)
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3m
 Mode: CAN-link with RRO2400007-antenna (ø 20mm)
 Test Date: 2015-05-18
 Note:

Index 2

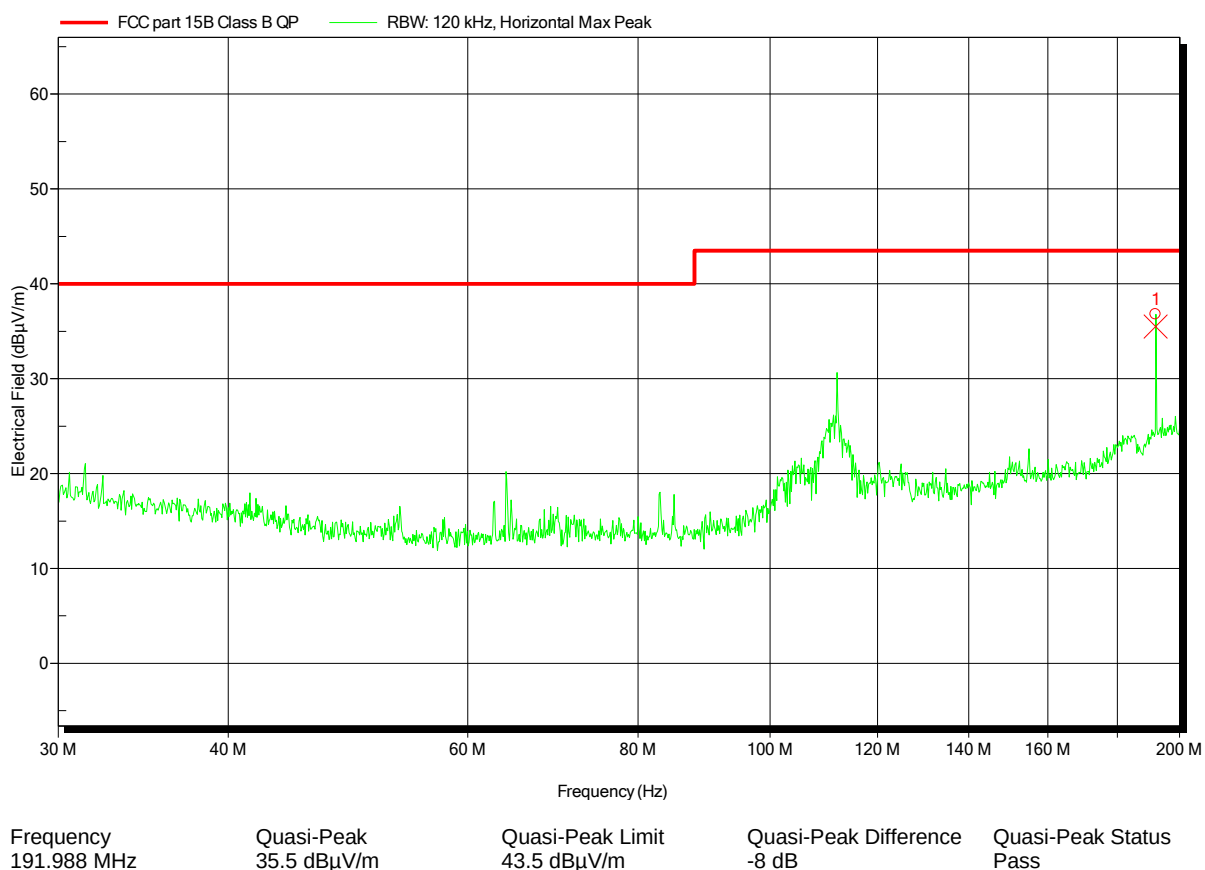

Test Report No.: G0M-1502-4516-EF0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1502-4516

Applicant: Roth & Rau - Ortner GmbH
 EUT Name: RFID reader with CAN interface
 Model: LF-134-CAN
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: +24VDC (CAN-feeding)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3m
 Mode: CAN-link with RRO2400007-antenna (ø 20mm)
 Test Date: 2015-05-18
 Note:

Index 12

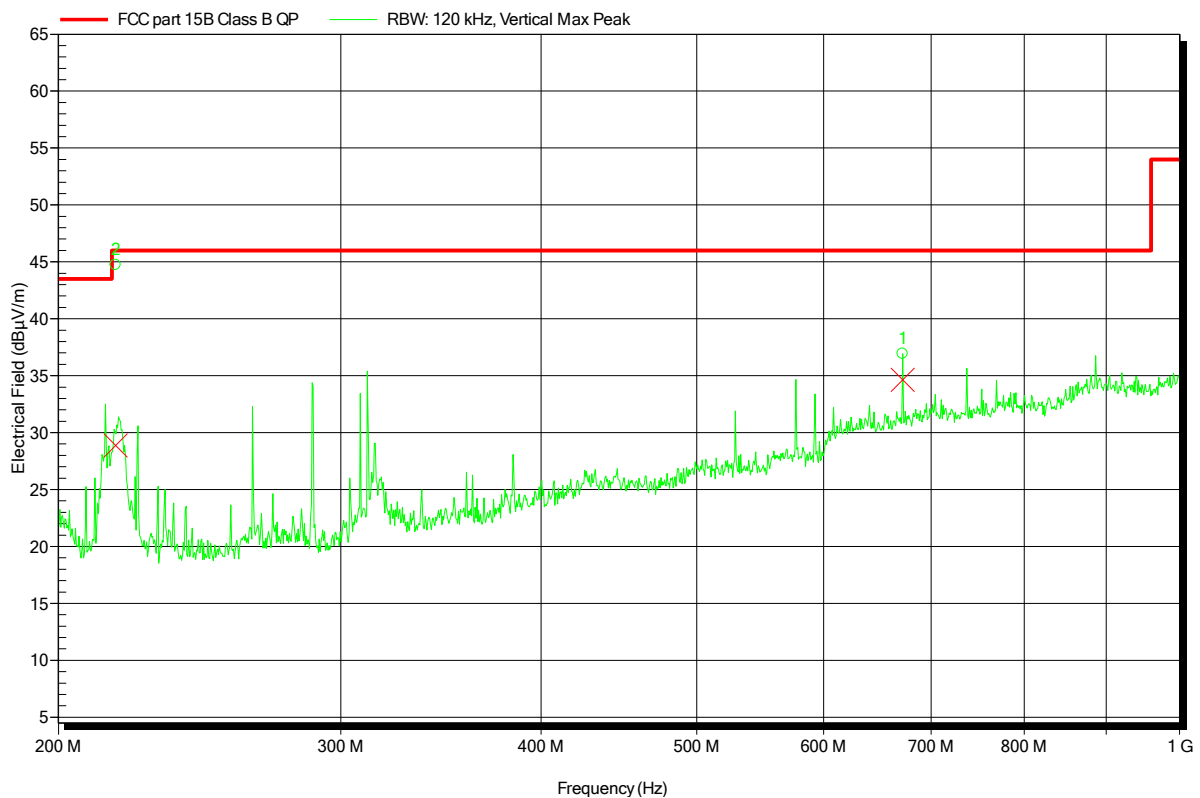

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
217.178 MHz	28.88 dBµV/m	46 dBµV/m	-17.12 dB	Pass
671.984 MHz	34.62 dBµV/m	46 dBµV/m	-11.38 dB	Pass

Test Report No.: G0M-1502-4516-EF0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1502-4516

Applicant: Roth & Rau - Ortner GmbH
 EUT Name: RFID reader with CAN interface
 Model: LF-134-CAN
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: +24VDC (CAN-feeding)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: CAN-link with RRO2400007-antenna (ø 20mm)
 Test Date: 2015-05-18
 Note:

Index 11

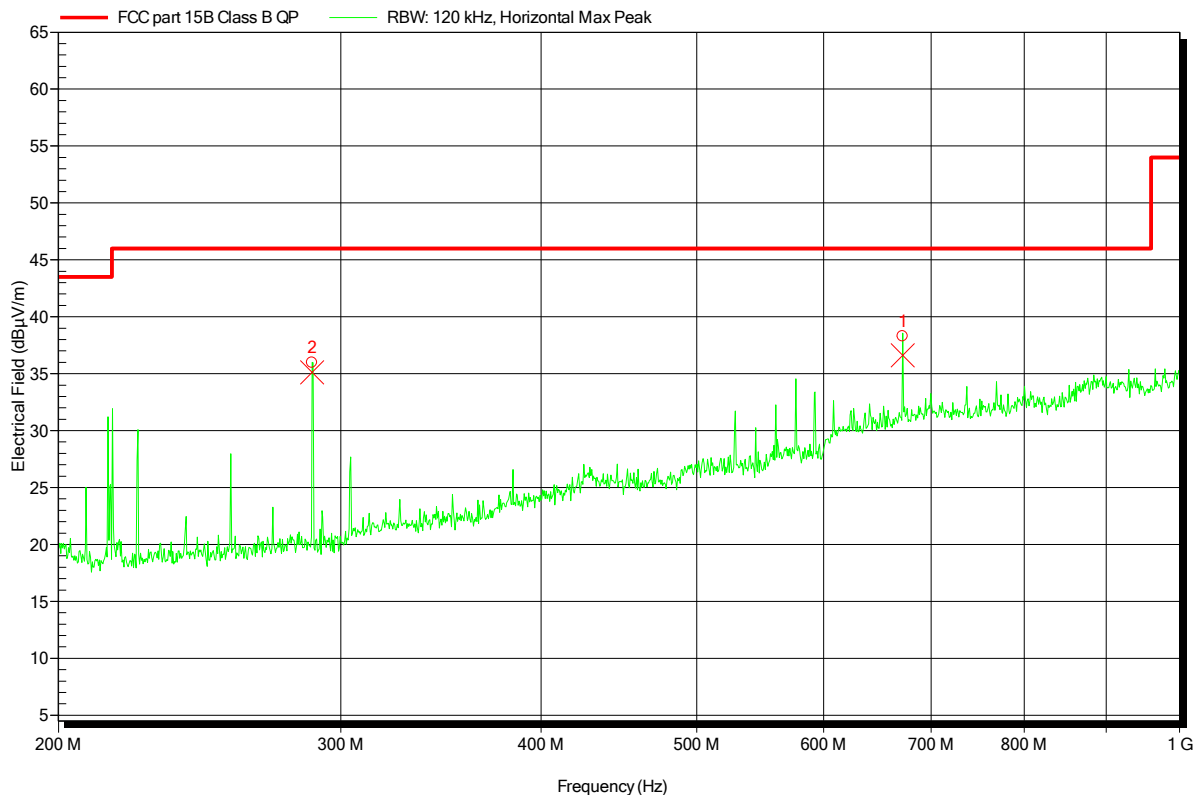

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
287.99 MHz	35.11 dBµV/m	46 dBµV/m	-10.89 dB	Pass
671.98 MHz	36.62 dBµV/m	46 dBµV/m	-9.38 dB	Pass

3.2 Test Conditions and Results – AC power line conducted emissions

Conducted emissions acc. FCC 47 CFR 15.107 / IC RSS-Gen			Verdict: PASS	
Laboratory Parameters:	Required prior to the test		During the test	
Ambient Temperature	15 to 35 °C		23°C	
Relative Humidity	30 to 60 %		45%	
Test according referenced standards	Reference Method			
	ANSI C63.4			
Fully configured sample scanned over the following frequency range	Frequency range			
	0.15 MHz to 30 MHz			
Sample is tested with respect to the requirements of the equipment class	Equipment class			
	Class B			
Points of Application	Application Interface			
AC Mains	LISN			
Operating mode	1			
Configuration	1 / 2			
Limits and results Class B				
Frequency [MHz]	Quasi-Peak [dBµV]	Result	Average [dBµV]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments:				
* Limit decreases linearly with the logarithm of the frequency.				

Test Procedure:


- 1) The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2009 item 7.3.1)
- 2) The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- 3) The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- 4) The LISN measurement port was connected to a measurement receiver
- 5) I/O cables were bundled not longer than 0.4 m
- 6) Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor

EMI voltage test in the ac-mains according to FCC Part 15b

Project number: G0M-1502-4516

Applicant:	Roth & Rau - Ortner GmbH
EUT Name:	RFID reader with CAN interface
Model:	HF-CAN-M
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: 120VAC(AC/DC-adap.model-SYS1308-2424-W2E)
LISN:	ESH2-Z5 N
Mode:	CAN-link with RRO2101953-antenna (Ø 12mm)
Test Date:	2015-03-13
Note:	

Index 29

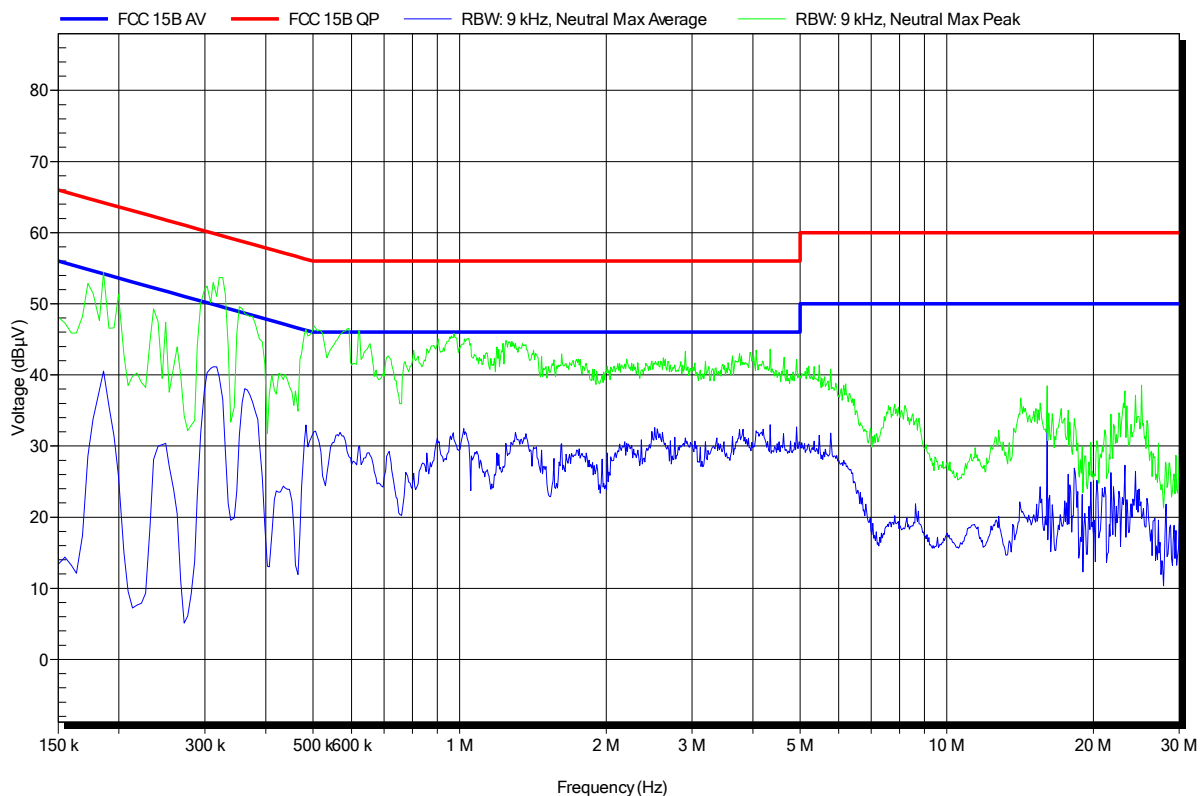


EMI voltage test in the ac-mains according to FCC Part 15b

Project number: G0M-1502-4516

Applicant:	Roth & Rau - Ortner GmbH
EUT Name:	RFID reader with CAN interface
Model:	HF-CAN-M
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: 120VAC (AC/DC-adap.model-SYS1308-2424-W2E)
LISN:	ESH2-Z5 L
Mode:	CAN-link with RRO2101953-antenna (Ø 12mm)
Test Date:	2015-03-13
Note:	

Index 31

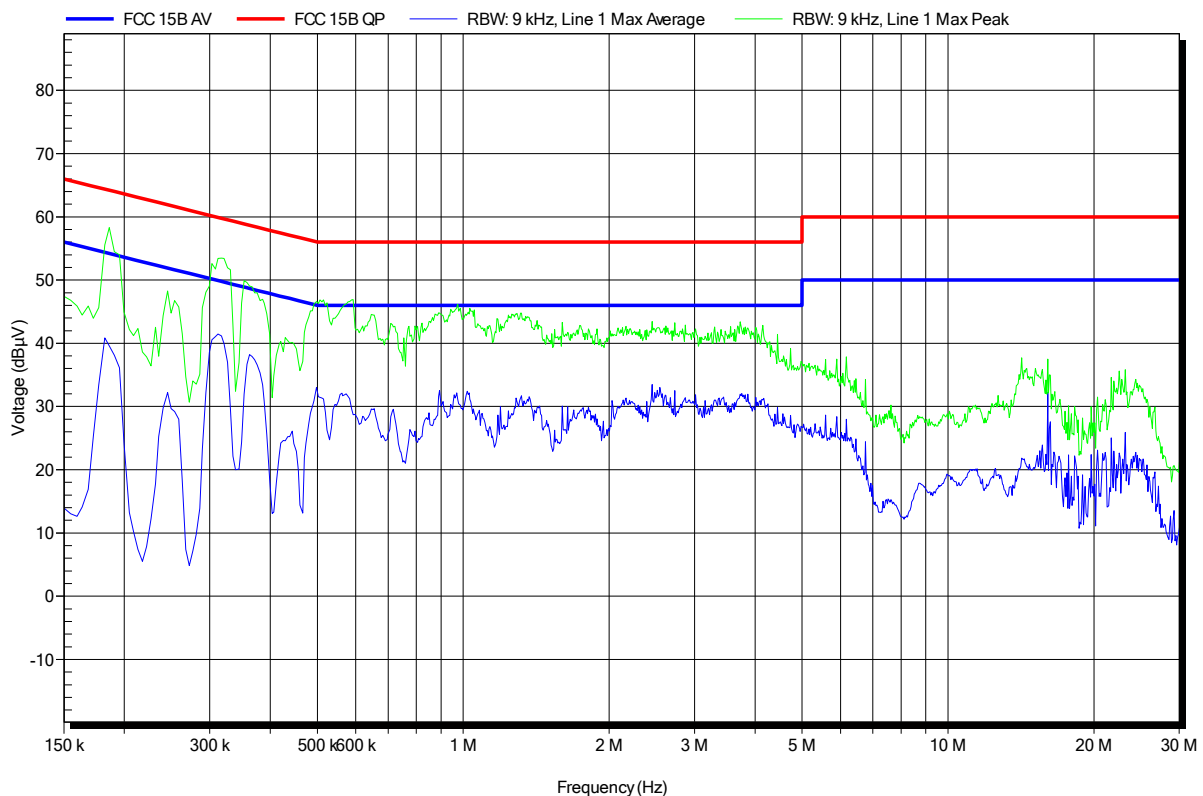


EMI voltage test in the ac-mains according to FCC Part 15b

Project number: G0M-1502-4516

Applicant:	Roth & Rau - Ortner GmbH
EUT Name:	RFID reader with CAN interface
Model:	HF-CAN-M
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: 120VAC(AC/DC-adap.model-SYS1308-2424-W2E)
LISN:	ESH2-Z5 N
Mode:	CAN-link with RRO2400007-antenna (ø 20mm)
Test Date:	2015-03-13
Note:	

Index 30

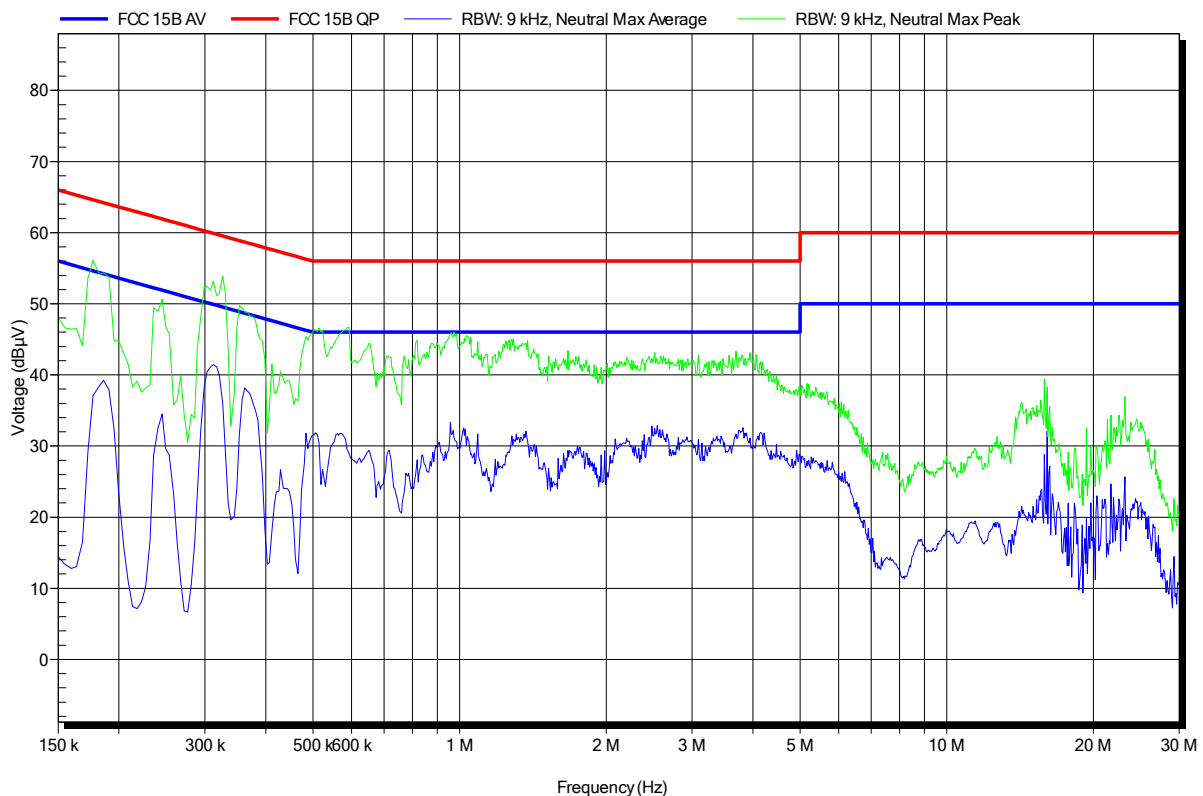

EMI voltage test in the ac-mains according to FCC Part 15b

Project number: G0M-1502-4516

Applicant:	Roth & Rau - Ortner GmbH
EUT Name:	RFID reader with CAN interface
Model:	HF-CAN-M
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: 120VAC (AC/DC-adap.model-SYS1308-2424-W2E)
LISN:	ESH2-Z5 L
Mode:	CAN-link with RRO2400007-antenna (Ø 20mm)
Test Date:	2015-03-13
Note:	

Index 31

