

FCC PART 15.249

TEST REPORT

For

Zaidtek Electronic Technology (Xiamen) Co., Ltd.

No.285, Wengjiao Road, Haicang District, Xiamen, Fujian, Xiamen, 361022, China

FCC ID: YVYHYXHM8009

Report Type: Original Report		Product Type: 2.4GHz wireless optical mouse	
Test Engineer:	Robin Zheng	<i>Robin Zheng</i>	
Report Number:	RXM160620051-00		
Report Date:	2016-07-07		
Reviewed By:	Jerry Zhang EMC Manager	<i>Jerry Zhang</i>	
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn		

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE.....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY.....	3
TEST FACILITY.....	3
SYSTEM TEST CONFIGURATION.....	4
JUSTIFICATION.....	4
EUT EXERCISE SOFTWARE.....	4
EQUIPMENT MODIFICATIONS.....	4
BLOCK DIAGRAM OF TEST SETUP.....	4
SUMMARY OF TEST RESULTS.....	6
FCC§15.203 - ANTENNA REQUIREMENT.....	7
APPLICABLE STANDARD.....	7
ANTENNA CONNECTOR CONSTRUCTION.....	7
FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS.....	8
APPLICABLE STANDARD.....	8
MEASUREMENT UNCERTAINTY.....	8
EUT SETUP.....	9
TEST EQUIPMENT SETUP.....	10
TEST PROCEDURE.....	10
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	10
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA.....	11
FCC §15.215(C) – 20 DB BANDWIDTH TESTING.....	15
APPLICABLE STANDARD.....	15
TEST PROCEDURE.....	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA.....	15

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Zaidtek Electronic Technology (Xiamen) Co., Ltd.'s product, model number: HM8009 (FCC ID: YVYHYXHM8009) (the "EUT") in this report was a 2.4GHz wireless optical mouse, was measured approximately: 12.2 cm (L) x 7.2 cm (W) x 4.0 cm(H), rated input voltage: DC 3V from battery.

Note: the series product, model HM8009, CRC#8037018 are electrically identical, the differences between them are model name, we selected HM8009 for fully testing, the details were explained in the attached declaration letter.

** All measurement and test data in this report was gathered from production sample serial number: 160620051 (Assigned by BACL.Dongguan). The EUT was received on 2016-06-22.*

Objective

This type approval report is prepared on behalf of Zaidtek Electronic Technology (Xiamen) Co., Ltd. in accordance with Part 2-Subpart J, and Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.249 rules.

Related Submittal(s)/Grant(s)

Submitted with the part of a system with FCC ID: YVYHYXHR036

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in engineering mode with maximum power output and switched the channels by key.

Channels list as follows:

Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
1	2405	5	2440
2	2413	6	2450
3	2422	7	2460
4	2430	8	2470

Channel 1, 4, 8 were selected to test.

EUT Exercise Software


No software was used in test.

Equipment Modifications


No modifications were made to the EUT.

Block Diagram of Test Setup

30-1000MHz Radiation Test:

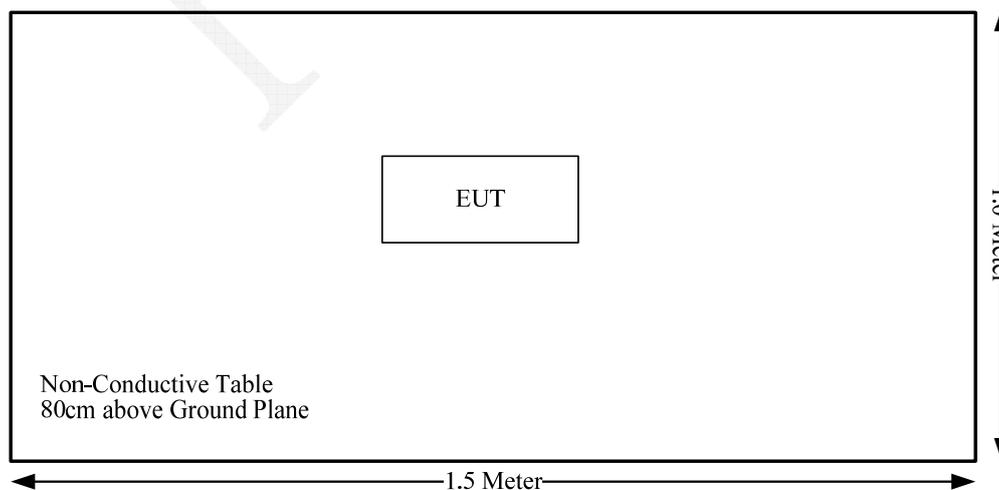

Above 1GHz Radiation Test:

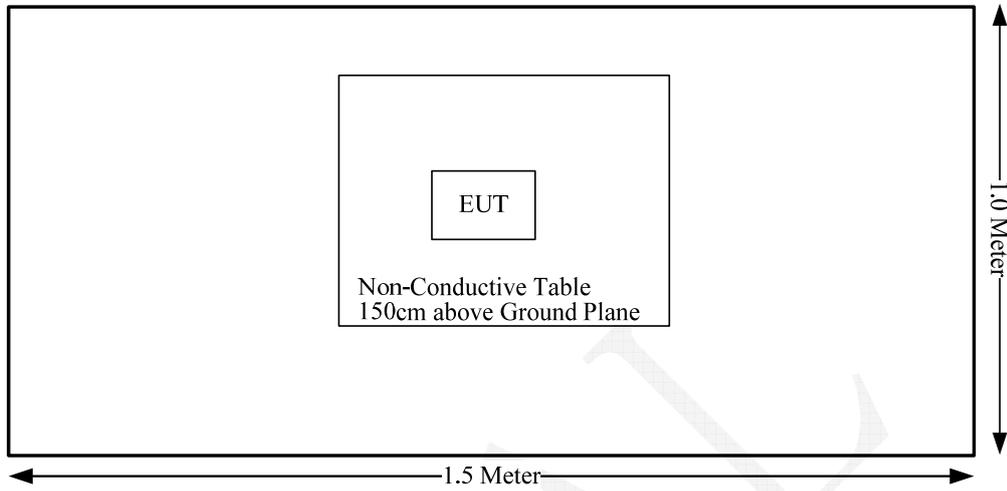

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	Not Applicable
15.205, §15.209, §15.249	Radiated Emissions	Compliance
§15.215 (c)	20 dB Bandwidth	Compliance

Not Applicable: The device is battery operated equipment.

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

The EUT has one integral antenna arrangement, which was permanently attached and the antenna gain is -1.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

FUNIVAL

FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.


Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is: 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB

Table 1 – Values of U_{cispr}


Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1 GHz:

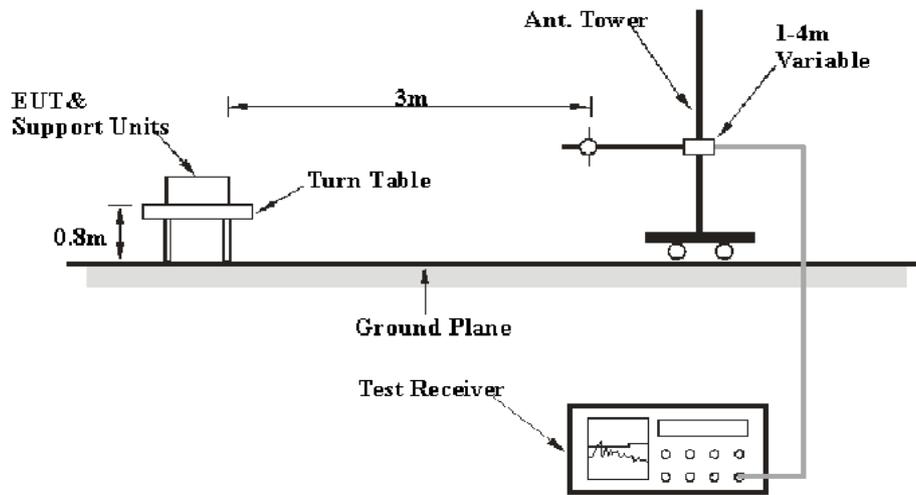

Above 1 GHz:

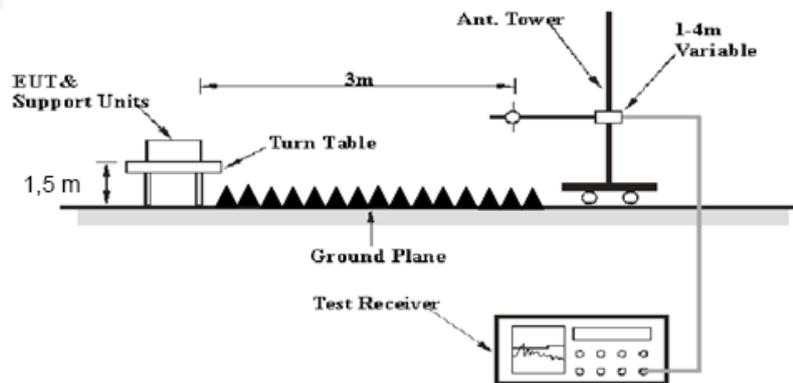

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013 The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

Test Equipment Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30 MHz to 1GHz, peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-12-04	2016-12-04
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2016-02-19	2017-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2016-05-09	2017-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW- 18405536-JO	15964001001	2015-09-06	2016-09-06
N/A	Coaxial Cable	14m	N/A	2016-05-06	2017-05-06
N/A	Coaxial Cable	8m	N/A	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	26.6 °C
Relative Humidity:	50 %
ATM Pressure:	100.1 kPa

The testing was performed by Robin Zheng on 2016-06-28.

Test Mode: Transmitting


30MHz-1GHz:

Horizontal

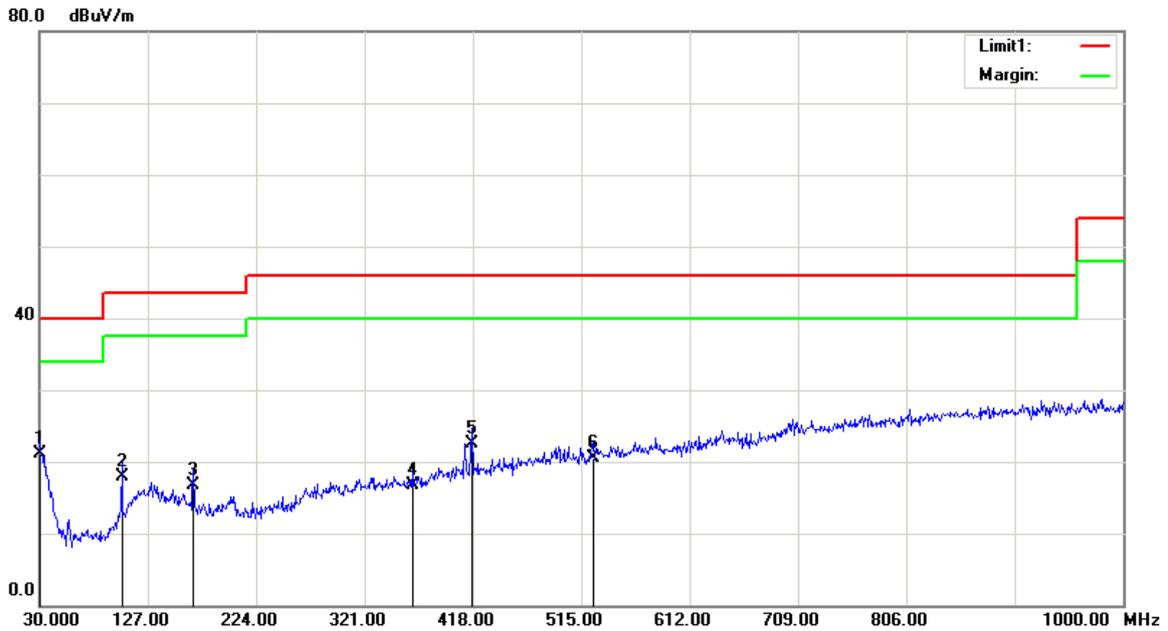

Frequency (MHz)	Receiver Reading (dBµV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
30.0000	20.15	QP	0.95	21.10	40.00	18.90
103.7200	26.50	QP	-8.60	17.90	43.50	25.60
167.7400	24.53	QP	-7.73	16.80	43.50	26.70
363.6800	21.21	QP	-4.51	16.70	46.00	29.30
417.0300	25.90	QP	-3.30	22.60	46.00	23.40
525.6700	22.26	QP	-1.66	20.60	46.00	25.40

Vertical

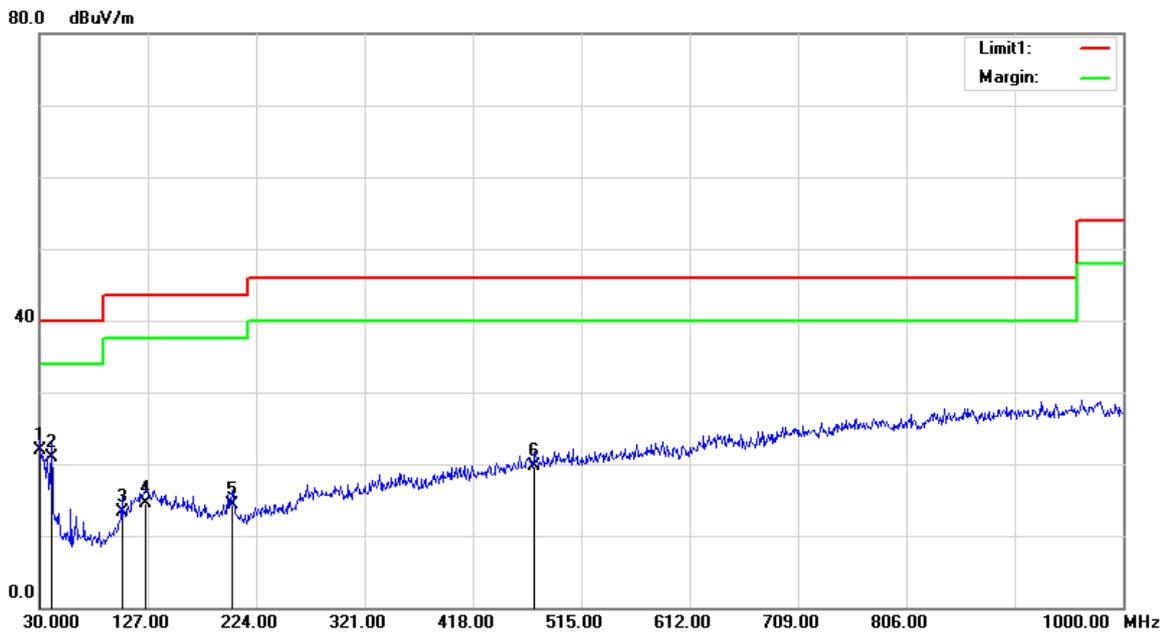

Frequency (MHz)	Receiver Reading (dB μ V)	Detector	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
30.0000	20.95	QP	0.95	21.90	40.00	18.10
40.6700	27.88	QP	-6.98	20.90	40.00	19.10
103.7200	22.00	QP	-8.60	13.40	43.50	30.10
125.0600	20.04	QP	-5.54	14.50	43.50	29.00
202.6600	21.77	QP	-7.47	14.30	43.50	29.20
473.2900	21.45	QP	-1.75	19.70	46.00	26.30

1G-25GHz:

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Limit	Margin
	Reading	Detector	Polar	Factor					
MHz	dBµV	PK/QP/AV	H/V	dB(1/m)	dB	dB	dBµV/m	dBµV/m	dB
frequency:2405MHz									
2405	66.3	PK	H	25.65	3.66	0.00	95.61	114.00	18.39
2405	55.95	AV	H	25.65	3.66	0.00	85.26	94.00	8.74
2405	55.46	PK	V	25.65	3.66	0.00	84.77	114.00	29.23
2405	45.24	AV	V	25.65	3.66	0.00	74.55	94.00	19.45
2400	30.42	PK	H	25.64	3.65	0.00	59.71	74.00	14.29
2400	21.52	AV	H	25.64	3.65	0.00	50.81	54.00	3.19
4810	53.06	PK	H	30.61	5.05	27.41	61.31	74.00	12.69
4810	22.81	AV	H	30.61	5.05	27.41	31.06	54.00	22.94
7215	37.69	PK	H	34.12	6.62	25.91	52.52	74.00	21.48
7215	13.51	AV	H	34.12	6.62	25.91	28.34	54.00	25.66
3198	32.97	PK	H	27.83	6.12	27.37	39.55	74.00	34.45
3198	20.36	AV	H	27.83	6.12	27.37	26.94	54.00	27.06
frequency:2430MHz									
2430	66.7	PK	H	25.72	3.73	0.00	96.15	114.00	17.85
2430	56.41	AV	H	25.72	3.73	0.00	85.86	94.00	8.14
2430	53.83	PK	V	25.72	3.73	0.00	83.28	114.00	30.72
2430	43.67	AV	V	25.72	3.73	0.00	73.12	94.00	20.88
4860	50.51	PK	H	30.74	5.05	27.42	58.88	74.00	15.12
4860	20.34	AV	H	30.74	5.05	27.42	28.71	54.00	25.29
7290	40.96	PK	H	34.30	6.71	25.89	56.08	74.00	17.92
7290	12.51	AV	H	34.30	6.71	25.89	27.63	54.00	26.37
3035	33.26	PK	H	27.31	6.69	27.50	39.76	74.00	34.24
3035	30.98	AV	H	27.31	6.69	27.50	37.48	54.00	16.52
3828	32.62	PK	H	29.52	4.64	27.35	39.43	74.00	34.57
3828	30.15	AV	H	29.52	4.64	27.35	36.96	54.00	17.04
frequency:2470MHz									
2470	66.92	PK	H	25.82	3.72	0.00	96.46	114.00	17.54
2470	56.71	AV	H	25.82	3.72	0.00	86.25	94.00	7.75
2470	58.09	PK	V	25.82	3.72	0.00	87.63	114.00	26.37
2470	47.72	AV	V	25.82	3.72	0.00	77.26	94.00	16.74
2483.5	26.26	PK	H	25.86	3.67	0.00	55.79	74.00	18.21
2483.5	14.26	AV	H	25.86	3.67	0.00	43.79	54.00	10.21
4940	50.92	PK	H	30.94	5.36	27.43	59.79	74.00	14.21
4940	21.34	AV	H	30.94	5.36	27.43	30.21	54.00	23.79
7410	44.98	PK	H	34.58	6.85	25.89	60.52	74.00	13.48
7410	15.35	AV	H	34.58	6.85	25.89	30.89	54.00	23.11
3198	32.53	PK	H	27.83	6.12	27.37	39.11	74.00	34.89
3198	20.39	AV	H	27.83	6.12	27.37	26.97	54.00	27.03

FCC §15.215(c) – 20 dB BANDWIDTH TESTING

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
2. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	831259/019	2015-07-28	2016-07-27
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2016-02-19	2017-02-19
N/A	Coaxial Cable	14m	N/A	2016-05-06	2017-05-06
N/A	Coaxial Cable	8m	N/A	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.8°C
Relative Humidity:	49 %
ATM Pressure:	100.3 kPa

* The testing was performed by Robin Zheng on 2016-07-01.


Test Result: Compliant.

Please refer to following tables and plots

Test Mode: Transmitting


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2405	2.63
Middle	2430	2.48
High	2470	2.30

Low Channel

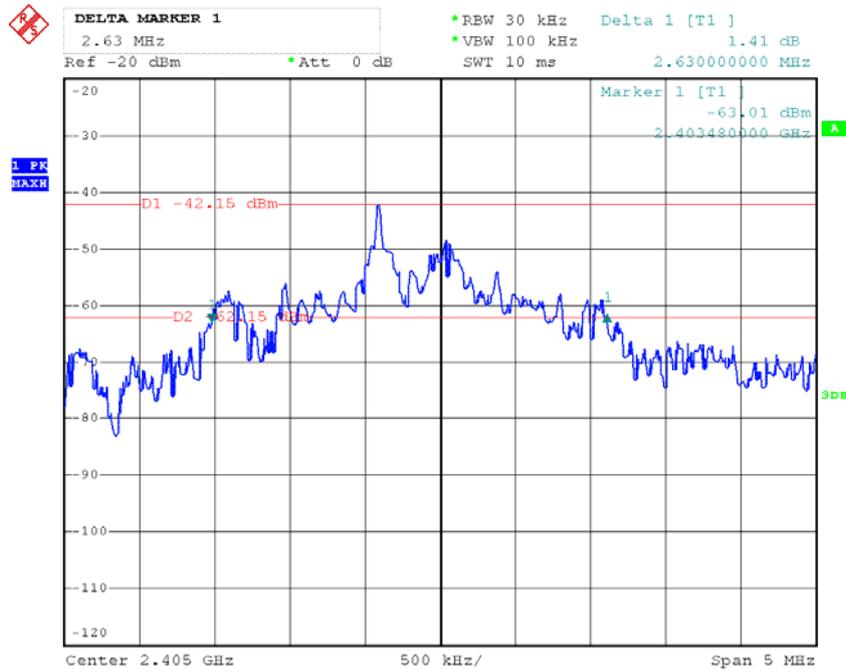


Date: 1.JUL.2016 11:23:24

Middle Channel

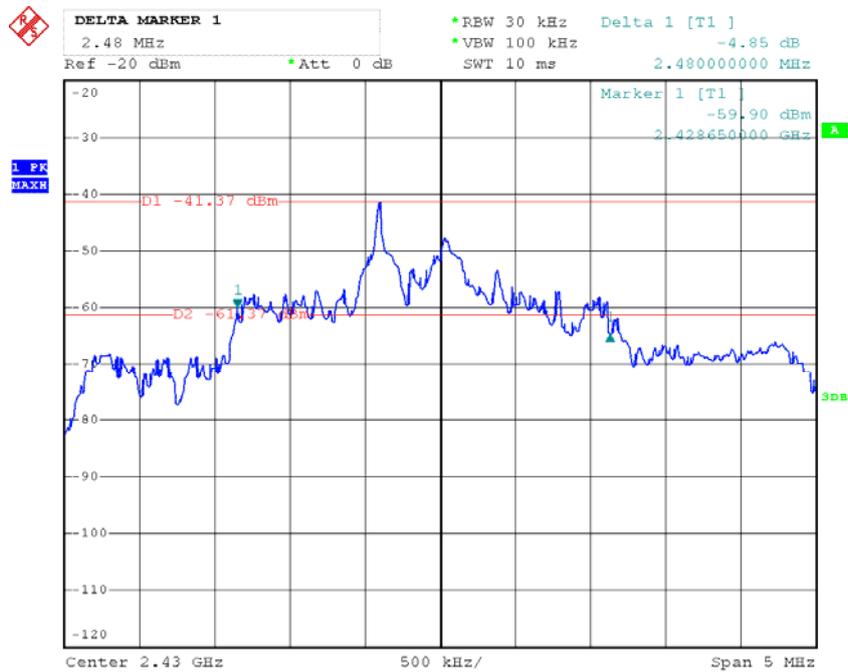

Date: 1.JUL.2016 11:31:05

High Channel

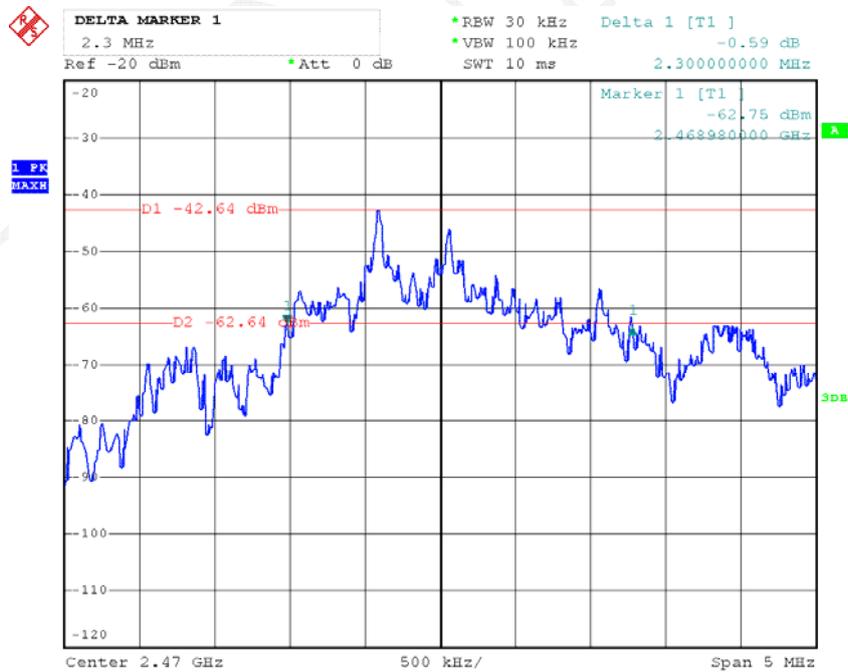

Date: 1.JUL.2016 11:27:43

***** END OF REPORT *****