



FCC Report

Applicant: Shenzhen Firstview Electronic Co. Ltd.

Address of Applicant: 3-4/F, Block B, Huafeng 1st Technology Zone, Baoan Main Road, Baoan District, Shenzhen, China

Equipment Under Test (EUT)

Product Name: 8 inch tablet

Model No.: HT0800IM32, VTA0802IM16, MI847

FCC ID: YW5HT0800IM32

Applicable standards: FCC CFR Title 47 Part 15 Subpart B:2016

Date of sample receipt: December 16, 2016

Date of Test: December 16-21, 2016

Date of report issue: December 21, 2016

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	December 21, 2016	Original

Prepared By:




Date:

December 21, 2016

Project Engineer

Check By:



Date:

December 21, 2016

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST MODE	5
5.4 TEST FACILITY	6
5.5 TEST LOCATION	6
5.6 DESCRIPTION OF SUPPORT UNITS	6
5.7 DEVIATION FROM STANDARDS	6
5.8 ABNORMALITIES FROM STANDARD CONDITIONS	6
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA	8
7.1 CONDUCTED EMISSIONS	8
7.2 RADIATED EMISSION	11
8 TEST SETUP PHOTO	17
9 EUT CONSTRUCTIONAL DETAILS	19

4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part15.107	PASS
Radiated Emissions	Part15.109	PASS

PASS: The EUT complies with the essential requirements in the standard.

Remark : Test according to ANSI C63.4:2014.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 Client Information

Applicant:	Shenzhen Firstview Electronic Co. Ltd.
Address of Applicant:	3-4/F, Block B, Huafeng 1st Technology Zone, Baoan Main Road, Baoan District, Shenzhen, China

5.2 General Description of EUT

Product Name:	8 inch tablet
Model No.:	HT0800IM32, VTA0802IM16, MI847
Test Model No. :	HT0800IM32
<i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The only difference is the model name for commercial purpose.</i>	
Power Supply:	AC/DC Adapter Model: HLT-003-0502000U Input: AC 100-240V 50/60Hz 0.35A Output: DC 5V, 2A Or DC 3.7V, 4000mAh, Li-ion Battery 14.8Wh

5.3 Test mode

Test mode:	
Burnning test mode	Keep the EUT in PC working mode
REC mode	Keep the EUT in record mode.
Playing with TF card mode	Keep the EUT in playing with TF card mode.
Playing with Int. momery mode	Keep the EUT in playing with Int. momery mode.

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.6 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC Approval
Kingston	TF card	SD-C01G	N/A	FCC DoC
DELL	MOUSE	N/A	N/A	FCC DoC
HYUNDAI	USB hubs	HY-HB608	N/A	FCC DoC

5.7 Deviation from Standards

Biconical, log.per. antenna and horn antenna were used instead of dipole antenna.

Semi-anechoic Chamber was used as alternation of open air test sites, and all test suites were performed with radiated method in it.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	ESU EMI Test Receiver	R&S	ESU26	GTS203	June. 29 2016	June. 28 2017
4	BiConiLog Antenna	SCHWARZBECK	VULB9163	GTS214	June. 29 2016	June. 28 2017
5	Double-ridged horn antenna	SCHWARZBECK	9120D	GTS208	June. 29 2016	June. 28 2017
6	RF Amplifier	HP	8347A	GTS204	June. 29 2016	June. 28 2017
7	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	June. 29 2016	June. 28 2017
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial cable	GTS	N/A	GTS210	June. 29 2016	June. 28 2017
10	Coaxial Cable	GTS	N/A	GTS211	June. 29 2016	June. 28 2017
11	Thermo meter	N/A	N/A	GTS256	June. 29 2016	June. 28 2017


Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 29 2016	June. 28 2017
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 29 2016	June. 28 2017
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 29 2016	June. 28 2017
5	Coaxial Cable	GTS	N/A	GTS227	June. 29 2016	June. 28 2017
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 29 2016	June. 28 2017

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	Jun. 29 2016	Jun. 28 2017


7 Test Results and Measurement Data

7.1 Conducted Emissions

Test Requirement:	FCC Part15 B Section 15.107		
Test Method:	ANSI C63.4:2014		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto		
Test mode:	Pretest EUT working with all modes to find the worst case, find the worst case is Burnning test mode, the test worst case Burnning test mode is recorded in the report.		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	<p style="text-align: center;">Reference Plane</p> <p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>		
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement. 		
Test Instruments:	Refer to section 6 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

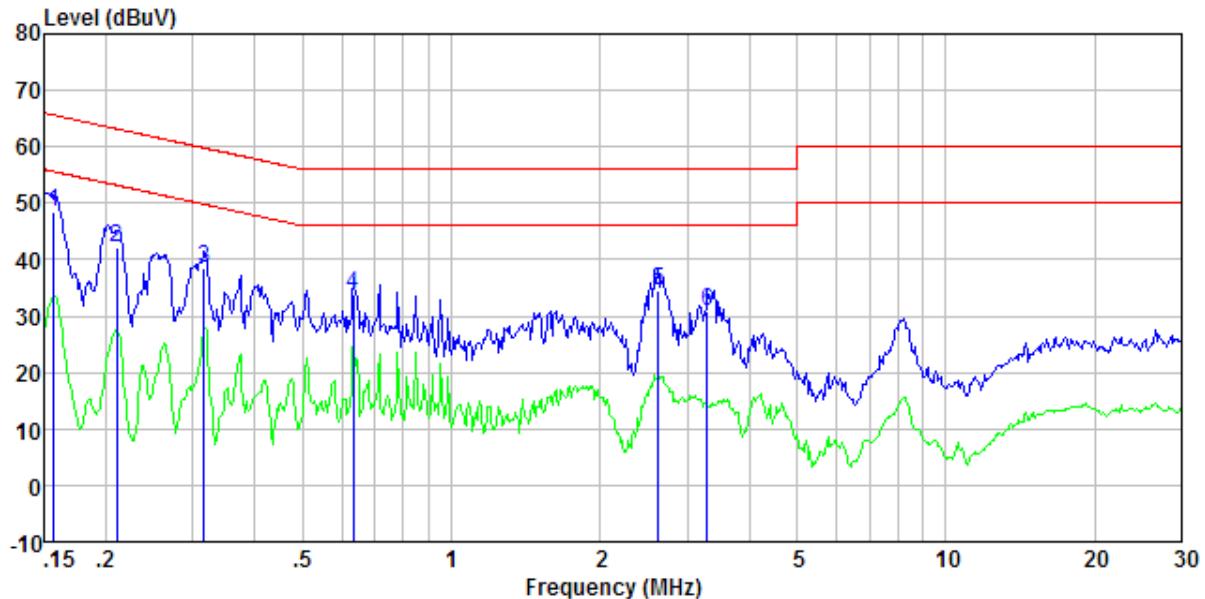Measurement Data
Line:


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.157	47.77	0.42	0.12	48.31	65.60	-17.29	QP
2	0.211	41.65	0.43	0.13	42.21	63.18	-20.97	QP
3	0.317	37.94	0.44	0.10	38.48	59.80	-21.32	QP
4	0.634	33.39	0.30	0.13	33.82	56.00	-22.18	QP
5	2.622	34.08	0.20	0.15	34.43	56.00	-21.57	QP
6	3.293	30.43	0.21	0.15	30.79	56.00	-25.21	QP

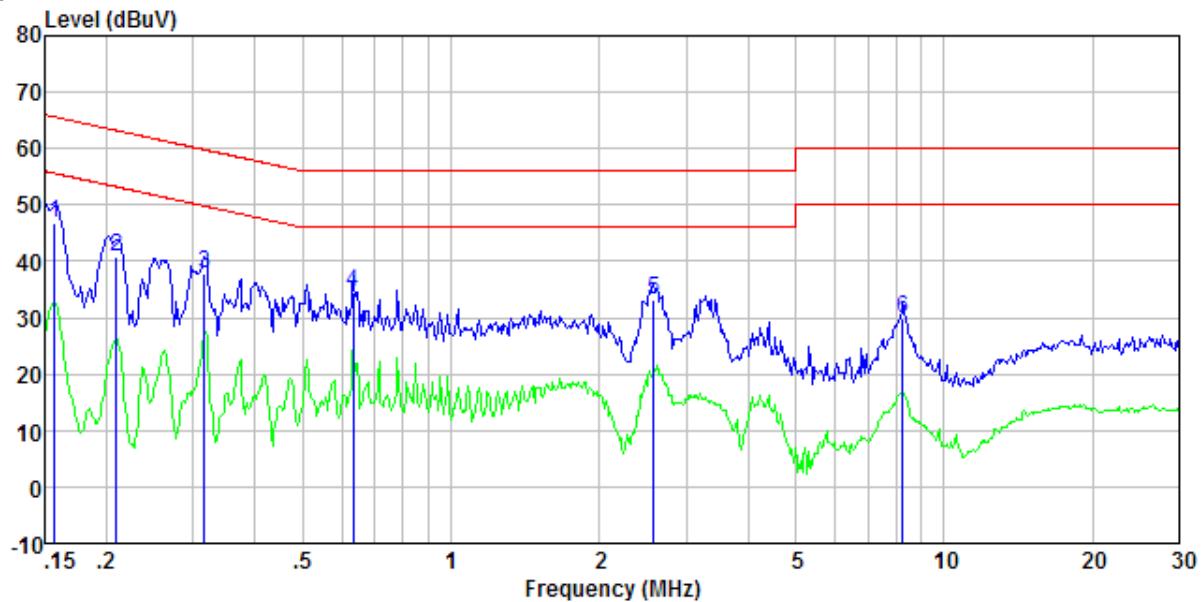Neutral:


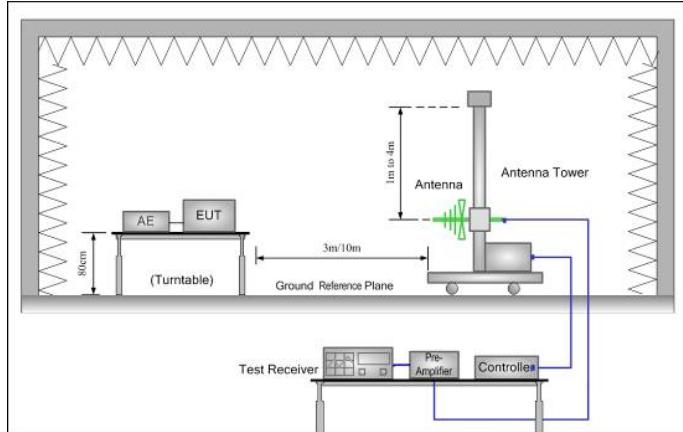
Freq MHz	Read Level dBuV	LISN Factor dB	Cable Loss dB	Level dBuV	Limit Line dBuV	Over Limit dB	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1 0.157	46.25	0.41	0.12	46.78	65.60	-18.82	QP
2 0.209	40.29	0.41	0.13	40.83	63.23	-22.40	QP
3 0.317	37.32	0.42	0.10	37.84	59.80	-21.96	QP
4 0.634	34.03	0.26	0.13	34.42	56.00	-21.58	QP
5 2.581	32.84	0.20	0.15	33.19	56.00	-22.81	QP
6 8.235	29.52	0.22	0.18	29.92	60.00	-30.08	QP

Notes:


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.
5. Only the worst case shows above

7.2 Radiated Emission

Test Requirement:	FCC Part15 B Section 15.109																									
Test Method:	ANSI C63.4:2014																									
Test Frequency Range:	30MHz to 25GHz																									
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																									
Test mode:	Pretest EUT working with all modes to find the worst case, find the worst case is Burnning test mode, the test worst case Burnning test mode is recorded in the report.																									
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Detector</th><th>RBW</th><th>VBW</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td><td>Quasi-peak</td><td>120kHz</td><td>300kHz</td><td>Quasi-peak Value</td></tr> <tr> <td>Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr> <tr> <td></td><td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average Value</td></tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value		Peak	1MHz	10Hz	Average Value	
Frequency	Detector	RBW	VBW	Remark																						
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value																						
Above 1GHz	Peak	1MHz	3MHz	Peak Value																						
	Peak	1MHz	10Hz	Average Value																						
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Limit (dBuV/m @3m)</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td><td>40.00</td><td>Quasi-peak Value</td></tr> <tr> <td>88MHz-216MHz</td><td>43.50</td><td>Quasi-peak Value</td></tr> <tr> <td>216MHz-960MHz</td><td>46.00</td><td>Quasi-peak Value</td></tr> <tr> <td>960MHz-1GHz</td><td>54.00</td><td>Quasi-peak Value</td></tr> <tr> <td>Above 1GHz</td><td>54.00</td><td>Average Value</td></tr> <tr> <td></td><td>74.00</td><td>Peak Value</td></tr> </tbody> </table>					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.00	Quasi-peak Value	88MHz-216MHz	43.50	Quasi-peak Value	216MHz-960MHz	46.00	Quasi-peak Value	960MHz-1GHz	54.00	Quasi-peak Value	Above 1GHz	54.00	Average Value		74.00	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																								
30MHz-88MHz	40.00	Quasi-peak Value																								
88MHz-216MHz	43.50	Quasi-peak Value																								
216MHz-960MHz	46.00	Quasi-peak Value																								
960MHz-1GHz	54.00	Quasi-peak Value																								
Above 1GHz	54.00	Average Value																								
	74.00	Peak Value																								
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 																									
Test setup:	Below 1GHz																									



Above 1GHz

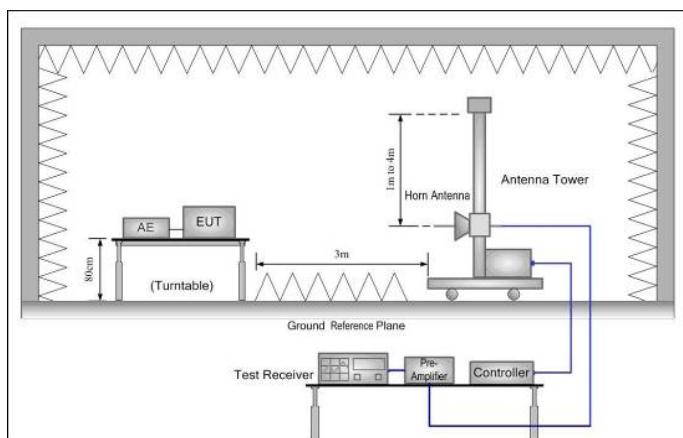

Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1 012mbar
Measurement Record:	Uncertainty: $\pm 4.5\text{dB}$					
Test Instruments:	Refer to section 6 for details					
Test mode:	Refer to section 5.3 for details					
Test results:	Pass					

Note 1:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor


Note 2:

6GHz to 25GHz no emission found , only the worst case is reported

Measurement Data

Below 1GHz


Horizontal:

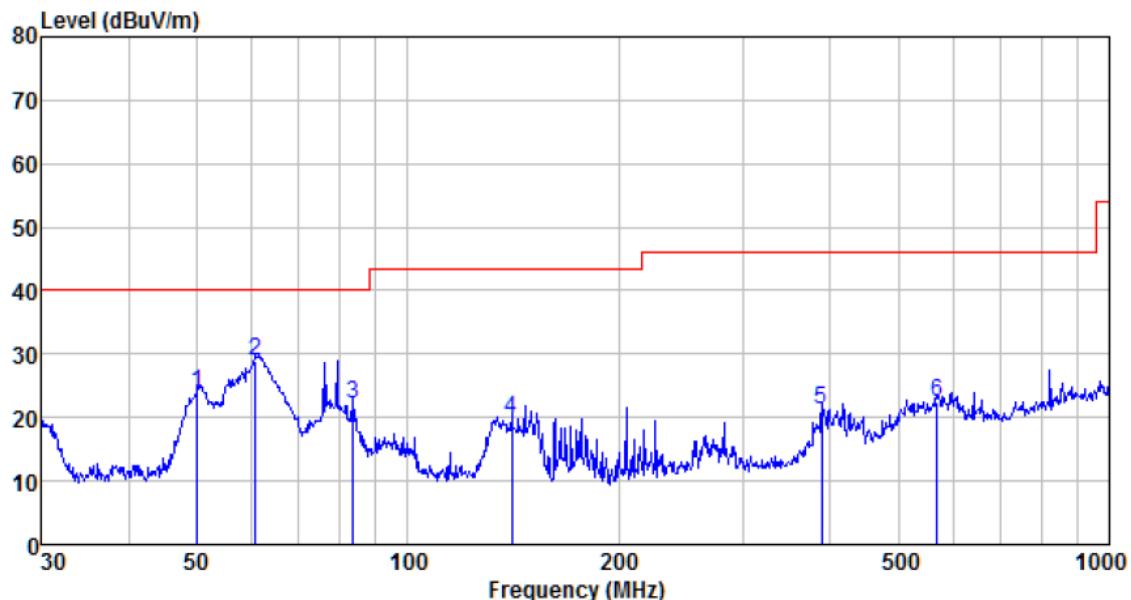

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dBuV/m	Preamp factor dB	level dB	Limit level dBuV/m	Over limit dB	Remark
50.057	38.04	15.25	0.77	30.00	24.06	40.00	-15.94	QP
60.704	43.57	14.43	0.87	29.92	28.95	40.00	-11.05	QP
83.522	39.07	11.87	1.06	29.78	22.22	40.00	-17.78	QP
140.835	37.40	10.20	1.51	29.45	19.66	43.50	-23.84	QP
389.355	31.04	16.83	2.80	29.55	21.12	46.00	-24.88	QP
568.613	28.33	19.93	3.59	29.30	22.55	46.00	-23.45	QP

Remarks: level = Reading level + Antenna factor + Cable loss - Preamp Factor

Vertical:

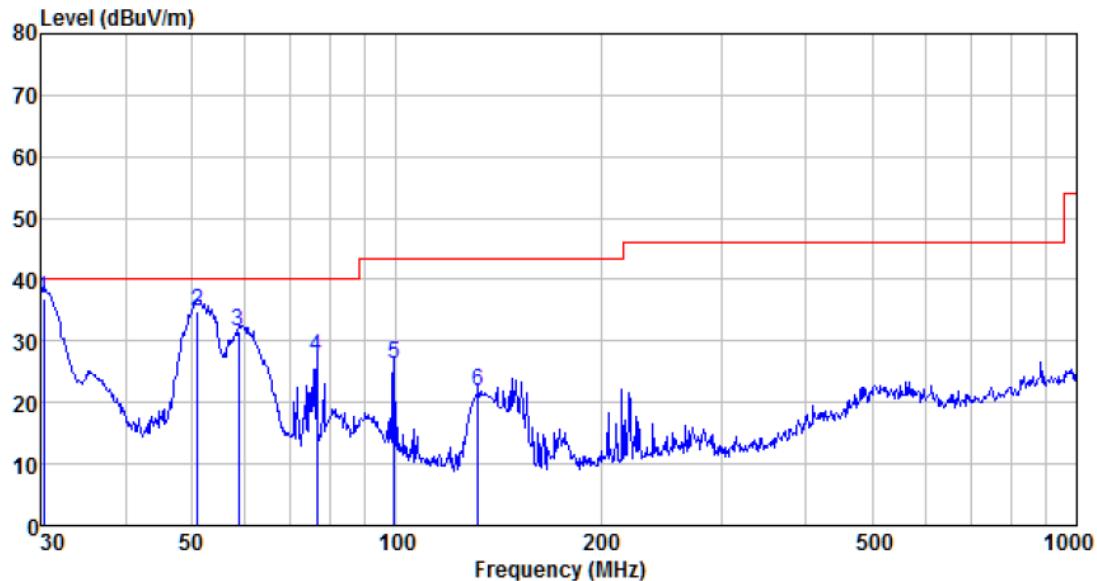


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dBuV/m	Preamp factor dB	level dB	Limit level dBuV/m	Over limit dB	Remark
30.317	52.00	14.33	0.55	30.10	36.78	40.00	-3.22	QP
51.121	48.81	15.20	0.78	29.99	34.80	40.00	-5.20	QP
58.613	45.77	14.78	0.85	29.93	31.47	40.00	-8.53	QP
76.512	46.13	10.03	1.00	29.82	27.34	40.00	-12.66	QP
99.180	39.80	15.13	1.18	29.70	26.41	43.50	-17.09	QP
131.758	39.02	10.82	1.45	29.50	21.79	43.50	-21.71	QP

Remarks: level = Reading level + Antenna factor + Cable loss - Preamp Factor

Above 1GHz


Horizontal:

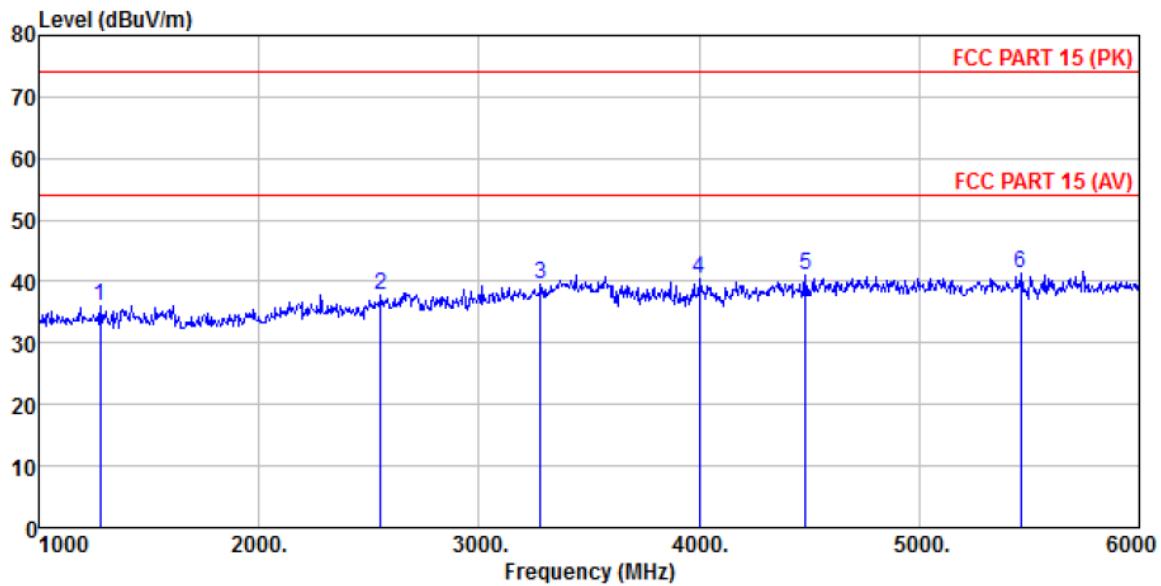

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dBuV/m	Preamp factor dB	level dB	Limit level dBuV/m	Over limit dB	Remark
1280.000	39.14	25.59	4.53	33.21	36.05	74.00	-37.95	Peak
2555.000	38.61	27.62	5.54	33.84	37.93	74.00	-36.07	Peak
3280.000	37.51	28.41	6.52	33.00	39.44	74.00	-34.56	Peak
4000.000	35.19	29.68	7.87	32.19	40.55	74.00	-33.45	Peak
4485.000	33.35	31.29	8.32	31.93	41.03	74.00	-32.97	Peak
5460.000	32.48	31.92	9.45	32.41	41.44	74.00	-32.56	Peak

Remarks: level = Reading level + Antenna factor + Cable loss - Preamp Factor

Vertical:


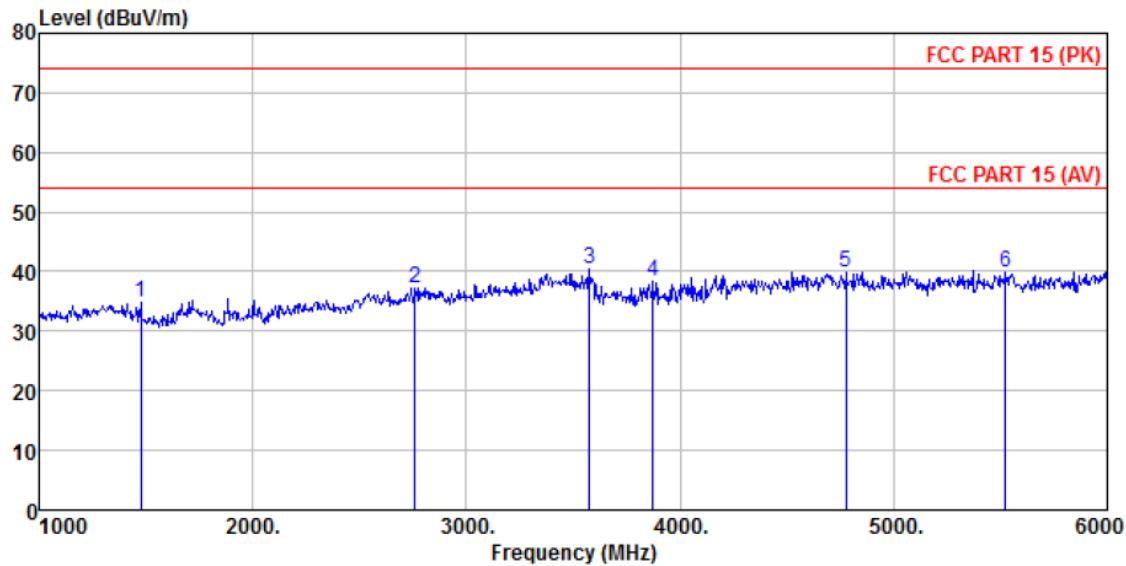


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dBuV/m	Preamp factor dB	level dB	Limit level dBuV/m	Over limit dB	Remark
1475.000	38.37	25.28	4.66	33.56	34.75	74.00	-39.25	Peak
2760.000	36.87	28.28	5.72	33.59	37.28	74.00	-36.72	Peak
3575.000	36.90	29.11	7.11	32.67	40.45	74.00	-33.55	Peak
3875.000	33.68	29.47	7.66	32.33	38.48	74.00	-35.52	Peak
4775.000	31.62	31.75	8.58	32.07	39.88	74.00	-34.12	Peak
5525.000	30.69	32.05	9.54	32.42	39.86	74.00	-34.14	Peak

Remarks: level = Reading level + Antenna factor + Cable loss - Preamp Factor

8 Test Setup Photo


Radiated Emission

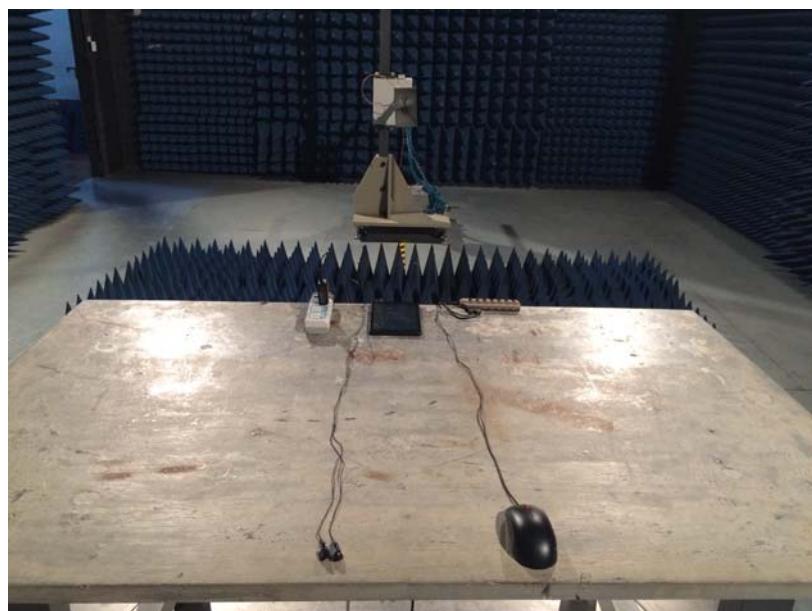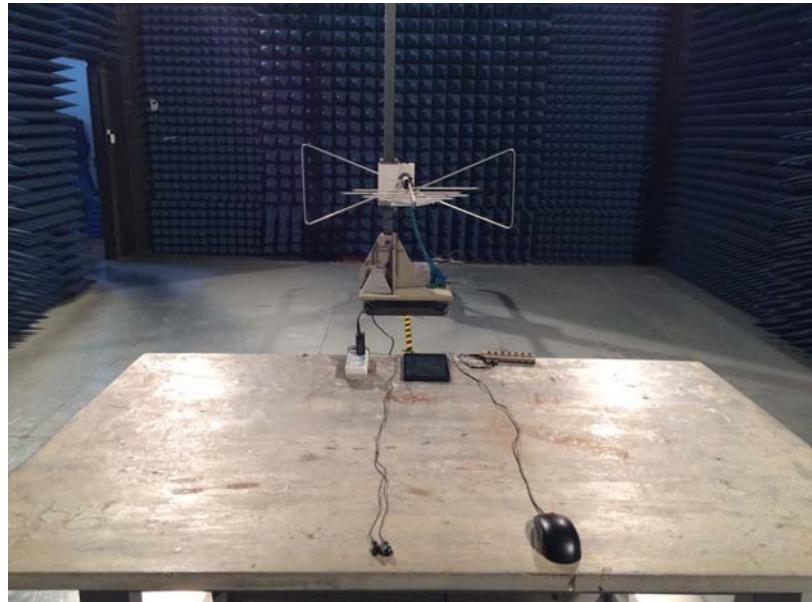


Conducted Emission



9 EUT Constructional Details

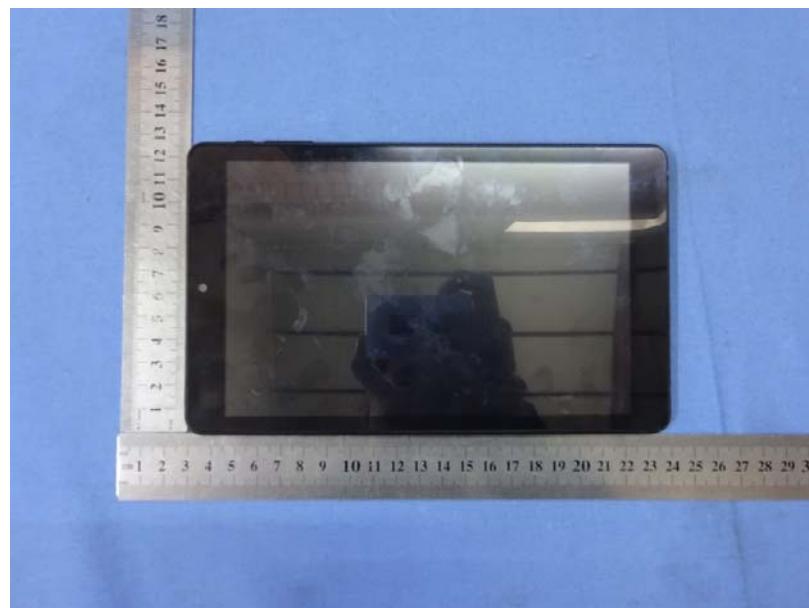





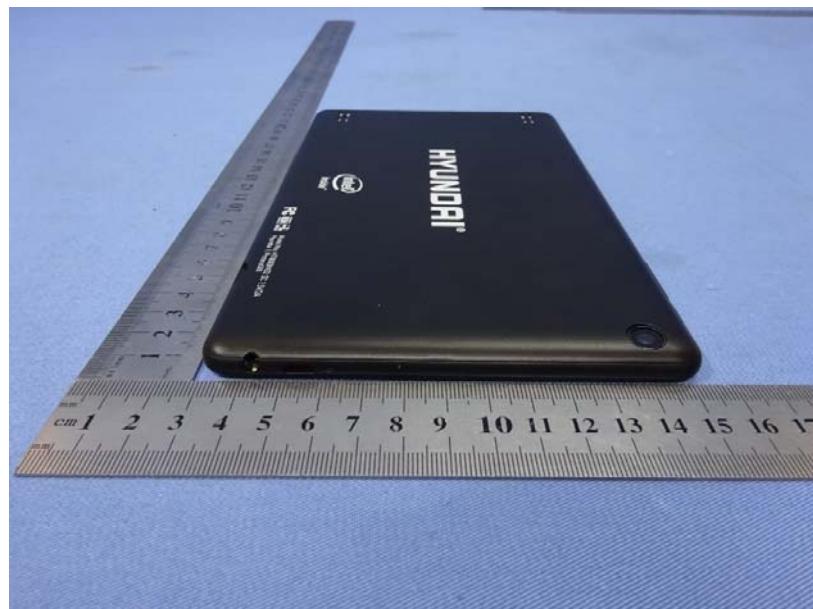






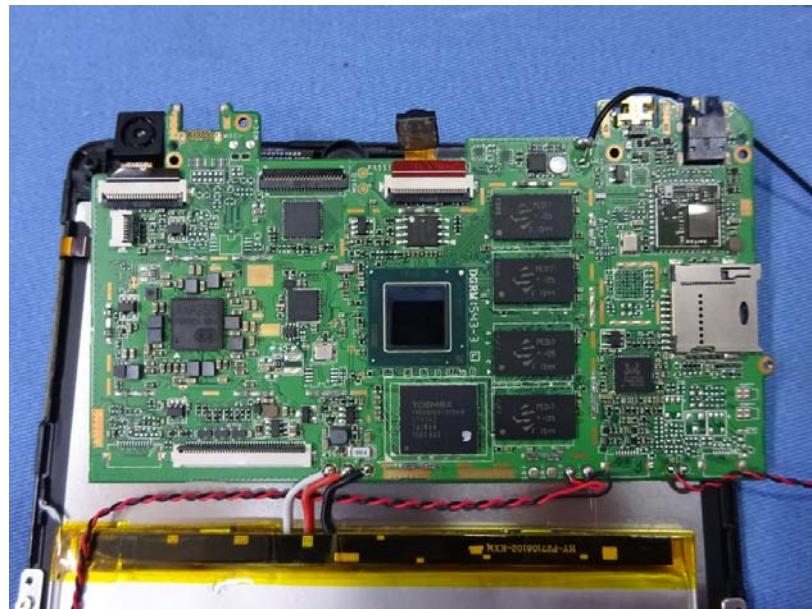



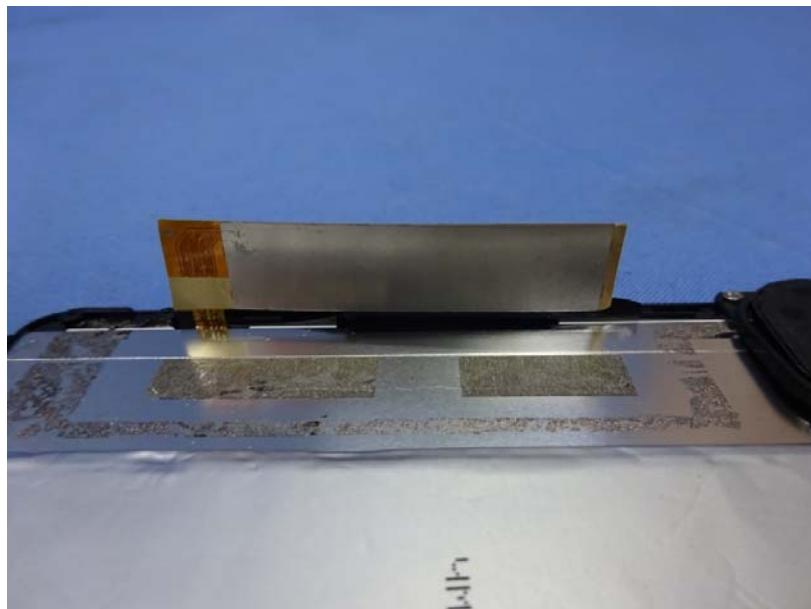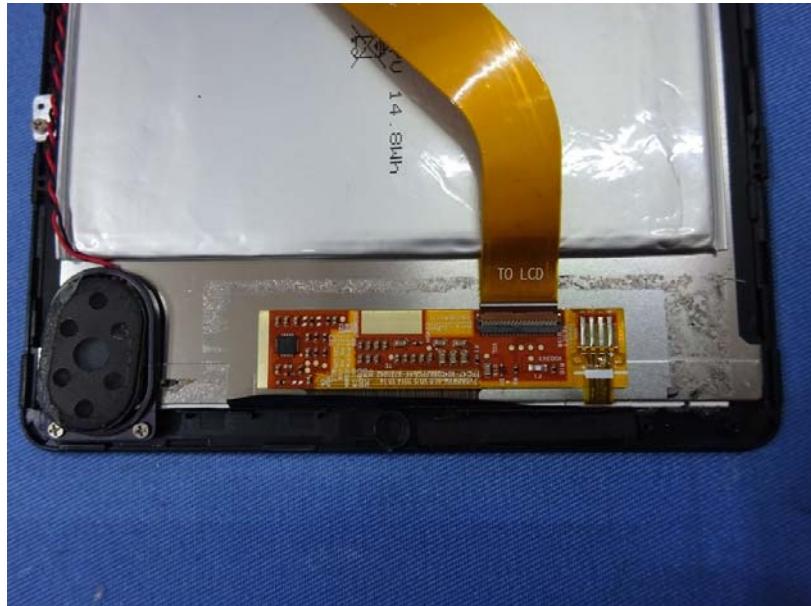



----- End -----