



FCC ID:YWO-M-XPT1MR

AUDIX Technology (Shenzhen) Co., Ltd.

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

ELECOM CO., LTD.

ELECOM TrackBall Mouse

M-XPT1MR; M-XPT1MRX

FCC ID: YWO-M-XPT1MR

Prepared for : ELECOM CO., LTD.

Fushimimachi 4-1-1, Chuo-ku, Osaka, Japan 541-8765

Prepared By : Audix Technology (Shenzhen) Co., Ltd.

No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F18106
Date of Test : Apr.09~10, 2018
Date of Report : May.08, 2018

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS.....	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT).....	2-1
2.2. Tested Supporting System Details.....	2-2
2.3. Block Diagram of connection between EUT and simulators	2-2
2.4. Test information.....	2-2
2.5. Test Facility	2-3
2.6. Measurement Uncertainty (95% confidence levels, k=2).....	2-3
3. POWER LINE CONDUCTED EMISSION TEST	3-1
4. RADIATED EMISSION MEASUREMENT	4-1
4.1. Test Equipments	4-1
4.2. Block Diagram of Test Setup.....	4-2
4.3. Radiated Emission Limit Standard:	4-3
4.4. EUT Configuration on Test	4-3
4.5. Operating Condition of EUT	4-3
4.6. Test Procedure	4-3
4.7. Radiated Emission Test Results.....	4-4
5. CONDUCTED SPURIOUS EMISSIONS.....	5-1
5.1. Test Equipments	5-1
5.2. Limit.....	5-1
5.3. Test Procedure	5-1
5.4. Test result.....	5-1
6. 6dB BANDWIDTH TEST	6-1
6.1. Test Equipments	6-1
6.2. Limit.....	6-1
6.3. Test Procedure	6-1
6.4. Test Results.....	6-1
7. MAXIMUM PEAK OUTPUT POWER TEST	7-1
7.1. Test Equipments	7-1
7.2. Limit.....	7-1
7.3. Test Procedure	7-1
7.4. Test Results.....	7-1
8. BAND EDGE COMPLIANCE TEST	8-1
8.1. Test Equipments	8-1
8.2. Limit.....	8-1
8.3. Test Procedure	8-1
8.4. Test Results.....	8-1
9. POWER SPECTRAL DENSITY TEST	9-1
9.1. Test Equipments	9-1
9.2. Limit.....	9-1
9.3. Test Procedure	9-1
9.4. Test Results.....	9-1
10. MPE ESTIMATION.....	10-1
10.1. Limit for General Population/ Uncontrolled Exposures.....	10-1
10.2. Estimation Result.....	10-1



11. ANTENNA REQUIREMENT	11-1
11.1. Standard Applicable.....	11-1
11.2. Antenna Connected Construction.....	11-1
12. DEVIATION TO TEST SPECIFICATIONS.....	12-1
13. PHOTOGRAPH OF TEST	13-1
13.1. Photos of Radiated Emission Test	13-1
14. PHOTOS OF EUT	14-1

TEST REPORT CERTIFICATION

Applicant : ELECOM CO., LTD.
Product : ELECOM TrackBall Mouse
FCC ID : YWO-M-XPT1MR
(A) Model No. : M-XPT1MR; M-XPT1MRX
(B) Serial No. : N/A
(C) Power Supply : DC 1.5V
(D) Test Voltage : DC 1.5V

Tested for comply with:
FCC CFR 47 Part 15 Subpart C

Test procedure used:
ANSI C63.10: 2013;


The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Apr.09~10, 2018 Report of date: May.08, 2018

Prepared by : Monica Liu Reviewed by : 
Monica Liu / Assistant

Sunny Lu / Deputy Manager



Approved & Authorized Signer :

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10 :2013	N/A
Radiated Emission Test	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 : 2013	PASS
Conducted Spurious Emissions	FCC Part 15: 15.247(a)(1) ANSI C63.10 : 2013	PASS
6dB Bandwidth Test	FCC Part 15: 15.215 ANSI C63.10 : 2013	PASS
Maximum Peak Output Power Test	FCC Part 15: 15.247(b)(1) ANSI C63.10 : 2013	PASS
Band Edge Compliance Test	FCC Part 15: 15.247(d) ANSI C63.10 : 2013	PASS
Power Spectral Density Test	FCC Part 15: 15.247(d) ANSI C63.10 : 2013	PASS

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product : ELECOM TrackBall Mouse

Model No. : M-XPT1MR; M-XPT1MRX
Models different only in model names.

FCC ID : YWO-M-XPT1MR

Radio : BT 4.0; General 2.4GHz wireless

Operation frequency : 2402MHz-2480MHz; 2404MHz-2477MHz

Antenna : Internal Antenna, 2.805dBi

Modulation : GFSK

Applicant : ELECOM CO., LTD.
1-1 fushimi machi, 4-chome chuoku, saka, Japan 541-8765

Manufacturer : ELECOM CO., LTD.
Fushimimachi 4-1-1, Chuo-ku, Osaka, Japan 541-8765

Factory : G.Tech Technology Ltd.
No.8, Jinyuan 1st Road, High-tech Zone, Zhuhai City,
Guangdong, China, 519085

USB Cable : Shielded, Detachable, 1.5m

Date of Test : Apr.09~10, 2018


Date of Receipt : Apr.06, 2018

Sample Type : Prototype production

2.2. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	acer	ZOW	NVX7C
Power Adapter: Manufacturer: LITEON, Model: PA-1900-32 Input: 100-240V~, 1.5A, 50/60Hz Output: 19V----4.74A Power Cord: Unshielded, Detachable, 1.8m					

2.3. Block Diagram of connection between EUT and simulators



(EUT: ELECOM TrackBall Mouse)

2.4. Test information

A Special Test Software was used to control EUT work in Continuous TX mode (GFSK modulation), and select test channel.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)	Channel	Frequency (MHz)
Tx Mode GFSK modulation	1	Low :CH 0	2402
	1	Middle: CH19	2440
	1	High: CH39	2480

2.5. Test Facility Site Description

Name of Firm

Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology
Park, Nanshan District, Shenzhen, Guangdong,
China

EMC Lab.

Certificated by Industry Canada
Registration Number: IC 5183A-1
Valid Date: May.07, 2020

Certificated by DakkS, Germany
Registration No: D-PL-12151-01-00
Valid Date: Dec.07, 2021

Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2018

Certificated by FCC, USA
Designation No: CN5022
Valid Date: Mar.31, 2018

2.6. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.6dB (150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	2.8dB (30~200MHz, Polarization: H)
	2.8dB (30~200MHz, Polarization: V)
	3.0dB (200M~1GHz, Polarization: H)
	3.0dB (200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber	5.8dB (1~6GHz, Distance: 3m)
	5.8dB (6~18GHz, Distance: 3m)
	5.8dB (Above 18GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.6dB
Uncertainty for Conduction Spurious emission test	2.0dB
Uncertainty for Output power test	0.8dB
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.1 %
Uncertainty for test site temperature and humidity	0.6°C
	3%



FCC ID: YWO-M-XPTIMR

AUDIX Technology (Shenzhen) Co., Ltd.

page 3-1

3. POWER LINE CONDUCTED EMISSION TEST

According to Paragraph (c) of FCC Part 15 section 15.207, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

4. RADIATED EMISSION MEASUREMENT

4.1. Test Equipments

Frequency range: 9kHz~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Jun.19,17	1 Year
2.	Spectrum Analyzer	Agilent	E7405A	MY45116588	Dec.19,17	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR7	101547	Apr.22,17	1 Year
4.	Amplifier	HP	8447D	2648A04738	Apr.22,17	1 Year
5.	Bi-log Antenna	TESEQ	CBL6112D	35375	Aug.29,17	1 Year
6.	Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	493	Jun.27.17	1 Year
7.	Loop Antenna	Chase	HLA6120	1062	Oct.15,17	1 Year
8.	RF Cable	MIYAZAKI	CFD400NL-LW	No.3	Sep.02.17	1 Year
9.	Coaxial Switch	Anritsu	MP59B	6201397222	Apr.22,17	1 Year
10.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A


Note: N/A means Not applicable.

Frequency range: above 1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	RF Chamber	AUDIX	N/A	N/A	May.17,17	1 Year
2.	EMC Analyzer	Agilent	N9030A	MY51380221	Sep.19,17	1 Year
3.	Horn Antenna	ETS	3115	9510-4580	Dec.01,17	1 Year
4.	Amplifier	Agilent	8449B	3008A00863	May.15,18	1 Year
5.	Amplifier	EMCI	EMC18404-0SE	980507	Jul.27,17	1 Year
6.	RF Cable	Hubersuhner	EMC102-KM-KM-3500	170702	Oct.15,17	1 Year
7.	RF Cable	Hubersuhner	N/A	NO.5	Oct.15,17	1 Year
8.	Horn Antenna	ETS	3116	00060089	Dec.03,17	Year
9.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A

Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup
For frequency range 30MHz-1000MHz

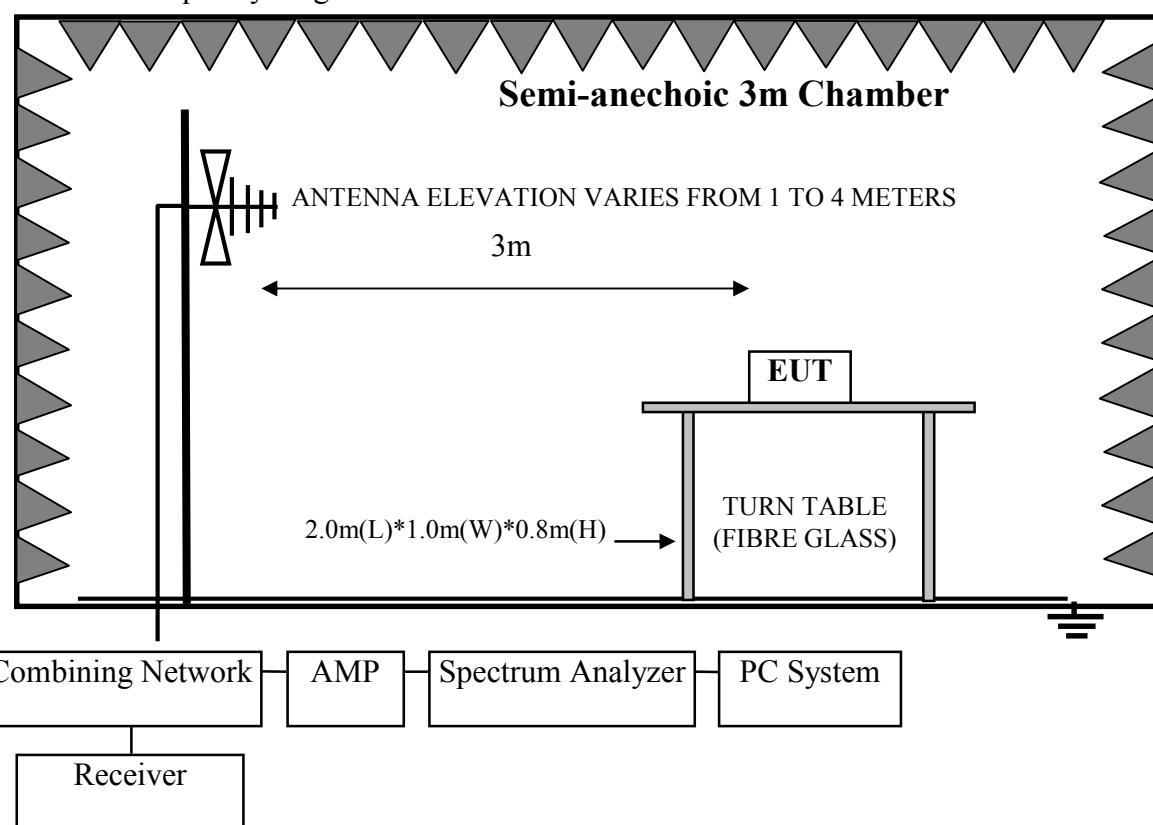

For frequency range 1GHz-25GHz

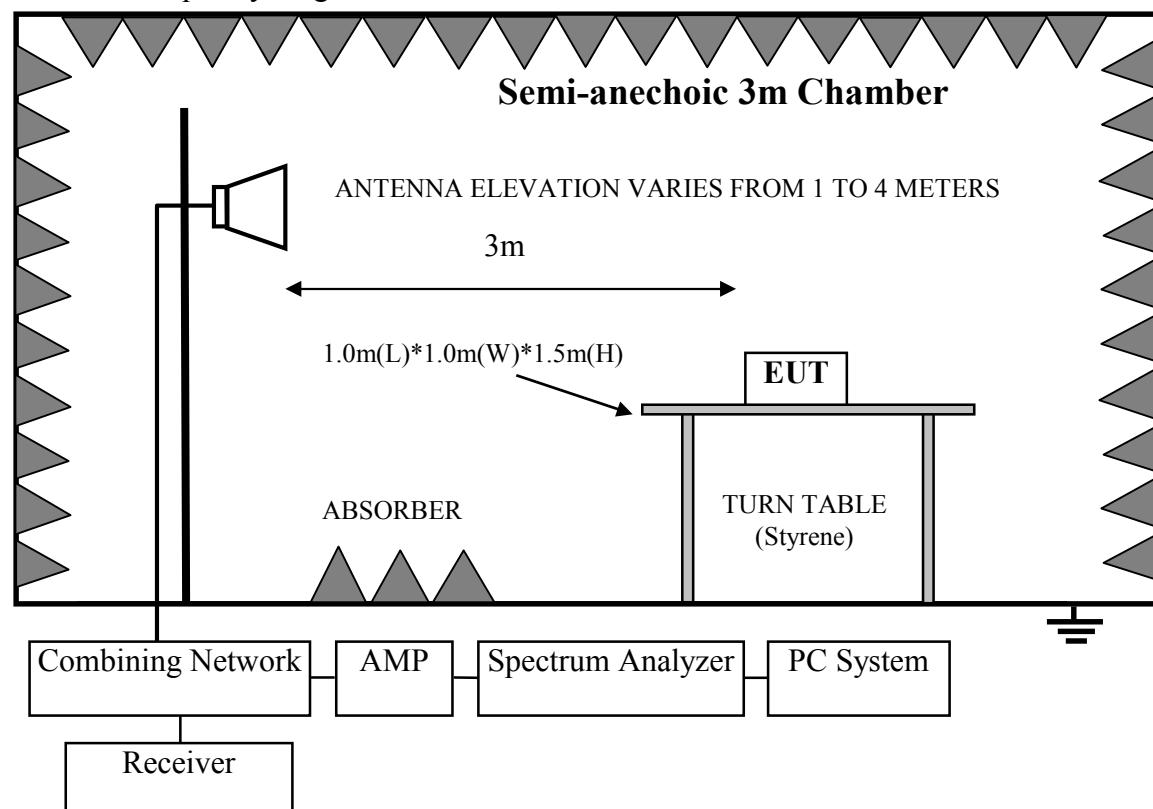

4.3. Radiated Emission Limit Standard:

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		µV/m	dB(µV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average)	

Remarks : (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V}/\text{m}$

- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
- (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4.1. ELECOM TrackBall Mouse (EUT)

Model No.	:	M-XPT1MR
Serial No.	:	N/A

4.5. Operating Condition of EUT

4.5.1. Setup the EUT and simulator as shown as Section 4.2.

4.5.2. Turn on the power of all equipments.

4.5.3. Let EUT work in Tx mode.

4.6. Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it.EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horm antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2013 on radiated emission Test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as the test photo indicated.

The bandwidth of the EMI test receiver (R&S ESR7) is set at 120kHz for frequency range from 30MHz to 1000MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz.

This device is pulse Modulated, a duty cycle factor was used to calculated average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.7. Radiated Emission Test Results


PASS.


All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.


Note 1: The duty cycle factor for calculate average level is 9.972dB, and average limit is 20dB below peak limit, so if peak measured level comply with average limit, the average level was deemed to comply with average limit.

Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.

Duty cycle factor = $20\log_{10}(\text{duty cycle}) = 9.972\text{dB}$

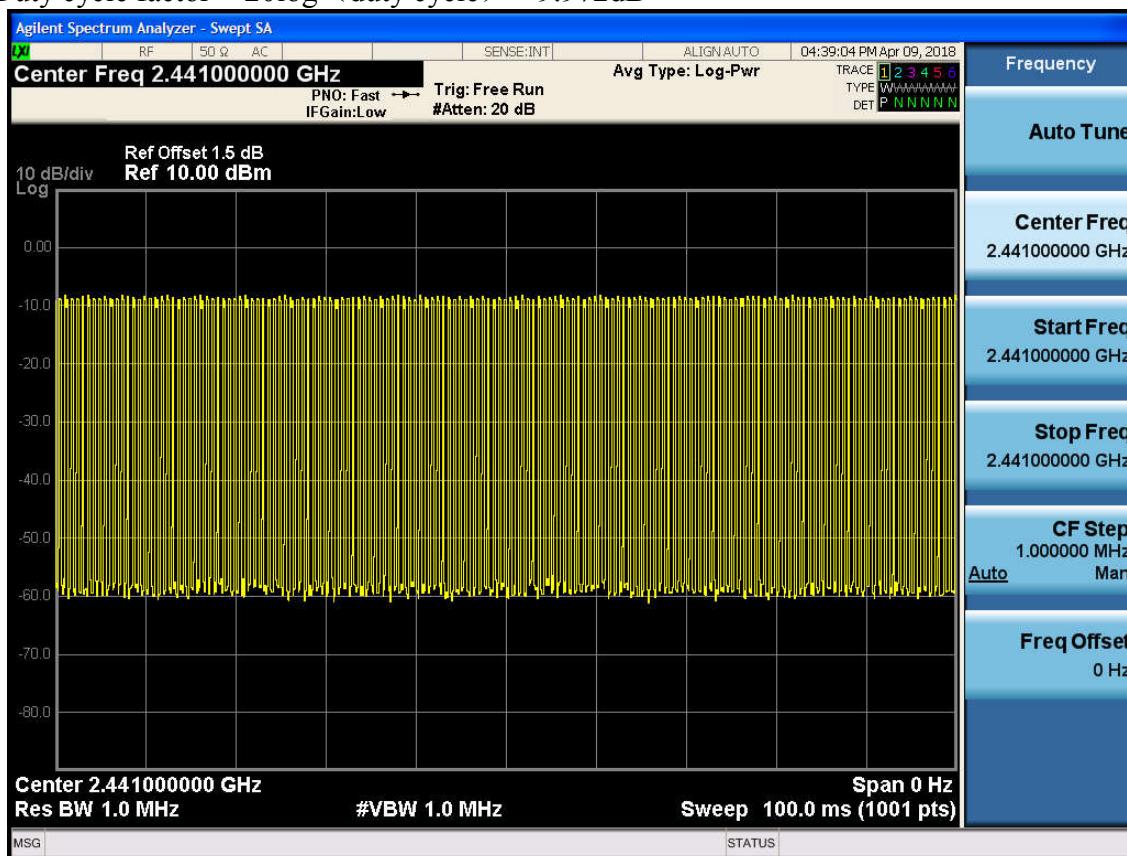

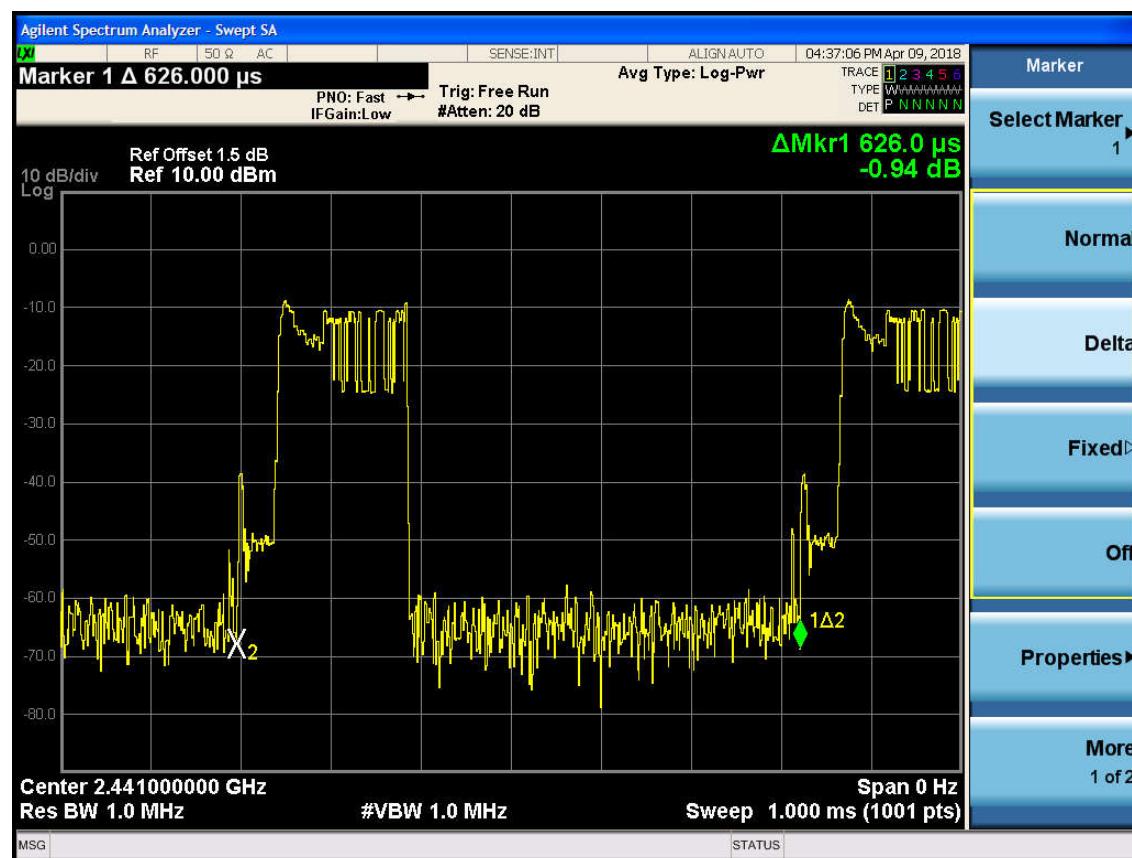

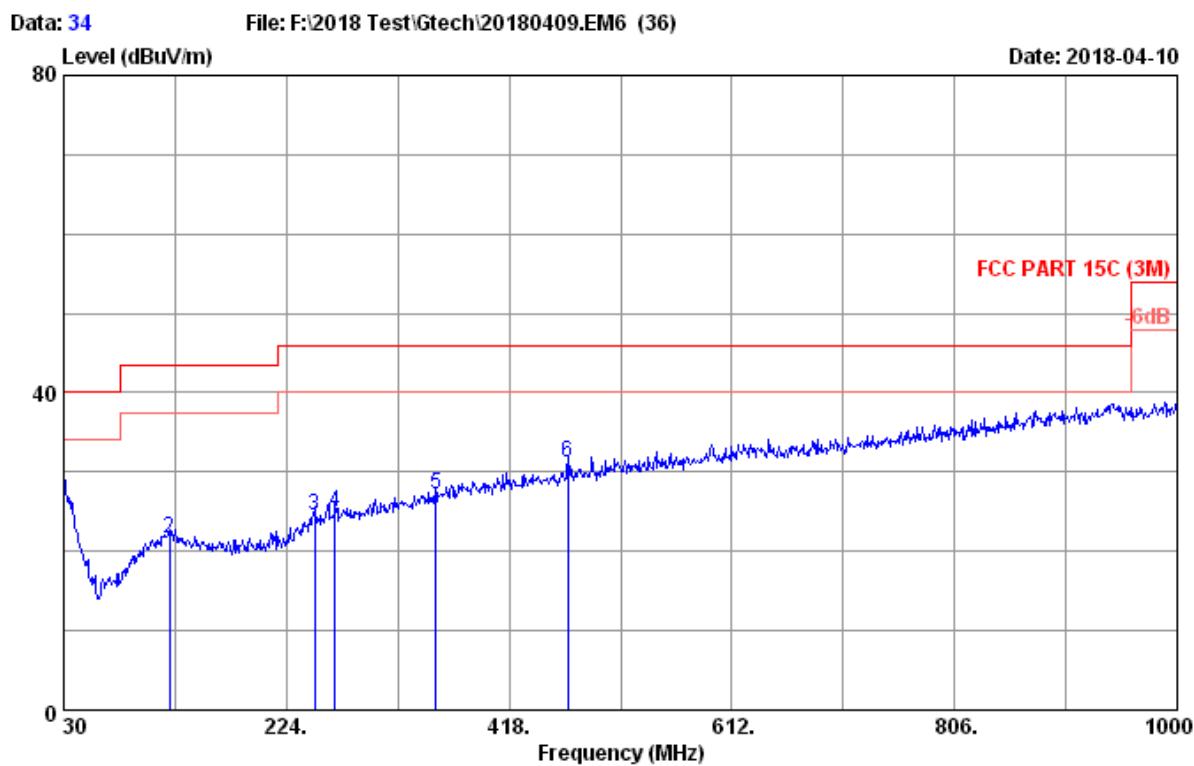Frequency: 30MHz~1GHz


Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2017 ANT 35375 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C (3M)
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
 Power rating : DC 1.5V
 Test Mode : BT4.0 Tx mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission			
					Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	27.50	1.18	0.93	29.61	40.00	10.39	QP
2	122.150	19.34	2.18	0.20	21.72	43.50	21.78	QP
3	248.250	19.09	3.02	2.44	24.55	46.00	21.45	QP
4	266.680	19.90	3.14	1.95	24.99	46.00	21.01	QP
5	353.980	21.48	3.74	1.90	27.12	46.00	18.88	QP
6	469.410	23.84	4.46	2.82	31.12	46.00	14.88	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 33

File: F:\2018 Test\Gtech\20180409.EM6 (36)

Date: 2018-04-10

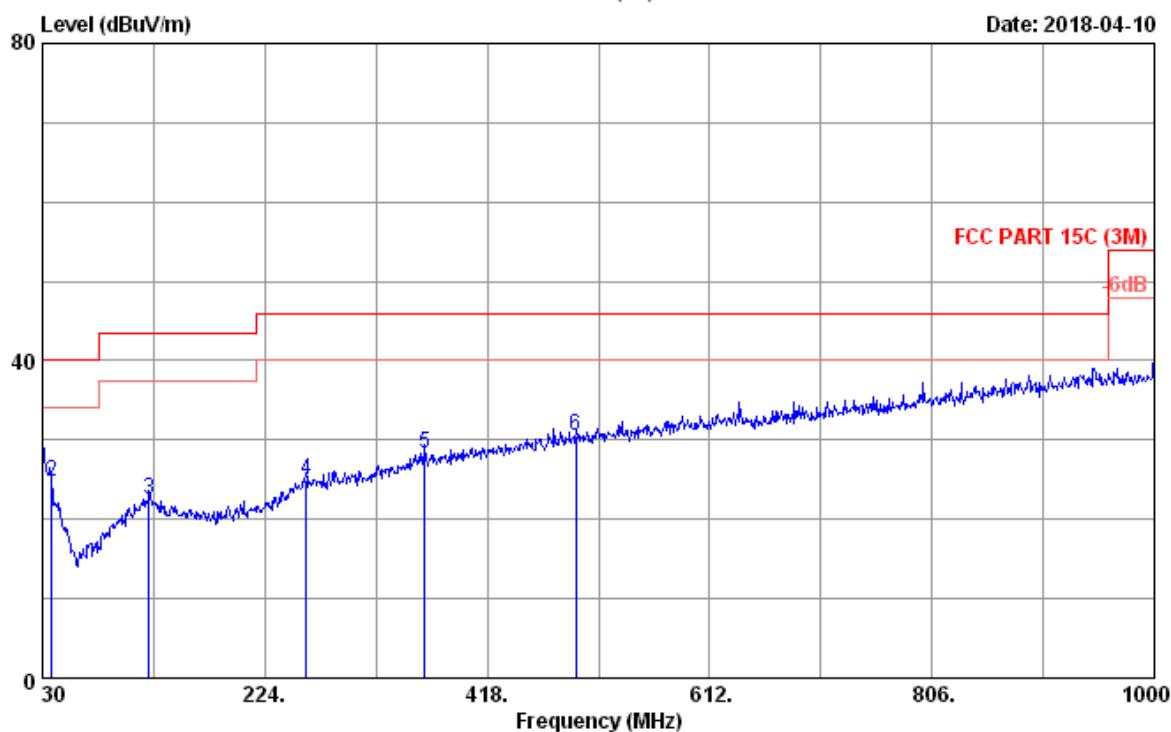


Site no. : 3m Chamber
 Data no. : 33
 Dis. / Ant. : 3m 2017 ANT 35375 Ant. pol. : VERTICAL
 Limit : FCC PART 15C (3M)
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
 Power rating : DC 1.5V
 Test Mode : BT4.0 Tx mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Emission				
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	27.50	1.18	0.66	29.34	40.00	10.66	QP
2	37.760	21.90	1.18	1.63	24.71	40.00	15.29	QP
3	123.120	19.26	2.18	1.12	22.56	43.50	20.94	QP
4	259.890	20.00	3.14	1.80	24.94	46.00	21.06	QP
5	363.680	21.76	3.86	2.70	28.32	46.00	17.68	QP
6	495.600	24.23	4.70	1.54	30.47	46.00	15.53	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz

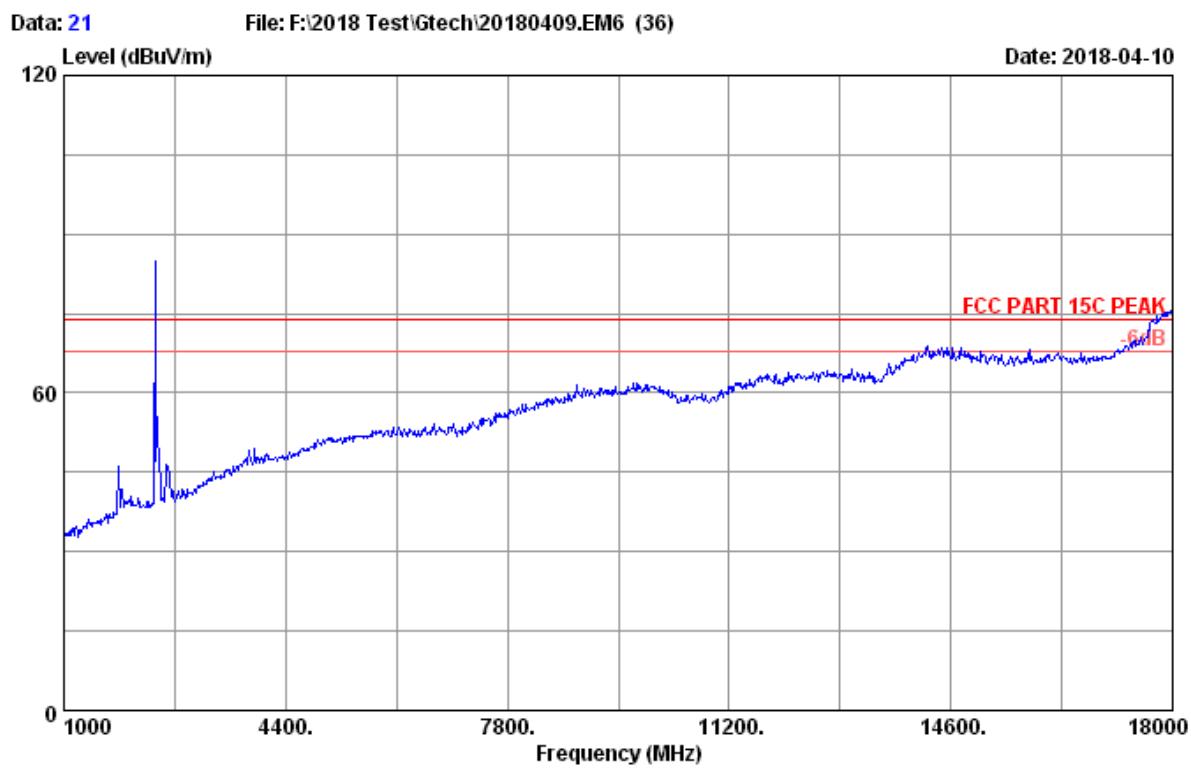


Site no. : 3m Chamber Data no. : 21
Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
Power rating : DC 1.5V
Test Mode : BT4.0 2402MHz Tx mode

Data: 22

File: F:\2018 Test\Gtech\20180409.EM6 (36)

Date: 2018-04-10

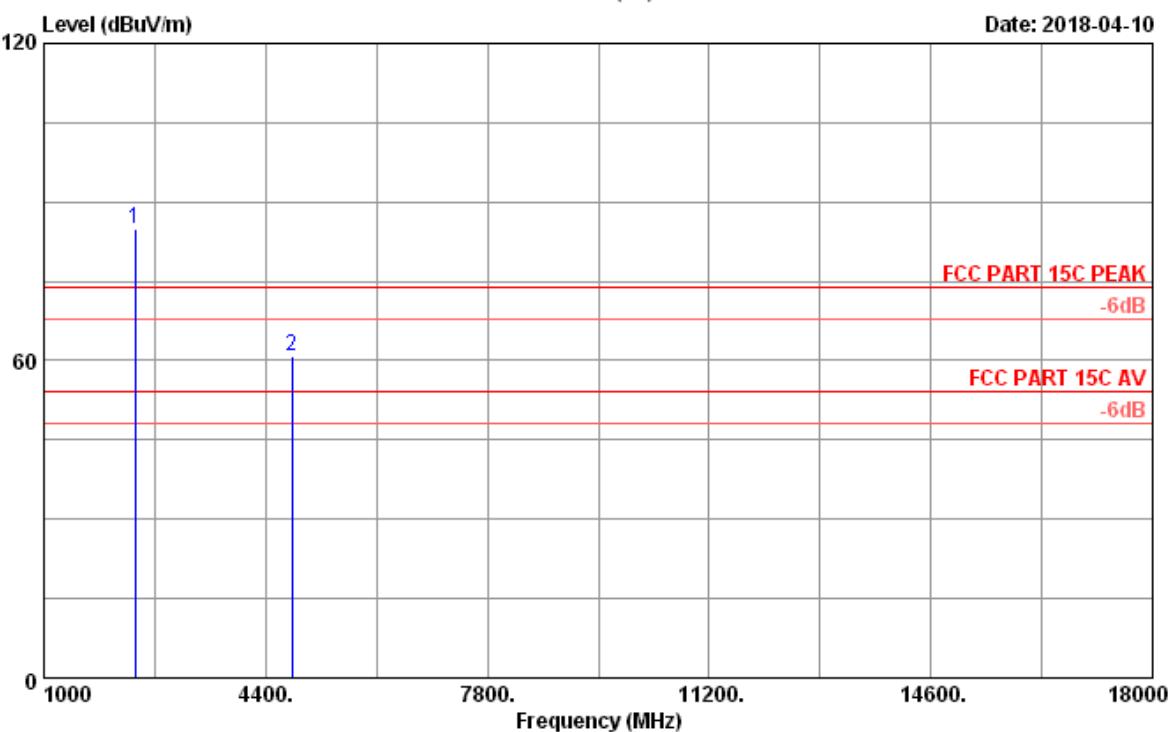

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
 Power rating : DC 1.5V
 Test Mode : BT4.0 2402MHz Tx mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission			Remark
						Level (dB _B V/m)	Limits (dB _B V/m)	Margin (dB)	
1	2402.00	27.79	10.30	82.33	35.61	84.81	74.00	-10.81	Peak
2	4804.00	32.62	14.52	47.64	33.82	60.96	74.00	13.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dB _B V/m)	Duty cycle factor (dB)	AV level (dB _B V/m)	Limit(dB _B V/m)	Conclusion
4804	60.96	9.972	50.988	54	Pass

Data: 23

File: F:\2018 Test\Gtech\20180409.EM6 (36)

Date: 2018-04-10

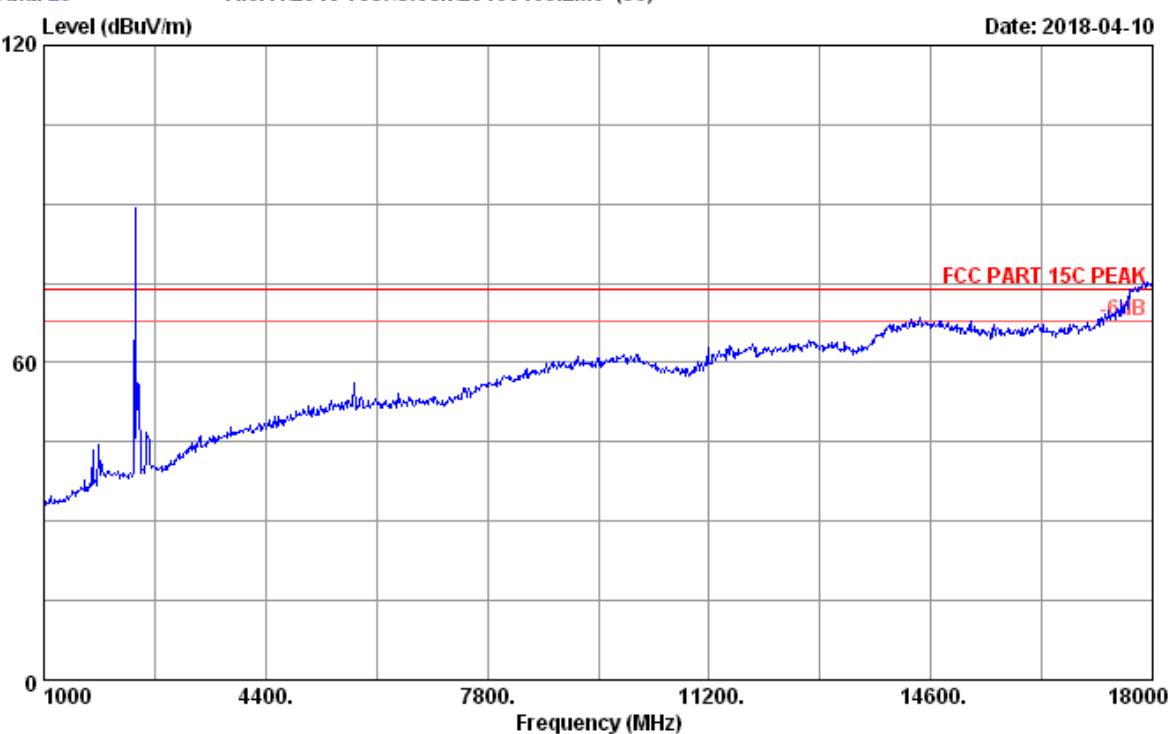


Site no. : 3m Chamber Data no. : 23
Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
Power rating : DC 1.5V
Test Mode : BT4.0 2402MHz Tx mode

Data: 24

File: F:\2018 Test\Gtech\20180409.EM6 (36)

Date: 2018-04-10

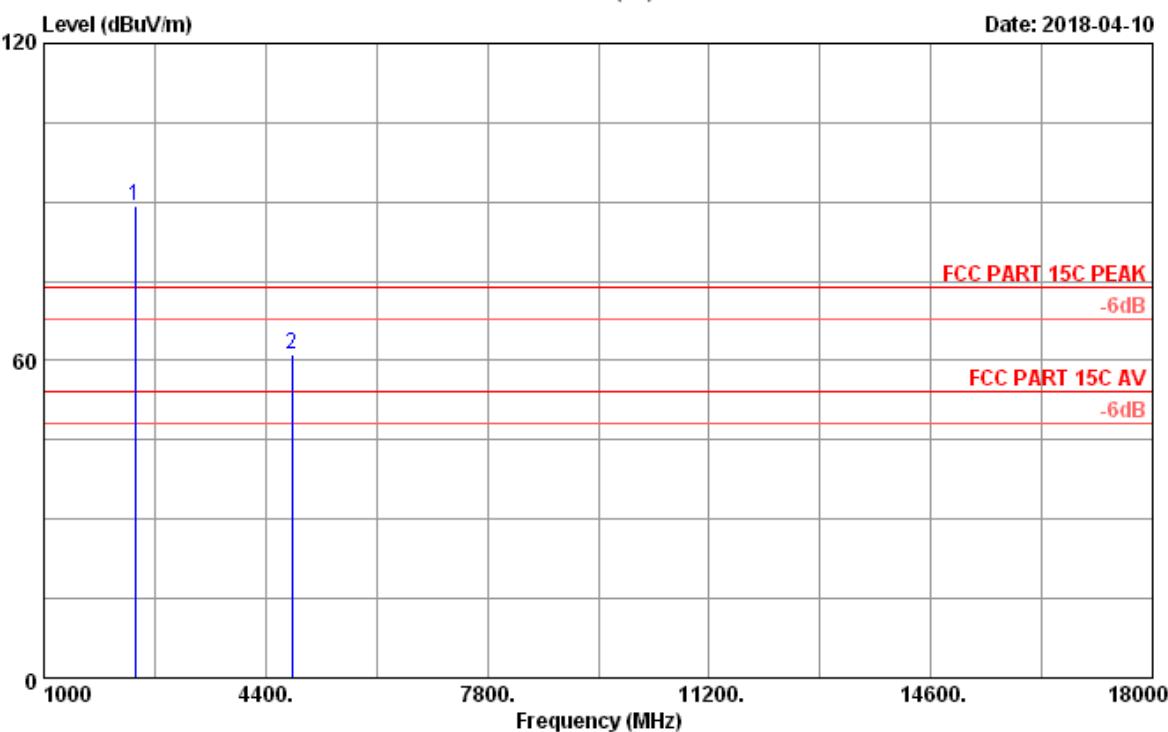

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
 Power rating : DC 1.5V
 Test Mode : BT4.0 2402MHz Tx mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB _B V)	Amp factor (dB)	Emission Level (dB _B V/m)	Limits (dB _B V/m)	Margin (dB)	Remark
1	2402.00	27.79	10.30	86.78	35.61	89.26	74.00	-15.26	Peak
2	4804.00	32.62	14.52	47.84	33.82	61.16	74.00	12.84	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dB _B V/m)	Duty cycle factor (dB)	AV level (dB _B V/m)	Limit(dB _B V/m)	Conclusion
4804	61.16	9.972	51.188	54	Pass

Data: 25

File: F:\2018 Test\Gtech\20180409.EM6 (36)

Date: 2018-04-10

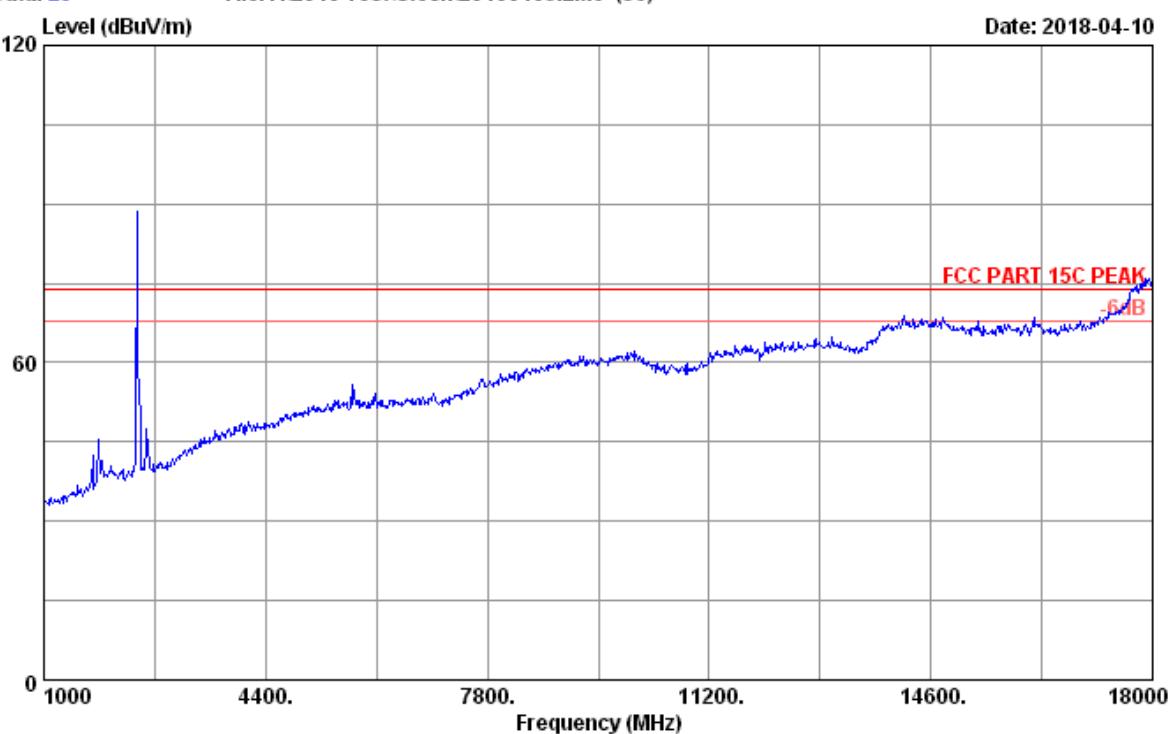


Site no. : 3m Chamber Data no. : 25
Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
Power rating : DC 1.5V
Test Mode : BT4.0 2440MHz Tx mode

Data: 26

File: F:\2018 Test\Gtech\20180409.EM6 (36)

Date: 2018-04-10

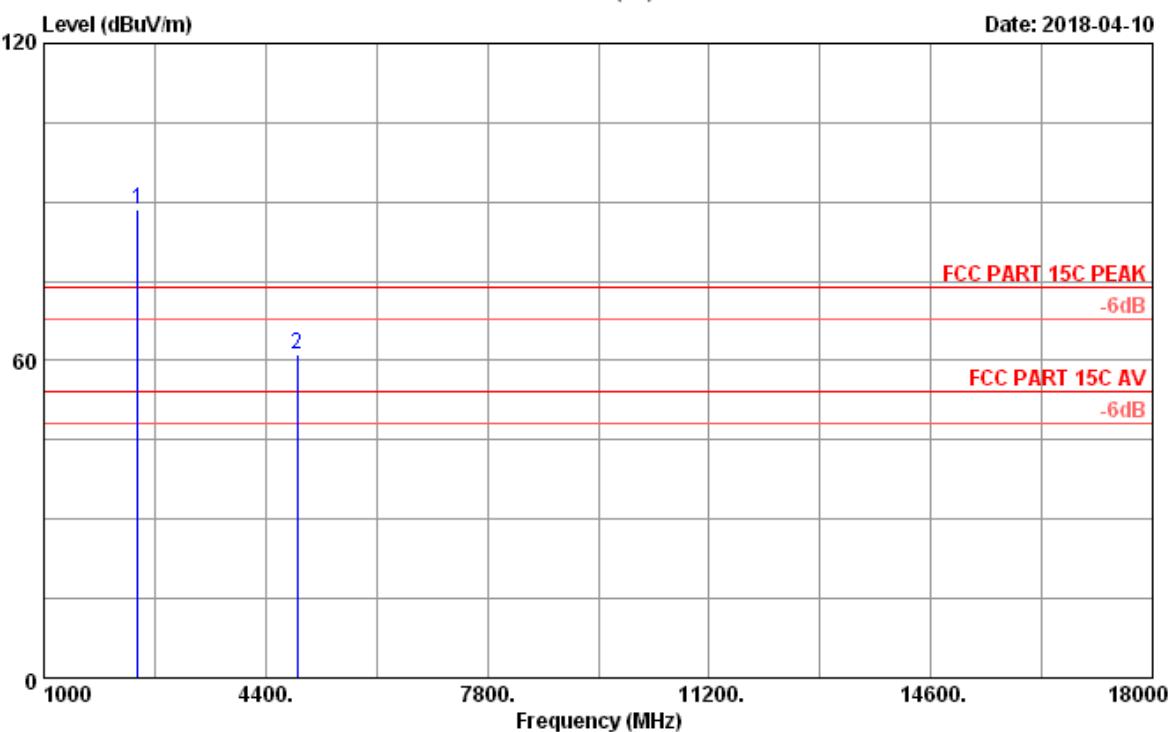


Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
 Power rating : DC 1.5V
 Test Mode : BT4.0 2440MHz Tx mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB _B V)	Amp factor (dB)	Emission Level (dB _B V/m)	Limits (dB _B V/m)	Margin (dB)	Remark
1	2440.00	28.04	10.37	85.66	35.64	88.43	74.00	-14.43	Peak
2	4880.00	32.76	14.62	47.47	33.75	61.10	74.00	12.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dB _B V/m)	Duty cycle factor (dB)	AV level (dB _B V/m)	Limit(dB _B V/m)	Conclusion
4880	61.10	9.972	51.128	54	Pass

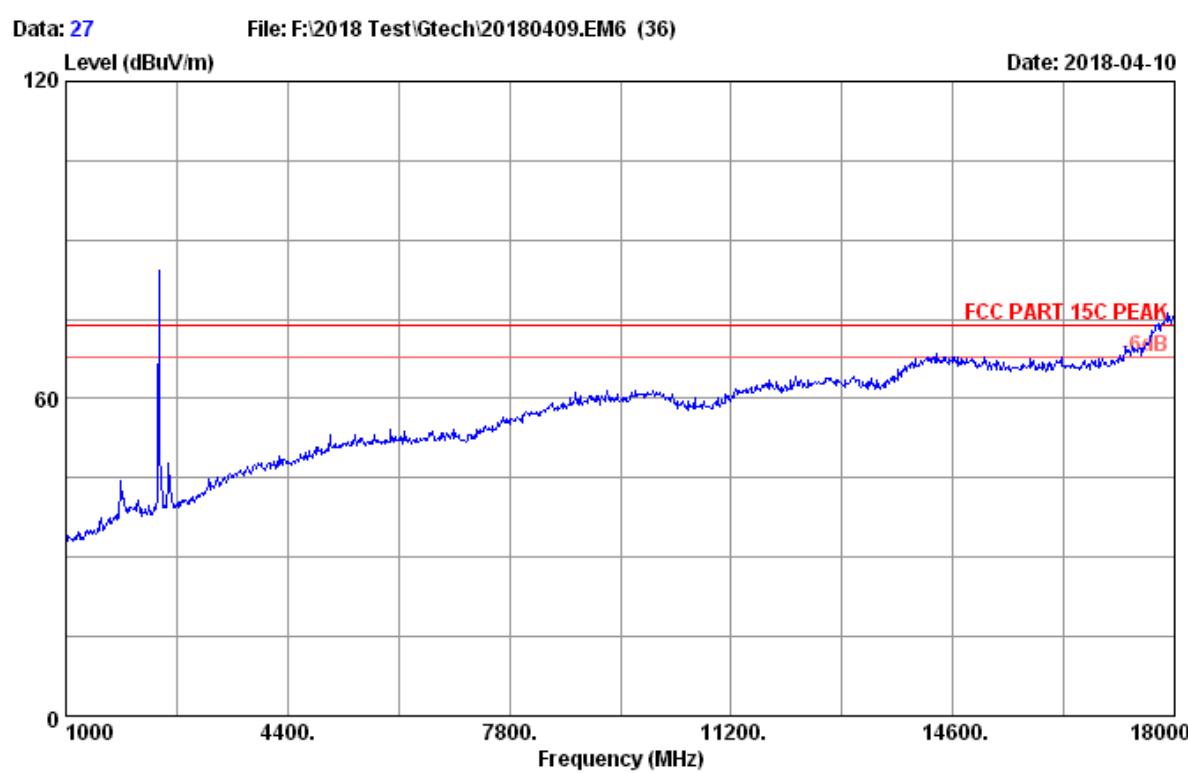


Site no. : 3m Chamber Data no. : 27
Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
Power rating : DC 1.5V
Test Mode : BT4.0 2440MHz Tx mode

Data: 28

File: F:\2018 Test\Gtech\20180409.EM6 (36)

Date: 2018-04-10

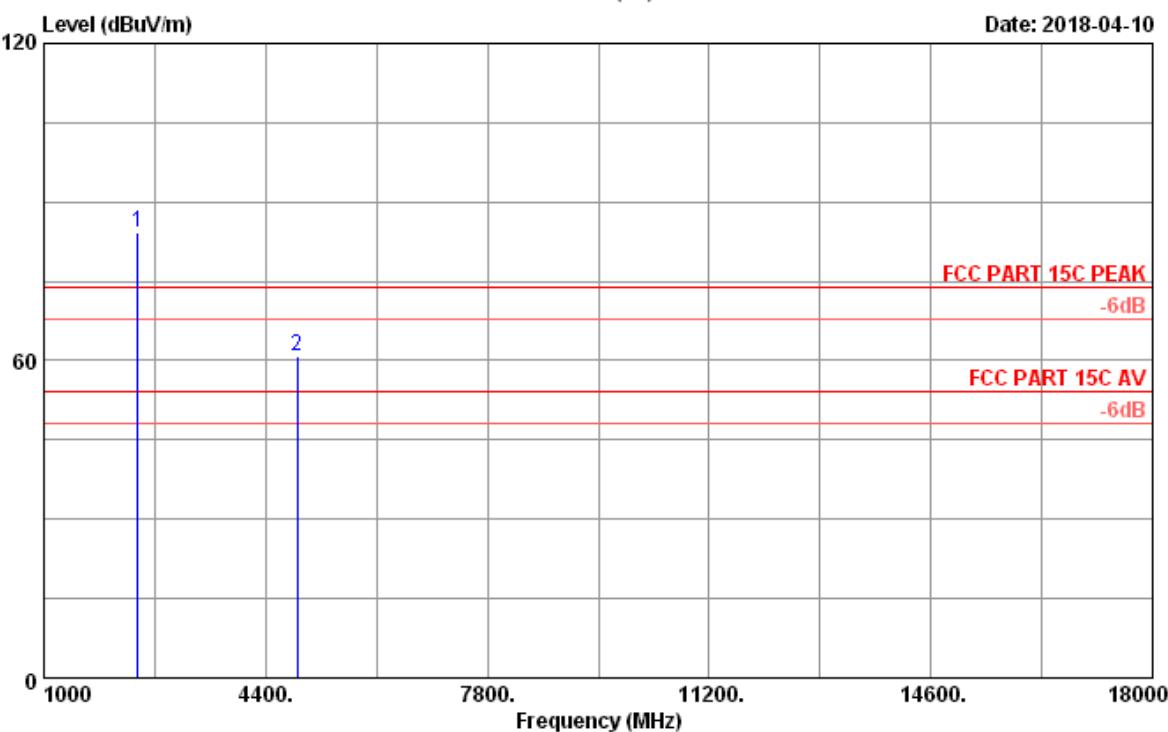

Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
 Power rating : DC 1.5V
 Test Mode : BT4.0 2440MHz Tx mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB _B V)	Amp factor (dB)	Emission Level (dB _B V/m)	Limits (dB _B V/m)	Margin (dB)	Remark
1	2440.00	28.04	10.37	81.51	35.64	84.28	74.00	-10.28	Peak
2	4880.00	32.76	14.62	47.09	33.75	60.72	74.00	13.28	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dB _B V/m)	Duty cycle factor (dB)	AV level (dB _B V/m)	Limit(dB _B V/m)	Conclusion
4880	60.72	9.972	50.748	54	Pass

Data: 29

File: F:\2018 Test\Gtech\20180409.EM6 (36)

Date: 2018-04-10

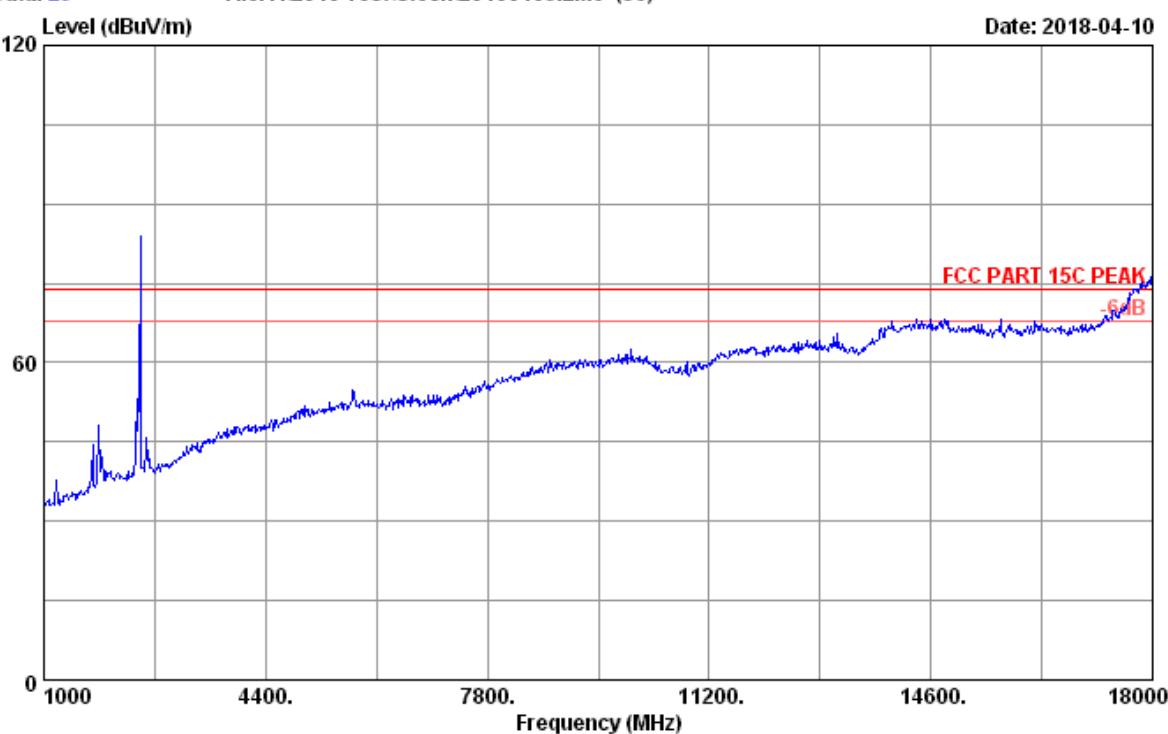


Site no. : 3m Chamber Data no. : 29
Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
Power rating : DC 1.5V
Test Mode : BT4.0 2480MHz Tx mode

Data: 30

File: F:\2018 Test\Gtech\20180409.EM6 (36)

Date: 2018-04-10

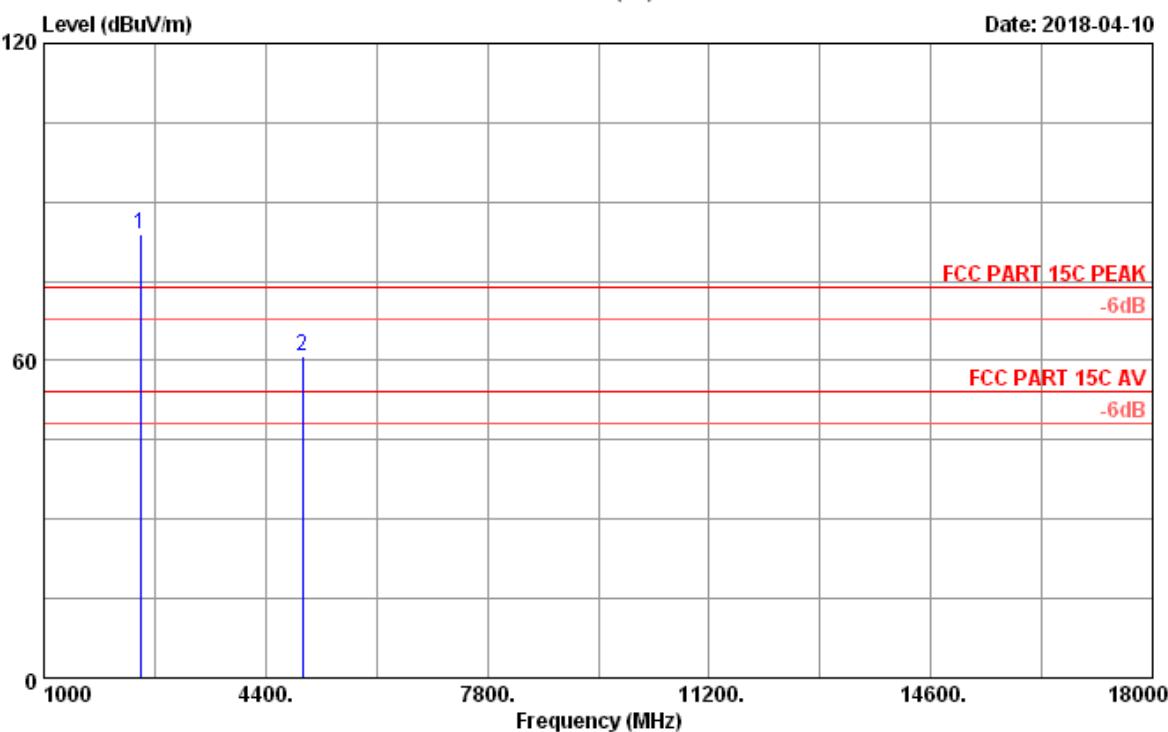

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
 Power rating : DC 1.5V
 Test Mode : BT4.0 2480MHz Tx mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB _{UV})	Amp factor (dB)	Emission Level (dB _{UV} /m)	Limits (dB _{UV} /m)	Margin (dB)	Remark
1	2480.00	28.21	10.45	81.07	35.71	84.02	74.00	-10.02	Peak
2	4960.00	32.93	14.73	46.92	33.69	60.89	74.00	13.11	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dB _{UV} /m)	Duty cycle factor (dB)	AV level (dB _{UV} /m)	Limit(dB _{UV} /m)	Conclusion
4960	60.89	9.972	50.918	54	Pass

Data: 31

File: F:\2018 Test\Gtech\20180409.EM6 (36)

Date: 2018-04-10

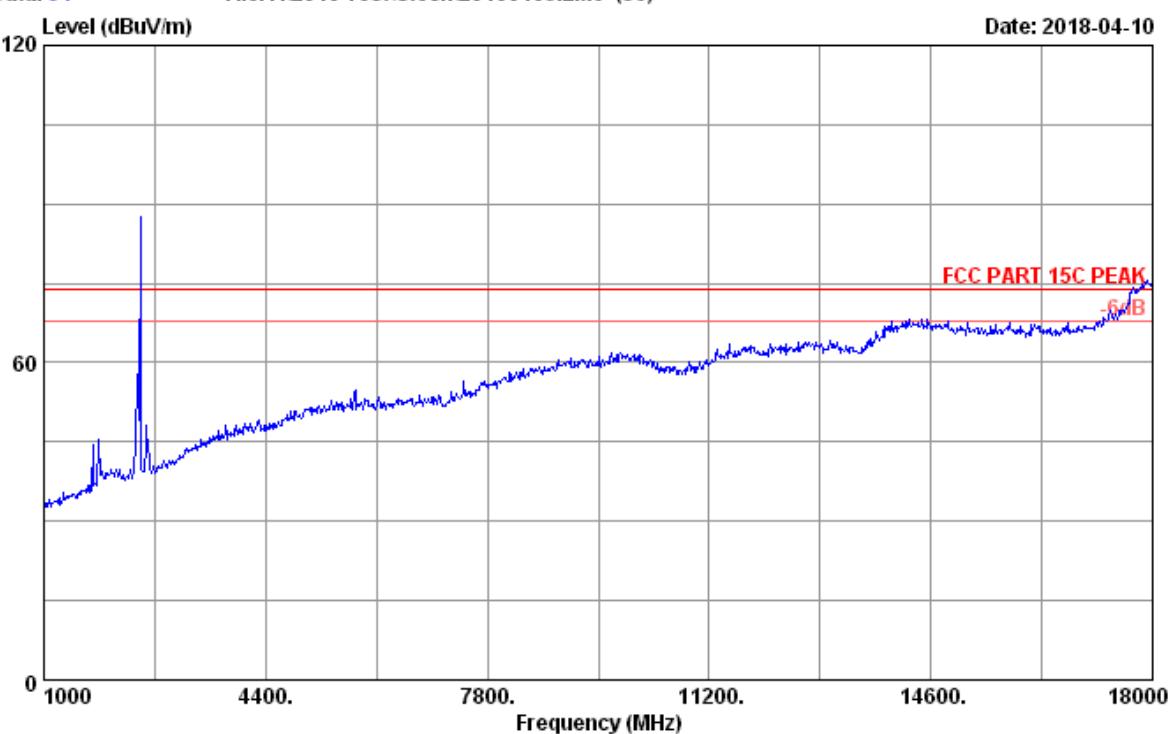


Site no. : 3m Chamber Data no. : 31
Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
Power rating : DC 1.5V
Test Mode : BT4.0 2480MHz Tx mode

Data: 32

File: F:\2018 Test\Gtech\20180409.EM6 (36)

Date: 2018-04-10

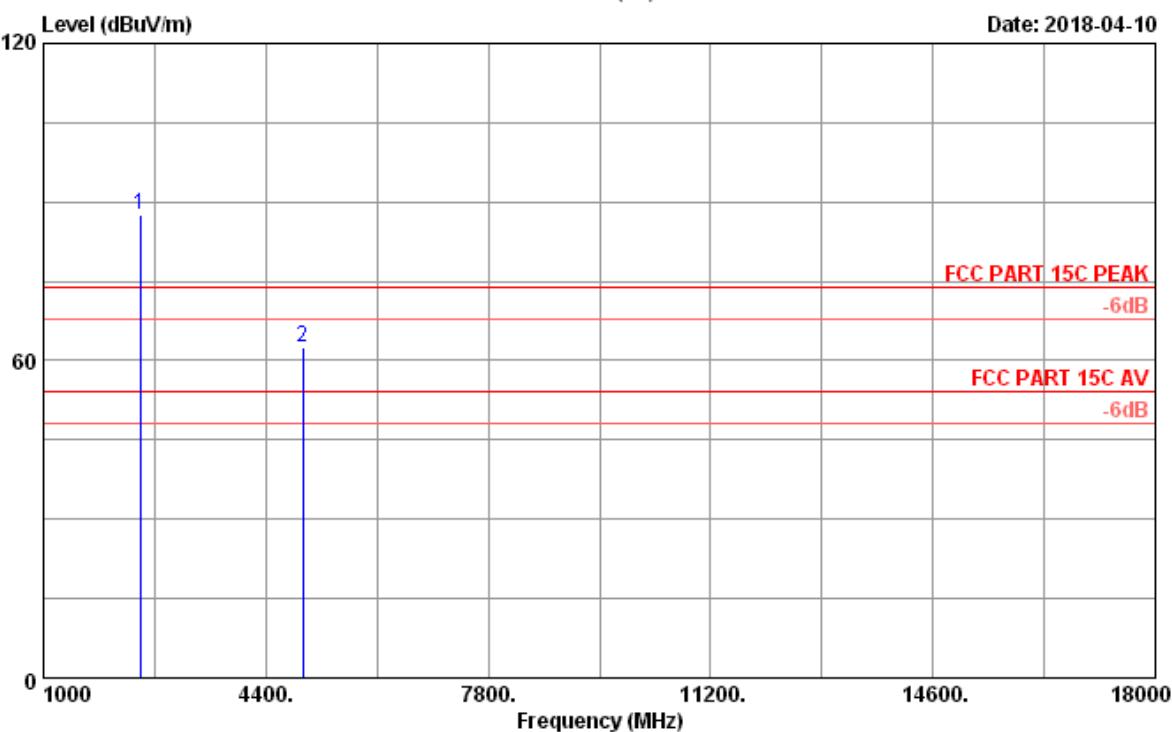

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
 Power rating : DC 1.5V
 Test Mode : BT4.0 2480MHz Tx mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dB _B V)	Amp factor (dB)	Emission			Remark
						Level (dB _B V/m)	Limits (dB _B V/m)	Margin (dB)	
1	2480.00	28.21	10.45	84.54	35.71	87.49	74.00	-13.49	Peak
2	4960.00	32.93	14.73	48.50	33.69	62.47	74.00	11.53	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dB _B V/m)	Duty cycle factor (dB)	AV level (dB _B V/m)	Limit(dB _B V/m)	Conclusion
4960	62.47	9.972	52.498	54	Pass

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52220804	Oct.14,17	1 Year
2.	Attenuator(20dB)	Agilent	8491B	MY39262165	Oct.14,17	1 Year
3.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.15,17	1 Year

5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

5.3. Test Procedure


The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions With peak detector.

5.4. Test result

PASS (The testing data was attached in the next pages.)

GFSK


2402MHz(30MHz-1GHz)

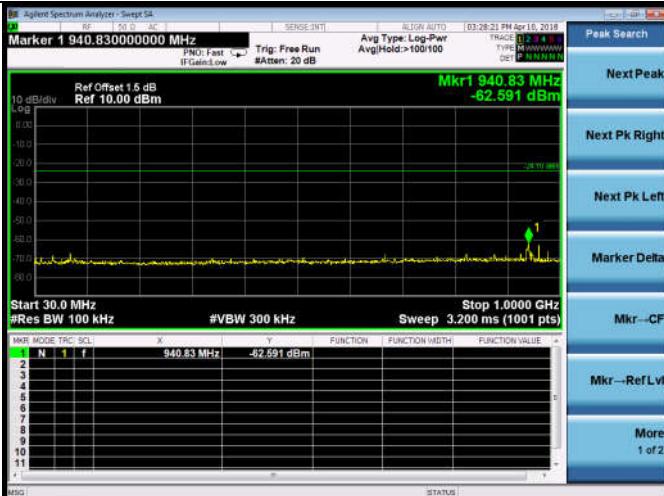


2402MHz(2.31GHz-2.405GHz)




2402MHz(1GHz-10GHz)

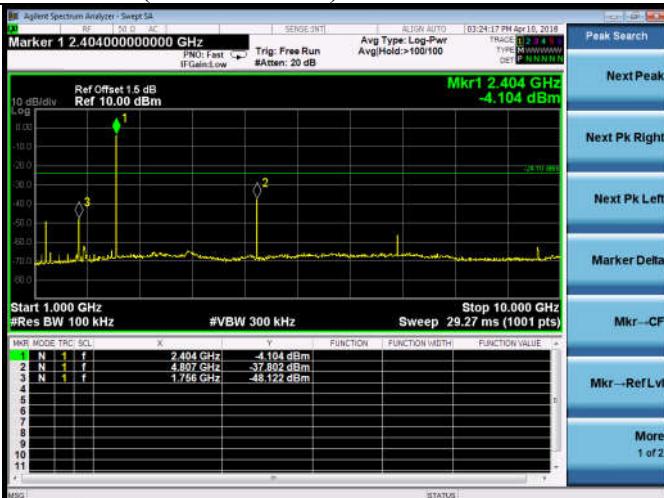


2440MHz(30MHz-1GHz)

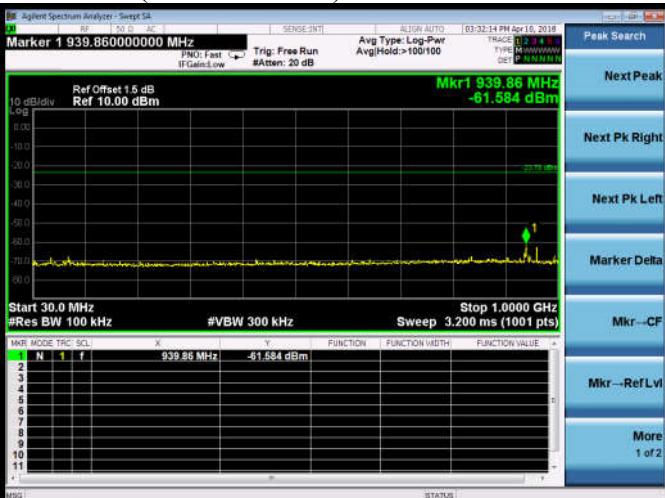


2402MHz(10GHz-25GHz)

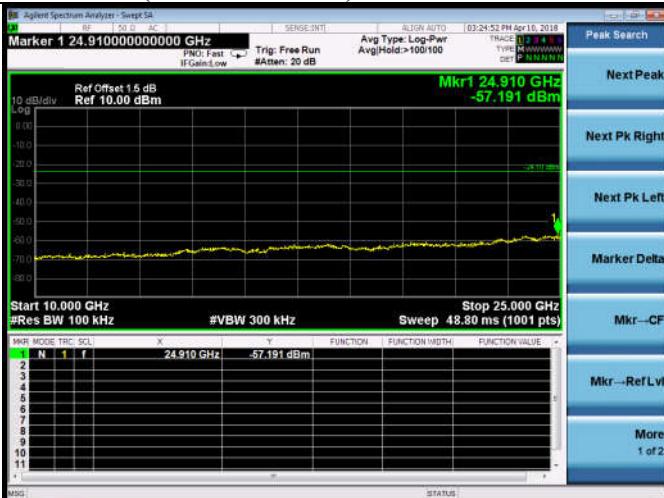


2440MHz(1GHz-10GHz)

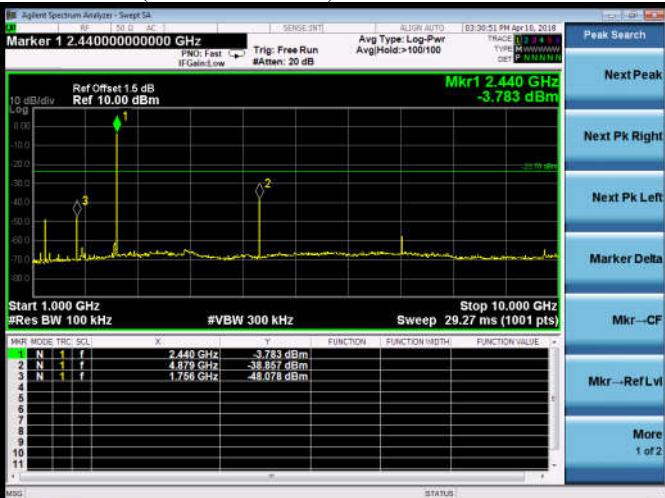


2440MHz(10GHz-25GHz)

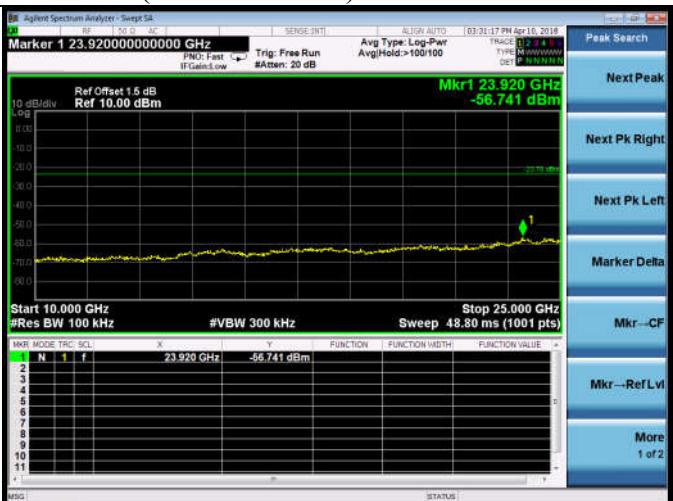


2480MHz(10GHz-25GHz)

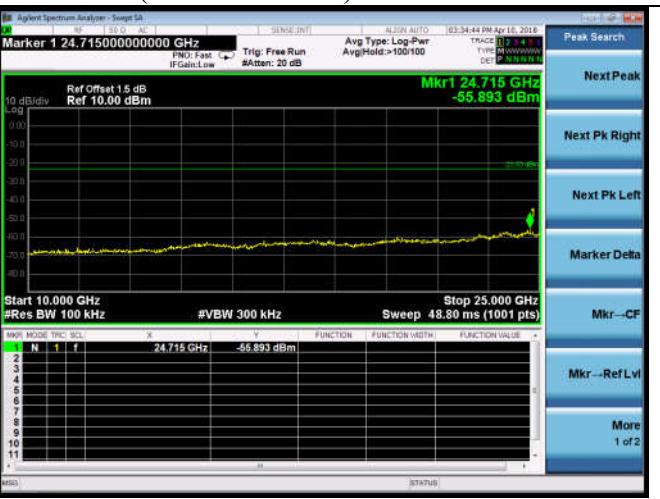


2480MHz(30MHz-1GHz)

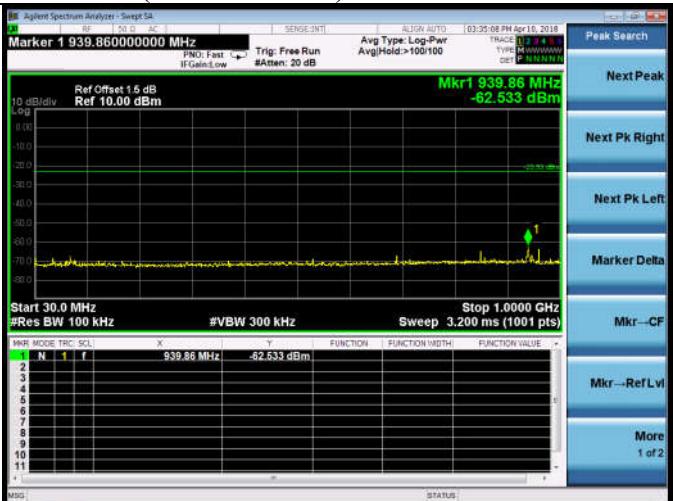

2480MHz(2.477GHz-2.51GHz)

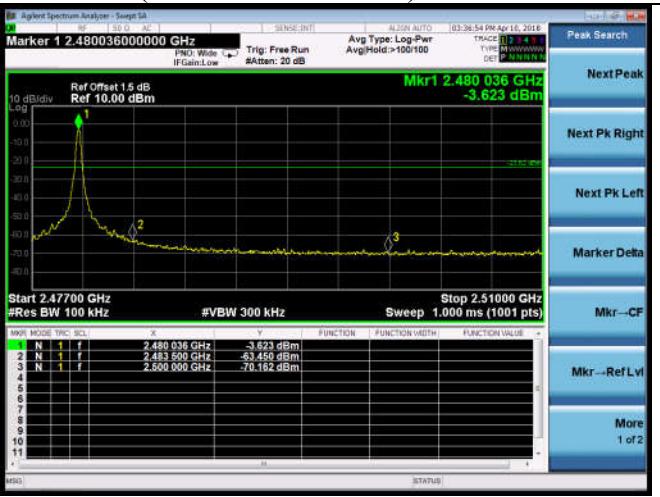

2480MHz(1GHz-10GHz)

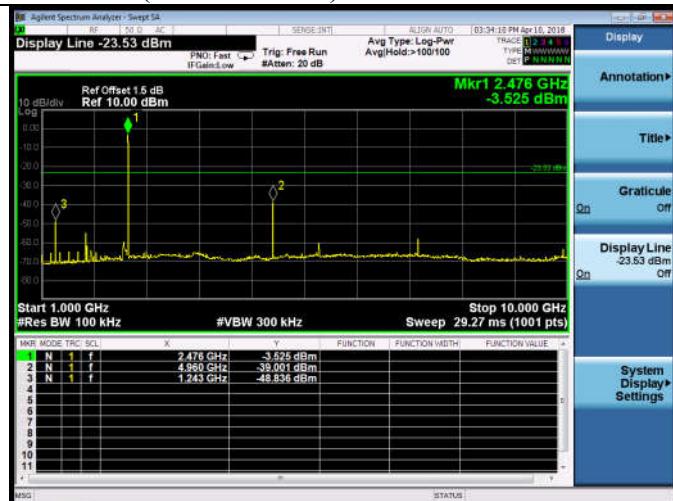

- Display
- Annotation>
- Title>
- Graticule Off
- Display Line On -23.53 dBm Off
- System Display> Settings

6. 6dB BANDWIDTH TEST

6.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
4.	Spectrum Analyzer	Agilent	N9010A	MY52220804	Oct.14,17	1 Year
5.	Attenuator(20dB)	Agilent	8491B	MY39262165	Oct.14,17	1 Year
6.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.15,17	1 Year

6.2. Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

6.3. Test Procedure

The transmitter output was connected to a spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

6.4. Test Results

EUT: ELECOM TrackBall Mouse		
M/N: M-XPT1MR		
Date: 2018-04-09	Pressure: 102.2±1.0 kpa	Humidity: 52.2±3.0%
Tested by:Lynn	Test Site: RF site	Temperature:22.4±0.6°C

Test Mode	Frequency (MHz)	6 dB bandwidth (MHz)	Limit (KHz)
GFSK	2402	706.1	≥500
	2440	716.2	≥500
	2480	717.4	≥500
Conclusion : PASS			

GFSK**2402MHz****2480MHz****2440MHz**

7. MAXIMUM PEAK OUTPUT POWER TEST

7.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52220804	Oct.14,17	1 Year
2.	Power meter	Anritsu	ML2487A	6K00002472	Apr.22,17	1 Year
3.	Power sensor	Anritsu	MA2491A	0033005	Apr.22,17	1 Year
4.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr.22,17	1 Year
5.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.14,17	1 Year

7.2. Limit

For systems using digital modulation in the 2400—2483.5MHz, The Peak output Power shall not exceed 1W(30dBm).

7.3. Test Procedure

Connected the EUT's antenna port to Power Sensor, and use power meter to test peak output power.

7.4. Test Results

EUT: ELECOM TrackBall Mouse		
M/N: M-XPT1MR		
Date: 2018-04-09	Pressure: 102.2±1.0 kpa	Humidity: 52.2±3.0%
Tested by:Lynn	Test Site: RF site	Temperature:22.4±0.6°C

Test Mode	Frequency (MHz)	Peak output Power (dBm)	Limit (dBm)
GFSK	2402	-3.075	30
	2440	-3.575	30
	2480	-4.296	30
Conclusion: PASS			

8. BAND EDGE COMPLIANCE TEST

8.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Amp	HP	8449B	3008A02495	Apr.22.17	1 Year
2.	Horn Antenna	ETS	3115	9510-4580	Dec.01,17	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX1 04	274094&4+28 610&2	Apr.22,17	1 Year

8.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

8.3. Test Procedure

For upper band emissions that are up to two bandwidths(2MHz) away (2483.5MHz to 2485.5MHz) from the band-edge use below produce:

1. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 100KHz and with a video bandwidth 300KHz. Record the peak levels of the fundamental emission and the relevant band-edge emission, Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement, it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.
2. Subtract the delta measured in step (1) from the maximum field strengths measured in clause 4 .The resultant field strengths are then used to determine band-edge compliance as required by Section 15.205


For emissions above two bandwidths away from the band-edge use below produce:

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
 - (a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO
 - (b) This is pulse Modulation device a duty cycle factor was used to calculate average level based measured peak level.

8.4. Test Results

Pass (The testing data was attached in the next pages.)


Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

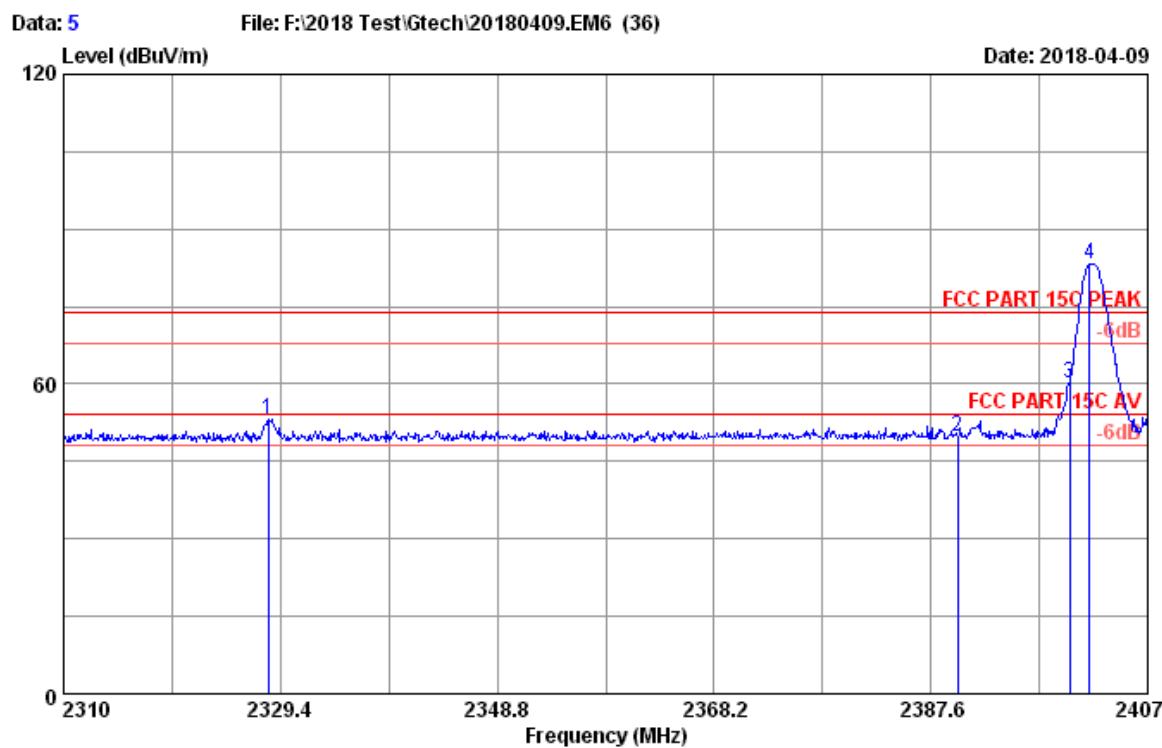

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
 Power rating : DC 1.5V
 Test Mode : BT4.0 2402MHz Tx mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp factor (dB)	Emission				Remark
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2328.33	27.44	10.15	51.07	35.51	53.15	74.00	20.85	Peak
2	2390.00	27.79	10.26	47.46	35.61	49.90	74.00	24.10	Peak
3	2400.00	27.79	10.30	57.83	35.61	60.31	74.00	13.69	Peak
4	2401.76	27.79	10.30	80.65	35.61	83.13	74.00	-9.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

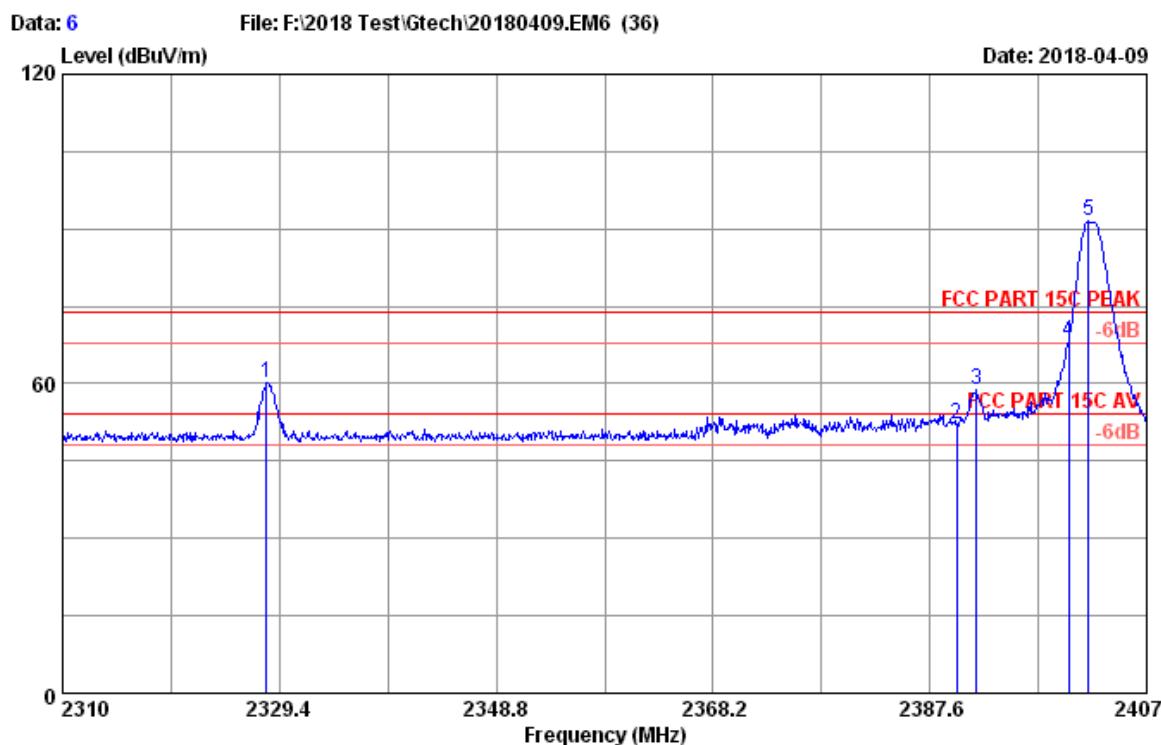

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
 Power rating : DC 1.5V
 Test Mode : BT4.0 2402MHz Tx mode

No.	Freq. (MHz)	Ant.	Cable	Amp	Emission	Margin (dB)	Remark
		Factor (dB/m)	Loss (dB)	Reading (dBuV)	factor (dB)	Limits (dBuV/m)	
1	2328.24	27.44	10.15	58.11	35.51	60.19	74.00 13.81 Peak
2	2390.00	27.79	10.26	49.78	35.61	52.22	74.00 21.78 Peak
3	2391.77	27.79	10.26	56.27	35.61	58.71	74.00 15.29 Peak
4	2400.00	27.79	10.30	65.83	35.61	68.31	74.00 5.69 Peak
5	2401.76	27.79	10.30	88.96	35.61	91.44	74.00 -17.44 Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
2391.77	58.71	9.972	48.738	54	Pass

Data: 7

File: F:\2018 Test\Gtech\20180409.EM6 (36)

Date: 2018-04-09

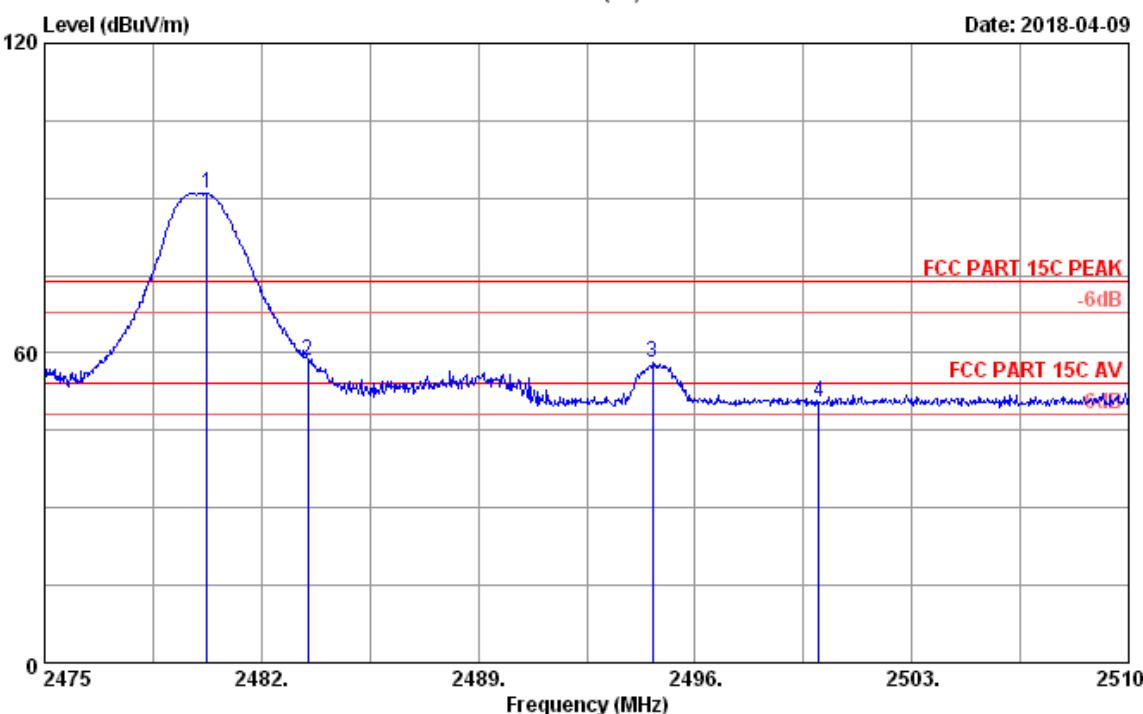

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
 Power rating : DC 1.5V
 Test Mode : BT4.0 2480MHz Tx mode

No.	Freq. (MHz)	Ant.	Cable	Amp	Emission	Margin (dB)	Remark
		Factor (dB/m)	Loss (dB)	Reading (dBuV)	factor (dB)	Limits (dBuV/m)	
1	2480.25	28.21	10.45	87.86	35.71	90.81	74.00 -16.81 Peak
2	2483.50	28.21	10.48	55.63	35.71	58.61	74.00 15.39 Peak
3	2494.64	28.30	10.48	55.06	35.74	58.10	74.00 15.90 Peak
4	2500.00	28.30	10.48	47.33	35.74	50.37	74.00 23.63 Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency (MHz)	Peak level (dBuv/m)	Duty cycle factor (dB)	AV level (dBuv/m)	Limit(dBuv/m)	Conclusion
2483.50	58.61	9.972	48.638	54	Pass
2494.64	58.10	9.972	48.128	54	Pass

Data: 8

File: F:\2018 Test\Gtech\20180409.EM6 (36)

Date: 2018-04-09

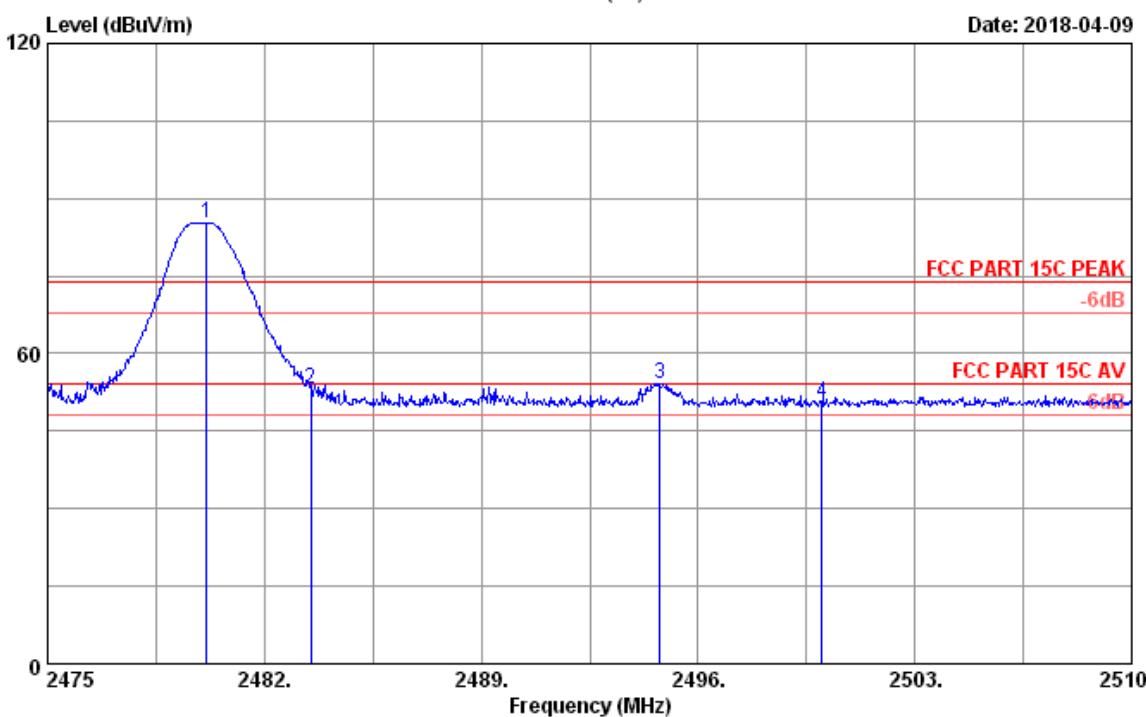

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : ELECOM TrackBall Mouse M/N:M-XPT1MR
 Power rating : DC 1.5V
 Test Mode : BT4.0 2480MHz Tx mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.15	28.21	10.45	82.32	35.71	85.27	74.00	-11.27	Peak
2	2483.50	28.21	10.48	50.05	35.71	53.03	74.00	20.97	Peak
3	2494.78	28.30	10.48	51.23	35.74	54.27	74.00	19.73	Peak
4	2500.00	28.30	10.48	47.27	35.74	50.31	74.00	23.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
2494.78	54.27	9.972	44.298	54	Pass

9. POWER SPECTRAL DENSITY TEST

9.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMC Analyzer	Agilent	N9030A	MY51380221	Sep.19,17	1 Year
2.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr.22,17	1 Year
3.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.15,17	1 Year

9.2. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

9.3. Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \text{ RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

9.4. Test Results

EUT: ELECOM TrackBall Mouse		
M/N: M-XPT1MR		
Date: 2018-04-09	Pressure: $102.2 \pm 1.0 \text{ kpa}$	Humidity: $52.2 \pm 3.0\%$
Tested by:Lynn	Test Site: RF site	Temperature: $22.4 \pm 0.6^\circ\text{C}$

Test Mode	Frequency (MHz)	Power density (dBm/3KHz)	Limit (dBm/3KHz)
GFSK	2402	-17.819	8
	2440	-17.678	8
	2480	-18.085	8
Conclusion : PASS			



10.MPE ESTIMATION

10.1.Limit for General Population/ Uncontrolled Exposures

Frequency	Power density (mW/cm2)	Averaging time(minutes)
300MHz----1.5GHz	F/1500	30
1.5GHz---100GHz	1.0	30

10.2.Estimation Result

EUT: ELECOM TrackBall Mouse		
M/N: M-XPT1MR		
Date: 2018-04-09	Pressure: 102.2±1.0 kpa	Humidity: 52.2±3.0%
Tested by: Lynn	Test Site: RF site	Temperature:22.4±0.6°C

Mode	CH	Frequency (MHz)	PK Output power (dBm)	Output power (mW)	antenna Gain (dBi)	antenna Gain (linear)	MPE (mW/cm ²)
GFSK	CH0	2402	-3.075	0.493	2.805	1.908	0.000187
	CH19	2440	-3.575	0.439	2.805	1.908	0.000167
	CH39	2480	-4.296	0.372	2.805	1.908	0.000141

$$\text{MPE} = \frac{PG}{4\pi R^2} \quad (R=20 \text{ cm})$$

11. ANTENNA REQUIREMENT

11.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Antenna Connected Construction

The antennas used for this product are Internal Antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.805dBi.



FCC ID: YWO-M-XPTIMR

AUDIX Technology (Shenzhen) Co., Ltd.

page 12-1

12. DEVIATION TO TEST SPECIFICATIONS

[NONE]