

# TEST REPORT

**Application No.:** SHCR2406001132AT  
**FCC ID:** YWO-MIPT10MR  
**Applicant:** ELECOM CO., LTD.  
**Address of Applicant:** Fushimimachi 4-1-1, Chuo-ku, Osaka City, Osaka, Japan 541-8765  
**Manufacturer:** ELECOM CO., LTD.  
**Address of Manufacturer:** Fushimimachi 4-1-1, Chuo-ku, Osaka City, Osaka, Japan 541-8765  
**Factory:** Success Compu China  
**Address of Factory:** 201 and 301, Building 3, No.1 Yangkeng Road, Shanxia Community, Pinghu Street, Longgang District, Shenzhen, Guangdong, China

**Equipment Under Test (EUT):**  
**EUT Name:** Wireless Trackball Mouse  
**Model No.:** MIPT10MR, M-IPT10MRSBK, M-IPT10MRSABK  
**Remark:** Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.

**Trade Mark:** ELECOM  
**Standard(s) :** 47 CFR Part 15, Subpart C 15.249  
**Date of Receipt:** 2024-06-14  
**Date of Test:** 2024-06-26 to 2024-07-10  
**Date of Issue:** 2024-07-15

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



**SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.**

SHEM-TRF-001 Rev. 02 Sep01, 2023

Report No.: SHCR240600113202

Page: 2 of 33

Revision Record			
Version	Description	Date	Remark
00	Original	2024-07-15	/

Authorized for issue by:			
Tested By		<i>Wade Zhang</i>	
		_____ Wade Zhang/Project Engineer	
Approved By		<i>Parlam Zhan</i>	
		_____ Parlam Zhan / Reviewer	

## 2 Test Summary

<b>Radio Spectrum Technical Requirement</b>				
<b>Item</b>	<b>Standard</b>	<b>Method</b>	<b>Requirement</b>	<b>Result</b>
Antenna Requirement	47 CFR Part 15, Subpart C 15.249	N/A	47 CFR Part 15, Subpart C 15.203	Pass

<b>Radio Spectrum Matter Part</b>				
<b>Item</b>	<b>Standard</b>	<b>Method</b>	<b>Requirement</b>	<b>Result</b>
Field Strength of the Fundamental Signal (15.249(a))	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.5&6.6	47 CFR Part 15, Subpart C 15.249(a)	Pass
Restricted Band Around Fundamental Frequency		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209	Pass
Radiated Emissions Below 1GHz		ANSI C63.10 (2013) Section 6.4&6.5	47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)	Pass
Radiated Emissions Above 1GHz		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)	Pass
20dB Bandwidth		ANSI C63.10 (2013) Section 6.9	47 CFR Part 15, Subpart C 15.215	Pass

Note: There are series models mentioned in this report, and they are the similar in electrical and electronic characters. Only the model MIPT10MR was tested since their differences were the model number and appearance.

### 3 Contents

	Page
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 Test Summary</b> .....	<b>3</b>
<b>3 Contents</b> .....	<b>4</b>
<b>4 General Information</b> .....	<b>5</b>
4.1 Details of E.U.T. ....	5
4.2 Description of Support Units .....	5
4.3 Measurement Uncertainty .....	5
4.4 Test Location.....	6
4.5 Test Facility .....	6
4.6 Deviation from Standards.....	6
4.7 Abnormalities from Standard Conditions .....	6
<b>5 Equipment List</b> .....	<b>7</b>
<b>6 Radio Spectrum Technical Requirement</b> .....	<b>8</b>
6.1 Antenna Requirement .....	8
6.1.1 <i>Test Requirement:</i> .....	8
6.1.2 <i>Conclusion</i> .....	8
<b>7 Radio Spectrum Matter Test Results</b> .....	<b>9</b>
7.1 Field Strength of the Fundamental Signal (15.249(a)).....	9
7.1.1 <i>E.U.T. Operation</i> .....	9
7.1.2 <i>Test Mode Description</i> .....	9
7.1.3 <i>Test Setup Diagram</i> .....	9
7.1.4 <i>Measurement Procedure and Data</i> .....	10
7.2 Restricted Band Around Fundamental Frequency.....	11
7.2.1 <i>E.U.T. Operation</i> .....	11
7.2.2 <i>Test Mode Description</i> .....	11
7.2.3 <i>Test Setup Diagram</i> .....	11
7.2.4 <i>Measurement Procedure and Data</i> .....	12
7.3 Radiated Emissions Below 1GHz .....	17
7.3.1 <i>E.U.T. Operation</i> .....	17
7.3.2 <i>Test Mode Description</i> .....	17
7.3.3 <i>Test Setup Diagram</i> .....	17
7.3.4 <i>Measurement Procedure and Data</i> .....	18
7.4 Radiated Emissions Above 1GHz .....	21
7.4.1 <i>E.U.T. Operation</i> .....	21
7.4.2 <i>Test Mode Description</i> .....	21
7.4.3 <i>Test Setup Diagram</i> .....	21
7.4.4 <i>Measurement Procedure and Data</i> .....	22
7.5 20dB Bandwidth .....	29
7.5.1 <i>E.U.T. Operation</i> .....	29
7.5.2 <i>Test Mode Description</i> .....	29
7.5.3 <i>Test Setup Diagram</i> .....	29
7.5.4 <i>Measurement Procedure and Data</i> .....	29
<b>8 Test Setup Photo</b> .....	<b>33</b>
<b>9 EUT Constructional Details (EUT Photos)</b> .....	<b>33</b>

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	DC 3V (2*AA Battery)
Test Voltage:	DC 3V
Operating Frequency:	2405MHz-2476MHz
Channel Number:	12 Channels
Modulation Type:	GFSK
Antenna Type:	FPC Antenna
Antenna Gain:	2dBi (Provided by manufacturer)
Receiver Category:	1

EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
5	2405	7	2407	8	2408
22	2422	23	2423	27	2427
47	2447	51	2451	52	2452
73	2473	74	2474	76	2476

Note: Frequency (MHz) = 2400+n, n=channel number.

CH list which is used on Firmware is 5, 7, 8, 22, 23, 27, 47, 51, 52, 73, 74, 76.

### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	LENOVO	L460	-
SecureCRT	VanDyke	V 6.2.0	-
Serial port adapter plate	-	Test Plate 3	-

### 4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4 x 10 <sup>-8</sup>
2	Timeout	2s
3	Duty cycle	0.4%
4	Occupied Bandwidth	3%
5	RF conducted power	0.6dB
6	RF power density	2.9dB
7	Conducted Spurious emissions	0.75dB
8	RF Radiated power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious emission test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-6GHz)
		5.4dB (6GHz-18GHz)
10	Temperature test	1°C
11	Humidity test	3%
12	Supply voltages	1.5%

13	Time	3%
----	------	----

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. E&E Lab

588 West Jindu Road, Xinqiao, Songjiang, 201612 Shanghai, China

Tel: +86 21 6191 5666

Fax: +86 21 6191 5678

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g. max. clock frequency, highest internal frequency, antenna gain, cable loss, etc ) is provided by the applicant. (if applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (if applicable).
3. Sample source: sent by customer.

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6332.01)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA).

- **FCC (Designation Number: CN1301)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0020)**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.  
Company Number: 8617A

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.

#### 4.6 Deviation from Standards

None

#### 4.7 Abnormalities from Standard Conditions

None

## 5 Equipment List

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
<b>RF Conducted Test</b>					
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2023-12-19	2024-12-18
Spectrum Analyzer	Keysight	N9020B	SHEM241-1	2023-12-19	2024-12-18
Spectrum Analyzer	Agilent	N9020A	SHEM181-1	2023-08-01	2024-07-31
Signal Generator	R&S	SMR20	SHEM006-1	2023-08-01	2024-07-31
Signal Generator	Agilent	N5182A	SHEM182-1	2023-08-01	2024-07-31
Communication Tester	R&S	CMW270	SHEM183-1	2024-05-23	2025-05-22
Communication Tester	R&S	CMW500	SHEM268-1	2024-05-23	2025-05-22
Power Sensor	Keysight	U2021XA * 4	SHEM184-1	2023-08-01	2024-07-31
Splitter	Anritsu	MA1612A	SHEM185-1	/	/
Coupler	e-meca	803-S-1	SHEM186-1	/	/
High-low Temp Cabinet	Suzhou Zhihe	TL-40	SHEM087-1	2022-11-08	2024-11-07
AC Power Stabilizer	APC	KDF-31020T-V0-F0	SHEM216-1	2023-12-19	2024-12-18
DC Power Supply	HP	6010A	SHEM222-1	2023-12-19	2024-12-18
Conducted test Cable	/	RF01~RF04	/	2023-12-19	2024-12-18
Switcher	Tonscend	JS0806	SHEM184-1	2023-08-01	2024-07-31
Test software	Tonscend	JS Tonscend BT/WIFI System	Version: 2.6	/	/
Switcher+Power Sensor	TST	TSPS2023R	SHEM263-1	2023-08-01	2024-07-31
Test software	TST	TST PASS	Version: 2.0	/	/
<b>RF Radiated Test</b>					
EMI test Receiver	R&S	ESU40	SHEM051-1	2023-12-19	2024-12-18
Spectrum Analyzer	R&S	FSP-30	SHEM002-1	2023-12-19	2024-12-18
Communication Tester	R&S	CMW500	SHEM268-1	2024-05-23	2025-05-22
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519	SHEM135-1	2023-12-19	2024-12-18
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM048-1	2023-09-03	2025-09-02
Antenna (25MHz-2GHz)	Schwarzbeck	VULB9168	SHEM202-1	2023-04-17	2025-04-16
Horn Antenna (1-18GHz)	Schwarzbeck	HF906	SHEM009-1	2022-08-11	2024-08-10
Horn Antenna (1-18GHz)	Schwarzbeck	BBHA9120D	SHEM050-1	2023-09-03	2025-09-02
Horn Antenna (14-40GHz)	Schwarzbeck	BBHA 9170	SHEM049-1	2023-09-03	2025-09-02
Pre-Amplifier	HP	8447D	SHEM236-1	2023-12-19	2024-12-18
High-amplifier (14-40GHz)	Schwarzbeck	10001	SHEM049-2	2023-12-19	2024-12-18
Band Filter	LORCH	9BRX-875/X150	SHEM156-1	/	/
Band Filter	LORCH	13BRX-1950/X500	SHEM083-2	/	/
Band Filter	LORCH	5BRX-2400/X200	SHEM155-1	/	/
Band Filter	LORCH	5BRX-5500/X1000	SHEM157-2	/	/
High pass Filter	Wainwright	WHK3.0/18G	SHEM157-1	/	/
High pass Filter	Wainwright	WHKS1700	SHEM157-3	/	/
Semi/Fully Anechoic	ST	11*6*6M	SHEM078-2	2023-05-06	2026-05-05
RE test Cable	/	PT18-NMNM-10M	SHEM217-2	2023-12-19	2024-12-18
Test software	ESE	E3	Version: 6.111221a	/	/

## **6 Radio Spectrum Technical Requirement**

### **6.1 Antenna Requirement**

#### **6.1.1 Test Requirement:**

47 CFR Part 15, Subpart C 15.203

#### **6.1.2 Conclusion**

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is FPC antenna and no consideration of replacement. The best case gain of the antenna is 2 dBi.

Antenna location: Refer to Internal photos



## 7 Radio Spectrum Matter Test Results

### 7.1 Field Strength of the Fundamental Signal (15.249(a))

Test Requirement 47 CFR Part 15, Subpart C 15.249(a)  
 Test Method: ANSI C63.10 (2013) Section 6.5&6.6

Limit:

Fundamental frequency(MHz)	Field strength of fundamental(millivolts/meter)	Field strength of harmonics(microvolts/meter)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500

Remark: The frequencies above 1000MHz are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

For fundamental frequency in "902-928MHz", the field strength of fundamental is based on Quasi-Peak.

#### 7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 26.3 °C Humidity: 64.3 % RH Atmospheric Pressure: 1010 mbar

#### 7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in transmitting with modulation mode.

#### 7.1.3 Test Setup Diagram

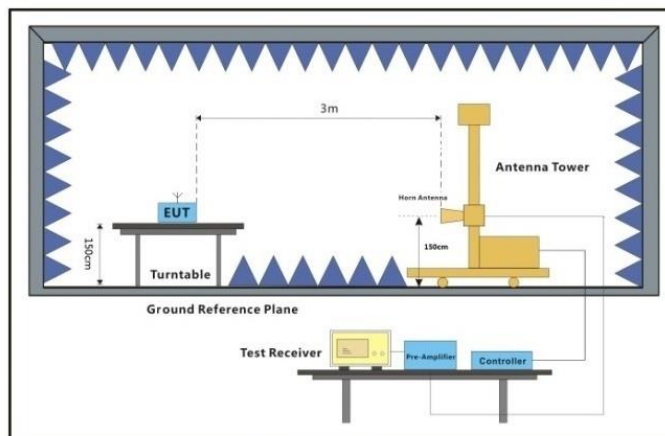

Above 1GHz

**7.1.4 Measurement Procedure and Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
2405	96.84	-2.98	93.86	94	-0.14	Peak	Horizontal
	93.07	-2.98	90.09	94	-3.91	Peak	Vertical

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
2447	82.03	-2.91	79.12	94	-14.88	Peak	Horizontal
	94.96	-2.91	92.05	94	-1.95	Peak	Vertical

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
2476	95.53	-2.77	92.76	94	-1.24	Peak	Horizontal
	89.93	-2.77	87.16	94	-6.84	Peak	Vertical

Remark:

- 1) The basic equation with a sample calculation is as follows: Level = Read Level + Factor.

**(The Factor is calculated by adding the Antenna Factor, Cable Loss and Preamp Factor)**

If the Peak value below the Average Limit, the Average test doesn't perform for this submission.

## 7.2 Restricted Band Around Fundamental Frequency

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
Above 1GHz	74.0	Peak Value

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

### 7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 26.3 °C Humidity: 64.3 % RH Atmospheric Pressure: 1010 mbar

### 7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in transmitting with modulation mode.

### 7.2.3 Test Setup Diagram

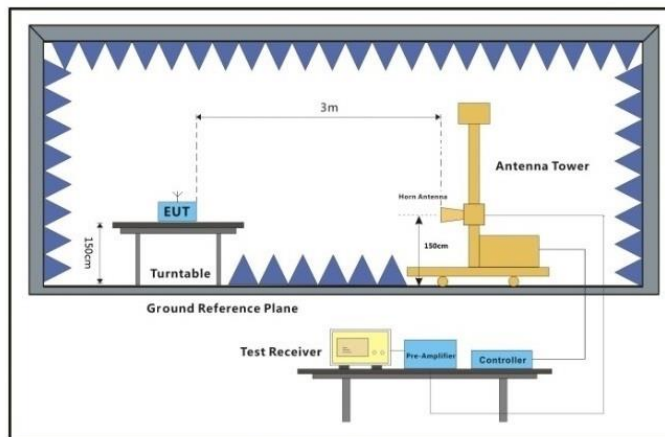


Above 1GHz

**7.2.4 Measurement Procedure and Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:Low

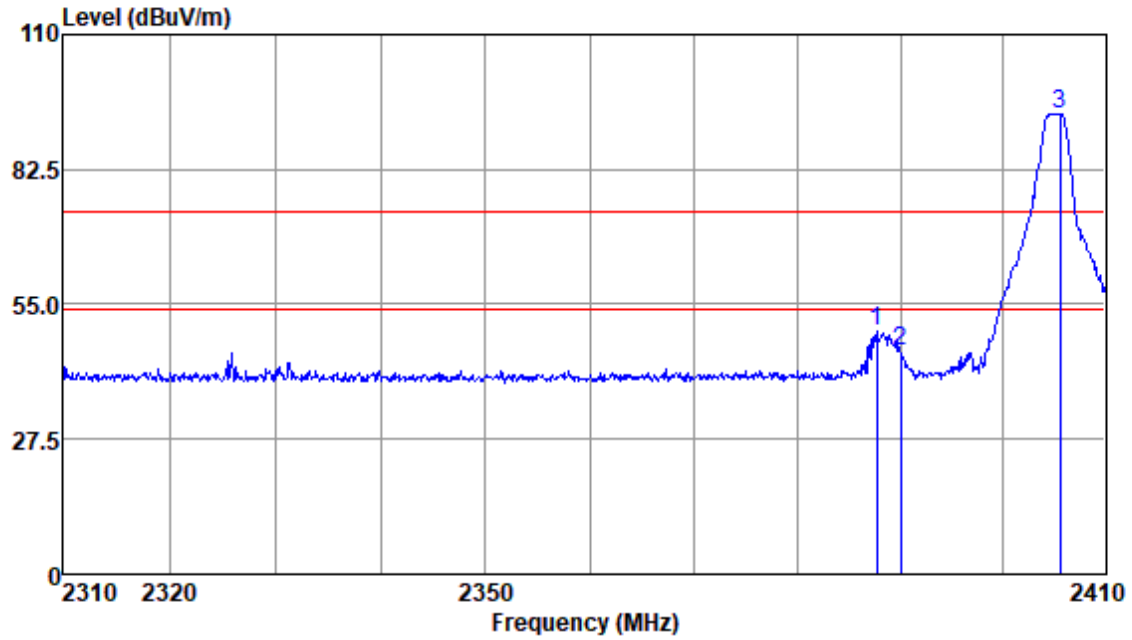


Antenna Polarity :HORIZONTAL  
EUT/Project :1132AT

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2387.74	52.41	28.80	3.34	35.18	49.37	74.00	-24.63	Peak
2390.00	48.31	28.80	3.34	35.18	45.27	74.00	-28.73	Peak
2405.61	96.84	28.89	3.33	35.20	93.86	74.00	19.86	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:Low

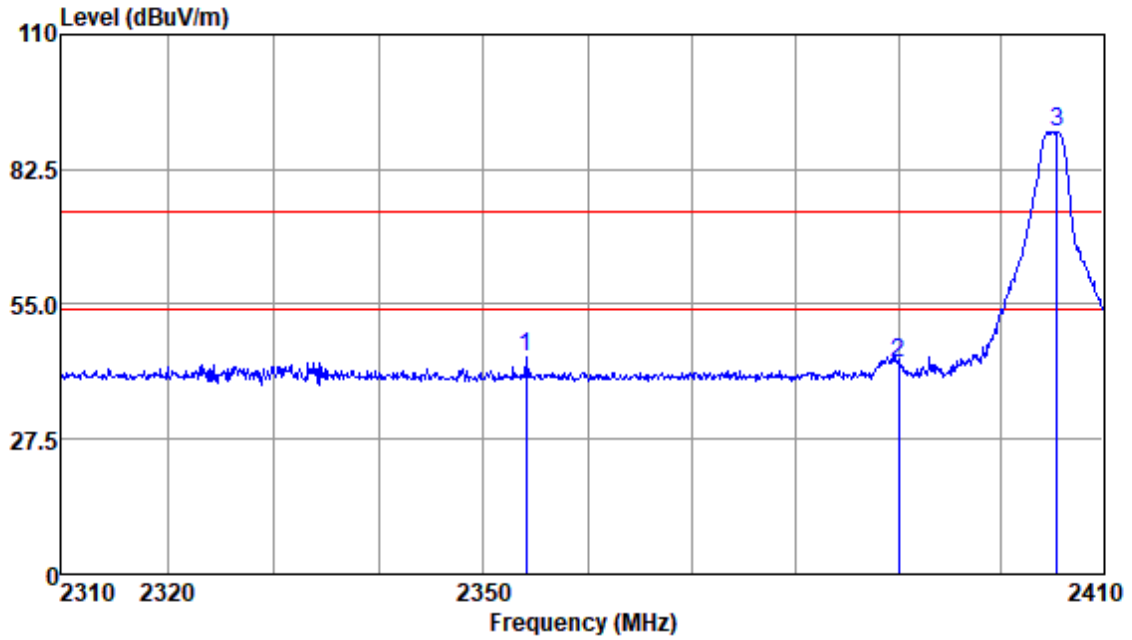


Antenna Polarity :VERTICAL  
EUT/Project :1132AT

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2354.08	47.32	28.61	3.29	35.15	44.07	74.00	-29.93	Peak
2390.00	45.94	28.80	3.34	35.18	42.90	74.00	-31.10	Peak
2405.51	93.07	28.89	3.33	35.20	90.09	74.00	16.09	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

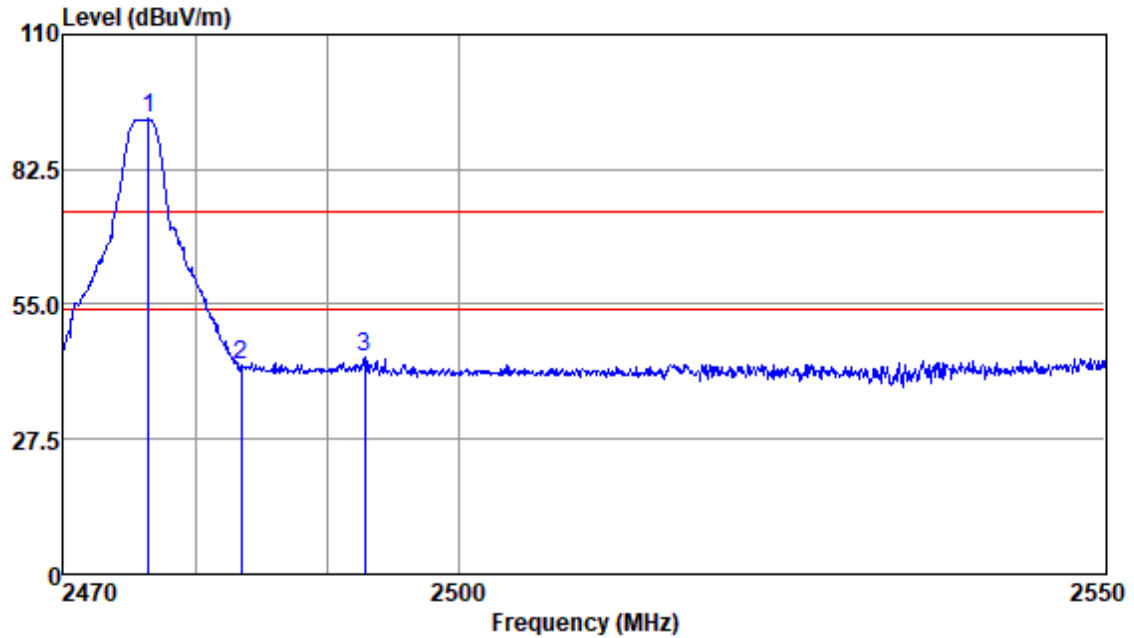


Antenna Polarity :HORIZONTAL  
EUT/Project :1132AT

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2476.46	95.53	29.08	3.40	35.25	92.76	74.00	18.76	Peak
2483.50	45.24	29.09	3.36	35.26	42.43	74.00	-31.57	Peak
2492.86	47.12	29.10	3.33	35.26	44.29	74.00	-29.71	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

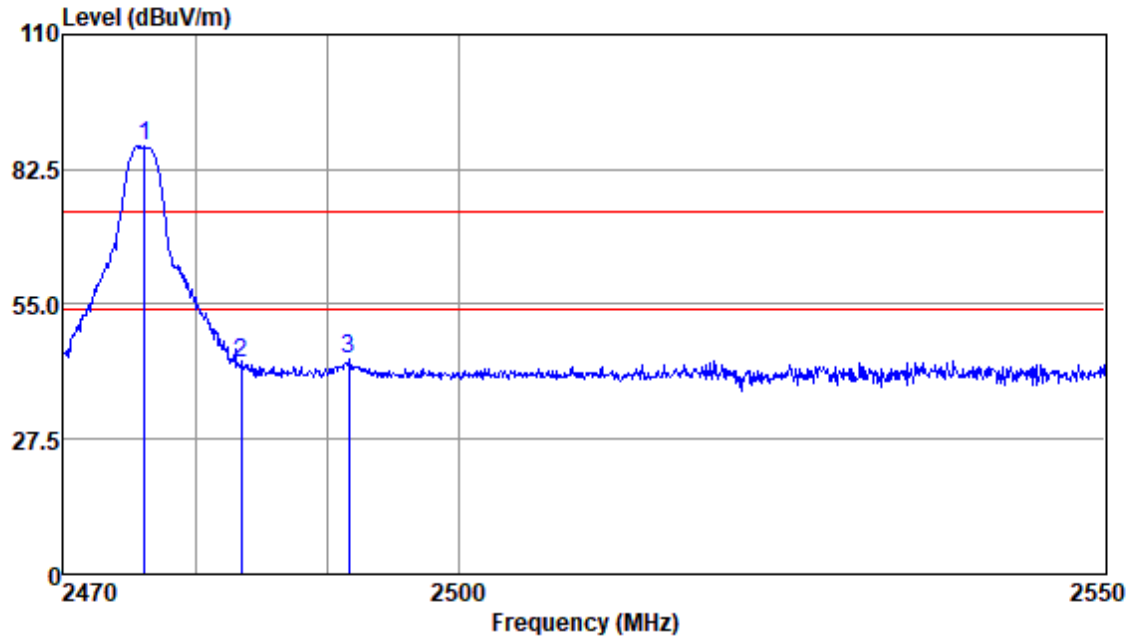

Antenna Polarity :VERTICAL  
EUT/Project :1132AT

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
2476.15	89.93	29.08	3.40	35.25	87.16	74.00	13.16	Peak
2483.50	45.73	29.09	3.36	35.26	42.92	74.00	-31.08	Peak
2491.67	46.65	29.10	3.33	35.26	43.82	74.00	-30.18	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



### 7.3 Radiated Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)

Test Method: ANSI C63.10 (2013) Section 6.4&6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

#### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

#### 7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in transmitting with modulation mode.

#### 7.3.3 Test Setup Diagram

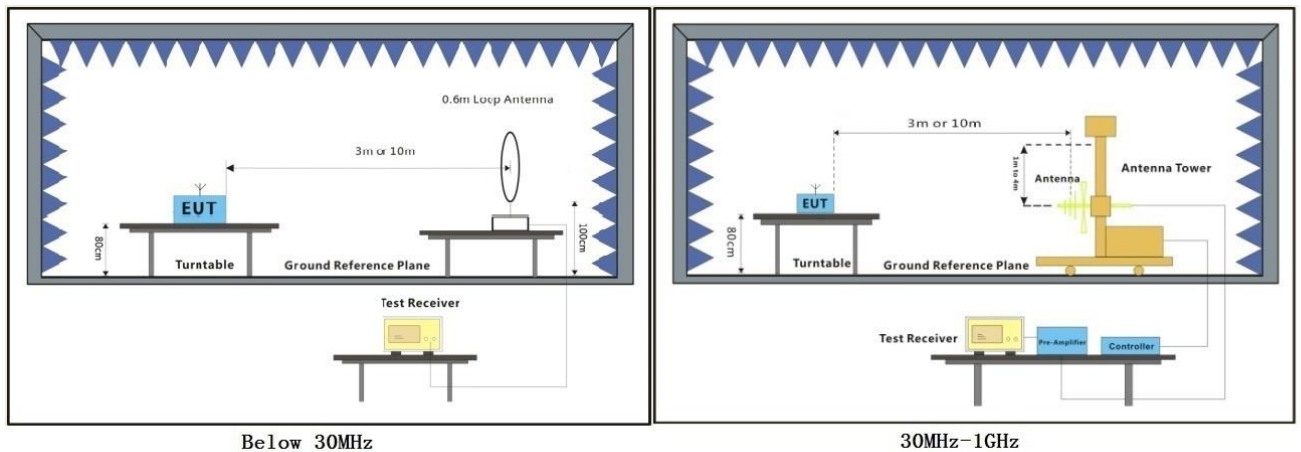


**7.3.4 Measurement Procedure and Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

**Remark:**

1.  $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test Mode: 01; Polarity: Horizontal

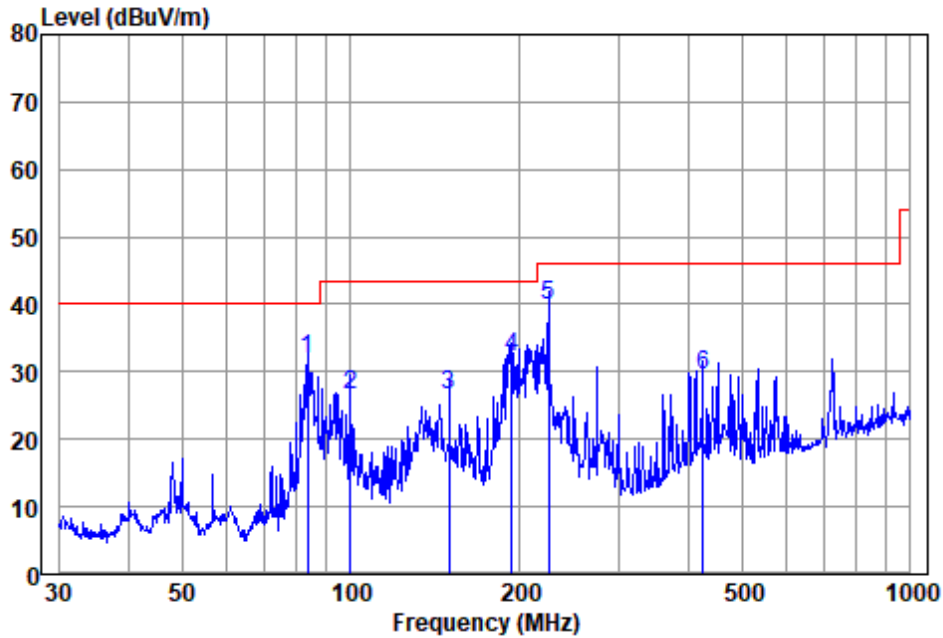


Antenna Polarity :HORIZONTAL  
 EUT/Project :1132AT  
 Test mode :01

	Read	Antenna	Cable	Preamp	Emission	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	83.816	55.10	8.10	1.86	33.20	31.86	40.00	-8.14 QP
2	99.878	48.50	9.10	2.02	33.20	26.42	43.50	-17.08 QP
3	150.011	43.23	13.70	2.63	33.00	26.56	43.50	-16.94 QP
4	193.773	51.83	10.36	2.91	33.00	32.10	43.50	-11.40 QP
5	225.308	59.48	10.01	3.18	32.89	39.78	46.00	-6.22 QP
6	425.028	41.34	16.45	4.49	32.75	29.53	46.00	-16.47 QP

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical

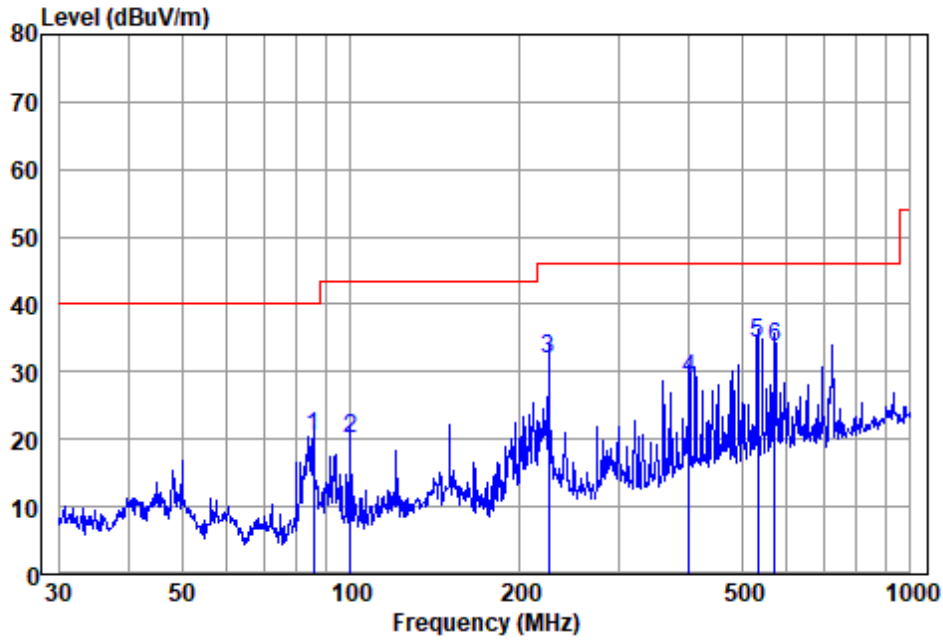

Antenna Polarity :VERTICAL  
 EUT/Project :1132AT  
 Test mode :01

	Read	Antenna	Cable	Preamp	Emission	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	85.898	43.80	7.80	1.85	33.20	20.25	40.00	-19.75 QP
2	99.878	42.02	9.10	2.02	33.20	19.94	43.50	-23.56 QP
3	225.308	51.71	10.01	3.18	32.89	32.01	46.00	-13.99 QP
4	401.839	41.62	15.81	4.39	32.80	29.02	46.00	-16.98 QP
5	533.832	43.36	18.54	5.10	32.70	34.30	46.00	-11.70 QP
6	572.614	41.82	19.26	5.30	32.70	33.68	46.00	-12.32 QP

Note: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

### 7.4 Radiated Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)

Test Method: ANSI C63.10 (2013) Section 6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

#### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 26.3 °C


Humidity: 64.2 % RH

Atmospheric Pressure: 1010 mbar

#### 7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in transmitting with modulation mode.

#### 7.4.3 Test Setup Diagram

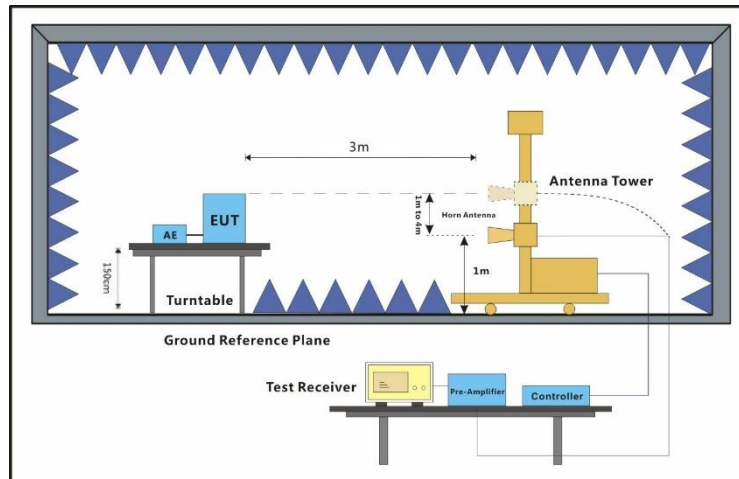


**7.4.4 Measurement Procedure and Data**

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

**Remark:**

1.  $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:Low

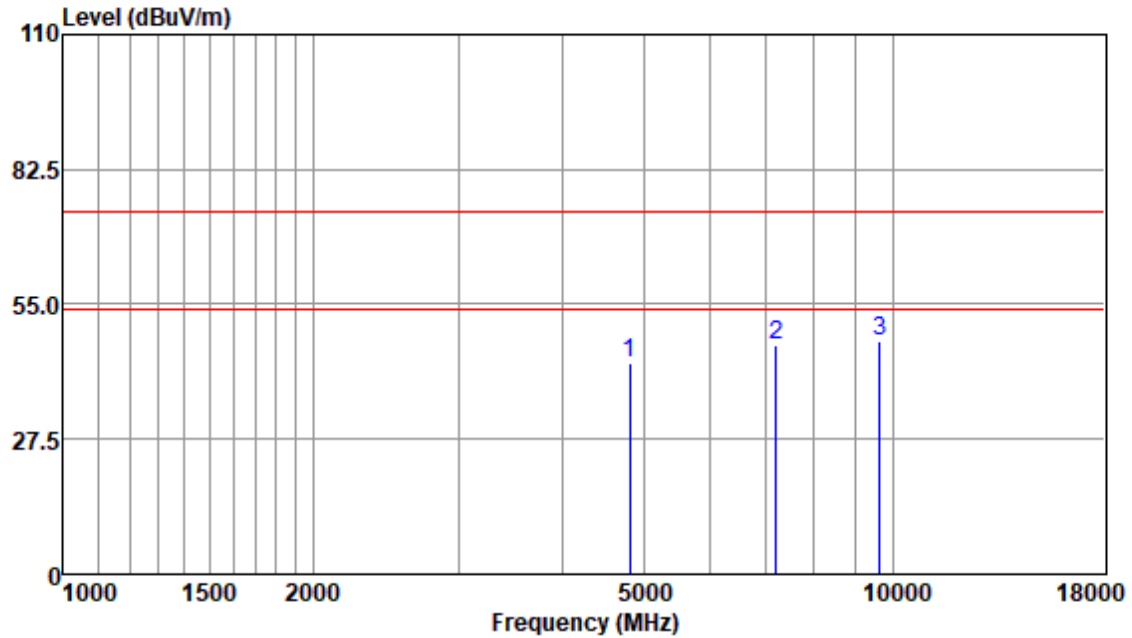


Antenna Polarity :HORIZONTAL

EUT/Project :1132AT

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4810.11	40.86	33.57	5.22	36.79	42.86	74.00	-31.14	Peak
7215.15	38.69	36.26	7.33	35.51	46.77	74.00	-27.23	Peak
9620.43	34.75	37.75	8.66	33.58	47.58	74.00	-26.42	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:Low

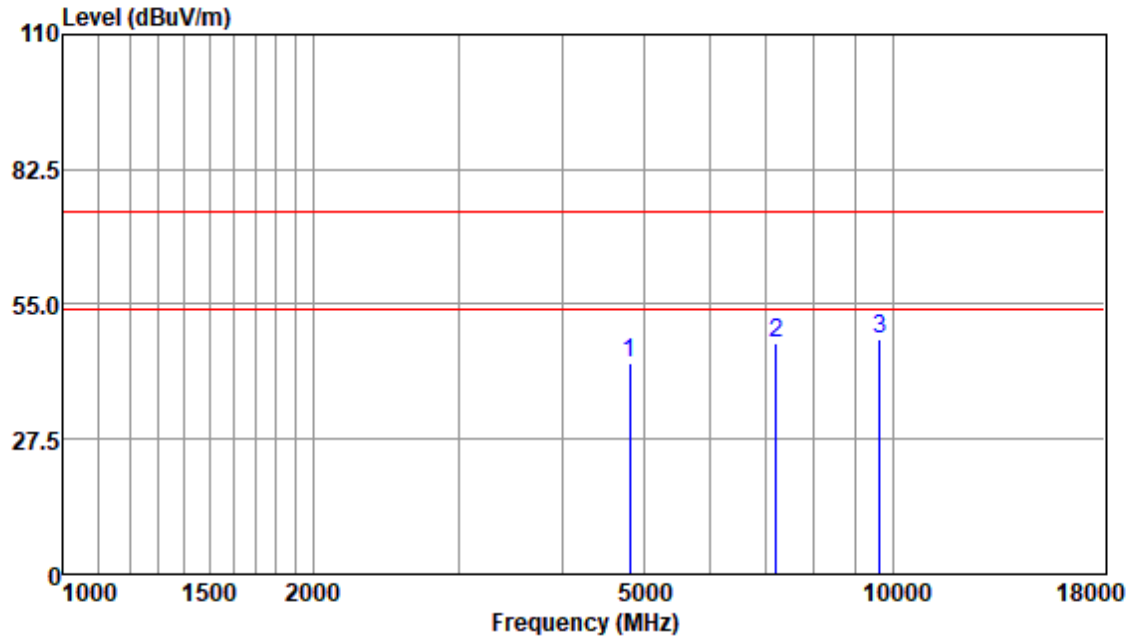


Antenna Polarity :VERTICAL  
EUT/Project :1132AT

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4810.11	40.96	33.57	5.22	36.79	42.96	74.00	-31.04	Peak
7215.15	38.91	36.26	7.33	35.51	46.99	74.00	-27.01	Peak
9620.43	35.18	37.75	8.66	33.58	48.01	74.00	-25.99	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor



Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:middle

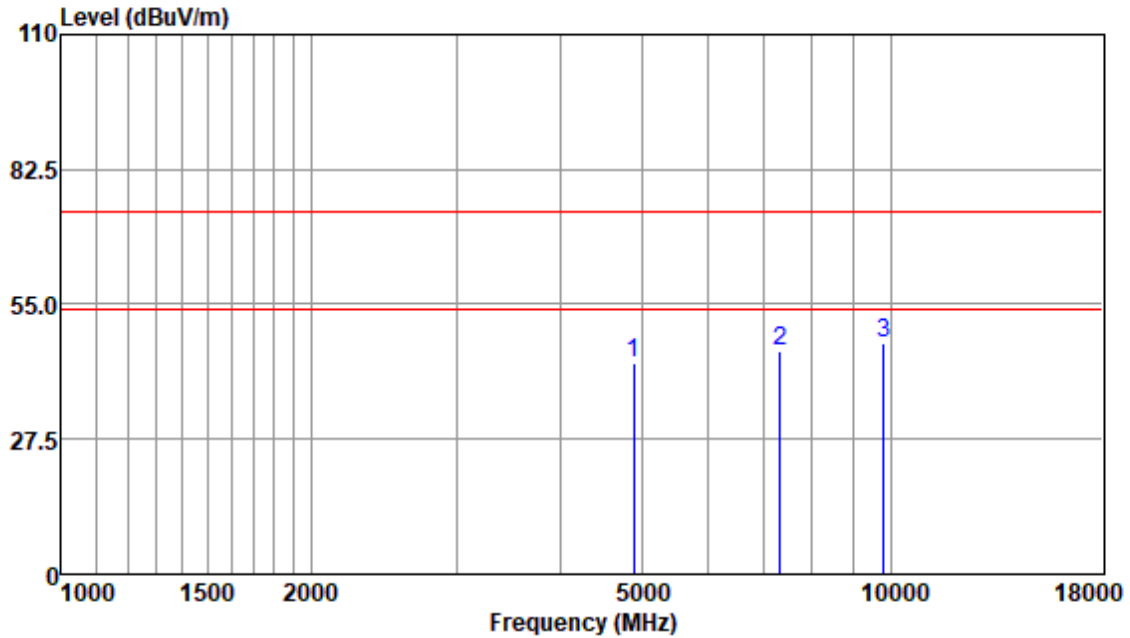


Antenna Polarity :HORIZONTAL  
EUT/Project :1132AT

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4894.15	40.71	33.66	5.36	36.81	42.92	74.00	-31.08	Peak
7341.47	37.24	36.35	7.31	35.41	45.49	74.00	-28.51	Peak
9788.60	34.34	37.56	8.77	33.49	47.18	74.00	-26.82	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:middle

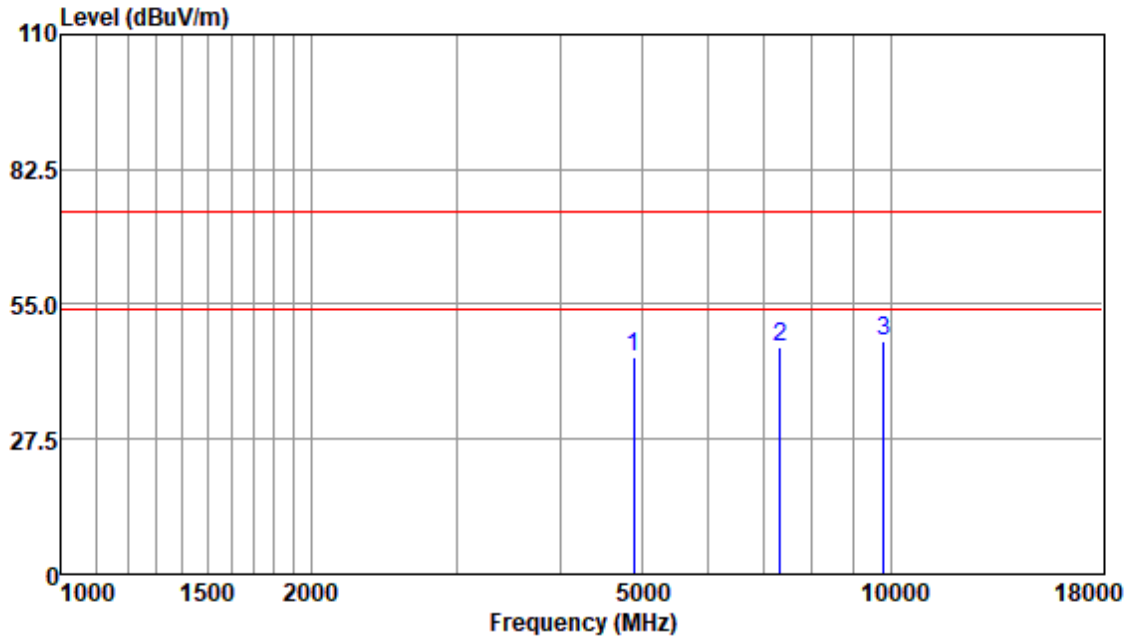


Antenna Polarity :VERTICAL

EUT/Project :1132AT

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4894.15	41.93	33.66	5.36	36.81	44.14	74.00	-29.86	Peak
7341.47	38.05	36.35	7.31	35.41	46.30	74.00	-27.70	Peak
9788.60	34.73	37.56	8.77	33.49	47.57	74.00	-26.43	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Horizontal; Modulation:GFSK; Channel:High

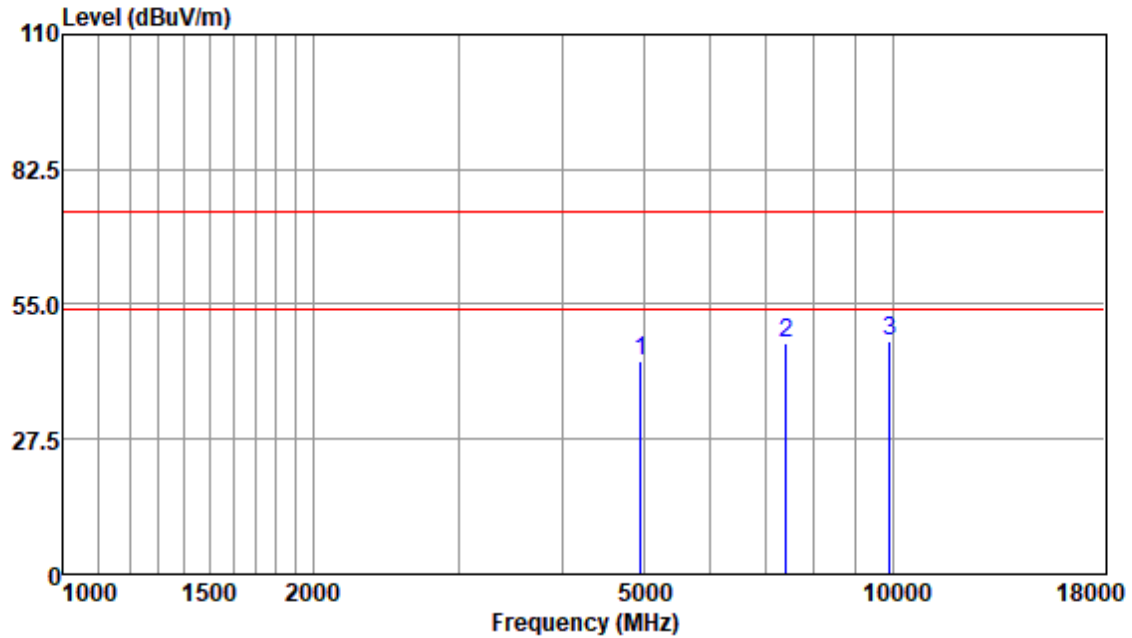


Antenna Polarity :HORIZONTAL

EUT/Project :1132AT

Read Freq	Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4952.99	41.01	33.65	5.46	36.83	43.29	74.00	-30.71	Peak
7428.91	38.68	36.31	7.43	35.34	47.08	74.00	-26.92	Peak
9904.35	34.77	37.61	8.66	33.42	47.62	74.00	-26.38	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

Test Mode: 01; Polarity: Vertical; Modulation:GFSK; Channel:High

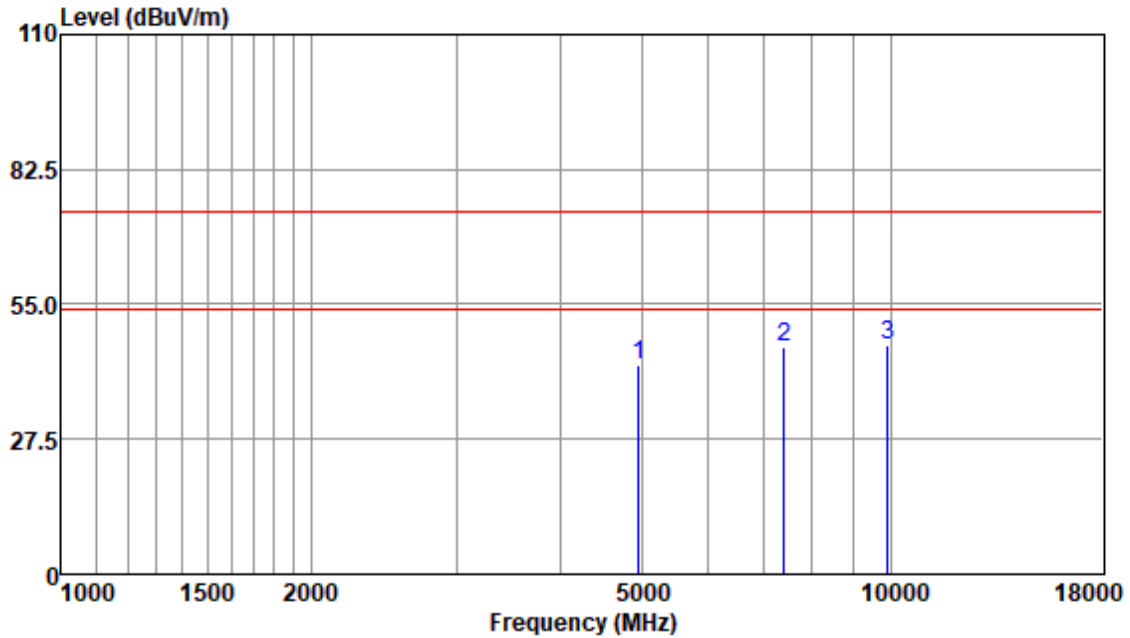

Antenna Polarity :VERTICAL  
EUT/Project :1132AT

Read Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limit Line	Over Limit	Remark
MHz	dBuv	dB/m	dB	dB	dBuv/m	dBuv/m	dB	
4952.99	40.30	33.65	5.46	36.83	42.58	74.00	-31.42	Peak
7428.91	37.67	36.31	7.43	35.34	46.07	74.00	-27.93	Peak
9904.35	33.87	37.61	8.66	33.42	46.72	74.00	-27.28	Peak

Note:Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

### 7.5 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.215

Test Method: ANSI C63.10 (2013) Section 6.9

#### 7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 26.3 °C


Humidity: 64.2 % RH

Atmospheric Pressure: 1010 mbar

#### 7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in transmitting with modulation mode.

#### 7.5.3 Test Setup Diagram

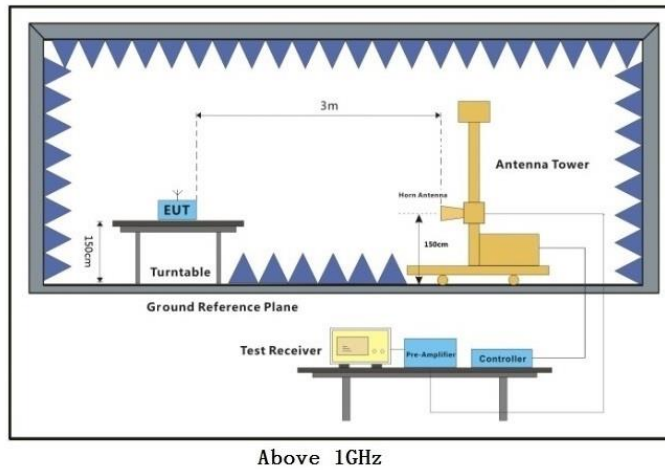

#### 7.5.4 Measurement Procedure and Data

Frequency (MHz)	Bandwidth (MHz)	Result
2405	2.39	PASS
2447	2.42	PASS
2476	2.40	PASS









## **8 Test Setup Photo**

Refer to Appendix - Test Setup Photo for SHCR2406001132AT

## **9 EUT Constructional Details (EUT Photos)**

Refer to Appendix - Photographs of EUT Constructional Details for SHCR2406001132AT

-End of the Report -