


GENERAL INFORMATION

FCCID: YWW-BLIP

1.1. Product description

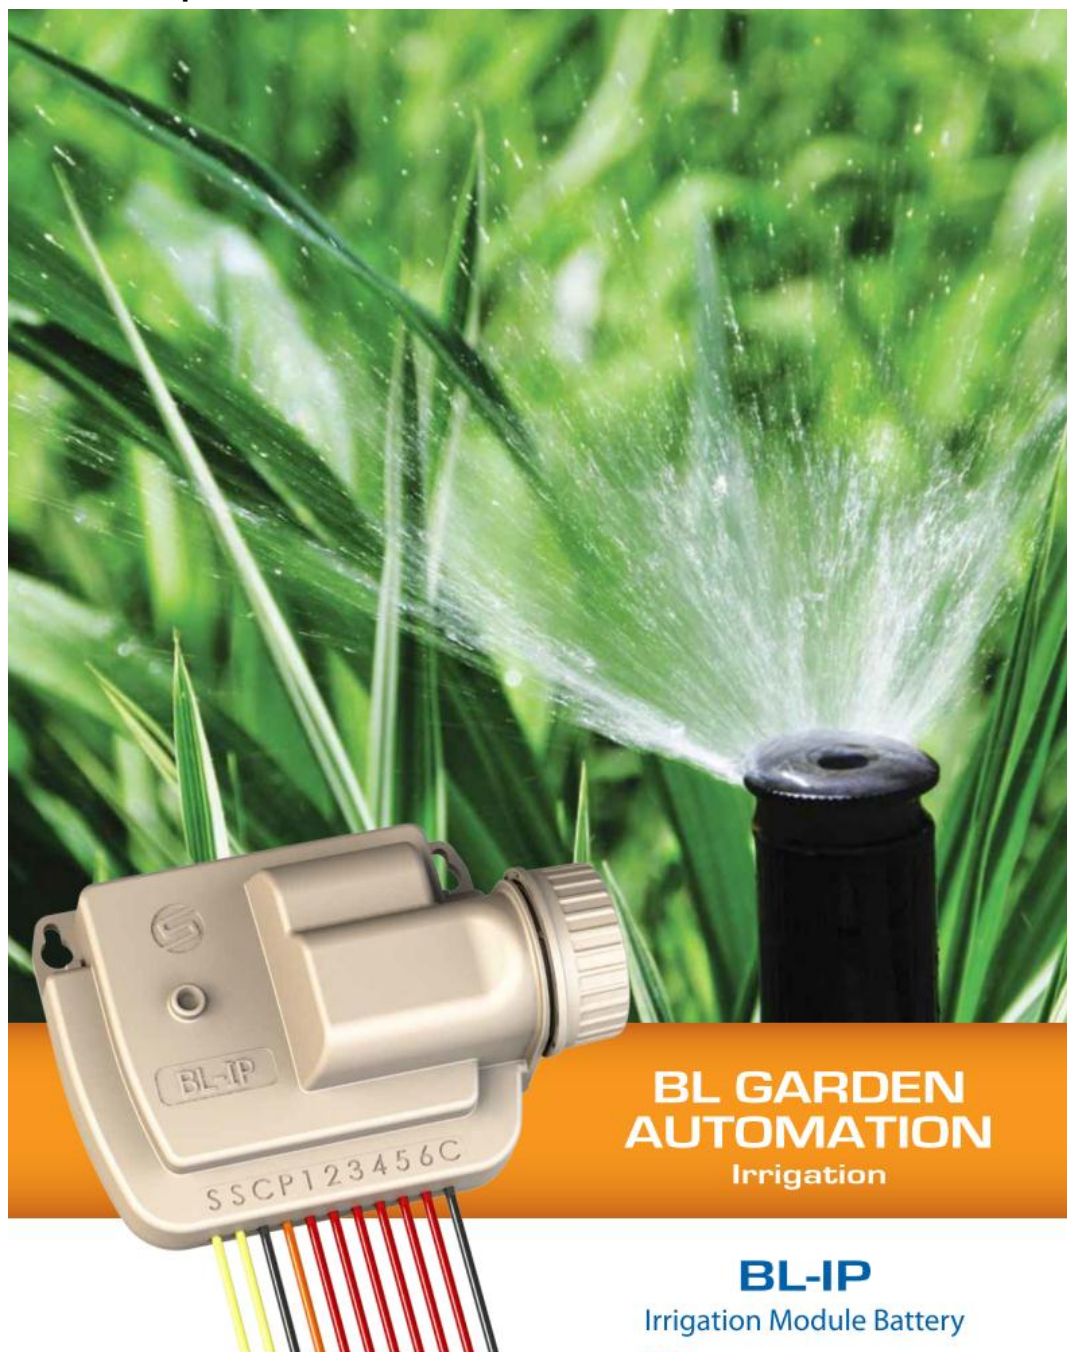

**BL GARDEN
AUTOMATION**
Irrigation

BL-IP
Irrigation Module Battery

 **Bluetooth**
SMART

BL-IP Irrigation Module Battery



BATTERY SUPPLIED ELECTRONIC MODULE DRIVEN FROM A SMARTPHONE OR A TABLET THANKS TO THE SOLEM "APP" AND BLUETOOTH LOW ENERGY

Applications :

Automatic Irrigation of private gardens, public areas, sport fields....

Features :

- Bluetooth Low Energy Communication
- Standalone: works with a 9V alkaline battery types 6AM6 (international standards) or 6LR61 (European standards) not included
- Rated IP68 : 100% waterproof and fully submersible
- Waterproof and independent battery housing
- Can be installed indoor, outdoor or in a valve box
- Start/Stop programmable function
- Non volatile memory will save programming in case of power failure

Specifications :

- 1, 2, 4, 6 stations
- Master valve connection
- Rain sensor connection
- Bluetooth range : about 10 meters
- Tested on :
 - iPhone 4S, 5, 5S, 5C, iPad 3, 4, Mini, Air (iOS 7.0 minimum)
 - Samsung Galaxy S3, S4, S5, Note 2 (Android 4.3 minimum)
 - Sony Xperia Z, Z1 compact (Android 4.3 minimum)

Electrical Specifications :

- Works with a 9V alkaline battery
- Works with 9V latching solenoids and a master valve equipped with a 9V latching solenoid
- Maximum distance between the module and solenoid is 30m with 1,5mm² wire size

Dimensions :

- Width : 14 cm
- Height : 5,5 cm
- Depth : 9 cm

Models :

- BL-IP1 : 1 Station
- BL-IP2 : 2 Stations
- BL-IP4 : 4 Stations
- BL-IP6 : 6 Stations



1.2. Tested System Details



Photography of EUT

Power supply:

During all the tests, EUT is supplied by V_{nom} : 9VDC

For measurement with different voltage, it will be presented in test method.

Name	Type	Rating	Reference / Sn	Comments
Supply1	<input type="checkbox"/> AC <input type="checkbox"/> DC <input checked="" type="checkbox"/> Battery	-	6LR61-6AM6 9V / None	Alkaline Battery

LCIE**Laboratoire de Moirans**

Z.I. Centr'Alp

170, Rue de Chatagnon

38430 MOIRANS-FRANCE

**LCIE****Inputs/outputs - Cable:**

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
Supply1	DC	0.05	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-
Access1	USB	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Temporary USB installed for the reception of different orders (power, choice of channel, modulation etc.)
Access2	I/O	0.5	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-
Access3	I/O	0.5	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-
Access4	I/O	0.5	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-
Access5	I/O	0.5	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-
Access6	I/O	0.5	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-
Access7	I/O	0.5	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-

Auxiliary equipment used during test:

Type	Reference	Sn	Comments
Laptop	ThinkPad Tseries	L3-B746308/01	-

Equipment information:

Type:	Bluetooth Low Energy v4.0		
Frequency band:	[2400 – 2483.5] MHz		
Sub-band REC7003:	Annex 3 (a)		
Spectrum Modulation:	<input checked="" type="checkbox"/> DSSS (Tested like it)		
Number of Channel:	40		
Spacing channel:	2MHz		
Channel bandwidth:	1MHz		
Transmit chains:	<input checked="" type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3
	<input checked="" type="checkbox"/> Single antenna	<input type="checkbox"/> Symmetrical	<input type="checkbox"/> Asymmetrical
	Gain 1: 3dBi	Gain 2: dBi	Gain 3: dBi
Beam forming gain:	<input type="checkbox"/> Yes: dB		<input checked="" type="checkbox"/> No
Receiver chains	<input checked="" type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3
Type of equipment:	<input checked="" type="checkbox"/> Stand-alone	<input type="checkbox"/> Plug-in	<input type="checkbox"/> Combined
Ad-Hoc mode:	<input type="checkbox"/> Yes		<input checked="" type="checkbox"/> No
Adaptivity mode:	<input type="checkbox"/> Yes (Load Based)		<input checked="" type="checkbox"/> No
	Clear Channel Assessment Time:		None
	q value for Load Based Equipment:		None
Duty cycle used for all the tests:	<input checked="" type="checkbox"/> Continuous duty (95%)	<input type="checkbox"/> Intermittent duty	<input type="checkbox"/> Continuous operation
Real Duty cycle:	2%		
Equipment type:	<input checked="" type="checkbox"/> Production model		<input type="checkbox"/> Prototype
Chip Reference:	nRF51822 By Nordic Semiconductor		

Temperature range:	Tmin:	<input checked="" type="checkbox"/> -20°C	<input type="checkbox"/> 0°C	<input type="checkbox"/> °C
	Tnom:	20°C		
	Tmax:	<input type="checkbox"/> 35°C	<input checked="" type="checkbox"/> 55°C	<input type="checkbox"/> °C
Test source voltage:	<input type="checkbox"/> AC:	<input type="checkbox"/> DC:	<input checked="" type="checkbox"/> Battery: 9VDC / Alkaline	

LCIE
Laboratoire de Moirans
 Z.I. Centr'Alp
 170, Rue de Chatagnon
 38430 MOIRANS-FRANCE



LCIE

CHANNEL PLAN			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
Cmin: 0	2402	Cmid: 20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	Cmax: 39	2480

DATA RATE		
Data Rate (Mbps)	Modulation Type	Worst Case Modulation
1	GFSK	<input checked="" type="checkbox"/>


1.1. EUT CONFIGURATION

The EUT is set in the following modes during tests with simulator / software (v1.93b): "Terminal"

- Permanent emission with modulation on a fixed channel in the data rate that produced the highest power
- Permanent reception
- The Power order sent for the Module is set at 0dBm.

1.1. Equipment modification

- ☐ None ☒ Modification: The capacity C15 (1pF) between antenna and C8 (capacity) is removed, see following map:

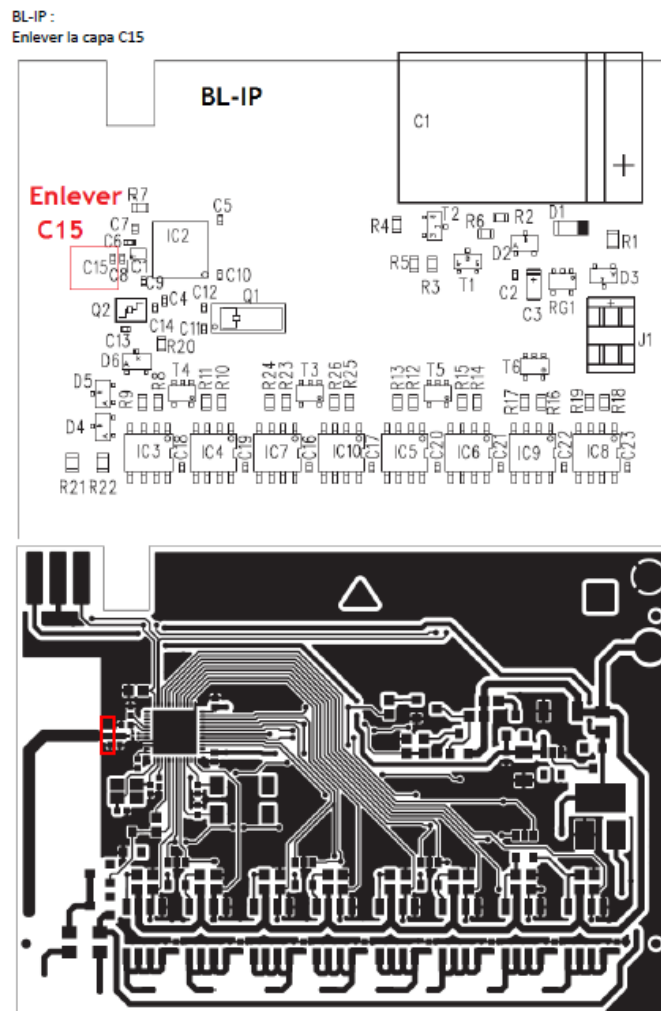

1.3. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4-2003, FCC Part 15 Subpart C.

Radiated testing was performed at an antenna to EUT distance of 10 meters. During testing, all equipment's and cables were moved relative to each other in order to identify the worst case set-up.

1.4. Test facility

Tests have been performed on from November 17th to 26th, 2014.

LCIE

Laboratoire de Moirans

Z.I. Centr'Alp

170, Rue de Chatagnon

38430 MOIRANS-FRANCE



L C I E

This test facility has been fully described in a report and accepted by FCC as compliant with the radiated and AC line conducted test site criteria in ANSI C63.4-2003 in a letter dated March 25th, 2008 (registration number 94821). This test facility has also been accredited by COFRAC (French accreditation authority for European Union test lab accreditation organization) according to NF EN ISO/IEC 17025, accreditation number 1-1633 as compliant with test site criteria and competence in 47 CFR Part 15/ANSI C63.4 and EN55022/CISPR22 norms for 89/336/EEC European EMC Directive application. All pertinent data for this test facility remains unchanged.