



L C I E

LCIE  
Etablissement de Moirans  
ZI Centralp  
170, rue de Chatagnon  
38430 Moirans

RCS Grenoble 408 363 174

Tél. : +33 4 76 07 36 36

Fax : +33 4 76 55 90 88

# TEST REPORT

N°: 810533-A1-R2-E

JDE : 131655

**Subject**                      **Electromagnetic compatibility and Radio spectrum Matters  
(ERM) tests according to standards:  
FCC CFR 47 Part 15, Subpart B et C  
RSS-210 Issue 8**

**Issued to**                      **SOLEM**  
ZAE la Plaine 5 rue Georges Besses.  
34830 - CLAPIER

**Apparatus under test**

↳ Product	<b>Hose End Controller</b>
↳ Trade mark	<b>SOLEM</b>
↳ Manufacturer	<b>SOLEM</b>
↳ Model under test	<b>BL-NR-US</b>
↳ Serial number	<b>BLNR-0203C6 and BLNR-020CB3</b>
↳ FCCID	<b>YWW-BLNR</b>
↳ ICID	<b>9319A-BLNR</b>

**Test date**                      From November 17<sup>th</sup> to 26<sup>th</sup>, 2014

**Test location**                      Moirans

**Test performed by**                      G.Deschamps

**Composition of document**                      32 pages

**Modification of the last version**                      None

**Document issued on**                      February 10th, 2015

Written by :  
**Gaëtan Deschamps**  
Tests operator



*This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the item tested. It does not imply the conformity of the whole production to the item tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measures. This document does not anticipate any certification decision.*

LCIE

33, av du Général Leclerc  
BP 8  
92266 Fontenay-aux-Roses cedex  
France

Tél : +33 1 40 95 60 60  
Fax : +33 1 40 95 86 56  
contact@lcie.fr  
www.lcie.fr

Société par Actions Simplifiée  
au capital de 15 745 984 €  
RCS Nanterre B 408 363 174  
www.lcie.com



## SUMMARY

1.	TEST PROGRAM .....	3
2.	SYSTEM TEST CONFIGURATION.....	4
3.	RADIATED EMISSION DATA .....	8
4.	BANDWIDTH (15.247) .....	12
5.	MAXIMUM PEAK OUTPUT POWER (15.247) .....	15
6.	POWER SPECTRAL DENSITY (15.247) .....	18
7.	BAND EDGE MEASUREMENT (15.247) .....	21
8.	OCCUPIED BANDWIDTH.....	26
9.	ANNEX 1 (GRAPHS) .....	28
10.	UNCERTAINTIES CHART .....	32



## 1. TEST PROGRAM

**Standard:**

- FCC Part 15, Subpart C 15.247
- ANSI C63.4 (2003)
- RSS-210 Issue 8 – Dec 2010
- RSS-Gen Issue 3 – Dec 2010

EMISSION TEST	LIMITS			RESULTS
<b>Limits for conducted disturbance at mains ports</b> 150kHz-30MHz	<b>Frequency</b>	<b>Quasi-peak value (dBμV)</b>	<b>Average value (dBμV)</b>	<input type="checkbox"/> PASS <input type="checkbox"/> FAIL <input checked="" type="checkbox"/> NA <input type="checkbox"/> NP
	150-500kHz	66 to 56	56 to 46	
	0.5-5MHz	56	46	
	5-30MHz	60	50	
<b>Radiated emissions</b> 9kHz-30MHz CFR 47 §15.209 (a) CFR 47 §15.247 (d) RSS-210 §A8.5	<b>Measure at 300m</b> 9kHz-490kHz : 67.6dBμV/m /F(kHz) <b>Measure at 30m</b> 490kHz-1.705MHz : 87.6dBμV/m /F(kHz) 1.705MHz-30MHz : 29.5 dBμV/m			<input type="checkbox"/> PASS <input type="checkbox"/> FAIL <input checked="" type="checkbox"/> NA <input type="checkbox"/> NP
<b>Radiated emissions</b> 30MHz-25GHz* CFR 47 §15.209 (a) CFR 47 §15.247 (d) RSS-210 §A8.5 <b>Highest frequency :</b> <b>(Declaration of provider)</b>	<b>Measure at 3m</b> 30MHz-88MHz : 40 dBμV/m 88MHz-216MHz : 43.5 dBμV/m 216MHz-960MHz : 46.0 dBμV/m Above 960MHz : 54.0 dBμV/m			<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input type="checkbox"/> NP
<b>Bandwidth 6dB</b> CFR 47 §15.247 (a) (2) RSS-210 §A8.2	<b>At least 500kHz</b>			<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input type="checkbox"/> NP
<b>Maximum Peak Output Power</b> CFR 47 §15.247 (b) RSS-210 §A8.4 (4)	<b>Limit: 30dBm</b> Conducted or Radiated measurement			<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input type="checkbox"/> NP
<b>Band Edge Measurement</b> CFR 47 §15.209 (a) CFR 47 §15.247 (d) RSS-210 §A8.5	<b>Limit: -20dBc or</b> <b>Radiated emissions limits in restricted bands</b>			<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input type="checkbox"/> NP
<b>Power spectral Density</b> CFR 47 §15.247 (e) RSS-210 §A8.2	<b>Limit: 8dBm/3kHz</b>			<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input type="checkbox"/> NP
<b>Occupied bandwidth</b> RSS-Gen §4.6.1	<b>No limit</b>			<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input type="checkbox"/> NP
<b>Receiver Spurious Emission**</b> RSS-Gen §4.10	<b>See RSS-Gen §4.10</b>			<input type="checkbox"/> PASS <input type="checkbox"/> FAIL <input checked="" type="checkbox"/> NA <input type="checkbox"/> NP

\*§15.33: The highest internal source of a testing device is defined like more the highest frequency generated or used in the testing device or on which the testing device works or agrees.

- If the highest frequency of the internal sources of the testing device is lower than 108 MHz, measurement must be only performed until 1GHz.

- If the highest frequency of the internal sources of the testing device ranges between 108 MHz and 500 MHz, measurement must be only performed until 2GHz.

- If the highest frequency of the internal sources of the testing device ranges between 500 MHz and 1 GHz, measurement must be only performed until 5GHz.

If the highest frequency of the internal sources of the testing device is above 1 GHz, measurement must be only performed until 5 times the highest frequency or 40 GHz, while taking smallest of both.



## 2. SYSTEM TEST CONFIGURATION

### 2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

#### Equipment under test (EUT):

BL-NR-US

Serial Number: BLNR-0203C6 and BLNR-0203A5



Photography of EUT

#### Power supply:

During all the tests, EUT is supplied by  $V_{nom}$ : 9VDC

For measurement with different voltage, it will be presented in test method.

Name	Type	Rating	Reference / Sn	Comments
Supply1	<input type="checkbox"/> AC <input type="checkbox"/> DC <input checked="" type="checkbox"/> Battery	-	6LR61-6AM6 9V / None	Alkaline Battery

**Inputs/outputs - Cable:**

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
Supply1	DC	0.05	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	-
Access 1	USB	1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Temporary USB installed for the reception of different orders (power, choice of channel, modulation etc.)

**Auxiliary equipment used during test:**

Type	Reference	Sn	Comments
Laptop	ThinkPad Tseries	L3-B746308/01	-

**Equipment information:**

Type:	Bluetooth Low Energy v4.0			
Frequency band:	[2400 – 2483.5] MHz			
Sub-band REC7003:	Annex 3 (a)			
Spectrum Modulation:	<input checked="" type="checkbox"/> DSSS (Tested like it)			
Number of Channel:	40			
Spacing channel:	2MHz			
Channel bandwidth:	1MHz			
Transmit chains:	<input checked="" type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4
	<input checked="" type="checkbox"/> Single antenna	<input type="checkbox"/> Symmetrical	<input type="checkbox"/> Asymmetrical	
	Gain 1: 3dBi	Gain 2: dBi	Gain 3: dBi	Gain 4: dBi
Beam forming gain:	<input type="checkbox"/> Yes: dB		<input checked="" type="checkbox"/> No	
Receiver chains	<input checked="" type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4
Type of equipment:	<input checked="" type="checkbox"/> Stand-alone	<input type="checkbox"/> Plug-in	<input type="checkbox"/> Combined	
Ad-Hoc mode:	<input type="checkbox"/> Yes		<input checked="" type="checkbox"/> No	
Adaptivity mode:	<input type="checkbox"/> Yes (Load Based)	<input type="checkbox"/> Off mode	<input checked="" type="checkbox"/> No	
	Clear Channel Assessment Time:			None
	q value for Load Based Equipment:			None
Duty cycle used for all the tests:	<input checked="" type="checkbox"/> Continuous duty (95%)	<input type="checkbox"/> Intermittent duty	<input type="checkbox"/> Continuous operation	
Real Duty cycle:	2%			
Equipment type:	<input checked="" type="checkbox"/> Production model		<input type="checkbox"/> Prototype	
Chip Reference:	nRF51822 By Nordic Semiconductor			

Temperature range:	Tmin:	<input checked="" type="checkbox"/> -20°C	<input type="checkbox"/> 0°C	<input type="checkbox"/> °C
	Tnom:	20°C		
	Tmax:	<input type="checkbox"/> 35°C	<input checked="" type="checkbox"/> 55°C	<input type="checkbox"/> °C
Test source voltage:	<input type="checkbox"/> AC:	<input type="checkbox"/> DC:	<input checked="" type="checkbox"/> Battery: 9VDC / Alkaline	

**CHANNEL PLAN**

Channel	Frequency (MHz)	Channel	Frequency (MHz)
Cmin: 0	2402	Cmid: 20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	Cmax: 39	2480

**DATA RATE**

Data Rate (Mbps)	Modulation Type	Worst Case Modulation
1	GFSK	<input checked="" type="checkbox"/>

**2.2. EUT CONFIGURATION**


The EUT is set in the following modes during tests with simulator / software (v1.93b): "Terminal"

- Permanent emission with modulation on a fixed channel in the data rate that produced the highest power
- Permanent reception
- The Power order sent for the Module is set at 0dBm.

### 2.3. EQUIPMENT MODIFICATIONS

☐ None ☒ Modification:

The capacity C17 (1pF) between antenna and C9 (capacity) is removed, see following map:

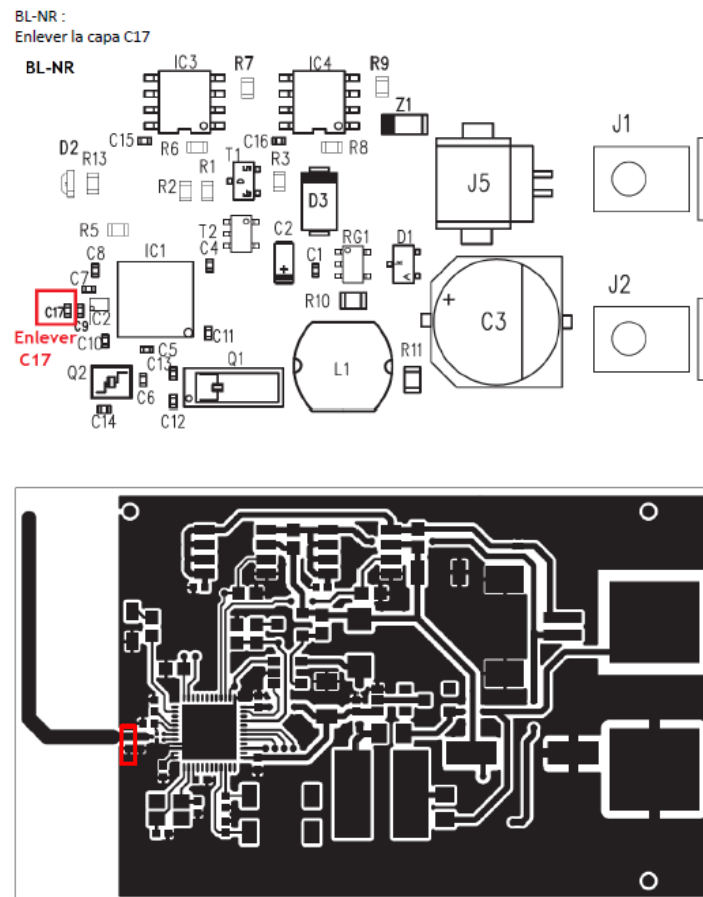

### 2.4. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow:

$$FS = RA + AF + CF - AG$$

Where

- FS = Field Strength
- RA = Receiver Amplitude
- AF = Antenna Factor
- CF = Cable Factor
- AG = Amplifier Gain

Assume a receiver reading of 52.5dBμV is obtained. The antenna factor of 7.4 and a cable factor of 1.1 are added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dBμV/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dBμV/m value can be mathematically converted to its corresponding level in μV/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}.$$



### 3. RADIATED EMISSION DATA

#### 3.1. ENVIRONMENTAL CONDITIONS

Date of test : November 20<sup>th</sup>, 2014  
 Test performed by : G.Deschamps  
 Atmospheric pressure (hPa) : 990  
 Relative humidity (%) : 34  
 Ambient temperature (°C) : 17


#### 3.2. TEST SETUP

The installation of EUT is identical for pre-characterization measures in a 3 meters semi- anechoic chamber and for measures on the 10 meters Open site.




The EUT and auxiliaries are set:

- ☒ 80cm above the ground on the non-conducting table (Table-top equipment)
- ☐ 10cm above the ground on isolating support (Floor standing equipment)

The EUT is powered by  $V_{nom}$ .

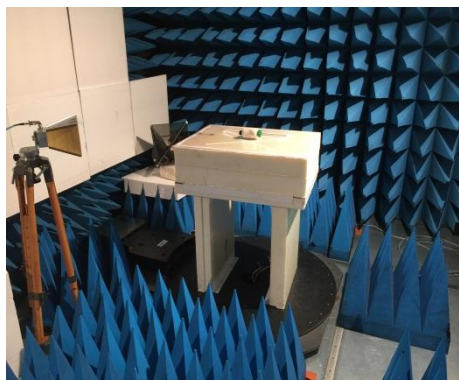

Test setup in anechoic chamber, axis XY

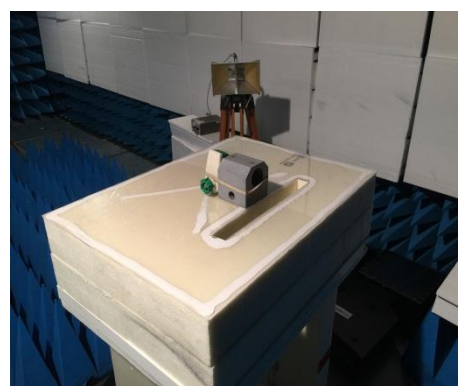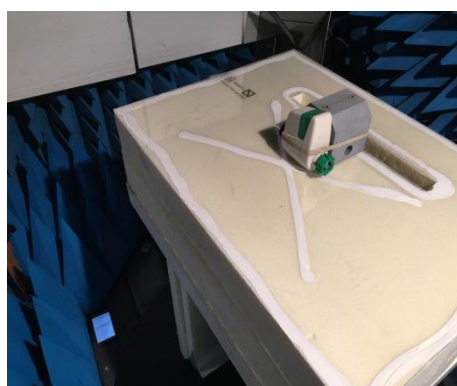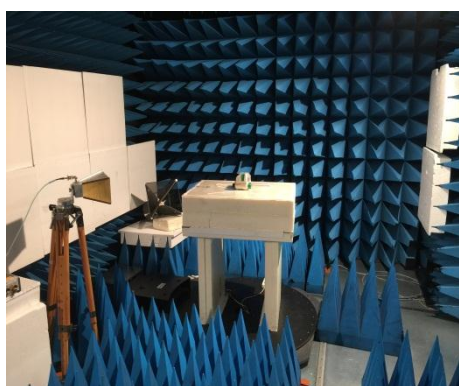

Test setup in anechoic chamber, axis Z





### 3.3. TEST METHOD

#### Pre-characterisation measurement: (9kHz – 1GHz)

A pre-scan of all the setup has been performed in a 3 meters semi-anechoic chamber for frequency from 30MHz to 1GHz. Test is performed in horizontal (H) and vertical (V) polarization, the loop antenna was rotated during the test to maximize the emission measurement. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on all axis of EUT used in normal configuration.

The pre-characterization graphs are obtained in PEAK detection and PEAK/AVERAGE from 1GHz to 25GHz.

#### Characterization on 10 meters open site from 9kHz to 1GHz:

The product has been tested according to ANSI C63.4 (2003), FCC part 15 subpart C. Radiated Emissions were measured on an open area test site. A description of the facility is on file with the FCC. The product has been tested at a distance of **10 meters** from the antenna and compared to the FCC part 15 subpart C §15.225 limits in the frequency range 13.553MHz 13.567MHz. Measurement bandwidth was 9kHz below 30MHz and 120kHz from 30 MHz to 1GHz. Test is performed in horizontal (H) and vertical (V) polarization, the loop antenna was rotated during the test to maximize the emission measurement. The height antenna is varied from 1m to 4m. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on all axis of EUT used in normal configuration. A summary of the worst case emissions found in all test configurations and modes is shown. Frequency list has been created with anechoic chamber pre-scan results.

#### Characterization on 3 meters full anechoic chamber from 1GHz to 25GHz:

The product has been tested at a distance of **3 meters** from the antenna and compared to the FCC part 15 subpart B §15.109 limits and C §15.209 limits. Measurement bandwidth was 1MHz from 1GHz to 25GHz.

Test is performed in horizontal (H) and vertical (V) polarization. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on all axis of EUT used in normal configuration. A summary of the worst case emissions found in all test configurations and modes is shown. The height antenna is

☐ On mast, varied from 1m to 4m

☒ Fixed and centered on the EUT

Frequency list has been created with anechoic chamber pre-scan results.

**3.4. TEST EQUIPMENT LIST**

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Amplifier 1-13GHz	LCIE SUD EST	-	A7102067	10/14	10/15
Antenna Bi-log	CHASE	CBL6111A	C2040172	04/13	04/15
Antenna horn	EMCO	3115	C2042029	09/14	09/15
Cable - Measure	-	-	A5329038	08/14	08/15
Cable Measure	-	-	A5329206	01/14	01/15
Cable Measure	-	18G	A5329603	08/14	08/15
Semi-Anechoic chamber #3	SIEPEL	-	D3044017	-	-
Radiated emission comb generator	BARDET	-	A3169050	-	-
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060050	-	-
Thermo-hygrometer (C3)	OREGON	BAR206	B4204078	01/14	01/15
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011	04/14	04/15
Turntable chamber (Cage#3)	ETS Lingren	Model 2165	F2000371	-	-
Table	LCIE	-	F2000461	-	-
Turntable controller (Cage#3)	ETS Lingren	Model 2090	F2000444	-	-

**3.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION**

☒ None ☐ Divergence:

**3.6. TEST RESULTS****3.6.1. Pre-characterization at 3 meters [30MHz-1GHz]**

See graphs for 30MHz-1GHz:

Graph identifier	Polarization	Mode	EUT position	Channel	Comments
Emr# 1	H	TX	Axis XY	Min/Mid/Max	See annex 1
Emr# 2	V	TX	Axis XY	Min/Mid/Max	See annex 1
Emr# 3	H	TX	Axis Z	Min/Mid/Max	See annex 1
Emr# 4	V	TX	Axis Z	Min/Mid/Max	See annex 1

**3.6.2. Characterization on 10 meters open site from 30MHz to 1GHz****Worst case final data result:**

Frequency list has been created with semi-anechoic chamber pre-scan results.  
Measurements are performed using a QUASI-PEAK detection.

No	Frequency (MHz)	Limit Quasi-Peak (dBμV/m)	Measure Quasi-Peak (dBμV/m)	Margin (Mes-Lim) (dB)	Angle Table (deg)	Pol Ant.	Ht Ant. (cm)	Correc. Factor (dB)	Comments
No significant suspect frequency.									

Note: Measure have been done at 10m distance and corrected according to requirements of 15.209.e)  
(M@3m = M@10m+10.5dB)

**3.6.3. Characterization on 3meters anechoic chamber from 1GHz to 25GHz****Worst case final data result:**

The frequency list is created from the results obtained during the pre-characterization in anechoic chamber. Measurements are performed using a PEAK and AVERAGE detection.

No	Frequency (MHz)	Limit Peak (dBμV/m)	Measure Peak (dBμV/m)	Margin Peak (dB)	Limit Average (dBμV/m)	Average* Calculated (dBμV/m)	Margin Average (dB)	Angle Table (°)	Pol. Ant.	Ht. Ant. (cm)	FC (dB)	Remark
1	1186.700	74.0	27.5	-46.5	54.0	-6.5	-60.5	200	H	100	-7.3	Axis XY
2	1200.580	74.0	27.6	-46.4	54.0	-6.4	-60.4	200	H	100	-7.2	Axis XY
3	1216.200	74.0	27.7	-46.3	54.0	-6.3	-60.3	200	H	100	-7.1	Axis XY
4	1221.400	74.0	27.7	-46.3	54.0	-6.3	-60.3	200	H	100	-7.1	Axis XY
5	1230.100	74.0	27.7	-46.3	54.0	-6.2	-60.2	200	H	100	-7.1	Axis XY
6	2319.110	74.0	62.0	-12.0	54.0	28.0	-26.0	200	H	100	-1.9	Axis XY
7	2374.150	74.0	64.7	-9.3	54.0	30.7	-23.3	200	H	100	-1.8	Axis XY
8	2386.520	74.0	59.2	-14.8	54.0	25.2	-28.8	200	H	100	-1.8	Axis XY
9	2488.800	74.0	61.8	-12.2	54.0	27.8	-26.2	200	H	100	-1.6	Axis XY
10	2494.110	74.0	63.4	-10.6	54.0	29.4	-24.6	200	H	100	-1.6	Axis XY
11	2562.200	74.0	61.5	-12.5	54.0	27.5	-26.5	200	H	100	-1.4	Axis XY
12	4804.000	74.0	70.1	-3.9	54.0	36.1	-17.9	200	H	100	3.9	Axis XY
13	4884.000	74.0	65.5	-8.5	54.0	31.5	-22.5	160	H	100	4.1	Axis XY
14	4960.000	74.0	66.4	-7.6	54.0	32.4	-21.6	190	H	100	4.3	Axis XY
15	7326.000	74.0	58.1	-15.9	54.0	24.1	-29.9	171	H	100	8.2	Axis XY
16	7440.000	74.0	58.8	-15.2	54.0	24.8	-29.2	180	H	100	8.5	Axis XY
17	11826.000	74.0	51.4	-22.6	54.0	17.4	-36.6	0	H	100	11.3	Axis XY

**\*Average results calculated with duty cycle method:**

*Average = Peak measure – 20\*log(real duty cycle).*

*Note: Measures have been done at 3m distance*

**3.7. CONCLUSION**

Radiated emission data measurement performed on the sample of the product **BL-NR-US**, SN: **BLNR-0203C6**, in configuration and description presented in this test report, show levels below the FCC CFR 47 Part 15 and RSS-210 Issue 8 limits.

#### 4. BANDWIDTH (15.247)

##### 4.1. TEST CONDITIONS


Date of test : November 21<sup>st</sup>, 2014  
Test performed by : G.Deschamps  
Atmospheric pressure (hPa) : 995  
Relative humidity (%) : 32  
Ambient temperature (°C) : 19

##### 4.2. SETUP

☒ **Conducted measurement:**

The EUT is turned ON and connected to measurement instrument; the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Offset: Attenuator+cable 10.5dB

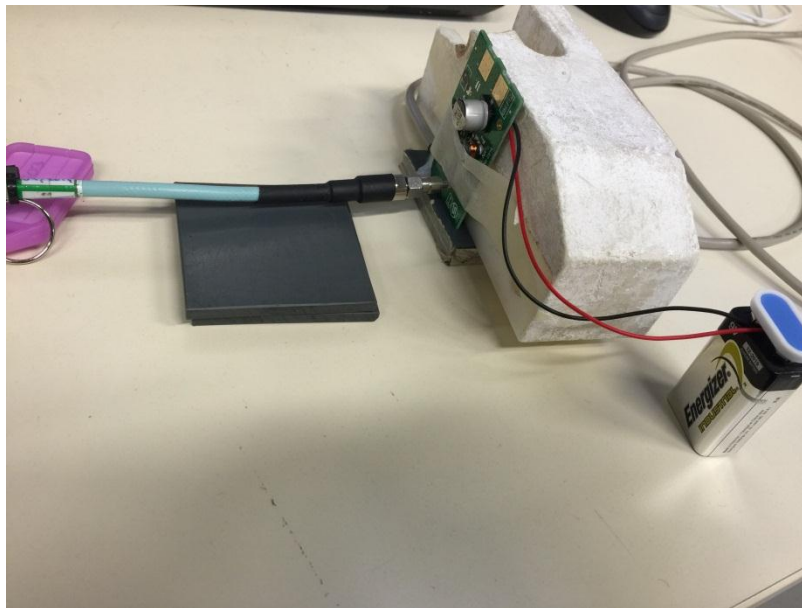

☐ **Radiated measurement:**

The EUT is placed in an anechoic chamber; the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete, a delta marker is used to measure the frequency difference as the emission bandwidth.

**Measurement Procedure:**

1. Set resolution bandwidth (RBW) = 100kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer.




**4.3. TEST EQUIPMENT LIST**

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Attenuator 10dB	JFW	-	A7122166	10/14	10/15
Cable Measure	-	18G	A5329603	08/14	08/15
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060050	-	-
Thermo-hygrometer (C3)	OREGON	BAR206	B4204078	01/14	01/15
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011	04/14	04/15

**4.4. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION**☒ None☐ Divergence:

#### 4.5. TEST SEQUENCE AND RESULTS

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Bandwidth Limit (kHz)
Cmin	2402	709.1	>500
Cmid	2442	774.2	>500
Cmax	2480	781.5	>500

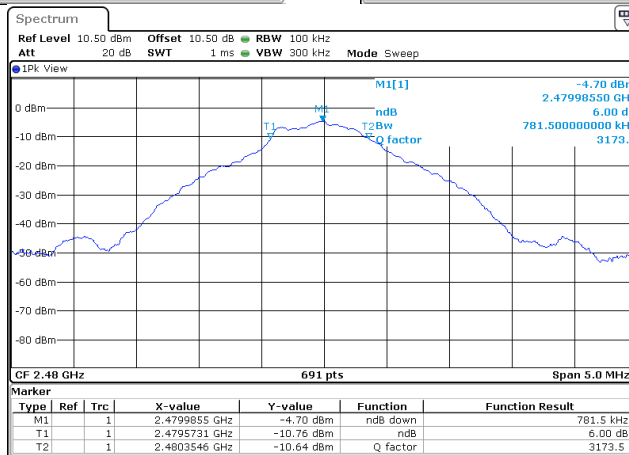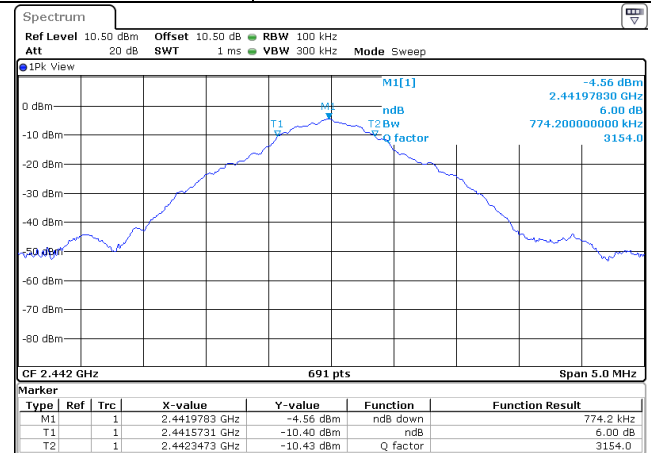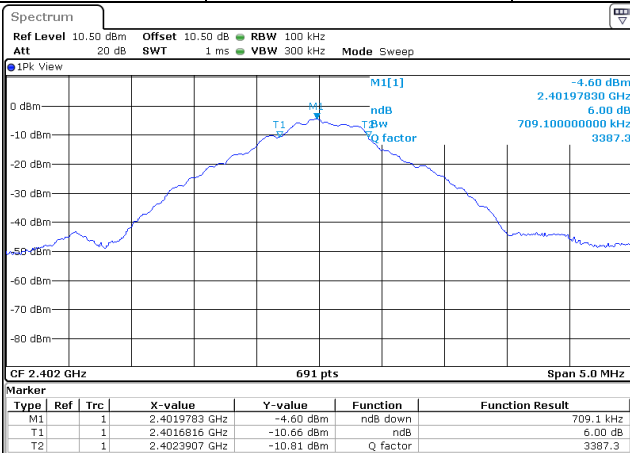

#### 4.6. CONCLUSION

Bandwidth measurement performed on the sample of the product **BL-NR-US**, SN: **BLNR-0203C6**, in configuration and description presented in this test report, show levels below the FCC CFR 47 Part 15 and RSS-210 Issue 8 limits.



## 5. MAXIMUM PEAK OUTPUT POWER (15.247)

### 5.1. TEST CONDITIONS


Date of test : November 21<sup>st</sup>, 2014  
 Test performed by : G.Deschamps  
 Atmospheric pressure (hPa) : 995  
 Relative humidity (%) : 32  
 Ambient temperature (°C) : 19

### 5.2. SETUP

#### ☒ **Conducted measurement:**

The EUT is turned ON and connected to measurement instrument; the center frequency of the spectrum analyzer is set to the fundamental frequency.

Offset: Attenuator+cable 10.5dB

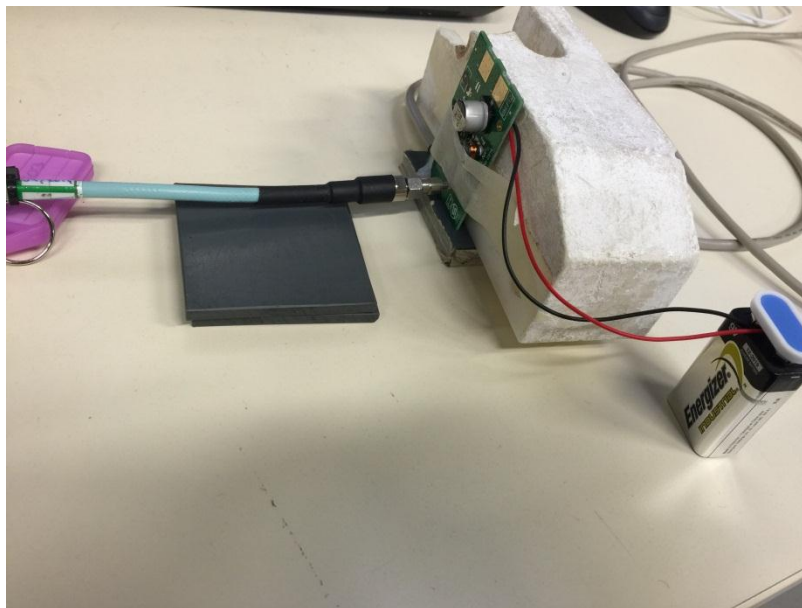

#### ☐ **Radiated measurement:**

The EUT is placed in an anechoic chamber; the center frequency of the spectrum analyzer is set to the fundamental frequency.

The product has been tested at a distance of 3 meters from the antenna. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on 3 axis of EUT. A summary of the worst case emissions found in all test configurations and modes is shown on following table. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

To demonstrate compliance with peak output power requirement of section 15.247 (b), the transmitter's peak output power is calculated using the following equation:

$$E = \frac{\sqrt{30PG}}{d}$$

Where:

- E is the measured maximum fundamental field strength in V/m.
- G is the numeric gain of the transmitting antenna with reference to an isotropic radiator.
- d is the distance in meters from which the field strength was measured.
- P is the power in watts for which you are solving:

$$P = \frac{(Ed)^2}{30G}$$

**Maximum peak conducted output power**

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

- ☒ **RBW  $\geq$  DTS bandwidth**

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- Set the RBW  $\geq$  DTS bandwidth.
- Set VBW  $\geq 3 \times$  RBW.
- Set span  $\geq 3 \times$  RBW
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

- ☐ **Integrated band power method**

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- Set the RBW = 1 MHz.
- Set the VBW  $\geq 3 \times$  RBW
- Set the span  $\geq 1.5 \times$  DTS bandwidth.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges

**5.3. TEST EQUIPMENT LIST**

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Attenuator 10dB	JFW	-	A7122166	10/14	10/15
Cable Measure	-	18G	A5329603	08/14	08/15
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060050	-	-
Thermo-hygrometer (C3)	OREGON	BAR206	B4204078	01/14	01/15
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011	04/14	04/15

**5.4. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION**



- ☒ None ☐ Divergence:



## 5.5. TEST SEQUENCE AND RESULTS

### Modulation:

Channel	Channel Frequency (MHz)	Peak Output Power (dBm)	Power Limit (dBm)
Cmin	2402	-4.52	30.0
Cmid	2442	-4.47	30.0
Cmax	2480	-4.64	30.0

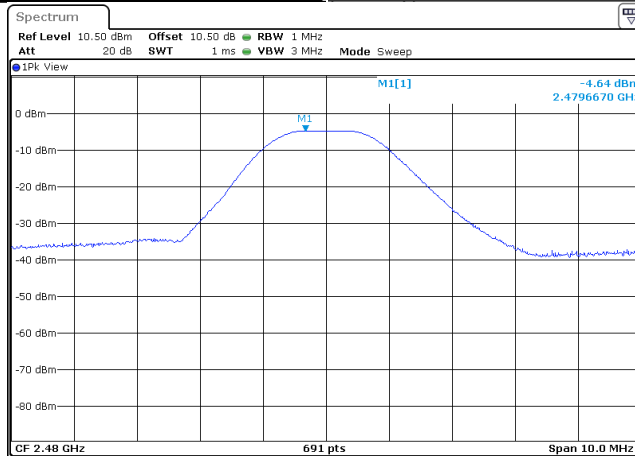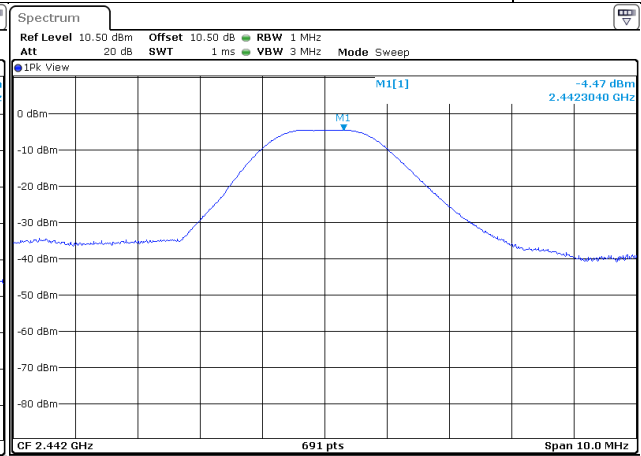

## 5.6. CONCLUSION

Maximum Peak Output Power measurement performed on the sample of the product **BL-NR-US**, SN: **BLNR-0203C6**, in configuration and description presented in this test report, show levels below the FCC CFR 47 Part 15 and RSS-210 Issue 8 limits.



## 6. POWER SPECTRAL DENSITY (15.247)

### 6.1. TEST CONDITIONS

Date of test : November 21<sup>st</sup>, 2014  
 Test performed by : G.Deschamps  
 Atmospheric pressure (hPa) : 995  
 Relative humidity (%) : 32  
 Ambient temperature (°C) : 19

### 6.2. SETUP

#### ☒ **Conducted measurement:**

The EUT is turned ON and connected to measurement instrument; the center frequency of the spectrum analyzer is set to the fundamental frequency.

Offset: Attenuator+cable 10.5dB

#### ☐ **Radiated measurement:**

The EUT is placed in an anechoic chamber; the center frequency of the spectrum analyzer is set to the fundamental frequency.

The product has been tested at a distance of 3 meters from the antenna. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on 3 axis of EUT. A summary of the worst case emissions found in all test configurations and modes is shown on following table. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

To demonstrate compliance with peak output power requirement of section 15.247 (b), the transmitter's peak output power is calculated using the following equation:

$$E = \frac{\sqrt{30PG}}{d}$$

Where:

- E is the measured maximum fundamental field strength in V/m.
- G is the numeric gain of the transmitting antenna with reference to an isotropic radiator.
- d is the distance in meters from which the field strength was measured.
- P is the power in watts for which you are solving:

$$P = \frac{(Ed)^2}{30G}$$

#### **Measurement Procedure PKPSD:**

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

**6.3. TEST EQUIPMENT LIST**

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Attenuator 10dB	JFW	-	A7122166	10/14	10/15
Cable Measure	-	18G	A5329603	08/14	08/15
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060050	-	-
Thermo-hygrometer (C3)	OREGON	BAR206	B4204078	01/14	01/15
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011	04/14	04/15




**6.4. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION**☒ None☐ Divergence:



## 6.5. TEST SEQUENCE AND RESULTS

### Modulation:

Channel	Channel Frequency (MHz)	Power Spectral Density (dBm)	PSD Limit (dBm)
Cmin	2402	-16.08	8.0
Cmid	2442	-16.68	8.0
Cmax	2480	-17.51	8.0

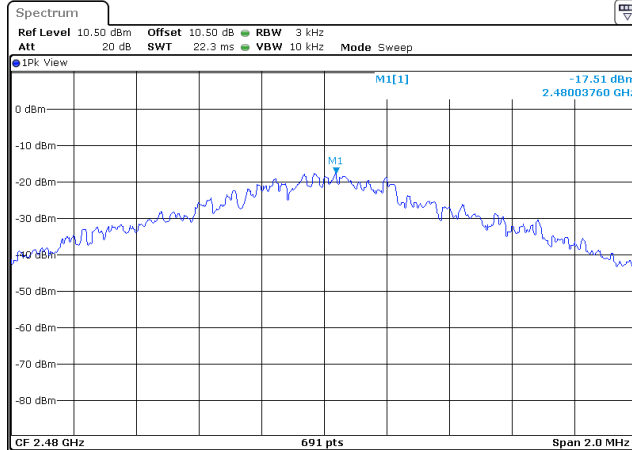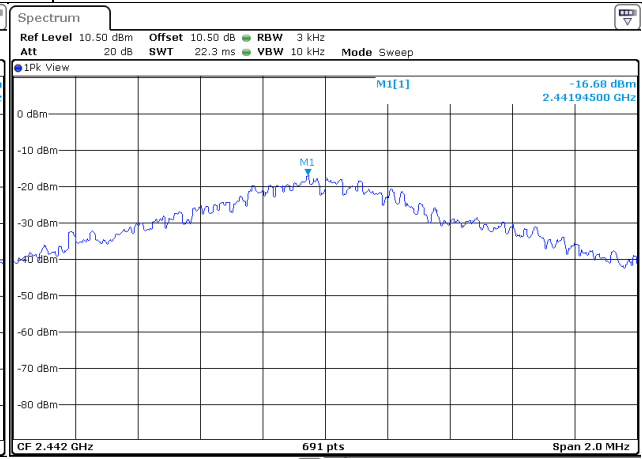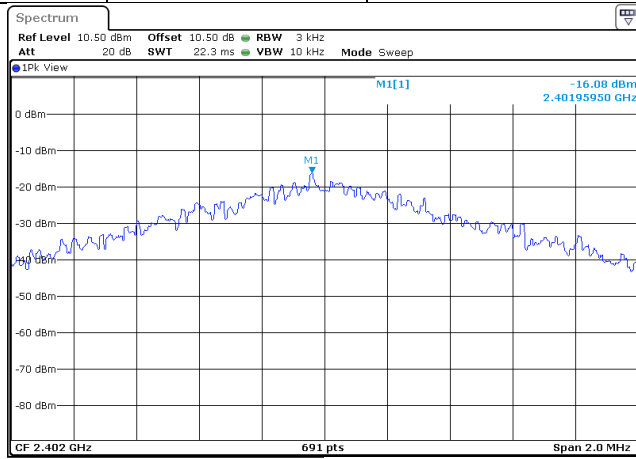

## 6.6. CONCLUSION

Power Spectral Density measurement performed on the sample of the product **BL-NR-US**, SN: **BLNR-0203C6**, in configuration and description presented in this test report, show levels below the FCC CFR 47 Part 15 and RSS-210 Issue 8 limits.





## 7. BAND EDGE MEASUREMENT (15.247)

### 7.1. TEST CONDITIONS

Date of test : November 21<sup>st</sup>, 2014  
 Test performed by : G.Deschamps  
 Atmospheric pressure (hPa) : 995  
 Relative humidity (%) : 32  
 Ambient temperature (°C) : 19

### 7.2. LIMIT

#### **RF antenna conducted test:**

Set RBW = 100 kHz, Video bandwidth (VBW) > RBW, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB. For -20dBc limit, lowest power output level is considered, worst case.

#### **Radiated emission test:**

Applies to harmonics/spurs that fall in the restricted bands listed in Section 15.205. The maximum permitted average field strength is listed in Section 15.209. For measurements above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See results in Radiated emissions section before.

### 7.3. SETUP

The EUT is placed in an anechoic chamber; levels have been corrected to be in compliant with Peak Output Power measurement. The EUT is turn ON; the graphs of the restrict frequency band are recorded with a display line indicating the highest level and other the 20dB offset below to show compliance with 15.247 (d) and 15.205. The emissions in restricted bands are compared to 15.209 limits.

RBW: 100kHz

VBW: 300kHz

### 7.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Attenuator 10dB	JFW	-	A7122166	10/14	10/15
Cable Measure	-	18G	A5329603	08/14	08/15
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060050	-	-
Thermo-hygrometer (C3)	OREGON	BAR206	B4204078	01/14	01/15
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011	04/14	04/15


### 7.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

☒ None

☐ Divergence:


## 7.6. TEST SEQUENCE AND RESULTS

Offset: Attenuator+cable 10.5dB  
GRAPH / MODULATION.

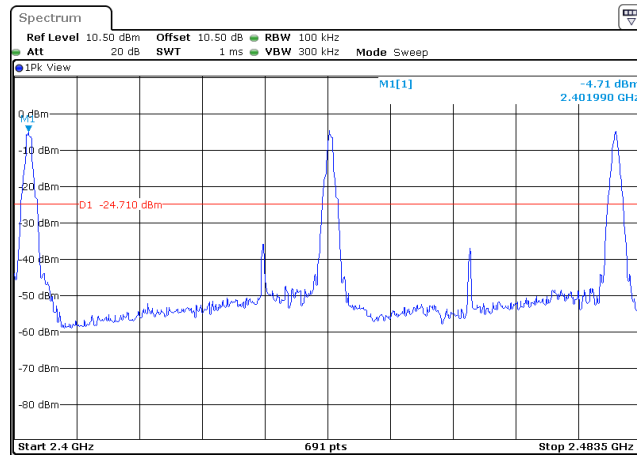


-20dBc limit used: Channel min, worst case: -24.71dBm


From 9 kHz to 150 kHz, channel min/mid/max:

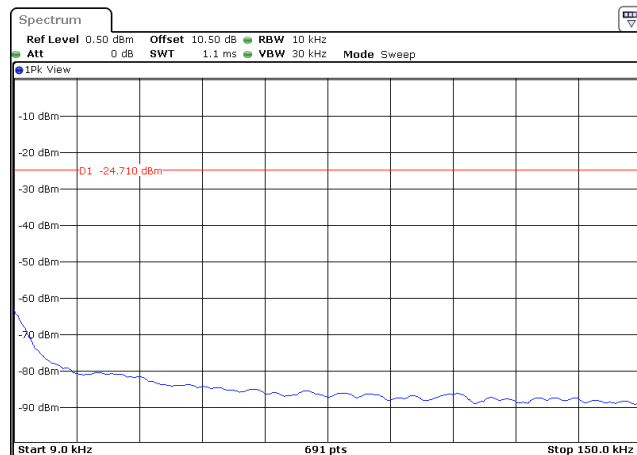


From 150 kHz to 30 MHz, channel min/mid/max:

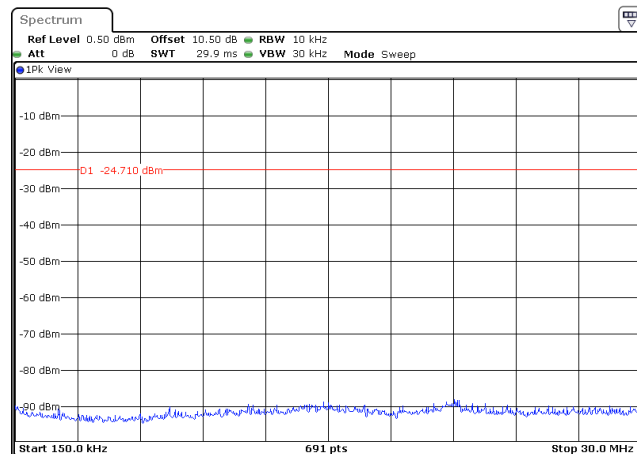

From 30 MHz to 1 GHz, channel min/mid/max:

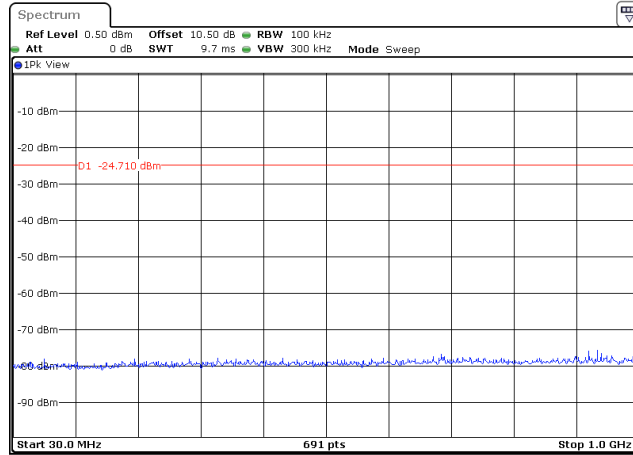


From 1 GHz to 2.2 GHz, channel min/mid/max:

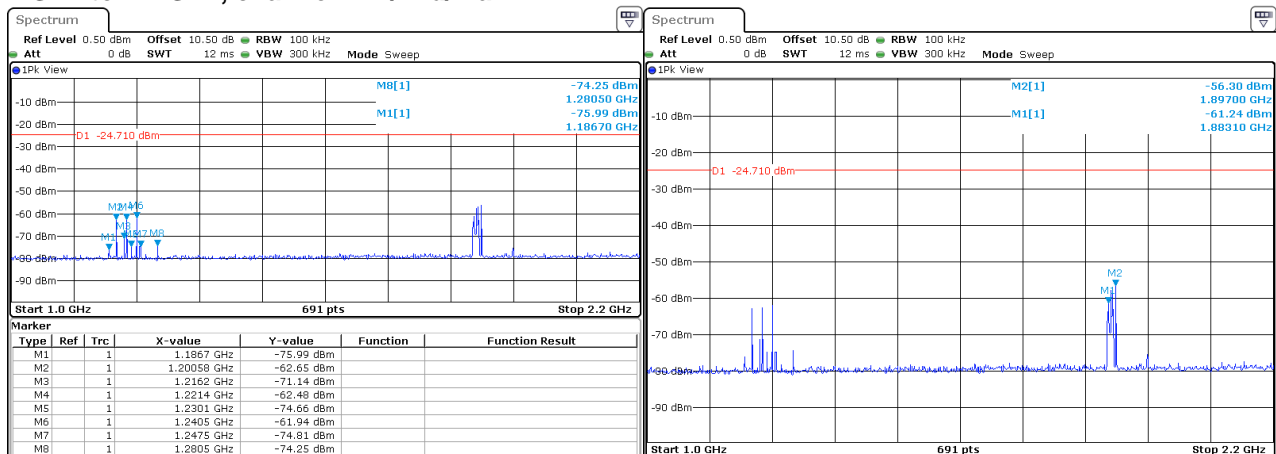


\*In the second graph, the frequencies between the Marker M1 (1.88GHz) and M2 (1.89GHz) are not due to RF module (GSM Frequencies).

From 2.2 GHz to 2.39 GHz, channel min/mid/max:

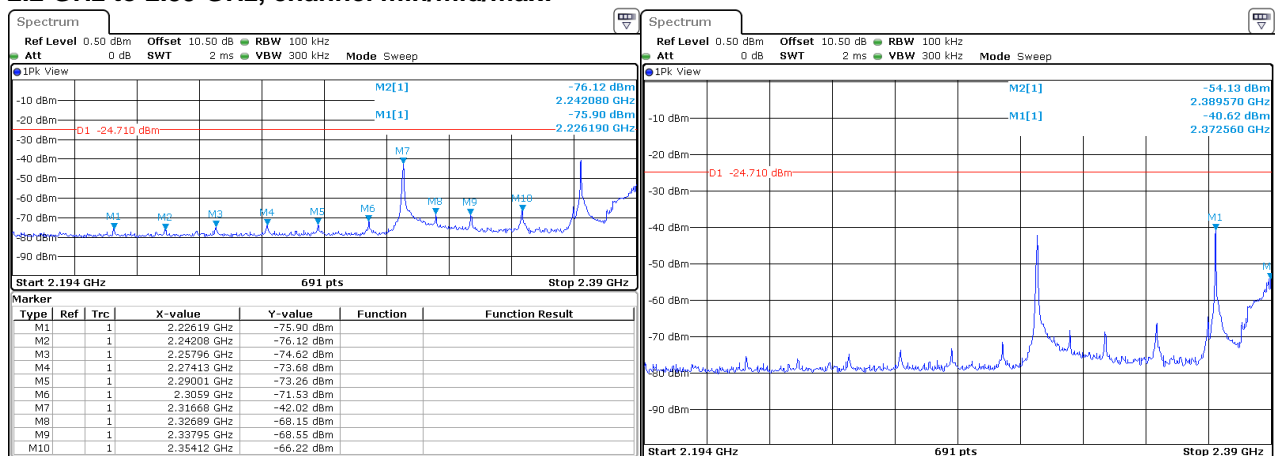





From 2.39 GHz to 2.402 GHz, channel min/mid/max:

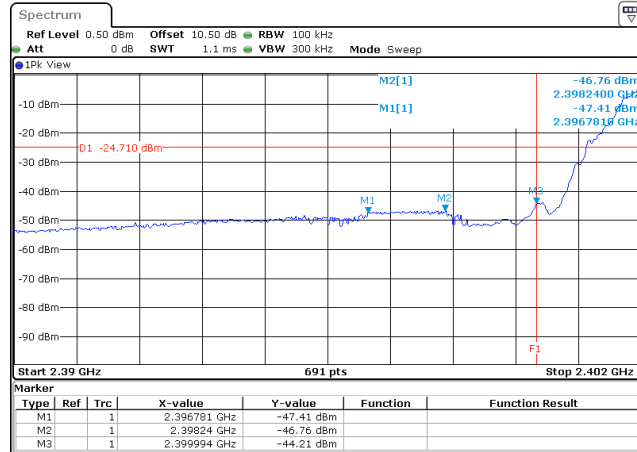

From 2.477 GHz to 2.5 GHz, channel min/mid/max:

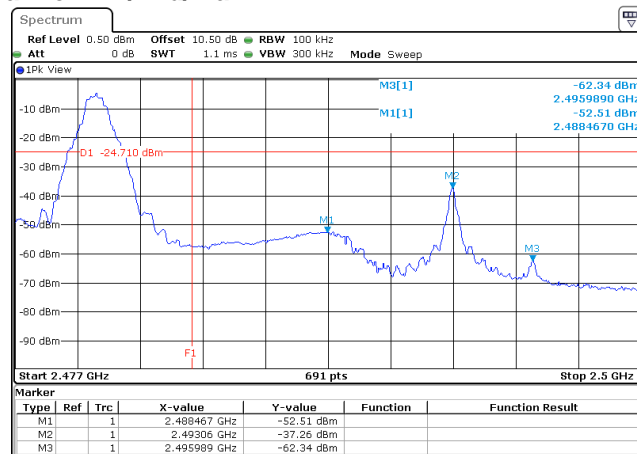


From 2.5 GHz to 2.9 GHz, channel min/mid/max:

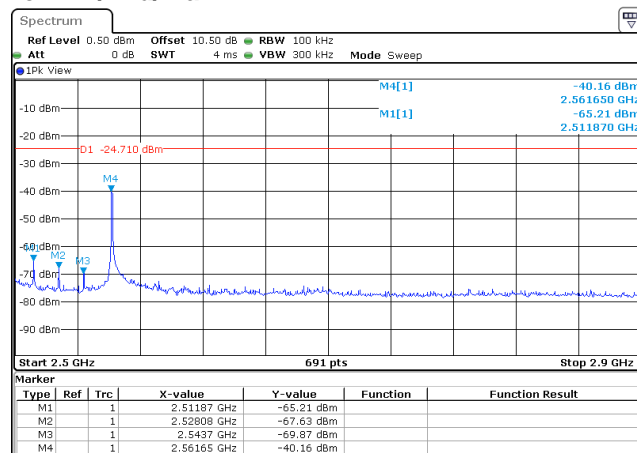




From 2.9 GHz to 8 GHz, channel min/mid/max:

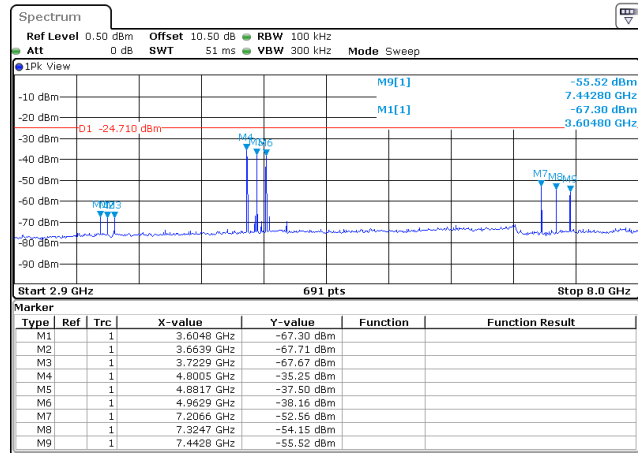

From 8 GHz to 25 GHz, channel min/mid/max:

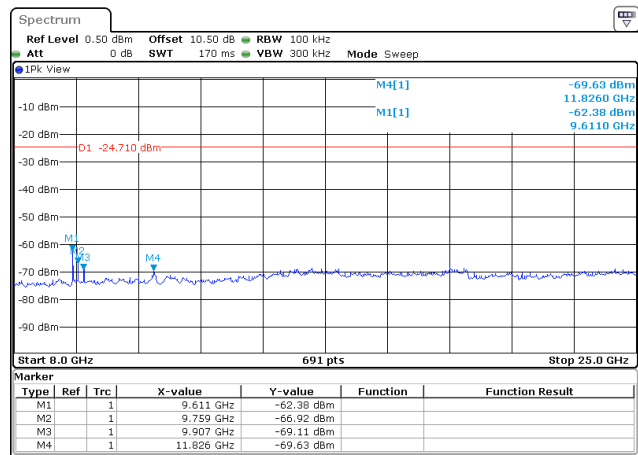

## 7.7. CONCLUSION

Band Edge Measurement performed on the sample of the product **BL-NR-US**, SN: **BLNR-0203C6**, in configuration and description presented in this test report, show levels below the FCC CFR 47 Part 15 and RSS-210 Issue 8 limits.



## 8. OCCUPIED BANDWIDTH

### 8.1. TEST CONDITIONS

Date of test : November 21<sup>st</sup>, 2014  
 Test performed by : G.Deschamps  
 Atmospheric pressure (hPa) : 995  
 Relative humidity (%) : 32  
 Ambient temperature (°C) : 19

### 8.2. SETUP

☒ **Conducted measurement:**

The EUT is turned ON and connected to measurement instrument; the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Offset: Attenuator+cable 10.5dB

☐ **Radiated measurement:**

The EUT is turned ON and connected to measurement instrument; the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

**Measurement Procedure:**

1. RBW used should not be lower than 1% of the selected span
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. OBW 99% function of spectrum analyzer used

### 8.3. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Attenuator 10dB	JFW	-	A7122166	10/14	10/15
Cable Measure	-	18G	A5329603	08/14	08/15
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060050	-	-
Thermo-hygrometer (C3)	OREGON	BAR206	B4204078	01/14	01/15
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011	04/14	04/15




### 8.4. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

☒ None
                 
 ☐ Divergence:



**8.5. TEST SEQUENCE AND RESULTS**


Channel	Channel Frequency (MHz)	99% Occupied Bandwidth (MHz)
Cmin	2402	3.14
Cmid	2442	3.12
Cmax	2480	3.11

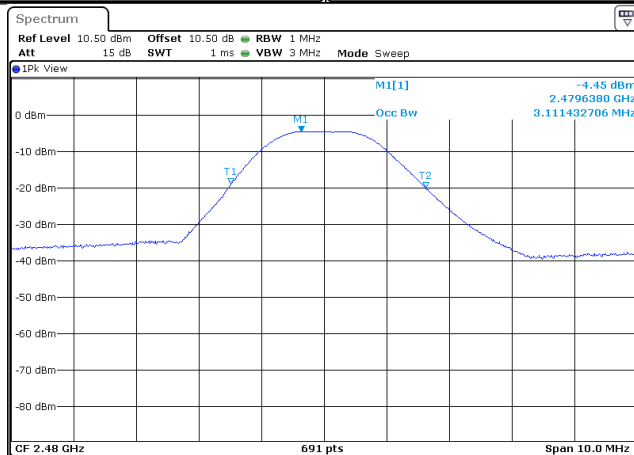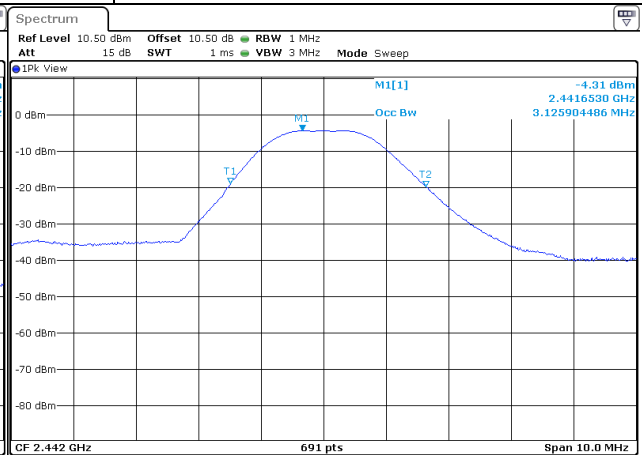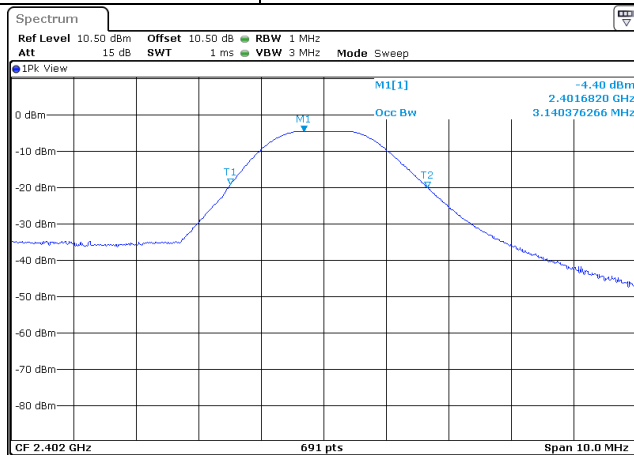

**9. ANNEX 1 (GRAPHS)****RADIATED EMISSIONS**

Graph name:	Emr#1	Test configuration:	
Limit:	FCC CFR47 Part15B	BL NR - (H) - TX mode - Axis XY	
Class:	B		
Frequency range: [30MHz - 1GHz]			
Antenna polarization:	Horizontal	RBW :	100kHz
Azimuth:	0° - 360°	VBW :	300kHz


— FCC/FCC CFR47 Part15B - Classe:B - Moyenne/3.0m/  
— FCC/FCC CFR47 Part15B - Classe:B - QCrête/3.0m/  
— FCC/FCC CFR47 Part15B - Classe:B - Crête/3.0m/  
— Mes.Peak (Horizontale)

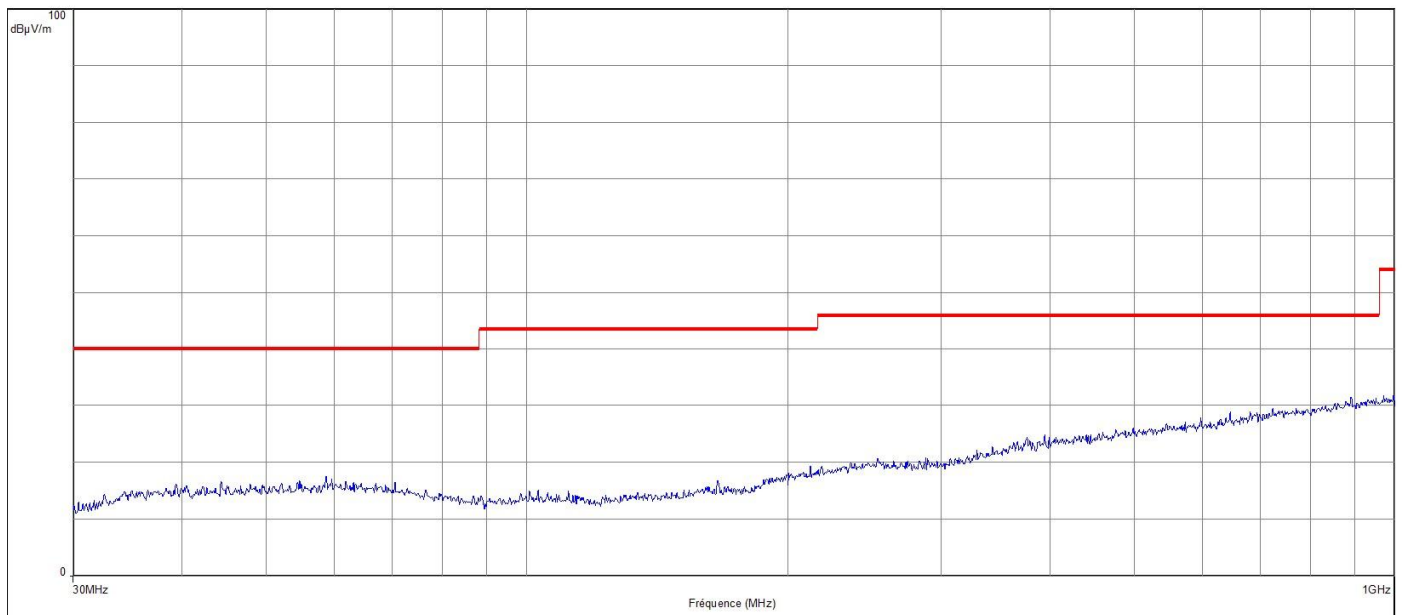**Spurious emissions**

**RADIATED EMISSIONS**

Graph name:	Emr#2	Test configuration:	
Limit:	FCC CFR47 Part15B	BL NR - (V) - TX mode - Axis XY	
Class:	B		
Frequency range: [30MHz - 1GHz]			
Antenna polarization:	Vertical	RBW :	100kHz
Azimuth:	0° - 360°	VBW :	300kHz


- FCC/FCC CFR47 Part15B - Classe:B - Moyenne/3.0m/
- FCC/FCC CFR47 Part15B - Classe:B - QCrête/3.0m/
- FCC/FCC CFR47 Part15B - Classe:B - Crête/3.0m/
- Mes.Peak (Verticale)

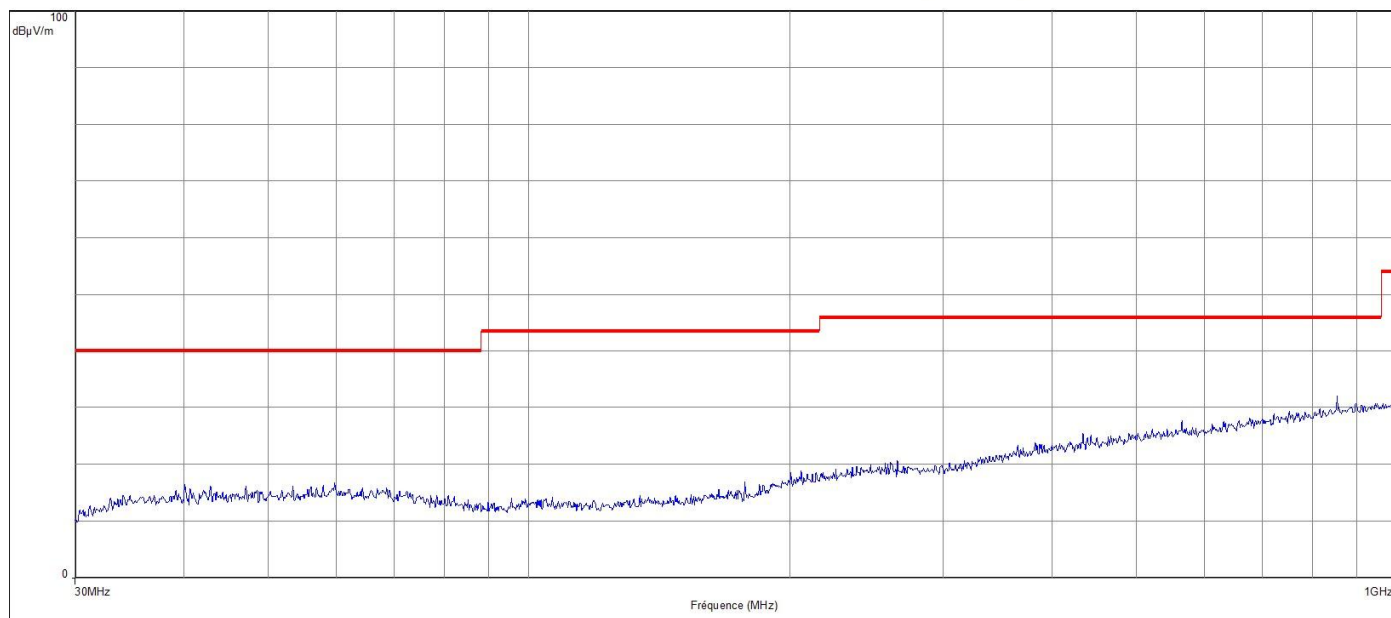**Spurious emissions**

**RADIATED EMISSIONS**

Graph name:	Emr#3	Test configuration:	
Limit:	FCC CFR47 Part15B	BL NR - (H) - TX mode - Axis Z	
Class:	B		
Frequency range: [30MHz - 1GHz]			
Antenna polarization:	Horizontal	RBW :	100kHz
Azimuth:	0° - 360°	VBW :	300kHz


- FCC/FCC CFR47 Part15B - Classe:B - Moyenne/3.0m/
- FCC/FCC CFR47 Part15B - Classe:B - QCrête/3.0m/
- FCC/FCC CFR47 Part15B - Classe:B - Crête/3.0m/
- Mes.Peak (Horizontale)

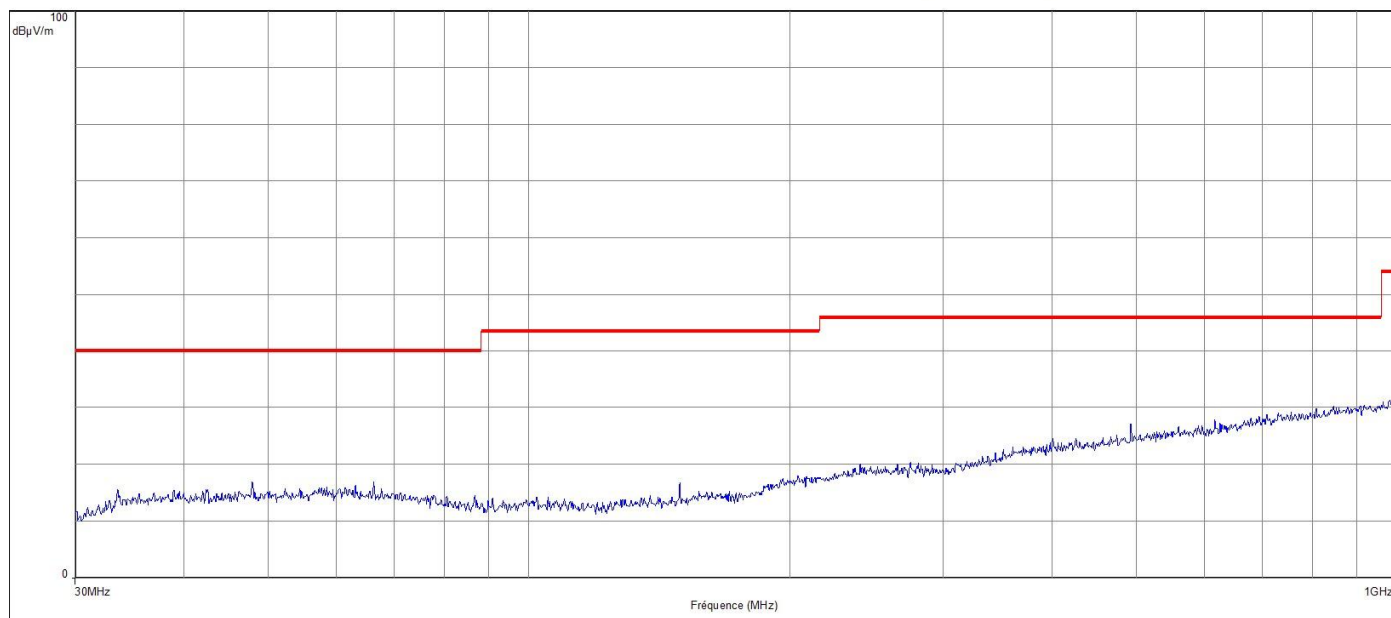**Spurious emissions**

**RADIATED EMISSIONS**

Graph name:	Emr#4	Test configuration:	
Limit:	FCC CFR47 Part15B	BL NR - (V) - TX mode - Axis Z	
Class:	B		
Frequency range: [30MHz - 1GHz]			
Antenna polarization:	Vertical	RBW :	100kHz
Azimuth:	0° - 360°	VBW :	300kHz

— FCC/FCC CFR47 Part15B - Classe:B - Moyenne/3.0m/  
— FCC/FCC CFR47 Part15B - Classe:B - QCrête/3.0m/  
— FCC/FCC CFR47 Part15B - Classe:B - Crête/3.0m/  
— Mes.Peak (Verticale)

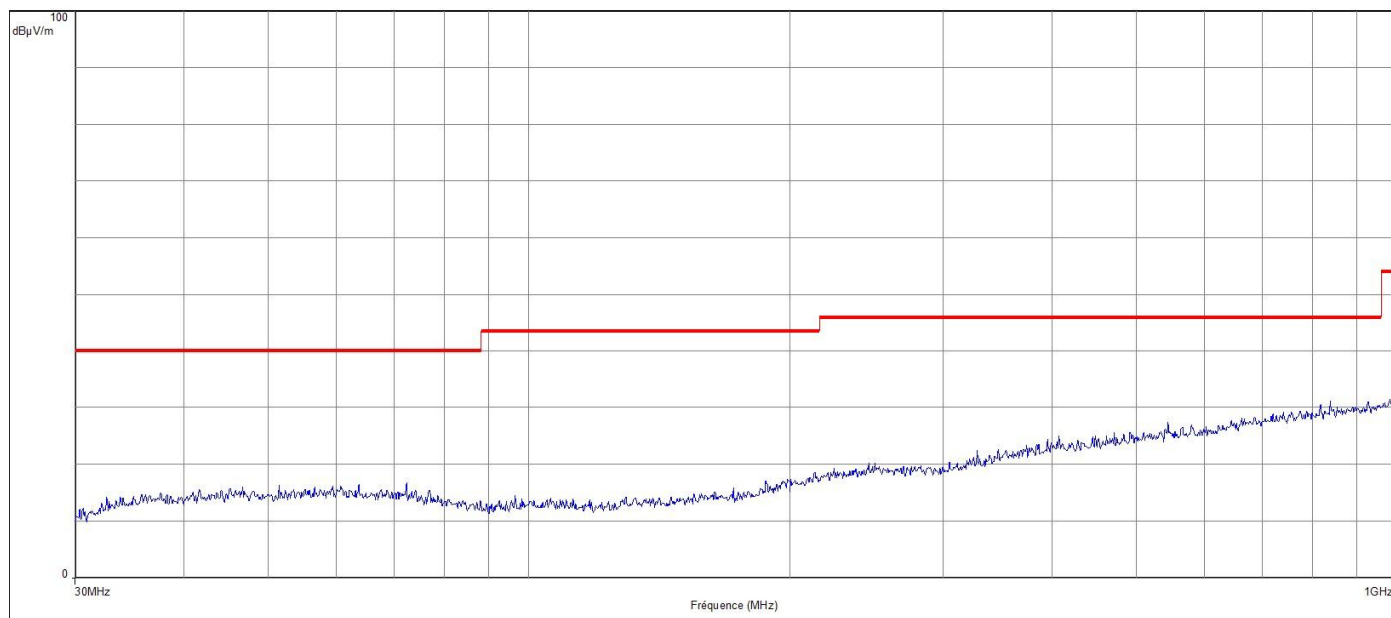**Spurious emissions**

**10. UNCERTAINTIES CHART**

Type de mesure / Kind of measurement	Incertitude élargie laboratoire / Wide uncertainty laboratory (k=2) ± x	Incertitude limite du CISPR / CISPR uncertainty limit ± y
Mesure des perturbations conduites en tension sur le réseau d'énergie <i>Measurement of conducted disturbances in voltage on the power port</i>	3.57 dB	3.6 dB
Mesure des perturbations conduites en tension sur le réseau de télécommunication <i>Measurement of conducted disturbances in voltage on the telecommunication port.</i>	3.28 dB	A l'étude / Under consid.
Mesure des perturbations discontinues conduites en tension <i>Measurement of discontinuous conducted disturbances in voltage</i>	3.47 dB	3.6 dB
Mesure des perturbations conduites en courant <i>Measurement of conducted disturbances in current</i>	2.90 dB	A l'étude / Under consid.
Mesure du champ électrique rayonné sur le site en espace libre de Moirans <i>Measurement of radiated electric field on the Moirans open area test site</i>	5.07 dB	5.2 dB

Les valeurs d'incertitudes calculées du laboratoire étant inférieures aux valeurs d'incertitudes limites établies par la norme, la conformité de l'échantillon est établie directement par les niveaux limites applicables. / The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the standard. The conformity of the sample is directly established by the applicable limits values.