



reference

2J550PCB

mounting position	ON GLASS
nominal impedance	50 Ohms
frequency	AMPS 824-894MHz / GSM 900, 1800 MHz PCN 1,9GHz / UMTS 2,1GHz/ Bluetooth 2,4GHz
polarization	VERTICAL
gain	0 dBi
vswr	<2/1
power handling	25W
housing size	62mm x 22mm x 0,8mm
working temperature	-40°C to +85°C

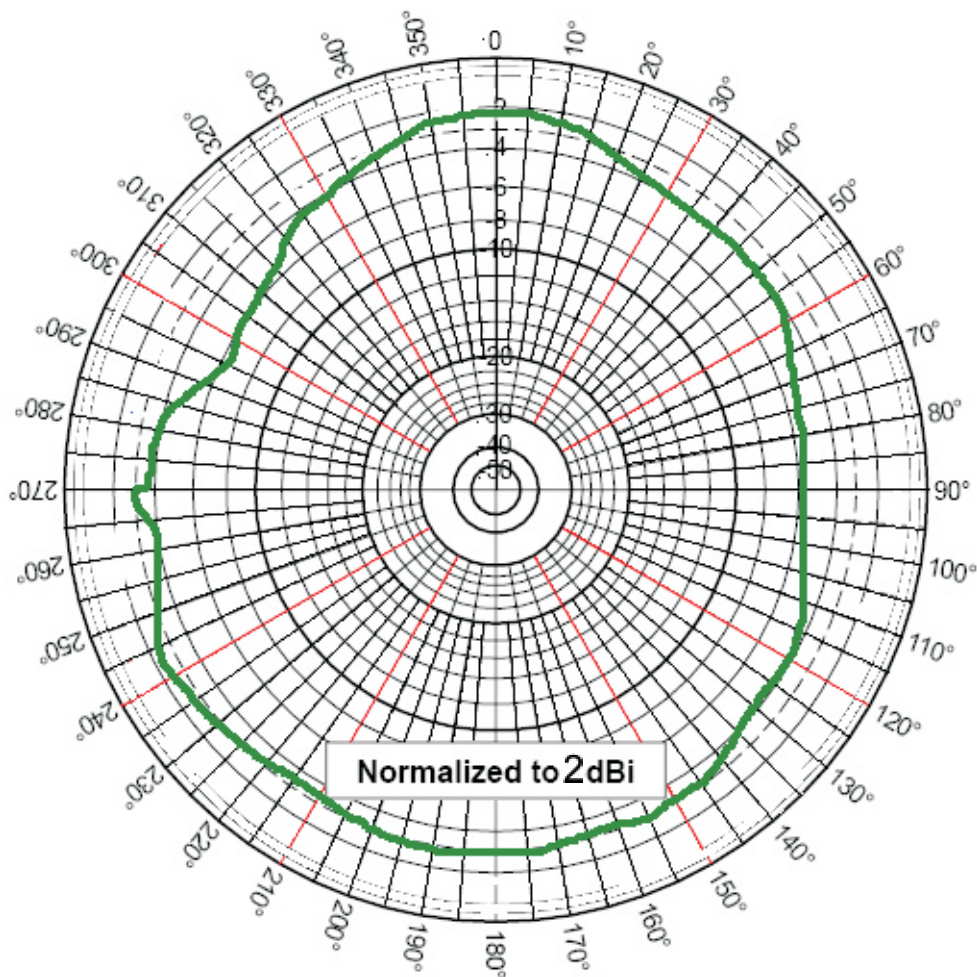


Azimuthal Pattern (X, Y or E-Plane)

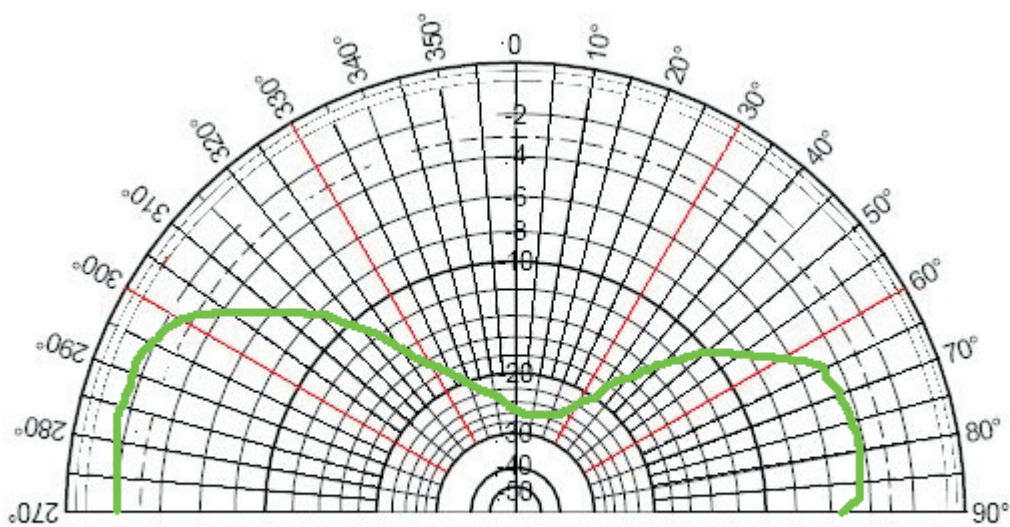


Elevation Pattern (Z, Y or H-Plane)

900 MHz

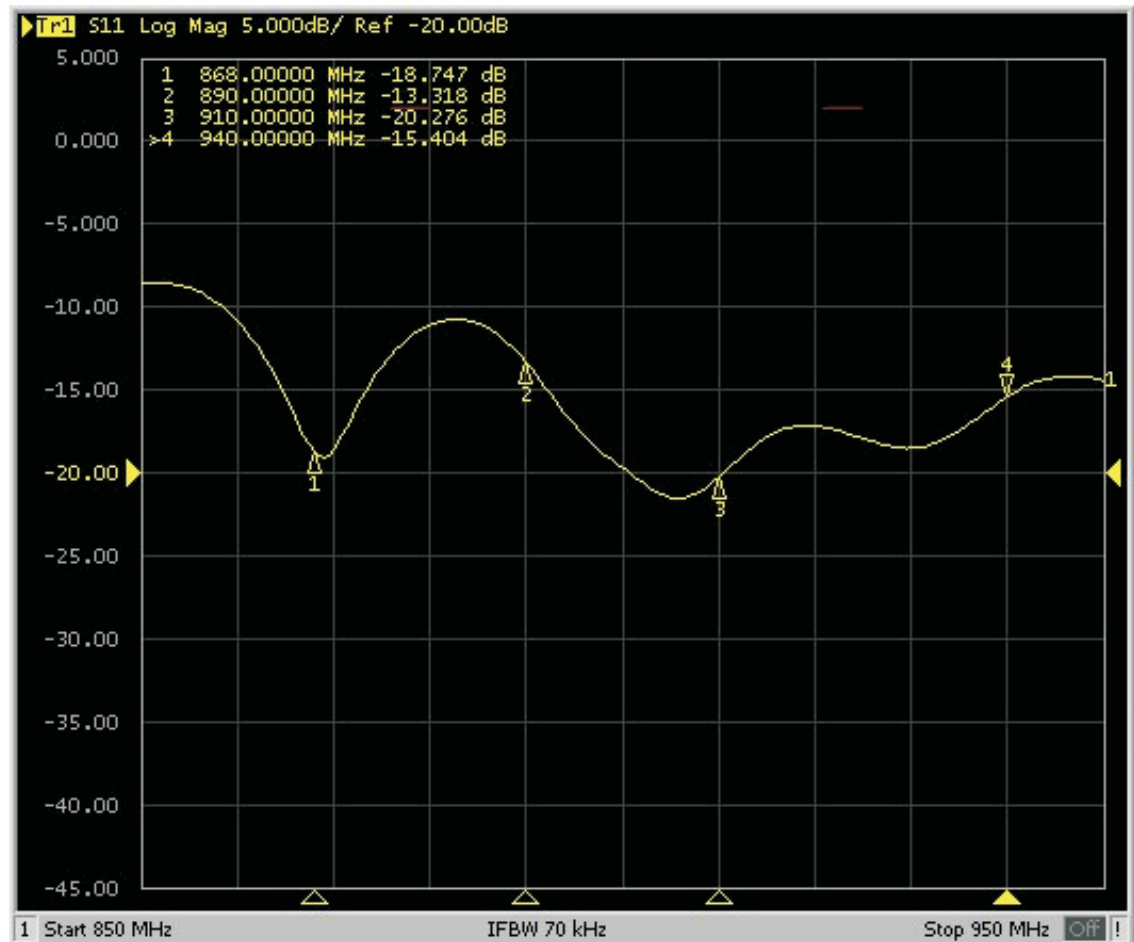


2J550PCB

1800/1900 MHz

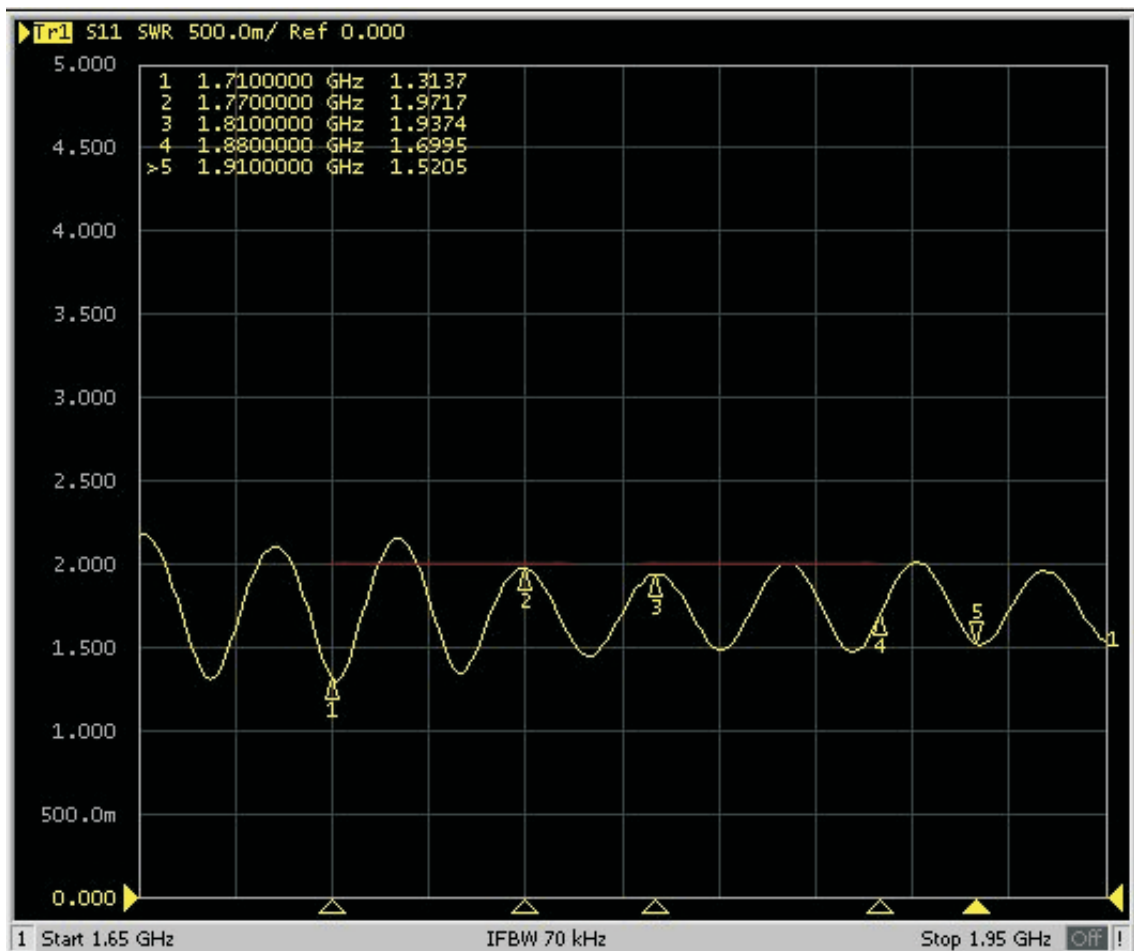

2100 MHz

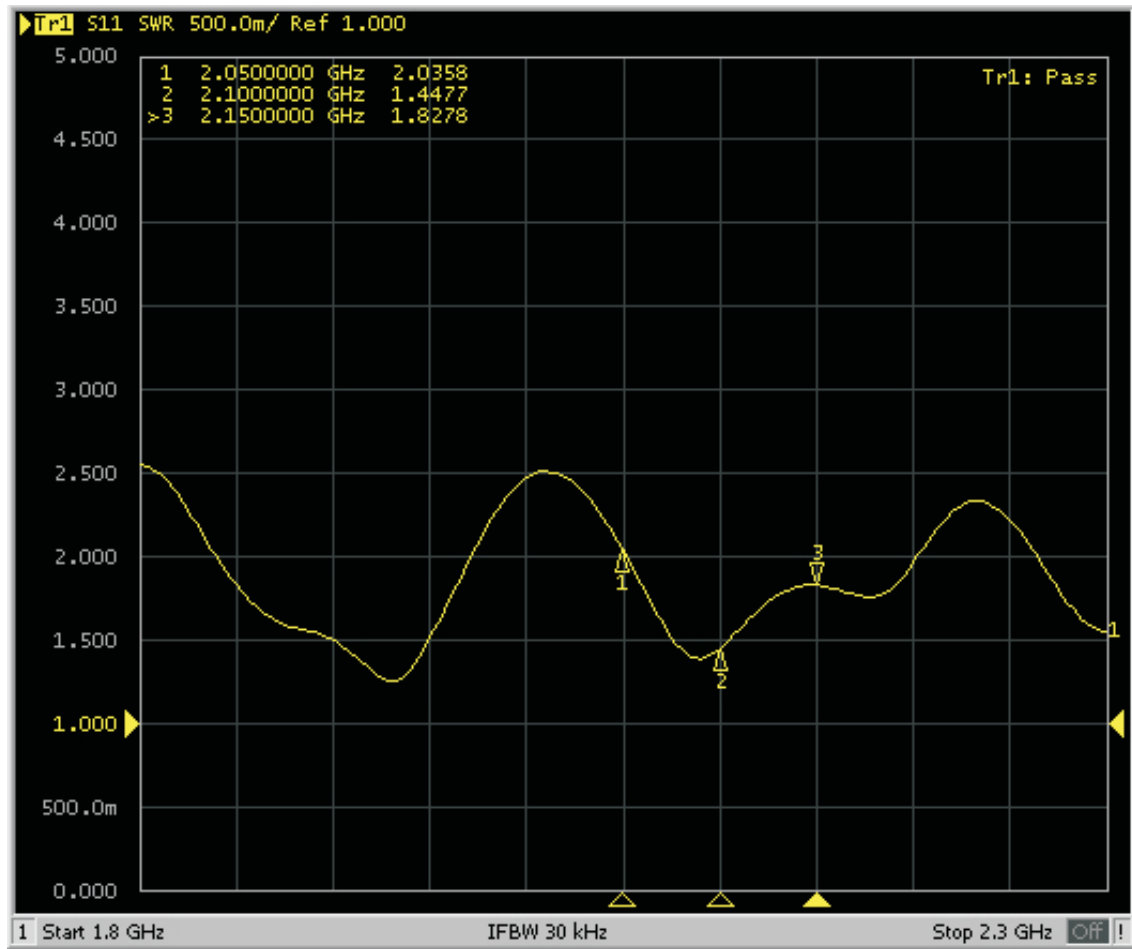

2J550PCB

2400 MHz

